

JEDEC SOLID STATE PRODUCT OUTLINE	THIS <b>REGISTERED OUTLINE</b> HAS BEEN PREPARED BY THE JEDEC JC-11 COMMITTEE AND REFLECTS A PRODUCT WITH ANTICIPATED USAGE IN THE ELECTRONICS INDUSTRY; CHANGES ARE LIKELY TO OCCUR.					
TITLE PLASTIC THIN SHRINK SMALL OUTLINE PACKAGE (SHRINK SOT)	PACKAGE DESIGNATOR R-PDSO-G	ISSUE C	DATE AUG 2010	MO-203	SHEET 1 OF 5	

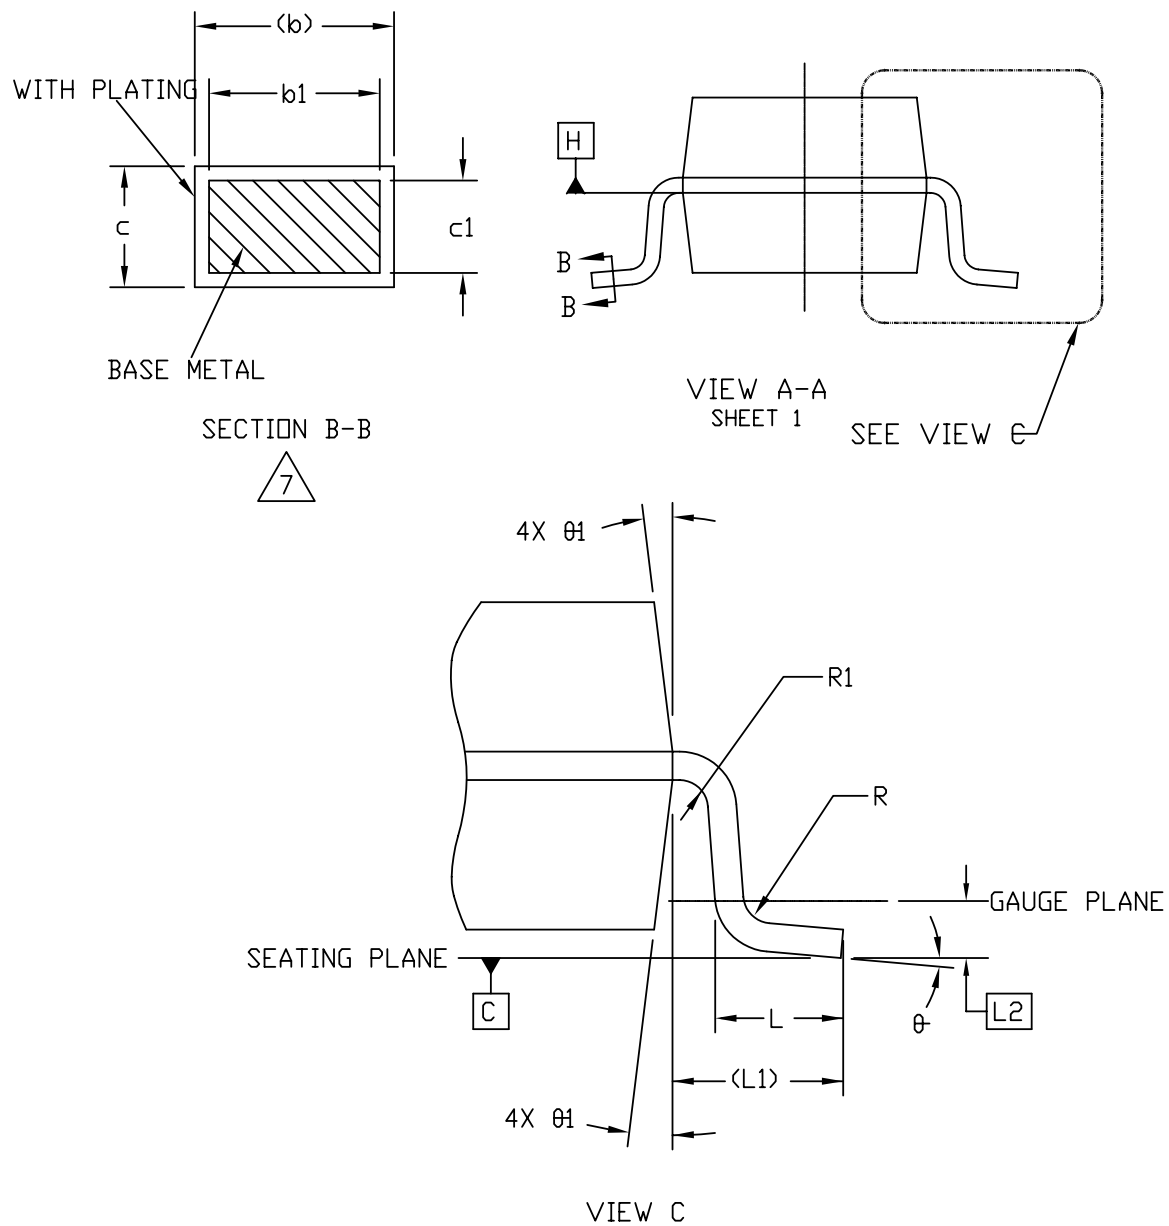



FIGURE 2

JEDEC SOLID STATE PRODUCT OUTLINE	TITLE PLASTIC THIN SHRINK SMALL OUTLINE PACKAGE (SHRINK SOT)	ISSUE C	DATE AUG 2010	MO-203	SHEET 2 OF 5
---	--	------------	---------------------	--------	-----------------

COMMON DIMENSIONS AND TOLERANCES																
SYMBOL	ALL DIMENSIONS IN MILLIMETERS			NOTES	SYMBOL	TOLERANCES OF FORM AND POSITION			NOTES							
	MINIMUM	NOMINAL	MAXIMUM													
A	–	–	1.10		aaa	0.15										
A1	0	–	0.10		bbb	0.30										
A2	0.70	0.90	1.00		ccc	0.10										
c	0.08	–	0.22	7												
c1	0.08	0.13	0.20	7	NOTES	1,2										
D	2.00 BSC			3,4	REF	10-373										
E	2.10 BSC			3,4	ISSUE	A										
E1	1.25 BSC			3,4												
L	0.26	0.36	0.46													
L1	0.42 REF															
L2	0.15 BSC															
R	0.10	–	–													
R1	0.10	–	0.25													
θ	0°	4°	8°													
θ1	4°	–	12°													
NOTES	1, 2															
REF	10-373															
ISSUE	A															
VARIATIONS																
SYMBOL	AA 			NOTES						AB			NOTES	BA		
	MIN.	NOM.	MAX.		MIN.	NOM.	MAX.	MIN.	NOM.	MAX.						
b	0.15	–	0.30	7	0.15	–	0.30	7	0.15	–	0.27	7				
b1	0.15	0.20	0.25	7	0.15	0.20	0.25	7	0.15	0.18	0.23	7				
e	0.65 BSC				0.65 BSC				0.50 BSC							
e1	1.30 BSC				1.30 BSC				1.50 BSC							
N	5				6				8							
TOLERANCES OF FORM AND POSITION																
ddd	0.10				0.10				.010							
NOTE	1, 2, 8				1, 2, 8				1, 2, 8							
REF	10-373				10-373				10-398							
ISSUE	A				A				B							
JEDEC SOLID STATE PRODUCT OUTLINE			TITLE PLASTIC THIN SHRINK SMALL OUTLINE PACKAGE (SHRINK SOT)					ISSUE C	DATE AUG 2010	MD-203		SHEET 3 OF 5				

NOTES:

1. DIMENSIONING AND TOLERANCING PER ASME Y14.5M-1994.

2. DIMENSIONS IN MILLIMETERS.



DIMENSION D DOES NOT INCLUDE MOLD FLASH, PROTRUSIONS OR GATE BURRS. MOLD FLASH, PROTRUSIONS OR GATE BURRS SHALL NOT EXCEED 0.20 mm PER END. DIMENSION E1 DOES NOT INCLUDE INTERLEAD FLASH OR PROTRUSION. INTERLEAD FLASH OR PROTRUSION SHALL NOT EXCEED 0.20 mm PER SIDE. D AND E1 DIMENSIONS ARE DETERMINED AT DATUM H



THE PACKAGE TOP MAY BE SMALLER THAN THE PACKAGE BOTTOM. DIMENSIONS D AND E1 ARE DETERMINED AT THE OUTERMOST EXTREMES OF THE PLASTIC BODY EXCLUSIVE OF MOLD FLASH, TIE BAR BURRS, GATE BURRS AND INTERLEAD FLASH, BUT INCLUDING ANY MISMATCH BETWEEN THE TOP AND BOTTOM OF THE PLASTIC BODY. D AND E1 DIMENSIONS ARE DETERMINED AT DATUM H.



DATUMS A & B TO BE DETERMINED AT DATUM H.



PACKAGE VARIATION "AA" IS A 5 LEAD VERSION OF THE 6 LEAD VARIATION "AB" WHERE LEAD #5 HAS BEEN REMOVED FROM THE 6 LEAD "AB" VARIATION.



THESE DIMENSIONS APPLY TO THE FLAT SECTION OF THE LEAD BETWEEN 0.08 mm AND 0.15 mm FROM THE LEAD TIP.



DIMENSION 'b' DOES NOT INCLUDE DAMBAR PROTRUSION. ALLOWABLE DAMBAR PROTRUSION SHALL BE 0.08 mm TOTAL IN EXCESS OF THE "b" DIMENSION AT MAXIMUM MATERIAL CONDITION. THE DAMBAR CANNOT BE LOCATED ON THE LOWER RADIUS OF THE FOOT. MINIMUM SPACE BETWEEN PROTRUSION AND AN ADJACENT LEAD SHALL NOT BE LESS THAN 0.07 mm.



DETAILS OF THE PIN 1 IDENTIFIER ARE OPTIONAL, BUT MUST BE LOCATED WITHIN THE ZONE INDICATED.

JEDEC SOLID STATE PRODUCT OUTLINE	TITLE PLASTIC THIN SHRINK SMALL OUTLINE PACKAGE (SHRINK SOT)	ISSUE C	DATE AUG 2010	MO-203	SHEET 4 OF 5
---	--	------------	---------------------	--------	-----------------

# Change Record





If the changes involves any words added or deleted ( excluding deletion of accidentally repeated words), the change is included. Punctuation changes may or may not be included.

## Revision History:

Issue: B	Date: February 2000	Item: 10-398
----------	---------------------	--------------

Location	Change from:	Change to:
Page 3	n/a	Add variation BA

Issue: C	Date: March 2010	Item: 11-834
----------	------------------	--------------

Location	Change from:	Change to:
Page 1	 aaaC A-B 2X	 aaaH A-B 2X
	 aaaC D 2X	 aaaH D 2X
	Remove E/2	Add D/2
Page 4 (note )	End flash ...0.15mm....	End flash ...0.20mm....
	Interlead flash ...0.15mm....	Interlead flash ...0.20mm....

Issue:	Date:	Item:
--------	-------	-------

Location	Change from:	Change to: