

JEDEC STANDARD

DDR5 Clocked Unbuffered Dual Inline Memory Module (CUDIMM and CQDIMM) Common Standard

JESD323B

Version 2.0

(Revision of JESD323A_v1.1, February 2025)

FEBRUARY 2026

JEDEC SOLID STATE TECHNOLOGY ASSOCIATION



NOTICE

JEDEC standards and publications contain material that has been prepared, reviewed, and approved through the JEDEC Board of Directors level and subsequently reviewed and approved by the JEDEC legal counsel.

JEDEC standards and publications are designed to serve the public interest through eliminating misunderstandings between manufacturers and purchasers, facilitating interchangeability and improvement of products, and assisting the purchaser in selecting and obtaining with minimum delay the proper product for use by those other than JEDEC members, whether the standard is to be used either domestically or internationally.

JEDEC standards and publications are adopted without regard to whether or not their adoption may involve patents or articles, materials, or processes. By such action JEDEC does not assume any liability to any patent owner, nor does it assume any obligation whatever to parties adopting the JEDEC standards or publications.

The information included in JEDEC standards and publications represents a sound approach to product specification and application, principally from the solid state device manufacturer viewpoint. Within the JEDEC organization there are procedures whereby a JEDEC standard or publication may be further processed and ultimately become an ANSI standard.

No claims to be in conformance with this standard may be made unless all requirements stated in the standard are met.

All risk and liability relating to the use of JEDEC standards is assumed by the user, who agrees to indemnify and hold JEDEC harmless.

Inquiries, comments, and suggestions relative to the content of this JEDEC standard or publication should be addressed to JEDEC at the address below, or refer to www.jedec.org under Standards and Documents for alternative contact information.

Copyright © JEDEC Solid State Technology Association 2026. All rights reserved.

JEDEC retains the copyright on this material. By downloading this file the individual agrees not to charge for or resell the resulting material.

PRICE: Contact JEDEC
3103 10th Street North, Suite 240S, Arlington, VA 22201

DO NOT VIOLATE
THE
LAW!

This document is copyrighted by JEDEC and may not be
reproduced without permission.

For information, contact:

JEDEC Solid State Technology Association
3103 10th Street North
Suite 240S
Arlington, VA 22201
<https://www.jedec.org/contact>

This page intentionally left blank

DDR5 Clocked Unbuffered Dual Inline Memory Module (CUDIMM and CQDIMM) Common Standard

Contents

	Pages
1 Scope	1
2 Normative References	1
3 Product Family Attributes	2
4 Environmental Requirements	2
5 Connector Pinout and Signal Description	3
5.1 DDR5 CUDIMM and CQDIMM Connector Pin Assignments	5
6 Power Details	8
6.1 DIMM Voltage Requirements and Power-Up and Power-Down Sequence	8
6.2 Soft Stop Time Programing for the PMIC Registers	8
7 Component Details	9
7.1 Component Types and Placement	9
7.2 Decoupling Guidelines	11
8 DIMM Design Details	12
8.1 Signal Groups	12
8.2 Explanation of Net Structure Diagrams	12
8.3 General Net Structure Routing Rules	13
8.3.1 CK, CMD/ADR, and CS Groups	13
8.3.2 Lead-in versus Loaded Sections	16
8.3.3 Length/Delay Matching to SDRAM Devices	16
8.3.4 Velocity Compensation	16
8.3.5 Load/Delay Compensation	17
8.3.6 Data and Strobe Group	17
8.3.7 ALERT _n Wiring	18
8.3.8 RESET _n Wiring	19
8.3.9 Via Compensation	20
8.3.10 Plane Referencing	21
8.4 Address Mirroring	21
8.5 DIMM Routing Space Constraints	22
8.6 DIMM Physical Requirements	23
8.6.1 Via Placement	23
8.6.2 Component Pad Sizes and Geometry	23
8.6.3 Unused CLK, CS Termination	23
8.6.4 DQ/CA Stub Resistor	23
8.6.5 ZQ Calibration Wiring	23
8.6.6 TEN Wiring	23

DDR5 Clocked Unbuffered Dual Inline Memory Module (CUDIMM and CQDIMM) Common Standard

Contents (cont'd)

8.6.7	Loop Back Wiring	23
8.6.8	MIR Wiring	23
8.6.9	CA_ODT Wiring	23
8.6.10	CAI Wiring	24
8.6.11	TVS	24
8.7	Reference Stackups	25
8.8	Impedance Targets	26
8.9	Module Sideband Bus	27
8.10	DQ Swizzling Rules	28
9	DIMM Impedance Profile	28
10	Serial Presence Detect	28
11	Product Label	28
12	JEDEC Process	28
	Annex A — (Informative) Differences between Revisions	29

Tables

	Page
Table 1 — Product Family Attributes	2
Table 2 — Environmental Parameters (Example)	2
Table 3 — Pin Definition	3
Table 4 — Input/Output Functional Description	4
Table 5 — DDR5 288 Pin CUDIMM Pin Wiring Assignments	5
Table 6 — PMIC5100 Register Setting for the Soft Stop	8
Table 7 — PMIC5120 Register Setting for the Soft Stop	8
Table 8 — DDR5 x8 SDRAM Pad Array	9
Table 9 — DDR5 x16 SDRAM Pad Array	10
Table 10 — Decoupling Capacitor Guidelines	11
Table 11 — Simulation Conditions Example	13
Table 12 — CK, CMD/ADR, and CS Group Length Matching Rules	15
Table 13 — Data and Strobe Group Length Matching Rules	17
Table 14 — Plane Referencing	21
Table 15 — DIMM Routing Space Constraints	22
Table 16 — Preferred 8 Layer Stackup for CUDIMMs	25
Table 17 — Target Impedance Assignment by Signal Type	26

**DDR5 Clocked Unbuffered Dual Inline Memory Module (CUDIMM and CQDIMM)
Common Standard**

Contents (cont'd)

Figures	Page
Figure 1 — Net Structure Example for Two Rank DIMM.....	12
Figure 2 — FlyBy Topology Example	14
Figure 3 — CK, CMD/ADR, and CS Routing Topology Examples	14
Figure 4 — ALERT_n Wiring Examples	18
Figure 5 — RESET_n Wiring Example	19
Figure 6 — Via Compensation Explanation	20
Figure 7 — Sideband Bus Wiring Example.....	27

This page intentionally left blank

DDR5 Clocked Unbuffered Dual Inline Memory Module (CUDIMM and CQDIMM) Common Standard

(From JEDEC Board Ballot JCB-25-86 formulated under the cognizance of the JC-45.3 Subcommittee on Unbuffered DRAM Modules, item number 2295.01C).

1 Scope

This standard defines the electrical and mechanical requirements for 288-pin, 1.1 V (VDD), Clocked, Unbuffered, Double Data Rate, Synchronous DRAM Dual In-Line Memory Modules (DDR5 SDRAM CUDIMMs), and 288-pin, 1.1 V (VDD), Clocked, Quad rank unbuffered, Double Data Rate, Synchronous DRAM Dual In-Line Memory Modules (DDR5 SDRAM CQDIMMs). These DDR5 SDRAM CUDIMMs and DDR5 SDRAM CQDIMMs are intended for use as main memory when installed in computers. The CQDIMM has additional chip select signals at the connector pins where they were RFUs for the CUDIMM.

Reference design examples are included which provide an initial basis for DDR5 CUDIMM and CQDIMM designs. Modifications to these reference designs may be required to meet all system timing, signal integrity, and thermal requirements for PC5-6400 and up to PC5-9200 support. All DDR5 CUDIMM and CQDIMM implementations must use simulations and lab verification to ensure proper timing requirements and signal integrity in the design.

Reference design specific design specification/design rule which deviated from this common standard are documented in the Design Deviation section of each reference design's annex.

2 Normative References

JESD79-5, *DDR5 SDRAM*

JESD300-5, *SPD5118 Hub and Serial Presence Detect Device Standard*

JESD301-2, *PMIC5100 Power Management IC Standard*

JESD301-6, *PMIC5120 Power Management IC Standard*

JESD400-5, *DDR5 Serial Presence Detect (SPD) Contents*

JESD401-5, *DDR5 DIMM Labels*

JESD402-1, *Temperature Range and Measurement Standard for Components and Modules*

JESD403-1, *JEDEC Module Sideband Bus (SidebandBus)*

MO-210, *Plastic Bottom Grid Array, 0.80 mm Pitch, Rectangular Family Package*

MO-329, *288 pin DDR5 DIMM, 0.85 mm Pitch*

JESD82-531, *DDR5CKD01 Clock Driver*

3 Product Family Attributes

Table 1 — Product Family Attributes

DIMM Organization	x64 (x32 2 channels), x72 ECC (x36 2channels)	
DIMM Dimensions (nominal)	133.35 mm x 31.25 mm	MO-329
Pin Count	288	
DDR5 SDRAMs Supported	16 Gb, 24 Gb, 32 Gb, 64 Gb	MO-210
Capacity	8 GB - 256 GB	
DDR5 SDRAM width	x8, x16	
Serial Presence Detect, Thermal Sensor	1024 byte	JESD300-5
Clock Driver	DDR5CKD01	JESD82-531
PMIC	PMIC5100 PMIC5120	JESD301-2 JESD301-6
Voltage Options	5 V (VIN_BULK)	
Interface	1.1 V signaling	

4 Environmental Requirements

288-pin DDR5 Clocked Unbuffered Dual Inline Memory Modules (CUDIMM and CQDIMM) are intended for use in standard office environments that have limited capacity for heating and air conditioning.

Table 2 — Environmental Parameters (Example)

Symbol	Parameter	Rating	Units	
TOPR	DRAM Operating Temperature	0 to +95	°C	
TSTG	Storage Temperature	-55 to +100	°C	
<p>NOTE 1 Operating temperature applies to the case temperature of all SDRAM components on the module. All other support components on the module must remain within their respective operating temperature ranges when the case temperature of the SDRAMs are at the minimum and maximum values. See JESD402-1 for details.</p> <p>NOTE 2 Storage temperature applies to the case temperature of all components on the module. See JESD402-1 for details. This is a stress rating only, and device functional operation at or above the conditions indicated is not implied. Exposure to absolute maximum ratings for extended periods may affect reliability.</p>				

5 Connector Pinout and Signal Description

Table 3 — Pin Definition

Pin Name	Description	Pin Name	Description
CA0_A – CA12_A, CA0_B – CA12_B	SDRAM Command/Address bus	HSCL	SidebandBus clock
CS0_A_n – CS1_A_n, CS0_B_n – CS1_B_n	SDRAM Chip Select	HSDA	SidebandBus data
CS2_A_n – CS3_A_n, CS2_B_n – CS3_B_n	Additional SDRAM Chip Selects for CQDIMM. They are RFU for CUDIMM	HSA	SidebandBus address
DQ0_A – DQ31_A, DQ0_B – DQ31_B	DIMM memory data bus	ALERT_n	SDRAM ALERT_n
CB0_A – CB3_A, CB0_B – CB3_B	DIMM ECC check bits	RESET_n	Set DRAMs to a Known State
DQS0_A_t – DQS4_A_t, DQS0_B_t – DQS4_B_t	SDRAM data strobes (positive line of differential pair)	VIN_BULK	5 V power input supply to the PMIC for analog circuits
DQS0_A_c – DQS4_A_c, DQS0_B_c – DQS4_B_c	SDRAM data strobes (negative line of differential pair)	VSS	Power supply return (ground)
DM0_A_n – DM3_A_n, DM0_B_n – DM3_B_n	SDRAM data masks	PWR_GOOD	Power good indicator
CK0_A_t, CK1_A_t CK0_B_t, CK1_B_t	SDRAM clocks (positive line of differential pair)	PWR_EN	PMIC Enable
CK0_A_c, CK1_A_c CK0_B_c, CK1_B_c	SDRAM clocks (negative line of differential pair)	RFU	Reserved for future use
NOTE 1 DDR5 CUDIMM and CQDIMM has 2 channels (channel-A and channel-B) of signal bus. The signals with suffix: _A (e.g., DQ0_A) are for channel-A, and the signals with suffix: _B (e.g., DQ0_B) are for channel-B			

5 Connector Pinout and Signal Description (cont'd)**Table 4 — Input/Output Functional Description**

Symbol	Type	I/O Level	Function
CK0_A_t, CK0_A_c CK1_A_t, CK1_A_c CK0_B_t, CK0_B_c CK1_B_t, CK1_B_c	Input	VDD	Clock: CK_t and CK_c are differential clock inputs. All address and control input signals are sampled on the crossing of the positive edge of CK_t and negative edge of CK_c.
CA0_A - CA12_A, CA0_B - CA12_B	Input	VDD	Command/Address Inputs: CA signals provide the command and address inputs according to the Command Truth Table. Note: Since some commands are multi cycle, the pins may not be interchanged between devices on the same bus.
CS0_A_n - CS3_A_n CS0_B_n - CS3_B_n	Input	VDD	Chip Select: All commands are masked when CS_n is registered HIGH. CS_n provides for external Rank selection on systems with multiple Ranks. CS_n is considered part of the command code. CS_n is also used to enter and exit the parts from power down modes.
DQ0_A - DQ31_A DQ0_B - DQ31_B	Input/ Output	VDDQ	Data Input/Output: Bi-directional data bus. If CRC is enabled via Mode Register, then CRC code is added at the end of Data Burst.
CB0_A - CB3_A CB0_B - CB3_B	Input/ Output	VDDQ	DIMM ECC check bits
DQS0_A_t - DQS4_A_t DQS0_A_c - DQS4_A_c DQS0_B_t - DQS4_B_t DQS0_B_c - DQS4_B_c	Input/ Output	VDDQ	Data Strobe: output with read data, input with write data. Edge-aligned with read data, centered in write data. DDR5 SDRAM supports differential data strobe only and does not support single-ended.
DM0_A_n - DM3_A_n DM0_B_n - DM3_B_n	Input	VDDQ	Input Data Mask: DM_n is an input mask signal for write data. Input data is masked when DM_n is sampled LOW coincident with that input data during a Write access. DM_n is sampled on both edges of DQS. For x8 device, the function of DM_n is enabled by MR5:OP[5]=1.
ALERT_n	Input/ Output	VDD	Alert: If there is error in CRC, then Alert_n goes LOW for the period time interval and goes back HIGH. During Connectivity Test mode, this pin works as input. Using this signal or not is dependent on system. In case of not connected as Signal, ALERT_n Pin must be bounded to VDDQ on board.
RESET_n	Input	VDDQ	Active Low Asynchronous Reset: Reset is active when RESET_n is LOW, and inactive when RESET_n is HIGH. RESET_n must be HIGH during normal operation. RESET_n is a CMOS rail to rail signal with DC high and low at 80% and 20% of VDDQ,
HSCL	Input	1.0 V – 3.3 V	Host SidebandBus bus clock, supplied by the controller. Refer to JESD300-5 and JESD403-1

Table 4 — Input/Output Functional Description (cont'd)

Symbol	Type	I/O Level	Function
HSDA	Input / Output	1.0 V – 3.3 V	Host SidebandBus data, connected from the controller to Hub or Host bus Target devices. Refer to JESD300-5 and JESD403-1.
HSA	Input	2.1 V max	Host SidebandBus bus device ID address pin; input to a Hub or other client device to distinguish between identical devices in the I3C-Basic address range.
RFU			Reserved for Future Use. No on DIMM electrical connection is present.
PWR_GOOD	Input / Output	Open Drain	Power good indicator. Open Drain output. The PMIC floats this pin high when VIN_Bulk input supply as well as all enabled output buck regulators and all LDO regulator tolerance threshold is maintained as configured in appropriate register. The PMIC drives this pin low when VIN_Bulk input goes below the threshold or when any of the enabled switch output regulators exceed the threshold configured in the appropriate register or any LDO output regulator exceeds the threshold tolerance. Input: The PMIC disables its output regulators when this pin is low. The LDO outputs shall remain on.
PWR_EN	Input	3.3 V	PMIC Enable. When this pin is high, the PMIC turns on the regulator. When this pin is low, the PMIC turns off the regulator. This signal is connected to PMIC's VR_EN pin.
VIN_BULK	Supply	5 V	5 V power input supply to the PMIC for analog circuits.
VSS	Supply		Ground

5.1 DDR5 CUDIMM and CQDIMM Connector Pin Assignments

Table 5 — DDR5 288 Pin CUDIMM and CQDIMM Pin Wiring Assignments

Pin#	Front Side	Pin#	Back Side	Pin#	Front Side	Pin#	Back Side
1	VIN_BULK	145	VIN_BULK	75	RFU	219	RFU
2	NC/VIN_BULK ¹	146	VIN_BULK	KEY			
3	RFU	147	PWR_GOOD	76	RFU	220	RFU
4	HSCL	148	HSA	77	VSS	221	VSS
5	HSDA	149	RFU	78	CK0_B_t	222	CK1_B_t
6	VSS	150	VSS	79	CK0_B_c	223	CK1_B_c
7	RFU	151	PWR_EN	80	VSS	224	VSS
8	VSS	152	RFU	81	RFU/CS2_B_n	225	RFU/CS3_B_n
9	DQ0_A	153	VSS	82	CA12_B	226	RFU
10	VSS	154	DQ2_A	83	VSS	227	VSS

Table 5 — DDR5 288 Pin CUDIMM Pin Wiring Assignments (cont'd)

Pin#	Front Side	Pin#	Back Side	Pin#	Front Side	Pin#	Back Side
11	DQ1_A	155	VSS	84	CA10_B	228	CA11_B
12	VSS	156	DQ3_A	85	CA8_B	229	CA9_B
13	DQS0_A_c	157	VSS	86	VSS	230	VSS
14	DQS0_A_t	158	DM0_A_n	87	CA6_B	231	CA7_B
15	VSS	159	VSS	88	CA4_B	232	CA5_B
16	DQ4_A	160	DQ6_A	89	VSS	233	VSS
17	VSS	161	VSS	90	CA2_B	234	CA3_B
18	DQ5_A	162	DQ7_A	91	CA0_B	235	CA1_B
19	VSS	163	VSS	92	VSS	236	VSS
20	DQ8_A	164	DQ10_A	93	CS0_B_n	237	CS1_B_n
21	VSS	165	VSS	94	VSS	238	VSS
22	DQ9_A	166	DQ11_A	95	RESET_n	239	DQS4_B_c
23	VSS	167	VSS	96	VSS	240	DQS4_B_t
24	DM1_A_n	168	DQS1_A_c	97	CB0_B	241	VSS
25	VSS	169	DQS1_A_t	98	VSS	242	CB2_B
26	DQ12_A	170	VSS	99	CB1_B	243	VSS
27	VSS	171	DQ14_A	100	VSS	244	CB3_B
28	DQ13_A	172	VSS	101	DQ0_B	245	VSS
29	VSS	173	DQ15_A	102	VSS	246	DQ2_B
30	DQ16_A	174	VSS	103	DQ1_B	247	VSS
31	VSS	175	DQ18_A	104	VSS	248	DQ3_B
32	DQ17_A	176	VSS	105	DQS0_B_c	249	VSS
33	VSS	177	DQ19_A	106	DQS0_B_t	250	DM0_B_n
34	DQS2_A_c	178	VSS	107	VSS	251	VSS
35	DQS2_A_t	179	DM2_A_n	108	DQ4_B	252	DQ6_B
36	VSS	180	VSS	109	VSS	253	VSS
37	DQ20_A	181	DQ22_A	110	DQ5_B	254	DQ7_B
38	VSS	182	VSS	111	VSS	255	VSS
39	DQ21_A	183	DQ23_A	112	DQ8_B	256	DQ10_B
40	VSS	184	VSS	113	VSS	257	VSS
41	DQ24_A	185	DQ26_A	114	DQ9_B	258	DQ11_B
42	VSS	186	VSS	115	VSS	259	VSS
43	DQ25_A	187	DQ27_A	116	DM1_B_n	260	DQS1_B_c
44	VSS	188	VSS	117	VSS	261	DQS1_B_t
45	DM3_A_n	189	DQS3_A_c	118	DQ12_B	262	VSS
46	VSS	190	DQS3_A_t	119	VSS	263	DQ14_B
47	DQ28_A	191	VSS	120	DQ13_B	264	VSS
48	VSS	192	DQ30_A	121	VSS	265	DQ15_B
49	DQ29_A	193	VSS	122	DQ16_B	266	VSS

Table 5 — DDR5 288 Pin CUDIMM Pin Wiring Assignments (cont'd)

Pin#	Front Side	Pin#	Back Side	Pin#	Front Side	Pin#	Back Side
50	VSS	194	DQ31_A	123	VSS	267	DQ18_B
51	CB0_A	195	VSS	124	DQ17_B	268	VSS
52	VSS	196	CB2_A	125	VSS	269	DQ19_B
53	CB1_A	197	VSS	126	DQS2_B_c	270	VSS
54	VSS	198	CB3_A	127	DQS2_B_t	271	DM2_B_n
55	DQS4_A_c	199	VSS	128	VSS	272	VSS
56	DQS4_A_t	200	ALERT_n	129	DQ20_B	273	DQ22_B
57	VSS	201	VSS	130	VSS	274	VSS
58	CS0_A_n	202	CS1_A_n	131	DQ21_B	275	DQ23_B
59	VSS	203	VSS	132	VSS	276	VSS
60	CA0_A	204	CA1_A	133	DQ24_B	277	DQ26_B
61	CA2_A	205	CA3_A	134	VSS	278	VSS
62	VSS	206	VSS	135	DQ25_B	279	DQ27_B
63	CA4_A	207	CA5_A	136	VSS	280	VSS
64	CA6_A	208	CA7_A	137	DM3_B_n	281	DQS3_B_c
65	VSS	209	VSS	138	VSS	282	DQS3_B_t
66	CA8_A	210	CA9_A	139	DQ28_B	283	VSS
67	CA10_A	211	CA11_A	140	VSS	284	DQ30_B
68	VSS	212	VSS	141	DQ29_B	285	VSS
69	CA12_A	213	RFU	142	VSS	286	DQ31_B
70	RFU/CS2_A_n	214	RFU/CS3_A_n	143	RFU	287	VSS
71	VSS	215	VSS	144	RFU	288	RFU
72	CK0_A_t	216	CK1_A_t				
73	CK0_A_c	217	CK1_A_c				
74	VSS	218	VSS				

NOTE 1 Pin #2 is NC (No Connect) for JEDEC standard DDR5 modules. On non-standard modules used by enthusiasts that may require increased power supply, Pin #2 can be connected to VIN_BULK rail on module.

NOTE 2 Pin #70, #214, #81, and #225 are RFU for CUDIMM, but additional chip selects for CQDIMM.

6 Power Details

6.1 DIMM Voltage Requirements and Power-Up and Power-Down Sequence

Please refer to the latest version of the PMIC standard which is used on the DIMM for details and updates.

The following is general information for DDR5 CUDIMM and CQDIMM:

- The DDR5 CUDIMM and CQDIMM have a PMIC on the PCB. All required voltages are generated by the PMIC from the VIN_BULK supply.
- The DDR5 CUDIMM and CQDIMM use the PMIC in Single Phase Regulator mode. Typically, one of the SWA or SWB output is used for VDD, and the other output is used for VDDQ.
- GSI_n pin must be connected to VSS on the DIMM.

6.2 Soft Stop Time Programming for the PMIC Registers

To reduce the power line spike, the Soft Stop Time register setting for all PMIC5100 output switch rails on module must be set to 0b11.

Table 6 — PMIC5100 Register Setting for the Soft Stop

PMIC Register	Description	Register Bit	Value (Binary)	Soft Stop Time (ms)
0x46	R46 [1:0]: SWA_OUTPUT_SOFT_STOP_TIME	[1:0]	11	4
0x4A	R4A [1:0]: SWB_OUTPUT_SOFT_STOP_TIME	[1:0]	11	4
0x4C	R4C [1:0]: SWC_OUTPUT_SOFT_STOP_TIME	[1:0]	11	8

To reduce the power line spike, the Soft Stop Time register settings for all PMIC5120 output switch rails on module are recommended to be set to 0b10, the Extension settings are recommended to be set to 0b1.

Table 7 — PMIC5120 Register Setting for the Soft Stop

PMIC Register	Description	Register Bit	Value (Binary)	Soft Stop Time (ms)
0x44 0x46	R44[7]: SWA_OUTPUT_SOFT_STOP_TIME_EXTENSION R46 [1:0]: SWA_OUTPUT_SOFT_STOP_TIME	[7] [1:0]	1 10	32
0x44 0x4A	R44[5]: SWB_OUTPUT_SOFT_STOP_TIME_EXTENSION R4A [1:0]: SWB_OUTPUT_SOFT_STOP_TIME	[5] [1:0]	1 10	32
0x44 0x4C	R44[4]: SWC_OUTPUT_SOFT_STOP_TIME_EXTENSION R4C [1:0]: SWC_OUTPUT_SOFT_STOP_TIME	[4] [1:0]	1 10	32

7 Component Details

7.1 Component Types and Placement

Components shall be positioned on the PCB to meet the minimum and maximum trace lengths required for DDR5 SDRAM signals. Decoupling capacitors for DDR5 SDRAM devices must be located near the device power pins.

Table 8 — DDR5 x8 SDRAM Pad Array

	1	2	3	4	5	6	7	8	9	
A	LBDQ	VSS	VPP				ZQ	VSS	LBDQS	A
B	VDD	VDDQ	DQ2				DQ3	VDDQ	VDD	B
C	VSS	DQ0	DQS_t				DM_n, TDQS_t	DQ1	VSS	C
D	VDDQ	VSS	DQS_c				TDQS_c	VSS	VDDQ	D
E	VDD	DQ4	DQ6				DQ7	DQ5	VDD	E
F	VSS	VDDQ	VSS				VSS	VDDQ	VSS	F
G	CA_ODT	MIR	VDD				CK_t	VDDQ	TEN	G
H	ALERT_n	VSS	CS_n				CK_c	VSS	VDD	H
J	VDDQ	CA4	CA0				CA1	CA5	VDDQ	J
K	VDD	CA6	CA2				CA3	CA7	VDD	K
L	VDDQ	VSS	CA8				CA9	VSS	VDDQ	L
M	CAI	CA10	CA12				CA13	CA11	RESET_n	M
N	VDD	VSS	VDD				VPP	VSS	VDD	N

DDR5 CUDIMM reference design uses the pad array with support balls.

Table 8 — DDR5 x8 SDRAM Pad Array (cont'd)

MO-210-AL (x8)										MO-210-AN (x8) with support balls											
	1	2	3	4	5	6	7	8	9		1	2	3	4	5	6	7	8	9	10	11
A	○	○	○	+	+	+	○	○	○	A	○	○	○	○	+	+	+	○	○	○	○
B	○	○	○	+	+	+	○	○	○	B	+	○	○	○	+	+	+	○	○	○	+
C	○	○	○	+	+	+	○	○	○	C	+	○	○	○	+	+	+	○	○	○	+
D	○	○	○	+	+	+	○	○	○	D	+	○	○	○	+	+	+	○	○	○	+
E	○	○	○	+	+	+	○	○	○	E	+	○	○	○	+	+	+	○	○	○	+
F	○	○	○	+	+	+	○	○	○	F	+	○	○	○	+	+	+	○	○	○	+
G	○	○	○	+	+	+	○	○	○	G	+	○	○	○	+	+	+	○	○	○	+
H	○	○	○	+	+	+	○	○	○	H	+	○	○	○	+	+	+	○	○	○	+
J	○	○	○	+	+	+	○	○	○	J	+	○	○	○	+	+	+	○	○	○	+
K	○	○	○	+	+	+	○	○	○	K	+	○	○	○	+	+	+	○	○	○	+
L	○	○	○	+	+	+	○	○	○	L	+	○	○	○	+	+	+	○	○	○	+
M	○	○	○	+	+	+	○	○	○	M	+	○	○	○	+	+	+	○	○	○	+
N	○	○	○	+	+	+	○	○	○	N	○	○	○	○	+	+	+	○	○	○	○

○ Populated ball

+

Ball not populated

NOTE 1

Additional columns and rows of inactive balls in MO-210 Terminal Pattern AU(x8) with support balls are for mechanical support only and should not be tied to either electrically high or low.

NOTE 2

Some of the additional support balls can be selectively populated under the supplier's discretion. Refer to supplier's datasheet.

NOTE 3

Please refer to the latest version of JESD79-5: DDR5 SDRAM standard for updates.

Table 9 — DDR5 x16 SDRAM Pad Array

	1	2	3	4	5	6	7	8	9											
A	LBDQ	VSS	VPP								ZQ	VSS	LBDQS							A
B	VDD	VDDQ	DQU2								DQU3	VDDQ	VDD							B
C	VSS	DQU0	DQSU_t								DMU_n	DQU1	VSS							C
D	VDDQ	VSS	DQSU_c								RFU	VSS	VDDQ							D
E	VDD	DQU4	DQU6								DQU7	DQU5	VDD							E
F	VDD	VDDQ	DQL2								DQL3	VDDQ	VDD							F
G	VSS	DQL0	DQSL_t								DML_n	DQL1	VSS							G
H	VDDQ	VSS	DQSL_c								RFU	VSS	VDDQ							H
J	VDD	DQL4	DQL6								DQL7	DQL5	VDD							J
K	VSS	VDDQ	VSS								VSS	VDDQ	VSS							K
L	CA_ODT	MIR	VDD								CK_t	VDDQ	TEN							L
M	ALERT_n	VSS	CS_n								CK_c	VSS	VDD							M
N	VDDQ	CA4	CA0								CA1	CA5	VDDQ							N
P	VDD	CA6	CA2								CA3	CA7	VDD							P
R	VDDQ	VSS	CA8								CA9	VSS	VDDQ							R
T	CAI	CA10	CA12								CA13	CA11	RESET_n							T
U	VDD	VSS	VDD								VPP	VSS	VDD							U

DDR5 CUDIMM and CQDIMM reference design uses the pad array with support balls.

Table 9 — DDR5 x16 SDRAM Pad Array (cont'd)

MO-210-AT (x16)										MO-210-AU (x16) with support balls											
	1	2	3	4	5	6	7	8	9		1	2	3	4	5	6	7	8	9	10	11
A	○	○	○	+	+	+	○	○	○	A	○	○	○	○	+	+	+	○	○	○	○
B	○	○	○	+	+	+	○	○	○	B	+	○	○	○	+	+	+	○	○	○	+
C	○	○	○	+	+	+	○	○	○	C	+	○	○	○	+	+	+	○	○	○	+
D	○	○	○	+	+	+	○	○	○	D	+	○	○	○	+	+	+	○	○	○	+
E	○	○	○	+	+	+	○	○	○	E	+	○	○	○	+	+	+	○	○	○	+
F	○	○	○	+	+	+	○	○	○	F	+	○	○	○	+	+	+	○	○	○	+
G	○	○	○	+	+	+	○	○	○	G	+	○	○	○	+	+	+	○	○	○	+
H	○	○	○	+	+	+	○	○	○	H	+	○	○	○	+	+	+	○	○	○	+
J	○	○	○	+	+	+	○	○	○	J	+	○	○	○	+	+	+	○	○	○	+
K	○	○	○	+	+	+	○	○	○	K	+	○	○	○	+	+	+	○	○	○	+
L	○	○	○	+	+	+	○	○	○	L	+	○	○	○	+	+	+	○	○	○	+
M	○	○	○	+	+	+	○	○	○	M	+	○	○	○	+	+	+	○	○	○	+
N	○	○	○	+	+	+	○	○	○	N	+	○	○	○	+	+	+	○	○	○	+
P	○	○	○	+	+	+	○	○	○	P	+	○	○	○	+	+	+	○	○	○	+
R	○	○	○	+	+	+	○	○	○	R	+	○	○	○	+	+	+	○	○	○	+
T	○	○	○	+	+	+	○	○	○	T	+	○	○	○	+	+	+	○	○	○	+
U	○	○	○	+	+	+	○	○	○	U	○	○	○	○	+	+	+	○	○	○	○

○ Populated ball

+ Ball not populated

NOTE 1

Additional columns and rows of inactive balls in MO-210 Terminal Pattern AU (x16) with support balls are for mechanical support only and should not be tied to either electrically high or low.

NOTE 2

Some of the additional support balls can be selectively populated under the supplier's discretion. Refer to supplier's datasheet.

NOTE 3

Please refer to the latest version of JESD79-5: DDR5 SDRAM Standard for updates.

7.2 Decoupling Guidelines

Table 10 — Decoupling Capacitor Guidelines

	Guideline	Note
VDD	Minimum of two decoupling capacitors to VSS per SDRAM	Should be placed as close as possible to the DRAM VDD ball
VDDQ	Minimum of two decoupling capacitors to VSS per SDRAM	Should be placed as close as possible to the DRAM VDDQ ball
VPP	Minimum of one decoupling cap per DRAM VPP pin	Should be placed as close as possible to the DRAM VPP ball
VIN_BULK	Near the Gold Finger : 4.7 μ F, 0402, 10 V, 1 piece	
	Near the PMIC IC : Refer to the PMIC specification	
NOTE 1 Decoupling capacitor values for VDD, VDDQ and VPP vary by module and may be staggered to achieve best overall impedance versus frequency response.		
NOTE 2 Recommended values for decoupling for VDD, VDDQ, and VPP are 1 μ F, 2.2 μ F, 4.7 μ F, and 10 μ F.		
NOTE 3 Depending on the DRAM package size, all placements may not be possible.		

8 DIMM Design Details

8.1 Signal Groups

This standard categorizes DDR5 SDRAM timing-critical signals into four groups. The following summarizes the signals contained in each group. All signal groups, except Data, implement a fly-by topology. There are two channels for signal groups. Left side is channel-A, and Right side is channel-B.

Signal Groups:

1. Clock (CK or CLK, DCK for the Pre-CKD(Clock Driver), QCK for the Post-CKD))
2. Command/Address (CMD/ADR)
3. Chip Select (CS)
4. Data Bus (including ECC byte) (DQ, DM, Strobe)

8.2 Explanation of Net Structure Diagrams

The net structure routing diagrams provide a reference design example for each raw card version. These designs provide an initial basis for CUDIMM and CQDIMM designs. The diagrams should be used to determine individual signal wiring on a DIMM for any supported configuration. Only transmission lines (represented as cylinders and labeled with trace length designators “TL”) represent physical trace segments. All other lines are zero in length. To verify DIMM functionality, a full simulation of all signal integrity and timing is required. The given net structures and trace lengths are not inclusive for all solutions.

Once the net structure has been determined, the permitted trace lengths for the net structure can be read from Table 11 each net structure routing diagram. Some configurations require the use of multiple net structure routing diagrams to account for varying load quantities on the same signal. All diagrams define one load as one SDRAM input. A typical data net structure is shown in Figure 1

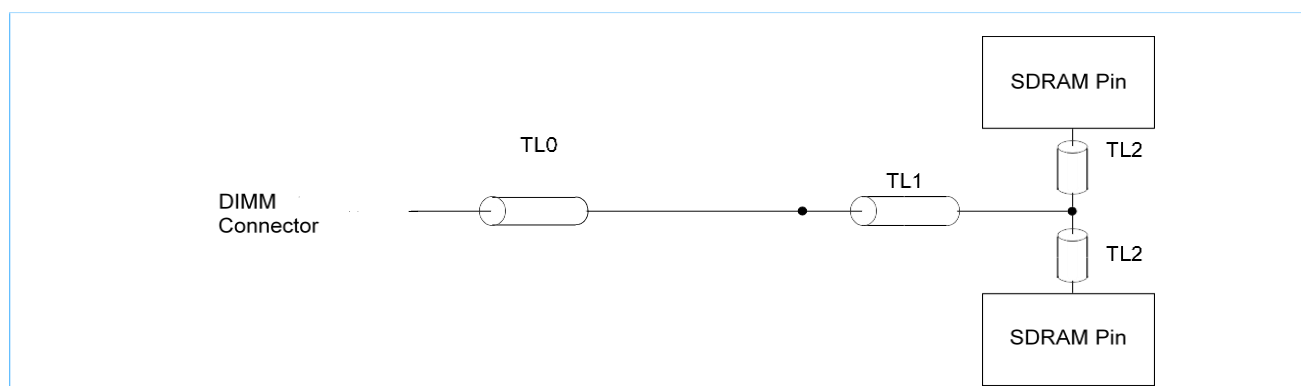


Figure 1 — Net Structure Example for Two Rank DIMM

8.3 General Net Structure Routing Rules

Net structure diagrams for each signal group are shown in the following sections. The remainder of this section provides a general overview of DDR5 net structure concepts and documents the routing rules to be followed in the design of the DDR5 modules.

To use simulation almost exclusively, some conditions must be defined so that the same conclusion is reached using different simulation tools. See Table 11 for an example.

Table 11 — Simulation Conditions Example

Group	Parameter	Condition
Data Bus	Motherboard Length	100 mm
	Motherboard Impedance	35 Ω (68 Ω differential for Strokes)
	Motherboard Configuration	One DIMM slot
	Routing Type	Stripline (Micro-strip)
	Driver	34 Ω DRAM with DRAM package
Command/Address, Chip Select	Motherboard Length	100 mm
	Motherboard Impedance	50 Ω (single ended)
	Motherboard Configuration	One DIMM per channel
	Driver	34 Ω DRAM with DRAM package
Clock	Motherboard Length	100 mm
	Motherboard Impedance	50 Ω differential
	Motherboard Configuration	One DIMM per channel
	Driver	34 Ω DRAM with DRAM package

8.3.1 CK, CMD/ADR, and CS Groups

The DDR5 modules implement a fly-by topology for routing CK, Command/Address, and Chip select signal groups. Since CUDIMM and CQDIMM have one or more CKD(s) in the CK nets between the connector and the first SDRAM, the length/delay matching rules for the CK and other signal groups are a little different from the UDIMM. The Command/Addresses are still required to be length/delay matched in the group. The Chip Selects are still required to be length/delay matched in the group. The Command/Address and Chip Select groups are still required to be length/delay matched to QCK, between the first DRAM to the last SDRAM.

The length/delay matching between the CK and other signal groups from the connector to the first SDRAM is not required because it would result extra length and may cause SI degradation. The matching rules from the connector to the first SDRAM for the CK(DCK length from the connector to the CKD and QCK length from the CKD to the first SDRAM), and the Command/Address and Chip Select groups are defined at Table 12. For the length tables in the Annexes where there is not a specified tolerance and the tolerance is not covered by Table 12, a value of ± 1.0 mm shall be used.

8.3.1 CK, CMD/ADR, and CS Groups (cont'd)

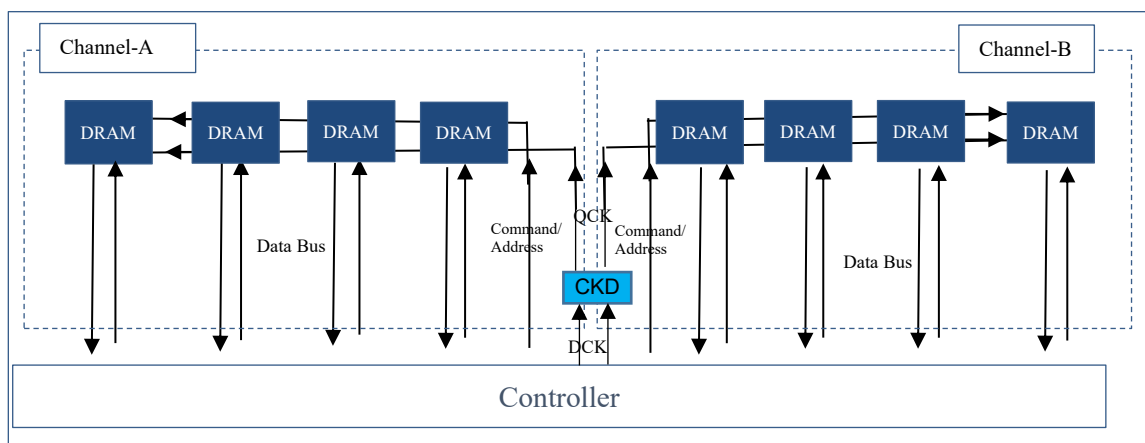


Figure 2 — FlyBy Topology Example

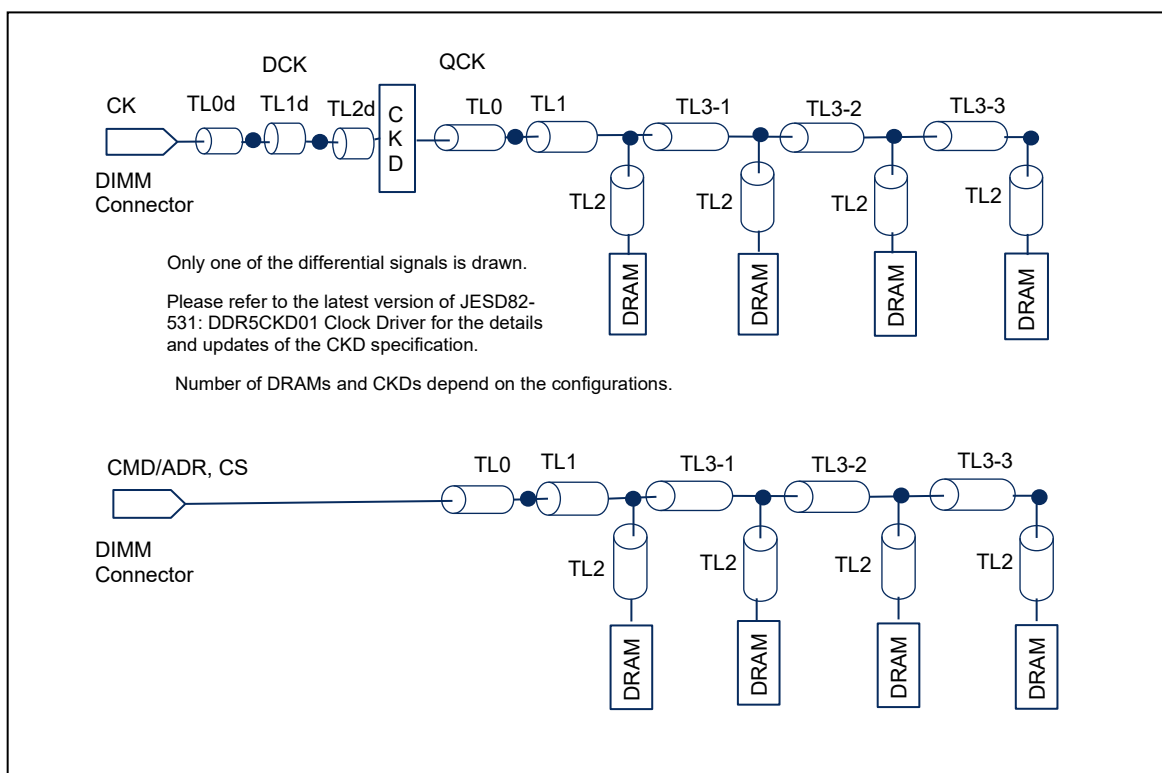


Figure 3 — CK, CMD/ADR, and CS Routing Topology Examples

8.3.1 CK, CMD/ADR, and CS Groups (cont'd)

Table 12 — CK, CMD/ADR, and CS Group Length Matching Rules

Signal Group	Matching Rules
CK total trace length	CK trace length should be as short as possible to reduce jitter.
DCK total length	Maximum total compensated length is 18.0 mm
DCK total length deviation from the reference design	DIMM manufacture can adjust the trace length, but DCK total length should be kept within 1.0 mm from the original JEDEC reference design.
DCK0/1, DCK0_A/B, DCK1_A/B, Matching	DCK0_A/B and DCK1_A/B should be matched within 6.0mm DCK0_A and DCK0_B should be matched within 0.3mm. DCK1_A and DCK1_B should be matched within 0.3mm
CK_t-to-CK_c Matching	Match TLx segment by TLx segment to within 0.1 mm. See Figure 3 for naming.
QCK Pair-to-QCK Pair Matching (Pair- to-Pair: Average Length)	Match total compensated length from CKD to each SDRAM within 0.5 mm
Command/Address Matching	Match total compensated length from connector to each SDRAM within 0.2 mm
Chip Select Matching	Match total compensated length from connector to each SDRAM within 0.2 mm
Command/Address Channel_A/B Matching	Match total compensated lengths of channel A and B within 0.3 mm.
Chip Select Channel_A/B Matching	Match total compensated lengths of channel A and B within 0.3 mm.
TL2 MAX Stub Length Limits	$TL2 \leq 3.0$ mm. See Figure 3 for naming. (Recommend placing the breakout via at the center of 4 DRAM balls and keep $TL2 = 0.6$ mm)
Command/Address, Chip Select to CK Matching	Match Command/Address, Chip Select lengths to DCK + QCK lengths from connector to the first DRAM within +10 mm/ -16 mm.
Neckdown Length	Determined by simulation.
<p>NOTE 1 All length matching is done using velocity compensated stripline equivalent lengths and via length travel.</p> <p>NOTE 2 A velocity compensation ratio of 1.1 will be used (MS length/1.1 = SL equivalent length).</p> <p>NOTE 3 Neckdown length is the trailing portion of the TL1 segment, which is routed at the standard (0.075 mm) width.</p> <p>NOTE 4 Length matching rule between DCK0 and DCK1 pair not applied to 1-rank modules.</p>	

8.3.2 Lead-in versus Loaded Sections

See Figure 3 for transmission line name designations. The CMD/ADR, and CS topologies are conceptually divided into two topology sections. The segments between the connector and the first SDRAM node via (TL0 + TL1) are collectively termed the lead-in section, while the segments that run between SDRAM node vias (TL3) termed the loaded section, as well as the SDRAM load stubs (TL2), are collectively termed the loaded section.

In order to reduce the impedance discontinuity seen at the first load, the lead-in section is routed at a lower nominal impedance than the loaded section, although some modules may vary. The transition from the wider lead-in trace width to the standard width of the loaded section must occur within a length window preceding the first SDRAM node via, which is termed the neck down length.

The two different impedance sections may not be required for example for the modules which have short TL0+TL1 length (e.g., less than 25 mm). This should be determined by simulation.

8.3.3 Length/Delay Matching to SDRAM Devices

As mentioned previously, length/delay matching is required between the connector and each SDRAM individually. The length/delay matching process is iterative in nature, and there is no single-best method defined. The DDR5 CUDIMM and CQDIMM have a CKD in the CK net between the connector to the first SDRAM, so the matching method is a little different from the UDIMM. At the speed of DDR5, shorter is better for the trace length from the viewpoint of SI, but still need to follow the length/delay matching rules which were agreed at the JEDEC TG. It is generally recommended that the path from the connector to the first SDRAM (TL0 + TL1) be routed as short as possible at first, determine the longest net, try to find the target marched length checking if the matching rules in Table 12 can be satisfied.

For the DDR5 CUDIMM and CQDIMM, usually the breakout via from the DRAM pin is located between 4 DRAM pins and lengths are all same 0.6 mm, in that case TL2 does not need to be included in the length calculation.

Once length/delay matching to the first device is complete, the length matching to the remaining devices is straightforward and can be accomplished by simply length-matching the intra-node segments (TL3-x), assuming the TL2 stub length for a given signal does not vary from SDRAM to SDRAM.

The total compensated length from the connector to the first and last SDRAM is documented in the segment length tables of each annex, in the net structure definitions sections; however, it is assumed that the length matching rules are met at all SDRAM devices.

8.3.4 Velocity Compensation

Since the lead-in section can have a wide variation in the proportion of its length routed as microstrip (MS) and stripline (SL), the length/delay matching process includes a mechanism for compensating for the velocity delta between these two types of PCB interconnects. A compensation factor of 1.1 has been specified for this purpose. All microstrip segment lengths are to be divided by 1.1 before summation into the length matching equation. The resulting compensated length is termed the stripline equivalent length. While some amount of residual velocity mismatch skew remains in the design, the process is a substantial improvement over simple length matching.

8.3.5 Load/Delay Compensation

The concept of load/delay compensation refers to the technique whereby the segment lengths between SDRAMs, on the CLK and CS signal groups, are purposely lengthened in order to add additional flight time delay, as required to compensate for the fact that the CMD/ADR topology for 2 rank modules has 2 loads (1 top + 1 bottom) for each fly-by node, whereas the CLK and CS topologies have only one load per node. Where implemented, the CLK and CS segments between SDRAMs shall be routed longer than the corresponding segment on CMD/ADR group. A specific number can be identified using simulation or calculation. The net result of this compensation is less overall CMD/ADR to CLK skew across the module, thereby improving the ability of the controller to correctly center the CLK within the CMD/ADR valid window at each SDRAM.

8.3.6 Data and Strobe Group

The DDR5 modules treat each byte lane as a separate signal sub-group, with each byte lane group length/delay matched with velocity compensation as previously described. The length of the individual byte lanes may vary substantially across the module, with the controller providing timing realignment circuitry. A summary table of the length/delay matching rules associated with the data signal group is provided in Table 13.

Table 13 — Data and Strobe Group Length Matching Rules

Signal Group	Matching Rules
DQS _t -to-DQS _c Matching	Match TLx segment by TLx segment to within 0.1 mm
DQ to DQ and DM within a byte (x8/x16)	Match total compensated length from the connector to each SDRAM of DQ and DM signals within ± 1.0 mm
DQ/DM to DQS within Byte Lane	DQS length shall be as close as possible to DQ and DM lengths, and shall not be longer than DQ and DM.
Minimum Byte Lane Length (DQ, DQS, DM)	Minimum compensated length from the connector to the SDRAM shall not be less than 9.0 mm.
Maximum Byte Lane Length (DQ, DQS, DM)	Maximum compensated length from the connector to the SDRAM shall not be greater than 24 mm
NOTE 1 All length matching is done using velocity compensated stripline equivalent lengths and Via Compensation.	
NOTE 2 A velocity compensation ratio of 1.1 will be used (MS length/1.1 = SL equivalent length).	
NOTE 3 For via equivalent length see the section on Via compensation.	

8.3.7 ALERT_n Wiring

See Figure 4 for wiring examples for the ALERT_n signal. DDR5 Clocked Dual Inline Memory Module has 2 channels of signal groups, but there is only one ALERT_n at the card edge. There is no direction restriction to the clock. The connection order can be the same as clock, or can be reverse order of clock. It requires a termination resistor at the far end from the card edge.

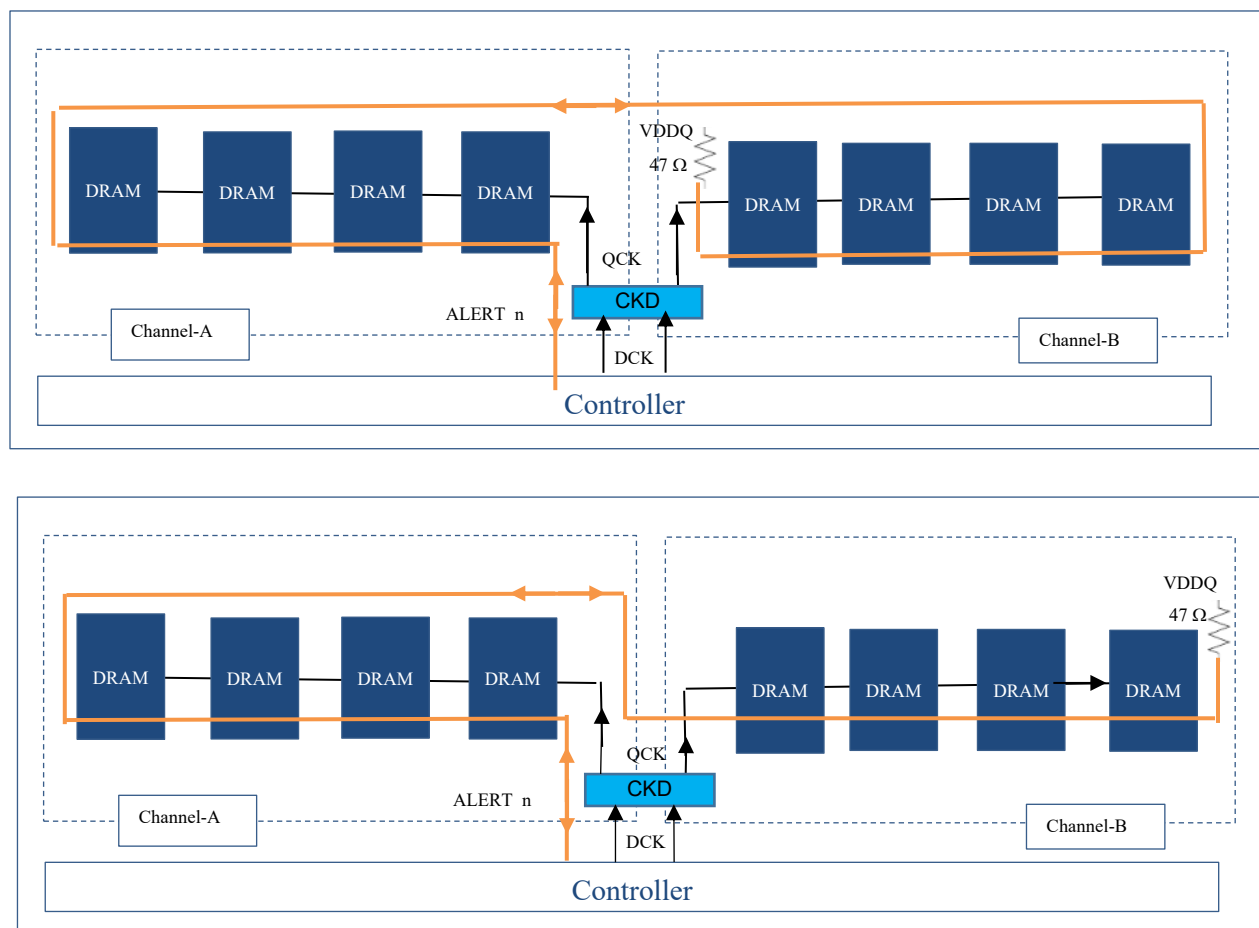


Figure 4 — ALERT_n Wiring Examples

8.3.8 RESET_n Wiring

See Figure 5 for wiring example for the RESET_n signal. The topology should be a daisy chain. There is no restriction on the connection ordering.

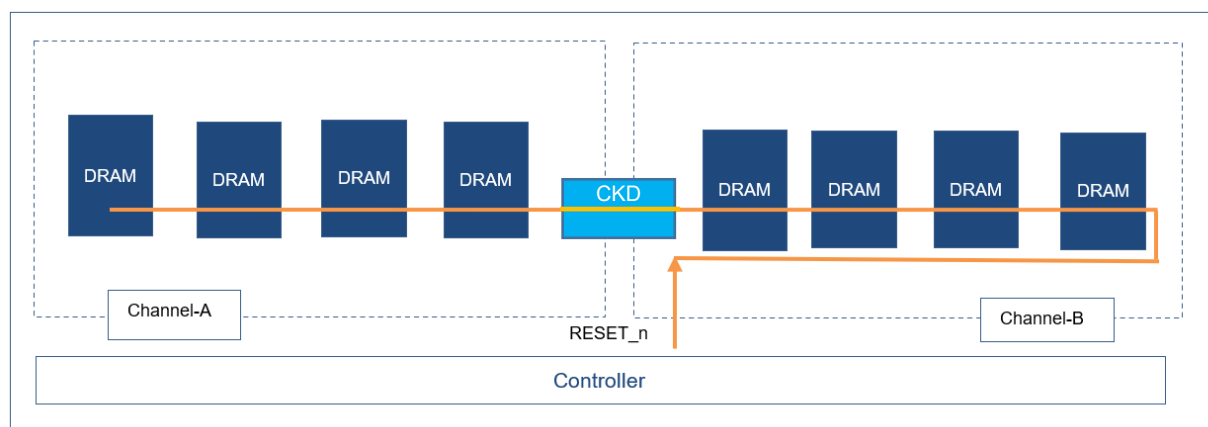


Figure 5 — RESET_n Wiring Example

8.3.9 Via Compensation

The JEDEC DDR5 CUDIMM and CQDIMM reference designs just add the vertical length that the signal travels along the via barrel to the length calculation.

For the DRAMs which share a via (2 rank module case), the via barrel lengths to the top and bottom DRAMs are different. In that case, the via barrel lengths are not included in the length calculation. Please see the length file which is zipped with the reference design.

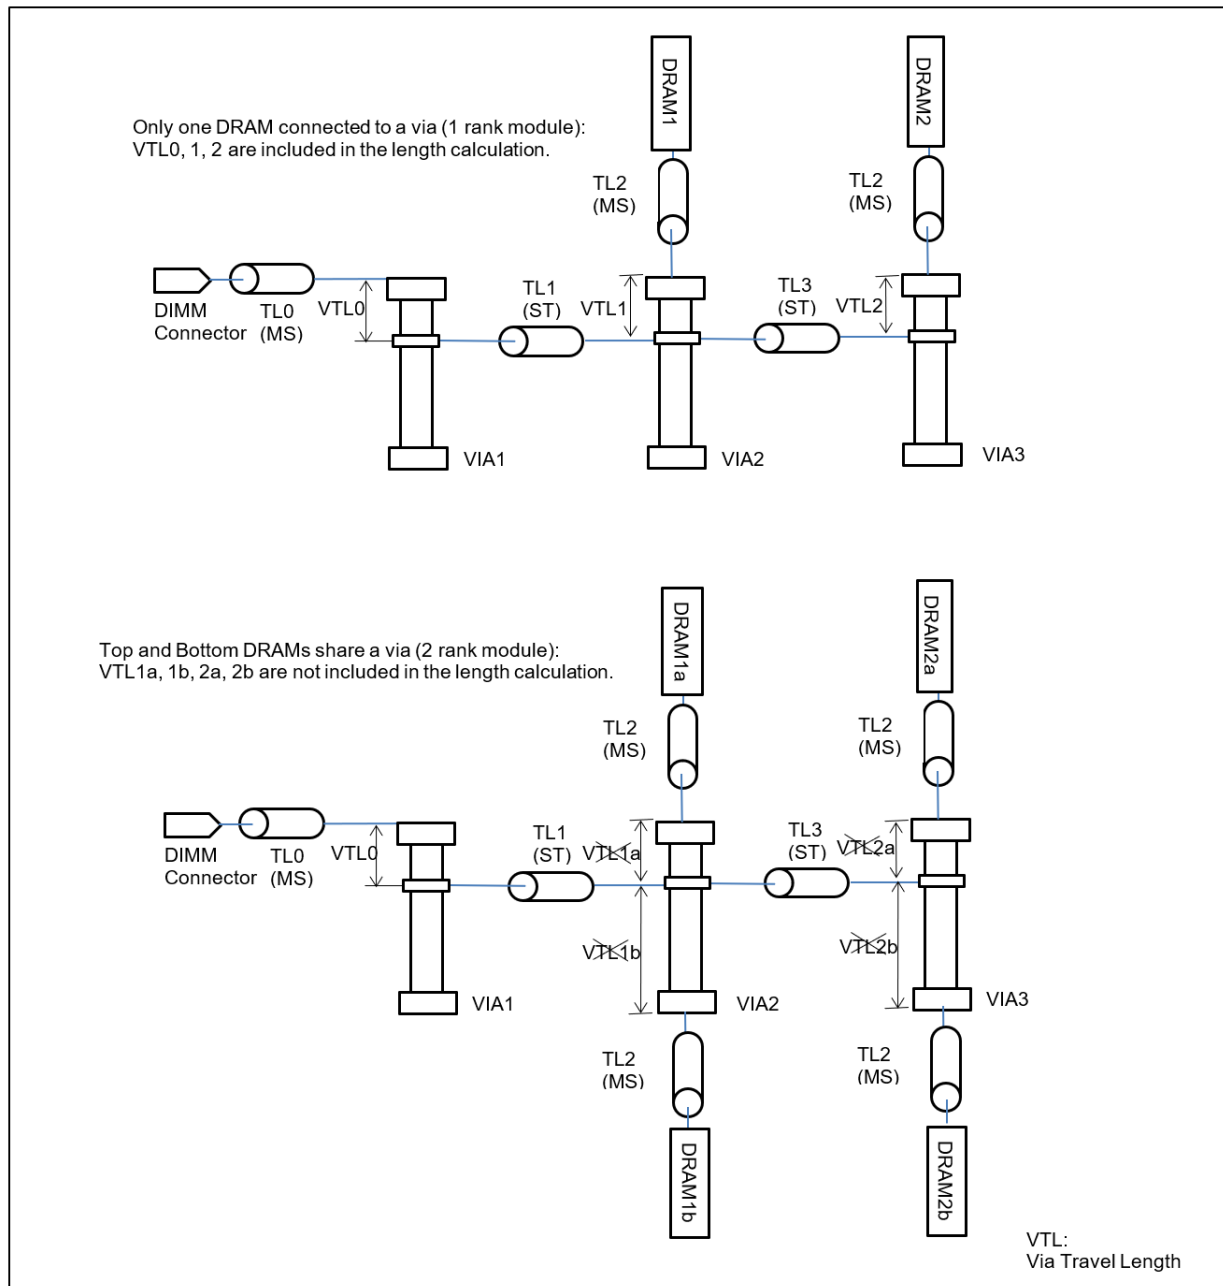


Figure 6 — Via Compensation Explanation

8.3.10 Plane Referencing

Table 14 — Plane Referencing

Signals	Reference
DQ, DQS	Ground
Command/Address	Ground
Chip Select	Ground
Clock	Ground
SidebandBus	Ground

8.4 Address Mirroring

DDR5 SDRAM has MIR input pin. This pin is connected to VSS or VDDQ on the PCB. This pin is used to inform SDRAM device that it is being configured for Mirrored mode vs. Standard mode. With the MIR pin connected to VDDQ, the SDRAM internally swaps even numbered CA with the next higher odd number CA. Normally the MIR pin must be tied to VSS if no CA mirror is required. Mirror pair examples: CA2 with CA3 (not CA1), CA4 with CA5 (not CA3).

To place two DDR5 SDRAMs on the same X-Y location of top and bottom and set the MIR pin VSS/VDDQ will reduce the distance between the same number CA and reduce the stub trace length.

Note that the CA[13] function is only relevant for certain densities (including stacking) of DRAM component. In the case that CA[13] is not used, its ball location, considering whether MIR is used or not, should be connected to VDDQ.

If MIR is employed, the CA12 pin of DRAM (which is now changed to CA13 by MIR) needs to be tied to VDDQ.

The MIR pin configuration is documented in the Checklist, which is zipped with the reference design, and the Annex standard will identify how MIR is used.

8.5 DIMM Routing Space Constraints

These design rules are intended to be used for the reference DIMM designs submitted to JEDEC for ballot.

When rules which are not defined here are used, it should be noted in the annex for each specific raw card. These rules are for design of the reference card only. It is not required that these rules be met by individual manufacturers building from the reference designs.

DIMMs manufactured from the reference designs may use modified rules to support their manufacturing process.

Table 15 — DIMM Routing Space Constraints

	Category	Item	Constraint Value	Note
1	Via	Drill/Pad/Anti-pad/Soldermask	0.20/0.40/0.60/ Soldermask feature may vary depending on designer preference.	One example is setting the soldermask equal to the pad and allowing the PCB shop to adjust as required. Rule may be different between SMD and non-SMD.
2	Spacing	copper to copper (Outer/Inner)	0.075 / 0.070	
3	Spacing	Pad to pad (For pads of different components that are soldered down.)	0.200	
4	Spacing	Line to (N)SMD pad (12V / the others)	0.113 / 0.100	
5	Spacing	Line to line (Single / Diff pair)	0.100 / 0.090	
6	Spacing	Line to shape	0.125	Where impedance is important, use the 0.20 rule.
7	Spacing	Shape to shape	0.100	
8	Spacing	Via(pad) to NSMD pad (12V / the others / same Net)	0.113 / 0.100 / 0.100	
9	Spacing	Via(pad) to SMD pad (12 V / the others / same Net)	0.113 / 0.100 / 0.020	
10	Spacing	Via(pad) to Via(pad)	0.125	
11	Spacing	Via(pad) to Line (Outer/Inner)	0.09 / 0.07	
12	Spacing	Drill wall to Board edge (nominal)	0.450	Nominal board edge and drill being centered in pad
13	Comp to Comp	IC to IC (maximum PKG size)	0.250	Inductor is assumed IC (maximum package size 4.3 mm)
14	Comp to Comp	IC (max.) to Passive (nominal)	0.250	
15	Comp to Comp	Passive to Passive (nominal PKG size)	0.250	
16	Copper keepout	Board top edge (nom.) to copper	0.250	
17	Keepout DIMM w/o HS	Top edge of board to Passive (max.) or IC (max.)	0.300	Nominal board edge and package body max. size criteria
18	Keepout DIMM w/ HS	Top edge of board to Passive (max.) or IC (max.)	TBD	
19	Keepout CSO/SODIMM	lower edge of board to Passive (max.) or IC (max.)	4.200	
20	Keepout CU/U/R/LRDIMM	lower edge of board to Passive (max.) or IC (max.)	4.150	

8.6 DIMM Physical Requirements

8.6.1 Via Placement

Signal Vias must not be placed close together (except differential signals) to reduce crosstalk. Recommended to place power or GND Via between Signal Vias.

8.6.2 Component Pad Sizes and Geometry

Pads for components are left to the reference card designer to define. Manufacturers of these CUDIMM reference designs may adjust pad sizes and geometry.

8.6.3 Unused CLK, CS Termination

All CLK signals should be connected to the DDR5CKD01 component even on the 1Rank modules. For the 1Rank modules, QCK1's (output signals from the DDR5CKD01 component) are not used(wired). Unused CS should be terminated with a 39 ohm resistor to VSS.

8.6.4 DQ/CA Stub Resistor

No DQ, Command/address stub resistor for all DDR5 CUDIMMs and CQDIMMs.

8.6.5 ZQ Calibration Wiring

The DDR5 SDRAMs have a ZQ pin. This is intended to calibrate the on-die resistors for the drivers and the terminations. All CUDIMMs and CQDIMMs must connect a $240\ \Omega \pm 1\%$ resistor from this pin of the SDRAM to ground (VSS). Every SDRAM package must have its own ZQ resistor. Sharing is not allowed.

8.6.6 TEN Wiring

TEN is a test enable pin on the SDRAMs. It is not intended to be used on CUDIMM and CQDIMM modules. It must be tied low VSS at each SDRAM.

8.6.7 Loop Back Wiring

DDR5 CUDIMM, CQDIMM and CSODIMM modules do not have Loopback signal connectivity to the edge connector pins. However, Loopback functionality is useful for module debug, so at the initial design Loop Back signals are connected to the test pads on the modules. The topology should be a daisy chain. The test pads are required for each channels A and B. On the production designs, test pads can be removed.

8.6.8 MIR Wiring

With the MIR pin connected to VDDQ, the SDRAM internally swaps even numbered CA with the next higher odd number CA. Normally the MIR pin must be tied to VSSQ if no CA mirror is required.

The MIR pin connection information may be found in each Reference Design package.

8.6.9 CA_ODT Wiring

For the DDR5 CUDIMM and CQDIMM, usually only the DRAMs at the end of fly-by connected to VDDQ. The CA_ODT pin connection information may be found in each Reference Design package.

8.6.10 CAI Wiring

With the CAI pin connected to VDDQ, DRAM internally inverts the logic level present on all the CA signals. Normally the CAI pin must be connected to VSS if no CA inversion is required. Usually, DDR5 CUDIMM, CQDIMM, and CSODIMM do not need the inversion.

The CAI pin cannot be left floating; it must be connected to VSS on the DDR5 CUDIMM and CQDIMM.

8.6.11 TVS

The DDR5 CUDIMM and CQDIMM must have a TVS (Transient-Voltage-Suppression) diode between VIN_BULK and VSS. A fuse (including e-fuse) is not required for the DDR5 CUDIMM and CQDIMM.

Recommended TVS (Transient -Voltage-Suppression diode) specification

Power	PKG Size	Direction	VRWM (V, Min.)	VRWM (V, Nom.)
Vin_Bulk (5V)	0402	Bi/Uni	5.5	6

8.7 Reference Stackups

The clause defines the preferred stackup for 8 layer CUDIMMs and CQDIMMs. Stackup for specific cards may be different from the preferred stackup in Table 16 and Table 17.

Multiple factors influence module stackup definition, and it is expected that module vendors will define their stackups in conjunction with PCB vendors, based on many factors including; material properties, material availability, electrical performance, and cost.

The stackups shown here are intended for reference only, in order to demonstrate feasibility of the key performance.

The actual layer construction, trace widths and target impedances used for the design and simulation are documented in each annex.

Table 16 — Preferred 8 Layer Stackup for CUDIMMs and CQDIMMs

Layers				
1	Solder Mask	15 μm		
	Cu	45 μm	Signal	3/8 oz + Plating
	Prepreg	70 μm		
2	Cu	15 μm	VDD/VSS	1/2 oz
	Core	65 μm		
	Cu	15 μm	Signal	1/2 oz
3	Prepreg	360 μm		
	Cu	15 μm	VDD/VSS	1/2 oz
	Core	65 μm		
4	Cu	15 μm	Signal	1/2 oz
	Prepreg	360 μm		
	Cu	15 μm	Signal	1/2 oz
5	Prepreg	360 μm		
	Cu	15 μm	VDD/VSS	1/2 oz
	Core	65 μm		
6	Cu	15 μm	Signal	1/2 oz
	Prepreg	70 μm		
	Cu	45 μm	Signal	3/8 oz + Plating
7	Solder Mask	15 μm		
	Cu	45 μm	Signal	3/8 oz + Plating
	Prepreg	70 μm		
8	Cu	15 μm	VDD/VSS	1/2 oz
	Core	65 μm		
	Cu	15 μm	Signal	1/2 oz

8.8 Impedance Targets

The impedances defined here are the design targets.

Four impedances are defined for DDR5 CUDIMMs and CQDIMMs.

1. $55\ \Omega \pm 10\%$ (typically achieved with 0.075 mm trace widths)
2. $50\ \Omega \pm 10\%$ (typically achieved with 0.10 mm trace widths)
3. $40\ \Omega \pm 10\%$ (typically achieved with 0.15 mm trace widths)
4. $25\ \Omega \pm 10\%$ (typically achieved with 0.25 mm trace widths)
5. $20\ \Omega \pm 10\%$ (typically achieved with 0.30 mm trace widths)

The differential traces are routed with the single ended traces defined above with 0.10 mm space.

The typical differential impedances are shown below.

1. Single $40\ \Omega$ (0.15 mm) trace widths with a 0.10 mm space: typically $70\ \Omega$
2. Single $25\ \Omega$ (0.25 mm) trace widths with a 0.10 mm space: typically $45\ \Omega$
3. Single $20\ \Omega$ (0.30 mm) trace widths with a 0.10 mm space: typically $40\ \Omega$

They are the result of the single ended impedance with the spacing, and is not a requirement.

Table 17 — Target Impedance Assignment by Signal Type

Signal Type	
DCK	$40\ \Omega$ Single ended with 0.10 mm space (typically $70\ \Omega$ differential)
QCK	$25\ \Omega$ Single ended with 0.10 mm space (typically $45\ \Omega$ differential)
	or $20\ \Omega$ Single ended with 0.10 mm space (typically $40\ \Omega$ differential)
Command /Address	Lead-in: $40\ \Omega$, Loaded: $55\ \Omega$
Chip Select	Lead-in: $40\ \Omega$, Loaded: $55\ \Omega$
DQ, DM	$40\ \Omega$
DQS	$40\ \Omega$ Single ended with 0.10 mm space (typically $70\ \Omega$ differential)
Misc signals (low speed)	55 or $50\ \Omega$

NOTE Some design files may use different target impedances. Please refer to the design deviations section of each annex, and the readme and checklist files in design package.

8.9 Module Sideband Bus

Please refer to the latest version of the JESD403-1, *JEDEC Module Sideband Bus (SidebandBus)*. The picture below is an example; designs may have different configurations. For example, CQDIMM has multiple CK buffers.

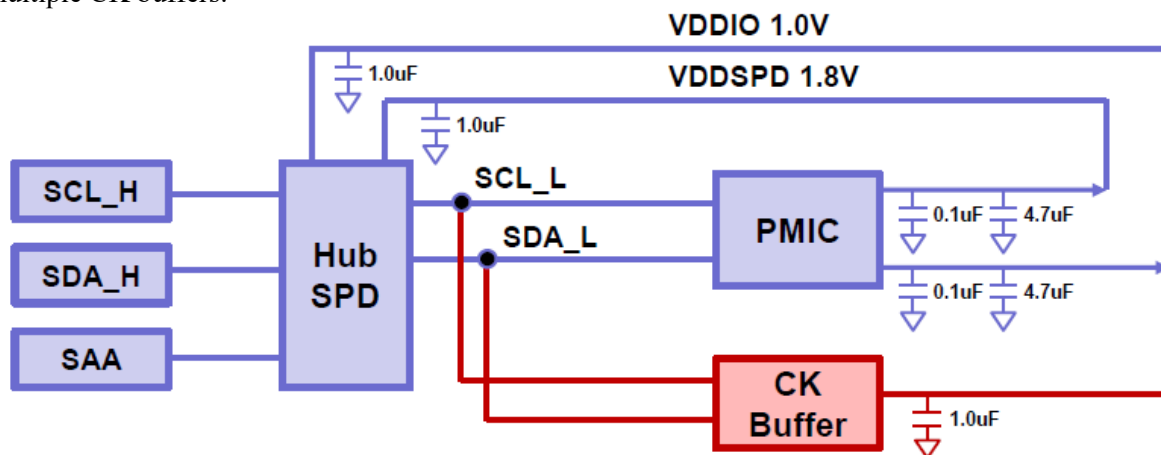


Figure 7 — Sideband Bus Wiring Example

Sideband Bus Length rule:

- Gold Finger to Hub: 105 mm or less.
- Hub to PMIC: 33 mm or less.
- Hub to CKD: 28 mm or less.
- Length does not include via travel or compensation.
- DIMM suppliers may adjust each length.

8.10 DQ Swizzling Rules

The DDR5 modules do not need to record DQ mapping in SPD, but need to follow the following bit swizzling rules.

- Rule 1: Bits within a nibble + strobe pair must stay together
- Rule 2: Nibbles maybe swapped within the same byte
- Rule 3: Definition of mapping is for rank 0 only. All even ranks have the same DQ mapping.

Even rank to odd rank mapping is to swap bit 0 with bit 1, swap bit 2 with bit 3, swap bit 4 with bit 5, and swap bit 6 with bit 7

The DDR5 CUDIMM and CQDIMM design should follow the DQ mapping of the JEDEC Reference CUDIMM Design of the same configuration. For example, newly designed 1Rx16 CUDIMM should follow the DQ mapping of approved 1Rx16 JEDEC DDR5 CUDIMM Reference design.

9 DIMM Impedance Profile

DIMM impedance Profile is documented in each Annex.

10 Serial Presence Detect

Please refer to the latest version of JESD400-5, *DDR5 Serial Presence Detect (SPD) Contents*

11 Product Label

Please refer to the latest version of JESD401-5, *DDR5 DIMM Label*.

12 JEDEC Process

JEDEC provides PCB reference designs for DIMM modules. The designs are divided into families one of which is Clocked Unbuffered Dual Inline Memory Modules (CUDIMMs and CQDIMMs). Letters (A, B, C, etc.) are used to define specific configurations (raw cards) of modules such as 2 rank with x8 based SDRAMs. Additional characteristics may further refine cards into specific raw card (R/C) letters. Letter assignments are arbitrary and usually chronological. There is no other association to the letter assignments.

R/Cs are reviewed and balloted by JEDEC members before being placed on the JEDEC website as reference designs. This is called registration. The initial registration is 0. A specific card may be the registration of R/C A0. Subsequent design updates to the reference design go through the same balloting process and increments the registration number from 0 to 1 or the next highest number.

Annex A — (Informative) Differences between Revisions

A.1 Differences between JESD323A Version 1.1 and JESD323 Version 1.0, dated Dec. 2023

<u>Page</u>	<u>Change</u>
Cover	Editorial document title change from "... Specification" to "... Standard" to align with JEDEC document # JM7A "Style Manual for Standards and Other Publications of JEDEC"
1	Clause 2: Added JESD301-6: PMIC5120 standard to Related Standards
2	Table 1: Added JESD301-6: PMIC5120
4	Table 4: Corrected HSCL I/O level
5	Table 4: Corrected HSDA I/O level.
8	Clause 6.1: Updated texts for Power Up/Down sequence
8	Clause 6.2: Changed register setting for PMIC5120 from "must" to "recommended" based on TG discussion.
8	Table 7: New table for register settings for PMIC5120
15	Table 12: Updated CMD/ADR, CS to CK Match from +/-10 mm to +10 mm/-16 mm
24	Clause 8.6.11: Added TVS requirement based on ballot results for DDR5 CUDIMM and CSODIMM.

A.2 Differences between JESD323B Version 2.0 and JESD323A Version 1.1, dated Feb. 2025

<u>Page</u>	<u>Change</u>
All	"CUDIMM" to "CUDIMM and CQDIMM"
1	SCOPE: Added description of CQDIMM and reference to deviation section of annex "PC5-6400 and beyond PC5-7200 support" to "PC5-6400 and up to PC5-9200 support", "SRDAM" to "SDRAM"
	"Computers" to "computers"
2	Table 1: Max capacity 128 to 256
3, 4	Table 3 and Table 4: Added CS2_n and CS3_n for CQDIMM
5-7	Table 5: Updated Pin# 70, #214, #81, and #225 from "RFU" to "RFU/CSx"
15	Table 12: Added "NOTE 4 — Length matching rule between DCK0 and DCK1 pair not applied to 1-rank modules."
26	Clause 8.8 and Table 17: Added Target impedance 20(40), 50, Signal type: Misc
27	Clause 8.9: Added Sideband Bus Length rule

This page intentionally left blank



Standard Improvement Form**JEDEC JESD323B**

The purpose of this form is to provide the Technical Committees of JEDEC with input from the industry regarding usage of the subject standard. Individuals or companies are invited to submit comments to JEDEC. All comments will be collected and dispersed to the appropriate committee(s).

If you can provide input, please complete this form and return to:

JEDEC

Email : angies@jedec.org

Attn: Publications Department

3103 10th Street North

Suite 240S

Arlington, VA 22201

1. I recommend changes to the following:

☐ Requirement, clause number _____☐ Test method number _____ Clause number _____

The referenced clause number has proven to be:

☐ Unclear ☐ Too Rigid ☐ In Error☐ Other _____

2. Recommendations for correction:

3. Other suggestions for document improvement:

Submitted by

Name: _____

Phone: _____

Company: _____

E-mail: _____

Address: _____

City/State/Zip: _____

Date: _____

