

# **JEDEC STANDARD**

---

## **The Measurement of Transistor Noise Figure at Frequencies up to 20 kHz by Sinusoidal Signal-Generator Method**

---

### **JESD353**

(Previously known as RS-353 and/or EIA-353)

**APRIL 1968 (Reaffirmed: April 1981, April 1999, March 2009)**

---

**JEDEC SOLID STATE TECHNOLOGY ASSOCIATION**



## NOTICE

JEDEC standards and publications contain material that has been prepared, reviewed, and approved through the JEDEC Board of Directors level and subsequently reviewed and approved by the JEDEC legal counsel.

JEDEC standards and publications are designed to serve the public interest through eliminating misunderstandings between manufacturers and purchasers, facilitating interchangeability and improvement of products, and assisting the purchaser in selecting and obtaining with minimum delay the proper product for use by those other than JEDEC members, whether the standard is to be used either domestically or internationally.

JEDEC standards and publications are adopted without regard to whether or not their adoption may involve patents or articles, materials, or processes. By such action JEDEC does not assume any liability to any patent owner, nor does it assume any obligation whatever to parties adopting the JEDEC standards or publications.

The information included in JEDEC standards and publications represents a sound approach to product specification and application, principally from the solid state device manufacturer viewpoint. Within the JEDEC organization there are procedures whereby a JEDEC standard or publication may be further processed and ultimately become an ANSI standard.

No claims to be in conformance with this standard may be made unless all requirements stated in the standard are met.

Inquiries, comments, and suggestions relative to the content of this JEDEC standard or publication should be addressed to JEDEC at the address below, or call (703) 907-7559 or [www.jedec.org](http://www.jedec.org)

Published by  
©JEDEC Solid State Technology Association 2009  
3103 North 10th Street  
Suite 240 South  
Arlington, VA 22201-2107

This document may be downloaded free of charge; however JEDEC retains the copyright on this material. By downloading this file the individual agrees not to charge for or resell the resulting material.

**PRICE: Please refer to the current  
Catalog of JEDEC Engineering Standards and Publications online at  
<http://www.jedec.org/Catalog/catalog.cfm>**

Printed in the U.S.A.  
All rights reserved

PLEASE!

DON'T VIOLATE  
THE  
LAW!

This document is copyrighted by JEDEC and may not be  
reproduced without permission.

Organizations may obtain permission to reproduce a limited number of copies  
through entering into a license agreement. For information, contact:

JEDEC Solid State Technology Association  
3103 North 10th Street  
Suite 240 South  
Arlington, VA 22201-2107  
or call (703) 907-7559



APRIL, 1968

(Reaffirmed 4/81, 4/99)



# EIA STANDARD

*for*

## THE MEASUREMENT OF TRANSISTOR NOISE FIGURE AT FREQUENCIES UP TO 20 kHz BY SINUSOIDAL SIGNAL-GENERATOR METHOD

ELECTRONIC INDUSTRIES ASSOCIATION  
STANDARD RS-353

---

Formulated by

**JEDEC Semiconductor Device Council**

## NOTICE

EIA engineering standards are designed to serve the public interest through eliminating misunderstandings between manufacturers and purchasers, facilitating interchangeability and improvement of products, and assisting the purchaser in selecting and obtaining with minimum delay the proper product for his particular need. Existence of such standards shall not in any respect preclude any member or non-member of EIA from manufacturing or selling products not conforming to such standards, nor shall the existence of such standards preclude their voluntary use by those other than EIA members whether the standard is to be used either domestically or internationally.

Recommended standards are adopted by EIA without regard to whether or not their adoption may involve patents on articles, materials, or processes. By such action, EIA does not assume any liability to any patent owner, nor does it assume any obligation whatever to parties adopting the recommended standards.

Published by

## **ELECTRONIC INDUSTRIES ASSOCIATION**

**Engineering Department**

**2001 Eye Street, N. W., Washington, D. C. 20006**

---

©Electronic Industries Association 1968

All rights reserved

Printed in U.S.A.

# STANDARD FOR THE MEASUREMENT OF TRANSISTOR NOISE FIGURE AT FREQUENCIES UP TO 20 kHz BY SINUSOIDAL SIGNAL-GENERATOR METHOD

*(From Standards Proposal No. 962, formulated under the cognizance of JEDEC  
Committee JS-9 on Signal Transistors.)*

## 1. INTRODUCTION

The following noise measurement method applies to transistors whose noise has a Gaussian power distribution, to transistors whose noise has a flat (white) power distribution, and to transistors whose noise has a  $1/f$  (power inversely proportional to frequency) power distribution.

Figure 1 shows a suitable method for measuring the transistor noise figure at frequencies equal to or less than 20 kHz. The values for the generator source resistance (as seen by the transistor),  $R_s$ , the d-c operating conditions, and free-air, lead or case temperature will depend upon the application and upon the optimum conditions for any particular device. These quantities, as well as the test frequency, should be specified. Common-emitter (common-source) configuration is assumed unless otherwise indicated.

### 1.1 Definition

The Noise Figure (Spot Noise Figure),<sup>1</sup> at a specified frequency, is defined as the ratio of (1) the total noise power per unit bandwidth at that frequency available at the output port when the noise temperature of the input termination is at the standard temperature (290°K) to (2) that portion of (1) engendered by the input termination.

## 2. GENERAL

The test set-up must be very well shielded, grounded, and securely interconnected to prevent pick-up of unwanted signals and generation of additional noise.

### 2.1 Signal Generator

The signal generator is a sine-wave oscillator capable of operation up to 20 kHz.

---

<sup>1</sup> Abridged version of the Noise Factor definition, IRE Standard on Electron Tubes; Definitions of Terms, 1957 (57 IRE 7S2).

## 2.2 Bias Supplies

Batteries or low-ripple d-c supplies should be used. All biases applied should be bypassed for both radio and audio frequencies.

## 2.3 Amplifier

The amplifier noise should be such that with the signal generator turned off, any transistor under test gives at least an increase of 15 dB above the reading due to the post amplifier itself with no transistor in the test circuit.

Heterodyne-type post amplifiers may be used but careful attention must be paid to the image and other spurious responses which can be encountered with such amplifiers. These spurious responses must be made negligible or must be accounted for in the measurement.

To provide for the crest factor of the noise, the amplifier must be essentially linear from the indicated RMS level to a minimum of 10 dB above the indicated RMS level.

## 2.4 System Pass-Band

The system pass-band, which includes the transistor under test, shall be adjusted by means of filters so that the response to white and/or  $1/f$  noise would be the same to within the accuracy desired. Analysis of such filter systems are quite complicated; however, the following two systems have been analyzed:

1. With  $1/f$  noise voltage applied to a single-section resonant filter having a  $Q$  of 6, the indicated noise voltage density will be 2.2% lower than the true spot noise voltage density at the resonant frequency of the filter. The equivalent white-noise bandwidth of the filter is 1.57 times the 3-dB bandwidth.<sup>1</sup>
2. With  $1/f$  noise voltage applied to a maximally flat four-section filter having a white-noise bandwidth numerically equal to the geometric center frequency of the filter, the indicated noise voltage density will be 1.9% lower than the true spot noise voltage density at the geometric center frequency. The equivalent white-noise bandwidth of the filter is 1.025 times the 3-dB bandwidth.<sup>2</sup>

## 2.5 Noise Detectors<sup>3,4</sup>

The noise detector must respond to the true RMS value or average value of the applied signal. If an average type detector is used, the RMS value indicated for noise will be 1.05 dB low. The integration time should be as long as practical in accordance with the accuracy required as determined by the following equations:

---

<sup>1</sup>Valley and Wallman, *Vacuum Tube Amplifiers*, Radiation Lab Series, Vol. 18, p. 169, 1948.

<sup>2</sup>A. Conrad, et al, *A Recommended Standard Resistor Noise Test System*, IRE Trans. of P.G. on Component Parts, Vol. CP-7, No.3, September 1960.

<sup>3</sup>W. R. Bennett, *Electrical Noise*, McGraw Hill, p. 45, 1960.

<sup>4</sup>A. van der Ziel, *Noise*, Prentice Hall, Chapter 13, 1956.

### True RMS Detector

For total integration time, t

$$\sigma = \frac{1}{\sqrt{Bt}}$$

For time  $\tau$  = time constant

$$\sigma = \frac{1}{\sqrt{2B\tau}}$$

### Averaging Detector (Linear Full-Wave Detector)

$$\sigma = \frac{1}{\sqrt{4Bt}}$$

$$\sigma = \frac{1}{\sqrt{8B\tau}}$$

where:  $\sigma$  = the one-sigma deviation of the RMS value from the long-time average

B = the equivalent system-noise bandwidth in hertz

t = total integration time in seconds

$\tau$  = simple RC time constant

## 3. TRANSISTOR UNDER TEST

The transistor under test shall be inserted in an amplifier circuit having the general configuration shown in Figure 1. A similar configuration in which the transistor is operated in the common-base (common-gate) or common-collector (common-drain) connection may be used.

## 4. METHOD OF TEST

The attenuator is adjusted to give a convenient reading on the noise detector. The signal voltage  $V_g$ , is adjusted such that the output voltage  $V_{02}$  is at least ten times as large as the output voltage  $V_{01}$  corresponding to zero-signal voltage. Thus, the spot noise figure is:

$$\text{NF in dB} = 10 \log \frac{(V_{01})^2}{(V_{02})^2} \frac{(V_g)^2}{4kTBR_s}$$

where: k = Boltzmann's Constant =  $1.38054 \times 10^{-23}$  J/deg

T = Absolute Temperature of  $R_s$  in °K

$R_s$  = Generator (source) Resistance

$B$  = The equivalent system-noise bandwidth in hertz

$V_{02}$  = The output voltage

$V_{01}$  = The output voltage at zero-signal voltage

$V_g$  = Signal generator voltage

## 5. SYSTEM ACCURACY

System errors consist of the following:

1. Calibration errors
2. Pass-band determination (See Section 2.4)
3. Meter deviation (See Section 2.5)
4. Amplifier noise will increase the noise figure measurement by less than 0.1 dB if it is more than 15 dB below that of the transistor under test.

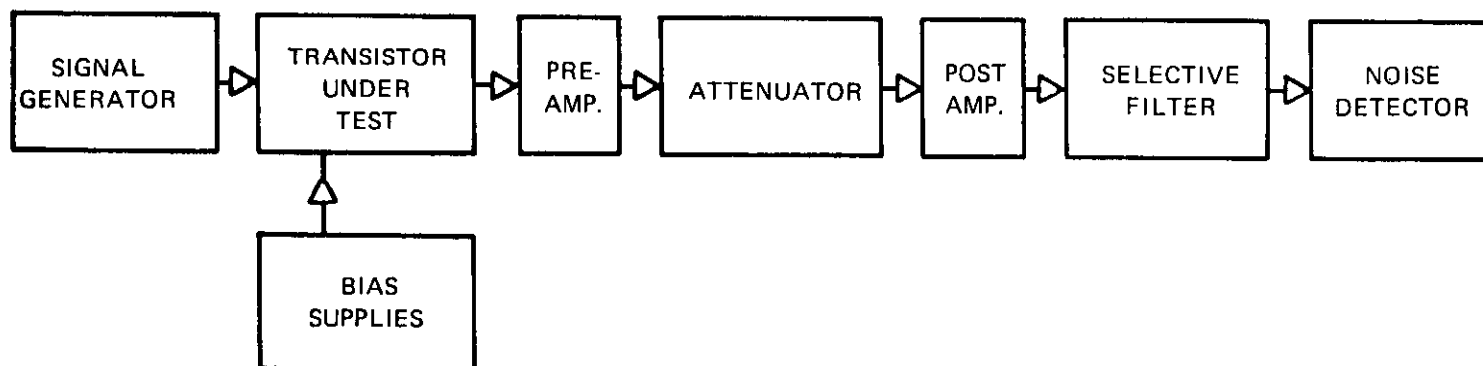


FIGURE 1

## RELATED EIA STANDARDS

In addition to this Standard the following EIA Standards pertinent to transistor noise figure measurements are available:

RS-283	Test Method for Transistor Noise Figure Measurements at Medium Frequencies (NEMA Publication No. SK 503-1963).....	\$ .60
RS-306	Measurement of Small Signal HF, VHF and UHF Power Gain of Transistors (NEMA Publication No. SK 506-1965) .....	.60
RS-311	Measurement of Transistor Noise Figure at HF and VHF (NEMA Publication No. SK 509-1965) .....	1.00
RS-354	The Measurement of Transistor Equivalent Noise Voltage and Equivalent Noise Current at Frequencies up to 20 kHz .....	1.00

*Minimum Order \$1.00*

-----

For a free and complete list of all EIA Standards and Publications write:

Engineering Department  
Electronic Industries Association  
2001 Eye Street, N.W.  
Washington, D. C. 20006





***JEDEC***

The JEDEC logo is centered on a light gray rectangular background. It features the word "JEDEC" in a bold, italicized, dark gray sans-serif font. A thick, dark red horizontal line with a slight upward slope on the right end underlines the text.