Vulkan® 1.3.301 - A Specification

The Khronos® Vulkan Working Group

Version 1.3.301, 2024-11-01 15:50:48Z: from git branch: github-main commit: d095b206f80dc85140898a7979b2c3bb81aeb7f9

Table of Contents

1. Preamble . . . 1
2. Introduction . . . 3
   2.1. Document Conventions . . . 3
3. Fundamentals . . . 6
   3.1. Host and Device Environment . . . 6
   3.2. Execution Model . . . 6
   3.3. Object Model . . . 8
   3.4. Application Binary Interface . . . 12
   3.5. Command Syntax and Duration . . . 13
   3.6. Threading Behavior . . . 16
   3.7. Valid Usage . . . 23
   3.8. `VkResult` Return Codes . . . 30
   3.9. Numeric Representation and Computation . . . 33
   3.10. Fixed-Point Data Conversions . . . 35
   3.11. String Representation . . . 36
   3.12. Common Object Types . . . 36
   3.13. API Name Aliases . . . 46
4. Initialization . . . 48
   4.1. Command Function Pointers . . . 48
   4.2. Instances . . . 51
5. Devices and Queues . . . 59
   5.1. Physical Devices . . . 59
   5.2. Devices . . . 90
   5.3. Queues . . . 102
6. Command Buffers . . . 110
   6.1. Command Buffer Lifecycle . . . 110
   6.2. Command Pools . . . 112
   6.3. Command Buffer Allocation and Management . . . 119
   6.4. Command Buffer Recording . . . 123
   6.5. Command Buffer Submission . . . 132
   6.6. Queue Forward Progress . . . 149
   6.7. Secondary Command Buffer Execution . . . 150
   6.8. Command Buffer Device Mask . . . 155
7. Synchronization and Cache Control . . . 159
   7.1. Execution and Memory Dependencies . . . 159
   7.2. Implicit Synchronization Guarantees . . . 181
   7.3. Fences . . . 183
   7.4. Semaphores . . . 194

7.5. Events . . . 208
7.6. Pipeline Barriers . . . 231
7.7. Memory Barriers . . . 239
7.8. Wait Idle Operations . . . 272
7.9. Host Write Ordering Guarantees . . . 274
7.10. Synchronization and Multiple Physical Devices . . . 274
8. Render Pass . . . 276
8.1. Render Pass Objects . . . 289
8.2. Render Pass Creation . . . 291
8.3. Render Pass Compatibility . . . 338
8.4. Framebuffers . . . 339
8.5. Render Pass Load Operations . . . 348
8.6. Render Pass Store Operations . . . 349
8.7. Render Pass Multisample Resolve Operations . . . 350
8.8. Render Pass Commands . . . 352
8.9. Common Render Pass Data Races (Informative) . . . 373
9. Shaders . . . 375
9.1. Shader Modules . . . 375
9.2. Binding Shaders . . . 379
9.3. Shader Execution . . . 379
9.4. Shader Memory Access Ordering . . . 380
9.5. Shader Inputs and Outputs . . . 381
9.6. Vertex Shaders . . . 381
9.7. Tessellation Control Shaders . . . 382
9.8. Tessellation Evaluation Shaders . . . 382
9.9. Geometry Shaders . . . 382
9.10. Fragment Shaders . . . 383
9.11. Compute Shaders . . . 383
9.12. Interpolation Decorations . . . 383
9.13. Static Use . . . 384
9.14. Scope . . . 384
9.15. Group Operations . . . 388
9.16. Quad Group Operations . . . 389
9.17. Derivative Operations . . . 390
9.18. Helper Invocations . . . 391
10. Pipelines . . . 393
10.1. Multiple Pipeline Creation . . . 394
10.2. Compute Pipelines . . . 395
10.3. Graphics Pipelines . . . 405
10.4. Pipeline Destruction . . . 428
10.5. Pipeline Derivatives . . . 429

10.6. Pipeline Cache . . . 429
10.7. Specialization Constants . . . 438
10.8. Pipeline Binding . . . 442
10.9. Dynamic State . . . 444
10.10. Pipeline Creation Feedback . . . 444
11. Memory Allocation . . . 448
11.1. Host Memory . . . 448
11.2. Device Memory . . . 455
12. Resource Creation . . . 485
12.1. Buffers . . . 485
12.2. Buffer Views . . . 493
12.3. Images . . . 498
12.4. Image Layouts . . . 521
12.5. Image Views . . . 525
12.6. Resource Memory Association . . . 541
12.7. Resource Sharing Mode . . . 570
12.8. Memory Aliasing . . . 572
13. Samplers . . . 575
13.1. Sampler $Y'C_BC_R$ Conversion . . . 585
14. Resource Descriptors . . . 593
14.1. Descriptor Types . . . 593
14.2. Descriptor Sets . . . 597
14.3. Physical Storage Buffer Access . . . 664
15. Shader Interfaces . . . 668
15.1. Shader Input and Output Interfaces . . . 668
15.2. Vertex Input Interface . . . 671
15.3. Fragment Output Interface . . . 672
15.4. Fragment Input Attachment Interface . . . 673
15.5. Shader Resource Interface . . . 674
15.6. Built-In Variables . . . 682
16. Image Operations . . . 705
16.1. Image Operations Overview . . . 705
16.2. Conversion Formulas . . . 708
16.3. Texel Input Operations . . . 710
16.4. Texel Output Operations . . . 726
16.5. Normalized Texel Coordinate Operations . . . 728
16.6. Unnormalized Texel Coordinate Operations . . . 735
16.7. Integer Texel Coordinate Operations . . . 736
16.8. Image Sample Operations . . . 736
16.9. Image Operation Steps . . . 740
16.10. Image Query Instructions . . . 741

17. Queries . . . 742
17.1. Query Pools . . . 742
17.2. Query Operation . . . 746
17.3. Occlusion Queries . . . 761
17.4. Pipeline Statistics Queries . . . 762
17.5. Timestamp Queries . . . 764
18. Clear Commands . . . 771
18.1. Clearing Images Outside a Render Pass Instance . . . 771
18.2. Clearing Images Inside a Render Pass Instance . . . 777
18.3. Clear Values . . . 780
18.4. Filling Buffers . . . 782
18.5. Updating Buffers . . . 784
19. Copy Commands . . . 788
19.1. Copying Data Between Buffers . . . 788
19.2. Copying Data Between Images . . . 794
19.3. Copying Data Between Buffers and Images . . . 812
19.4. Image Copies With Scaling . . . 836
19.5. Resolving Multisample Images . . . 850
20. Drawing Commands . . . 862
20.1. Primitive Topologies . . . 864
20.2. Primitive Order . . . 873
20.3. Programmable Primitive Shading . . . 873
21. Fixed-Function Vertex Processing . . . 955
21.1. Vertex Attributes . . . 955
21.2. Vertex Input Description . . . 959
21.3. Vertex Input Address Calculation . . . 967
22. Tessellation . . . 969
22.1. Tessellator . . . 969
22.2. Tessellator Patch Discard . . . 971
22.3. Tessellator Spacing . . . 972
22.4. Tessellation Primitive Ordering . . . 972
22.5. Tessellator Vertex Winding Order . . . 973
22.6. Triangle Tessellation . . . 973
22.7. Quad Tessellation . . . 975
22.8. Isoline Tessellation . . . 977
22.9. Tessellation Point Mode . . . 977
22.10. Tessellation Pipeline State . . . 977
23. Geometry Shading . . . 980
23.1. Geometry Shader Input Primitives . . . 980
23.2. Geometry Shader Output Primitives . . . 981
23.3. Multiple Invocations of Geometry Shaders . . . 981

23.4. Geometry Shader Primitive Ordering . . . 981
24. Fixed-Function Vertex Post-Processing . . . 982
24.1. Flat Shading . . . 982
24.2. Primitive Clipping . . . 982
24.3. Clipping Shader Outputs . . . 984
24.4. Coordinate Transformations . . . 985
24.5. Controlling the Viewport . . . 986
25. Rasterization . . . 995
25.1. Discarding Primitives Before Rasterization . . . 999
25.2. Rasterization Order . . . 1000
25.3. Multisampling . . . 1000
25.4. Sample Shading . . . 1003
25.5. Points . . . 1003
25.6. Line Segments . . . 1004
25.7. Polygons . . . 1009
26. Fragment Operations . . . 1020
26.1. Scissor Test . . . 1021
26.2. Sample Mask Test . . . 1023
26.3. Fragment Shading . . . 1023
26.4. Multisample Coverage . . . 1024
26.5. Depth and Stencil Operations . . . 1025
26.6. Depth Bounds Test . . . 1026
26.7. Stencil Test . . . 1029
26.8. Depth Test . . . 1038
26.9. Sample Counting . . . 1042
26.10. Coverage Reduction . . . 1043
27. The Framebuffer . . . 1044
27.1. Blending . . . 1044
27.2. Logical Operations . . . 1053
27.3. Color Write Mask . . . 1054
28. Dispatching Commands . . . 1056
29. Sparse Resources . . . 1072
29.1. Sparse Resource Features . . . 1072
29.2. Sparse Buffers and Fully-Resident Images . . . 1073
29.3. Sparse Partially-Resident Buffers . . . 1074
29.4. Sparse Partially-Resident Images . . . 1074
29.5. Sparse Memory Aliasing . . . 1082
29.6. Sparse Resource Implementation Guidelines (Informative) . . . 1083
29.7. Sparse Resource API . . . 1084
30. Private Data . . . 1112
31. Extending Vulkan . . . 1117

31.1. Instance and Device Functionality . . . 1117
31.2. Core Versions . . . 1117
31.3. Layers . . . 1121
31.4. Extensions . . . 1125
31.5. Extension Dependencies . . . 1129
31.6. Compatibility Guarantees (Informative) . . . 1130
32. Features . . . 1135
32.1. Feature Requirements . . . 1185
32.2. Profile Features . . . 1187
33. Limits . . . 1189
33.1. Limit Requirements . . . 1217
33.2. Profile Limits . . . 1228
34. Formats . . . 1231
34.1. Format Definition . . . 1231
34.2. Format Properties . . . 1278
34.3. Required Format Support . . . 1290
35. Additional Capabilities . . . 1310
35.1. Additional Image Capabilities . . . 1310
35.2. Additional Buffer Capabilities . . . 1323
35.3. Optional Semaphore Capabilities . . . 1325
35.4. Optional Fence Capabilities . . . 1329
36. Debugging . . . 1334
36.1. Active Tooling Information . . . 1335
Appendix A: Vulkan Environment for SPIR-V . . . 1339
Versions and Formats . . . 1339
Capabilities . . . 1339
Validation Rules Within a Module . . . 1346
Precision and Operation of SPIR-V Instructions . . . 1364
Signedness of SPIR-V Image Accesses . . . 1370
Image Format and Type Matching . . . 1370
Compatibility Between SPIR-V Image Dimensions and Vulkan ImageView Types . . . 1372
Compatibility Between SPIR-V Image Formats and Vulkan Formats . . . 1373
Appendix B: Memory Model . . . 1375
Agent . . . 1375
Memory Location . . . 1375
Allocation . . . 1375
Memory Operation . . . 1375
Reference . . . 1376
Program-Order . . . 1376
Scope . . . 1377
Atomic Operation . . . 1377

Scoped Modification Order . . . 1377
Memory Semantics . . . 1378
Release Sequence . . . 1379
Synchronizes-With . . . 1380
System-Synchronizes-With . . . 1381
Private vs. Non-Private . . . 1382
Inter-Thread-Happens-Before . . . 1382
Happens-Before . . . 1382
Availability and Visibility . . . 1383
Availability, Visibility, and Domain Operations . . . 1385
Availability and Visibility Semantics . . . 1385
Per-Instruction Availability and Visibility Semantics . . . 1386
Location-Ordered . . . 1386
Data Race . . . 1387
Visible-To . . . 1387
Acyclicity . . . 1388
Shader I/O . . . 1389
Deallocation . . . 1389
Descriptions (Informative) . . . 1389
Tessellation Output Ordering . . . 1390
Appendix C: Compressed Image Formats . . . 1391
Block-Compressed Image Formats . . . 1392
ETC Compressed Image Formats . . . 1393
ASTC Compressed Image Formats . . . 1394
Appendix D: Core Revisions (Informative) . . . 1396
Vulkan Version 1.3 . . . 1396
Vulkan Version 1.2 . . . 1405
Vulkan Version 1.1 . . . 1413
Vulkan Version 1.0 . . . 1424
Appendix E: Layers & Extensions (Informative) . . . 1438
Extension Dependencies . . . 1438
Extension Interactions . . . 1438
List of Extensions . . . 1439
Appendix F: Vulkan Roadmap Milestones . . . 1440
Roadmap 2022 . . . 1440
Roadmap 2024 . . . 1444
Appendix G: API Boilerplate . . . 1447
Vulkan Header Files . . . 1447
Window System-Specific Header Control (Informative) . . . 1451
Provisional Extension Header Control (Informative) . . . 1453
Video Std Headers . . . 1453

Appendix H: Invariance 1455
Repeatability 1455
Multi-Pass Algorithms 1455
Invariance Rules 1455
Tessellation Invariance 1457
Appendix I: Lexicon 1459
Glossary 1459
Common Abbreviations 1481
Prefixes 1482
Appendix J: Credits (Informative) 1484
Working Group Contributors to Vulkan 1484
Other Credits 1492

Chapter 1. Preamble

Copyright 2014-2024 The Khronos Group Inc.

This Specification is protected by copyright laws and contains material proprietary to Khronos. Except as described by these terms, it or any components may not be reproduced, republished, distributed, transmitted, displayed, broadcast or otherwise exploited in any manner without the express prior written permission of Khronos.

Khronos grants a conditional copyright license to use and reproduce the unmodified Specification for any purpose, without fee or royalty, EXCEPT no licenses to any patent, trademark or other intellectual property rights are granted under these terms.

Khronos makes no, and expressly disclaims any, representations or warranties, express or implied, regarding this Specification, including, without limitation: merchantability, fitness for a particular purpose, non-infringement of any intellectual property, correctness, accuracy, completeness, timeliness, and reliability. Under no circumstances will Khronos, or any of its Promoters, Contributors or Members, or their respective partners, officers, directors, employees, agents or representatives be liable for any damages, whether direct, indirect, special or consequential damages for lost revenues, lost profits, or otherwise, arising from or in connection with these materials.

This Specification has been created under the Khronos Intellectual Property Rights Policy, which is Attachment A of the Khronos Group Membership Agreement available at https://www.khronos.org/files/member_agreement.pdf. Parties desiring to implement the Specification and make use of Khronos trademarks in relation to that implementation, and receive reciprocal patent license protection under the Khronos Intellectual Property Rights Policy must become Adopters and confirm the implementation as conformant under the process defined by Khronos for this Specification; see https://www.khronos.org/adopters.

This Specification contains substantially unmodified functionality from, and is a successor to, Khronos specifications including OpenGL, OpenGL ES and OpenCL.

The Khronos Intellectual Property Rights Policy defines the terms 'Scope', 'Compliant Portion', and 'Necessary Patent Claims'.

Some parts of this Specification are purely informative and so are EXCLUDED the Scope of this Specification. The Document Conventions section of the Introduction defines how these parts of the Specification are identified.

Where this Specification uses technical terminology, defined in the Glossary or otherwise, that refer to enabling technologies that are not expressly set forth in this Specification, those enabling technologies are EXCLUDED from the Scope of this Specification. For clarity, enabling technologies not disclosed with particularity in this Specification (e.g. semiconductor manufacturing technology, hardware architecture, processor architecture or microarchitecture, memory architecture, compiler technology, object oriented technology, basic operating system technology, compression technology, algorithms, and so on) are NOT to be considered expressly set forth; only those application program interfaces and data structures disclosed with particularity are included in the Scope of this Specification.

For purposes of the Khronos Intellectual Property Rights Policy as it relates to the definition of Necessary Patent Claims, all recommended or optional features, behaviors and functionality set forth in this Specification, if implemented, are considered to be included as Compliant Portions.

Where this Specification identifies specific sections of external references, only those specifically identified sections define normative functionality. The Khronos Intellectual Property Rights Policy excludes external references to materials and associated enabling technology not created by Khronos from the Scope of this Specification, and any licenses that may be required to implement such referenced materials and associated technologies must be obtained separately and may involve royalty payments.

Khronos and Vulkan are registered trademarks, and SPIR-V is a trademark of The Khronos Group Inc. OpenCL is a trademark of Apple Inc., used under license by Khronos. OpenGL is a registered trademark and the OpenGL ES logo is a trademark of Hewlett Packard Enterprise, used under license by Khronos. ASTC is a trademark of ARM Holdings PLC. All other product names, trademarks, and/or company names are used solely for identification and belong to their respective owners.

Chapter 2. Introduction

This document, referred to as the "Vulkan Specification" or just the "Specification" hereafter, describes the Vulkan Application Programming Interface (API). Vulkan is a C99 API designed for explicit control of low-level graphics and compute functionality.

The canonical version of the Specification is available in the official Vulkan Registry (https://registry.khronos.org/vulkan/). The source files used to generate the Vulkan specification are stored in the Vulkan Documentation Repository (https://github.com/KhronosGroup/Vulkan-Docs).

The source repository additionally has a public issue tracker and allows the submission of pull requests that improve the specification.

2.1. Document Conventions

The Vulkan specification is intended for use by both implementors of the API and application developers seeking to make use of the API, forming a contract between these parties. Specification text may address either party; typically the intended audience can be inferred from context, though some sections are defined to address only one of these parties. (For example, Valid Usage sections only address application developers). Any requirements, prohibitions, recommendations or options defined by normative terminology are imposed only on the audience of that text.

NOTE Structure and enumerated types defined in extensions that were promoted to core in a later version of Vulkan are now defined in terms of the equivalent Vulkan core interfaces. This affects the Vulkan Specification, the Vulkan header files, and the corresponding XML Registry.

2.1.1. Ratification

Ratification of a Vulkan core version or extension is a status conferred by vote of the Khronos Board of Promoters, bringing that core version or extension under the umbrella of the Khronos IP Policy.

All Vulkan core versions and `KHR` extensions (including provisional specifications) are ratified, as are some multi-vendor `EXT` extensions. Ratification status of extensions is described in the Layers & Extensions (Informative) appendix.

NOTE

Ratification status is primarily of interest to IHVs developing GPU hardware and Vulkan implementations

For developers, ratification does not necessarily mean that an extension is "better"; has a more stable API; or is more widely supported than alternative ways of achieving that functionality.

Interactions between ratified and non-ratified extensions are not themselves ratified.

2.1.2. Informative Language

Some language in the specification is purely informative, intended to give background or suggestions to implementors or developers.

If an entire chapter or section contains only informative language, its title will be suffixed with "(Informative)".

All NOTEs are implicitly informative.

2.1.3. Normative Terminology

Within this specification, the key words **must**, **required**, **should**, **recommended**, **may**, and **optional** are to be interpreted as described in RFC 2119 - Key words for use in RFCs to Indicate Requirement Levels (https://www.ietf.org/rfc/rfc2119.txt). The additional key word **optionally** is an alternate form of **optional**, for use where grammatically appropriate.

These key words are highlighted in the specification for clarity. In text addressing application developers, their use expresses requirements that apply to application behavior. In text addressing implementors, their use expresses requirements that apply to implementations.

In text addressing application developers, the additional key words **can** and **cannot** are to be interpreted as describing the capabilities of an application, as follows:

can
: This word means that the application is able to perform the action described.

cannot
: This word means that the API and/or the execution environment provide no mechanism through which the application can express or accomplish the action described.

These key words are never used in text addressing implementors.

NOTE

There is an important distinction between **cannot** and **must not**, as used in this Specification. **Cannot** means something the application literally is unable to express or accomplish through the API, while **must not** means something that the application is capable of expressing through the API, but that the consequences of doing so are undefined and potentially unrecoverable for the implementation (see Valid Usage).

Unless otherwise noted in the section heading, all sections and appendices in this document are normative.

2.1.4. Technical Terminology

The Vulkan Specification makes use of common engineering and graphics terms such as **Pipeline**, **Shader**, and **Host** to identify and describe Vulkan API constructs and their attributes, states, and behaviors. The Glossary defines the basic meanings of these terms in the context of the Specification. The Specification text provides fuller definitions of the terms and may elaborate,

extend, or clarify the Glossary definitions. When a term defined in the Glossary is used in normative language within the Specification, the definitions within the Specification govern and supersede any meanings the terms may have in other technical contexts (i.e. outside the Specification).

2.1.5. Normative References

References to external documents are considered normative references if the Specification uses any of the normative terms defined in Normative Terminology to refer to them or their requirements, either as a whole or in part.

The following documents are referenced by normative sections of the specification:

IEEE. August, 2008. *IEEE Standard for Floating-Point Arithmetic*. IEEE Std 754-2008. https://dx.doi.org/10.1109/IEEESTD.2008.4610935 .

Andrew Garrard. *Khronos Data Format Specification, version 1.3*. https://registry.khronos.org/DataFormat/specs/1.3/dataformat.1.3.html .

John Kessenich. *SPIR-V Extended Instructions for GLSL, Version 1.00* (February 10, 2016). https://registry.khronos.org/spir-v/ .

John Kessenich, Boaz Ouriel, and Raun Krisch. *SPIR-V Specification, Version 1.5, Revision 3, Unified* (April 24, 2020). https://registry.khronos.org/spir-v/ .

ITU-T. *H.264 Advanced Video Coding for Generic Audiovisual Services* (August, 2021). https://www.itu.int/rec/T-REC-H.264-202108-I/ .

ITU-T. *H.265 High Efficiency Video Coding* (August, 2021). https://www.itu.int/rec/T-REC-H.265-202108-S/ .

Alliance for Open Media. *AV1 Bitstream & Decoding Process Specification* (January 8, 2019). https://aomediacodec.github.io/av1-spec/av1-spec.pdf .

Jon Leech. *The Khronos Vulkan API Registry* (February 26, 2023). https://registry.khronos.org/vulkan/specs/1.3/registry.html .

Jon Leech and Tobias Hector. *Vulkan Documentation and Extensions: Procedures and Conventions* (February 26, 2023). https://registry.khronos.org/vulkan/specs/1.3/styleguide.html .

Architecture of the Vulkan Loader Interfaces (October, 2021). https://github.com/KhronosGroup/Vulkan-Loader/blob/main/docs/LoaderInterfaceArchitecture.md .

Chapter 3. Fundamentals

This chapter introduces fundamental concepts including the Vulkan architecture and execution model, API syntax, queues, pipeline configurations, numeric representation, state and state queries, and the different types of objects and shaders. It provides a framework for interpreting more specific descriptions of commands and behavior in the remainder of the Specification.

3.1. Host and Device Environment

The Vulkan Specification assumes and requires: the following properties of the host environment with respect to Vulkan implementations:

- The host **must** have runtime support for 8, 16, 32 and 64-bit signed and unsigned twos-complement integers, all addressable at the granularity of their size in bytes.
- The host **must** have runtime support for 32- and 64-bit floating-point types satisfying the range and precision constraints in the Floating-Point Computation section.
- The representation and endianness of these types on the host **must** match the representation and endianness of the same types on every physical device supported.

NOTE Since a variety of data types and structures in Vulkan **may** be accessible by both host and physical device operations, the implementation **should** be able to access such data efficiently in both paths in order to facilitate writing portable and performant applications.

3.2. Execution Model

This section outlines the execution model of a Vulkan system.

Vulkan exposes one or more *devices*, each of which exposes one or more *queues* which **may** process work asynchronously to one another. The set of queues supported by a device is partitioned into *families*. Each family supports one or more types of functionality and **may** contain multiple queues with similar characteristics. Queues within a single family are considered *compatible* with one another, and work produced for a family of queues **can** be executed on any queue within that family. This specification defines the following types of functionality that queues **may** support: graphics, compute, protected memory management, sparse memory management, and transfer.

NOTE A single device **may** report multiple similar queue families rather than, or as well as, reporting multiple members of one or more of those families. This indicates that while members of those families have similar capabilities, they are *not* directly compatible with one another.

Device memory is explicitly managed by the application. Each device **may** advertise one or more heaps, representing different areas of memory. Memory heaps are either device-local or host-local, but are always visible to the device. Further detail about memory heaps is exposed via memory types available on that heap. Examples of memory areas that **may** be available on an implementation include:

- *device-local* is memory that is physically connected to the device.
- *device-local, host visible* is device-local memory that is visible to the host.
- *host-local, host visible* is memory that is local to the host and visible to the device and host.

On other architectures, there **may** only be a single heap that **can** be used for any purpose.

3.2.1. Queue Operation

Vulkan queues provide an interface to the execution engines of a device. Commands for these execution engines are recorded into command buffers ahead of execution time, and then submitted to a queue for execution. Once submitted to a queue, command buffers will begin and complete execution without further application intervention, though the order of this execution is dependent on a number of implicit and explicit ordering constraints.

Work is submitted to queues using *queue submission commands* that typically take the form `vkQueue*` (e.g. vkQueueSubmit , vkQueueBindSparse), and **can** take a list of semaphores upon which to wait before work begins and a list of semaphores to signal once work has completed. The work itself, as well as signaling and waiting on the semaphores are all *queue operations*. Queue submission commands return control to the application once queue operations have been submitted - they do not wait for completion.

There are no implicit ordering constraints between queue operations on different queues, or between queues and the host, so these **may** operate in any order with respect to each other. Explicit ordering constraints between different queues or with the host **can** be expressed with semaphores and fences.

Command buffer submissions to a single queue respect submission order and other implicit ordering guarantees, but otherwise **may** overlap or execute out of order. Other types of batches and queue submissions against a single queue (e.g. sparse memory binding) have no implicit ordering constraints with any other queue submission or batch. Additional explicit ordering constraints between queue submissions and individual batches can be expressed with semaphores and fences.

Before a fence or semaphore is signaled, it is guaranteed that any previously submitted queue operations have completed execution, and that memory writes from those queue operations are available to future queue operations. Waiting on a signaled semaphore or fence guarantees that previous writes that are available are also visible to subsequent commands.

Command buffer boundaries, both between primary command buffers of the same or different batches or submissions as well as between primary and secondary command buffers, do not introduce any additional ordering constraints. In other words, submitting the set of command buffers (which **can** include executing secondary command buffers) between any semaphore or fence operations execute the recorded commands as if they had all been recorded into a single primary command buffer, except that the current state is reset on each boundary. Explicit ordering constraints **can** be expressed with explicit synchronization primitives.

There are a few implicit ordering guarantees between commands within a command buffer, but only covering a subset of execution. Additional explicit ordering constraints can be expressed with the various explicit synchronization primitives.

NOTE Implementations have significant freedom to overlap execution of work submitted to a queue, and this is common due to deep pipelining and parallelism in Vulkan devices.

Commands recorded in command buffers can perform actions, set state that persists across commands, synchronize other commands, or indirectly launch other commands, with some commands fulfilling several of these roles. The “Command Properties” section for each such command lists which of these roles the command takes:

Action

Action commands perform operations that can update values in memory. E.g. draw commands, dispatch commands.

State

State setting commands update the current state of a command buffer, affecting the operation of future action commands.

Synchronization

Synchronization commands impose ordering constraints on action commands, by introducing explicit execution and memory dependencies.

Indirection

Indirection commands execute other commands which were not directly recorded in the same command buffer.

NOTE In the absence of explicit synchronization or implicit ordering guarantees, action commands may overlap execution or execute out of order, potentially leading to data races. However, such reordering does not affect the current state observed by any action command. Each action command uses the state in effect at the point where the command occurs in the command buffer, regardless of when it is executed.

3.3. Object Model

The devices, queues, and other entities in Vulkan are represented by Vulkan objects. At the API level, all objects are referred to by handles. There are two classes of handles, dispatchable and non-dispatchable. *Dispatchable* handle types are a pointer to an opaque type. This pointer **may** be used by layers as part of intercepting API commands, and thus each API command takes a dispatchable type as its first parameter. Each object of a dispatchable type **must** have a unique handle value during its lifetime.

Non-dispatchable handle types are a 64-bit integer type whose meaning is implementation-dependent. If the `privateData` feature is enabled for a VkDevice, each object of a non-dispatchable type created on that device **must** have a handle value that is unique among objects created on that device, for the duration of the object’s lifetime. Otherwise, non-dispatchable handles **may** encode object information directly in the handle rather than acting as a reference to an underlying object, and thus **may** not have unique handle values. If handle values are not unique, then destroying one

such handle **must** not cause identical handles of other types to become invalid, and **must** not cause identical handles of the same type to become invalid if that handle value has been created more times than it has been destroyed.

All objects created or allocated from a `VkDevice` (i.e. with a `VkDevice` as the first parameter) are private to that device, and **must** not be used on other devices.

3.3.1. Object Lifetime

Objects are created or allocated by `vkCreate*` and `vkAllocate*` commands, respectively. Once an object is created or allocated, its "structure" is considered to be immutable, though the contents of certain object types is still free to change. Objects are destroyed or freed by `vkDestroy*` and `vkFree*` commands, respectively.

Objects that are allocated (rather than created) take resources from an existing pool object or memory heap, and when freed return resources to that pool or heap. While object creation and destruction are generally expected to be low-frequency occurrences during runtime, allocating and freeing objects **can** occur at high frequency. Pool objects help accommodate improved performance of the allocations and frees.

It is an application's responsibility to track the lifetime of Vulkan objects, and not to destroy them while they are still in use.

The ownership of application-owned memory is immediately acquired by any Vulkan command it is passed into. Ownership of such memory **must** be released back to the application at the end of the duration of the command, so that the application **can** alter or free this memory as soon as all the commands that acquired it have returned.

The following object types are consumed when they are passed into a Vulkan command and not further accessed by the objects they are used to create. They **must** not be destroyed in the duration of any API command they are passed into:

- `VkShaderModule`
- `VkPipelineCache`

A `VkRenderPass` or `VkPipelineLayout` object passed as a parameter to create another object is not further accessed by that object after the duration of the command it is passed into. A `VkRenderPass` used in a command buffer follows the rules described below.

`VkDescriptorSetLayout` objects **may** be accessed by commands that operate on descriptor sets allocated using that layout, and those descriptor sets **must** not be updated with vkUpdateDescriptorSets after the descriptor set layout has been destroyed. Otherwise, a VkDescriptorSetLayout object is no longer referenced by an API command it is passed into once host execution of that command completes.

The application **must** not destroy any other type of Vulkan object until all uses of that object by the device (such as via command buffer execution) have completed.

The following Vulkan objects **must** not be destroyed while any command buffers using the object are in the pending state:

- VkEvent
- VkQueryPool
- VkBuffer
- VkBufferView
- VkImage
- VkImageView
- VkPipeline
- VkSampler
- VkSamplerYcbcrConversion
- VkDescriptorPool
- VkFramebuffer
- VkRenderPass
- VkCommandBuffer
- VkCommandPool
- VkDeviceMemory
- VkDescriptorSet

Destroying these objects will move any command buffers that are in the recording or executable state, and are using those objects, to the invalid state.

The following Vulkan objects **must** not be destroyed while any queue is executing commands that use the object:

- VkFence
- VkSemaphore
- VkCommandBuffer
- VkCommandPool

In general, objects **can** be destroyed or freed in any order, even if the object being freed is involved in the use of another object (e.g. use of a resource in a view, use of a view in a descriptor set, use of an object in a command buffer, binding of a memory allocation to a resource), as long as any object that uses the freed object is not further used in any way except to be destroyed or to be reset in such a way that it no longer uses the other object (such as resetting a command buffer). If the object has been reset, then it **can** be used as if it never used the freed object. An exception to this is when there is a parent/child relationship between objects. In this case, the application **must** not destroy a parent object before its children, except when the parent is explicitly defined to free its children when it is destroyed (e.g. for pool objects, as defined below).

VkCommandPool objects are parents of VkCommandBuffer objects. VkDescriptorPool objects are parents of VkDescriptorSet objects. VkDevice objects are parents of many object types (all that take a VkDevice as a parameter to their creation).

The following Vulkan objects have specific restrictions for when they **can** be destroyed:

- `VkQueue` objects **cannot** be explicitly destroyed. Instead, they are implicitly destroyed when the `VkDevice` object they are retrieved from is destroyed.
- Destroying a pool object implicitly frees all objects allocated from that pool. Specifically, destroying `VkCommandPool` frees all `VkCommandBuffer` objects that were allocated from it, and destroying `VkDescriptorPool` frees all `VkDescriptorSet` objects that were allocated from it.
- `VkDevice` objects **can** be destroyed when all `VkQueue` objects retrieved from them are idle, and all objects created from them have been destroyed.
  - This includes the following objects:
    - `VkFence`
    - `VkSemaphore`
    - `VkEvent`
    - `VkQueryPool`
    - `VkBuffer`
    - `VkBufferView`
    - `VkImage`
    - `VkImageView`
    - `VkShaderModule`
    - `VkPipelineCache`
    - `VkPipeline`
    - `VkPipelineLayout`
    - `VkSampler`
    - `VkSamplerYcbcrConversion`
    - `VkDescriptorSetLayout`
    - `VkDescriptorPool`
    - `VkFramebuffer`
    - `VkRenderPass`
    - `VkCommandPool`
    - `VkCommandBuffer`
    - `VkDeviceMemory`
- `VkPhysicalDevice` objects **cannot** be explicitly destroyed. Instead, they are implicitly destroyed when the `VkInstance` object they are retrieved from is destroyed.
- `VkInstance` objects **can** be destroyed once all `VkDevice` objects created from any of its `VkPhysicalDevice` objects have been destroyed.

3.3.2. External Object Handles

As defined above, the scope of object handles created or allocated from a `VkDevice` is limited to that logical device. Objects which are not in scope are said to be external. To bring an external object into scope, an external handle **must** be exported from the object in the source scope and imported into the destination scope.

NOTE The scope of external handles and their associated resources **may** vary according to their type, but they **can** generally be shared across process and API boundaries.

3.4. Application Binary Interface

The mechanism by which Vulkan is made available to applications is platform- or implementation-defined. On many platforms the C interface described in this Specification is provided by a shared library. Since shared libraries can be changed independently of the applications that use them, they present particular compatibility challenges, and this Specification places some requirements on them.

Shared library implementations **must** use the default Application Binary Interface (ABI) of the standard C compiler for the platform, or provide customized API headers that cause application code to use the implementation's non-default ABI. An ABI in this context means the size, alignment, and layout of C data types; the procedure calling convention; and the naming convention for shared library symbols corresponding to C functions. Customizing the calling convention for a platform is usually accomplished by defining calling convention macros appropriately in `vk_platform.h`.

On platforms where Vulkan is provided as a shared library, library symbols beginning with "vk" and followed by a digit or uppercase letter are reserved for use by the implementation. Applications which use Vulkan **must** not provide definitions of these symbols. This allows the Vulkan shared library to be updated with additional symbols for new API versions or extensions without causing symbol conflicts with existing applications.

Shared library implementations **should** provide library symbols for commands in the highest version of this Specification they support, and for Window System Integration extensions relevant to the platform. They **may** also provide library symbols for commands defined by additional extensions.

NOTE

These requirements and recommendations are intended to allow implementors to take advantage of platform-specific conventions for SDKs, ABIs, library versioning mechanisms, etc. while still minimizing the code changes necessary to port applications or libraries between platforms. Platform vendors, or providers of the *de facto* standard Vulkan shared library for a platform, are encouraged to document what symbols the shared library provides and how it will be versioned when new symbols are added.

Applications **should** only rely on shared library symbols for commands in the minimum core version required by the application. vkGetInstanceProcAddr and vkGetDeviceProcAddr **should** be used to obtain function pointers for commands in core versions beyond the application's minimum required version.

3.5. Command Syntax and Duration

The Specification describes Vulkan commands as functions or procedures using C99 syntax. Language bindings for other languages such as C++ and JavaScript **may** allow for stricter parameter passing, or object-oriented interfaces.

Vulkan uses the standard C types for the base type of scalar parameters (e.g. types from `<stdint.h>`), with exceptions described below, or elsewhere in the text when appropriate:

VkBool32 represents boolean `True` and `False` values, since C does not have a sufficiently portable built-in boolean type:

```
// Provided by VK_VERSION_1_0
typedef uint32_t VkBool32;
```

`VK_TRUE` represents a boolean **True** (unsigned integer 1) value, and `VK_FALSE` a boolean **False** (unsigned integer 0) value.

All values returned from a Vulkan implementation in a VkBool32 will be either `VK_TRUE` or `VK_FALSE`.

Applications **must** not pass any other values than `VK_TRUE` or `VK_FALSE` into a Vulkan implementation where a VkBool32 is expected.

`VK_TRUE` is a constant representing a VkBool32 **True** value.

```
#define VK_TRUE                         1U
```

`VK_FALSE` is a constant representing a VkBool32 **False** value.

```
#define VK_FALSE                        0U
```

VkDeviceSize represents device memory size and offset values:

```
// Provided by VK_VERSION_1_0
typedef uint64_t VkDeviceSize;
```

VkDeviceAddress represents device buffer address values:

```
// Provided by VK_VERSION_1_0
typedef uint64_t VkDeviceAddress;
```

Commands that create Vulkan objects are of the form `vkCreate*` and take `Vk*CreateInfo` structures with the parameters needed to create the object. These Vulkan objects are destroyed with commands of the form `vkDestroy*`.

The last in-parameter to each command that creates or destroys a Vulkan object is `pAllocator`. The `pAllocator` parameter **can** be a non-`NULL` value, in which case allocations for the given object are delegated to an application provided callback. Refer to the Memory Allocation chapter for further details.

Commands that allocate Vulkan objects owned by pool objects are of the form `vkAllocate*`, and take `Vk*AllocateInfo` structures. These Vulkan objects are freed with commands of the form `vkFree*`. These objects do not take allocators; if host memory is needed, they will use the allocator that was specified when their parent pool was created.

Commands are recorded into a command buffer by calling API commands of the form `vkCmd*`. Each such command **may** have different restrictions on where it **can** be used: in a primary and/or secondary command buffer, inside and/or outside a render pass, and in one or more of the supported queue types. These restrictions are documented together with the definition of each such command.

The *duration* of a Vulkan command refers to the interval between calling the command and its return to the caller.

3.5.1. Lifetime of Retrieved Results

Information is retrieved from the implementation with commands of the form `vkGet*` and `vkEnumerate*`.

Unless otherwise specified for an individual command, the results are *invariant*; that is, they will remain unchanged when retrieved again by calling the same command with the same parameters, so long as those parameters themselves all remain valid.

3.5.2. Array Results

Some query commands of the form `vkGet*` and `vkEnumerate*` enable retrieving multiple results in the form of a return array. Such commands typically have two pointer arguments as follows:

- An element count pointer pointing to an integer variable, conventionally named as `p*Count` where `*` is the capitalized singular form of the name of the retrieved values.
- A pointer to an array where the result array is retrieved, conventionally named as `p*` where `*` is the capitalized plural form of the name of the retrieved values.

If such commands are called with the array pointer set to `NULL`, then the number of retrievable elements is returned in the variable pointed to by the element count pointer. Otherwise, the element count pointer **must** point to a variable set by the application to the number of elements in the return array, and on return the variable is overwritten with the number of elements actually written to the return array. If the input element count is less than the number of retrievable array elements, the query will write only as many elements to the return array as specified by the element count variable set by the application, and the command will return `VK_INCOMPLETE` instead of `VK_SUCCESS`, to indicate that not all retrievable array elements were returned.

NOTE	In practice, this means that applications will typically call such query commands twice:

- First, with the array pointer set to `NULL`, to retrieve the number of retrievable elements.
- Second, with the array pointer pointing to an application allocated storage for at least as many elements as indicated by the variable pointed to by the element count pointer, to retrieve at most as many of the retrievable elements.

Query commands that return one or more structures, regardless of whether they return a single or an array of structures with or without a `pNext` chain, **may** also contain arrays within those structures. Such return arrays are typically defined in the form of two members as follows:

- An integer value specifying the element count, conventionally named as `*Count` where `*` is the singular form of the name of the retrieved values.
- A pointer to an array where the result array is retrieved, conventionally named as `p*` where `*` is the capitalized plural form of the name of the retrieved values.

Analogously to query commands that return multiple results, if the command is called with the array pointer member of the output structure in question set to `NULL`, then the number of retrievable elements is returned in the element count member of that output structure. Otherwise, the element count **must** specify the number of elements in the return array, and on return the element count member is overwritten with the number of elements actually written to the return array. If the input element count is less than the number of retrievable array elements, the query will write only as many elements to the return array as specified by the input element count, and the command will return `VK_INCOMPLETE` instead of `VK_SUCCESS`, if the query command has a VkResult return type, to indicate that not all retrievable array elements were returned.

NOTE

Applications need to separately track the value they provided as the input element count member for such arrays and compare those with the returned element counts in order to determine whether the actually returned element count is smaller than the size of the return array. Another side effect of this is that it is impossible for the application to determine if the number of retrievable elements has increased beyond the provided input element count so using return arrays in output structures **should** be limited to *invariant* array results. In practice, this means that applications will typically call such query commands multiple times:

- First, with the array pointer member(s) set to `NULL`, to retrieve the number(s) of retrievable elements.
- Second, with the array pointer(s) pointing to an application allocated storage for at least as many elements as indicated by the element count member(s), to retrieve at most as many of the retrievable elements.
- Then the process **may** need to be repeated for all other newly introduced return arrays in any nested output structures indirectly specified through the previously retrieved result arrays.

Regardless of the type of query command, any array pointer member of an output structure **must** either be `NULL`, or point to an application-allocated array. Query commands **must** not return a pointer to implementation allocated storage in any output structure.

3.6. Threading Behavior

Vulkan is intended to provide scalable performance when used on multiple host threads. All commands support being called concurrently from multiple threads, but certain parameters, or components of parameters are defined to be *externally synchronized*. This means that the caller **must** guarantee that no more than one thread is using such a parameter at a given time.

More precisely, Vulkan commands use simple stores to update the state of Vulkan objects. A parameter declared as externally synchronized **may** have its contents updated at any time during the host execution of the command. If two commands operate on the same object and at least one of the commands declares the object to be externally synchronized, then the caller **must** guarantee not only that the commands do not execute simultaneously, but also that the two commands are separated by an appropriate memory barrier (if needed).

NOTE	Memory barriers are particularly relevant for hosts based on the ARM CPU architecture, which is more weakly ordered than many developers are accustomed to from x86/x64 programming. Fortunately, most higher-level synchronization primitives (like the pthread library) perform memory barriers as a part of mutual exclusion, so mutexing Vulkan objects via these primitives will have the desired effect.

Similarly the application **must** avoid any potential data hazard of application-owned memory that has its ownership temporarily acquired by a Vulkan command. While the ownership of application-owned memory remains acquired by a command the implementation **may** read the memory at any point, and it **may** write non-`const` qualified memory at any point. Parameters referring to non-`const` qualified application-owned memory are not marked explicitly as *externally synchronized* in the Specification.

Many object types are *immutable*, meaning the objects **cannot** change once they have been created. These types of objects never need external synchronization, except that they **must** not be destroyed while they are in use on another thread. In certain special cases mutable object parameters are internally synchronized, making external synchronization unnecessary. Any command parameters that are not labeled as externally synchronized are either not mutated by the command or are internally synchronized. Additionally, certain objects related to a command's parameters (e.g. command pools and descriptor pools) **may** be affected by a command, and **must** also be externally synchronized. These implicit parameters are documented as described below.

Parameters of commands that are externally synchronized are listed below.

Externally Synchronized Parameters

- The `instance` parameter in vkDestroyInstance
- The `device` parameter in vkDestroyDevice
- The `queue` parameter in vkQueueSubmit
- The `fence` parameter in vkQueueSubmit
- The `queue` parameter in vkQueueWaitIdle

- The `memory` parameter in vkFreeMemory
- The `memory` parameter in vkMapMemory
- The `memory` parameter in vkUnmapMemory
- The `buffer` parameter in vkBindBufferMemory
- The `image` parameter in vkBindImageMemory
- The `queue` parameter in vkQueueBindSparse
- The `fence` parameter in vkQueueBindSparse
- The `fence` parameter in vkDestroyFence
- The `semaphore` parameter in vkDestroySemaphore
- The `event` parameter in vkDestroyEvent
- The `event` parameter in vkSetEvent
- The `event` parameter in vkResetEvent
- The `queryPool` parameter in vkDestroyQueryPool
- The `buffer` parameter in vkDestroyBuffer
- The `bufferView` parameter in vkDestroyBufferView
- The `image` parameter in vkDestroyImage
- The `imageView` parameter in vkDestroyImageView
- The `shaderModule` parameter in vkDestroyShaderModule
- The `pipelineCache` parameter in vkDestroyPipelineCache
- The `dstCache` parameter in vkMergePipelineCaches
- The `pipeline` parameter in vkDestroyPipeline
- The `pipelineLayout` parameter in vkDestroyPipelineLayout
- The `sampler` parameter in vkDestroySampler
- The `descriptorSetLayout` parameter in vkDestroyDescriptorSetLayout
- The `descriptorPool` parameter in vkDestroyDescriptorPool
- The `descriptorPool` parameter in vkResetDescriptorPool
- The `descriptorPool` member of the `pAllocateInfo` parameter in vkAllocateDescriptorSets
- The `descriptorPool` parameter in vkFreeDescriptorSets
- The `framebuffer` parameter in vkDestroyFramebuffer
- The `renderPass` parameter in vkDestroyRenderPass
- The `commandPool` parameter in vkDestroyCommandPool
- The `commandPool` parameter in vkResetCommandPool
- The `commandPool` member of the `pAllocateInfo` parameter in vkAllocateCommandBuffers
- The `commandPool` parameter in vkFreeCommandBuffers
- The `commandBuffer` parameter in vkBeginCommandBuffer

- The `commandBuffer` parameter in vkEndCommandBuffer
- The `commandBuffer` parameter in vkResetCommandBuffer
- The `commandBuffer` parameter in vkCmdBindPipeline
- The `commandBuffer` parameter in vkCmdSetViewport
- The `commandBuffer` parameter in vkCmdSetScissor
- The `commandBuffer` parameter in vkCmdSetLineWidth
- The `commandBuffer` parameter in vkCmdSetDepthBias
- The `commandBuffer` parameter in vkCmdSetBlendConstants
- The `commandBuffer` parameter in vkCmdSetDepthBounds
- The `commandBuffer` parameter in vkCmdSetStencilCompareMask
- The `commandBuffer` parameter in vkCmdSetStencilWriteMask
- The `commandBuffer` parameter in vkCmdSetStencilReference
- The `commandBuffer` parameter in vkCmdBindDescriptorSets
- The `commandBuffer` parameter in vkCmdBindIndexBuffer
- The `commandBuffer` parameter in vkCmdBindVertexBuffers
- The `commandBuffer` parameter in vkCmdDraw
- The `commandBuffer` parameter in vkCmdDrawIndexed
- The `commandBuffer` parameter in vkCmdDrawIndirect
- The `commandBuffer` parameter in vkCmdDrawIndexedIndirect
- The `commandBuffer` parameter in vkCmdDispatch
- The `commandBuffer` parameter in vkCmdDispatchIndirect
- The `commandBuffer` parameter in vkCmdCopyBuffer
- The `commandBuffer` parameter in vkCmdCopyImage
- The `commandBuffer` parameter in vkCmdBlitImage
- The `commandBuffer` parameter in vkCmdCopyBufferToImage
- The `commandBuffer` parameter in vkCmdCopyImageToBuffer
- The `commandBuffer` parameter in vkCmdUpdateBuffer
- The `commandBuffer` parameter in vkCmdFillBuffer
- The `commandBuffer` parameter in vkCmdClearColorImage
- The `commandBuffer` parameter in vkCmdClearDepthStencilImage
- The `commandBuffer` parameter in vkCmdClearAttachments
- The `commandBuffer` parameter in vkCmdResolveImage
- The `commandBuffer` parameter in vkCmdSetEvent
- The `commandBuffer` parameter in vkCmdResetEvent
- The `commandBuffer` parameter in vkCmdWaitEvents

- The `commandBuffer` parameter in vkCmdPipelineBarrier
- The `commandBuffer` parameter in vkCmdBeginQuery
- The `commandBuffer` parameter in vkCmdEndQuery
- The `commandBuffer` parameter in vkCmdResetQueryPool
- The `commandBuffer` parameter in vkCmdWriteTimestamp
- The `commandBuffer` parameter in vkCmdCopyQueryPoolResults
- The `commandBuffer` parameter in vkCmdPushConstants
- The `commandBuffer` parameter in vkCmdBeginRenderPass
- The `commandBuffer` parameter in vkCmdNextSubpass
- The `commandBuffer` parameter in vkCmdEndRenderPass
- The `commandBuffer` parameter in vkCmdExecuteCommands
- The `commandBuffer` parameter in vkCmdSetDeviceMask
- The `commandBuffer` parameter in vkCmdDispatchBase
- The `commandPool` parameter in vkTrimCommandPool
- The `ycbcrConversion` parameter in vkDestroySamplerYcbcrConversion
- The `descriptorUpdateTemplate` parameter in vkDestroyDescriptorUpdateTemplate
- The `commandBuffer` parameter in vkCmdDrawIndirectCount
- The `commandBuffer` parameter in vkCmdDrawIndexedIndirectCount
- The `commandBuffer` parameter in vkCmdBeginRenderPass2
- The `commandBuffer` parameter in vkCmdNextSubpass2
- The `commandBuffer` parameter in vkCmdEndRenderPass2
- The `privateDataSlot` parameter in vkDestroyPrivateDataSlot
- The `commandBuffer` parameter in vkCmdSetEvent2
- The `commandBuffer` parameter in vkCmdResetEvent2
- The `commandBuffer` parameter in vkCmdWaitEvents2
- The `commandBuffer` parameter in vkCmdPipelineBarrier2
- The `commandBuffer` parameter in vkCmdWriteTimestamp2
- The `queue` parameter in vkQueueSubmit2
- The `fence` parameter in vkQueueSubmit2
- The `commandBuffer` parameter in vkCmdCopyBuffer2
- The `commandBuffer` parameter in vkCmdCopyImage2
- The `commandBuffer` parameter in vkCmdCopyBufferToImage2
- The `commandBuffer` parameter in vkCmdCopyImageToBuffer2
- The `commandBuffer` parameter in vkCmdBlitImage2
- The `commandBuffer` parameter in vkCmdResolveImage2

- The `commandBuffer` parameter in vkCmdBeginRendering
- The `commandBuffer` parameter in vkCmdEndRendering
- The `commandBuffer` parameter in vkCmdSetCullMode
- The `commandBuffer` parameter in vkCmdSetFrontFace
- The `commandBuffer` parameter in vkCmdSetPrimitiveTopology
- The `commandBuffer` parameter in vkCmdSetViewportWithCount
- The `commandBuffer` parameter in vkCmdSetScissorWithCount
- The `commandBuffer` parameter in vkCmdBindVertexBuffers2
- The `commandBuffer` parameter in vkCmdSetDepthTestEnable
- The `commandBuffer` parameter in vkCmdSetDepthWriteEnable
- The `commandBuffer` parameter in vkCmdSetDepthCompareOp
- The `commandBuffer` parameter in vkCmdSetDepthBoundsTestEnable
- The `commandBuffer` parameter in vkCmdSetStencilTestEnable
- The `commandBuffer` parameter in vkCmdSetStencilOp
- The `commandBuffer` parameter in vkCmdSetRasterizerDiscardEnable
- The `commandBuffer` parameter in vkCmdSetDepthBiasEnable
- The `commandBuffer` parameter in vkCmdSetPrimitiveRestartEnable

For VkPipelineCache objects created with `flags` containing `VK_PIPELINE_CACHE_CREATE_EXTERNALLY_SYNCHRONIZED_BIT`, the above table is extended with the `pipelineCache` parameter to `vkCreate*Pipelines` being externally synchronized.

There are also a few instances where a command **can** take in an application-allocated list whose contents are externally synchronized parameters. In these cases, the caller **must** guarantee that at most one thread is using a given element within the list at a given time. These parameters are listed below.

Externally Synchronized Parameter Lists

- Each element of the `pFences` parameter in vkResetFences
- Each element of the `pDescriptorSets` parameter in vkFreeDescriptorSets
- Each element of the `pCommandBuffers` parameter in vkFreeCommandBuffers

In addition, there are some implicit parameters that need to be externally synchronized. For example, when a `commandBuffer` parameter needs to be externally synchronized, it implies that the `commandPool` from which that command buffer was allocated also needs to be externally synchronized. The implicit parameters and their associated object are listed below.

Implicit Externally Synchronized Parameters

- All `VkPhysicalDevice` objects enumerated from `instance` in vkDestroyInstance
- All `VkQueue` objects created from `device` in vkDestroyDevice
- All `VkQueue` objects created from `device` in vkDeviceWaitIdle
- Any `VkDescriptorSet` objects allocated from `descriptorPool` in vkResetDescriptorPool
- The `VkCommandPool` that `commandBuffer` was allocated from in vkBeginCommandBuffer
- The `VkCommandPool` that `commandBuffer` was allocated from in vkEndCommandBuffer
- The `VkCommandPool` that `commandBuffer` was allocated from in vkResetCommandBuffer
- The `VkCommandPool` that `commandBuffer` was allocated from, in vkCmdBindPipeline
- The `VkCommandPool` that `commandBuffer` was allocated from, in vkCmdSetViewport
- The `VkCommandPool` that `commandBuffer` was allocated from, in vkCmdSetScissor
- The `VkCommandPool` that `commandBuffer` was allocated from, in vkCmdSetLineWidth
- The `VkCommandPool` that `commandBuffer` was allocated from, in vkCmdSetDepthBias
- The `VkCommandPool` that `commandBuffer` was allocated from, in vkCmdSetBlendConstants
- The `VkCommandPool` that `commandBuffer` was allocated from, in vkCmdSetDepthBounds
- The `VkCommandPool` that `commandBuffer` was allocated from, in vkCmdSetStencilCompareMask
- The `VkCommandPool` that `commandBuffer` was allocated from, in vkCmdSetStencilWriteMask
- The `VkCommandPool` that `commandBuffer` was allocated from, in vkCmdSetStencilReference
- The `VkCommandPool` that `commandBuffer` was allocated from, in vkCmdBindDescriptorSets
- The `VkCommandPool` that `commandBuffer` was allocated from, in vkCmdBindIndexBuffer
- The `VkCommandPool` that `commandBuffer` was allocated from, in vkCmdBindVertexBuffers
- The `VkCommandPool` that `commandBuffer` was allocated from, in vkCmdDraw
- The `VkCommandPool` that `commandBuffer` was allocated from, in vkCmdDrawIndexed
- The `VkCommandPool` that `commandBuffer` was allocated from, in vkCmdDrawIndirect
- The `VkCommandPool` that `commandBuffer` was allocated from, in vkCmdDrawIndexedIndirect
- The `VkCommandPool` that `commandBuffer` was allocated from, in vkCmdDispatch
- The `VkCommandPool` that `commandBuffer` was allocated from, in vkCmdDispatchIndirect
- The `VkCommandPool` that `commandBuffer` was allocated from, in vkCmdCopyBuffer
- The `VkCommandPool` that `commandBuffer` was allocated from, in vkCmdCopyImage
- The `VkCommandPool` that `commandBuffer` was allocated from, in vkCmdBlitImage
- The `VkCommandPool` that `commandBuffer` was allocated from, in vkCmdCopyBufferToImage
- The `VkCommandPool` that `commandBuffer` was allocated from, in vkCmdCopyImageToBuffer
- The `VkCommandPool` that `commandBuffer` was allocated from, in vkCmdUpdateBuffer

- The VkCommandPool that commandBuffer was allocated from, in vkCmdFillBuffer
- The VkCommandPool that commandBuffer was allocated from, in vkCmdClearColorImage
- The VkCommandPool that commandBuffer was allocated from, in vkCmdClearDepthStencilImage
- The VkCommandPool that commandBuffer was allocated from, in vkCmdClearAttachments
- The VkCommandPool that commandBuffer was allocated from, in vkCmdResolveImage
- The VkCommandPool that commandBuffer was allocated from, in vkCmdSetEvent
- The VkCommandPool that commandBuffer was allocated from, in vkCmdResetEvent
- The VkCommandPool that commandBuffer was allocated from, in vkCmdWaitEvents
- The VkCommandPool that commandBuffer was allocated from, in vkCmdPipelineBarrier
- The VkCommandPool that commandBuffer was allocated from, in vkCmdBeginQuery
- The VkCommandPool that commandBuffer was allocated from, in vkCmdEndQuery
- The VkCommandPool that commandBuffer was allocated from, in vkCmdResetQueryPool
- The VkCommandPool that commandBuffer was allocated from, in vkCmdWriteTimestamp
- The VkCommandPool that commandBuffer was allocated from, in vkCmdCopyQueryPoolResults
- The VkCommandPool that commandBuffer was allocated from, in vkCmdPushConstants
- The VkCommandPool that commandBuffer was allocated from, in vkCmdBeginRenderPass
- The VkCommandPool that commandBuffer was allocated from, in vkCmdNextSubpass
- The VkCommandPool that commandBuffer was allocated from, in vkCmdEndRenderPass
- The VkCommandPool that commandBuffer was allocated from, in vkCmdExecuteCommands
- The VkCommandPool that commandBuffer was allocated from, in vkCmdSetDeviceMask
- The VkCommandPool that commandBuffer was allocated from, in vkCmdDispatchBase
- The VkCommandPool that commandBuffer was allocated from, in vkCmdDrawIndirectCount
- The VkCommandPool that commandBuffer was allocated from, in vkCmdDrawIndexedIndirectCount
- The VkCommandPool that commandBuffer was allocated from, in vkCmdBeginRenderPass2
- The VkCommandPool that commandBuffer was allocated from, in vkCmdNextSubpass2
- The VkCommandPool that commandBuffer was allocated from, in vkCmdEndRenderPass2
- The VkCommandPool that commandBuffer was allocated from, in vkCmdSetEvent2
- The VkCommandPool that commandBuffer was allocated from, in vkCmdResetEvent2
- The VkCommandPool that commandBuffer was allocated from, in vkCmdWaitEvents2
- The VkCommandPool that commandBuffer was allocated from, in vkCmdPipelineBarrier2
- The VkCommandPool that commandBuffer was allocated from, in vkCmdWriteTimestamp2
- The VkCommandPool that commandBuffer was allocated from, in vkCmdCopyBuffer2
- The VkCommandPool that commandBuffer was allocated from, in vkCmdCopyImage2

- The VkCommandPool that commandBuffer was allocated from, in vkCmdCopyBufferToImage2
- The VkCommandPool that commandBuffer was allocated from, in vkCmdCopyImageToBuffer2
- The VkCommandPool that commandBuffer was allocated from, in vkCmdBlitImage2
- The VkCommandPool that commandBuffer was allocated from, in vkCmdResolveImage2
- The VkCommandPool that commandBuffer was allocated from, in vkCmdBeginRendering
- The VkCommandPool that commandBuffer was allocated from, in vkCmdEndRendering
- The VkCommandPool that commandBuffer was allocated from, in vkCmdSetCullMode
- The VkCommandPool that commandBuffer was allocated from, in vkCmdSetFrontFace
- The VkCommandPool that commandBuffer was allocated from, in vkCmdSetPrimitiveTopology
- The VkCommandPool that commandBuffer was allocated from, in vkCmdSetViewportWithCount
- The VkCommandPool that commandBuffer was allocated from, in vkCmdSetScissorWithCount
- The VkCommandPool that commandBuffer was allocated from, in vkCmdBindVertexBuffers2
- The VkCommandPool that commandBuffer was allocated from, in vkCmdSetDepthTestEnable
- The VkCommandPool that commandBuffer was allocated from, in vkCmdSetDepthWriteEnable
- The VkCommandPool that commandBuffer was allocated from, in vkCmdSetDepthCompareOp
- The VkCommandPool that commandBuffer was allocated from, in vkCmdSetDepthBoundsTestEnable
- The VkCommandPool that commandBuffer was allocated from, in vkCmdSetStencilTestEnable
- The VkCommandPool that commandBuffer was allocated from, in vkCmdSetStencilOp
- The VkCommandPool that commandBuffer was allocated from, in vkCmdSetRasterizerDiscardEnable
- The VkCommandPool that commandBuffer was allocated from, in vkCmdSetDepthBiasEnable
- The VkCommandPool that commandBuffer was allocated from, in vkCmdSetPrimitiveRestartEnable

3.7. Valid Usage

Valid usage defines a set of conditions which **must** be met in order to achieve well-defined runtime behavior in an application. These conditions depend only on Vulkan state, and the parameters or objects whose usage is constrained by the condition.

The core layer assumes applications are using the API correctly. Except as documented elsewhere in the Specification, the behavior of the core layer to an application using the API incorrectly is undefined, and **may** include program termination. However, implementations **must** ensure that incorrect usage by an application does not affect the integrity of the operating system, the Vulkan implementation, or other applications in the system using Vulkan. In particular, any guarantees made by an operating system about whether memory from one process **can** be visible to another process or not **must** not be violated by a Vulkan implementation for **any memory allocation**. Vulkan implementations are not **required** to make additional security or integrity guarantees

beyond those provided by the OS unless explicitly directed by the application's use of a particular feature or extension.

NOTE

For instance, if an operating system guarantees that data in all its memory allocations are set to zero when newly allocated, the Vulkan implementation **must** make the same guarantees for any allocations it controls (e.g. VkDeviceMemory).

Similarly, if an operating system guarantees that use-after-free of host allocations will not result in values written by another process becoming visible, the same guarantees **must** be made by the Vulkan implementation for device memory.

If the `protectedMemory` feature is supported, the implementation provides additional guarantees when invalid usage occurs to prevent values in protected memory from being accessed or inferred outside of protected operations, as described in Protected Memory Access Rules.

Some valid usage conditions have dependencies on runtime limits or feature availability. It is possible to validate these conditions against Vulkan's minimum supported values for these limits and features, or some subset of other known values.

Valid usage conditions do not cover conditions where well-defined behavior (including returning an error code) exists.

Valid usage conditions **should** apply to the command or structure where complete information about the condition would be known during execution of an application. This is such that a validation layer or linter **can** be written directly against these statements at the point they are specified.

NOTE

This does lead to some non-obvious places for valid usage statements. For instance, the valid values for a structure might depend on a separate value in the calling command. In this case, the structure itself will not reference this valid usage as it is impossible to determine validity from the structure that it is invalid - instead this valid usage would be attached to the calling command.

Another example is draw state - the state setters are independent, and can cause a legitimately invalid state configuration between draw calls; so the valid usage statements are attached to the place where all state needs to be valid - at the drawing command.

Valid usage conditions are described in a block labeled "Valid Usage" following each command or structure they apply to.

3.7.1. Usage Validation

Vulkan is a layered API. The lowest layer is the core Vulkan layer, as defined by this Specification. The application **can** use additional layers above the core for debugging, validation, and other purposes.

One of the core principles of Vulkan is that building and submitting command buffers **should** be highly efficient. Thus error checking and validation of state in the core layer is minimal, although

more rigorous validation **can** be enabled through the use of layers.

Validation of correct API usage is left to validation layers. Applications **should** be developed with validation layers enabled, to help catch and eliminate errors. Once validated, released applications **should** not enable validation layers by default.

3.7.2. Implicit Valid Usage

Some valid usage conditions apply to all commands and structures in the API, unless explicitly denoted otherwise for a specific command or structure. These conditions are considered *implicit*, and are described in a block labeled "Valid Usage (Implicit)" following each command or structure they apply to. Implicit valid usage conditions are described in detail below.

Valid Usage for Object Handles

Any input parameter to a command that is an object handle **must** be a valid object handle, unless otherwise specified. An object handle is valid if:

- It has been created or allocated by a previous, successful call to the API. Such calls are noted in the Specification.
- It has not been deleted or freed by a previous call to the API. Such calls are noted in the Specification.
- Any objects used by that object, either as part of creation or execution, **must** also be valid.

The reserved values VK_NULL_HANDLE and `NULL` **can** be used in place of valid non-dispatchable handles and dispatchable handles, respectively, when *explicitly called out in the Specification*. Any command that creates an object successfully **must** not return these values. It is valid to pass these values to `vkDestroy*` or `vkFree*` commands, which will silently ignore these values.

Valid Usage for Pointers

Any parameter that is a pointer **must** be a *valid pointer* only if it is explicitly called out by a Valid Usage statement.

A pointer is "valid" if it points at memory containing values of the number and type(s) expected by the command, and all fundamental types accessed through the pointer (e.g. as elements of an array or as members of a structure) satisfy the alignment requirements of the host processor.

Valid Usage for Strings

Any parameter that is a pointer to `char` **must** be a finite sequence of values terminated by a null character, or if *explicitly called out in the Specification*, **can** be `NULL`.

Strings specified as UTF-8 encoded **must** not contain invalid UTF-8 sequences. See String Representation for additional information about strings.

Valid Usage for Enumerated Types

Any parameter of an enumerated type **must** be a valid enumerant for that type. Use of an enumerant is valid if the following conditions are true:

- The enumerant is defined as part of the enumerated type.
- The enumerant is not a value suffixed with `_MAX_ENUM`.
  - This value exists only to ensure that C `enum` types are 32 bits in size and **must** not be used by applications.
- If the enumerant is used in a function that has a VkInstance as its first parameter and either:
  - it was added by a core version that is supported (as reported by vkEnumerateInstanceVersion) and the value of VkApplicationInfo::`apiVersion` is greater than or equal to the version that added it; or
  - it was added by an instance extension that was enabled for the instance.
- If the enumerant is used in a function that has a VkPhysicalDevice object as its first parameter and either:
  - it was added by a core version that is supported by that device (as reported by VkPhysicalDeviceProperties::`apiVersion`);
  - it was added by an instance extension that was enabled for the instance; or
  - it was added by a device extension that is supported by that device.
- If the enumerant is used in a function that has any other dispatchable object as its first parameter and either:
  - it was added by a core version that is supported for the device (as reported by VkPhysicalDeviceProperties::`apiVersion`); or
  - it was added by a device extension that was enabled for the device.

Any enumerated type returned from a query command or otherwise output from Vulkan to the application **must** not have a reserved value. Reserved values are values not defined by any extension for that enumerated type.

NOTE In some special cases, an enumerant is only meaningful if a feature defined by an extension is also enabled, as well as the extension itself. The global "valid enumerant" rule described here does not address such cases.

NOTE This language is intended to accommodate cases such as "hidden" extensions known only to driver internals, or layers enabling extensions without knowledge of the application, without allowing return of values not defined by any extension.

NOTE Application developers are encouraged to be careful when using `switch` statements with Vulkan API enums. This is because new extensions can add new values to existing enums. Using a `default:` statement within a `switch` may avoid future compilation issues.

This is particularly true for enums such as VkDriverId, which may have values added that do not belong to a corresponding new extension.

Valid Usage for Flags

A collection of flags is represented by a bitmask using the type VkFlags:

```
// Provided by VK_VERSION_1_0
typedef uint32_t VkFlags;
```

Bitmasks are passed to many commands and structures to compactly represent options, but VkFlags is not used directly in the API. Instead, a `Vk*Flags` type which is an alias of VkFlags, and whose name matches the corresponding `Vk*FlagBits` that are valid for that type, is used.

Any `Vk*Flags` member or parameter used in the API as an input **must** be a valid combination of bit flags. A valid combination is either zero or the bitwise OR of valid bit flags.

An individual bit flag is valid for a `Vk*Flags` type if it would be a valid enumerant when used with the equivalent `Vk*FlagBits` type, where the bits type is obtained by taking the flag type and replacing the trailing `Flags` with `FlagBits`. For example, a flag value of type VkColorComponentFlags **must** contain only bit flags defined by VkColorComponentFlagBits.

Any `Vk*Flags` member or parameter returned from a query command or otherwise output from Vulkan to the application **may** contain bit flags undefined in its corresponding `Vk*FlagBits` type. An application **cannot** rely on the state of these unspecified bits.

Only the low-order 31 bits (bit positions zero through 30) are available for use as flag bits.

NOTE	This restriction is due to poorly defined behavior by C compilers given a C enumerant value of `0x80000000`. In some cases adding this enumerant value may increase the size of the underlying `Vk*FlagBits` type, breaking the ABI.

A collection of 64-bit flags is represented by a bitmask using the type VkFlags64:

```
// Provided by VK_VERSION_1_3
typedef uint64_t VkFlags64;
```

When the 31 bits available in VkFlags are insufficient, the VkFlags64 type can be passed to commands and structures to represent up to 64 options. VkFlags64 is not used directly in the API. Instead, a `Vk*Flags2` type which is an alias of VkFlags64, and whose name matches the corresponding `Vk*FlagBits2` that are valid for that type, is used.

Any `Vk*Flags2` member or parameter used in the API as an input **must** be a valid combination of bit flags. A valid combination is either zero or the bitwise OR of valid bit flags.

An individual bit flag is valid for a `Vk*Flags2` type if it would be a valid enumerant when used with the equivalent `Vk*FlagBits2` type, where the bits type is obtained by taking the flag type and replacing the trailing `Flags2` with `FlagBits2`. For example, a flag value of type `VkAccessFlags2KHR` **must** contain only bit flags defined by `VkAccessFlagBits2KHR`.

Any `Vk*Flags2` member or parameter returned from a query command or otherwise output from

Vulkan to the application **may** contain bit flags undefined in its corresponding `Vk*FlagBits2` type. An application **cannot** rely on the state of these unspecified bits.

NOTE

Both the `Vk*FlagBits2` type, and the individual bits defined for that type, are defined as `uint64_t` integers in the C API. This is in contrast to the 32-bit types, where the `Vk*FlagBits` type is defined as a C `enum` and the individual bits as enumerants belonging to that `enum`. As a result, there is less compile time type checking possible for the 64-bit types. This is unavoidable since there is no sufficiently portable way to define a 64-bit `enum` type in C99.

Valid Usage for Structure Types

Any parameter that is a structure containing a `sType` member **must** have a value of `sType` which is a valid VkStructureType value matching the type of the structure.

Valid Usage for Structure Pointer Chains

Any parameter that is a structure containing a `void* pNext` member **must** have a value of `pNext` that is either `NULL`, or is a pointer to a valid *extending structure*, containing `sType` and `pNext` members as described in the Vulkan Documentation and Extensions document in the section "Extending Structures". The set of structures connected by `pNext` pointers is referred to as a `pNext` *chain*.

Each structure included in the `pNext` chain **must** be defined at runtime by either:

- a core version which is supported
- an extension which is enabled
- a supported device extension in the case of physical-device-level functionality added by the device extension

Each type of extending structure **must** not appear more than once in a `pNext` chain, including any aliases. This general rule may be explicitly overridden for specific structures.

Any component of the implementation (the loader, any enabled layers, and drivers) **must** skip over, without processing (other than reading the `sType` and `pNext` members) any extending structures in the chain not defined by core versions or extensions supported by that component.

As a convenience to implementations and layers needing to iterate through a structure pointer chain, the Vulkan API provides two *base structures*. These structures allow for some type safety, and can be used by Vulkan API functions that operate on generic inputs and outputs.

The `VkBaseInStructure` structure is defined as:

```
// Provided by VK_VERSION_1_0
typedef struct VkBaseInStructure {
    VkStructureType                    sType;
    const struct VkBaseInStructure*    pNext;
} VkBaseInStructure;
```

- `sType` is the structure type of the structure being iterated through.
- `pNext` is `NULL` or a pointer to the next structure in a structure chain.

`VkBaseInStructure` can be used to facilitate iterating through a read-only structure pointer chain.

The `VkBaseOutStructure` structure is defined as:

```
// Provided by VK_VERSION_1_0
typedef struct VkBaseOutStructure {
    VkStructureType                 sType;
    struct VkBaseOutStructure*      pNext;
} VkBaseOutStructure;
```

- `sType` is the structure type of the structure being iterated through.
- `pNext` is `NULL` or a pointer to the next structure in a structure chain.

`VkBaseOutStructure` can be used to facilitate iterating through a structure pointer chain that returns data back to the application.

Valid Usage for Nested Structures

The above conditions also apply recursively to members of structures provided as input to a command, either as a direct argument to the command, or themselves a member of another structure.

Specifics on valid usage of each command are covered in their individual sections.

Valid Usage for Extensions

Instance-level functionality or behavior added by an instance extension to the API **must** not be used unless that extension is supported by the instance as determined by vkEnumerateInstanceExtensionProperties, and that extension is enabled in VkInstanceCreateInfo.

Physical-device-level functionality or behavior added by an instance extension to the API **must** not be used unless that extension is supported by the instance as determined by vkEnumerateInstanceExtensionProperties, and that extension is enabled in VkInstanceCreateInfo.

Physical-device-level functionality or behavior added by a device extension to the API **must** not be used unless the conditions described in Extending Physical Device From Device Extensions are met.

Device-level functionality added by a device extension that is dispatched from a VkDevice, or from a child object of a VkDevice **must** not be used unless that extension is supported by the device as determined by vkEnumerateDeviceExtensionProperties, and that extension is enabled in VkDeviceCreateInfo.

Valid Usage for Newer Core Versions

Instance-level functionality or behavior added by a new core version of the API **must** not be used unless it is supported by the instance as determined by vkEnumerateInstanceVersion and the

specified version of VkApplicationInfo::apiVersion.

Physical-device-level functionality or behavior added by a new core version of the API **must** not be used unless it is supported by the physical device as determined by VkPhysicalDeviceProperties::apiVersion and the specified version of VkApplicationInfo::apiVersion.

Device-level functionality or behavior added by a new core version of the API **must** not be used unless it is supported by the device as determined by VkPhysicalDeviceProperties::apiVersion and the specified version of VkApplicationInfo::apiVersion.

3.8. VkResult Return Codes

While the core Vulkan API is not designed to capture incorrect usage, some circumstances still require return codes. Commands in Vulkan return their status via return codes that are in one of two categories:

- Successful completion codes are returned when a command needs to communicate success or status information. All successful completion codes are non-negative values.
- Runtime error codes are returned when a command needs to communicate a failure that could only be detected at runtime. All runtime error codes are negative values.

All return codes in Vulkan are reported via VkResult return values. The possible codes are:

```
// Provided by VK_VERSION_1_0
typedef enum VkResult {
    VK_SUCCESS = 0,
    VK_NOT_READY = 1,
    VK_TIMEOUT = 2,
    VK_EVENT_SET = 3,
    VK_EVENT_RESET = 4,
    VK_INCOMPLETE = 5,
    VK_ERROR_OUT_OF_HOST_MEMORY = -1,
    VK_ERROR_OUT_OF_DEVICE_MEMORY = -2,
    VK_ERROR_INITIALIZATION_FAILED = -3,
    VK_ERROR_DEVICE_LOST = -4,
    VK_ERROR_MEMORY_MAP_FAILED = -5,
    VK_ERROR_LAYER_NOT_PRESENT = -6,
    VK_ERROR_EXTENSION_NOT_PRESENT = -7,
    VK_ERROR_FEATURE_NOT_PRESENT = -8,
    VK_ERROR_INCOMPATIBLE_DRIVER = -9,
    VK_ERROR_TOO_MANY_OBJECTS = -10,
    VK_ERROR_FORMAT_NOT_SUPPORTED = -11,
    VK_ERROR_FRAGMENTED_POOL = -12,
    VK_ERROR_UNKNOWN = -13,
  // Provided by VK_VERSION_1_1
    VK_ERROR_OUT_OF_POOL_MEMORY = -1000069000,
  // Provided by VK_VERSION_1_1
    VK_ERROR_INVALID_EXTERNAL_HANDLE = -1000072003,
  // Provided by VK_VERSION_1_2
    VK_ERROR_FRAGMENTATION = -1000161000,
  // Provided by VK_VERSION_1_2
    VK_ERROR_INVALID_OPAQUE_CAPTURE_ADDRESS = -1000257000,
  // Provided by VK_VERSION_1_3
    VK_PIPELINE_COMPILE_REQUIRED = 1000297000,
} VkResult;
```

Success Codes

- `VK_SUCCESS` Command successfully completed
- `VK_NOT_READY` A fence or query has not yet completed
- `VK_TIMEOUT` A wait operation has not completed in the specified time
- `VK_EVENT_SET` An event is signaled
- `VK_EVENT_RESET` An event is unsignaled
- `VK_INCOMPLETE` A return array was too small for the result
- `VK_PIPELINE_COMPILE_REQUIRED` A requested pipeline creation would have required compilation, but the application requested compilation to not be performed.

Error Codes

- `VK_ERROR_OUT_OF_HOST_MEMORY` A host memory allocation has failed.
- `VK_ERROR_OUT_OF_DEVICE_MEMORY` A device memory allocation has failed.

- VK_ERROR_INITIALIZATION_FAILED Initialization of an object could not be completed for implementation-specific reasons.
- VK_ERROR_DEVICE_LOST The logical or physical device has been lost. See Lost Device
- VK_ERROR_MEMORY_MAP_FAILED Mapping of a memory object has failed.
- VK_ERROR_LAYER_NOT_PRESENT A requested layer is not present or could not be loaded.
- VK_ERROR_EXTENSION_NOT_PRESENT A requested extension is not supported.
- VK_ERROR_FEATURE_NOT_PRESENT A requested feature is not supported.
- VK_ERROR_INCOMPATIBLE_DRIVER The requested version of Vulkan is not supported by the driver or is otherwise incompatible for implementation-specific reasons.
- VK_ERROR_TOO_MANY_OBJECTS Too many objects of the type have already been created.
- VK_ERROR_FORMAT_NOT_SUPPORTED A requested format is not supported on this device.
- VK_ERROR_FRAGMENTED_POOL A pool allocation has failed due to fragmentation of the pool's memory. This **must** only be returned if no attempt to allocate host or device memory was made to accommodate the new allocation. This **should** be returned in preference to VK_ERROR_OUT_OF_POOL_MEMORY, but only if the implementation is certain that the pool allocation failure was due to fragmentation.
- VK_ERROR_OUT_OF_POOL_MEMORY A pool memory allocation has failed. This **must** only be returned if no attempt to allocate host or device memory was made to accommodate the new allocation. If the failure was definitely due to fragmentation of the pool, VK_ERROR_FRAGMENTED_POOL **should** be returned instead.
- VK_ERROR_INVALID_EXTERNAL_HANDLE An external handle is not a valid handle of the specified type.
- VK_ERROR_FRAGMENTATION A descriptor pool creation has failed due to fragmentation.
- VK_ERROR_INVALID_OPAQUE_CAPTURE_ADDRESS A buffer creation or memory allocation failed because the requested address is not available.
- VK_ERROR_UNKNOWN An unknown error has occurred; either the application has provided invalid input, or an implementation failure has occurred.

If a command returns a runtime error, unless otherwise specified any output parameters will have undefined contents, except that if the output parameter is a structure with sType and pNext fields, those fields will be unmodified. Any structures chained from pNext will also have undefined contents, except that sType and pNext will be unmodified.

VK_ERROR_OUT_OF_*_MEMORY errors do not modify any currently existing Vulkan objects. Objects that have already been successfully created **can** still be used by the application.

NOTE	As a general rule, Free, Release, and Reset commands do not return VK_ERROR_OUT_OF_HOST_MEMORY, while any other command with a return code **may** return it. Any exceptions from this rule are described for those commands.

VK_ERROR_UNKNOWN will be returned by an implementation when an unexpected error occurs that cannot be attributed to valid behavior of the application and implementation. Under these conditions, it **may** be returned from any command returning a VkResult.

NOTE	`VK_ERROR_UNKNOWN` is not expected to ever be returned if the application behavior is valid, and if the implementation is bug-free. If `VK_ERROR_UNKNOWN` is received, the application should be checked against the latest validation layers to verify correct behavior as much as possible. If no issues are identified it could be an implementation issue, and the implementor should be contacted for support.

Performance-critical commands generally do not have return codes. If a runtime error occurs in such commands, the implementation will defer reporting the error until a specified point. For commands that record into command buffers (`vkCmd*`) runtime errors are reported by `vkEndCommandBuffer`.

3.9. Numeric Representation and Computation

Implementations normally perform computations in floating-point, and **must** meet the range and precision requirements defined under “Floating-Point Computation” below.

These requirements only apply to computations performed in Vulkan operations outside of shader execution, such as texture image specification and sampling, and per-fragment operations. Range and precision requirements during shader execution differ and are specified by the Precision and Operation of SPIR-V Instructions section.

In some cases, the representation and/or precision of operations is implicitly limited by the specified format of vertex or texel data consumed by Vulkan. Specific floating-point formats are described later in this section.

3.9.1. Floating-Point Computation

Most floating-point computation is performed in SPIR-V shader modules. The properties of computation within shaders are constrained as defined by the Precision and Operation of SPIR-V Instructions section.

Some floating-point computation is performed outside of shaders, such as viewport and depth range calculations. For these computations, we do not specify how floating-point numbers are to be represented, or the details of how operations on them are performed, but only place minimal requirements on representation and precision as described in the remainder of this section.

We require simply that numbers’ floating-point parts contain enough bits and that their exponent fields are large enough so that individual results of floating-point operations are accurate to about 1 part in 10^5. The maximum representable magnitude for all floating-point values **must** be at least 2^{32}.

$x \times 0 = 0 \times x = 0$ for any non-infinite and non-NaN x.

$1 \times x = x \times 1 = x$.

$x + 0 = 0 + x = x$.

$0^0 = 1$.

Occasionally, further requirements will be specified. Most single-precision floating-point formats meet these requirements.

The special values Inf and -Inf encode values with magnitudes too large to be represented; the special value NaN encodes “Not A Number” values resulting from undefined arithmetic operations such as 0 / 0. Implementations **may** support Inf and NaN in their floating-point computations. Any computation which does not support either Inf or NaN, for which that value is an input or output will yield an undefined value.

3.9.2. Floating-Point Format Conversions

When a value is converted to a defined floating-point representation, finite values falling between two representable finite values are rounded to one or the other. The rounding mode is not defined. Finite values whose magnitude is larger than that of any representable finite value may be rounded either to the closest representable finite value or to the appropriately signed infinity. For unsigned destination formats any negative values are converted to zero. Positive infinity is converted to positive infinity; negative infinity is converted to negative infinity in signed formats and to zero in unsigned formats; and any NaN is converted to a NaN.

3.9.3. 16-Bit Floating-Point Numbers

16-bit floating-point numbers are defined in the “16-bit floating-point numbers” section of the Khronos Data Format Specification.

3.9.4. Unsigned 11-Bit Floating-Point Numbers

Unsigned 11-bit floating-point numbers are defined in the “Unsigned 11-bit floating-point numbers” section of the Khronos Data Format Specification.

3.9.5. Unsigned 10-Bit Floating-Point Numbers

Unsigned 10-bit floating-point numbers are defined in the “Unsigned 10-bit floating-point numbers” section of the Khronos Data Format Specification.

3.9.6. General Requirements

Any representable floating-point value in the appropriate format is legal as input to a Vulkan command that requires floating-point data. The result of providing a value that is not a floating-point number to such a command is unspecified, but **must** not lead to Vulkan interruption or termination. For example, providing a negative zero (where applicable) or a denormalized number to a Vulkan command **must** yield deterministic results, while providing a NaN or Inf yields unspecified results.

Some calculations require division. In such cases (including implied divisions performed by vector normalization), division by zero produces an unspecified result but **must** not lead to Vulkan interruption or termination.

3.10. Fixed-Point Data Conversions

When generic vertex attributes and pixel color or depth *components* are represented as integers, they are often (but not always) considered to be *normalized*. Normalized integer values are treated specially when being converted to and from floating-point values, and are usually referred to as *normalized fixed-point*.

In the remainder of this section, b denotes the bit width of the fixed-point integer representation. When the integer is one of the types defined by the API, b is the bit width of that type. When the integer comes from an image containing color or depth component texels, b is the number of bits allocated to that component in its specified image format.

The signed and unsigned fixed-point representations are assumed to be b-bit binary two's-complement integers and binary unsigned integers, respectively.

3.10.1. Conversion From Normalized Fixed-Point to Floating-Point

Unsigned normalized fixed-point integers represent numbers in the range [0,1]. The conversion from an unsigned normalized fixed-point value c to the corresponding floating-point value f is defined as

$$f = \frac{c}{2^b - 1}$$

Signed normalized fixed-point integers represent numbers in the range [-1,1]. The conversion from a signed normalized fixed-point value c to the corresponding floating-point value f is performed using

$$f = \max\left(\frac{c}{2^{b-1} - 1}, -1.0\right)$$

Only the range [$-2^{b-1} + 1$, $2^{b-1} - 1$] is used to represent signed fixed-point values in the range [-1,1]. For example, if b = 8, then the integer value -127 corresponds to -1.0 and the value 127 corresponds to 1.0. This equation is used everywhere that signed normalized fixed-point values are converted to floating-point.

Note that while zero is exactly expressible in this representation, one value (-128 in the example) is outside the representable range, and implementations **must** clamp it to -1.0. Where the value is subject to further processing by the implementation, e.g. during texture filtering, values less than -1.0 **may** be used but the result **must** be clamped before the value is returned to shaders.

3.10.2. Conversion From Floating-Point to Normalized Fixed-Point

The conversion from a floating-point value f to the corresponding unsigned normalized fixed-point value c is defined by first clamping f to the range [0,1], then computing

$$c = \text{convertFloatToUint}(f \times (2^b - 1), b)$$

where convertFloatToUint(r,b) returns one of the two unsigned binary integer values with exactly b

bits which are closest to the floating-point value r. Implementations **should** round to nearest. If r is equal to an integer, then that integer value **must** be returned. In particular, if f is equal to 0.0 or 1.0, then c **must** be assigned 0 or 2^b - 1, respectively.

The conversion from a floating-point value f to the corresponding signed normalized fixed-point value c is performed by clamping f to the range [-1,1], then computing

$$c = \text{convertFloatToInt}(f \times (2^{b-1} - 1), b)$$

where convertFloatToInt(r,b) returns one of the two signed two's-complement binary integer values with exactly b bits which are closest to the floating-point value r. Implementations **should** round to nearest. If r is equal to an integer, then that integer value **must** be returned. In particular, if f is equal to -1.0, 0.0, or 1.0, then c **must** be assigned $-(2^{b-1} - 1)$, 0, or $2^{b-1} - 1$, respectively.

This equation is used everywhere that floating-point values are converted to signed normalized fixed-point.

3.11. String Representation

Strings passed into and returned from Vulkan API commands are usually defined to be null-terminated and UTF-8 encoded.

NOTE	Exceptions to this rule exist only when strings are defined or used by operating system APIs where that OS has a different convention. For example, `VkExportMemoryWin32HandleInfoKHR::name` is a null-terminated UTF-16 encoded string used in conjunction with Windows handles.

When a UTF-8 string is **returned from** a Vulkan API query, it is returned in a fixed-length buffer of C `char`. For example, a string returned in VkPhysicalDeviceProperties::`deviceName` has maximum length `VK_MAX_PHYSICAL_DEVICE_NAME_SIZE`, and a string returned in VkExtensionProperties ::`extensionName` has maximum length `VK_MAX_EXTENSION_NAME_SIZE`. The string, **including** its null terminator, will always fit completely within this buffer. If the string is shorter than the buffer size, the contents of `char` in the buffer following the null terminator are undefined.

When a UTF-8 string is **passed into** a Vulkan API, such as VkDeviceCreateInfo ::`ppEnabledExtensionNames`, there is no explicit limit on the length of that string. However, the string **must** contain a valid UTF-8 encoded string and **must** be null-terminated.

3.12. Common Object Types

Some types of Vulkan objects are used in many different structures and command parameters, and are described here. These types include *offsets*, *extents*, and *rectangles*.

3.12.1. Offsets

Offsets are used to describe a pixel location within an image or framebuffer, as an (x,y) location for two-dimensional images, or an (x,y,z) location for three-dimensional images.

A two-dimensional offset is defined by the structure:

```
// Provided by VK_VERSION_1_0
typedef struct VkOffset2D {
    int32_t    x;
    int32_t    y;
} VkOffset2D;
```

- `x` is the x offset.
- `y` is the y offset.

A three-dimensional offset is defined by the structure:

```
// Provided by VK_VERSION_1_0
typedef struct VkOffset3D {
    int32_t    x;
    int32_t    y;
    int32_t    z;
} VkOffset3D;
```

- `x` is the x offset.
- `y` is the y offset.
- `z` is the z offset.

3.12.2. Extents

Extents are used to describe the size of a rectangular region of pixels within an image or framebuffer, as (width,height) for two-dimensional images, or as (width,height,depth) for three-dimensional images.

A two-dimensional extent is defined by the structure:

```
// Provided by VK_VERSION_1_0
typedef struct VkExtent2D {
    uint32_t    width;
    uint32_t    height;
} VkExtent2D;
```

- `width` is the width of the extent.
- `height` is the height of the extent.

A three-dimensional extent is defined by the structure:

```
// Provided by VK_VERSION_1_0
typedef struct VkExtent3D {
    uint32_t    width;
    uint32_t    height;
    uint32_t    depth;
} VkExtent3D;
```

- `width` is the width of the extent.
- `height` is the height of the extent.
- `depth` is the depth of the extent.

3.12.3. Rectangles

Rectangles are used to describe a specified rectangular region of pixels within an image or framebuffer. Rectangles include both an offset and an extent of the same dimensionality, as described above. Two-dimensional rectangles are defined by the structure

```
// Provided by VK_VERSION_1_0
typedef struct VkRect2D {
    VkOffset2D    offset;
    VkExtent2D    extent;
} VkRect2D;
```

- `offset` is a VkOffset2D specifying the rectangle offset.
- `extent` is a VkExtent2D specifying the rectangle extent.

3.12.4. Structure Types

Each value corresponds to a particular structure with a `sType` member with a matching name. As a general rule, the name of each VkStructureType value is obtained by taking the name of the structure, stripping the leading `Vk`, prefixing each capital letter with `_`, converting the entire resulting string to upper case, and prefixing it with `VK_STRUCTURE_TYPE_`. For example, structures of type VkImageCreateInfo correspond to a VkStructureType value of `VK_STRUCTURE_TYPE_IMAGE_CREATE_INFO`, and thus a structure of this type **must** have its `sType` member set to this value before it is passed to the API.

The values `VK_STRUCTURE_TYPE_LOADER_INSTANCE_CREATE_INFO` and `VK_STRUCTURE_TYPE_LOADER_DEVICE_CREATE_INFO` are reserved for internal use by the loader, and do not have corresponding Vulkan structures in this Specification.

Structure types supported by the Vulkan API include:

```
// Provided by VK_VERSION_1_0
typedef enum VkStructureType {
    VK_STRUCTURE_TYPE_APPLICATION_INFO = 0,
    VK_STRUCTURE_TYPE_INSTANCE_CREATE_INFO = 1,
```

```
    VK_STRUCTURE_TYPE_DEVICE_QUEUE_CREATE_INFO = 2,
    VK_STRUCTURE_TYPE_DEVICE_CREATE_INFO = 3,
    VK_STRUCTURE_TYPE_SUBMIT_INFO = 4,
    VK_STRUCTURE_TYPE_MEMORY_ALLOCATE_INFO = 5,
    VK_STRUCTURE_TYPE_MAPPED_MEMORY_RANGE = 6,
    VK_STRUCTURE_TYPE_BIND_SPARSE_INFO = 7,
    VK_STRUCTURE_TYPE_FENCE_CREATE_INFO = 8,
    VK_STRUCTURE_TYPE_SEMAPHORE_CREATE_INFO = 9,
    VK_STRUCTURE_TYPE_EVENT_CREATE_INFO = 10,
    VK_STRUCTURE_TYPE_QUERY_POOL_CREATE_INFO = 11,
    VK_STRUCTURE_TYPE_BUFFER_CREATE_INFO = 12,
    VK_STRUCTURE_TYPE_BUFFER_VIEW_CREATE_INFO = 13,
    VK_STRUCTURE_TYPE_IMAGE_CREATE_INFO = 14,
    VK_STRUCTURE_TYPE_IMAGE_VIEW_CREATE_INFO = 15,
    VK_STRUCTURE_TYPE_SHADER_MODULE_CREATE_INFO = 16,
    VK_STRUCTURE_TYPE_PIPELINE_CACHE_CREATE_INFO = 17,
    VK_STRUCTURE_TYPE_PIPELINE_SHADER_STAGE_CREATE_INFO = 18,
    VK_STRUCTURE_TYPE_PIPELINE_VERTEX_INPUT_STATE_CREATE_INFO = 19,
    VK_STRUCTURE_TYPE_PIPELINE_INPUT_ASSEMBLY_STATE_CREATE_INFO = 20,
    VK_STRUCTURE_TYPE_PIPELINE_TESSELLATION_STATE_CREATE_INFO = 21,
    VK_STRUCTURE_TYPE_PIPELINE_VIEWPORT_STATE_CREATE_INFO = 22,
    VK_STRUCTURE_TYPE_PIPELINE_RASTERIZATION_STATE_CREATE_INFO = 23,
    VK_STRUCTURE_TYPE_PIPELINE_MULTISAMPLE_STATE_CREATE_INFO = 24,
    VK_STRUCTURE_TYPE_PIPELINE_DEPTH_STENCIL_STATE_CREATE_INFO = 25,
    VK_STRUCTURE_TYPE_PIPELINE_COLOR_BLEND_STATE_CREATE_INFO = 26,
    VK_STRUCTURE_TYPE_PIPELINE_DYNAMIC_STATE_CREATE_INFO = 27,
    VK_STRUCTURE_TYPE_GRAPHICS_PIPELINE_CREATE_INFO = 28,
    VK_STRUCTURE_TYPE_COMPUTE_PIPELINE_CREATE_INFO = 29,
    VK_STRUCTURE_TYPE_PIPELINE_LAYOUT_CREATE_INFO = 30,
    VK_STRUCTURE_TYPE_SAMPLER_CREATE_INFO = 31,
    VK_STRUCTURE_TYPE_DESCRIPTOR_SET_LAYOUT_CREATE_INFO = 32,
    VK_STRUCTURE_TYPE_DESCRIPTOR_POOL_CREATE_INFO = 33,
    VK_STRUCTURE_TYPE_DESCRIPTOR_SET_ALLOCATE_INFO = 34,
    VK_STRUCTURE_TYPE_WRITE_DESCRIPTOR_SET = 35,
    VK_STRUCTURE_TYPE_COPY_DESCRIPTOR_SET = 36,
    VK_STRUCTURE_TYPE_FRAMEBUFFER_CREATE_INFO = 37,
    VK_STRUCTURE_TYPE_RENDER_PASS_CREATE_INFO = 38,
    VK_STRUCTURE_TYPE_COMMAND_POOL_CREATE_INFO = 39,
    VK_STRUCTURE_TYPE_COMMAND_BUFFER_ALLOCATE_INFO = 40,
    VK_STRUCTURE_TYPE_COMMAND_BUFFER_INHERITANCE_INFO = 41,
    VK_STRUCTURE_TYPE_COMMAND_BUFFER_BEGIN_INFO = 42,
    VK_STRUCTURE_TYPE_RENDER_PASS_BEGIN_INFO = 43,
    VK_STRUCTURE_TYPE_BUFFER_MEMORY_BARRIER = 44,
    VK_STRUCTURE_TYPE_IMAGE_MEMORY_BARRIER = 45,
    VK_STRUCTURE_TYPE_MEMORY_BARRIER = 46,
    VK_STRUCTURE_TYPE_LOADER_INSTANCE_CREATE_INFO = 47,
    VK_STRUCTURE_TYPE_LOADER_DEVICE_CREATE_INFO = 48,
  // Provided by VK_VERSION_1_1
    VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_SUBGROUP_PROPERTIES = 1000094000,
  // Provided by VK_VERSION_1_1
    VK_STRUCTURE_TYPE_BIND_BUFFER_MEMORY_INFO = 1000157000,
```

```
  // Provided by VK_VERSION_1_1
    VK_STRUCTURE_TYPE_BIND_IMAGE_MEMORY_INFO = 1000157001,
  // Provided by VK_VERSION_1_1
    VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_16BIT_STORAGE_FEATURES = 1000083000,
  // Provided by VK_VERSION_1_1
    VK_STRUCTURE_TYPE_MEMORY_DEDICATED_REQUIREMENTS = 1000127000,
  // Provided by VK_VERSION_1_1
    VK_STRUCTURE_TYPE_MEMORY_DEDICATED_ALLOCATE_INFO = 1000127001,
  // Provided by VK_VERSION_1_1
    VK_STRUCTURE_TYPE_MEMORY_ALLOCATE_FLAGS_INFO = 1000060000,
  // Provided by VK_VERSION_1_1
    VK_STRUCTURE_TYPE_DEVICE_GROUP_RENDER_PASS_BEGIN_INFO = 1000060003,
  // Provided by VK_VERSION_1_1
    VK_STRUCTURE_TYPE_DEVICE_GROUP_COMMAND_BUFFER_BEGIN_INFO = 1000060004,
  // Provided by VK_VERSION_1_1
    VK_STRUCTURE_TYPE_DEVICE_GROUP_SUBMIT_INFO = 1000060005,
  // Provided by VK_VERSION_1_1
    VK_STRUCTURE_TYPE_DEVICE_GROUP_BIND_SPARSE_INFO = 1000060006,
  // Provided by VK_VERSION_1_1
    VK_STRUCTURE_TYPE_BIND_BUFFER_MEMORY_DEVICE_GROUP_INFO = 1000060013,
  // Provided by VK_VERSION_1_1
    VK_STRUCTURE_TYPE_BIND_IMAGE_MEMORY_DEVICE_GROUP_INFO = 1000060014,
  // Provided by VK_VERSION_1_1
    VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_GROUP_PROPERTIES = 1000070000,
  // Provided by VK_VERSION_1_1
    VK_STRUCTURE_TYPE_DEVICE_GROUP_DEVICE_CREATE_INFO = 1000070001,
  // Provided by VK_VERSION_1_1
    VK_STRUCTURE_TYPE_BUFFER_MEMORY_REQUIREMENTS_INFO_2 = 1000146000,
  // Provided by VK_VERSION_1_1
    VK_STRUCTURE_TYPE_IMAGE_MEMORY_REQUIREMENTS_INFO_2 = 1000146001,
  // Provided by VK_VERSION_1_1
    VK_STRUCTURE_TYPE_IMAGE_SPARSE_MEMORY_REQUIREMENTS_INFO_2 = 1000146002,
  // Provided by VK_VERSION_1_1
    VK_STRUCTURE_TYPE_MEMORY_REQUIREMENTS_2 = 1000146003,
  // Provided by VK_VERSION_1_1
    VK_STRUCTURE_TYPE_SPARSE_IMAGE_MEMORY_REQUIREMENTS_2 = 1000146004,
  // Provided by VK_VERSION_1_1
    VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_FEATURES_2 = 1000059000,
  // Provided by VK_VERSION_1_1
    VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_PROPERTIES_2 = 1000059001,
  // Provided by VK_VERSION_1_1
    VK_STRUCTURE_TYPE_FORMAT_PROPERTIES_2 = 1000059002,
  // Provided by VK_VERSION_1_1
    VK_STRUCTURE_TYPE_IMAGE_FORMAT_PROPERTIES_2 = 1000059003,
  // Provided by VK_VERSION_1_1
    VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_IMAGE_FORMAT_INFO_2 = 1000059004,
  // Provided by VK_VERSION_1_1
    VK_STRUCTURE_TYPE_QUEUE_FAMILY_PROPERTIES_2 = 1000059005,
  // Provided by VK_VERSION_1_1
    VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_MEMORY_PROPERTIES_2 = 1000059006,
  // Provided by VK_VERSION_1_1
```

```
    VK_STRUCTURE_TYPE_SPARSE_IMAGE_FORMAT_PROPERTIES_2 = 1000059007,
  // Provided by VK_VERSION_1_1
    VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_SPARSE_IMAGE_FORMAT_INFO_2 = 1000059008,
  // Provided by VK_VERSION_1_1
    VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_POINT_CLIPPING_PROPERTIES = 1000117000,
  // Provided by VK_VERSION_1_1
    VK_STRUCTURE_TYPE_RENDER_PASS_INPUT_ATTACHMENT_ASPECT_CREATE_INFO = 1000117001,
  // Provided by VK_VERSION_1_1
    VK_STRUCTURE_TYPE_IMAGE_VIEW_USAGE_CREATE_INFO = 1000117002,
  // Provided by VK_VERSION_1_1
    VK_STRUCTURE_TYPE_PIPELINE_TESSELLATION_DOMAIN_ORIGIN_STATE_CREATE_INFO =
1000117003,
  // Provided by VK_VERSION_1_1
    VK_STRUCTURE_TYPE_RENDER_PASS_MULTIVIEW_CREATE_INFO = 1000053000,
  // Provided by VK_VERSION_1_1
    VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_MULTIVIEW_FEATURES = 1000053001,
  // Provided by VK_VERSION_1_1
    VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_MULTIVIEW_PROPERTIES = 1000053002,
  // Provided by VK_VERSION_1_1
    VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_VARIABLE_POINTERS_FEATURES = 1000120000,
  // Provided by VK_VERSION_1_1
    VK_STRUCTURE_TYPE_PROTECTED_SUBMIT_INFO = 1000145000,
  // Provided by VK_VERSION_1_1
    VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_PROTECTED_MEMORY_FEATURES = 1000145001,
  // Provided by VK_VERSION_1_1
    VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_PROTECTED_MEMORY_PROPERTIES = 1000145002,
  // Provided by VK_VERSION_1_1
    VK_STRUCTURE_TYPE_DEVICE_QUEUE_INFO_2 = 1000145003,
  // Provided by VK_VERSION_1_1
    VK_STRUCTURE_TYPE_SAMPLER_YCBCR_CONVERSION_CREATE_INFO = 1000156000,
  // Provided by VK_VERSION_1_1
    VK_STRUCTURE_TYPE_SAMPLER_YCBCR_CONVERSION_INFO = 1000156001,
  // Provided by VK_VERSION_1_1
    VK_STRUCTURE_TYPE_BIND_IMAGE_PLANE_MEMORY_INFO = 1000156002,
  // Provided by VK_VERSION_1_1
    VK_STRUCTURE_TYPE_IMAGE_PLANE_MEMORY_REQUIREMENTS_INFO = 1000156003,
  // Provided by VK_VERSION_1_1
    VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_SAMPLER_YCBCR_CONVERSION_FEATURES = 1000156004,
  // Provided by VK_VERSION_1_1
    VK_STRUCTURE_TYPE_SAMPLER_YCBCR_CONVERSION_IMAGE_FORMAT_PROPERTIES = 1000156005,
  // Provided by VK_VERSION_1_1
    VK_STRUCTURE_TYPE_DESCRIPTOR_UPDATE_TEMPLATE_CREATE_INFO = 1000085000,
  // Provided by VK_VERSION_1_1
    VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_EXTERNAL_IMAGE_FORMAT_INFO = 1000071000,
  // Provided by VK_VERSION_1_1
    VK_STRUCTURE_TYPE_EXTERNAL_IMAGE_FORMAT_PROPERTIES = 1000071001,
  // Provided by VK_VERSION_1_1
    VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_EXTERNAL_BUFFER_INFO = 1000071002,
  // Provided by VK_VERSION_1_1
    VK_STRUCTURE_TYPE_EXTERNAL_BUFFER_PROPERTIES = 1000071003,
  // Provided by VK_VERSION_1_1
```

```
    VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_ID_PROPERTIES = 1000071004,
  // Provided by VK_VERSION_1_1
    VK_STRUCTURE_TYPE_EXTERNAL_MEMORY_BUFFER_CREATE_INFO = 1000072000,
  // Provided by VK_VERSION_1_1
    VK_STRUCTURE_TYPE_EXTERNAL_MEMORY_IMAGE_CREATE_INFO = 1000072001,
  // Provided by VK_VERSION_1_1
    VK_STRUCTURE_TYPE_EXPORT_MEMORY_ALLOCATE_INFO = 1000072002,
  // Provided by VK_VERSION_1_1
    VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_EXTERNAL_FENCE_INFO = 1000112000,
  // Provided by VK_VERSION_1_1
    VK_STRUCTURE_TYPE_EXTERNAL_FENCE_PROPERTIES = 1000112001,
  // Provided by VK_VERSION_1_1
    VK_STRUCTURE_TYPE_EXPORT_FENCE_CREATE_INFO = 1000113000,
  // Provided by VK_VERSION_1_1
    VK_STRUCTURE_TYPE_EXPORT_SEMAPHORE_CREATE_INFO = 1000077000,
  // Provided by VK_VERSION_1_1
    VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_EXTERNAL_SEMAPHORE_INFO = 1000076000,
  // Provided by VK_VERSION_1_1
    VK_STRUCTURE_TYPE_EXTERNAL_SEMAPHORE_PROPERTIES = 1000076001,
  // Provided by VK_VERSION_1_1
    VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_MAINTENANCE_3_PROPERTIES = 1000168000,
  // Provided by VK_VERSION_1_1
    VK_STRUCTURE_TYPE_DESCRIPTOR_SET_LAYOUT_SUPPORT = 1000168001,
  // Provided by VK_VERSION_1_1
    VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_SHADER_DRAW_PARAMETERS_FEATURES = 1000063000,
  // Provided by VK_VERSION_1_2
    VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_VULKAN_1_1_FEATURES = 49,
  // Provided by VK_VERSION_1_2
    VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_VULKAN_1_1_PROPERTIES = 50,
  // Provided by VK_VERSION_1_2
    VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_VULKAN_1_2_FEATURES = 51,
  // Provided by VK_VERSION_1_2
    VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_VULKAN_1_2_PROPERTIES = 52,
  // Provided by VK_VERSION_1_2
    VK_STRUCTURE_TYPE_IMAGE_FORMAT_LIST_CREATE_INFO = 1000147000,
  // Provided by VK_VERSION_1_2
    VK_STRUCTURE_TYPE_ATTACHMENT_DESCRIPTION_2 = 1000109000,
  // Provided by VK_VERSION_1_2
    VK_STRUCTURE_TYPE_ATTACHMENT_REFERENCE_2 = 1000109001,
  // Provided by VK_VERSION_1_2
    VK_STRUCTURE_TYPE_SUBPASS_DESCRIPTION_2 = 1000109002,
  // Provided by VK_VERSION_1_2
    VK_STRUCTURE_TYPE_SUBPASS_DEPENDENCY_2 = 1000109003,
  // Provided by VK_VERSION_1_2
    VK_STRUCTURE_TYPE_RENDER_PASS_CREATE_INFO_2 = 1000109004,
  // Provided by VK_VERSION_1_2
    VK_STRUCTURE_TYPE_SUBPASS_BEGIN_INFO = 1000109005,
  // Provided by VK_VERSION_1_2
    VK_STRUCTURE_TYPE_SUBPASS_END_INFO = 1000109006,
  // Provided by VK_VERSION_1_2
    VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_8BIT_STORAGE_FEATURES = 1000177000,
```

```
  // Provided by VK_VERSION_1_2
    VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_DRIVER_PROPERTIES = 1000196000,
  // Provided by VK_VERSION_1_2
    VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_SHADER_ATOMIC_INT64_FEATURES = 1000180000,
  // Provided by VK_VERSION_1_2
    VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_SHADER_FLOAT16_INT8_FEATURES = 1000082000,
  // Provided by VK_VERSION_1_2
    VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_FLOAT_CONTROLS_PROPERTIES = 1000197000,
  // Provided by VK_VERSION_1_2
    VK_STRUCTURE_TYPE_DESCRIPTOR_SET_LAYOUT_BINDING_FLAGS_CREATE_INFO = 1000161000,
  // Provided by VK_VERSION_1_2
    VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_DESCRIPTOR_INDEXING_FEATURES = 1000161001,
  // Provided by VK_VERSION_1_2
    VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_DESCRIPTOR_INDEXING_PROPERTIES = 1000161002,
  // Provided by VK_VERSION_1_2
    VK_STRUCTURE_TYPE_DESCRIPTOR_SET_VARIABLE_DESCRIPTOR_COUNT_ALLOCATE_INFO =
1000161003,
  // Provided by VK_VERSION_1_2
    VK_STRUCTURE_TYPE_DESCRIPTOR_SET_VARIABLE_DESCRIPTOR_COUNT_LAYOUT_SUPPORT =
1000161004,
  // Provided by VK_VERSION_1_2
    VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_DEPTH_STENCIL_RESOLVE_PROPERTIES = 1000199000,
  // Provided by VK_VERSION_1_2
    VK_STRUCTURE_TYPE_SUBPASS_DESCRIPTION_DEPTH_STENCIL_RESOLVE = 1000199001,
  // Provided by VK_VERSION_1_2
    VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_SCALAR_BLOCK_LAYOUT_FEATURES = 1000221000,
  // Provided by VK_VERSION_1_2
    VK_STRUCTURE_TYPE_IMAGE_STENCIL_USAGE_CREATE_INFO = 1000246000,
  // Provided by VK_VERSION_1_2
    VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_SAMPLER_FILTER_MINMAX_PROPERTIES = 1000130000,
  // Provided by VK_VERSION_1_2
    VK_STRUCTURE_TYPE_SAMPLER_REDUCTION_MODE_CREATE_INFO = 1000130001,
  // Provided by VK_VERSION_1_2
    VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_VULKAN_MEMORY_MODEL_FEATURES = 1000211000,
  // Provided by VK_VERSION_1_2
    VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_IMAGELESS_FRAMEBUFFER_FEATURES = 1000108000,
  // Provided by VK_VERSION_1_2
    VK_STRUCTURE_TYPE_FRAMEBUFFER_ATTACHMENTS_CREATE_INFO = 1000108001,
  // Provided by VK_VERSION_1_2
    VK_STRUCTURE_TYPE_FRAMEBUFFER_ATTACHMENT_IMAGE_INFO = 1000108002,
  // Provided by VK_VERSION_1_2
    VK_STRUCTURE_TYPE_RENDER_PASS_ATTACHMENT_BEGIN_INFO = 1000108003,
  // Provided by VK_VERSION_1_2
    VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_UNIFORM_BUFFER_STANDARD_LAYOUT_FEATURES =
1000253000,
  // Provided by VK_VERSION_1_2
    VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_SHADER_SUBGROUP_EXTENDED_TYPES_FEATURES =
1000175000,
  // Provided by VK_VERSION_1_2
    VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_SEPARATE_DEPTH_STENCIL_LAYOUTS_FEATURES =
1000241000,
```

```
  // Provided by VK_VERSION_1_2
    VK_STRUCTURE_TYPE_ATTACHMENT_REFERENCE_STENCIL_LAYOUT = 1000241001,
  // Provided by VK_VERSION_1_2
    VK_STRUCTURE_TYPE_ATTACHMENT_DESCRIPTION_STENCIL_LAYOUT = 1000241002,
  // Provided by VK_VERSION_1_2
    VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_HOST_QUERY_RESET_FEATURES = 1000261000,
  // Provided by VK_VERSION_1_2
    VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_TIMELINE_SEMAPHORE_FEATURES = 1000207000,
  // Provided by VK_VERSION_1_2
    VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_TIMELINE_SEMAPHORE_PROPERTIES = 1000207001,
  // Provided by VK_VERSION_1_2
    VK_STRUCTURE_TYPE_SEMAPHORE_TYPE_CREATE_INFO = 1000207002,
  // Provided by VK_VERSION_1_2
    VK_STRUCTURE_TYPE_TIMELINE_SEMAPHORE_SUBMIT_INFO = 1000207003,
  // Provided by VK_VERSION_1_2
    VK_STRUCTURE_TYPE_SEMAPHORE_WAIT_INFO = 1000207004,
  // Provided by VK_VERSION_1_2
    VK_STRUCTURE_TYPE_SEMAPHORE_SIGNAL_INFO = 1000207005,
  // Provided by VK_VERSION_1_2
    VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_BUFFER_DEVICE_ADDRESS_FEATURES = 1000257000,
  // Provided by VK_VERSION_1_2
    VK_STRUCTURE_TYPE_BUFFER_DEVICE_ADDRESS_INFO = 1000244001,
  // Provided by VK_VERSION_1_2
    VK_STRUCTURE_TYPE_BUFFER_OPAQUE_CAPTURE_ADDRESS_CREATE_INFO = 1000257002,
  // Provided by VK_VERSION_1_2
    VK_STRUCTURE_TYPE_MEMORY_OPAQUE_CAPTURE_ADDRESS_ALLOCATE_INFO = 1000257003,
  // Provided by VK_VERSION_1_2
    VK_STRUCTURE_TYPE_DEVICE_MEMORY_OPAQUE_CAPTURE_ADDRESS_INFO = 1000257004,
  // Provided by VK_VERSION_1_3
    VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_VULKAN_1_3_FEATURES = 53,
  // Provided by VK_VERSION_1_3
    VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_VULKAN_1_3_PROPERTIES = 54,
  // Provided by VK_VERSION_1_3
    VK_STRUCTURE_TYPE_PIPELINE_CREATION_FEEDBACK_CREATE_INFO = 1000192000,
  // Provided by VK_VERSION_1_3
    VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_SHADER_TERMINATE_INVOCATION_FEATURES =
1000215000,
  // Provided by VK_VERSION_1_3
    VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_TOOL_PROPERTIES = 1000245000,
  // Provided by VK_VERSION_1_3
    VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_SHADER_DEMOTE_TO_HELPER_INVOCATION_FEATURES =
1000276000,
  // Provided by VK_VERSION_1_3
    VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_PRIVATE_DATA_FEATURES = 1000295000,
  // Provided by VK_VERSION_1_3
    VK_STRUCTURE_TYPE_DEVICE_PRIVATE_DATA_CREATE_INFO = 1000295001,
  // Provided by VK_VERSION_1_3
    VK_STRUCTURE_TYPE_PRIVATE_DATA_SLOT_CREATE_INFO = 1000295002,
  // Provided by VK_VERSION_1_3
    VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_PIPELINE_CREATION_CACHE_CONTROL_FEATURES =
1000297000,
```

```
  // Provided by VK_VERSION_1_3
    VK_STRUCTURE_TYPE_MEMORY_BARRIER_2 = 1000314000,
  // Provided by VK_VERSION_1_3
    VK_STRUCTURE_TYPE_BUFFER_MEMORY_BARRIER_2 = 1000314001,
  // Provided by VK_VERSION_1_3
    VK_STRUCTURE_TYPE_IMAGE_MEMORY_BARRIER_2 = 1000314002,
  // Provided by VK_VERSION_1_3
    VK_STRUCTURE_TYPE_DEPENDENCY_INFO = 1000314003,
  // Provided by VK_VERSION_1_3
    VK_STRUCTURE_TYPE_SUBMIT_INFO_2 = 1000314004,
  // Provided by VK_VERSION_1_3
    VK_STRUCTURE_TYPE_SEMAPHORE_SUBMIT_INFO = 1000314005,
  // Provided by VK_VERSION_1_3
    VK_STRUCTURE_TYPE_COMMAND_BUFFER_SUBMIT_INFO = 1000314006,
  // Provided by VK_VERSION_1_3
    VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_SYNCHRONIZATION_2_FEATURES = 1000314007,
  // Provided by VK_VERSION_1_3
    VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_ZERO_INITIALIZE_WORKGROUP_MEMORY_FEATURES =
1000325000,
  // Provided by VK_VERSION_1_3
    VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_IMAGE_ROBUSTNESS_FEATURES = 1000335000,
  // Provided by VK_VERSION_1_3
    VK_STRUCTURE_TYPE_COPY_BUFFER_INFO_2 = 1000337000,
  // Provided by VK_VERSION_1_3
    VK_STRUCTURE_TYPE_COPY_IMAGE_INFO_2 = 1000337001,
  // Provided by VK_VERSION_1_3
    VK_STRUCTURE_TYPE_COPY_BUFFER_TO_IMAGE_INFO_2 = 1000337002,
  // Provided by VK_VERSION_1_3
    VK_STRUCTURE_TYPE_COPY_IMAGE_TO_BUFFER_INFO_2 = 1000337003,
  // Provided by VK_VERSION_1_3
    VK_STRUCTURE_TYPE_BLIT_IMAGE_INFO_2 = 1000337004,
  // Provided by VK_VERSION_1_3
    VK_STRUCTURE_TYPE_RESOLVE_IMAGE_INFO_2 = 1000337005,
  // Provided by VK_VERSION_1_3
    VK_STRUCTURE_TYPE_BUFFER_COPY_2 = 1000337006,
  // Provided by VK_VERSION_1_3
    VK_STRUCTURE_TYPE_IMAGE_COPY_2 = 1000337007,
  // Provided by VK_VERSION_1_3
    VK_STRUCTURE_TYPE_IMAGE_BLIT_2 = 1000337008,
  // Provided by VK_VERSION_1_3
    VK_STRUCTURE_TYPE_BUFFER_IMAGE_COPY_2 = 1000337009,
  // Provided by VK_VERSION_1_3
    VK_STRUCTURE_TYPE_IMAGE_RESOLVE_2 = 1000337010,
  // Provided by VK_VERSION_1_3
    VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_SUBGROUP_SIZE_CONTROL_PROPERTIES = 1000225000,
  // Provided by VK_VERSION_1_3
    VK_STRUCTURE_TYPE_PIPELINE_SHADER_STAGE_REQUIRED_SUBGROUP_SIZE_CREATE_INFO =
1000225001,
  // Provided by VK_VERSION_1_3
    VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_SUBGROUP_SIZE_CONTROL_FEATURES = 1000225002,
  // Provided by VK_VERSION_1_3
```

```
    VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_INLINE_UNIFORM_BLOCK_FEATURES = 1000138000,
  // Provided by VK_VERSION_1_3
    VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_INLINE_UNIFORM_BLOCK_PROPERTIES = 1000138001,
  // Provided by VK_VERSION_1_3
    VK_STRUCTURE_TYPE_WRITE_DESCRIPTOR_SET_INLINE_UNIFORM_BLOCK = 1000138002,
  // Provided by VK_VERSION_1_3
    VK_STRUCTURE_TYPE_DESCRIPTOR_POOL_INLINE_UNIFORM_BLOCK_CREATE_INFO = 1000138003,
  // Provided by VK_VERSION_1_3
    VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_TEXTURE_COMPRESSION_ASTC_HDR_FEATURES =
1000066000,
  // Provided by VK_VERSION_1_3
    VK_STRUCTURE_TYPE_RENDERING_INFO = 1000044000,
  // Provided by VK_VERSION_1_3
    VK_STRUCTURE_TYPE_RENDERING_ATTACHMENT_INFO = 1000044001,
  // Provided by VK_VERSION_1_3
    VK_STRUCTURE_TYPE_PIPELINE_RENDERING_CREATE_INFO = 1000044002,
  // Provided by VK_VERSION_1_3
    VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_DYNAMIC_RENDERING_FEATURES = 1000044003,
  // Provided by VK_VERSION_1_3
    VK_STRUCTURE_TYPE_COMMAND_BUFFER_INHERITANCE_RENDERING_INFO = 1000044004,
  // Provided by VK_VERSION_1_3
    VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_SHADER_INTEGER_DOT_PRODUCT_FEATURES =
1000280000,
  // Provided by VK_VERSION_1_3
    VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_SHADER_INTEGER_DOT_PRODUCT_PROPERTIES =
1000280001,
  // Provided by VK_VERSION_1_3
    VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_TEXEL_BUFFER_ALIGNMENT_PROPERTIES = 1000281001,
  // Provided by VK_VERSION_1_3
    VK_STRUCTURE_TYPE_FORMAT_PROPERTIES_3 = 1000360000,
  // Provided by VK_VERSION_1_3
    VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_MAINTENANCE_4_FEATURES = 1000413000,
  // Provided by VK_VERSION_1_3
    VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_MAINTENANCE_4_PROPERTIES = 1000413001,
  // Provided by VK_VERSION_1_3
    VK_STRUCTURE_TYPE_DEVICE_BUFFER_MEMORY_REQUIREMENTS = 1000413002,
  // Provided by VK_VERSION_1_3
    VK_STRUCTURE_TYPE_DEVICE_IMAGE_MEMORY_REQUIREMENTS = 1000413003,
  // Provided by VK_VERSION_1_1
    VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_VARIABLE_POINTER_FEATURES =
VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_VARIABLE_POINTERS_FEATURES,
  // Provided by VK_VERSION_1_1
    VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_SHADER_DRAW_PARAMETER_FEATURES =
VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_SHADER_DRAW_PARAMETERS_FEATURES,
} VkStructureType;
```

3.13. API Name Aliases

A small number of APIs did not follow the naming conventions when initially defined. For consistency, when we discover an API name that violates the naming conventions, we rename it in

the Specification, XML, and header files. For backwards compatibility, the original (incorrect) name is retained as a “typo alias”. The alias is deprecated and should not be used, but will be retained indefinitely.

NOTE

`VK_STENCIL_FRONT_AND_BACK` is an example of a *typo alias*. It was initially defined as part of VkStencilFaceFlagBits. Once the naming inconsistency was noticed, it was renamed to `VK_STENCIL_FACE_FRONT_AND_BACK`, and the old name was aliased to the correct name.

Chapter 4. Initialization

Before using Vulkan, an application **must** initialize it by loading the Vulkan commands, and creating a VkInstance object.

4.1. Command Function Pointers

Vulkan commands are not necessarily exposed by static linking on a platform. Commands to query function pointers for Vulkan commands are described below.

NOTE

When extensions are promoted or otherwise incorporated into another extension or Vulkan core version, command aliases may be included. Whilst the behavior of each command alias is identical, the behavior of retrieving each alias's function pointer is not. A function pointer for a given alias can only be retrieved if the extension or version that introduced that alias is supported and enabled, irrespective of whether any other alias is available.

Function pointers for all Vulkan commands **can** be obtained by calling:

```
// Provided by VK_VERSION_1_0
PFN_vkVoidFunction vkGetInstanceProcAddr(
    VkInstance                                  instance,
    const char*                                 pName);
```

- instance is the instance that the function pointer will be compatible with, or NULL for commands not dependent on any instance.
- pName is the name of the command to obtain.

vkGetInstanceProcAddr itself is obtained in a platform- and loader- specific manner. Typically, the loader library will export this command as a function symbol, so applications **can** link against the loader library, or load it dynamically and look up the symbol using platform-specific APIs.

The table below defines the various use cases for vkGetInstanceProcAddr and expected return value ("fp" is "function pointer") for each case. A valid returned function pointer ("fp") **must** not be NULL.

The returned function pointer is of type PFN_vkVoidFunction, and **must** be cast to the type of the command being queried before use.

Table 1. vkGetInstanceProcAddr *behavior*

instance	pName	**return value**
*[1]	NULL	undefined
invalid non-NULL instance	*[1]	undefined
NULL	*global command*[2]	fp
NULL	vkGetInstanceProcAddr	fp[5]

instance	pName	return value
instance	vkGetInstanceProcAddr	fp
instance	core *dispatchable command*	fp[3]
instance	enabled instance extension dispatchable command for instance	fp[3]
instance	available device extension[4] dispatchable command for instance	fp[3]
any other case, not covered above		NULL

1

"*" means any representable value for the parameter (including valid values, invalid values, and NULL).

2

The global commands are: vkEnumerateInstanceVersion, vkEnumerateInstanceExtensionProperties, vkEnumerateInstanceLayerProperties, and vkCreateInstance. Dispatchable commands are all other commands which are not global.

3

The returned function pointer **must** only be called with a dispatchable object (the first parameter) that is instance or a child of instance, e.g. VkInstance, VkPhysicalDevice, VkDevice, VkQueue, or VkCommandBuffer.

4

An “available device extension” is a device extension supported by any physical device enumerated by instance.

5

Starting with Vulkan 1.2, vkGetInstanceProcAddr can resolve itself with a NULL instance pointer.

Valid Usage (Implicit)

- VUID-vkGetInstanceProcAddr-instance-parameter
  If instance is not NULL, instance **must** be a valid VkInstance handle
- VUID-vkGetInstanceProcAddr-pName-parameter
  pName **must** be a null-terminated UTF-8 string

In order to support systems with multiple Vulkan implementations, the function pointers returned by vkGetInstanceProcAddr **may** point to dispatch code that calls a different real implementation for different VkDevice objects or their child objects. The overhead of the internal dispatch for VkDevice objects can be avoided by obtaining device-specific function pointers for any commands that use a

device or device-child object as their dispatchable object. Such function pointers **can** be obtained by calling:

```
// Provided by VK_VERSION_1_0
PFN_vkVoidFunction vkGetDeviceProcAddr(
    VkDevice                                    device,
    const char*                                 pName);
```

The table below defines the various use cases for `vkGetDeviceProcAddr` and expected return value ("fp" is "function pointer") for each case. A valid returned function pointer ("fp") **must** not be `NULL`.

The returned function pointer is of type PFN_vkVoidFunction, and **must** be cast to the type of the command being queried before use. The function pointer **must** only be called with a dispatchable object (the first parameter) that is `device` or a child of `device`.

Table 2. `vkGetDeviceProcAddr` behavior

`device`	`pName`	**return value**
`NULL`	*[1]	undefined
invalid device	*[1]	undefined
device	`NULL`	undefined
device	requested core version[2] device-level dispatchable command[3]	fp[4]
device	enabled extension device-level dispatchable command[3]	fp[4]
any other case, not covered above		`NULL`

1

"*" means any representable value for the parameter (including valid values, invalid values, and `NULL`).

2

Device-level commands which are part of the core version specified by VkApplicationInfo ::`apiVersion` when creating the instance will always return a valid function pointer. Core commands beyond that version which are supported by the implementation **may** either return `NULL` or a function pointer. If a function pointer is returned, it **must** not be called.

3

In this function, device-level excludes all physical-device-level commands.

4

The returned function pointer **must** only be called with a dispatchable object (the first parameter) that is `device` or a child of `device` e.g. VkDevice, VkQueue, or VkCommandBuffer.

Valid Usage (Implicit)

- VUID-vkGetDeviceProcAddr-device-parameter
  `device` **must** be a valid VkDevice handle
- VUID-vkGetDeviceProcAddr-pName-parameter
  `pName` **must** be a null-terminated UTF-8 string

The definition of PFN_vkVoidFunction is:

```
// Provided by VK_VERSION_1_0
typedef void (VKAPI_PTR *PFN_vkVoidFunction)(void);
```

This type is returned from command function pointer queries, and **must** be cast to an actual command function pointer before use.

4.1.1. Extending Physical Device Core Functionality

New core physical-device-level functionality **can** be used when both VkPhysicalDeviceProperties::`apiVersion` and VkApplicationInfo::`apiVersion` are greater than or equal to the version of Vulkan that added the new functionality. The Vulkan version supported by a physical device **can** be obtained by calling vkGetPhysicalDeviceProperties.

4.1.2. Extending Physical Device From Device Extensions

When the `VK_KHR_get_physical_device_properties2` extension is enabled, or when both the instance and the physical-device versions are at least 1.1, physical-device-level functionality of a device extension **can** be used with a physical device if the corresponding extension is enumerated by vkEnumerateDeviceExtensionProperties for that physical device, even before a logical device has been created.

To obtain a function pointer for a physical-device-level command from a device extension, an application **can** use vkGetInstanceProcAddr. This function pointer **may** point to dispatch code, which calls a different real implementation for different `VkPhysicalDevice` objects. Applications **must** not use a VkPhysicalDevice in any command added by an extension or core version that is not supported by that physical device.

Device extensions **may** define structures that **can** be added to the `pNext` chain of physical-device-level commands.

4.2. Instances

There is no global state in Vulkan and all per-application state is stored in a `VkInstance` object. Creating a `VkInstance` object initializes the Vulkan library and allows the application to pass information about itself to the implementation.

Instances are represented by `VkInstance` handles:

```
// Provided by VK_VERSION_1_0
VK_DEFINE_HANDLE(VkInstance)
```

To query the version of instance-level functionality supported by the implementation, call:

```
// Provided by VK_VERSION_1_1
VkResult vkEnumerateInstanceVersion(
    uint32_t*                                   pApiVersion);
```

- pApiVersion is a pointer to a uint32_t, which is the version of Vulkan supported by instance-level functionality, encoded as described in Version Numbers.

NOTE

The intended behavior of vkEnumerateInstanceVersion is that an implementation **should** not need to perform memory allocations and **should** unconditionally return VK_SUCCESS. The loader, and any enabled layers, **may** return VK_ERROR_OUT_OF_HOST_MEMORY in the case of a failed memory allocation.

Valid Usage (Implicit)

- VUID-vkEnumerateInstanceVersion-pApiVersion-parameter
  pApiVersion **must** be a valid pointer to a uint32_t value

Return Codes

Success

- VK_SUCCESS

Failure

- VK_ERROR_OUT_OF_HOST_MEMORY

To create an instance object, call:

```
// Provided by VK_VERSION_1_0
VkResult vkCreateInstance(
    const VkInstanceCreateInfo*                 pCreateInfo,
    const VkAllocationCallbacks*                pAllocator,
    VkInstance*                                 pInstance);
```

- pCreateInfo is a pointer to a VkInstanceCreateInfo structure controlling creation of the instance.
- pAllocator controls host memory allocation as described in the Memory Allocation chapter.
- pInstance points a VkInstance handle in which the resulting instance is returned.

vkCreateInstance verifies that the requested layers exist. If not, vkCreateInstance will return

VK_ERROR_LAYER_NOT_PRESENT. Next vkCreateInstance verifies that the requested extensions are supported (e.g. in the implementation or in any enabled instance layer) and if any requested extension is not supported, vkCreateInstance **must** return VK_ERROR_EXTENSION_NOT_PRESENT. After verifying and enabling the instance layers and extensions the VkInstance object is created and returned to the application. If a requested extension is only supported by a layer, both the layer and the extension need to be specified at vkCreateInstance time for the creation to succeed.

Valid Usage

- VUID-vkCreateInstance-ppEnabledExtensionNames-01388
  All required extensions for each extension in the VkInstanceCreateInfo ::ppEnabledExtensionNames list **must** also be present in that list

Valid Usage (Implicit)

- VUID-vkCreateInstance-pCreateInfo-parameter
  pCreateInfo **must** be a valid pointer to a valid VkInstanceCreateInfo structure
- VUID-vkCreateInstance-pAllocator-parameter
  If pAllocator is not NULL, pAllocator **must** be a valid pointer to a valid VkAllocationCallbacks structure
- VUID-vkCreateInstance-pInstance-parameter
  pInstance **must** be a valid pointer to a VkInstance handle

Return Codes

Success

- VK_SUCCESS

Failure

- VK_ERROR_OUT_OF_HOST_MEMORY
- VK_ERROR_OUT_OF_DEVICE_MEMORY
- VK_ERROR_INITIALIZATION_FAILED
- VK_ERROR_LAYER_NOT_PRESENT
- VK_ERROR_EXTENSION_NOT_PRESENT
- VK_ERROR_INCOMPATIBLE_DRIVER

The VkInstanceCreateInfo structure is defined as:

```
// Provided by VK_VERSION_1_0
typedef struct VkInstanceCreateInfo {
    VkStructureType             sType;
    const void*                 pNext;
    VkInstanceCreateFlags       flags;
    const VkApplicationInfo*    pApplicationInfo;
    uint32_t                    enabledLayerCount;
    const char* const*          ppEnabledLayerNames;
    uint32_t                    enabledExtensionCount;
    const char* const*          ppEnabledExtensionNames;
} VkInstanceCreateInfo;
```

- `sType` is a VkStructureType value identifying this structure.
- `pNext` is `NULL` or a pointer to a structure extending this structure.
- `flags` is a bitmask of VkInstanceCreateFlagBits indicating the behavior of the instance.
- `pApplicationInfo` is `NULL` or a pointer to a `VkApplicationInfo` structure. If not `NULL`, this information helps implementations recognize behavior inherent to classes of applications. VkApplicationInfo is defined in detail below.
- `enabledLayerCount` is the number of global layers to enable.
- `ppEnabledLayerNames` is a pointer to an array of `enabledLayerCount` null-terminated UTF-8 strings containing the names of layers to enable for the created instance. The layers are loaded in the order they are listed in this array, with the first array element being the closest to the application, and the last array element being the closest to the driver. See the Layers section for further details.
- `enabledExtensionCount` is the number of global extensions to enable.
- `ppEnabledExtensionNames` is a pointer to an array of `enabledExtensionCount` null-terminated UTF-8 strings containing the names of extensions to enable.

Valid Usage (Implicit)

- VUID-VkInstanceCreateInfo-sType-sType
  `sType` **must** be `VK_STRUCTURE_TYPE_INSTANCE_CREATE_INFO`
- VUID-VkInstanceCreateInfo-pNext-pNext
  `pNext` **must** be `NULL`
- VUID-VkInstanceCreateInfo-flags-zerobitmask
  `flags` **must** be `0`
- VUID-VkInstanceCreateInfo-pApplicationInfo-parameter
  If `pApplicationInfo` is not `NULL`, `pApplicationInfo` **must** be a valid pointer to a valid VkApplicationInfo structure
- VUID-VkInstanceCreateInfo-ppEnabledLayerNames-parameter
  If `enabledLayerCount` is not `0`, `ppEnabledLayerNames` **must** be a valid pointer to an array of `enabledLayerCount` null-terminated UTF-8 strings

- VUID-VkInstanceCreateInfo-ppEnabledExtensionNames-parameter
  If `enabledExtensionCount` is not `0`, `ppEnabledExtensionNames` **must** be a valid pointer to an array of `enabledExtensionCount` null-terminated UTF-8 strings

```
// Provided by VK_VERSION_1_0
typedef enum VkInstanceCreateFlagBits {
} VkInstanceCreateFlagBits;
```

NOTE All bits for this type are defined by extensions, and none of those extensions are enabled in this build of the specification.

```
// Provided by VK_VERSION_1_0
typedef VkFlags VkInstanceCreateFlags;
```

`VkInstanceCreateFlags` is a bitmask type for setting a mask, but is currently reserved for future use.

The `VkApplicationInfo` structure is defined as:

```
// Provided by VK_VERSION_1_0
typedef struct VkApplicationInfo {
    VkStructureType    sType;
    const void*        pNext;
    const char*        pApplicationName;
    uint32_t           applicationVersion;
    const char*        pEngineName;
    uint32_t           engineVersion;
    uint32_t           apiVersion;
} VkApplicationInfo;
```

- `sType` is a VkStructureType value identifying this structure.
- `pNext` is `NULL` or a pointer to a structure extending this structure.
- `pApplicationName` is `NULL` or is a pointer to a null-terminated UTF-8 string containing the name of the application.
- `applicationVersion` is an unsigned integer variable containing the developer-supplied version number of the application.
- `pEngineName` is `NULL` or is a pointer to a null-terminated UTF-8 string containing the name of the engine (if any) used to create the application.
- `engineVersion` is an unsigned integer variable containing the developer-supplied version number of the engine used to create the application.
- `apiVersion` **must** be the highest version of Vulkan that the application is designed to use, encoded as described in Version Numbers. The patch version number specified in `apiVersion` is ignored when creating an instance object. The variant version of the instance **must** match that

requested in apiVersion.

Vulkan 1.0 implementations were required to return VK_ERROR_INCOMPATIBLE_DRIVER if apiVersion was larger than 1.0. Implementations that support Vulkan 1.1 or later **must** not return VK_ERROR_INCOMPATIBLE_DRIVER for any value of apiVersion .

NOTE

Because Vulkan 1.0 implementations **may** fail with VK_ERROR_INCOMPATIBLE_DRIVER, applications **should** determine the version of Vulkan available before calling vkCreateInstance. If the vkGetInstanceProcAddr returns NULL for vkEnumerateInstanceVersion, it is a Vulkan 1.0 implementation. Otherwise, the application **can** call vkEnumerateInstanceVersion to determine the version of Vulkan.

As long as the instance supports at least Vulkan 1.1, an application **can** use different versions of Vulkan with an instance than it does with a device or physical device.

NOTE

The Khronos validation layers will treat apiVersion as the highest API version the application targets, and will validate API usage against the minimum of that version and the implementation version (instance or device, depending on context). If an application tries to use functionality from a greater version than this, a validation error will be triggered.

For example, if the instance supports Vulkan 1.1 and three physical devices support Vulkan 1.0, Vulkan 1.1, and Vulkan 1.2, respectively, and if the application sets apiVersion to 1.2, the application **can** use the following versions of Vulkan:

- Vulkan 1.0 **can** be used with the instance and with all physical devices.
- Vulkan 1.1 **can** be used with the instance and with the physical devices that support Vulkan 1.1 and Vulkan 1.2.
- Vulkan 1.2 **can** be used with the physical device that supports Vulkan 1.2.

If we modify the above example so that the application sets apiVersion to 1.1, then the application **must** not use Vulkan 1.2 functionality on the physical device that supports Vulkan 1.2.

NOTE

Providing a NULL VkInstanceCreateInfo::pApplicationInfo or providing an apiVersion of 0 is equivalent to providing an apiVersion of VK_MAKE_API_VERSION(0,1,0,0).

Valid Usage

- VUID-VkApplicationInfo-apiVersion-04010
  If apiVersion is not 0, then it **must** be greater than or equal to VK_API_VERSION_1_0

Valid Usage (Implicit)

- VUID-VkApplicationInfo-sType-sType

`sType` **must** be `VK_STRUCTURE_TYPE_APPLICATION_INFO`

- VUID-VkApplicationInfo-pNext-pNext
  `pNext` **must** be `NULL`
- VUID-VkApplicationInfo-pApplicationName-parameter
  If `pApplicationName` is not `NULL`, `pApplicationName` **must** be a null-terminated UTF-8 string
- VUID-VkApplicationInfo-pEngineName-parameter
  If `pEngineName` is not `NULL`, `pEngineName` **must** be a null-terminated UTF-8 string

To destroy an instance, call:

```
// Provided by VK_VERSION_1_0
void vkDestroyInstance(
    VkInstance                                  instance,
    const VkAllocationCallbacks*                pAllocator);
```

- `instance` is the handle of the instance to destroy.
- `pAllocator` controls host memory allocation as described in the Memory Allocation chapter.

Valid Usage

- VUID-vkDestroyInstance-instance-00629
  All child objects created using `instance` **must** have been destroyed prior to destroying `instance`
- VUID-vkDestroyInstance-instance-00630
  If `VkAllocationCallbacks` were provided when `instance` was created, a compatible set of callbacks **must** be provided here
- VUID-vkDestroyInstance-instance-00631
  If no `VkAllocationCallbacks` were provided when `instance` was created, `pAllocator` **must** be `NULL`

Valid Usage (Implicit)

- VUID-vkDestroyInstance-instance-parameter
  If `instance` is not `NULL`, `instance` **must** be a valid VkInstance handle
- VUID-vkDestroyInstance-pAllocator-parameter
  If `pAllocator` is not `NULL`, `pAllocator` **must** be a valid pointer to a valid VkAllocationCallbacks structure

Host Synchronization

- Host access to `instance` **must** be externally synchronized

- Host access to all `VkPhysicalDevice` objects enumerated from `instance` **must** be externally synchronized

Chapter 5. Devices and Queues

Once Vulkan is initialized, devices and queues are the primary objects used to interact with a Vulkan implementation.

Vulkan separates the concept of *physical* and *logical* devices. A physical device usually represents a single complete implementation of Vulkan (excluding instance-level functionality) available to the host, of which there are a finite number. A logical device represents an instance of that implementation with its own state and resources independent of other logical devices.

Physical devices are represented by `VkPhysicalDevice` handles:

```
// Provided by VK_VERSION_1_0
VK_DEFINE_HANDLE(VkPhysicalDevice)
```

5.1. Physical Devices

To retrieve a list of physical device objects representing the physical devices installed in the system, call:

```
// Provided by VK_VERSION_1_0
VkResult vkEnumeratePhysicalDevices(
    VkInstance                                  instance,
    uint32_t*                                   pPhysicalDeviceCount,
    VkPhysicalDevice*                           pPhysicalDevices);
```

- `instance` is a handle to a Vulkan instance previously created with vkCreateInstance.
- `pPhysicalDeviceCount` is a pointer to an integer related to the number of physical devices available or queried, as described below.
- `pPhysicalDevices` is either `NULL` or a pointer to an array of `VkPhysicalDevice` handles.

If `pPhysicalDevices` is `NULL`, then the number of physical devices available is returned in `pPhysicalDeviceCount`. Otherwise, `pPhysicalDeviceCount` **must** point to a variable set by the application to the number of elements in the `pPhysicalDevices` array, and on return the variable is overwritten with the number of handles actually written to `pPhysicalDevices`. If `pPhysicalDeviceCount` is less than the number of physical devices available, at most `pPhysicalDeviceCount` structures will be written, and `VK_INCOMPLETE` will be returned instead of `VK_SUCCESS`, to indicate that not all the available physical devices were returned.

Valid Usage (Implicit)

- VUID-vkEnumeratePhysicalDevices-instance-parameter
  `instance` **must** be a valid VkInstance handle
- VUID-vkEnumeratePhysicalDevices-pPhysicalDeviceCount-parameter

pPhysicalDeviceCount **must** be a valid pointer to a uint32_t value

- VUID-vkEnumeratePhysicalDevices-pPhysicalDevices-parameter
  If the value referenced by pPhysicalDeviceCount is not 0, and pPhysicalDevices is not NULL, pPhysicalDevices **must** be a valid pointer to an array of pPhysicalDeviceCount VkPhysicalDevice handles

Return Codes

Success

- VK_SUCCESS
- VK_INCOMPLETE

Failure

- VK_ERROR_OUT_OF_HOST_MEMORY
- VK_ERROR_OUT_OF_DEVICE_MEMORY
- VK_ERROR_INITIALIZATION_FAILED

To query general properties of physical devices once enumerated, call:

```
// Provided by VK_VERSION_1_0
void vkGetPhysicalDeviceProperties(
    VkPhysicalDevice                            physicalDevice,
    VkPhysicalDeviceProperties*                 pProperties);
```

- physicalDevice is the handle to the physical device whose properties will be queried.
- pProperties is a pointer to a VkPhysicalDeviceProperties structure in which properties are returned.

Valid Usage (Implicit)

- VUID-vkGetPhysicalDeviceProperties-physicalDevice-parameter
  physicalDevice **must** be a valid VkPhysicalDevice handle
- VUID-vkGetPhysicalDeviceProperties-pProperties-parameter
  pProperties **must** be a valid pointer to a VkPhysicalDeviceProperties structure

The VkPhysicalDeviceProperties structure is defined as:

```
// Provided by VK_VERSION_1_0
typedef struct VkPhysicalDeviceProperties {
    uint32_t                            apiVersion;
    uint32_t                            driverVersion;
    uint32_t                            vendorID;
    uint32_t                            deviceID;
    VkPhysicalDeviceType                deviceType;
    char                                deviceName[VK_MAX_PHYSICAL_DEVICE_NAME_SIZE];
    uint8_t                             pipelineCacheUUID[VK_UUID_SIZE];
    VkPhysicalDeviceLimits              limits;
    VkPhysicalDeviceSparseProperties    sparseProperties;
} VkPhysicalDeviceProperties;
```

- `apiVersion` is the version of Vulkan supported by the device, encoded as described in Version Numbers.
- `driverVersion` is the vendor-specified version of the driver.
- `vendorID` is a unique identifier for the *vendor* (see below) of the physical device.
- `deviceID` is a unique identifier for the physical device among devices available from the vendor.
- `deviceType` is a VkPhysicalDeviceType specifying the type of device.
- `deviceName` is an array of `VK_MAX_PHYSICAL_DEVICE_NAME_SIZE` `char` containing a null-terminated UTF-8 string which is the name of the device.
- `pipelineCacheUUID` is an array of `VK_UUID_SIZE` `uint8_t` values representing a universally unique identifier for the device.
- `limits` is the VkPhysicalDeviceLimits structure specifying device-specific limits of the physical device. See Limits for details.
- `sparseProperties` is the VkPhysicalDeviceSparseProperties structure specifying various sparse related properties of the physical device. See Sparse Properties for details.

NOTE The value of `apiVersion` **may** be different than the version returned by vkEnumerateInstanceVersion; either higher or lower. In such cases, the application **must** not use functionality that exceeds the version of Vulkan associated with a given object. The `pApiVersion` parameter returned by vkEnumerateInstanceVersion is the version associated with a VkInstance and its children, except for a VkPhysicalDevice and its children. `VkPhysicalDeviceProperties`::`apiVersion` is the version associated with a VkPhysicalDevice and its children.

NOTE The encoding of `driverVersion` is implementation-defined. It **may** not use the same encoding as `apiVersion`. Applications should follow information from the *vendor* on how to extract the version information from `driverVersion`.

On implementations that claim support for the Roadmap 2022 profile, the major and minor version expressed by `apiVersion` **must** be at least Vulkan 1.3.

The `vendorID` and `deviceID` fields are provided to allow applications to adapt to device

characteristics that are not adequately exposed by other Vulkan queries.

NOTE These **may** include performance profiles, hardware errata, or other characteristics.

The *vendor* identified by `vendorID` is the entity responsible for the most salient characteristics of the underlying implementation of the VkPhysicalDevice being queried.

NOTE For example, in the case of a discrete GPU implementation, this **should** be the GPU chipset vendor. In the case of a hardware accelerator integrated into a system-on-chip (SoC), this **should** be the supplier of the silicon IP used to create the accelerator.

If the vendor has a PCI vendor ID, the low 16 bits of `vendorID` **must** contain that PCI vendor ID, and the remaining bits **must** be zero. Otherwise, the value returned **must** be a valid Khronos vendor ID, obtained as described in the Vulkan Documentation and Extensions: Procedures and Conventions document in the section “Registering a Vendor ID with Khronos”. Khronos vendor IDs are allocated starting at 0x10000, to distinguish them from the PCI vendor ID namespace. Khronos vendor IDs are symbolically defined in the VkVendorId type.

The vendor is also responsible for the value returned in `deviceID`. If the implementation is driven primarily by a PCI device with a PCI device ID, the low 16 bits of `deviceID` **must** contain that PCI device ID, and the remaining bits **must** be zero. Otherwise, the choice of what values to return **may** be dictated by operating system or platform policies - but **should** uniquely identify both the device version and any major configuration options (for example, core count in the case of multicore devices).

NOTE The same device ID **should** be used for all physical implementations of that device version and configuration. For example, all uses of a specific silicon IP GPU version and configuration **should** use the same device ID, even if those uses occur in different SoCs.

Khronos vendor IDs which **may** be returned in VkPhysicalDeviceProperties::`vendorID` are:

```
// Provided by VK_VERSION_1_0
typedef enum VkVendorId {
    VK_VENDOR_ID_KHRONOS = 0x10000,
    VK_VENDOR_ID_VIV = 0x10001,
    VK_VENDOR_ID_VSI = 0x10002,
    VK_VENDOR_ID_KAZAN = 0x10003,
    VK_VENDOR_ID_CODEPLAY = 0x10004,
    VK_VENDOR_ID_MESA = 0x10005,
    VK_VENDOR_ID_POCL = 0x10006,
    VK_VENDOR_ID_MOBILEYE = 0x10007,
} VkVendorId;
```

NOTE Khronos vendor IDs may be allocated by vendors at any time. Only the latest canonical versions of this Specification, of the corresponding `vk.xml` API Registry,

> and of the corresponding vulkan_core.h header file **must** contain all reserved Khronos vendor IDs.
>
> Only Khronos vendor IDs are given symbolic names at present. PCI vendor IDs returned by the implementation can be looked up in the PCI-SIG database.

VK_MAX_PHYSICAL_DEVICE_NAME_SIZE is the length in char values of an array containing a physical device name string, as returned in VkPhysicalDeviceProperties::deviceName.

```
#define VK_MAX_PHYSICAL_DEVICE_NAME_SIZE  256U
```

The physical device types which **may** be returned in VkPhysicalDeviceProperties::deviceType are:

```
// Provided by VK_VERSION_1_0
typedef enum VkPhysicalDeviceType {
    VK_PHYSICAL_DEVICE_TYPE_OTHER = 0,
    VK_PHYSICAL_DEVICE_TYPE_INTEGRATED_GPU = 1,
    VK_PHYSICAL_DEVICE_TYPE_DISCRETE_GPU = 2,
    VK_PHYSICAL_DEVICE_TYPE_VIRTUAL_GPU = 3,
    VK_PHYSICAL_DEVICE_TYPE_CPU = 4,
} VkPhysicalDeviceType;
```

- VK_PHYSICAL_DEVICE_TYPE_OTHER - the device does not match any other available types.
- VK_PHYSICAL_DEVICE_TYPE_INTEGRATED_GPU - the device is typically one embedded in or tightly coupled with the host.
- VK_PHYSICAL_DEVICE_TYPE_DISCRETE_GPU - the device is typically a separate processor connected to the host via an interlink.
- VK_PHYSICAL_DEVICE_TYPE_VIRTUAL_GPU - the device is typically a virtual node in a virtualization environment.
- VK_PHYSICAL_DEVICE_TYPE_CPU - the device is typically running on the same processors as the host.

The physical device type is advertised for informational purposes only, and does not directly affect the operation of the system. However, the device type **may** correlate with other advertised properties or capabilities of the system, such as how many memory heaps there are.

To query general properties of physical devices once enumerated, call:

```
// Provided by VK_VERSION_1_1
void vkGetPhysicalDeviceProperties2(
    VkPhysicalDevice                            physicalDevice,
    VkPhysicalDeviceProperties2*                pProperties);
```

- physicalDevice is the handle to the physical device whose properties will be queried.
- pProperties is a pointer to a VkPhysicalDeviceProperties2 structure in which properties are

returned.

Each structure in pProperties and its pNext chain contains members corresponding to implementation-dependent properties, behaviors, or limits. vkGetPhysicalDeviceProperties2 fills in each member to specify the corresponding value for the implementation.

Valid Usage (Implicit)

- VUID-vkGetPhysicalDeviceProperties2-physicalDevice-parameter
  physicalDevice **must** be a valid VkPhysicalDevice handle
- VUID-vkGetPhysicalDeviceProperties2-pProperties-parameter
  pProperties **must** be a valid pointer to a VkPhysicalDeviceProperties2 structure

The VkPhysicalDeviceProperties2 structure is defined as:

```
// Provided by VK_VERSION_1_1
typedef struct VkPhysicalDeviceProperties2 {
    VkStructureType                 sType;
    void*                           pNext;
    VkPhysicalDeviceProperties      properties;
} VkPhysicalDeviceProperties2;
```

- sType is a VkStructureType value identifying this structure.
- pNext is NULL or a pointer to a structure extending this structure.
- properties is a VkPhysicalDeviceProperties structure describing properties of the physical device. This structure is written with the same values as if it were written by vkGetPhysicalDeviceProperties.

The pNext chain of this structure is used to extend the structure with properties defined by extensions.

Valid Usage (Implicit)

- VUID-VkPhysicalDeviceProperties2-sType-sType
  sType **must** be VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_PROPERTIES_2
- VUID-VkPhysicalDeviceProperties2-pNext-pNext
  Each pNext member of any structure (including this one) in the pNext chain **must** be either NULL or a pointer to a valid instance of VkPhysicalDeviceDepthStencilResolveProperties, VkPhysicalDeviceDescriptorIndexingProperties, VkPhysicalDeviceDriverProperties, VkPhysicalDeviceFloatControlsProperties, VkPhysicalDeviceIDProperties, VkPhysicalDeviceInlineUniformBlockProperties, VkPhysicalDeviceMaintenance3Properties, VkPhysicalDeviceMaintenance4Properties, VkPhysicalDeviceMultiviewProperties, VkPhysicalDevicePointClippingProperties, VkPhysicalDeviceProtectedMemoryProperties, VkPhysicalDeviceSamplerFilterMinmaxProperties,

VkPhysicalDeviceShaderIntegerDotProductProperties, VkPhysicalDeviceSubgroupProperties, VkPhysicalDeviceSubgroupSizeControlProperties, VkPhysicalDeviceTexelBufferAlignmentProperties, VkPhysicalDeviceTimelineSemaphoreProperties, VkPhysicalDeviceVulkan11Properties, VkPhysicalDeviceVulkan12Properties, or VkPhysicalDeviceVulkan13Properties

- VUID-VkPhysicalDeviceProperties2-sType-unique
  The sType value of each struct in the pNext chain **must** be unique

The VkPhysicalDeviceVulkan11Properties structure is defined as:

```
// Provided by VK_VERSION_1_2
typedef struct VkPhysicalDeviceVulkan11Properties {
    VkStructureType            sType;
    void*                      pNext;
    uint8_t                    deviceUUID[VK_UUID_SIZE];
    uint8_t                    driverUUID[VK_UUID_SIZE];
    uint8_t                    deviceLUID[VK_LUID_SIZE];
    uint32_t                   deviceNodeMask;
    VkBool32                   deviceLUIDValid;
    uint32_t                   subgroupSize;
    VkShaderStageFlags         subgroupSupportedStages;
    VkSubgroupFeatureFlags     subgroupSupportedOperations;
    VkBool32                   subgroupQuadOperationsInAllStages;
    VkPointClippingBehavior    pointClippingBehavior;
    uint32_t                   maxMultiviewViewCount;
    uint32_t                   maxMultiviewInstanceIndex;
    VkBool32                   protectedNoFault;
    uint32_t                   maxPerSetDescriptors;
    VkDeviceSize               maxMemoryAllocationSize;
} VkPhysicalDeviceVulkan11Properties;
```

- sType is a VkStructureType value identifying this structure.
- pNext is NULL or a pointer to a structure extending this structure.
- deviceUUID is an array of VK_UUID_SIZE uint8_t values representing a universally unique identifier for the device.
- driverUUID is an array of VK_UUID_SIZE uint8_t values representing a universally unique identifier for the driver build in use by the device.
- deviceLUID is an array of VK_LUID_SIZE uint8_t values representing a locally unique identifier for the device.
- deviceNodeMask is a uint32_t bitfield identifying the node within a linked device adapter corresponding to the device.
- deviceLUIDValid is a boolean value that will be VK_TRUE if deviceLUID contains a valid LUID and deviceNodeMask contains a valid node mask, and VK_FALSE if they do not.
- subgroupSize is the default number of invocations in each subgroup. subgroupSize is at least 1 if

any of the physical device's queues support VK_QUEUE_GRAPHICS_BIT or VK_QUEUE_COMPUTE_BIT. subgroupSize is a power-of-two.

- subgroupSupportedStages is a bitfield of VkShaderStageFlagBits describing the shader stages that group operations with subgroup scope are supported in. subgroupSupportedStages will have the VK_SHADER_STAGE_COMPUTE_BIT bit set if any of the physical device's queues support VK_QUEUE_COMPUTE_BIT.
- subgroupSupportedOperations is a bitmask of VkSubgroupFeatureFlagBits specifying the sets of group operations with subgroup scope supported on this device. subgroupSupportedOperations will have the VK_SUBGROUP_FEATURE_BASIC_BIT bit set if any of the physical device's queues support VK_QUEUE_GRAPHICS_BIT or VK_QUEUE_COMPUTE_BIT.
- subgroupQuadOperationsInAllStages is a boolean specifying whether quad group operations are available in all stages, or are restricted to fragment and compute stages.
- pointClippingBehavior is a VkPointClippingBehavior value specifying the point clipping behavior supported by the implementation.
- maxMultiviewViewCount is one greater than the maximum view index that **can** be used in a subpass.
- maxMultiviewInstanceIndex is the maximum valid value of instance index allowed to be generated by a drawing command recorded within a subpass of a multiview render pass instance.
- protectedNoFault specifies how an implementation behaves when an application attempts to write to unprotected memory in a protected queue operation, read from protected memory in an unprotected queue operation, or perform a query in a protected queue operation. If this limit is VK_TRUE, such writes will be discarded or have undefined values written, reads and queries will return undefined values. If this limit is VK_FALSE, applications **must** not perform these operations. See Protected Memory Access Rules for more information.
- maxPerSetDescriptors is a maximum number of descriptors (summed over all descriptor types) in a single descriptor set that is guaranteed to satisfy any implementation-dependent constraints on the size of a descriptor set itself. Applications **can** query whether a descriptor set that goes beyond this limit is supported using vkGetDescriptorSetLayoutSupport.
- maxMemoryAllocationSize is the maximum size of a memory allocation that **can** be created, even if there is more space available in the heap.

If the VkPhysicalDeviceVulkan11Properties structure is included in the pNext chain of the VkPhysicalDeviceProperties2 structure passed to vkGetPhysicalDeviceProperties2, it is filled in with each corresponding implementation-dependent property.

These properties correspond to Vulkan 1.1 functionality.

The members of VkPhysicalDeviceVulkan11Properties have the same values as the corresponding members of VkPhysicalDeviceIDProperties, VkPhysicalDeviceSubgroupProperties, VkPhysicalDevicePointClippingProperties, VkPhysicalDeviceMultiviewProperties, VkPhysicalDeviceProtectedMemoryProperties, and VkPhysicalDeviceMaintenance3Properties.

NOTE	The subgroupSupportedStages, subgroupSupportedOperations, and subgroupQuadOperationsInAllStages members of this structure correspond

respectively to the VkPhysicalDeviceSubgroupProperties::supportedStages, VkPhysicalDeviceSubgroupProperties::supportedOperations, and VkPhysicalDeviceSubgroupProperties::quadOperationsInAllStages members, but add the subgroup prefix to the member name.

Valid Usage (Implicit)

- VUID-VkPhysicalDeviceVulkan11Properties-sType-sType
  sType **must** be VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_VULKAN_1_1_PROPERTIES

The VkPhysicalDeviceVulkan12Properties structure is defined as:

```
// Provided by VK_VERSION_1_2
typedef struct VkPhysicalDeviceVulkan12Properties {
    VkStructureType                      sType;
    void*                                pNext;
    VkDriverId                           driverID;
    char                                 driverName[VK_MAX_DRIVER_NAME_SIZE];
    char                                 driverInfo[VK_MAX_DRIVER_INFO_SIZE];
    VkConformanceVersion                 conformanceVersion;
    VkShaderFloatControlsIndependence    denormBehaviorIndependence;
    VkShaderFloatControlsIndependence    roundingModeIndependence;
    VkBool32                             shaderSignedZeroInfNanPreserveFloat16;
    VkBool32                             shaderSignedZeroInfNanPreserveFloat32;
    VkBool32                             shaderSignedZeroInfNanPreserveFloat64;
    VkBool32                             shaderDenormPreserveFloat16;
    VkBool32                             shaderDenormPreserveFloat32;
    VkBool32                             shaderDenormPreserveFloat64;
    VkBool32                             shaderDenormFlushToZeroFloat16;
    VkBool32                             shaderDenormFlushToZeroFloat32;
    VkBool32                             shaderDenormFlushToZeroFloat64;
    VkBool32                             shaderRoundingModeRTEFloat16;
    VkBool32                             shaderRoundingModeRTEFloat32;
    VkBool32                             shaderRoundingModeRTEFloat64;
    VkBool32                             shaderRoundingModeRTZFloat16;
    VkBool32                             shaderRoundingModeRTZFloat32;
    VkBool32                             shaderRoundingModeRTZFloat64;
    uint32_t                             maxUpdateAfterBindDescriptorsInAllPools;
    VkBool32
shaderUniformBufferArrayNonUniformIndexingNative;
    VkBool32
shaderSampledImageArrayNonUniformIndexingNative;
    VkBool32
shaderStorageBufferArrayNonUniformIndexingNative;
    VkBool32
shaderStorageImageArrayNonUniformIndexingNative;
    VkBool32
shaderInputAttachmentArrayNonUniformIndexingNative;
```

```
    VkBool32                                robustBufferAccessUpdateAfterBind;
    VkBool32                                quadDivergentImplicitLod;
    uint32_t                                maxPerStageDescriptorUpdateAfterBindSamplers;
    uint32_t
maxPerStageDescriptorUpdateAfterBindUniformBuffers;
    uint32_t
maxPerStageDescriptorUpdateAfterBindStorageBuffers;
    uint32_t
maxPerStageDescriptorUpdateAfterBindSampledImages;
    uint32_t
maxPerStageDescriptorUpdateAfterBindStorageImages;
    uint32_t
maxPerStageDescriptorUpdateAfterBindInputAttachments;
    uint32_t                                maxPerStageUpdateAfterBindResources;
    uint32_t                                maxDescriptorSetUpdateAfterBindSamplers;
    uint32_t
maxDescriptorSetUpdateAfterBindUniformBuffers;
    uint32_t
maxDescriptorSetUpdateAfterBindUniformBuffersDynamic;
    uint32_t
maxDescriptorSetUpdateAfterBindStorageBuffers;
    uint32_t
maxDescriptorSetUpdateAfterBindStorageBuffersDynamic;
    uint32_t                                maxDescriptorSetUpdateAfterBindSampledImages;
    uint32_t                                maxDescriptorSetUpdateAfterBindStorageImages;
    uint32_t
maxDescriptorSetUpdateAfterBindInputAttachments;
    VkResolveModeFlags                      supportedDepthResolveModes;
    VkResolveModeFlags                      supportedStencilResolveModes;
    VkBool32                                independentResolveNone;
    VkBool32                                independentResolve;
    VkBool32                                filterMinmaxSingleComponentFormats;
    VkBool32                                filterMinmaxImageComponentMapping;
    uint64_t                                maxTimelineSemaphoreValueDifference;
    VkSampleCountFlags                      framebufferIntegerColorSampleCounts;
} VkPhysicalDeviceVulkan12Properties;
```

- `sType` is a VkStructureType value identifying this structure.
- `pNext` is `NULL` or a pointer to a structure extending this structure.
- `driverID` is a unique identifier for the driver of the physical device.
- `driverName` is an array of `VK_MAX_DRIVER_NAME_SIZE` `char` containing a null-terminated UTF-8 string which is the name of the driver.
- `driverInfo` is an array of `VK_MAX_DRIVER_INFO_SIZE` `char` containing a null-terminated UTF-8 string with additional information about the driver.
- `conformanceVersion` is the latest version of the Vulkan conformance test that the implementor has successfully tested this driver against prior to release (see VkConformanceVersion).
- `denormBehaviorIndependence` is a VkShaderFloatControlsIndependence value indicating whether,

and how, denorm behavior can be set independently for different bit widths.

- `roundingModeIndependence` is a VkShaderFloatControlsIndependence value indicating whether, and how, rounding modes can be set independently for different bit widths.
- `shaderSignedZeroInfNanPreserveFloat16` is a boolean value indicating whether sign of a zero, Nans and ±∞ **can** be preserved in 16-bit floating-point computations. It also indicates whether the `SignedZeroInfNanPreserve` execution mode **can** be used for 16-bit floating-point types.
- `shaderSignedZeroInfNanPreserveFloat32` is a boolean value indicating whether sign of a zero, Nans and ±∞ **can** be preserved in 32-bit floating-point computations. It also indicates whether the `SignedZeroInfNanPreserve` execution mode **can** be used for 32-bit floating-point types.
- `shaderSignedZeroInfNanPreserveFloat64` is a boolean value indicating whether sign of a zero, Nans and ±∞ **can** be preserved in 64-bit floating-point computations. It also indicates whether the `SignedZeroInfNanPreserve` execution mode **can** be used for 64-bit floating-point types.
- `shaderDenormPreserveFloat16` is a boolean value indicating whether denormals **can** be preserved in 16-bit floating-point computations. It also indicates whether the `DenormPreserve` execution mode **can** be used for 16-bit floating-point types.
- `shaderDenormPreserveFloat32` is a boolean value indicating whether denormals **can** be preserved in 32-bit floating-point computations. It also indicates whether the `DenormPreserve` execution mode **can** be used for 32-bit floating-point types.
- `shaderDenormPreserveFloat64` is a boolean value indicating whether denormals **can** be preserved in 64-bit floating-point computations. It also indicates whether the `DenormPreserve` execution mode **can** be used for 64-bit floating-point types.
- `shaderDenormFlushToZeroFloat16` is a boolean value indicating whether denormals **can** be flushed to zero in 16-bit floating-point computations. It also indicates whether the `DenormFlushToZero` execution mode **can** be used for 16-bit floating-point types.
- `shaderDenormFlushToZeroFloat32` is a boolean value indicating whether denormals **can** be flushed to zero in 32-bit floating-point computations. It also indicates whether the `DenormFlushToZero` execution mode **can** be used for 32-bit floating-point types.
- `shaderDenormFlushToZeroFloat64` is a boolean value indicating whether denormals **can** be flushed to zero in 64-bit floating-point computations. It also indicates whether the `DenormFlushToZero` execution mode **can** be used for 64-bit floating-point types.
- `shaderRoundingModeRTEFloat16` is a boolean value indicating whether an implementation supports the round-to-nearest-even rounding mode for 16-bit floating-point arithmetic and conversion instructions. It also indicates whether the `RoundingModeRTE` execution mode **can** be used for 16-bit floating-point types.
- `shaderRoundingModeRTEFloat32` is a boolean value indicating whether an implementation supports the round-to-nearest-even rounding mode for 32-bit floating-point arithmetic and conversion instructions. It also indicates whether the `RoundingModeRTE` execution mode **can** be used for 32-bit floating-point types.
- `shaderRoundingModeRTEFloat64` is a boolean value indicating whether an implementation supports the round-to-nearest-even rounding mode for 64-bit floating-point arithmetic and conversion instructions. It also indicates whether the `RoundingModeRTE` execution mode **can** be used for 64-bit floating-point types.

- shaderRoundingModeRTZFloat16 is a boolean value indicating whether an implementation supports the round-towards-zero rounding mode for 16-bit floating-point arithmetic and conversion instructions. It also indicates whether the RoundingModeRTZ execution mode **can** be used for 16-bit floating-point types.
- shaderRoundingModeRTZFloat32 is a boolean value indicating whether an implementation supports the round-towards-zero rounding mode for 32-bit floating-point arithmetic and conversion instructions. It also indicates whether the RoundingModeRTZ execution mode **can** be used for 32-bit floating-point types.
- shaderRoundingModeRTZFloat64 is a boolean value indicating whether an implementation supports the round-towards-zero rounding mode for 64-bit floating-point arithmetic and conversion instructions. It also indicates whether the RoundingModeRTZ execution mode **can** be used for 64-bit floating-point types.
- maxUpdateAfterBindDescriptorsInAllPools is the maximum number of descriptors (summed over all descriptor types) that **can** be created across all pools that are created with the VK_DESCRIPTOR_POOL_CREATE_UPDATE_AFTER_BIND_BIT bit set. Pool creation **may** fail when this limit is exceeded, or when the space this limit represents is unable to satisfy a pool creation due to fragmentation.
- shaderUniformBufferArrayNonUniformIndexingNative is a boolean value indicating whether uniform buffer descriptors natively support non-uniform indexing. If this is VK_FALSE, then a single dynamic instance of an instruction that non-uniformly indexes an array of uniform buffers **may** execute multiple times in order to access all the descriptors.
- shaderSampledImageArrayNonUniformIndexingNative is a boolean value indicating whether sampler and image descriptors natively support non-uniform indexing. If this is VK_FALSE, then a single dynamic instance of an instruction that non-uniformly indexes an array of samplers or images **may** execute multiple times in order to access all the descriptors.
- shaderStorageBufferArrayNonUniformIndexingNative is a boolean value indicating whether storage buffer descriptors natively support non-uniform indexing. If this is VK_FALSE, then a single dynamic instance of an instruction that non-uniformly indexes an array of storage buffers **may** execute multiple times in order to access all the descriptors.
- shaderStorageImageArrayNonUniformIndexingNative is a boolean value indicating whether storage image descriptors natively support non-uniform indexing. If this is VK_FALSE, then a single dynamic instance of an instruction that non-uniformly indexes an array of storage images **may** execute multiple times in order to access all the descriptors.
- shaderInputAttachmentArrayNonUniformIndexingNative is a boolean value indicating whether input attachment descriptors natively support non-uniform indexing. If this is VK_FALSE, then a single dynamic instance of an instruction that non-uniformly indexes an array of input attachments **may** execute multiple times in order to access all the descriptors.
- robustBufferAccessUpdateAfterBind is a boolean value indicating whether robustBufferAccess **can** be enabled on a device simultaneously with descriptorBindingUniformBufferUpdateAfterBind, descriptorBindingStorageBufferUpdateAfterBind, descriptorBindingUniformTexelBufferUpdateAfterBind, and/or descriptorBindingStorageTexelBufferUpdateAfterBind. If this is VK_FALSE, then either robustBufferAccess **must** be disabled or all of these update-after-bind features **must** be disabled.
- quadDivergentImplicitLod is a boolean value indicating whether implicit LOD calculations for

image operations have well-defined results when the image and/or sampler objects used for the instruction are not uniform within a quad. See Derivative Image Operations.

- `maxPerStageDescriptorUpdateAfterBindSamplers` is similar to `maxPerStageDescriptorSamplers` but counts descriptors from descriptor sets created with or without the `VK_DESCRIPTOR_SET_LAYOUT_CREATE_UPDATE_AFTER_BIND_POOL_BIT` bit set.
- `maxPerStageDescriptorUpdateAfterBindUniformBuffers` is similar to `maxPerStageDescriptorUniformBuffers` but counts descriptors from descriptor sets created with or without the `VK_DESCRIPTOR_SET_LAYOUT_CREATE_UPDATE_AFTER_BIND_POOL_BIT` bit set.
- `maxPerStageDescriptorUpdateAfterBindStorageBuffers` is similar to `maxPerStageDescriptorStorageBuffers` but counts descriptors from descriptor sets created with or without the `VK_DESCRIPTOR_SET_LAYOUT_CREATE_UPDATE_AFTER_BIND_POOL_BIT` bit set.
- `maxPerStageDescriptorUpdateAfterBindSampledImages` is similar to `maxPerStageDescriptorSampledImages` but counts descriptors from descriptor sets created with or without the `VK_DESCRIPTOR_SET_LAYOUT_CREATE_UPDATE_AFTER_BIND_POOL_BIT` bit set.
- `maxPerStageDescriptorUpdateAfterBindStorageImages` is similar to `maxPerStageDescriptorStorageImages` but counts descriptors from descriptor sets created with or without the `VK_DESCRIPTOR_SET_LAYOUT_CREATE_UPDATE_AFTER_BIND_POOL_BIT` bit set.
- `maxPerStageDescriptorUpdateAfterBindInputAttachments` is similar to `maxPerStageDescriptorInputAttachments` but counts descriptors from descriptor sets created with or without the `VK_DESCRIPTOR_SET_LAYOUT_CREATE_UPDATE_AFTER_BIND_POOL_BIT` bit set.
- `maxPerStageUpdateAfterBindResources` is similar to `maxPerStageResources` but counts descriptors from descriptor sets created with or without the `VK_DESCRIPTOR_SET_LAYOUT_CREATE_UPDATE_AFTER_BIND_POOL_BIT` bit set.
- `maxDescriptorSetUpdateAfterBindSamplers` is similar to `maxDescriptorSetSamplers` but counts descriptors from descriptor sets created with or without the `VK_DESCRIPTOR_SET_LAYOUT_CREATE_UPDATE_AFTER_BIND_POOL_BIT` bit set.
- `maxDescriptorSetUpdateAfterBindUniformBuffers` is similar to `maxDescriptorSetUniformBuffers` but counts descriptors from descriptor sets created with or without the `VK_DESCRIPTOR_SET_LAYOUT_CREATE_UPDATE_AFTER_BIND_POOL_BIT` bit set.
- `maxDescriptorSetUpdateAfterBindUniformBuffersDynamic` is similar to `maxDescriptorSetUniformBuffersDynamic` but counts descriptors from descriptor sets created with or without the `VK_DESCRIPTOR_SET_LAYOUT_CREATE_UPDATE_AFTER_BIND_POOL_BIT` bit set. While an application **can** allocate dynamic uniform buffer descriptors from a pool created with the `VK_DESCRIPTOR_SET_LAYOUT_CREATE_UPDATE_AFTER_BIND_POOL_BIT`, bindings for these descriptors **must** not be present in any descriptor set layout that includes bindings created with `VK_DESCRIPTOR_BINDING_UPDATE_AFTER_BIND_BIT`.
- `maxDescriptorSetUpdateAfterBindStorageBuffers` is similar to `maxDescriptorSetStorageBuffers` but counts descriptors from descriptor sets created with or without the `VK_DESCRIPTOR_SET_LAYOUT_CREATE_UPDATE_AFTER_BIND_POOL_BIT` bit set.
- `maxDescriptorSetUpdateAfterBindStorageBuffersDynamic` is similar to `maxDescriptorSetStorageBuffersDynamic` but counts descriptors from descriptor sets created with or without the `VK_DESCRIPTOR_SET_LAYOUT_CREATE_UPDATE_AFTER_BIND_POOL_BIT` bit set. While an application **can** allocate dynamic storage buffer descriptors from a pool created with the

VK_DESCRIPTOR_SET_LAYOUT_CREATE_UPDATE_AFTER_BIND_POOL_BIT, bindings for these descriptors **must** not be present in any descriptor set layout that includes bindings created with VK_DESCRIPTOR_BINDING_UPDATE_AFTER_BIND_BIT.

- maxDescriptorSetUpdateAfterBindSampledImages is similar to maxDescriptorSetSampledImages but counts descriptors from descriptor sets created with or without the VK_DESCRIPTOR_SET_LAYOUT_CREATE_UPDATE_AFTER_BIND_POOL_BIT bit set.
- maxDescriptorSetUpdateAfterBindStorageImages is similar to maxDescriptorSetStorageImages but counts descriptors from descriptor sets created with or without the VK_DESCRIPTOR_SET_LAYOUT_CREATE_UPDATE_AFTER_BIND_POOL_BIT bit set.
- maxDescriptorSetUpdateAfterBindInputAttachments is similar to maxDescriptorSetInputAttachments but counts descriptors from descriptor sets created with or without the VK_DESCRIPTOR_SET_LAYOUT_CREATE_UPDATE_AFTER_BIND_POOL_BIT bit set.
- supportedDepthResolveModes is a bitmask of VkResolveModeFlagBits indicating the set of supported depth resolve modes. VK_RESOLVE_MODE_SAMPLE_ZERO_BIT **must** be included in the set but implementations **may** support additional modes.
- supportedStencilResolveModes is a bitmask of VkResolveModeFlagBits indicating the set of supported stencil resolve modes. VK_RESOLVE_MODE_SAMPLE_ZERO_BIT **must** be included in the set but implementations **may** support additional modes. VK_RESOLVE_MODE_AVERAGE_BIT **must** not be included in the set.
- independentResolveNone is VK_TRUE if the implementation supports setting the depth and stencil resolve modes to different values when one of those modes is VK_RESOLVE_MODE_NONE. Otherwise the implementation only supports setting both modes to the same value.
- independentResolve is VK_TRUE if the implementation supports all combinations of the supported depth and stencil resolve modes, including setting either depth or stencil resolve mode to VK_RESOLVE_MODE_NONE. An implementation that supports independentResolve **must** also support independentResolveNone.
- filterMinmaxSingleComponentFormats is a boolean value indicating whether a minimum set of required formats support min/max filtering.
- filterMinmaxImageComponentMapping is a boolean value indicating whether the implementation supports non-identity component mapping of the image when doing min/max filtering.
- maxTimelineSemaphoreValueDifference indicates the maximum difference allowed by the implementation between the current value of a timeline semaphore and any pending signal or wait operations.
- framebufferIntegerColorSampleCounts is a bitmask of VkSampleCountFlagBits indicating the color sample counts that are supported for all framebuffer color attachments with integer formats.

If the VkPhysicalDeviceVulkan12Properties structure is included in the pNext chain of the VkPhysicalDeviceProperties2 structure passed to vkGetPhysicalDeviceProperties2, it is filled in with each corresponding implementation-dependent property.

These properties correspond to Vulkan 1.2 functionality.

The members of VkPhysicalDeviceVulkan12Properties **must** have the same values as the corresponding members of VkPhysicalDeviceDriverProperties,

VkPhysicalDeviceFloatControlsProperties, VkPhysicalDeviceDescriptorIndexingProperties, VkPhysicalDeviceDepthStencilResolveProperties, VkPhysicalDeviceSamplerFilterMinmaxProperties, and VkPhysicalDeviceTimelineSemaphoreProperties.

Valid Usage (Implicit)

- VUID-VkPhysicalDeviceVulkan12Properties-sType-sType
  `sType` **must** be `VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_VULKAN_1_2_PROPERTIES`

The `VkPhysicalDeviceVulkan13Properties` structure is defined as:

```
// Provided by VK_VERSION_1_3
typedef struct VkPhysicalDeviceVulkan13Properties {
    VkStructureType       sType;
    void*                 pNext;
    uint32_t              minSubgroupSize;
    uint32_t              maxSubgroupSize;
    uint32_t              maxComputeWorkgroupSubgroups;
    VkShaderStageFlags    requiredSubgroupSizeStages;
    uint32_t              maxInlineUniformBlockSize;
    uint32_t              maxPerStageDescriptorInlineUniformBlocks;
    uint32_t              maxPerStageDescriptorUpdateAfterBindInlineUniformBlocks;
    uint32_t              maxDescriptorSetInlineUniformBlocks;
    uint32_t              maxDescriptorSetUpdateAfterBindInlineUniformBlocks;
    uint32_t              maxInlineUniformTotalSize;
    VkBool32              integerDotProduct8BitUnsignedAccelerated;
    VkBool32              integerDotProduct8BitSignedAccelerated;
    VkBool32              integerDotProduct8BitMixedSignednessAccelerated;
    VkBool32              integerDotProduct4x8BitPackedUnsignedAccelerated;
    VkBool32              integerDotProduct4x8BitPackedSignedAccelerated;
    VkBool32              integerDotProduct4x8BitPackedMixedSignednessAccelerated;
    VkBool32              integerDotProduct16BitUnsignedAccelerated;
    VkBool32              integerDotProduct16BitSignedAccelerated;
    VkBool32              integerDotProduct16BitMixedSignednessAccelerated;
    VkBool32              integerDotProduct32BitUnsignedAccelerated;
    VkBool32              integerDotProduct32BitSignedAccelerated;
    VkBool32              integerDotProduct32BitMixedSignednessAccelerated;
    VkBool32              integerDotProduct64BitUnsignedAccelerated;
    VkBool32              integerDotProduct64BitSignedAccelerated;
    VkBool32              integerDotProduct64BitMixedSignednessAccelerated;
    VkBool32
integerDotProductAccumulatingSaturating8BitUnsignedAccelerated;
    VkBool32
integerDotProductAccumulatingSaturating8BitSignedAccelerated;
    VkBool32
integerDotProductAccumulatingSaturating8BitMixedSignednessAccelerated;
    VkBool32
integerDotProductAccumulatingSaturating4x8BitPackedUnsignedAccelerated;
```

```
    VkBool32
integerDotProductAccumulatingSaturating4x8BitPackedSignedAccelerated;
    VkBool32
integerDotProductAccumulatingSaturating4x8BitPackedMixedSignednessAccelerated;
    VkBool32
integerDotProductAccumulatingSaturating16BitUnsignedAccelerated;
    VkBool32
integerDotProductAccumulatingSaturating16BitSignedAccelerated;
    VkBool32
integerDotProductAccumulatingSaturating16BitMixedSignednessAccelerated;
    VkBool32
integerDotProductAccumulatingSaturating32BitUnsignedAccelerated;
    VkBool32
integerDotProductAccumulatingSaturating32BitSignedAccelerated;
    VkBool32
integerDotProductAccumulatingSaturating32BitMixedSignednessAccelerated;
    VkBool32
integerDotProductAccumulatingSaturating64BitUnsignedAccelerated;
    VkBool32
integerDotProductAccumulatingSaturating64BitSignedAccelerated;
    VkBool32
integerDotProductAccumulatingSaturating64BitMixedSignednessAccelerated;
    VkDeviceSize          storageTexelBufferOffsetAlignmentBytes;
    VkBool32              storageTexelBufferOffsetSingleTexelAlignment;
    VkDeviceSize          uniformTexelBufferOffsetAlignmentBytes;
    VkBool32              uniformTexelBufferOffsetSingleTexelAlignment;
    VkDeviceSize          maxBufferSize;
} VkPhysicalDeviceVulkan13Properties;
```

- `sType` is a VkStructureType value identifying this structure.
- `pNext` is `NULL` or a pointer to a structure extending this structure.
- `minSubgroupSize` is the minimum subgroup size supported by this device. `minSubgroupSize` is at least one if any of the physical device's queues support `VK_QUEUE_GRAPHICS_BIT` or `VK_QUEUE_COMPUTE_BIT`. `minSubgroupSize` is a power-of-two. `minSubgroupSize` is less than or equal to `maxSubgroupSize`. `minSubgroupSize` is less than or equal to `subgroupSize`.
- `maxSubgroupSize` is the maximum subgroup size supported by this device. `maxSubgroupSize` is at least one if any of the physical device's queues support `VK_QUEUE_GRAPHICS_BIT` or `VK_QUEUE_COMPUTE_BIT`. `maxSubgroupSize` is a power-of-two. `maxSubgroupSize` is greater than or equal to `minSubgroupSize`. `maxSubgroupSize` is greater than or equal to `subgroupSize`.
- `maxComputeWorkgroupSubgroups` is the maximum number of subgroups supported by the implementation within a workgroup.
- `requiredSubgroupSizeStages` is a bitfield of what shader stages support having a required subgroup size specified.
- `maxInlineUniformBlockSize` is the maximum size in bytes of an inline uniform block binding.
- `maxPerStageDescriptorInlineUniformBlocks` is the maximum number of inline uniform block bindings that **can** be accessible to a single shader stage in a pipeline layout. Descriptor bindings

with a descriptor type of VK_DESCRIPTOR_TYPE_INLINE_UNIFORM_BLOCK count against this limit. Only descriptor bindings in descriptor set layouts created without the VK_DESCRIPTOR_SET_LAYOUT_CREATE_UPDATE_AFTER_BIND_POOL_BIT bit set count against this limit.

- maxPerStageDescriptorUpdateAfterBindInlineUniformBlocks is similar to maxPerStageDescriptorInlineUniformBlocks but counts descriptor bindings from descriptor sets created with or without the VK_DESCRIPTOR_SET_LAYOUT_CREATE_UPDATE_AFTER_BIND_POOL_BIT bit set.
- maxDescriptorSetInlineUniformBlocks is the maximum number of inline uniform block bindings that **can** be included in descriptor bindings in a pipeline layout across all pipeline shader stages and descriptor set numbers. Descriptor bindings with a descriptor type of VK_DESCRIPTOR_TYPE_INLINE_UNIFORM_BLOCK count against this limit. Only descriptor bindings in descriptor set layouts created without the VK_DESCRIPTOR_SET_LAYOUT_CREATE_UPDATE_AFTER_BIND_POOL_BIT bit set count against this limit.
- maxDescriptorSetUpdateAfterBindInlineUniformBlocks is similar to maxDescriptorSetInlineUniformBlocks but counts descriptor bindings from descriptor sets created with or without the VK_DESCRIPTOR_SET_LAYOUT_CREATE_UPDATE_AFTER_BIND_POOL_BIT bit set.
- maxInlineUniformTotalSize is the maximum total size in bytes of all inline uniform block bindings, across all pipeline shader stages and descriptor set numbers, that **can** be included in a pipeline layout. Descriptor bindings with a descriptor type of VK_DESCRIPTOR_TYPE_INLINE_UNIFORM_BLOCK count against this limit.
- integerDotProduct8BitUnsignedAccelerated is a boolean that will be VK_TRUE if the support for 8-bit unsigned dot product operations using the OpUDotKHR SPIR-V instruction is accelerated as defined below.
- integerDotProduct8BitSignedAccelerated is a boolean that will be VK_TRUE if the support for 8-bit signed dot product operations using the OpSDotKHR SPIR-V instruction is accelerated as defined below.
- integerDotProduct8BitMixedSignednessAccelerated is a boolean that will be VK_TRUE if the support for 8-bit mixed signedness dot product operations using the OpSUDotKHR SPIR-V instruction is accelerated as defined below.
- integerDotProduct4x8BitPackedUnsignedAccelerated is a boolean that will be VK_TRUE if the support for 8-bit unsigned dot product operations from operands packed into 32-bit integers using the OpUDotKHR SPIR-V instruction is accelerated as defined below.
- integerDotProduct4x8BitPackedSignedAccelerated is a boolean that will be VK_TRUE if the support for 8-bit signed dot product operations from operands packed into 32-bit integers using the OpSDotKHR SPIR-V instruction is accelerated as defined below.
- integerDotProduct4x8BitPackedMixedSignednessAccelerated is a boolean that will be VK_TRUE if the support for 8-bit mixed signedness dot product operations from operands packed into 32-bit integers using the OpSUDotKHR SPIR-V instruction is accelerated as defined below.
- integerDotProduct16BitUnsignedAccelerated is a boolean that will be VK_TRUE if the support for 16-bit unsigned dot product operations using the OpUDotKHR SPIR-V instruction is accelerated as defined below.
- integerDotProduct16BitSignedAccelerated is a boolean that will be VK_TRUE if the support for 16-bit signed dot product operations using the OpSDotKHR SPIR-V instruction is accelerated as defined below.

- integerDotProduct16BitMixedSignednessAccelerated is a boolean that will be VK_TRUE if the support for 16-bit mixed signedness dot product operations using the OpSUDotKHR SPIR-V instruction is accelerated as defined below.
- integerDotProduct32BitUnsignedAccelerated is a boolean that will be VK_TRUE if the support for 32-bit unsigned dot product operations using the OpUDotKHR SPIR-V instruction is accelerated as defined below.
- integerDotProduct32BitSignedAccelerated is a boolean that will be VK_TRUE if the support for 32-bit signed dot product operations using the OpSDotKHR SPIR-V instruction is accelerated as defined below.
- integerDotProduct32BitMixedSignednessAccelerated is a boolean that will be VK_TRUE if the support for 32-bit mixed signedness dot product operations using the OpSUDotKHR SPIR-V instruction is accelerated as defined below.
- integerDotProduct64BitUnsignedAccelerated is a boolean that will be VK_TRUE if the support for 64-bit unsigned dot product operations using the OpUDotKHR SPIR-V instruction is accelerated as defined below.
- integerDotProduct64BitSignedAccelerated is a boolean that will be VK_TRUE if the support for 64-bit signed dot product operations using the OpSDotKHR SPIR-V instruction is accelerated as defined below.
- integerDotProduct64BitMixedSignednessAccelerated is a boolean that will be VK_TRUE if the support for 64-bit mixed signedness dot product operations using the OpSUDotKHR SPIR-V instruction is accelerated as defined below.
- integerDotProductAccumulatingSaturating8BitUnsignedAccelerated is a boolean that will be VK_TRUE if the support for 8-bit unsigned accumulating saturating dot product operations using the OpUDotAccSatKHR SPIR-V instruction is accelerated as defined below.
- integerDotProductAccumulatingSaturating8BitSignedAccelerated is a boolean that will be VK_TRUE if the support for 8-bit signed accumulating saturating dot product operations using the OpSDotAccSatKHR SPIR-V instruction is accelerated as defined below.
- integerDotProductAccumulatingSaturating8BitMixedSignednessAccelerated is a boolean that will be VK_TRUE if the support for 8-bit mixed signedness accumulating saturating dot product operations using the OpSUDotAccSatKHR SPIR-V instruction is accelerated as defined below.
- integerDotProductAccumulatingSaturating4x8BitPackedUnsignedAccelerated is a boolean that will be VK_TRUE if the support for 8-bit unsigned accumulating saturating dot product operations from operands packed into 32-bit integers using the OpUDotAccSatKHR SPIR-V instruction is accelerated as defined below.
- integerDotProductAccumulatingSaturating4x8BitPackedSignedAccelerated is a boolean that will be VK_TRUE if the support for 8-bit signed accumulating saturating dot product operations from operands packed into 32-bit integers using the OpSDotAccSatKHR SPIR-V instruction is accelerated as defined below.
- integerDotProductAccumulatingSaturating4x8BitPackedMixedSignednessAccelerated is a boolean that will be VK_TRUE if the support for 8-bit mixed signedness accumulating saturating dot product operations from operands packed into 32-bit integers using the OpSUDotAccSatKHR SPIR-V instruction is accelerated as defined below.
- integerDotProductAccumulatingSaturating16BitUnsignedAccelerated is a boolean that will be

VK_TRUE if the support for 16-bit unsigned accumulating saturating dot product operations using the OpUDotAccSatKHR SPIR-V instruction is accelerated as defined below.

- integerDotProductAccumulatingSaturating16BitSignedAccelerated is a boolean that will be VK_TRUE if the support for 16-bit signed accumulating saturating dot product operations using the OpSDotAccSatKHR SPIR-V instruction is accelerated as defined below.
- integerDotProductAccumulatingSaturating16BitMixedSignednessAccelerated is a boolean that will be VK_TRUE if the support for 16-bit mixed signedness accumulating saturating dot product operations using the OpSUDotAccSatKHR SPIR-V instruction is accelerated as defined below.
- integerDotProductAccumulatingSaturating32BitUnsignedAccelerated is a boolean that will be VK_TRUE if the support for 32-bit unsigned accumulating saturating dot product operations using the OpUDotAccSatKHR SPIR-V instruction is accelerated as defined below.
- integerDotProductAccumulatingSaturating32BitSignedAccelerated is a boolean that will be VK_TRUE if the support for 32-bit signed accumulating saturating dot product operations using the OpSDotAccSatKHR SPIR-V instruction is accelerated as defined below.
- integerDotProductAccumulatingSaturating32BitMixedSignednessAccelerated is a boolean that will be VK_TRUE if the support for 32-bit mixed signedness accumulating saturating dot product operations using the OpSUDotAccSatKHR SPIR-V instruction is accelerated as defined below.
- integerDotProductAccumulatingSaturating64BitUnsignedAccelerated is a boolean that will be VK_TRUE if the support for 64-bit unsigned accumulating saturating dot product operations using the OpUDotAccSatKHR SPIR-V instruction is accelerated as defined below.
- integerDotProductAccumulatingSaturating64BitSignedAccelerated is a boolean that will be VK_TRUE if the support for 64-bit signed accumulating saturating dot product operations using the OpSDotAccSatKHR SPIR-V instruction is accelerated as defined below.
- integerDotProductAccumulatingSaturating64BitMixedSignednessAccelerated is a boolean that will be VK_TRUE if the support for 64-bit mixed signedness accumulating saturating dot product operations using the OpSUDotAccSatKHR SPIR-V instruction is accelerated as defined below.
- storageTexelBufferOffsetAlignmentBytes is a byte alignment that is sufficient for a storage texel buffer of any format. The value **must** be a power of two.
- storageTexelBufferOffsetSingleTexelAlignment indicates whether single texel alignment is sufficient for a storage texel buffer of any format.
- uniformTexelBufferOffsetAlignmentBytes is a byte alignment that is sufficient for a uniform texel buffer of any format. The value **must** be a power of two.
- uniformTexelBufferOffsetSingleTexelAlignment indicates whether single texel alignment is sufficient for a uniform texel buffer of any format.
- maxBufferSize is the maximum size VkBuffer that **can** be created.

If the VkPhysicalDeviceVulkan13Properties structure is included in the pNext chain of the VkPhysicalDeviceProperties2 structure passed to vkGetPhysicalDeviceProperties2, it is filled in with each corresponding implementation-dependent property.

These properties correspond to Vulkan 1.3 functionality.

The members of VkPhysicalDeviceVulkan13Properties **must** have the same values as the

corresponding members of VkPhysicalDeviceInlineUniformBlockProperties and VkPhysicalDeviceSubgroupSizeControlProperties.

Valid Usage (Implicit)

- VUID-VkPhysicalDeviceVulkan13Properties-sType-sType
  `sType` **must** be `VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_VULKAN_1_3_PROPERTIES`

The `VkPhysicalDeviceIDProperties` structure is defined as:

```
// Provided by VK_VERSION_1_1
typedef struct VkPhysicalDeviceIDProperties {
    VkStructureType    sType;
    void*              pNext;
    uint8_t            deviceUUID[VK_UUID_SIZE];
    uint8_t            driverUUID[VK_UUID_SIZE];
    uint8_t            deviceLUID[VK_LUID_SIZE];
    uint32_t           deviceNodeMask;
    VkBool32           deviceLUIDValid;
} VkPhysicalDeviceIDProperties;
```

- `sType` is a VkStructureType value identifying this structure.
- `pNext` is `NULL` or a pointer to a structure extending this structure.
- `deviceUUID` is an array of `VK_UUID_SIZE` `uint8_t` values representing a universally unique identifier for the device.
- `driverUUID` is an array of `VK_UUID_SIZE` `uint8_t` values representing a universally unique identifier for the driver build in use by the device.
- `deviceLUID` is an array of `VK_LUID_SIZE` `uint8_t` values representing a locally unique identifier for the device.
- `deviceNodeMask` is a `uint32_t` bitfield identifying the node within a linked device adapter corresponding to the device.
- `deviceLUIDValid` is a boolean value that will be `VK_TRUE` if `deviceLUID` contains a valid LUID and `deviceNodeMask` contains a valid node mask, and `VK_FALSE` if they do not.

If the `VkPhysicalDeviceIDProperties` structure is included in the `pNext` chain of the VkPhysicalDeviceProperties2 structure passed to vkGetPhysicalDeviceProperties2, it is filled in with each corresponding implementation-dependent property.

`deviceUUID` **must** be immutable for a given device across instances, processes, driver APIs, driver versions, and system reboots.

Applications **can** compare the `driverUUID` value across instance and process boundaries, and **can** make similar queries in external APIs to determine whether they are capable of sharing memory objects and resources using them with the device.

deviceUUID and/or driverUUID **must** be used to determine whether a particular external object can be shared between driver components, where such a restriction exists as defined in the compatibility table for the particular object type:

- External memory handle types compatibility
- External semaphore handle types compatibility
- External fence handle types compatibility

If deviceLUIDValid is VK_FALSE, the values of deviceLUID and deviceNodeMask are undefined. If deviceLUIDValid is VK_TRUE and Vulkan is running on the Windows operating system, the contents of deviceLUID **can** be cast to an LUID object and **must** be equal to the locally unique identifier of a IDXGIAdapter1 object that corresponds to physicalDevice. If deviceLUIDValid is VK_TRUE, deviceNodeMask **must** contain exactly one bit. If Vulkan is running on an operating system that supports the Direct3D 12 API and physicalDevice corresponds to an individual device in a linked device adapter, deviceNodeMask identifies the Direct3D 12 node corresponding to physicalDevice. Otherwise, deviceNodeMask **must** be 1.

Although they have identical descriptions, VkPhysicalDeviceIDProperties::deviceUUID may differ from VkPhysicalDeviceProperties2::pipelineCacheUUID. The former is intended to identify and correlate devices across API and driver boundaries, while the latter is used to identify a compatible device and driver combination to use when serializing and de-serializing pipeline state.

Implementations **should** return deviceUUID values which are likely to be unique even in the presence of multiple Vulkan implementations (such as a GPU driver and a software renderer; two drivers for different GPUs; or the same Vulkan driver running on two logically different devices).

NOTE

Khronos' conformance testing is unable to guarantee that deviceUUID values are actually unique, so implementors **should** make their own best efforts to ensure this. In particular, hard-coded deviceUUID values, especially all-0 bits, **should** never be used.

A combination of values unique to the vendor, the driver, and the hardware environment can be used to provide a deviceUUID which is unique to a high degree of certainty. Some possible inputs to such a computation are:

- Information reported by vkGetPhysicalDeviceProperties
- PCI device ID (if defined)
- PCI bus ID, or similar system configuration information.
- Driver binary checksums.

NOTE

While VkPhysicalDeviceIDProperties::deviceUUID is specified to remain consistent across driver versions and system reboots, it is not intended to be usable as a serializable persistent identifier for a device. It may change when a device is physically added to, removed from, or moved to a different connector in a system while that system is powered down. Further, there is no reasonable way to verify

> with conformance testing that a given device retains the same UUID in a given system across all driver versions supported in that system. While implementations should make every effort to report consistent device UUIDs across driver versions, applications should avoid relying on the persistence of this value for uses other than identifying compatible devices for external object sharing purposes.

Valid Usage (Implicit)

- VUID-VkPhysicalDeviceIDProperties-sType-sType
  `sType` **must** be `VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_ID_PROPERTIES`

`VK_UUID_SIZE` is the length in `uint8_t` values of an array containing a universally unique device or driver build identifier, as returned in VkPhysicalDeviceIDProperties::`deviceUUID` and VkPhysicalDeviceIDProperties::`driverUUID`.

```
#define VK_UUID_SIZE                      16U
```

`VK_LUID_SIZE` is the length in `uint8_t` values of an array containing a locally unique device identifier, as returned in VkPhysicalDeviceIDProperties::`deviceLUID`.

```
#define VK_LUID_SIZE                      8U
```

The `VkPhysicalDeviceDriverProperties` structure is defined as:

```
// Provided by VK_VERSION_1_2
typedef struct VkPhysicalDeviceDriverProperties {
    VkStructureType         sType;
    void*                   pNext;
    VkDriverId              driverID;
    char                    driverName[VK_MAX_DRIVER_NAME_SIZE];
    char                    driverInfo[VK_MAX_DRIVER_INFO_SIZE];
    VkConformanceVersion    conformanceVersion;
} VkPhysicalDeviceDriverProperties;
```

- `sType` is a VkStructureType value identifying this structure.
- `pNext` is `NULL` or a pointer to a structure extending this structure.
- `driverID` is a unique identifier for the driver of the physical device.
- `driverName` is an array of `VK_MAX_DRIVER_NAME_SIZE` `char` containing a null-terminated UTF-8 string which is the name of the driver.
- `driverInfo` is an array of `VK_MAX_DRIVER_INFO_SIZE` `char` containing a null-terminated UTF-8 string with additional information about the driver.
- `conformanceVersion` is the latest version of the Vulkan conformance test that the implementor

has successfully tested this driver against prior to release (see VkConformanceVersion).

If the VkPhysicalDeviceDriverProperties structure is included in the pNext chain of the VkPhysicalDeviceProperties2 structure passed to vkGetPhysicalDeviceProperties2, it is filled in with each corresponding implementation-dependent property.

These are properties of the driver corresponding to a physical device.

driverID **must** be immutable for a given driver across instances, processes, driver versions, and system reboots.

Valid Usage (Implicit)

- VUID-VkPhysicalDeviceDriverProperties-sType-sType
  sType **must** be VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_DRIVER_PROPERTIES

Khronos driver IDs which **may** be returned in VkPhysicalDeviceDriverProperties::driverID are:

```
// Provided by VK_VERSION_1_2
typedef enum VkDriverId {
    VK_DRIVER_ID_AMD_PROPRIETARY = 1,
    VK_DRIVER_ID_AMD_OPEN_SOURCE = 2,
    VK_DRIVER_ID_MESA_RADV = 3,
    VK_DRIVER_ID_NVIDIA_PROPRIETARY = 4,
    VK_DRIVER_ID_INTEL_PROPRIETARY_WINDOWS = 5,
    VK_DRIVER_ID_INTEL_OPEN_SOURCE_MESA = 6,
    VK_DRIVER_ID_IMAGINATION_PROPRIETARY = 7,
    VK_DRIVER_ID_QUALCOMM_PROPRIETARY = 8,
    VK_DRIVER_ID_ARM_PROPRIETARY = 9,
    VK_DRIVER_ID_GOOGLE_SWIFTSHADER = 10,
    VK_DRIVER_ID_GGP_PROPRIETARY = 11,
    VK_DRIVER_ID_BROADCOM_PROPRIETARY = 12,
    VK_DRIVER_ID_MESA_LLVMPIPE = 13,
    VK_DRIVER_ID_MOLTENVK = 14,
    VK_DRIVER_ID_COREAVI_PROPRIETARY = 15,
    VK_DRIVER_ID_JUICE_PROPRIETARY = 16,
    VK_DRIVER_ID_VERISILICON_PROPRIETARY = 17,
    VK_DRIVER_ID_MESA_TURNIP = 18,
    VK_DRIVER_ID_MESA_V3DV = 19,
    VK_DRIVER_ID_MESA_PANVK = 20,
    VK_DRIVER_ID_SAMSUNG_PROPRIETARY = 21,
    VK_DRIVER_ID_MESA_VENUS = 22,
    VK_DRIVER_ID_MESA_DOZEN = 23,
    VK_DRIVER_ID_MESA_NVK = 24,
    VK_DRIVER_ID_IMAGINATION_OPEN_SOURCE_MESA = 25,
    VK_DRIVER_ID_MESA_HONEYKRISP = 26,
    VK_DRIVER_ID_RESERVED_27 = 27,
} VkDriverId;
```

NOTE

Khronos driver IDs may be allocated by vendors at any time. There may be multiple driver IDs for the same vendor, representing different drivers (for e.g. different platforms, proprietary or open source, etc.). Only the latest canonical versions of this Specification, of the corresponding `vk.xml` API Registry, and of the corresponding `vulkan_core.h` header file **must** contain all reserved Khronos driver IDs.

Only driver IDs registered with Khronos are given symbolic names. There **may** be unregistered driver IDs returned.

`VK_MAX_DRIVER_NAME_SIZE` is the length in `char` values of an array containing a driver name string, as returned in VkPhysicalDeviceDriverProperties::`driverName`.

```
#define VK_MAX_DRIVER_NAME_SIZE           256U
```

`VK_MAX_DRIVER_INFO_SIZE` is the length in `char` values of an array containing a driver information string, as returned in VkPhysicalDeviceDriverProperties::`driverInfo`.

```
#define VK_MAX_DRIVER_INFO_SIZE           256U
```

The conformance test suite version an implementation is compliant with is described with the `VkConformanceVersion` structure:

```
// Provided by VK_VERSION_1_2
typedef struct VkConformanceVersion {
    uint8_t    major;
    uint8_t    minor;
    uint8_t    subminor;
    uint8_t    patch;
} VkConformanceVersion;
```

- `major` is the major version number of the conformance test suite.
- `minor` is the minor version number of the conformance test suite.
- `subminor` is the subminor version number of the conformance test suite.
- `patch` is the patch version number of the conformance test suite.

The `VkPhysicalDeviceShaderIntegerDotProductProperties` structure is defined as:

```
// Provided by VK_VERSION_1_3
typedef struct VkPhysicalDeviceShaderIntegerDotProductProperties {
    VkStructureType    sType;
    void*              pNext;
    VkBool32           integerDotProduct8BitUnsignedAccelerated;
    VkBool32           integerDotProduct8BitSignedAccelerated;
    VkBool32           integerDotProduct8BitMixedSignednessAccelerated;
    VkBool32           integerDotProduct4x8BitPackedUnsignedAccelerated;
    VkBool32           integerDotProduct4x8BitPackedSignedAccelerated;
    VkBool32           integerDotProduct4x8BitPackedMixedSignednessAccelerated;
    VkBool32           integerDotProduct16BitUnsignedAccelerated;
    VkBool32           integerDotProduct16BitSignedAccelerated;
    VkBool32           integerDotProduct16BitMixedSignednessAccelerated;
    VkBool32           integerDotProduct32BitUnsignedAccelerated;
    VkBool32           integerDotProduct32BitSignedAccelerated;
    VkBool32           integerDotProduct32BitMixedSignednessAccelerated;
    VkBool32           integerDotProduct64BitUnsignedAccelerated;
    VkBool32           integerDotProduct64BitSignedAccelerated;
    VkBool32           integerDotProduct64BitMixedSignednessAccelerated;
    VkBool32           integerDotProductAccumulatingSaturating8BitUnsignedAccelerated;
    VkBool32           integerDotProductAccumulatingSaturating8BitSignedAccelerated;
    VkBool32
integerDotProductAccumulatingSaturating8BitMixedSignednessAccelerated;
    VkBool32
integerDotProductAccumulatingSaturating4x8BitPackedUnsignedAccelerated;
    VkBool32
integerDotProductAccumulatingSaturating4x8BitPackedSignedAccelerated;
    VkBool32
integerDotProductAccumulatingSaturating4x8BitPackedMixedSignednessAccelerated;
    VkBool32
integerDotProductAccumulatingSaturating16BitUnsignedAccelerated;
    VkBool32           integerDotProductAccumulatingSaturating16BitSignedAccelerated;
    VkBool32
integerDotProductAccumulatingSaturating16BitMixedSignednessAccelerated;
    VkBool32
integerDotProductAccumulatingSaturating32BitUnsignedAccelerated;
    VkBool32           integerDotProductAccumulatingSaturating32BitSignedAccelerated;
    VkBool32
integerDotProductAccumulatingSaturating32BitMixedSignednessAccelerated;
    VkBool32
integerDotProductAccumulatingSaturating64BitUnsignedAccelerated;
    VkBool32           integerDotProductAccumulatingSaturating64BitSignedAccelerated;
    VkBool32
integerDotProductAccumulatingSaturating64BitMixedSignednessAccelerated;
} VkPhysicalDeviceShaderIntegerDotProductProperties;
```

- `sType` is a VkStructureType value identifying this structure.
- `pNext` is `NULL` or a pointer to a structure extending this structure.

- integerDotProduct8BitUnsignedAccelerated is a boolean that will be VK_TRUE if the support for 8-bit unsigned dot product operations using the OpUDotKHR SPIR-V instruction is accelerated as defined below.
- integerDotProduct8BitSignedAccelerated is a boolean that will be VK_TRUE if the support for 8-bit signed dot product operations using the OpSDotKHR SPIR-V instruction is accelerated as defined below.
- integerDotProduct8BitMixedSignednessAccelerated is a boolean that will be VK_TRUE if the support for 8-bit mixed signedness dot product operations using the OpSUDotKHR SPIR-V instruction is accelerated as defined below.
- integerDotProduct4x8BitPackedUnsignedAccelerated is a boolean that will be VK_TRUE if the support for 8-bit unsigned dot product operations from operands packed into 32-bit integers using the OpUDotKHR SPIR-V instruction is accelerated as defined below.
- integerDotProduct4x8BitPackedSignedAccelerated is a boolean that will be VK_TRUE if the support for 8-bit signed dot product operations from operands packed into 32-bit integers using the OpSDotKHR SPIR-V instruction is accelerated as defined below.
- integerDotProduct4x8BitPackedMixedSignednessAccelerated is a boolean that will be VK_TRUE if the support for 8-bit mixed signedness dot product operations from operands packed into 32-bit integers using the OpSUDotKHR SPIR-V instruction is accelerated as defined below.
- integerDotProduct16BitUnsignedAccelerated is a boolean that will be VK_TRUE if the support for 16-bit unsigned dot product operations using the OpUDotKHR SPIR-V instruction is accelerated as defined below.
- integerDotProduct16BitSignedAccelerated is a boolean that will be VK_TRUE if the support for 16-bit signed dot product operations using the OpSDotKHR SPIR-V instruction is accelerated as defined below.
- integerDotProduct16BitMixedSignednessAccelerated is a boolean that will be VK_TRUE if the support for 16-bit mixed signedness dot product operations using the OpSUDotKHR SPIR-V instruction is accelerated as defined below.
- integerDotProduct32BitUnsignedAccelerated is a boolean that will be VK_TRUE if the support for 32-bit unsigned dot product operations using the OpUDotKHR SPIR-V instruction is accelerated as defined below.
- integerDotProduct32BitSignedAccelerated is a boolean that will be VK_TRUE if the support for 32-bit signed dot product operations using the OpSDotKHR SPIR-V instruction is accelerated as defined below.
- integerDotProduct32BitMixedSignednessAccelerated is a boolean that will be VK_TRUE if the support for 32-bit mixed signedness dot product operations using the OpSUDotKHR SPIR-V instruction is accelerated as defined below.
- integerDotProduct64BitUnsignedAccelerated is a boolean that will be VK_TRUE if the support for 64-bit unsigned dot product operations using the OpUDotKHR SPIR-V instruction is accelerated as defined below.
- integerDotProduct64BitSignedAccelerated is a boolean that will be VK_TRUE if the support for 64-bit signed dot product operations using the OpSDotKHR SPIR-V instruction is accelerated as defined below.

- integerDotProduct64BitMixedSignednessAccelerated is a boolean that will be VK_TRUE if the support for 64-bit mixed signedness dot product operations using the OpSUDotKHR SPIR-V instruction is accelerated as defined below.
- integerDotProductAccumulatingSaturating8BitUnsignedAccelerated is a boolean that will be VK_TRUE if the support for 8-bit unsigned accumulating saturating dot product operations using the OpUDotAccSatKHR SPIR-V instruction is accelerated as defined below.
- integerDotProductAccumulatingSaturating8BitSignedAccelerated is a boolean that will be VK_TRUE if the support for 8-bit signed accumulating saturating dot product operations using the OpSDotAccSatKHR SPIR-V instruction is accelerated as defined below.
- integerDotProductAccumulatingSaturating8BitMixedSignednessAccelerated is a boolean that will be VK_TRUE if the support for 8-bit mixed signedness accumulating saturating dot product operations using the OpSUDotAccSatKHR SPIR-V instruction is accelerated as defined below.
- integerDotProductAccumulatingSaturating4x8BitPackedUnsignedAccelerated is a boolean that will be VK_TRUE if the support for 8-bit unsigned accumulating saturating dot product operations from operands packed into 32-bit integers using the OpUDotAccSatKHR SPIR-V instruction is accelerated as defined below.
- integerDotProductAccumulatingSaturating4x8BitPackedSignedAccelerated is a boolean that will be VK_TRUE if the support for 8-bit signed accumulating saturating dot product operations from operands packed into 32-bit integers using the OpSDotAccSatKHR SPIR-V instruction is accelerated as defined below.
- integerDotProductAccumulatingSaturating4x8BitPackedMixedSignednessAccelerated is a boolean that will be VK_TRUE if the support for 8-bit mixed signedness accumulating saturating dot product operations from operands packed into 32-bit integers using the OpSUDotAccSatKHR SPIR-V instruction is accelerated as defined below.
- integerDotProductAccumulatingSaturating16BitUnsignedAccelerated is a boolean that will be VK_TRUE if the support for 16-bit unsigned accumulating saturating dot product operations using the OpUDotAccSatKHR SPIR-V instruction is accelerated as defined below.
- integerDotProductAccumulatingSaturating16BitSignedAccelerated is a boolean that will be VK_TRUE if the support for 16-bit signed accumulating saturating dot product operations using the OpSDotAccSatKHR SPIR-V instruction is accelerated as defined below.
- integerDotProductAccumulatingSaturating16BitMixedSignednessAccelerated is a boolean that will be VK_TRUE if the support for 16-bit mixed signedness accumulating saturating dot product operations using the OpSUDotAccSatKHR SPIR-V instruction is accelerated as defined below.
- integerDotProductAccumulatingSaturating32BitUnsignedAccelerated is a boolean that will be VK_TRUE if the support for 32-bit unsigned accumulating saturating dot product operations using the OpUDotAccSatKHR SPIR-V instruction is accelerated as defined below.
- integerDotProductAccumulatingSaturating32BitSignedAccelerated is a boolean that will be VK_TRUE if the support for 32-bit signed accumulating saturating dot product operations using the OpSDotAccSatKHR SPIR-V instruction is accelerated as defined below.
- integerDotProductAccumulatingSaturating32BitMixedSignednessAccelerated is a boolean that will be VK_TRUE if the support for 32-bit mixed signedness accumulating saturating dot product operations using the OpSUDotAccSatKHR SPIR-V instruction is accelerated as defined below.
- integerDotProductAccumulatingSaturating64BitUnsignedAccelerated is a boolean that will be

VK_TRUE if the support for 64-bit unsigned accumulating saturating dot product operations using the OpUDotAccSatKHR SPIR-V instruction is accelerated as defined below.

- integerDotProductAccumulatingSaturating64BitSignedAccelerated is a boolean that will be VK_TRUE if the support for 64-bit signed accumulating saturating dot product operations using the OpSDotAccSatKHR SPIR-V instruction is accelerated as defined below.
- integerDotProductAccumulatingSaturating64BitMixedSignednessAccelerated is a boolean that will be VK_TRUE if the support for 64-bit mixed signedness accumulating saturating dot product operations using the OpSUDotAccSatKHR SPIR-V instruction is accelerated as defined below.

If the VkPhysicalDeviceShaderIntegerDotProductProperties structure is included in the pNext chain of the VkPhysicalDeviceProperties2 structure passed to vkGetPhysicalDeviceProperties2, it is filled in with each corresponding implementation-dependent property.

These are properties of the integer dot product acceleration information of a physical device.

NOTE

A dot product operation is deemed accelerated if its implementation provides a performance advantage over application-provided code composed from elementary instructions and/or other dot product instructions, either because the implementation uses optimized machine code sequences whose generation from application-provided code cannot be guaranteed or because it uses hardware features that cannot otherwise be targeted from application-provided code.

Valid Usage (Implicit)

- VUID-VkPhysicalDeviceShaderIntegerDotProductProperties-sType-sType
  sType **must** be VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_SHADER_INTEGER_DOT_PRODUCT_PROPERTIES

To query properties of queues available on a physical device, call:

```
// Provided by VK_VERSION_1_0
void vkGetPhysicalDeviceQueueFamilyProperties(
    VkPhysicalDevice                            physicalDevice,
    uint32_t*                                   pQueueFamilyPropertyCount,
    VkQueueFamilyProperties*                    pQueueFamilyProperties);
```

- physicalDevice is the handle to the physical device whose properties will be queried.
- pQueueFamilyPropertyCount is a pointer to an integer related to the number of queue families available or queried, as described below.
- pQueueFamilyProperties is either NULL or a pointer to an array of VkQueueFamilyProperties structures.

If pQueueFamilyProperties is NULL, then the number of queue families available is returned in pQueueFamilyPropertyCount. Implementations **must** support at least one queue family. Otherwise, pQueueFamilyPropertyCount **must** point to a variable set by the application to the number of elements in the pQueueFamilyProperties array, and on return the variable is overwritten with the

number of structures actually written to pQueueFamilyProperties. If pQueueFamilyPropertyCount is less than the number of queue families available, at most pQueueFamilyPropertyCount structures will be written.

Valid Usage (Implicit)

- VUID-vkGetPhysicalDeviceQueueFamilyProperties-physicalDevice-parameter
  physicalDevice **must** be a valid VkPhysicalDevice handle
- VUID-vkGetPhysicalDeviceQueueFamilyProperties-pQueueFamilyPropertyCount-parameter
  pQueueFamilyPropertyCount **must** be a valid pointer to a uint32_t value
- VUID-vkGetPhysicalDeviceQueueFamilyProperties-pQueueFamilyProperties-parameter
  If the value referenced by pQueueFamilyPropertyCount is not 0, and pQueueFamilyProperties is not NULL, pQueueFamilyProperties **must** be a valid pointer to an array of pQueueFamilyPropertyCount VkQueueFamilyProperties structures

The VkQueueFamilyProperties structure is defined as:

```
// Provided by VK_VERSION_1_0
typedef struct VkQueueFamilyProperties {
    VkQueueFlags    queueFlags;
    uint32_t        queueCount;
    uint32_t        timestampValidBits;
    VkExtent3D      minImageTransferGranularity;
} VkQueueFamilyProperties;
```

- queueFlags is a bitmask of VkQueueFlagBits indicating capabilities of the queues in this queue family.
- queueCount is the unsigned integer count of queues in this queue family. Each queue family **must** support at least one queue.
- timestampValidBits is the unsigned integer count of meaningful bits in the timestamps written via vkCmdWriteTimestamp2 or vkCmdWriteTimestamp. The valid range for the count is 36 to 64 bits, or a value of 0, indicating no support for timestamps. Bits outside the valid range are guaranteed to be zeros.
- minImageTransferGranularity is the minimum granularity supported for image transfer operations on the queues in this queue family.

The value returned in minImageTransferGranularity has a unit of compressed texel blocks for images having a block-compressed format, and a unit of texels otherwise.

Possible values of minImageTransferGranularity are:

- (0,0,0) specifies that only whole mip levels **must** be transferred using the image transfer operations on the corresponding queues. In this case, the following restrictions apply to all offset and extent parameters of image transfer operations:

    - The `x`, `y`, and `z` members of a VkOffset3D parameter **must** always be zero.
    - The `width`, `height`, and `depth` members of a VkExtent3D parameter **must** always match the width, height, and depth of the image subresource corresponding to the parameter, respectively.
- (A_x, A_y, A_z) where A_x, A_y, and A_z are all integer powers of two. In this case the following restrictions apply to all image transfer operations:
    - `x`, `y`, and `z` of a VkOffset3D parameter **must** be integer multiples of A_x, A_y, and A_z, respectively.
    - `width` of a VkExtent3D parameter **must** be an integer multiple of A_x, or else `x` + `width` **must** equal the width of the image subresource corresponding to the parameter.
    - `height` of a VkExtent3D parameter **must** be an integer multiple of A_y, or else `y` + `height` **must** equal the height of the image subresource corresponding to the parameter.
    - `depth` of a VkExtent3D parameter **must** be an integer multiple of A_z, or else `z` + `depth` **must** equal the depth of the image subresource corresponding to the parameter.
    - If the format of the image corresponding to the parameters is one of the block-compressed formats then for the purposes of the above calculations the granularity **must** be scaled up by the compressed texel block dimensions.

Queues supporting graphics and/or compute operations **must** report (1,1,1) in `minImageTransferGranularity`, meaning that there are no additional restrictions on the granularity of image transfer operations for these queues. Other queues supporting image transfer operations are only **required** to support whole mip level transfers, thus `minImageTransferGranularity` for queues belonging to such queue families **may** be (0,0,0).

The Device Memory section describes memory properties queried from the physical device.

For physical device feature queries see the Features chapter.

Bits which **may** be set in VkQueueFamilyProperties::`queueFlags`, indicating capabilities of queues in a queue family are:

```
// Provided by VK_VERSION_1_0
typedef enum VkQueueFlagBits {
    VK_QUEUE_GRAPHICS_BIT = 0x00000001,
    VK_QUEUE_COMPUTE_BIT = 0x00000002,
    VK_QUEUE_TRANSFER_BIT = 0x00000004,
    VK_QUEUE_SPARSE_BINDING_BIT = 0x00000008,
  // Provided by VK_VERSION_1_1
    VK_QUEUE_PROTECTED_BIT = 0x00000010,
} VkQueueFlagBits;
```

- `VK_QUEUE_GRAPHICS_BIT` specifies that queues in this queue family support graphics operations.
- `VK_QUEUE_COMPUTE_BIT` specifies that queues in this queue family support compute operations.
- `VK_QUEUE_TRANSFER_BIT` specifies that queues in this queue family support transfer operations.

- VK_QUEUE_SPARSE_BINDING_BIT specifies that queues in this queue family support sparse memory management operations (see Sparse Resources). If any of the sparse resource features are enabled, then at least one queue family **must** support this bit.
- VK_QUEUE_PROTECTED_BIT specifies that queues in this queue family support the VK_DEVICE_QUEUE_CREATE_PROTECTED_BIT bit. (see Protected Memory). If the physical device supports the protectedMemory feature, at least one of its queue families **must** support this bit.

If an implementation exposes any queue family that supports graphics operations, at least one queue family of at least one physical device exposed by the implementation **must** support both graphics and compute operations.

Furthermore, if the protectedMemory physical device feature is supported, then at least one queue family of at least one physical device exposed by the implementation **must** support graphics operations, compute operations, and protected memory operations.

NOTE	All commands that are allowed on a queue that supports transfer operations are also allowed on a queue that supports either graphics or compute operations. Thus, if the capabilities of a queue family include VK_QUEUE_GRAPHICS_BIT or VK_QUEUE_COMPUTE_BIT, then reporting the VK_QUEUE_TRANSFER_BIT capability separately for that queue family is **optional**.

For further details see Queues.

```
// Provided by VK_VERSION_1_0
typedef VkFlags VkQueueFlags;
```

VkQueueFlags is a bitmask type for setting a mask of zero or more VkQueueFlagBits.

To query properties of queues available on a physical device, call:

```
// Provided by VK_VERSION_1_1
void vkGetPhysicalDeviceQueueFamilyProperties2(
    VkPhysicalDevice                            physicalDevice,
    uint32_t*                                   pQueueFamilyPropertyCount,
    VkQueueFamilyProperties2*                   pQueueFamilyProperties);
```

- physicalDevice is the handle to the physical device whose properties will be queried.
- pQueueFamilyPropertyCount is a pointer to an integer related to the number of queue families available or queried, as described in vkGetPhysicalDeviceQueueFamilyProperties.
- pQueueFamilyProperties is either NULL or a pointer to an array of VkQueueFamilyProperties2 structures.

vkGetPhysicalDeviceQueueFamilyProperties2 behaves similarly to vkGetPhysicalDeviceQueueFamilyProperties, with the ability to return extended information in a pNext chain of output structures.

Valid Usage (Implicit)

- VUID-vkGetPhysicalDeviceQueueFamilyProperties2-physicalDevice-parameter
  `physicalDevice` **must** be a valid VkPhysicalDevice handle
- VUID-vkGetPhysicalDeviceQueueFamilyProperties2-pQueueFamilyPropertyCount-parameter
  `pQueueFamilyPropertyCount` **must** be a valid pointer to a `uint32_t` value
- VUID-vkGetPhysicalDeviceQueueFamilyProperties2-pQueueFamilyProperties-parameter
  If the value referenced by `pQueueFamilyPropertyCount` is not `0`, and `pQueueFamilyProperties` is not `NULL`, `pQueueFamilyProperties` **must** be a valid pointer to an array of `pQueueFamilyPropertyCount` VkQueueFamilyProperties2 structures

The `VkQueueFamilyProperties2` structure is defined as:

```
// Provided by VK_VERSION_1_1
typedef struct VkQueueFamilyProperties2 {
    VkStructureType            sType;
    void*                      pNext;
    VkQueueFamilyProperties    queueFamilyProperties;
} VkQueueFamilyProperties2;
```

- `sType` is a VkStructureType value identifying this structure.
- `pNext` is `NULL` or a pointer to a structure extending this structure.
- `queueFamilyProperties` is a VkQueueFamilyProperties structure which is populated with the same values as in vkGetPhysicalDeviceQueueFamilyProperties.

Valid Usage (Implicit)

- VUID-VkQueueFamilyProperties2-sType-sType
  `sType` **must** be `VK_STRUCTURE_TYPE_QUEUE_FAMILY_PROPERTIES_2`
- VUID-VkQueueFamilyProperties2-pNext-pNext
  `pNext` **must** be `NULL`

5.2. Devices

Device objects represent logical connections to physical devices. Each device exposes a number of *queue families* each having one or more *queues*. All queues in a queue family support the same operations.

As described in Physical Devices, a Vulkan application will first query for all physical devices in a system. Each physical device **can** then be queried for its capabilities, including its queue and queue family properties. Once an acceptable physical device is identified, an application will create a corresponding logical device. The created logical device is then the primary interface to the

physical device.

How to enumerate the physical devices in a system and query those physical devices for their queue family properties is described in the Physical Device Enumeration section above.

A single logical device **can** be created from multiple physical devices, if those physical devices belong to the same device group. A *device group* is a set of physical devices that support accessing each other's memory and recording a single command buffer that **can** be executed on all the physical devices. Device groups are enumerated by calling vkEnumeratePhysicalDeviceGroups, and a logical device is created from a subset of the physical devices in a device group by passing the physical devices through VkDeviceGroupDeviceCreateInfo. For two physical devices to be in the same device group, they **must** support identical extensions, features, and properties.

NOTE

Physical devices in the same device group **must** be so similar because there are no rules for how different features/properties would interact. They **must** return the same values for nearly every invariant `vkGetPhysicalDevice*` feature, property, capability, etc., but could potentially differ for certain queries based on things like having a different display connected, or a different compositor. The specification does not attempt to enumerate which state is in each category, because such a list would quickly become out of date.

To retrieve a list of the device groups present in the system, call:

```
// Provided by VK_VERSION_1_1
VkResult vkEnumeratePhysicalDeviceGroups(
    VkInstance                                  instance,
    uint32_t*                                   pPhysicalDeviceGroupCount,
    VkPhysicalDeviceGroupProperties*            pPhysicalDeviceGroupProperties);
```

- `instance` is a handle to a Vulkan instance previously created with vkCreateInstance.
- `pPhysicalDeviceGroupCount` is a pointer to an integer related to the number of device groups available or queried, as described below.
- `pPhysicalDeviceGroupProperties` is either `NULL` or a pointer to an array of VkPhysicalDeviceGroupProperties structures.

If `pPhysicalDeviceGroupProperties` is `NULL`, then the number of device groups available is returned in `pPhysicalDeviceGroupCount`. Otherwise, `pPhysicalDeviceGroupCount` **must** point to a variable set by the application to the number of elements in the `pPhysicalDeviceGroupProperties` array, and on return the variable is overwritten with the number of structures actually written to `pPhysicalDeviceGroupProperties`. If `pPhysicalDeviceGroupCount` is less than the number of device groups available, at most `pPhysicalDeviceGroupCount` structures will be written, and `VK_INCOMPLETE` will be returned instead of `VK_SUCCESS`, to indicate that not all the available device groups were returned.

Every physical device **must** be in exactly one device group.

Valid Usage (Implicit)

- VUID-vkEnumeratePhysicalDeviceGroups-instance-parameter
  `instance` **must** be a valid VkInstance handle
- VUID-vkEnumeratePhysicalDeviceGroups-pPhysicalDeviceGroupCount-parameter
  `pPhysicalDeviceGroupCount` **must** be a valid pointer to a `uint32_t` value
- VUID-vkEnumeratePhysicalDeviceGroups-pPhysicalDeviceGroupProperties-parameter
  If the value referenced by `pPhysicalDeviceGroupCount` is not `0`, and `pPhysicalDeviceGroupProperties` is not `NULL`, `pPhysicalDeviceGroupProperties` **must** be a valid pointer to an array of `pPhysicalDeviceGroupCount` VkPhysicalDeviceGroupProperties structures

Return Codes

Success

- `VK_SUCCESS`
- `VK_INCOMPLETE`

Failure

- `VK_ERROR_OUT_OF_HOST_MEMORY`
- `VK_ERROR_OUT_OF_DEVICE_MEMORY`
- `VK_ERROR_INITIALIZATION_FAILED`

The `VkPhysicalDeviceGroupProperties` structure is defined as:

```
// Provided by VK_VERSION_1_1
typedef struct VkPhysicalDeviceGroupProperties {
    VkStructureType     sType;
    void*               pNext;
    uint32_t            physicalDeviceCount;
    VkPhysicalDevice    physicalDevices[VK_MAX_DEVICE_GROUP_SIZE];
    VkBool32            subsetAllocation;
} VkPhysicalDeviceGroupProperties;
```

- `sType` is a VkStructureType value identifying this structure.
- `pNext` is `NULL` or a pointer to a structure extending this structure.
- `physicalDeviceCount` is the number of physical devices in the group.
- `physicalDevices` is an array of `VK_MAX_DEVICE_GROUP_SIZE` VkPhysicalDevice handles representing all physical devices in the group. The first `physicalDeviceCount` elements of the array will be valid.
- `subsetAllocation` specifies whether logical devices created from the group support allocating device memory on a subset of devices, via the `deviceMask` member of the

VkMemoryAllocateFlagsInfo. If this is VK_FALSE, then all device memory allocations are made across all physical devices in the group. If physicalDeviceCount is 1, then subsetAllocation **must** be VK_FALSE.

Valid Usage (Implicit)

- VUID-VkPhysicalDeviceGroupProperties-sType-sType
  sType **must** be VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_GROUP_PROPERTIES
- VUID-VkPhysicalDeviceGroupProperties-pNext-pNext
  pNext **must** be NULL

VK_MAX_DEVICE_GROUP_SIZE is the length of an array containing VkPhysicalDevice handle values representing all physical devices in a group, as returned in VkPhysicalDeviceGroupProperties ::physicalDevices.

```
#define VK_MAX_DEVICE_GROUP_SIZE          32U
```

5.2.1. Device Creation

Logical devices are represented by VkDevice handles:

```
// Provided by VK_VERSION_1_0
VK_DEFINE_HANDLE(VkDevice)
```

A logical device is created as a *connection* to a physical device. To create a logical device, call:

```
// Provided by VK_VERSION_1_0
VkResult vkCreateDevice(
    VkPhysicalDevice                            physicalDevice,
    const VkDeviceCreateInfo*                   pCreateInfo,
    const VkAllocationCallbacks*                pAllocator,
    VkDevice*                                   pDevice);
```

- physicalDevice **must** be one of the device handles returned from a call to vkEnumeratePhysicalDevices (see Physical Device Enumeration).
- pCreateInfo is a pointer to a VkDeviceCreateInfo structure containing information about how to create the device.
- pAllocator controls host memory allocation as described in the Memory Allocation chapter.
- pDevice is a pointer to a handle in which the created VkDevice is returned.

vkCreateDevice verifies that extensions and features requested in the ppEnabledExtensionNames and pEnabledFeatures members of pCreateInfo, respectively, are supported by the implementation. If any requested extension is not supported, vkCreateDevice **must** return VK_ERROR_EXTENSION_NOT_PRESENT.

If any requested feature is not supported, vkCreateDevice **must** return VK_ERROR_FEATURE_NOT_PRESENT. Support for extensions **can** be checked before creating a device by querying vkEnumerateDeviceExtensionProperties. Support for features **can** similarly be checked by querying vkGetPhysicalDeviceFeatures.

After verifying and enabling the extensions the VkDevice object is created and returned to the application.

Multiple logical devices **can** be created from the same physical device. Logical device creation **may** fail due to lack of device-specific resources (in addition to other errors). If that occurs, vkCreateDevice will return VK_ERROR_TOO_MANY_OBJECTS.

Valid Usage

- VUID-vkCreateDevice-ppEnabledExtensionNames-01387
  All required device extensions for each extension in the VkDeviceCreateInfo ::ppEnabledExtensionNames list **must** also be present in that list

Valid Usage (Implicit)

- VUID-vkCreateDevice-physicalDevice-parameter
  physicalDevice **must** be a valid VkPhysicalDevice handle
- VUID-vkCreateDevice-pCreateInfo-parameter
  pCreateInfo **must** be a valid pointer to a valid VkDeviceCreateInfo structure
- VUID-vkCreateDevice-pAllocator-parameter
  If pAllocator is not NULL, pAllocator **must** be a valid pointer to a valid VkAllocationCallbacks structure
- VUID-vkCreateDevice-pDevice-parameter
  pDevice **must** be a valid pointer to a VkDevice handle

Return Codes

Success

- VK_SUCCESS

Failure

- VK_ERROR_OUT_OF_HOST_MEMORY
- VK_ERROR_OUT_OF_DEVICE_MEMORY
- VK_ERROR_INITIALIZATION_FAILED
- VK_ERROR_EXTENSION_NOT_PRESENT
- VK_ERROR_FEATURE_NOT_PRESENT
- VK_ERROR_TOO_MANY_OBJECTS

- VK_ERROR_DEVICE_LOST

The VkDeviceCreateInfo structure is defined as:

```
// Provided by VK_VERSION_1_0
typedef struct VkDeviceCreateInfo {
    VkStructureType                    sType;
    const void*                        pNext;
    VkDeviceCreateFlags                flags;
    uint32_t                           queueCreateInfoCount;
    const VkDeviceQueueCreateInfo*     pQueueCreateInfos;
    // enabledLayerCount is deprecated and should not be used
    uint32_t                           enabledLayerCount;
    // ppEnabledLayerNames is deprecated and should not be used
    const char* const*                 ppEnabledLayerNames;
    uint32_t                           enabledExtensionCount;
    const char* const*                 ppEnabledExtensionNames;
    const VkPhysicalDeviceFeatures*    pEnabledFeatures;
} VkDeviceCreateInfo;
```

- sType is a VkStructureType value identifying this structure.
- pNext is NULL or a pointer to a structure extending this structure.
- flags is reserved for future use.
- queueCreateInfoCount is the unsigned integer size of the pQueueCreateInfos array. Refer to the Queue Creation section below for further details.
- pQueueCreateInfos is a pointer to an array of VkDeviceQueueCreateInfo structures describing the queues that are requested to be created along with the logical device. Refer to the Queue Creation section below for further details.
- enabledLayerCount is deprecated and ignored.
- ppEnabledLayerNames is deprecated and ignored. See Device Layer Deprecation.
- enabledExtensionCount is the number of device extensions to enable.
- ppEnabledExtensionNames is a pointer to an array of enabledExtensionCount null-terminated UTF-8 strings containing the names of extensions to enable for the created device. See the Extensions section for further details.
- pEnabledFeatures is NULL or a pointer to a VkPhysicalDeviceFeatures structure containing boolean indicators of all the features to be enabled. Refer to the Features section for further details.

Valid Usage

- VUID-VkDeviceCreateInfo-queueFamilyIndex-02802
  The queueFamilyIndex member of each element of pQueueCreateInfos **must** be unique within pQueueCreateInfos , except that two members can share the same queueFamilyIndex

if one describes protected-capable queues and one describes queues that are not protected-capable

- VUID-VkDeviceCreateInfo-pQueueCreateInfos-06755
  If multiple elements of `pQueueCreateInfos` share the same `queueFamilyIndex`, the sum of their `queueCount` members **must** be less than or equal to the `queueCount` member of the `VkQueueFamilyProperties` structure, as returned by `vkGetPhysicalDeviceQueueFamilyProperties` in the `pQueueFamilyProperties`[queueFamilyIndex]
- VUID-VkDeviceCreateInfo-pNext-00373
  If the `pNext` chain includes a VkPhysicalDeviceFeatures2 structure, then `pEnabledFeatures` **must** be `NULL`
- VUID-VkDeviceCreateInfo-pNext-02829
  If the `pNext` chain includes a VkPhysicalDeviceVulkan11Features structure, then it **must** not include a VkPhysicalDevice16BitStorageFeatures, VkPhysicalDeviceMultiviewFeatures, VkPhysicalDeviceVariablePointersFeatures, VkPhysicalDeviceProtectedMemoryFeatures, VkPhysicalDeviceSamplerYcbcrConversionFeatures, or VkPhysicalDeviceShaderDrawParametersFeatures structure
- VUID-VkDeviceCreateInfo-pNext-02830
  If the `pNext` chain includes a VkPhysicalDeviceVulkan12Features structure, then it **must** not include a VkPhysicalDevice8BitStorageFeatures, VkPhysicalDeviceShaderAtomicInt64Features, VkPhysicalDeviceShaderFloat16Int8Features, VkPhysicalDeviceDescriptorIndexingFeatures, VkPhysicalDeviceScalarBlockLayoutFeatures, VkPhysicalDeviceImagelessFramebufferFeatures, VkPhysicalDeviceUniformBufferStandardLayoutFeatures, VkPhysicalDeviceShaderSubgroupExtendedTypesFeatures, VkPhysicalDeviceSeparateDepthStencilLayoutsFeatures, VkPhysicalDeviceHostQueryResetFeatures, VkPhysicalDeviceTimelineSemaphoreFeatures, VkPhysicalDeviceBufferDeviceAddressFeatures, or VkPhysicalDeviceVulkanMemoryModelFeatures structure
- VUID-VkDeviceCreateInfo-pNext-06532
  If the `pNext` chain includes a VkPhysicalDeviceVulkan13Features structure, then it **must** not include a VkPhysicalDeviceDynamicRenderingFeatures, VkPhysicalDeviceImageRobustnessFeatures, VkPhysicalDeviceInlineUniformBlockFeatures, VkPhysicalDeviceMaintenance4Features, VkPhysicalDevicePipelineCreationCacheControlFeatures, VkPhysicalDevicePrivateDataFeatures, VkPhysicalDeviceShaderDemoteToHelperInvocationFeatures, VkPhysicalDeviceShaderIntegerDotProductFeatures, VkPhysicalDeviceShaderTerminateInvocationFeatures, VkPhysicalDeviceSubgroupSizeControlFeatures, VkPhysicalDeviceSynchronization2Features, VkPhysicalDeviceTextureCompressionASTCHDRFeatures, or

VkPhysicalDeviceZeroInitializeWorkgroupMemoryFeatures structure

Valid Usage (Implicit)

- VUID-VkDeviceCreateInfo-sType-sType
  `sType` **must** be `VK_STRUCTURE_TYPE_DEVICE_CREATE_INFO`
- VUID-VkDeviceCreateInfo-pNext-pNext
  Each `pNext` member of any structure (including this one) in the `pNext` chain **must** be either `NULL` or a pointer to a valid instance of VkDeviceGroupDeviceCreateInfo, VkDevicePrivateDataCreateInfo, VkPhysicalDevice16BitStorageFeatures, VkPhysicalDevice8BitStorageFeatures, VkPhysicalDeviceBufferDeviceAddressFeatures, VkPhysicalDeviceDescriptorIndexingFeatures, VkPhysicalDeviceDynamicRenderingFeatures, VkPhysicalDeviceFeatures2, VkPhysicalDeviceHostQueryResetFeatures, VkPhysicalDeviceImageRobustnessFeatures, VkPhysicalDeviceImagelessFramebufferFeatures, VkPhysicalDeviceInlineUniformBlockFeatures, VkPhysicalDeviceMaintenance4Features, VkPhysicalDeviceMultiviewFeatures, VkPhysicalDevicePipelineCreationCacheControlFeatures, VkPhysicalDevicePrivateDataFeatures, VkPhysicalDeviceProtectedMemoryFeatures, VkPhysicalDeviceSamplerYcbcrConversionFeatures, VkPhysicalDeviceScalarBlockLayoutFeatures, VkPhysicalDeviceSeparateDepthStencilLayoutsFeatures, VkPhysicalDeviceShaderAtomicInt64Features, VkPhysicalDeviceShaderDemoteToHelperInvocationFeatures, VkPhysicalDeviceShaderDrawParametersFeatures, VkPhysicalDeviceShaderFloat16Int8Features, VkPhysicalDeviceShaderIntegerDotProductFeatures, VkPhysicalDeviceShaderSubgroupExtendedTypesFeatures, VkPhysicalDeviceShaderTerminateInvocationFeatures, VkPhysicalDeviceSubgroupSizeControlFeatures, VkPhysicalDeviceSynchronization2Features, VkPhysicalDeviceTextureCompressionASTCHDRFeatures, VkPhysicalDeviceTimelineSemaphoreFeatures, VkPhysicalDeviceUniformBufferStandardLayoutFeatures, VkPhysicalDeviceVariablePointersFeatures, VkPhysicalDeviceVulkan11Features, VkPhysicalDeviceVulkan12Features, VkPhysicalDeviceVulkan13Features, VkPhysicalDeviceVulkanMemoryModelFeatures, or VkPhysicalDeviceZeroInitializeWorkgroupMemoryFeatures
- VUID-VkDeviceCreateInfo-sType-unique
  The `sType` value of each struct in the `pNext` chain **must** be unique, with the exception of structures of type VkDevicePrivateDataCreateInfo
- VUID-VkDeviceCreateInfo-flags-zerobitmask
  `flags` **must** be `0`
- VUID-VkDeviceCreateInfo-pQueueCreateInfos-parameter
  `pQueueCreateInfos` **must** be a valid pointer to an array of `queueCreateInfoCount` valid

VkDeviceQueueCreateInfo structures

- VUID-VkDeviceCreateInfo-ppEnabledLayerNames-parameter
  If `enabledLayerCount` is not `0`, `ppEnabledLayerNames` **must** be a valid pointer to an array of `enabledLayerCount` null-terminated UTF-8 strings
- VUID-VkDeviceCreateInfo-ppEnabledExtensionNames-parameter
  If `enabledExtensionCount` is not `0`, `ppEnabledExtensionNames` **must** be a valid pointer to an array of `enabledExtensionCount` null-terminated UTF-8 strings
- VUID-VkDeviceCreateInfo-pEnabledFeatures-parameter
  If `pEnabledFeatures` is not `NULL`, `pEnabledFeatures` **must** be a valid pointer to a valid VkPhysicalDeviceFeatures structure
- VUID-VkDeviceCreateInfo-queueCreateInfoCount-arraylength
  `queueCreateInfoCount` **must** be greater than `0`

```
// Provided by VK_VERSION_1_0
typedef VkFlags VkDeviceCreateFlags;
```

`VkDeviceCreateFlags` is a bitmask type for setting a mask, but is currently reserved for future use.

A logical device **can** be created that connects to one or more physical devices by adding a `VkDeviceGroupDeviceCreateInfo` structure to the `pNext` chain of VkDeviceCreateInfo. The `VkDeviceGroupDeviceCreateInfo` structure is defined as:

```
// Provided by VK_VERSION_1_1
typedef struct VkDeviceGroupDeviceCreateInfo {
    VkStructureType            sType;
    const void*                pNext;
    uint32_t                   physicalDeviceCount;
    const VkPhysicalDevice*    pPhysicalDevices;
} VkDeviceGroupDeviceCreateInfo;
```

- `sType` is a VkStructureType value identifying this structure.
- `pNext` is `NULL` or a pointer to a structure extending this structure.
- `physicalDeviceCount` is the number of elements in the `pPhysicalDevices` array.
- `pPhysicalDevices` is a pointer to an array of physical device handles belonging to the same device group.

The elements of the `pPhysicalDevices` array are an ordered list of the physical devices that the logical device represents. These **must** be a subset of a single device group, and need not be in the same order as they were enumerated. The order of the physical devices in the `pPhysicalDevices` array determines the *device index* of each physical device, with element i being assigned a device index of i. Certain commands and structures refer to one or more physical devices by using device indices or *device masks* formed using device indices.

A logical device created without using `VkDeviceGroupDeviceCreateInfo`, or with `physicalDeviceCount`

equal to zero, is equivalent to a physicalDeviceCount of one and pPhysicalDevices pointing to the physicalDevice parameter to vkCreateDevice. In particular, the device index of that physical device is zero.

Valid Usage

- VUID-VkDeviceGroupDeviceCreateInfo-pPhysicalDevices-00375
  Each element of pPhysicalDevices **must** be unique
- VUID-VkDeviceGroupDeviceCreateInfo-pPhysicalDevices-00376
  All elements of pPhysicalDevices **must** be in the same device group as enumerated by vkEnumeratePhysicalDeviceGroups
- VUID-VkDeviceGroupDeviceCreateInfo-physicalDeviceCount-00377
  If physicalDeviceCount is not 0, the physicalDevice parameter of vkCreateDevice **must** be an element of pPhysicalDevices

Valid Usage (Implicit)

- VUID-VkDeviceGroupDeviceCreateInfo-sType-sType
  sType **must** be VK_STRUCTURE_TYPE_DEVICE_GROUP_DEVICE_CREATE_INFO
- VUID-VkDeviceGroupDeviceCreateInfo-pPhysicalDevices-parameter
  If physicalDeviceCount is not 0, pPhysicalDevices **must** be a valid pointer to an array of physicalDeviceCount valid VkPhysicalDevice handles

To reserve private data storage slots, add a VkDevicePrivateDataCreateInfo structure to the pNext chain of the VkDeviceCreateInfo structure. Reserving slots in this manner is not strictly necessary, but doing so **may** improve performance.

```
// Provided by VK_VERSION_1_3
typedef struct VkDevicePrivateDataCreateInfo {
    VkStructureType    sType;
    const void*        pNext;
    uint32_t           privateDataSlotRequestCount;
} VkDevicePrivateDataCreateInfo;
```

- sType is a VkStructureType value identifying this structure.
- pNext is NULL or a pointer to a structure extending this structure.
- privateDataSlotRequestCount is the amount of slots to reserve.

Valid Usage (Implicit)

- VUID-VkDevicePrivateDataCreateInfo-sType-sType
  sType **must** be VK_STRUCTURE_TYPE_DEVICE_PRIVATE_DATA_CREATE_INFO

5.2.2. Device Use

The following is a high-level list of `VkDevice` uses along with references on where to find more information:

- Creation of queues. See the Queues section below for further details.
- Creation and tracking of various synchronization constructs. See Synchronization and Cache Control for further details.
- Allocating, freeing, and managing memory. See Memory Allocation and Resource Creation for further details.
- Creation and destruction of command buffers and command buffer pools. See Command Buffers for further details.
- Creation, destruction, and management of graphics state. See Pipelines and Resource Descriptors, among others, for further details.

5.2.3. Lost Device

A logical device **may** become *lost* for a number of implementation-specific reasons, indicating that pending and future command execution **may** fail and cause resources and backing memory to become undefined.

NOTE

Typical reasons for device loss will include things like execution timing out (to prevent denial of service), power management events, platform resource management, implementation errors.

Applications not adhering to valid usage may also result in device loss being reported, however this is not guaranteed. Even if device loss is reported, the system may be in an unrecoverable state, and further usage of the API is still considered invalid.

When this happens, certain commands will return `VK_ERROR_DEVICE_LOST`. After any such event, the logical device is considered *lost*. It is not possible to reset the logical device to a non-lost state, however the lost state is specific to a logical device (`VkDevice`), and the corresponding physical device (`VkPhysicalDevice`) **may** be otherwise unaffected.

In some cases, the physical device **may** also be lost, and attempting to create a new logical device will fail, returning `VK_ERROR_DEVICE_LOST`. This is usually indicative of a problem with the underlying implementation, or its connection to the host. If the physical device has not been lost, and a new logical device is successfully created from that physical device, it **must** be in the non-lost state.

NOTE

Whilst logical device loss **may** be recoverable, in the case of physical device loss, it is unlikely that an application will be able to recover unless additional, unaffected physical devices exist on the system. The error is largely informational and intended only to inform the application that a platform issue has occurred, and **should** be investigated further. For example, underlying hardware **may** have developed a fault or become physically disconnected from the rest of the system. In many cases, physical device loss **may** cause other more serious issues such as the

> operating system crashing; in which case it **may** not be reported via the Vulkan API.

When a device is lost, its child objects are not implicitly destroyed and their handles are still valid. Those objects **must** still be destroyed before their parents or the device **can** be destroyed (see the Object Lifetime section). The host address space corresponding to device memory mapped using vkMapMemory is still valid, and host memory accesses to these mapped regions are still valid, but the contents are undefined. It is still legal to call any API command on the device and child objects.

Once a device is lost, command execution **may** fail, and certain commands that return a VkResult **may** return `VK_ERROR_DEVICE_LOST`. These commands can be identified by the inclusion of `VK_ERROR_DEVICE_LOST` in the Return Codes section for each command. Commands that do not allow runtime errors **must** still operate correctly for valid usage and, if applicable, return valid data.

Commands that wait indefinitely for device execution (namely vkDeviceWaitIdle, vkQueueWaitIdle, vkWaitForFences with a maximum `timeout`, and vkGetQueryPoolResults with the `VK_QUERY_RESULT_WAIT_BIT` bit set in `flags`) **must** return in finite time even in the case of a lost device, and return either `VK_SUCCESS` or `VK_ERROR_DEVICE_LOST`. For any command that **may** return `VK_ERROR_DEVICE_LOST`, for the purpose of determining whether a command buffer is in the pending state, or whether resources are considered in-use by the device, a return value of `VK_ERROR_DEVICE_LOST` is equivalent to `VK_SUCCESS`.

The content of any external memory objects that have been exported from or imported to a lost device become undefined. Objects on other logical devices or in other APIs which are associated with the same underlying memory resource as the external memory objects on the lost device are unaffected other than their content becoming undefined. The layout of subresources of images on other logical devices that are bound to `VkDeviceMemory` objects associated with the same underlying memory resources as external memory objects on the lost device becomes `VK_IMAGE_LAYOUT_UNDEFINED`.

The state of `VkSemaphore` objects on other logical devices created by importing a semaphore payload with temporary permanence which was exported from the lost device is undefined. The state of `VkSemaphore` objects on other logical devices that permanently share a semaphore payload with a `VkSemaphore` object on the lost device is undefined, and remains undefined following any subsequent signal operations. Implementations **must** ensure pending and subsequently submitted wait operations on such semaphores behave as defined in Semaphore State Requirements For Wait Operations for external semaphores not in a valid state for a wait operation.

5.2.4. Device Destruction

To destroy a device, call:

```
// Provided by VK_VERSION_1_0
void vkDestroyDevice(
    VkDevice                                    device,
    const VkAllocationCallbacks*                pAllocator);
```

- `device` is the logical device to destroy.
- `pAllocator` controls host memory allocation as described in the Memory Allocation chapter.

To ensure that no work is active on the device, vkDeviceWaitIdle **can** be used to gate the destruction of the device. Prior to destroying a device, an application is responsible for destroying/freeing any Vulkan objects that were created using that device as the first parameter of the corresponding `vkCreate*` or `vkAllocate*` command.

NOTE	The lifetime of each of these objects is bound by the lifetime of the `VkDevice` object. Therefore, to avoid resource leaks, it is critical that an application explicitly free all of these resources prior to calling `vkDestroyDevice`.

Valid Usage

- VUID-vkDestroyDevice-device-05137
  All child objects created on `device` **must** have been destroyed prior to destroying `device`
- VUID-vkDestroyDevice-device-00379
  If `VkAllocationCallbacks` were provided when `device` was created, a compatible set of callbacks **must** be provided here
- VUID-vkDestroyDevice-device-00380
  If no `VkAllocationCallbacks` were provided when `device` was created, `pAllocator` **must** be `NULL`

Valid Usage (Implicit)

- VUID-vkDestroyDevice-device-parameter
  If `device` is not `NULL`, `device` **must** be a valid VkDevice handle
- VUID-vkDestroyDevice-pAllocator-parameter
  If `pAllocator` is not `NULL`, `pAllocator` **must** be a valid pointer to a valid VkAllocationCallbacks structure

Host Synchronization

- Host access to `device` **must** be externally synchronized
- Host access to all `VkQueue` objects created from `device` **must** be externally synchronized

5.3. Queues

5.3.1. Queue Family Properties

As discussed in the Physical Device Enumeration section above, the vkGetPhysicalDeviceQueueFamilyProperties command is used to retrieve details about the queue families and queues supported by a device.

Each index in the `pQueueFamilyProperties` array returned by

vkGetPhysicalDeviceQueueFamilyProperties describes a unique queue family on that physical device. These indices are used when creating queues, and they correspond directly with the queueFamilyIndex that is passed to the vkCreateDevice command via the VkDeviceQueueCreateInfo structure as described in the Queue Creation section below.

Grouping of queue families within a physical device is implementation-dependent.

NOTE	The general expectation is that a physical device groups all queues of matching capabilities into a single family. However, while implementations **should** do this, it is possible that a physical device **may** return two separate queue families with the same capabilities.

Once an application has identified a physical device with the queue(s) that it desires to use, it will create those queues in conjunction with a logical device. This is described in the following section.

5.3.2. Queue Creation

Creating a logical device also creates the queues associated with that device. The queues to create are described by a set of VkDeviceQueueCreateInfo structures that are passed to vkCreateDevice in pQueueCreateInfos.

Queues are represented by VkQueue handles:

```
// Provided by VK_VERSION_1_0
VK_DEFINE_HANDLE(VkQueue)
```

The VkDeviceQueueCreateInfo structure is defined as:

```
// Provided by VK_VERSION_1_0
typedef struct VkDeviceQueueCreateInfo {
    VkStructureType             sType;
    const void*                 pNext;
    VkDeviceQueueCreateFlags    flags;
    uint32_t                    queueFamilyIndex;
    uint32_t                    queueCount;
    const float*                pQueuePriorities;
} VkDeviceQueueCreateInfo;
```

- sType is a VkStructureType value identifying this structure.
- pNext is NULL or a pointer to a structure extending this structure.
- flags is a bitmask indicating behavior of the queues.
- queueFamilyIndex is an unsigned integer indicating the index of the queue family in which to create the queues on this device. This index corresponds to the index of an element of the pQueueFamilyProperties array that was returned by vkGetPhysicalDeviceQueueFamilyProperties.
- queueCount is an unsigned integer specifying the number of queues to create in the queue family indicated by queueFamilyIndex, and with the behavior specified by flags.

- `pQueuePriorities` is a pointer to an array of `queueCount` normalized floating-point values, specifying priorities of work that will be submitted to each created queue. See Queue Priority for more information.

Valid Usage

- VUID-VkDeviceQueueCreateInfo-queueFamilyIndex-00381
  `queueFamilyIndex` **must** be less than `pQueueFamilyPropertyCount` returned by `vkGetPhysicalDeviceQueueFamilyProperties`
- VUID-VkDeviceQueueCreateInfo-queueCount-00382
  `queueCount` **must** be less than or equal to the `queueCount` member of the `VkQueueFamilyProperties` structure, as returned by `vkGetPhysicalDeviceQueueFamilyProperties` in the `pQueueFamilyProperties`[queueFamilyIndex]
- VUID-VkDeviceQueueCreateInfo-pQueuePriorities-00383
  Each element of `pQueuePriorities` **must** be between `0.0` and `1.0` inclusive
- VUID-VkDeviceQueueCreateInfo-flags-02861
  If the `protectedMemory` feature is not enabled, the `VK_DEVICE_QUEUE_CREATE_PROTECTED_BIT` bit of `flags` **must** not be set
- VUID-VkDeviceQueueCreateInfo-flags-06449
  If `flags` includes `VK_DEVICE_QUEUE_CREATE_PROTECTED_BIT`, `queueFamilyIndex` **must** be the index of a queue family that includes the `VK_QUEUE_PROTECTED_BIT` capability

Valid Usage (Implicit)

- VUID-VkDeviceQueueCreateInfo-sType-sType
  `sType` **must** be `VK_STRUCTURE_TYPE_DEVICE_QUEUE_CREATE_INFO`
- VUID-VkDeviceQueueCreateInfo-pNext-pNext
  `pNext` **must** be `NULL`
- VUID-VkDeviceQueueCreateInfo-flags-parameter
  `flags` **must** be a valid combination of VkDeviceQueueCreateFlagBits values
- VUID-VkDeviceQueueCreateInfo-pQueuePriorities-parameter
  `pQueuePriorities` **must** be a valid pointer to an array of `queueCount` `float` values
- VUID-VkDeviceQueueCreateInfo-queueCount-arraylength
  `queueCount` **must** be greater than `0`

Bits which **can** be set in VkDeviceQueueCreateInfo::`flags`, specifying usage behavior of a queue, are:

```
// Provided by VK_VERSION_1_1
typedef enum VkDeviceQueueCreateFlagBits {
  // Provided by VK_VERSION_1_1
    VK_DEVICE_QUEUE_CREATE_PROTECTED_BIT = 0x00000001,
} VkDeviceQueueCreateFlagBits;
```

- VK_DEVICE_QUEUE_CREATE_PROTECTED_BIT specifies that the device queue is a protected-capable queue.

```
// Provided by VK_VERSION_1_0
typedef VkFlags VkDeviceQueueCreateFlags;
```

VkDeviceQueueCreateFlags is a bitmask type for setting a mask of zero or more VkDeviceQueueCreateFlagBits.

To retrieve a handle to a VkQueue object, call:

```
// Provided by VK_VERSION_1_0
void vkGetDeviceQueue(
    VkDevice                                    device,
    uint32_t                                    queueFamilyIndex,
    uint32_t                                    queueIndex,
    VkQueue*                                    pQueue);
```

- device is the logical device that owns the queue.
- queueFamilyIndex is the index of the queue family to which the queue belongs.
- queueIndex is the index within this queue family of the queue to retrieve.
- pQueue is a pointer to a VkQueue object that will be filled with the handle for the requested queue.

vkGetDeviceQueue **must** only be used to get queues that were created with the flags parameter of VkDeviceQueueCreateInfo set to zero. To get queues that were created with a non-zero flags parameter use vkGetDeviceQueue2.

Valid Usage

- VUID-vkGetDeviceQueue-queueFamilyIndex-00384
  queueFamilyIndex **must** be one of the queue family indices specified when device was created, via the VkDeviceQueueCreateInfo structure
- VUID-vkGetDeviceQueue-queueIndex-00385
  queueIndex **must** be less than the value of VkDeviceQueueCreateInfo::queueCount for the queue family indicated by queueFamilyIndex when device was created
- VUID-vkGetDeviceQueue-flags-01841
  VkDeviceQueueCreateInfo::flags **must** have been zero when device was created

Valid Usage (Implicit)

- VUID-vkGetDeviceQueue-device-parameter
  `device` **must** be a valid VkDevice handle
- VUID-vkGetDeviceQueue-pQueue-parameter
  `pQueue` **must** be a valid pointer to a VkQueue handle

To retrieve a handle to a VkQueue object with specific VkDeviceQueueCreateFlags creation flags, call:

```
// Provided by VK_VERSION_1_1
void vkGetDeviceQueue2(
    VkDevice                                    device,
    const VkDeviceQueueInfo2*                   pQueueInfo,
    VkQueue*                                    pQueue);
```

- `device` is the logical device that owns the queue.
- `pQueueInfo` is a pointer to a VkDeviceQueueInfo2 structure, describing parameters of the device queue to be retrieved.
- `pQueue` is a pointer to a VkQueue object that will be filled with the handle for the requested queue.

Valid Usage (Implicit)

- VUID-vkGetDeviceQueue2-device-parameter
  `device` **must** be a valid VkDevice handle
- VUID-vkGetDeviceQueue2-pQueueInfo-parameter
  `pQueueInfo` **must** be a valid pointer to a valid VkDeviceQueueInfo2 structure
- VUID-vkGetDeviceQueue2-pQueue-parameter
  `pQueue` **must** be a valid pointer to a VkQueue handle

The `VkDeviceQueueInfo2` structure is defined as:

```
// Provided by VK_VERSION_1_1
typedef struct VkDeviceQueueInfo2 {
    VkStructureType             sType;
    const void*                 pNext;
    VkDeviceQueueCreateFlags    flags;
    uint32_t                    queueFamilyIndex;
    uint32_t                    queueIndex;
} VkDeviceQueueInfo2;
```

- `sType` is a VkStructureType value identifying this structure.

- `pNext` is `NULL` or a pointer to a structure extending this structure. The `pNext` chain of `VkDeviceQueueInfo2` **can** be used to provide additional device queue parameters to `vkGetDeviceQueue2`.
- `flags` is a VkDeviceQueueCreateFlags value indicating the flags used to create the device queue.
- `queueFamilyIndex` is the index of the queue family to which the queue belongs.
- `queueIndex` is the index of the queue to retrieve from within the set of queues that share both the queue family and flags specified.

The queue returned by `vkGetDeviceQueue2` **must** have the same `flags` value from this structure as that used at device creation time in a VkDeviceQueueCreateInfo structure.

NOTE

Normally, if you create both protected-capable and non-protected-capable queues with the same family, they are treated as separate lists of queues and `queueIndex` is relative to the start of the list of queues specified by both `queueFamilyIndex` and `flags`. However, for historical reasons, some implementations may exhibit different behavior. These divergent implementations instead concatenate the lists of queues and treat `queueIndex` as relative to the start of the first list of queues with the given `queueFamilyIndex`. This only matters in cases where an application has created both protected-capable and non-protected-capable queues from the same queue family.

For such divergent implementations, the maximum value of `queueIndex` is equal to the sum of VkDeviceQueueCreateInfo::`queueCount` minus one, for all VkDeviceQueueCreateInfo structures that share a common `queueFamilyIndex`.

Such implementations will return `NULL` for either the protected or unprotected queues when calling `vkGetDeviceQueue2` with `queueIndex` in the range zero to VkDeviceQueueCreateInfo::`queueCount` minus one. In cases where these implementations returned `NULL`, the corresponding queues are instead located in the extended range described in the preceding two paragraphs.

This behavior will not be observed on any driver that has passed Vulkan conformance test suite version 1.3.3.0, or any subsequent version. This information can be found by querying `VkPhysicalDeviceDriverProperties`::`conformanceVersion`.

Valid Usage

- VUID-VkDeviceQueueInfo2-queueFamilyIndex-01842
  `queueFamilyIndex` **must** be one of the queue family indices specified when `device` was created, via the VkDeviceQueueCreateInfo structure
- VUID-VkDeviceQueueInfo2-flags-06225
  `flags` **must** be equal to VkDeviceQueueCreateInfo::`flags` for a VkDeviceQueueCreateInfo structure for the queue family indicated by `queueFamilyIndex` when `device` was created
- VUID-VkDeviceQueueInfo2-queueIndex-01843
  `queueIndex` **must** be less than VkDeviceQueueCreateInfo::`queueCount` for the corresponding queue family and flags indicated by `queueFamilyIndex` and `flags` when `device` was created

Valid Usage (Implicit)

- VUID-VkDeviceQueueInfo2-sType-sType
  `sType` **must** be `VK_STRUCTURE_TYPE_DEVICE_QUEUE_INFO_2`
- VUID-VkDeviceQueueInfo2-pNext-pNext
  `pNext` **must** be `NULL`
- VUID-VkDeviceQueueInfo2-flags-parameter
  `flags` **must** be a valid combination of VkDeviceQueueCreateFlagBits values

5.3.3. Queue Family Index

The queue family index is used in multiple places in Vulkan in order to tie operations to a specific family of queues.

When retrieving a handle to the queue via `vkGetDeviceQueue`, the queue family index is used to select which queue family to retrieve the `VkQueue` handle from as described in the previous section.

When creating a `VkCommandPool` object (see Command Pools), a queue family index is specified in the VkCommandPoolCreateInfo structure. Command buffers from this pool **can** only be submitted on queues corresponding to this queue family.

When creating `VkImage` (see Images) and `VkBuffer` (see Buffers) resources, a set of queue families is included in the VkImageCreateInfo and VkBufferCreateInfo structures to specify the queue families that **can** access the resource.

When inserting a VkBufferMemoryBarrier or VkImageMemoryBarrier (see Pipeline Barriers), a source and destination queue family index is specified to allow the ownership of a buffer or image to be transferred from one queue family to another. See the Resource Sharing section for details.

5.3.4. Queue Priority

Each queue is assigned a priority, as set in the VkDeviceQueueCreateInfo structures when creating the device. The priority of each queue is a normalized floating-point value between 0.0 and 1.0, which is then translated to a discrete priority level by the implementation. Higher values indicate a higher priority, with 0.0 being the lowest priority and 1.0 being the highest.

Within the same device, queues with higher priority **may** be allotted more processing time than queues with lower priority. The implementation makes no guarantees with regards to ordering or scheduling among queues with the same priority, other than the constraints defined by any explicit synchronization primitives. The implementation makes no guarantees with regards to queues across different devices.

An implementation **may** allow a higher-priority queue to starve a lower-priority queue on the same `VkDevice` until the higher-priority queue has no further commands to execute. The relationship of queue priorities **must** not cause queues on one `VkDevice` to starve queues on another `VkDevice`.

No specific guarantees are made about higher priority queues receiving more processing time or

better quality of service than lower priority queues.

5.3.5. Queue Submission

Work is submitted to a queue via *queue submission* commands such as vkQueueSubmit2 or vkQueueSubmit. Queue submission commands define a set of *queue operations* to be executed by the underlying physical device, including synchronization with semaphores and fences.

Submission commands take as parameters a target queue, zero or more *batches* of work, and an **optional** fence to signal upon completion. Each batch consists of three distinct parts:

1. Zero or more semaphores to wait on before execution of the rest of the batch.
    - If present, these describe a semaphore wait operation.
2. Zero or more work items to execute.
    - If present, these describe a *queue operation* matching the work described.
3. Zero or more semaphores to signal upon completion of the work items.
    - If present, these describe a semaphore signal operation.

If a fence is present in a queue submission, it describes a fence signal operation.

All work described by a queue submission command **must** be submitted to the queue before the command returns.

Sparse Memory Binding

In Vulkan it is possible to sparsely bind memory to buffers and images as described in the Sparse Resource chapter. Sparse memory binding is a queue operation. A queue whose flags include the `VK_QUEUE_SPARSE_BINDING_BIT` **must** be able to support the mapping of a virtual address to a physical address on the device. This causes an update to the page table mappings on the device. This update **must** be synchronized on a queue to avoid corrupting page table mappings during execution of graphics commands. By binding the sparse memory resources on queues, all commands that are dependent on the updated bindings are synchronized to only execute after the binding is updated. See the Synchronization and Cache Control chapter for how this synchronization is accomplished.

5.3.6. Queue Destruction

Queues are created along with a logical device during `vkCreateDevice`. All queues associated with a logical device are destroyed when `vkDestroyDevice` is called on that device.

Chapter 6. Command Buffers

Command buffers are objects used to record commands which **can** be subsequently submitted to a device queue for execution. There are two levels of command buffers - *primary command buffers*, which **can** execute secondary command buffers, and which are submitted to queues, and *secondary command buffers*, which **can** be executed by primary command buffers, and which are not directly submitted to queues.

Command buffers are represented by `VkCommandBuffer` handles:

```
// Provided by VK_VERSION_1_0
VK_DEFINE_HANDLE(VkCommandBuffer)
```

Recorded commands include commands to bind pipelines and descriptor sets to the command buffer, commands to modify dynamic state, commands to draw (for graphics rendering), commands to dispatch (for compute), commands to execute secondary command buffers (for primary command buffers only), commands to copy buffers and images, and other commands.

Each command buffer manages state independently of other command buffers. There is no inheritance of state across primary and secondary command buffers, or between secondary command buffers. When a command buffer begins recording, all state in that command buffer is undefined. When secondary command buffer(s) are recorded to execute on a primary command buffer, the secondary command buffer inherits no state from the primary command buffer, and all state of the primary command buffer is undefined after an execute secondary command buffer command is recorded. There is one exception to this rule - if the primary command buffer is inside a render pass instance, then the render pass and subpass state is not disturbed by executing secondary command buffers. For state dependent commands (such as draws and dispatches), any state consumed by those commands **must** not be undefined.

Unless otherwise specified, and without explicit synchronization, the various commands submitted to a queue via command buffers **may** execute in arbitrary order relative to each other, and/or concurrently. Also, the memory side effects of those commands **may** not be directly visible to other commands without explicit memory dependencies. This is true within a command buffer, and across command buffers submitted to a given queue. See the synchronization chapter for information on implicit and explicit synchronization between commands.

6.1. Command Buffer Lifecycle

Each command buffer is always in one of the following states:

Initial

When a command buffer is allocated, it is in the *initial state*. Some commands are able to *reset* a command buffer (or a set of command buffers) back to this state from any of the executable, recording or invalid state. Command buffers in the initial state **can** only be moved to the recording state, or freed.

Recording

vkBeginCommandBuffer changes the state of a command buffer from the initial state to the *recording state*. Once a command buffer is in the recording state, `vkCmd*` commands **can** be used to record to the command buffer.

Executable

vkEndCommandBuffer ends the recording of a command buffer, and moves it from the recording state to the *executable state*. Executable command buffers **can** be submitted, reset, or recorded to another command buffer.

Pending

Queue submission of a command buffer changes the state of a command buffer from the executable state to the *pending state*. Whilst in the pending state, applications **must** not attempt to modify the command buffer in any way - as the device **may** be processing the commands recorded to it. Once execution of a command buffer completes, the command buffer either reverts back to the *executable state*, or if it was recorded with `VK_COMMAND_BUFFER_USAGE_ONE_TIME_SUBMIT_BIT`, it moves to the *invalid state*. A synchronization command **should** be used to detect when this occurs.

Invalid

Some operations, such as modifying or deleting a resource that was used in a command recorded to a command buffer, will transition the state of that command buffer into the *invalid state*. Command buffers in the invalid state **can** only be reset or freed.

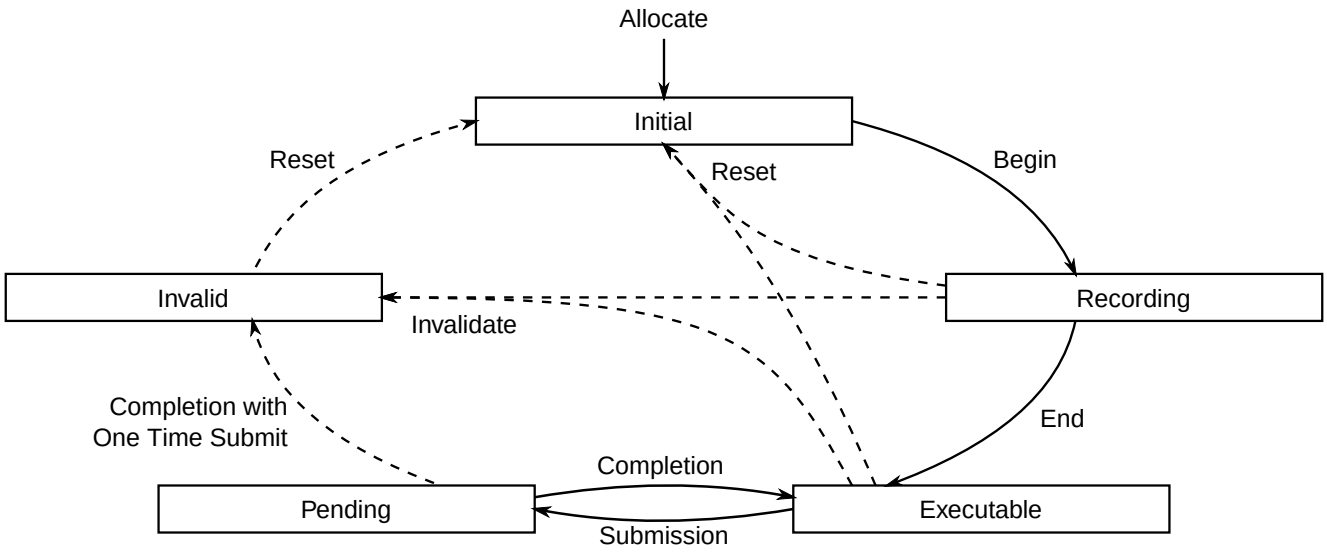

Figure 1. Lifecycle of a command buffer

Any given command that operates on a command buffer has its own requirements on what state a command buffer **must** be in, which are detailed in the valid usage constraints for that command.

Resetting a command buffer is an operation that discards any previously recorded commands and puts a command buffer in the *initial state*. Resetting occurs as a result of vkResetCommandBuffer or vkResetCommandPool, or as part of vkBeginCommandBuffer (which additionally puts the command buffer in the *recording state*).

Secondary command buffers **can** be recorded to a primary command buffer via

vkCmdExecuteCommands. This partially ties the lifecycle of the two command buffers together - if the primary is submitted to a queue, both the primary and any secondaries recorded to it move to the *pending state*. Once execution of the primary completes, so it does for any secondary recorded within it. After all executions of each command buffer complete, they each move to their appropriate completion state (either to the *executable state* or the *invalid state*, as specified above).

If a secondary moves to the *invalid state* or the *initial state*, then all primary buffers it is recorded in move to the *invalid state*. A primary moving to any other state does not affect the state of a secondary recorded in it.

NOTE	Resetting or freeing a primary command buffer removes the lifecycle linkage to all secondary command buffers that were recorded into it.

6.2. Command Pools

Command pools are opaque objects that command buffer memory is allocated from, and which allow the implementation to amortize the cost of resource creation across multiple command buffers. Command pools are externally synchronized, meaning that a command pool **must** not be used concurrently in multiple threads. That includes use via recording commands on any command buffers allocated from the pool, as well as operations that allocate, free, and reset command buffers or the pool itself.

Command pools are represented by `VkCommandPool` handles:

```
// Provided by VK_VERSION_1_0
VK_DEFINE_NON_DISPATCHABLE_HANDLE(VkCommandPool)
```

To create a command pool, call:

```
// Provided by VK_VERSION_1_0
VkResult vkCreateCommandPool(
    VkDevice                                    device,
    const VkCommandPoolCreateInfo*              pCreateInfo,
    const VkAllocationCallbacks*                pAllocator,
    VkCommandPool*                              pCommandPool);
```

- `device` is the logical device that creates the command pool.
- `pCreateInfo` is a pointer to a VkCommandPoolCreateInfo structure specifying the state of the command pool object.
- `pAllocator` controls host memory allocation as described in the Memory Allocation chapter.
- `pCommandPool` is a pointer to a VkCommandPool handle in which the created pool is returned.

Valid Usage

- VUID-vkCreateCommandPool-queueFamilyIndex-01937

`pCreateInfo->queueFamilyIndex` **must** be the index of a queue family available in the logical device `device`

Valid Usage (Implicit)

- VUID-vkCreateCommandPool-device-parameter
  `device` **must** be a valid VkDevice handle
- VUID-vkCreateCommandPool-pCreateInfo-parameter
  `pCreateInfo` **must** be a valid pointer to a valid VkCommandPoolCreateInfo structure
- VUID-vkCreateCommandPool-pAllocator-parameter
  If `pAllocator` is not `NULL`, `pAllocator` **must** be a valid pointer to a valid VkAllocationCallbacks structure
- VUID-vkCreateCommandPool-pCommandPool-parameter
  `pCommandPool` **must** be a valid pointer to a VkCommandPool handle

Return Codes

Success

- `VK_SUCCESS`

Failure

- `VK_ERROR_OUT_OF_HOST_MEMORY`
- `VK_ERROR_OUT_OF_DEVICE_MEMORY`

The `VkCommandPoolCreateInfo` structure is defined as:

```
// Provided by VK_VERSION_1_0
typedef struct VkCommandPoolCreateInfo {
    VkStructureType             sType;
    const void*                 pNext;
    VkCommandPoolCreateFlags    flags;
    uint32_t                    queueFamilyIndex;
} VkCommandPoolCreateInfo;
```

- `sType` is a VkStructureType value identifying this structure.
- `pNext` is `NULL` or a pointer to a structure extending this structure.
- `flags` is a bitmask of VkCommandPoolCreateFlagBits indicating usage behavior for the pool and command buffers allocated from it.
- `queueFamilyIndex` designates a queue family as described in section Queue Family Properties. All command buffers allocated from this command pool **must** be submitted on queues from the same queue family.

Valid Usage

- VUID-VkCommandPoolCreateInfo-flags-02860
  If the `protectedMemory` feature is not enabled, the `VK_COMMAND_POOL_CREATE_PROTECTED_BIT` bit of `flags` **must** not be set

Valid Usage (Implicit)

- VUID-VkCommandPoolCreateInfo-sType-sType
  `sType` **must** be `VK_STRUCTURE_TYPE_COMMAND_POOL_CREATE_INFO`
- VUID-VkCommandPoolCreateInfo-pNext-pNext
  `pNext` **must** be `NULL`
- VUID-VkCommandPoolCreateInfo-flags-parameter
  `flags` **must** be a valid combination of VkCommandPoolCreateFlagBits values

Bits which **can** be set in VkCommandPoolCreateInfo::`flags`, specifying usage behavior for a command pool, are:

```
// Provided by VK_VERSION_1_0
typedef enum VkCommandPoolCreateFlagBits {
    VK_COMMAND_POOL_CREATE_TRANSIENT_BIT = 0x00000001,
    VK_COMMAND_POOL_CREATE_RESET_COMMAND_BUFFER_BIT = 0x00000002,
  // Provided by VK_VERSION_1_1
    VK_COMMAND_POOL_CREATE_PROTECTED_BIT = 0x00000004,
} VkCommandPoolCreateFlagBits;
```

- `VK_COMMAND_POOL_CREATE_TRANSIENT_BIT` specifies that command buffers allocated from the pool will be short-lived, meaning that they will be reset or freed in a relatively short timeframe. This flag **may** be used by the implementation to control memory allocation behavior within the pool.
- `VK_COMMAND_POOL_CREATE_RESET_COMMAND_BUFFER_BIT` allows any command buffer allocated from a pool to be individually reset to the initial state; either by calling vkResetCommandBuffer, or via the implicit reset when calling vkBeginCommandBuffer. If this flag is not set on a pool, then `vkResetCommandBuffer` **must** not be called for any command buffer allocated from that pool.
- `VK_COMMAND_POOL_CREATE_PROTECTED_BIT` specifies that command buffers allocated from the pool are protected command buffers.

```
// Provided by VK_VERSION_1_0
typedef VkFlags VkCommandPoolCreateFlags;
```

`VkCommandPoolCreateFlags` is a bitmask type for setting a mask of zero or more VkCommandPoolCreateFlagBits.

To trim a command pool, call:

```
// Provided by VK_VERSION_1_1
void vkTrimCommandPool(
    VkDevice                                    device,
    VkCommandPool                               commandPool,
    VkCommandPoolTrimFlags                      flags);
```

- `device` is the logical device that owns the command pool.
- `commandPool` is the command pool to trim.
- `flags` is reserved for future use.

Trimming a command pool recycles unused memory from the command pool back to the system. Command buffers allocated from the pool are not affected by the command.

NOTE

This command provides applications with some control over the internal memory allocations used by command pools.

Unused memory normally arises from command buffers that have been recorded and later reset, such that they are no longer using the memory. On reset, a command buffer can return memory to its command pool, but the only way to release memory from a command pool to the system requires calling vkResetCommandPool, which cannot be executed while any command buffers from that pool are still in use. Subsequent recording operations into command buffers will reuse this memory but since total memory requirements fluctuate over time, unused memory can accumulate.

In this situation, trimming a command pool **may** be useful to return unused memory back to the system, returning the total outstanding memory allocated by the pool back to a more “average” value.

Implementations utilize many internal allocation strategies that make it impossible to guarantee that all unused memory is released back to the system. For instance, an implementation of a command pool **may** involve allocating memory in bulk from the system and sub-allocating from that memory. In such an implementation any live command buffer that holds a reference to a bulk allocation would prevent that allocation from being freed, even if only a small proportion of the bulk allocation is in use.

In most cases trimming will result in a reduction in allocated but unused memory, but it does not guarantee the “ideal” behavior.

Trimming **may** be an expensive operation, and **should** not be called frequently. Trimming **should** be treated as a way to relieve memory pressure after application-known points when there exists enough unused memory that the cost of trimming is “worth” it.

Valid Usage (Implicit)

- VUID-vkTrimCommandPool-device-parameter
  `device` **must** be a valid VkDevice handle
- VUID-vkTrimCommandPool-commandPool-parameter
  `commandPool` **must** be a valid VkCommandPool handle
- VUID-vkTrimCommandPool-flags-zerobitmask
  `flags` **must** be `0`
- VUID-vkTrimCommandPool-commandPool-parent
  `commandPool` **must** have been created, allocated, or retrieved from `device`

Host Synchronization

- Host access to `commandPool` **must** be externally synchronized

```
// Provided by VK_VERSION_1_1
typedef VkFlags VkCommandPoolTrimFlags;
```

`VkCommandPoolTrimFlags` is a bitmask type for setting a mask, but is currently reserved for future use.

To reset a command pool, call:

```
// Provided by VK_VERSION_1_0
VkResult vkResetCommandPool(
    VkDevice                                    device,
    VkCommandPool                               commandPool,
    VkCommandPoolResetFlags                     flags);
```

- `device` is the logical device that owns the command pool.
- `commandPool` is the command pool to reset.
- `flags` is a bitmask of VkCommandPoolResetFlagBits controlling the reset operation.

Resetting a command pool recycles all of the resources from all of the command buffers allocated from the command pool back to the command pool. All command buffers that have been allocated from the command pool are put in the initial state.

Any primary command buffer allocated from another VkCommandPool that is in the recording or executable state and has a secondary command buffer allocated from `commandPool` recorded into it, becomes invalid.

Valid Usage

- VUID-vkResetCommandPool-commandPool-00040
  All `VkCommandBuffer` objects allocated from `commandPool` **must** not be in the pending state

Valid Usage (Implicit)

- VUID-vkResetCommandPool-device-parameter
  `device` **must** be a valid VkDevice handle
- VUID-vkResetCommandPool-commandPool-parameter
  `commandPool` **must** be a valid VkCommandPool handle
- VUID-vkResetCommandPool-flags-parameter
  `flags` **must** be a valid combination of VkCommandPoolResetFlagBits values
- VUID-vkResetCommandPool-commandPool-parent
  `commandPool` **must** have been created, allocated, or retrieved from `device`

Host Synchronization

- Host access to `commandPool` **must** be externally synchronized

Return Codes

Success

- `VK_SUCCESS`

Failure

- `VK_ERROR_OUT_OF_DEVICE_MEMORY`

Bits which **can** be set in vkResetCommandPool::`flags`, controlling the reset operation, are:

```
// Provided by VK_VERSION_1_0
typedef enum VkCommandPoolResetFlagBits {
    VK_COMMAND_POOL_RESET_RELEASE_RESOURCES_BIT = 0x00000001,
} VkCommandPoolResetFlagBits;
```

- `VK_COMMAND_POOL_RESET_RELEASE_RESOURCES_BIT` specifies that resetting a command pool recycles all of the resources from the command pool back to the system.

```
// Provided by VK_VERSION_1_0
typedef VkFlags VkCommandPoolResetFlags;
```

VkCommandPoolResetFlags is a bitmask type for setting a mask of zero or more VkCommandPoolResetFlagBits.

To destroy a command pool, call:

```
// Provided by VK_VERSION_1_0
void vkDestroyCommandPool(
    VkDevice                                    device,
    VkCommandPool                               commandPool,
    const VkAllocationCallbacks*                pAllocator);
```

- device is the logical device that destroys the command pool.
- commandPool is the handle of the command pool to destroy.
- pAllocator controls host memory allocation as described in the Memory Allocation chapter.

When a pool is destroyed, all command buffers allocated from the pool are freed.

Any primary command buffer allocated from another VkCommandPool that is in the recording or executable state and has a secondary command buffer allocated from commandPool recorded into it, becomes invalid.

Valid Usage

- VUID-vkDestroyCommandPool-commandPool-00041
  All VkCommandBuffer objects allocated from commandPool **must** not be in the pending state
- VUID-vkDestroyCommandPool-commandPool-00042
  If VkAllocationCallbacks were provided when commandPool was created, a compatible set of callbacks **must** be provided here
- VUID-vkDestroyCommandPool-commandPool-00043
  If no VkAllocationCallbacks were provided when commandPool was created, pAllocator **must** be NULL

Valid Usage (Implicit)

- VUID-vkDestroyCommandPool-device-parameter
  device **must** be a valid VkDevice handle
- VUID-vkDestroyCommandPool-commandPool-parameter
  If commandPool is not VK_NULL_HANDLE, commandPool **must** be a valid VkCommandPool handle
- VUID-vkDestroyCommandPool-pAllocator-parameter
  If pAllocator is not NULL, pAllocator **must** be a valid pointer to a valid VkAllocationCallbacks structure
- VUID-vkDestroyCommandPool-commandPool-parent
  If commandPool is a valid handle, it **must** have been created, allocated, or retrieved from

`device`

Host Synchronization

- Host access to `commandPool` **must** be externally synchronized

6.3. Command Buffer Allocation and Management

To allocate command buffers, call:

```
// Provided by VK_VERSION_1_0
VkResult vkAllocateCommandBuffers(
    VkDevice                                    device,
    const VkCommandBufferAllocateInfo*          pAllocateInfo,
    VkCommandBuffer*                            pCommandBuffers);
```

- `device` is the logical device that owns the command pool.
- `pAllocateInfo` is a pointer to a VkCommandBufferAllocateInfo structure describing parameters of the allocation.
- `pCommandBuffers` is a pointer to an array of VkCommandBuffer handles in which the resulting command buffer objects are returned. The array **must** be at least the length specified by the `commandBufferCount` member of `pAllocateInfo`. Each allocated command buffer begins in the initial state.

`vkAllocateCommandBuffers` **can** be used to allocate multiple command buffers. If the allocation of any of those command buffers fails, the implementation **must** free all successfully allocated command buffer objects from this command, set all entries of the `pCommandBuffers` array to `NULL` and return the error.

NOTE Filling `pCommandBuffers` with `NULL` values on failure is an exception to the default error behavior that output parameters will have undefined contents.

When command buffers are first allocated, they are in the initial state.

Valid Usage (Implicit)

- VUID-vkAllocateCommandBuffers-device-parameter
  `device` **must** be a valid VkDevice handle
- VUID-vkAllocateCommandBuffers-pAllocateInfo-parameter
  `pAllocateInfo` **must** be a valid pointer to a valid VkCommandBufferAllocateInfo structure
- VUID-vkAllocateCommandBuffers-pCommandBuffers-parameter
  `pCommandBuffers` **must** be a valid pointer to an array of `pAllocateInfo->commandBufferCount` VkCommandBuffer handles

- VUID-vkAllocateCommandBuffers-pAllocateInfo::commandBufferCount-arraylength
  `pAllocateInfo->commandBufferCount` **must** be greater than `0`

Host Synchronization

- Host access to `pAllocateInfo->commandPool` **must** be externally synchronized

Return Codes

Success

- `VK_SUCCESS`

Failure

- `VK_ERROR_OUT_OF_HOST_MEMORY`
- `VK_ERROR_OUT_OF_DEVICE_MEMORY`

The `VkCommandBufferAllocateInfo` structure is defined as:

```
// Provided by VK_VERSION_1_0
typedef struct VkCommandBufferAllocateInfo {
    VkStructureType         sType;
    const void*             pNext;
    VkCommandPool           commandPool;
    VkCommandBufferLevel    level;
    uint32_t                commandBufferCount;
} VkCommandBufferAllocateInfo;
```

- `sType` is a VkStructureType value identifying this structure.
- `pNext` is `NULL` or a pointer to a structure extending this structure.
- `commandPool` is the command pool from which the command buffers are allocated.
- `level` is a VkCommandBufferLevel value specifying the command buffer level.
- `commandBufferCount` is the number of command buffers to allocate from the pool.

Valid Usage (Implicit)

- VUID-VkCommandBufferAllocateInfo-sType-sType
  `sType` **must** be `VK_STRUCTURE_TYPE_COMMAND_BUFFER_ALLOCATE_INFO`
- VUID-VkCommandBufferAllocateInfo-pNext-pNext
  `pNext` **must** be `NULL`
- VUID-VkCommandBufferAllocateInfo-commandPool-parameter
  `commandPool` **must** be a valid VkCommandPool handle

- VUID-VkCommandBufferAllocateInfo-level-parameter
  `level` **must** be a valid VkCommandBufferLevel value

Possible values of VkCommandBufferAllocateInfo::`level`, specifying the command buffer level, are:

```
// Provided by VK_VERSION_1_0
typedef enum VkCommandBufferLevel {
    VK_COMMAND_BUFFER_LEVEL_PRIMARY = 0,
    VK_COMMAND_BUFFER_LEVEL_SECONDARY = 1,
} VkCommandBufferLevel;
```

- `VK_COMMAND_BUFFER_LEVEL_PRIMARY` specifies a primary command buffer.
- `VK_COMMAND_BUFFER_LEVEL_SECONDARY` specifies a secondary command buffer.

To reset a command buffer, call:

```
// Provided by VK_VERSION_1_0
VkResult vkResetCommandBuffer(
    VkCommandBuffer                             commandBuffer,
    VkCommandBufferResetFlags                   flags);
```

- `commandBuffer` is the command buffer to reset. The command buffer **can** be in any state other than pending, and is moved into the initial state.
- `flags` is a bitmask of VkCommandBufferResetFlagBits controlling the reset operation.

Any primary command buffer that is in the recording or executable state and has `commandBuffer` recorded into it, becomes invalid.

Valid Usage

- VUID-vkResetCommandBuffer-commandBuffer-00045
  `commandBuffer` **must** not be in the pending state
- VUID-vkResetCommandBuffer-commandBuffer-00046
  `commandBuffer` **must** have been allocated from a pool that was created with the `VK_COMMAND_POOL_CREATE_RESET_COMMAND_BUFFER_BIT`

Valid Usage (Implicit)

- VUID-vkResetCommandBuffer-commandBuffer-parameter
  `commandBuffer` **must** be a valid VkCommandBuffer handle
- VUID-vkResetCommandBuffer-flags-parameter
  `flags` **must** be a valid combination of VkCommandBufferResetFlagBits values

Host Synchronization

- Host access to `commandBuffer` **must** be externally synchronized
- Host access to the `VkCommandPool` that `commandBuffer` was allocated from **must** be externally synchronized

Return Codes

Success

- `VK_SUCCESS`

Failure

- `VK_ERROR_OUT_OF_DEVICE_MEMORY`

Bits which **can** be set in vkResetCommandBuffer::`flags`, controlling the reset operation, are:

```
// Provided by VK_VERSION_1_0
typedef enum VkCommandBufferResetFlagBits {
    VK_COMMAND_BUFFER_RESET_RELEASE_RESOURCES_BIT = 0x00000001,
} VkCommandBufferResetFlagBits;
```

- `VK_COMMAND_BUFFER_RESET_RELEASE_RESOURCES_BIT` specifies that most or all memory resources currently owned by the command buffer **should** be returned to the parent command pool. If this flag is not set, then the command buffer **may** hold onto memory resources and reuse them when recording commands. `commandBuffer` is moved to the initial state.

```
// Provided by VK_VERSION_1_0
typedef VkFlags VkCommandBufferResetFlags;
```

`VkCommandBufferResetFlags` is a bitmask type for setting a mask of zero or more VkCommandBufferResetFlagBits.

To free command buffers, call:

```
// Provided by VK_VERSION_1_0
void vkFreeCommandBuffers(
    VkDevice                                    device,
    VkCommandPool                               commandPool,
    uint32_t                                    commandBufferCount,
    const VkCommandBuffer*                      pCommandBuffers);
```

- `device` is the logical device that owns the command pool.
- `commandPool` is the command pool from which the command buffers were allocated.

- `commandBufferCount` is the length of the `pCommandBuffers` array.
- `pCommandBuffers` is a pointer to an array of handles of command buffers to free.

Any primary command buffer that is in the recording or executable state and has any element of `pCommandBuffers` recorded into it, becomes invalid.

Valid Usage

- VUID-vkFreeCommandBuffers-pCommandBuffers-00047
  All elements of `pCommandBuffers` **must** not be in the pending state
- VUID-vkFreeCommandBuffers-pCommandBuffers-00048
  `pCommandBuffers` **must** be a valid pointer to an array of `commandBufferCount` `VkCommandBuffer` handles, each element of which **must** either be a valid handle or `NULL`

Valid Usage (Implicit)

- VUID-vkFreeCommandBuffers-device-parameter
  `device` **must** be a valid VkDevice handle
- VUID-vkFreeCommandBuffers-commandPool-parameter
  `commandPool` **must** be a valid VkCommandPool handle
- VUID-vkFreeCommandBuffers-commandBufferCount-arraylength
  `commandBufferCount` **must** be greater than `0`
- VUID-vkFreeCommandBuffers-commandPool-parent
  `commandPool` **must** have been created, allocated, or retrieved from `device`
- VUID-vkFreeCommandBuffers-pCommandBuffers-parent
  Each element of `pCommandBuffers` that is a valid handle **must** have been created, allocated, or retrieved from `commandPool`

Host Synchronization

- Host access to `commandPool` **must** be externally synchronized
- Host access to each member of `pCommandBuffers` **must** be externally synchronized

6.4. Command Buffer Recording

To begin recording a command buffer, call:

```
// Provided by VK_VERSION_1_0
VkResult vkBeginCommandBuffer(
    VkCommandBuffer                             commandBuffer,
    const VkCommandBufferBeginInfo*             pBeginInfo);
```

- `commandBuffer` is the handle of the command buffer which is to be put in the recording state.
- `pBeginInfo` is a pointer to a VkCommandBufferBeginInfo structure defining additional information about how the command buffer begins recording.

Valid Usage

- VUID-vkBeginCommandBuffer-commandBuffer-00049
  `commandBuffer` **must** not be in the recording or pending state
- VUID-vkBeginCommandBuffer-commandBuffer-00050
  If `commandBuffer` was allocated from a VkCommandPool which did not have the `VK_COMMAND_POOL_CREATE_RESET_COMMAND_BUFFER_BIT` flag set, `commandBuffer` **must** be in the initial state
- VUID-vkBeginCommandBuffer-commandBuffer-00051
  If `commandBuffer` is a secondary command buffer, the `pInheritanceInfo` member of `pBeginInfo` **must** be a valid `VkCommandBufferInheritanceInfo` structure
- VUID-vkBeginCommandBuffer-commandBuffer-00052
  If `commandBuffer` is a secondary command buffer and either the `occlusionQueryEnable` member of the `pInheritanceInfo` member of `pBeginInfo` is `VK_FALSE`, or the `occlusionQueryPrecise` feature is not enabled, then `pBeginInfo->pInheritanceInfo->queryFlags` **must** not contain `VK_QUERY_CONTROL_PRECISE_BIT`
- VUID-vkBeginCommandBuffer-commandBuffer-02840
  If `commandBuffer` is a primary command buffer, then `pBeginInfo->flags` **must** not set both the `VK_COMMAND_BUFFER_USAGE_ONE_TIME_SUBMIT_BIT` and the `VK_COMMAND_BUFFER_USAGE_SIMULTANEOUS_USE_BIT` flags

Valid Usage (Implicit)

- VUID-vkBeginCommandBuffer-commandBuffer-parameter
  `commandBuffer` **must** be a valid VkCommandBuffer handle
- VUID-vkBeginCommandBuffer-pBeginInfo-parameter
  `pBeginInfo` **must** be a valid pointer to a valid VkCommandBufferBeginInfo structure

Host Synchronization

- Host access to `commandBuffer` **must** be externally synchronized
- Host access to the `VkCommandPool` that `commandBuffer` was allocated from **must** be externally synchronized

Return Codes

Success

- VK_SUCCESS

Failure

- VK_ERROR_OUT_OF_HOST_MEMORY
- VK_ERROR_OUT_OF_DEVICE_MEMORY

The VkCommandBufferBeginInfo structure is defined as:

```
// Provided by VK_VERSION_1_0
typedef struct VkCommandBufferBeginInfo {
    VkStructureType                          sType;
    const void*                              pNext;
    VkCommandBufferUsageFlags                flags;
    const VkCommandBufferInheritanceInfo*    pInheritanceInfo;
} VkCommandBufferBeginInfo;
```

- sType is a VkStructureType value identifying this structure.
- pNext is NULL or a pointer to a structure extending this structure.
- flags is a bitmask of VkCommandBufferUsageFlagBits specifying usage behavior for the command buffer.
- pInheritanceInfo is a pointer to a VkCommandBufferInheritanceInfo structure, used if commandBuffer is a secondary command buffer. If this is a primary command buffer, then this value is ignored.

Valid Usage

- VUID-VkCommandBufferBeginInfo-flags-09123
  If flags contains VK_COMMAND_BUFFER_USAGE_RENDER_PASS_CONTINUE_BIT, the VkCommandPool that commandBuffer was allocated from **must** support graphics operations
- VUID-VkCommandBufferBeginInfo-flags-00055
  If flags contains VK_COMMAND_BUFFER_USAGE_RENDER_PASS_CONTINUE_BIT, the framebuffer member of pInheritanceInfo **must** be either VK_NULL_HANDLE, or a valid VkFramebuffer that is compatible with the renderPass member of pInheritanceInfo
- VUID-VkCommandBufferBeginInfo-flags-09240
  If flags contains VK_COMMAND_BUFFER_USAGE_RENDER_PASS_CONTINUE_BIT and the dynamicRendering feature is not enabled, the renderPass member of pInheritanceInfo **must** not be VK_NULL_HANDLE
- VUID-VkCommandBufferBeginInfo-flags-06002
  If flags contains VK_COMMAND_BUFFER_USAGE_RENDER_PASS_CONTINUE_BIT and the renderPass member of pInheritanceInfo is VK_NULL_HANDLE, the pNext chain of pInheritanceInfo

must include a VkCommandBufferInheritanceRenderingInfo structure

- VUID-VkCommandBufferBeginInfo-flags-06000
  If `flags` contains `VK_COMMAND_BUFFER_USAGE_RENDER_PASS_CONTINUE_BIT` and the `renderPass` member of `pInheritanceInfo` is not VK_NULL_HANDLE, the `renderPass` member of `pInheritanceInfo` **must** be a valid `VkRenderPass`
- VUID-VkCommandBufferBeginInfo-flags-06001
  If `flags` contains `VK_COMMAND_BUFFER_USAGE_RENDER_PASS_CONTINUE_BIT` and the `renderPass` member of `pInheritanceInfo` is not VK_NULL_HANDLE, the `subpass` member of `pInheritanceInfo` **must** be a valid subpass index within the `renderPass` member of `pInheritanceInfo`

Valid Usage (Implicit)

- VUID-VkCommandBufferBeginInfo-sType-sType
  `sType` **must** be `VK_STRUCTURE_TYPE_COMMAND_BUFFER_BEGIN_INFO`
- VUID-VkCommandBufferBeginInfo-pNext-pNext
  `pNext` **must** be `NULL` or a pointer to a valid instance of VkDeviceGroupCommandBufferBeginInfo
- VUID-VkCommandBufferBeginInfo-sType-unique
  The `sType` value of each struct in the `pNext` chain **must** be unique
- VUID-VkCommandBufferBeginInfo-flags-parameter
  `flags` **must** be a valid combination of VkCommandBufferUsageFlagBits values

Bits which **can** be set in VkCommandBufferBeginInfo::`flags`, specifying usage behavior for a command buffer, are:

```
// Provided by VK_VERSION_1_0
typedef enum VkCommandBufferUsageFlagBits {
    VK_COMMAND_BUFFER_USAGE_ONE_TIME_SUBMIT_BIT = 0x00000001,
    VK_COMMAND_BUFFER_USAGE_RENDER_PASS_CONTINUE_BIT = 0x00000002,
    VK_COMMAND_BUFFER_USAGE_SIMULTANEOUS_USE_BIT = 0x00000004,
} VkCommandBufferUsageFlagBits;
```

- `VK_COMMAND_BUFFER_USAGE_ONE_TIME_SUBMIT_BIT` specifies that each recording of the command buffer will only be submitted once, and the command buffer will be reset and recorded again between each submission.
- `VK_COMMAND_BUFFER_USAGE_RENDER_PASS_CONTINUE_BIT` specifies that a secondary command buffer is considered to be entirely inside a render pass. If this is a primary command buffer, then this bit is ignored.
- `VK_COMMAND_BUFFER_USAGE_SIMULTANEOUS_USE_BIT` specifies that a command buffer **can** be resubmitted to any queue of the same queue family while it is in the *pending state*, and recorded into multiple primary command buffers.

```
// Provided by VK_VERSION_1_0
typedef VkFlags VkCommandBufferUsageFlags;
```

VkCommandBufferUsageFlags is a bitmask type for setting a mask of zero or more VkCommandBufferUsageFlagBits.

If the command buffer is a secondary command buffer, then the VkCommandBufferInheritanceInfo structure defines any state that will be inherited from the primary command buffer:

```
// Provided by VK_VERSION_1_0
typedef struct VkCommandBufferInheritanceInfo {
    VkStructureType                  sType;
    const void*                      pNext;
    VkRenderPass                     renderPass;
    uint32_t                         subpass;
    VkFramebuffer                    framebuffer;
    VkBool32                         occlusionQueryEnable;
    VkQueryControlFlags              queryFlags;
    VkQueryPipelineStatisticFlags    pipelineStatistics;
} VkCommandBufferInheritanceInfo;
```

- sType is a VkStructureType value identifying this structure.
- pNext is NULL or a pointer to a structure extending this structure.
- renderPass is a VkRenderPass object defining which render passes the VkCommandBuffer will be compatible with and **can** be executed within.
- subpass is the index of the subpass within the render pass instance that the VkCommandBuffer will be executed within.
- framebuffer **can** refer to the VkFramebuffer object that the VkCommandBuffer will be rendering to if it is executed within a render pass instance. It **can** be VK_NULL_HANDLE if the framebuffer is not known.

> **NOTE** Specifying the exact framebuffer that the secondary command buffer will be executed with **may** result in better performance at command buffer execution time.

- occlusionQueryEnable specifies whether the command buffer **can** be executed while an occlusion query is active in the primary command buffer. If this is VK_TRUE, then this command buffer **can** be executed whether the primary command buffer has an occlusion query active or not. If this is VK_FALSE, then the primary command buffer **must** not have an occlusion query active.
- queryFlags specifies the query flags that **can** be used by an active occlusion query in the primary command buffer when this secondary command buffer is executed. If this value includes the VK_QUERY_CONTROL_PRECISE_BIT bit, then the active query **can** return boolean results or actual sample counts. If this bit is not set, then the active query **must** not use the VK_QUERY_CONTROL_PRECISE_BIT bit.

- `pipelineStatistics` is a bitmask of VkQueryPipelineStatisticFlagBits specifying the set of pipeline statistics that **can** be counted by an active query in the primary command buffer when this secondary command buffer is executed. If this value includes a given bit, then this command buffer **can** be executed whether the primary command buffer has a pipeline statistics query active that includes this bit or not. If this value excludes a given bit, then the active pipeline statistics query **must** not be from a query pool that counts that statistic.

If the VkCommandBuffer will not be executed within a render pass instance, or if the render pass instance was begun with vkCmdBeginRendering, `renderPass`, `subpass`, and `framebuffer` are ignored.

Valid Usage

- VUID-VkCommandBufferInheritanceInfo-occlusionQueryEnable-00056
  If the `inheritedQueries` feature is not enabled, `occlusionQueryEnable` **must** be `VK_FALSE`
- VUID-VkCommandBufferInheritanceInfo-queryFlags-00057
  If the `inheritedQueries` feature is enabled, `queryFlags` **must** be a valid combination of VkQueryControlFlagBits values
- VUID-VkCommandBufferInheritanceInfo-queryFlags-02788
  If the `inheritedQueries` feature is not enabled, `queryFlags` **must** be `0`
- VUID-VkCommandBufferInheritanceInfo-pipelineStatistics-02789
  If the `pipelineStatisticsQuery` feature is enabled, `pipelineStatistics` **must** be a valid combination of VkQueryPipelineStatisticFlagBits values
- VUID-VkCommandBufferInheritanceInfo-pipelineStatistics-00058
  If the `pipelineStatisticsQuery` feature is not enabled, `pipelineStatistics` **must** be `0`

Valid Usage (Implicit)

- VUID-VkCommandBufferInheritanceInfo-sType-sType
  `sType` **must** be `VK_STRUCTURE_TYPE_COMMAND_BUFFER_INHERITANCE_INFO`
- VUID-VkCommandBufferInheritanceInfo-pNext-pNext
  `pNext` **must** be `NULL` or a pointer to a valid instance of VkCommandBufferInheritanceRenderingInfo
- VUID-VkCommandBufferInheritanceInfo-sType-unique
  The `sType` value of each struct in the `pNext` chain **must** be unique
- VUID-VkCommandBufferInheritanceInfo-commonparent
  Both of `framebuffer`, and `renderPass` that are valid handles of non-ignored parameters **must** have been created, allocated, or retrieved from the same VkDevice

NOTE	On some implementations, not using the `VK_COMMAND_BUFFER_USAGE_SIMULTANEOUS_USE_BIT` bit enables command buffers to be patched in-place if needed, rather than creating a copy of the command buffer.

If a command buffer is in the invalid, or executable state, and the command buffer was allocated

from a command pool with the VK_COMMAND_POOL_CREATE_RESET_COMMAND_BUFFER_BIT flag set, then vkBeginCommandBuffer implicitly resets the command buffer, behaving as if vkResetCommandBuffer had been called with VK_COMMAND_BUFFER_RESET_RELEASE_RESOURCES_BIT not set. After the implicit reset, commandBuffer is moved to the recording state.

The VkCommandBufferInheritanceRenderingInfo structure is defined as:

```
// Provided by VK_VERSION_1_3
typedef struct VkCommandBufferInheritanceRenderingInfo {
    VkStructureType          sType;
    const void*              pNext;
    VkRenderingFlags         flags;
    uint32_t                 viewMask;
    uint32_t                 colorAttachmentCount;
    const VkFormat*          pColorAttachmentFormats;
    VkFormat                 depthAttachmentFormat;
    VkFormat                 stencilAttachmentFormat;
    VkSampleCountFlagBits    rasterizationSamples;
} VkCommandBufferInheritanceRenderingInfo;
```

- sType is a VkStructureType value identifying this structure.
- pNext is NULL or a pointer to a structure extending this structure
- flags is a bitmask of VkRenderingFlagBits used by the render pass instance.
- viewMask is the view mask used for rendering.
- colorAttachmentCount is the number of color attachments specified in the render pass instance.
- pColorAttachmentFormats is a pointer to an array of VkFormat values defining the format of color attachments.
- depthAttachmentFormat is a VkFormat value defining the format of the depth attachment.
- stencilAttachmentFormat is a VkFormat value defining the format of the stencil attachment.
- rasterizationSamples is a VkSampleCountFlagBits specifying the number of samples used in rasterization.

If the pNext chain of VkCommandBufferInheritanceInfo includes a VkCommandBufferInheritanceRenderingInfo structure, then that structure controls parameters of dynamic render pass instances that the VkCommandBuffer **can** be executed within. If VkCommandBufferInheritanceInfo::renderPass is not VK_NULL_HANDLE, or VK_COMMAND_BUFFER_USAGE_RENDER_PASS_CONTINUE_BIT is not specified in VkCommandBufferBeginInfo::flags, parameters of this structure are ignored.

If colorAttachmentCount is 0 and the variableMultisampleRate feature is enabled, rasterizationSamples is ignored.

If depthAttachmentFormat, stencilAttachmentFormat, or any element of pColorAttachmentFormats is VK_FORMAT_UNDEFINED, it indicates that the corresponding attachment is unused within the render pass and writes to those attachments are discarded.

Valid Usage

- VUID-VkCommandBufferInheritanceRenderingInfo-colorAttachmentCount-06004
  If `colorAttachmentCount` is not `0`, `rasterizationSamples` **must** be a valid VkSampleCountFlagBits value
- VUID-VkCommandBufferInheritanceRenderingInfo-variableMultisampleRate-06005
  If the `variableMultisampleRate` feature is not enabled, `rasterizationSamples` **must** be a valid VkSampleCountFlagBits value
- VUID-VkCommandBufferInheritanceRenderingInfo-depthAttachmentFormat-06540
  If `depthAttachmentFormat` is not `VK_FORMAT_UNDEFINED`, it **must** be a format that includes a depth component
- VUID-VkCommandBufferInheritanceRenderingInfo-depthAttachmentFormat-06007
  If `depthAttachmentFormat` is not `VK_FORMAT_UNDEFINED`, it **must** be a format with potential format features that include `VK_FORMAT_FEATURE_DEPTH_STENCIL_ATTACHMENT_BIT`
- VUID-VkCommandBufferInheritanceRenderingInfo-pColorAttachmentFormats-06492
  If any element of `pColorAttachmentFormats` is not `VK_FORMAT_UNDEFINED`, it **must** be a format with potential format features that include `VK_FORMAT_FEATURE_COLOR_ATTACHMENT_BIT`
- VUID-VkCommandBufferInheritanceRenderingInfo-stencilAttachmentFormat-06541
  If `stencilAttachmentFormat` is not `VK_FORMAT_UNDEFINED`, it **must** be a format that includes a stencil aspect
- VUID-VkCommandBufferInheritanceRenderingInfo-stencilAttachmentFormat-06199
  If `stencilAttachmentFormat` is not `VK_FORMAT_UNDEFINED`, it **must** be a format with potential format features that include `VK_FORMAT_FEATURE_DEPTH_STENCIL_ATTACHMENT_BIT`
- VUID-VkCommandBufferInheritanceRenderingInfo-depthAttachmentFormat-06200
  If `depthAttachmentFormat` is not `VK_FORMAT_UNDEFINED` and `stencilAttachmentFormat` is not `VK_FORMAT_UNDEFINED`, `depthAttachmentFormat` **must** equal `stencilAttachmentFormat`
- VUID-VkCommandBufferInheritanceRenderingInfo-multiview-06008
  If the `multiview` feature is not enabled, `viewMask` **must** be `0`
- VUID-VkCommandBufferInheritanceRenderingInfo-viewMask-06009
  The index of the most significant bit in `viewMask` **must** be less than `maxMultiviewViewCount`

Valid Usage (Implicit)

- VUID-VkCommandBufferInheritanceRenderingInfo-sType-sType
  `sType` **must** be `VK_STRUCTURE_TYPE_COMMAND_BUFFER_INHERITANCE_RENDERING_INFO`
- VUID-VkCommandBufferInheritanceRenderingInfo-flags-parameter
  `flags` **must** be a valid combination of VkRenderingFlagBits values
- VUID-VkCommandBufferInheritanceRenderingInfo-pColorAttachmentFormats-parameter
  If `colorAttachmentCount` is not `0`, `pColorAttachmentFormats` **must** be a valid pointer to an array of `colorAttachmentCount` valid VkFormat values
- VUID-VkCommandBufferInheritanceRenderingInfo-depthAttachmentFormat-parameter

`depthAttachmentFormat` **must** be a valid VkFormat value

- VUID-VkCommandBufferInheritanceRenderingInfo-stencilAttachmentFormat-parameter
  `stencilAttachmentFormat` **must** be a valid VkFormat value
- VUID-VkCommandBufferInheritanceRenderingInfo-rasterizationSamples-parameter
  If `rasterizationSamples` is not `0`, `rasterizationSamples` **must** be a valid VkSampleCountFlagBits value

Once recording starts, an application records a sequence of commands (`vkCmd*`) to set state in the command buffer, draw, dispatch, and other commands.

To complete recording of a command buffer, call:

```
// Provided by VK_VERSION_1_0
VkResult vkEndCommandBuffer(
    VkCommandBuffer                             commandBuffer);
```

- `commandBuffer` is the command buffer to complete recording.

The command buffer **must** have been in the recording state, and, if successful, is moved to the executable state.

If there was an error during recording, the application will be notified by an unsuccessful return code returned by `vkEndCommandBuffer`, and the command buffer will be moved to the invalid state.

Valid Usage

- VUID-vkEndCommandBuffer-commandBuffer-00059
  `commandBuffer` **must** be in the recording state
- VUID-vkEndCommandBuffer-commandBuffer-00060
  If `commandBuffer` is a primary command buffer, there **must** not be an active render pass instance
- VUID-vkEndCommandBuffer-commandBuffer-00061
  All queries made active during the recording of `commandBuffer` **must** have been made inactive

Valid Usage (Implicit)

- VUID-vkEndCommandBuffer-commandBuffer-parameter
  `commandBuffer` **must** be a valid VkCommandBuffer handle

Host Synchronization

- Host access to `commandBuffer` **must** be externally synchronized

- Host access to the VkCommandPool that commandBuffer was allocated from **must** be externally synchronized

Return Codes

Success

- VK_SUCCESS

Failure

- VK_ERROR_OUT_OF_HOST_MEMORY
- VK_ERROR_OUT_OF_DEVICE_MEMORY

When a command buffer is in the executable state, it **can** be submitted to a queue for execution.

6.5. Command Buffer Submission

NOTE Submission can be a high overhead operation, and applications **should** attempt to batch work together into as few calls to vkQueueSubmit or vkQueueSubmit2 as possible.

To submit command buffers to a queue, call:

```
// Provided by VK_VERSION_1_3
VkResult vkQueueSubmit2(
    VkQueue                                     queue,
    uint32_t                                    submitCount,
    const VkSubmitInfo2*                        pSubmits,
    VkFence                                     fence);
```

- queue is the queue that the command buffers will be submitted to.
- submitCount is the number of elements in the pSubmits array.
- pSubmits is a pointer to an array of VkSubmitInfo2 structures, each specifying a command buffer submission batch.
- fence is an **optional** handle to a fence to be signaled once all submitted command buffers have completed execution. If fence is not VK_NULL_HANDLE, it defines a fence signal operation.

vkQueueSubmit2 is a queue submission command, with each batch defined by an element of pSubmits.

Semaphore operations submitted with vkQueueSubmit2 have additional ordering constraints compared to other submission commands, with dependencies involving previous and subsequent queue operations. Information about these additional constraints can be found in the semaphore section of the synchronization chapter.

If any command buffer submitted to this queue is in the executable state, it is moved to the pending state. Once execution of all submissions of a command buffer complete, it moves from the pending

state, back to the executable state. If a command buffer was recorded with the VK_COMMAND_BUFFER_USAGE_ONE_TIME_SUBMIT_BIT flag, it instead moves back to the invalid state.

If vkQueueSubmit2 fails, it **may** return VK_ERROR_OUT_OF_HOST_MEMORY or VK_ERROR_OUT_OF_DEVICE_MEMORY. If it does, the implementation **must** ensure that the state and contents of any resources or synchronization primitives referenced by the submitted command buffers and any semaphores referenced by pSubmits is unaffected by the call or its failure. If vkQueueSubmit2 fails in such a way that the implementation is unable to make that guarantee, the implementation **must** return VK_ERROR_DEVICE_LOST. See Lost Device.

Valid Usage

- VUID-vkQueueSubmit2-fence-04894
  If fence is not VK_NULL_HANDLE, fence **must** be unsignaled
- VUID-vkQueueSubmit2-fence-04895
  If fence is not VK_NULL_HANDLE, fence **must** not be associated with any other queue command that has not yet completed execution on that queue
- VUID-vkQueueSubmit2-synchronization2-03866
  The synchronization2 feature **must** be enabled
- VUID-vkQueueSubmit2-commandBuffer-03867
  If a command recorded into the commandBuffer member of any element of the pCommandBufferInfos member of any element of pSubmits referenced a VkEvent, that event **must** not be referenced by a command that has been submitted to another queue and is still in the *pending state*
- VUID-vkQueueSubmit2-semaphore-03868
  The semaphore member of any binary semaphore element of the pSignalSemaphoreInfos member of any element of pSubmits **must** be unsignaled when the semaphore signal operation it defines is executed on the device
- VUID-vkQueueSubmit2-stageMask-03869
  The stageMask member of any element of the pSignalSemaphoreInfos member of any element of pSubmits **must** only include pipeline stages that are supported by the queue family which queue belongs to
- VUID-vkQueueSubmit2-stageMask-03870
  The stageMask member of any element of the pWaitSemaphoreInfos member of any element of pSubmits **must** only include pipeline stages that are supported by the queue family which queue belongs to
- VUID-vkQueueSubmit2-semaphore-03871
  When a semaphore wait operation for a binary semaphore is executed, as defined by the semaphore member of any element of the pWaitSemaphoreInfos member of any element of pSubmits, there **must** be no other queues waiting on the same semaphore
- VUID-vkQueueSubmit2-semaphore-03873
  The semaphore member of any element of the pWaitSemaphoreInfos member of any element of pSubmits that was created with a VkSemaphoreTypeKHR of VK_SEMAPHORE_TYPE_BINARY_KHR **must** reference a semaphore signal operation that has been submitted for execution and

any semaphore signal operations on which it depends **must** have also been submitted for execution

- VUID-vkQueueSubmit2-commandBuffer-03874
  The `commandBuffer` member of any element of the `pCommandBufferInfos` member of any element of `pSubmits` **must** be in the pending or executable state
- VUID-vkQueueSubmit2-commandBuffer-03875
  If a command recorded into the `commandBuffer` member of any element of the `pCommandBufferInfos` member of any element of `pSubmits` was not recorded with the `VK_COMMAND_BUFFER_USAGE_SIMULTANEOUS_USE_BIT`, it **must** not be in the pending state
- VUID-vkQueueSubmit2-commandBuffer-03876
  Any secondary command buffers recorded into the `commandBuffer` member of any element of the `pCommandBufferInfos` member of any element of `pSubmits` **must** be in the pending or executable state
- VUID-vkQueueSubmit2-commandBuffer-03877
  If any secondary command buffers recorded into the `commandBuffer` member of any element of the `pCommandBufferInfos` member of any element of `pSubmits` was not recorded with the `VK_COMMAND_BUFFER_USAGE_SIMULTANEOUS_USE_BIT`, it **must** not be in the pending state
- VUID-vkQueueSubmit2-commandBuffer-03878
  The `commandBuffer` member of any element of the `pCommandBufferInfos` member of any element of `pSubmits` **must** have been allocated from a `VkCommandPool` that was created for the same queue family `queue` belongs to
- VUID-vkQueueSubmit2-commandBuffer-03879
  If a command recorded into the `commandBuffer` member of any element of the `pCommandBufferInfos` member of any element of `pSubmits` includes a Queue Family Ownership Transfer Acquire Operation, there **must** exist a previously submitted Queue Family Ownership Transfer Release Operation on a queue in the queue family identified by the acquire operation, with parameters matching the acquire operation as defined in the definition of such acquire operations, and which happens before the acquire operation
- VUID-vkQueueSubmit2-queue-06447
  If `queue` was not created with `VK_DEVICE_QUEUE_CREATE_PROTECTED_BIT`, the `flags` member of any element of `pSubmits` **must** not include `VK_SUBMIT_PROTECTED_BIT_KHR`

Valid Usage (Implicit)

- VUID-vkQueueSubmit2-queue-parameter
  `queue` **must** be a valid VkQueue handle
- VUID-vkQueueSubmit2-pSubmits-parameter
  If `submitCount` is not `0`, `pSubmits` **must** be a valid pointer to an array of `submitCount` valid VkSubmitInfo2 structures
- VUID-vkQueueSubmit2-fence-parameter
  If `fence` is not VK_NULL_HANDLE, `fence` **must** be a valid VkFence handle

- VUID-vkQueueSubmit2-commonparent
  Both of `fence`, and `queue` that are valid handles of non-ignored parameters **must** have been created, allocated, or retrieved from the same VkDevice

Host Synchronization

- Host access to `queue` **must** be externally synchronized
- Host access to `fence` **must** be externally synchronized

Command Properties

Command Buffer Levels	Render Pass Scope	Supported Queue Types	Command Type
-	-	Any	-

Return Codes

Success

- `VK_SUCCESS`

Failure

- `VK_ERROR_OUT_OF_HOST_MEMORY`
- `VK_ERROR_OUT_OF_DEVICE_MEMORY`
- `VK_ERROR_DEVICE_LOST`

The `VkSubmitInfo2` structure is defined as:

```
// Provided by VK_VERSION_1_3
typedef struct VkSubmitInfo2 {
    VkStructureType                       sType;
    const void*                           pNext;
    VkSubmitFlags                         flags;
    uint32_t                              waitSemaphoreInfoCount;
    const VkSemaphoreSubmitInfo*          pWaitSemaphoreInfos;
    uint32_t                              commandBufferInfoCount;
    const VkCommandBufferSubmitInfo*      pCommandBufferInfos;
    uint32_t                              signalSemaphoreInfoCount;
    const VkSemaphoreSubmitInfo*          pSignalSemaphoreInfos;
} VkSubmitInfo2;
```

- `sType` is a VkStructureType value identifying this structure.
- `pNext` is `NULL` or a pointer to a structure extending this structure.

- `flags` is a bitmask of VkSubmitFlagBits.
- `waitSemaphoreInfoCount` is the number of elements in `pWaitSemaphoreInfos`.
- `pWaitSemaphoreInfos` is a pointer to an array of VkSemaphoreSubmitInfo structures defining semaphore wait operations.
- `commandBufferInfoCount` is the number of elements in `pCommandBufferInfos` and the number of command buffers to execute in the batch.
- `pCommandBufferInfos` is a pointer to an array of VkCommandBufferSubmitInfo structures describing command buffers to execute in the batch.
- `signalSemaphoreInfoCount` is the number of elements in `pSignalSemaphoreInfos`.
- `pSignalSemaphoreInfos` is a pointer to an array of VkSemaphoreSubmitInfo describing semaphore signal operations.

Valid Usage

- VUID-VkSubmitInfo2-flags-03886
  If `flags` includes `VK_SUBMIT_PROTECTED_BIT`, all elements of `pCommandBuffers` **must** be protected command buffers
- VUID-VkSubmitInfo2-flags-03887
  If `flags` does not include `VK_SUBMIT_PROTECTED_BIT`, each element of `pCommandBuffers` **must** not be a protected command buffer
- VUID-VkSubmitInfo2KHR-commandBuffer-06192
  If any `commandBuffer` member of an element of `pCommandBufferInfos` contains any resumed render pass instances, they **must** be suspended by a render pass instance earlier in submission order within `pCommandBufferInfos`
- VUID-VkSubmitInfo2KHR-commandBuffer-06010
  If any `commandBuffer` member of an element of `pCommandBufferInfos` contains any suspended render pass instances, they **must** be resumed by a render pass instance later in submission order within `pCommandBufferInfos`
- VUID-VkSubmitInfo2KHR-commandBuffer-06011
  If any `commandBuffer` member of an element of `pCommandBufferInfos` contains any suspended render pass instances, there **must** be no action or synchronization commands between that render pass instance and the render pass instance that resumes it
- VUID-VkSubmitInfo2KHR-commandBuffer-06012
  If any `commandBuffer` member of an element of `pCommandBufferInfos` contains any suspended render pass instances, there **must** be no render pass instances between that render pass instance and the render pass instance that resumes it

Valid Usage (Implicit)

- VUID-VkSubmitInfo2-sType-sType
  `sType` **must** be `VK_STRUCTURE_TYPE_SUBMIT_INFO_2`
- VUID-VkSubmitInfo2-pNext-pNext

pNext **must** be NULL

- VUID-VkSubmitInfo2-flags-parameter
  flags **must** be a valid combination of VkSubmitFlagBits values
- VUID-VkSubmitInfo2-pWaitSemaphoreInfos-parameter
  If waitSemaphoreInfoCount is not 0, pWaitSemaphoreInfos **must** be a valid pointer to an array of waitSemaphoreInfoCount valid VkSemaphoreSubmitInfo structures
- VUID-VkSubmitInfo2-pCommandBufferInfos-parameter
  If commandBufferInfoCount is not 0, pCommandBufferInfos **must** be a valid pointer to an array of commandBufferInfoCount valid VkCommandBufferSubmitInfo structures
- VUID-VkSubmitInfo2-pSignalSemaphoreInfos-parameter
  If signalSemaphoreInfoCount is not 0, pSignalSemaphoreInfos **must** be a valid pointer to an array of signalSemaphoreInfoCount valid VkSemaphoreSubmitInfo structures

Bits which **can** be set in VkSubmitInfo2::flags, specifying submission behavior, are:

```
// Provided by VK_VERSION_1_3
typedef enum VkSubmitFlagBits {
    VK_SUBMIT_PROTECTED_BIT = 0x00000001,
    VK_SUBMIT_PROTECTED_BIT_KHR = VK_SUBMIT_PROTECTED_BIT,
} VkSubmitFlagBits;
```

- VK_SUBMIT_PROTECTED_BIT specifies that this batch is a protected submission.

```
// Provided by VK_VERSION_1_3
typedef VkFlags VkSubmitFlags;
```

VkSubmitFlags is a bitmask type for setting a mask of zero or more VkSubmitFlagBits.

The VkSemaphoreSubmitInfo structure is defined as:

```
// Provided by VK_VERSION_1_3
typedef struct VkSemaphoreSubmitInfo {
    VkStructureType          sType;
    const void*              pNext;
    VkSemaphore              semaphore;
    uint64_t                 value;
    VkPipelineStageFlags2    stageMask;
    uint32_t                 deviceIndex;
} VkSemaphoreSubmitInfo;
```

- sType is a VkStructureType value identifying this structure.
- pNext is NULL or a pointer to a structure extending this structure.
- semaphore is a VkSemaphore affected by this operation.

- `value` is ignored.
- `stageMask` is a VkPipelineStageFlags2 mask of pipeline stages which limit the first synchronization scope of a semaphore signal operation, or second synchronization scope of a semaphore wait operation as described in the semaphore wait operation and semaphore signal operation sections of the synchronization chapter.
- `deviceIndex` is the index of the device within a device group that executes the semaphore wait or signal operation.

Whether this structure defines a semaphore wait or signal operation is defined by how it is used.

Valid Usage

- VUID-VkSemaphoreSubmitInfo-stageMask-03929
  If the `geometryShader` feature is not enabled, `stageMask` **must** not contain `VK_PIPELINE_STAGE_2_GEOMETRY_SHADER_BIT`
- VUID-VkSemaphoreSubmitInfo-stageMask-03930
  If the `tessellationShader` feature is not enabled, `stageMask` **must** not contain `VK_PIPELINE_STAGE_2_TESSELLATION_CONTROL_SHADER_BIT` or `VK_PIPELINE_STAGE_2_TESSELLATION_EVALUATION_SHADER_BIT`
- VUID-VkSemaphoreSubmitInfo-device-03888
  If the `device` that `semaphore` was created on is not a device group, `deviceIndex` **must** be `0`
- VUID-VkSemaphoreSubmitInfo-device-03889
  If the `device` that `semaphore` was created on is a device group, `deviceIndex` **must** be a valid device index

Valid Usage (Implicit)

- VUID-VkSemaphoreSubmitInfo-sType-sType
  `sType` **must** be `VK_STRUCTURE_TYPE_SEMAPHORE_SUBMIT_INFO`
- VUID-VkSemaphoreSubmitInfo-pNext-pNext
  `pNext` **must** be `NULL`
- VUID-VkSemaphoreSubmitInfo-semaphore-parameter
  `semaphore` **must** be a valid VkSemaphore handle
- VUID-VkSemaphoreSubmitInfo-stageMask-parameter
  `stageMask` **must** be a valid combination of VkPipelineStageFlagBits2 values

The `VkCommandBufferSubmitInfo` structure is defined as:

```
// Provided by VK_VERSION_1_3
typedef struct VkCommandBufferSubmitInfo {
    VkStructureType    sType;
    const void*        pNext;
    VkCommandBuffer    commandBuffer;
    uint32_t           deviceMask;
} VkCommandBufferSubmitInfo;
```

- `sType` is a VkStructureType value identifying this structure.
- `pNext` is `NULL` or a pointer to a structure extending this structure.
- `commandBuffer` is a VkCommandBuffer to be submitted for execution.
- `deviceMask` is a bitmask indicating which devices in a device group execute the command buffer. A `deviceMask` of `0` is equivalent to setting all bits corresponding to valid devices in the group to `1`.

Valid Usage

- VUID-VkCommandBufferSubmitInfo-commandBuffer-03890
  `commandBuffer` **must** not have been allocated with `VK_COMMAND_BUFFER_LEVEL_SECONDARY`
- VUID-VkCommandBufferSubmitInfo-deviceMask-03891
  If `deviceMask` is not `0`, it **must** be a valid device mask

Valid Usage (Implicit)

- VUID-VkCommandBufferSubmitInfo-sType-sType
  `sType` **must** be `VK_STRUCTURE_TYPE_COMMAND_BUFFER_SUBMIT_INFO`
- VUID-VkCommandBufferSubmitInfo-pNext-pNext
  `pNext` **must** be `NULL`
- VUID-VkCommandBufferSubmitInfo-commandBuffer-parameter
  `commandBuffer` **must** be a valid VkCommandBuffer handle

To submit command buffers to a queue, call:

```
// Provided by VK_VERSION_1_0
VkResult vkQueueSubmit(
    VkQueue                                     queue,
    uint32_t                                    submitCount,
    const VkSubmitInfo*                         pSubmits,
    VkFence                                     fence);
```

- `queue` is the queue that the command buffers will be submitted to.
- `submitCount` is the number of elements in the `pSubmits` array.

- `pSubmits` is a pointer to an array of VkSubmitInfo structures, each specifying a command buffer submission batch.
- `fence` is an **optional** handle to a fence to be signaled once all submitted command buffers have completed execution. If `fence` is not VK_NULL_HANDLE, it defines a fence signal operation.

`vkQueueSubmit` is a queue submission command, with each batch defined by an element of `pSubmits`. Batches begin execution in the order they appear in `pSubmits`, but **may** complete out of order.

Fence and semaphore operations submitted with vkQueueSubmit have additional ordering constraints compared to other submission commands, with dependencies involving previous and subsequent queue operations. Information about these additional constraints can be found in the semaphore and fence sections of the synchronization chapter.

Details on the interaction of `pWaitDstStageMask` with synchronization are described in the semaphore wait operation section of the synchronization chapter.

The order that batches appear in `pSubmits` is used to determine submission order, and thus all the implicit ordering guarantees that respect it. Other than these implicit ordering guarantees and any explicit synchronization primitives, these batches **may** overlap or otherwise execute out of order.

If any command buffer submitted to this queue is in the executable state, it is moved to the pending state. Once execution of all submissions of a command buffer complete, it moves from the pending state, back to the executable state. If a command buffer was recorded with the `VK_COMMAND_BUFFER_USAGE_ONE_TIME_SUBMIT_BIT` flag, it instead moves to the invalid state.

If `vkQueueSubmit` fails, it **may** return `VK_ERROR_OUT_OF_HOST_MEMORY` or `VK_ERROR_OUT_OF_DEVICE_MEMORY`. If it does, the implementation **must** ensure that the state and contents of any resources or synchronization primitives referenced by the submitted command buffers and any semaphores referenced by `pSubmits` is unaffected by the call or its failure. If `vkQueueSubmit` fails in such a way that the implementation is unable to make that guarantee, the implementation **must** return `VK_ERROR_DEVICE_LOST`. See Lost Device.

Valid Usage

- VUID-vkQueueSubmit-fence-00063
  If `fence` is not VK_NULL_HANDLE, `fence` **must** be unsignaled
- VUID-vkQueueSubmit-fence-00064
  If `fence` is not VK_NULL_HANDLE, `fence` **must** not be associated with any other queue command that has not yet completed execution on that queue
- VUID-vkQueueSubmit-pCommandBuffers-00065
  Any calls to vkCmdSetEvent, vkCmdResetEvent or vkCmdWaitEvents that have been recorded into any of the command buffer elements of the `pCommandBuffers` member of any element of `pSubmits`, **must** not reference any VkEvent that is referenced by any of those commands in a command buffer that has been submitted to another queue and is still in the *pending state*
- VUID-vkQueueSubmit-pWaitDstStageMask-00066
  Any stage flag included in any element of the `pWaitDstStageMask` member of any element

of pSubmits **must** be a pipeline stage supported by one of the capabilities of queue, as specified in the table of supported pipeline stages

- VUID-vkQueueSubmit-pSignalSemaphores-00067
  Each binary semaphore element of the pSignalSemaphores member of any element of pSubmits **must** be unsignaled when the semaphore signal operation it defines is executed on the device
- VUID-vkQueueSubmit-pWaitSemaphores-00068
  When a semaphore wait operation referring to a binary semaphore defined by any element of the pWaitSemaphores member of any element of pSubmits executes on queue, there **must** be no other queues waiting on the same semaphore
- VUID-vkQueueSubmit-pWaitSemaphores-03238
  All elements of the pWaitSemaphores member of all elements of pSubmits created with a VkSemaphoreType of VK_SEMAPHORE_TYPE_BINARY **must** reference a semaphore signal operation that has been submitted for execution and any semaphore signal operations on which it depends **must** have also been submitted for execution
- VUID-vkQueueSubmit-pCommandBuffers-00070
  Each element of the pCommandBuffers member of each element of pSubmits **must** be in the pending or executable state
- VUID-vkQueueSubmit-pCommandBuffers-00071
  If any element of the pCommandBuffers member of any element of pSubmits was not recorded with the VK_COMMAND_BUFFER_USAGE_SIMULTANEOUS_USE_BIT, it **must** not be in the pending state
- VUID-vkQueueSubmit-pCommandBuffers-00072
  Any secondary command buffers recorded into any element of the pCommandBuffers member of any element of pSubmits **must** be in the pending or executable state
- VUID-vkQueueSubmit-pCommandBuffers-00073
  If any secondary command buffers recorded into any element of the pCommandBuffers member of any element of pSubmits was not recorded with the VK_COMMAND_BUFFER_USAGE_SIMULTANEOUS_USE_BIT, it **must** not be in the pending state
- VUID-vkQueueSubmit-pCommandBuffers-00074
  Each element of the pCommandBuffers member of each element of pSubmits **must** have been allocated from a VkCommandPool that was created for the same queue family queue belongs to
- VUID-vkQueueSubmit-pSubmits-02207
  If any element of pSubmits->pCommandBuffers includes a Queue Family Ownership Transfer Acquire Operation, there **must** exist a previously submitted Queue Family Ownership Transfer Release Operation on a queue in the queue family identified by the acquire operation, with parameters matching the acquire operation as defined in the definition of such acquire operations, and which happens-before the acquire operation
- VUID-vkQueueSubmit-pSubmits-02808
  Any resource created with VK_SHARING_MODE_EXCLUSIVE that is read by an operation specified by pSubmits **must** not be owned by any queue family other than the one which queue belongs to, at the time it is executed

- VUID-vkQueueSubmit-pSubmits-04626
  Any resource created with VK_SHARING_MODE_CONCURRENT that is accessed by an operation specified by pSubmits **must** have included the queue family of queue at resource creation time
- VUID-vkQueueSubmit-queue-06448
  If queue was not created with VK_DEVICE_QUEUE_CREATE_PROTECTED_BIT, there **must** be no element of pSubmits that includes a VkProtectedSubmitInfo structure in its pNext chain with protectedSubmit equal to VK_TRUE

Valid Usage (Implicit)

- VUID-vkQueueSubmit-queue-parameter
  queue **must** be a valid VkQueue handle
- VUID-vkQueueSubmit-pSubmits-parameter
  If submitCount is not 0, pSubmits **must** be a valid pointer to an array of submitCount valid VkSubmitInfo structures
- VUID-vkQueueSubmit-fence-parameter
  If fence is not VK_NULL_HANDLE, fence **must** be a valid VkFence handle
- VUID-vkQueueSubmit-commonparent
  Both of fence, and queue that are valid handles of non-ignored parameters **must** have been created, allocated, or retrieved from the same VkDevice

Host Synchronization

- Host access to queue **must** be externally synchronized
- Host access to fence **must** be externally synchronized

Command Properties

Command Buffer Levels	Render Pass Scope	Supported Queue Types	Command Type
-	-	Any	-

Return Codes

Success

- VK_SUCCESS

Failure

- VK_ERROR_OUT_OF_HOST_MEMORY

- VK_ERROR_OUT_OF_DEVICE_MEMORY
- VK_ERROR_DEVICE_LOST

The VkSubmitInfo structure is defined as:

```
// Provided by VK_VERSION_1_0
typedef struct VkSubmitInfo {
    VkStructureType                sType;
    const void*                    pNext;
    uint32_t                       waitSemaphoreCount;
    const VkSemaphore*             pWaitSemaphores;
    const VkPipelineStageFlags*    pWaitDstStageMask;
    uint32_t                       commandBufferCount;
    const VkCommandBuffer*         pCommandBuffers;
    uint32_t                       signalSemaphoreCount;
    const VkSemaphore*             pSignalSemaphores;
} VkSubmitInfo;
```

- sType is a VkStructureType value identifying this structure.
- pNext is NULL or a pointer to a structure extending this structure.
- waitSemaphoreCount is the number of semaphores upon which to wait before executing the command buffers for the batch.
- pWaitSemaphores is a pointer to an array of VkSemaphore handles upon which to wait before the command buffers for this batch begin execution. If semaphores to wait on are provided, they define a semaphore wait operation.
- pWaitDstStageMask is a pointer to an array of pipeline stages at which each corresponding semaphore wait will occur.
- commandBufferCount is the number of command buffers to execute in the batch.
- pCommandBuffers is a pointer to an array of VkCommandBuffer handles to execute in the batch.
- signalSemaphoreCount is the number of semaphores to be signaled once the commands specified in pCommandBuffers have completed execution.
- pSignalSemaphores is a pointer to an array of VkSemaphore handles which will be signaled when the command buffers for this batch have completed execution. If semaphores to be signaled are provided, they define a semaphore signal operation.

The order that command buffers appear in pCommandBuffers is used to determine submission order, and thus all the implicit ordering guarantees that respect it. Other than these implicit ordering guarantees and any explicit synchronization primitives, these command buffers **may** overlap or otherwise execute out of order.

Valid Usage

- VUID-VkSubmitInfo-pWaitDstStageMask-04090

If the geometryShader feature is not enabled, pWaitDstStageMask **must** not contain VK_PIPELINE_STAGE_GEOMETRY_SHADER_BIT

- VUID-VkSubmitInfo-pWaitDstStageMask-04091
  If the tessellationShader feature is not enabled, pWaitDstStageMask **must** not contain VK_PIPELINE_STAGE_TESSELLATION_CONTROL_SHADER_BIT or VK_PIPELINE_STAGE_TESSELLATION_EVALUATION_SHADER_BIT
- VUID-VkSubmitInfo-pWaitDstStageMask-03937
  If the synchronization2 feature is not enabled, pWaitDstStageMask **must** not be 0
- VUID-VkSubmitInfo-pCommandBuffers-00075
  Each element of pCommandBuffers **must** not have been allocated with VK_COMMAND_BUFFER_LEVEL_SECONDARY
- VUID-VkSubmitInfo-pWaitDstStageMask-00078
  Each element of pWaitDstStageMask **must** not include VK_PIPELINE_STAGE_HOST_BIT
- VUID-VkSubmitInfo-pWaitSemaphores-03239
  If any element of pWaitSemaphores or pSignalSemaphores was created with a VkSemaphoreType of VK_SEMAPHORE_TYPE_TIMELINE, then the pNext chain **must** include a VkTimelineSemaphoreSubmitInfo structure
- VUID-VkSubmitInfo-pNext-03240
  If the pNext chain of this structure includes a VkTimelineSemaphoreSubmitInfo structure and any element of pWaitSemaphores was created with a VkSemaphoreType of VK_SEMAPHORE_TYPE_TIMELINE, then its waitSemaphoreValueCount member **must** equal waitSemaphoreCount
- VUID-VkSubmitInfo-pNext-03241
  If the pNext chain of this structure includes a VkTimelineSemaphoreSubmitInfo structure and any element of pSignalSemaphores was created with a VkSemaphoreType of VK_SEMAPHORE_TYPE_TIMELINE, then its signalSemaphoreValueCount member **must** equal signalSemaphoreCount
- VUID-VkSubmitInfo-pSignalSemaphores-03242
  For each element of pSignalSemaphores created with a VkSemaphoreType of VK_SEMAPHORE_TYPE_TIMELINE the corresponding element of VkTimelineSemaphoreSubmitInfo::pSignalSemaphoreValues **must** have a value greater than the current value of the semaphore when the semaphore signal operation is executed
- VUID-VkSubmitInfo-pWaitSemaphores-03243
  For each element of pWaitSemaphores created with a VkSemaphoreType of VK_SEMAPHORE_TYPE_TIMELINE the corresponding element of VkTimelineSemaphoreSubmitInfo::pWaitSemaphoreValues **must** have a value which does not differ from the current value of the semaphore or the value of any outstanding semaphore wait or signal operation on that semaphore by more than maxTimelineSemaphoreValueDifference
- VUID-VkSubmitInfo-pSignalSemaphores-03244
  For each element of pSignalSemaphores created with a VkSemaphoreType of VK_SEMAPHORE_TYPE_TIMELINE the corresponding element of VkTimelineSemaphoreSubmitInfo::pSignalSemaphoreValues **must** have a value which does

not differ from the current value of the semaphore or the value of any outstanding semaphore wait or signal operation on that semaphore by more than `maxTimelineSemaphoreValueDifference`

- VUID-VkSubmitInfo-pNext-04120
  If the `pNext` chain of this structure does not include a `VkProtectedSubmitInfo` structure with `protectedSubmit` set to `VK_TRUE`, then each element of the `pCommandBuffers` array **must** be an unprotected command buffer
- VUID-VkSubmitInfo-pNext-04148
  If the `pNext` chain of this structure includes a `VkProtectedSubmitInfo` structure with `protectedSubmit` set to `VK_TRUE`, then each element of the `pCommandBuffers` array **must** be a protected command buffer
- VUID-VkSubmitInfo-pCommandBuffers-06193
  If `pCommandBuffers` contains any resumed render pass instances, they **must** be suspended by a render pass instance earlier in submission order within `pCommandBuffers`
- VUID-VkSubmitInfo-pCommandBuffers-06014
  If `pCommandBuffers` contains any suspended render pass instances, they **must** be resumed by a render pass instance later in submission order within `pCommandBuffers`
- VUID-VkSubmitInfo-pCommandBuffers-06015
  If `pCommandBuffers` contains any suspended render pass instances, there **must** be no action or synchronization commands executed in a primary or secondary command buffer between that render pass instance and the render pass instance that resumes it
- VUID-VkSubmitInfo-pCommandBuffers-06016
  If `pCommandBuffers` contains any suspended render pass instances, there **must** be no render pass instances between that render pass instance and the render pass instance that resumes it

Valid Usage (Implicit)

- VUID-VkSubmitInfo-sType-sType
  `sType` **must** be `VK_STRUCTURE_TYPE_SUBMIT_INFO`
- VUID-VkSubmitInfo-pNext-pNext
  Each `pNext` member of any structure (including this one) in the `pNext` chain **must** be either `NULL` or a pointer to a valid instance of VkDeviceGroupSubmitInfo, VkProtectedSubmitInfo, or VkTimelineSemaphoreSubmitInfo
- VUID-VkSubmitInfo-sType-unique
  The `sType` value of each struct in the `pNext` chain **must** be unique
- VUID-VkSubmitInfo-pWaitSemaphores-parameter
  If `waitSemaphoreCount` is not `0`, `pWaitSemaphores` **must** be a valid pointer to an array of `waitSemaphoreCount` valid VkSemaphore handles
- VUID-VkSubmitInfo-pWaitDstStageMask-parameter
  If `waitSemaphoreCount` is not `0`, `pWaitDstStageMask` **must** be a valid pointer to an array of `waitSemaphoreCount` valid combinations of VkPipelineStageFlagBits values

- VUID-VkSubmitInfo-pCommandBuffers-parameter
  If `commandBufferCount` is not `0`, `pCommandBuffers` **must** be a valid pointer to an array of `commandBufferCount` valid VkCommandBuffer handles
- VUID-VkSubmitInfo-pSignalSemaphores-parameter
  If `signalSemaphoreCount` is not `0`, `pSignalSemaphores` **must** be a valid pointer to an array of `signalSemaphoreCount` valid VkSemaphore handles
- VUID-VkSubmitInfo-commonparent
  Each of the elements of `pCommandBuffers`, the elements of `pSignalSemaphores`, and the elements of `pWaitSemaphores` that are valid handles of non-ignored parameters **must** have been created, allocated, or retrieved from the same VkDevice

To specify the values to use when waiting for and signaling semaphores created with a VkSemaphoreType of `VK_SEMAPHORE_TYPE_TIMELINE`, add a VkTimelineSemaphoreSubmitInfo structure to the `pNext` chain of the VkSubmitInfo structure when using vkQueueSubmit or the VkBindSparseInfo structure when using vkQueueBindSparse . The `VkTimelineSemaphoreSubmitInfo` structure is defined as:

```
// Provided by VK_VERSION_1_2
typedef struct VkTimelineSemaphoreSubmitInfo {
    VkStructureType    sType;
    const void*        pNext;
    uint32_t           waitSemaphoreValueCount;
    const uint64_t*    pWaitSemaphoreValues;
    uint32_t           signalSemaphoreValueCount;
    const uint64_t*    pSignalSemaphoreValues;
} VkTimelineSemaphoreSubmitInfo;
```

- `sType` is a VkStructureType value identifying this structure.
- `pNext` is `NULL` or a pointer to a structure extending this structure.
- `waitSemaphoreValueCount` is the number of semaphore wait values specified in `pWaitSemaphoreValues`.
- `pWaitSemaphoreValues` is a pointer to an array of `waitSemaphoreValueCount` values for the corresponding semaphores in VkSubmitInfo::`pWaitSemaphores` to wait for.
- `signalSemaphoreValueCount` is the number of semaphore signal values specified in `pSignalSemaphoreValues`.
- `pSignalSemaphoreValues` is a pointer to an array `signalSemaphoreValueCount` values for the corresponding semaphores in VkSubmitInfo::`pSignalSemaphores` to set when signaled.

If the semaphore in VkSubmitInfo::`pWaitSemaphores` or VkSubmitInfo::`pSignalSemaphores` corresponding to an entry in `pWaitSemaphoreValues` or `pSignalSemaphoreValues` respectively was not created with a VkSemaphoreType of `VK_SEMAPHORE_TYPE_TIMELINE`, the implementation **must** ignore the value in the `pWaitSemaphoreValues` or `pSignalSemaphoreValues` entry.

Valid Usage (Implicit)

- VUID-VkTimelineSemaphoreSubmitInfo-sType-sType
  `sType` **must** be `VK_STRUCTURE_TYPE_TIMELINE_SEMAPHORE_SUBMIT_INFO`
- VUID-VkTimelineSemaphoreSubmitInfo-pWaitSemaphoreValues-parameter
  If `waitSemaphoreValueCount` is not `0`, and `pWaitSemaphoreValues` is not `NULL`, `pWaitSemaphoreValues` **must** be a valid pointer to an array of `waitSemaphoreValueCount` `uint64_t` values
- VUID-VkTimelineSemaphoreSubmitInfo-pSignalSemaphoreValues-parameter
  If `signalSemaphoreValueCount` is not `0`, and `pSignalSemaphoreValues` is not `NULL`, `pSignalSemaphoreValues` **must** be a valid pointer to an array of `signalSemaphoreValueCount` `uint64_t` values

If the `pNext` chain of VkSubmitInfo includes a `VkProtectedSubmitInfo` structure, then the structure indicates whether the batch is protected. The `VkProtectedSubmitInfo` structure is defined as:

```
// Provided by VK_VERSION_1_1
typedef struct VkProtectedSubmitInfo {
    VkStructureType    sType;
    const void*        pNext;
    VkBool32           protectedSubmit;
} VkProtectedSubmitInfo;
```

- `protectedSubmit` specifies whether the batch is protected. If `protectedSubmit` is `VK_TRUE`, the batch is protected. If `protectedSubmit` is `VK_FALSE`, the batch is unprotected. If the `VkSubmitInfo`::`pNext` chain does not include this structure, the batch is unprotected.

Valid Usage (Implicit)

- VUID-VkProtectedSubmitInfo-sType-sType
  `sType` **must** be `VK_STRUCTURE_TYPE_PROTECTED_SUBMIT_INFO`

If the `pNext` chain of VkSubmitInfo includes a `VkDeviceGroupSubmitInfo` structure, then that structure includes device indices and masks specifying which physical devices execute semaphore operations and command buffers.

The `VkDeviceGroupSubmitInfo` structure is defined as:

```
// Provided by VK_VERSION_1_1
typedef struct VkDeviceGroupSubmitInfo {
    VkStructureType    sType;
    const void*        pNext;
    uint32_t           waitSemaphoreCount;
    const uint32_t*    pWaitSemaphoreDeviceIndices;
    uint32_t           commandBufferCount;
    const uint32_t*    pCommandBufferDeviceMasks;
    uint32_t           signalSemaphoreCount;
    const uint32_t*    pSignalSemaphoreDeviceIndices;
} VkDeviceGroupSubmitInfo;
```

- sType is a VkStructureType value identifying this structure.
- pNext is NULL or a pointer to a structure extending this structure.
- waitSemaphoreCount is the number of elements in the pWaitSemaphoreDeviceIndices array.
- pWaitSemaphoreDeviceIndices is a pointer to an array of waitSemaphoreCount device indices indicating which physical device executes the semaphore wait operation in the corresponding element of VkSubmitInfo::pWaitSemaphores.
- commandBufferCount is the number of elements in the pCommandBufferDeviceMasks array.
- pCommandBufferDeviceMasks is a pointer to an array of commandBufferCount device masks indicating which physical devices execute the command buffer in the corresponding element of VkSubmitInfo::pCommandBuffers. A physical device executes the command buffer if the corresponding bit is set in the mask.
- signalSemaphoreCount is the number of elements in the pSignalSemaphoreDeviceIndices array.
- pSignalSemaphoreDeviceIndices is a pointer to an array of signalSemaphoreCount device indices indicating which physical device executes the semaphore signal operation in the corresponding element of VkSubmitInfo::pSignalSemaphores.

If this structure is not present, semaphore operations and command buffers execute on device index zero.

Valid Usage

- VUID-VkDeviceGroupSubmitInfo-waitSemaphoreCount-00082
  waitSemaphoreCount **must** equal VkSubmitInfo::waitSemaphoreCount
- VUID-VkDeviceGroupSubmitInfo-commandBufferCount-00083
  commandBufferCount **must** equal VkSubmitInfo::commandBufferCount
- VUID-VkDeviceGroupSubmitInfo-signalSemaphoreCount-00084
  signalSemaphoreCount **must** equal VkSubmitInfo::signalSemaphoreCount
- VUID-VkDeviceGroupSubmitInfo-pWaitSemaphoreDeviceIndices-00085
  All elements of pWaitSemaphoreDeviceIndices and pSignalSemaphoreDeviceIndices **must** be valid device indices
- VUID-VkDeviceGroupSubmitInfo-pCommandBufferDeviceMasks-00086

All elements of `pCommandBufferDeviceMasks` **must** be valid device masks

Valid Usage (Implicit)

- VUID-VkDeviceGroupSubmitInfo-sType-sType
  `sType` **must** be `VK_STRUCTURE_TYPE_DEVICE_GROUP_SUBMIT_INFO`
- VUID-VkDeviceGroupSubmitInfo-pWaitSemaphoreDeviceIndices-parameter
  If `waitSemaphoreCount` is not `0`, `pWaitSemaphoreDeviceIndices` **must** be a valid pointer to an array of `waitSemaphoreCount` `uint32_t` values
- VUID-VkDeviceGroupSubmitInfo-pCommandBufferDeviceMasks-parameter
  If `commandBufferCount` is not `0`, `pCommandBufferDeviceMasks` **must** be a valid pointer to an array of `commandBufferCount` `uint32_t` values
- VUID-VkDeviceGroupSubmitInfo-pSignalSemaphoreDeviceIndices-parameter
  If `signalSemaphoreCount` is not `0`, `pSignalSemaphoreDeviceIndices` **must** be a valid pointer to an array of `signalSemaphoreCount` `uint32_t` values

6.6. Queue Forward Progress

When using binary semaphores, the application **must** ensure that command buffer submissions will be able to complete without any subsequent operations by the application on any queue. After any call to `vkQueueSubmit` (or other queue operation), for every queued wait on a semaphore created with a VkSemaphoreType of `VK_SEMAPHORE_TYPE_BINARY` there **must** be a prior signal of that semaphore that will not be consumed by a different wait on the semaphore.

When using timeline semaphores, wait-before-signal behavior is well-defined and applications **can** submit work via `vkQueueSubmit` defining a timeline semaphore wait operation before submitting a corresponding semaphore signal operation. For each timeline semaphore wait operation defined by a call to `vkQueueSubmit`, the application **must** ensure that a corresponding semaphore signal operation is executed before forward progress can be made.

If a command buffer submission waits for any events to be signaled, the application **must** ensure that command buffer submissions will be able to complete without any subsequent operations by the application. Events signaled by the host **must** be signaled before the command buffer waits on those events.

NOTE

The ability for commands to wait on the host to set an events was originally added to allow low-latency updates to resources between host and device. However, to ensure quality of service, implementations would necessarily detect extended stalls in execution and timeout after a short period. As this period is not defined in the Vulkan specification, it is impossible to correctly validate any application with any wait period. Since the original users of this functionality were highly limited and platform-specific, this functionality is now considered defunct and should not be used.

6.7. Secondary Command Buffer Execution

Secondary command buffers **must** not be directly submitted to a queue. To record a secondary command buffer to execute as part of a primary command buffer, call:

```
// Provided by VK_VERSION_1_0
void vkCmdExecuteCommands(
    VkCommandBuffer                             commandBuffer,
    uint32_t                                    commandBufferCount,
    const VkCommandBuffer*                      pCommandBuffers);
```

- `commandBuffer` is a handle to a primary command buffer that the secondary command buffers are executed in.
- `commandBufferCount` is the length of the `pCommandBuffers` array.
- `pCommandBuffers` is a pointer to an array of `commandBufferCount` secondary command buffer handles, which are recorded to execute in the primary command buffer in the order they are listed in the array.

If any element of `pCommandBuffers` was not recorded with the `VK_COMMAND_BUFFER_USAGE_SIMULTANEOUS_USE_BIT` flag, and it was recorded into any other primary command buffer which is currently in the executable or recording state, that primary command buffer becomes invalid.

Valid Usage

- VUID-vkCmdExecuteCommands-pCommandBuffers-00088
  Each element of `pCommandBuffers` **must** have been allocated with a `level` of `VK_COMMAND_BUFFER_LEVEL_SECONDARY`
- VUID-vkCmdExecuteCommands-pCommandBuffers-00089
  Each element of `pCommandBuffers` **must** be in the pending or executable state
- VUID-vkCmdExecuteCommands-pCommandBuffers-00091
  If any element of `pCommandBuffers` was not recorded with the `VK_COMMAND_BUFFER_USAGE_SIMULTANEOUS_USE_BIT` flag, it **must** not be in the pending state
- VUID-vkCmdExecuteCommands-pCommandBuffers-00092
  If any element of `pCommandBuffers` was not recorded with the `VK_COMMAND_BUFFER_USAGE_SIMULTANEOUS_USE_BIT` flag, it **must** not have already been recorded to `commandBuffer`
- VUID-vkCmdExecuteCommands-pCommandBuffers-00093
  If any element of `pCommandBuffers` was not recorded with the `VK_COMMAND_BUFFER_USAGE_SIMULTANEOUS_USE_BIT` flag, it **must** not appear more than once in `pCommandBuffers`
- VUID-vkCmdExecuteCommands-pCommandBuffers-00094
  Each element of `pCommandBuffers` **must** have been allocated from a `VkCommandPool` that was created for the same queue family as the `VkCommandPool` from which `commandBuffer` was

allocated

- VUID-vkCmdExecuteCommands-pCommandBuffers-00096
  If vkCmdExecuteCommands is being called within a render pass instance, each element of pCommandBuffers **must** have been recorded with the VK_COMMAND_BUFFER_USAGE_RENDER_PASS_CONTINUE_BIT
- VUID-vkCmdExecuteCommands-pCommandBuffers-00099
  If vkCmdExecuteCommands is being called within a render pass instance, and any element of pCommandBuffers was recorded with VkCommandBufferInheritanceInfo::framebuffer not equal to VK_NULL_HANDLE, that VkFramebuffer **must** match the VkFramebuffer used in the current render pass instance
- VUID-vkCmdExecuteCommands-contents-09680
  If vkCmdExecuteCommands is being called within a render pass instance begun with vkCmdBeginRenderPass, and vkCmdNextSubpass has not been called in the current render pass instance, the contents parameter of vkCmdBeginRenderPass **must** have been VK_SUBPASS_CONTENTS_SECONDARY_COMMAND_BUFFERS
- VUID-vkCmdExecuteCommands-None-09681
  If vkCmdExecuteCommands is being called within a render pass instance begun with vkCmdBeginRenderPass, and vkCmdNextSubpass has been called in the current render pass instance, the contents parameter of the last call to vkCmdNextSubpass **must** have been VK_SUBPASS_CONTENTS_SECONDARY_COMMAND_BUFFERS
- VUID-vkCmdExecuteCommands-pCommandBuffers-06019
  If vkCmdExecuteCommands is being called within a render pass instance begun with vkCmdBeginRenderPass, each element of pCommandBuffers **must** have been recorded with VkCommandBufferInheritanceInfo::subpass set to the index of the subpass which the given command buffer will be executed in
- VUID-vkCmdExecuteCommands-pBeginInfo-06020
  If vkCmdExecuteCommands is being called within a render pass instance begun with vkCmdBeginRenderPass, the render passes specified in the pBeginInfo->pInheritanceInfo->renderPass members of the vkBeginCommandBuffer commands used to begin recording each element of pCommandBuffers **must** be compatible with the current render pass
- VUID-vkCmdExecuteCommands-pCommandBuffers-00100
  If vkCmdExecuteCommands is not being called within a render pass instance, each element of pCommandBuffers **must** not have been recorded with the VK_COMMAND_BUFFER_USAGE_RENDER_PASS_CONTINUE_BIT
- VUID-vkCmdExecuteCommands-commandBuffer-00101
  If the inheritedQueries feature is not enabled, commandBuffer **must** not have any queries active
- VUID-vkCmdExecuteCommands-commandBuffer-00102
  If commandBuffer has a VK_QUERY_TYPE_OCCLUSION query active, then each element of pCommandBuffers **must** have been recorded with VkCommandBufferInheritanceInfo ::occlusionQueryEnable set to VK_TRUE
- VUID-vkCmdExecuteCommands-commandBuffer-00103
  If commandBuffer has a VK_QUERY_TYPE_OCCLUSION query active, then each element of pCommandBuffers **must** have been recorded with VkCommandBufferInheritanceInfo

::queryFlags having all bits set that are set for the query

- VUID-vkCmdExecuteCommands-commandBuffer-00104
  If commandBuffer has a VK_QUERY_TYPE_PIPELINE_STATISTICS query active, then each element of pCommandBuffers **must** have been recorded with VkCommandBufferInheritanceInfo ::pipelineStatistics having all bits set that are set in the VkQueryPool the query uses
- VUID-vkCmdExecuteCommands-pCommandBuffers-00105
  Each element of pCommandBuffers **must** not begin any query types that are active in commandBuffer
- VUID-vkCmdExecuteCommands-commandBuffer-07594
  commandBuffer **must** not have any queries other than VK_QUERY_TYPE_OCCLUSION and VK_QUERY_TYPE_PIPELINE_STATISTICS active
- VUID-vkCmdExecuteCommands-commandBuffer-01820
  If commandBuffer is a protected command buffer and protectedNoFault is not supported, each element of pCommandBuffers **must** be a protected command buffer
- VUID-vkCmdExecuteCommands-commandBuffer-01821
  If commandBuffer is an unprotected command buffer and protectedNoFault is not supported, each element of pCommandBuffers **must** be an unprotected command buffer
- VUID-vkCmdExecuteCommands-commandBuffer-06533
  If vkCmdExecuteCommands is being called within a render pass instance and any recorded command in commandBuffer in the current subpass will write to an image subresource as an attachment, commands recorded in elements of pCommandBuffers **must** not read from the memory backing that image subresource in any other way
- VUID-vkCmdExecuteCommands-commandBuffer-06534
  If vkCmdExecuteCommands is being called within a render pass instance and any recorded command in commandBuffer in the current subpass will read from an image subresource used as an attachment in any way other than as an attachment, commands recorded in elements of pCommandBuffers **must** not write to that image subresource as an attachment
- VUID-vkCmdExecuteCommands-pCommandBuffers-06535
  If vkCmdExecuteCommands is being called within a render pass instance and any recorded command in a given element of pCommandBuffers will write to an image subresource as an attachment, commands recorded in elements of pCommandBuffers at a higher index **must** not read from the memory backing that image subresource in any other way
- VUID-vkCmdExecuteCommands-pCommandBuffers-06536
  If vkCmdExecuteCommands is being called within a render pass instance and any recorded command in a given element of pCommandBuffers will read from an image subresource used as an attachment in any way other than as an attachment, commands recorded in elements of pCommandBuffers at a higher index **must** not write to that image subresource as an attachment
- VUID-vkCmdExecuteCommands-pCommandBuffers-06021
  If pCommandBuffers contains any suspended render pass instances, there **must** be no action or synchronization commands between that render pass instance and any render pass instance that resumes it
- VUID-vkCmdExecuteCommands-pCommandBuffers-06022

If pCommandBuffers contains any suspended render pass instances, there **must** be no render pass instances between that render pass instance and any render pass instance that resumes it

- VUID-vkCmdExecuteCommands-flags-06024
  If vkCmdExecuteCommands is being called within a render pass instance begun with vkCmdBeginRendering, its VkRenderingInfo::flags parameter **must** have included VK_RENDERING_CONTENTS_SECONDARY_COMMAND_BUFFERS_BIT
- VUID-vkCmdExecuteCommands-pBeginInfo-06025
  If vkCmdExecuteCommands is being called within a render pass instance begun with vkCmdBeginRendering, the render passes specified in the pBeginInfo->pInheritanceInfo->renderPass members of the vkBeginCommandBuffer commands used to begin recording each element of pCommandBuffers **must** be VK_NULL_HANDLE
- VUID-vkCmdExecuteCommands-flags-06026
  If vkCmdExecuteCommands is being called within a render pass instance begun with vkCmdBeginRendering, the flags member of the VkCommandBufferInheritanceRenderingInfo structure included in the pNext chain of VkCommandBufferBeginInfo::pInheritanceInfo used to begin recording each element of pCommandBuffers **must** be equal to the VkRenderingInfo::flags parameter to vkCmdBeginRendering, excluding VK_RENDERING_CONTENTS_SECONDARY_COMMAND_BUFFERS_BIT
- VUID-vkCmdExecuteCommands-colorAttachmentCount-06027
  If vkCmdExecuteCommands is being called within a render pass instance begun with vkCmdBeginRendering, the colorAttachmentCount member of the VkCommandBufferInheritanceRenderingInfo structure included in the pNext chain of VkCommandBufferBeginInfo::pInheritanceInfo used to begin recording each element of pCommandBuffers **must** be equal to the VkRenderingInfo::colorAttachmentCount parameter to vkCmdBeginRendering
- VUID-vkCmdExecuteCommands-imageView-06028
  If vkCmdExecuteCommands is being called within a render pass instance begun with vkCmdBeginRendering, if the imageView member of an element of the VkRenderingInfo::pColorAttachments parameter to vkCmdBeginRendering is not VK_NULL_HANDLE, the corresponding element of the pColorAttachmentFormats member of the VkCommandBufferInheritanceRenderingInfo structure included in the pNext chain of VkCommandBufferBeginInfo::pInheritanceInfo used to begin recording each element of pCommandBuffers **must** be equal to the format used to create that image view
- VUID-vkCmdExecuteCommands-imageView-07606
  If vkCmdExecuteCommands is being called within a render pass instance begun with vkCmdBeginRendering, if the imageView member of an element of the VkRenderingInfo::pColorAttachments parameter to vkCmdBeginRendering is VK_NULL_HANDLE, the corresponding element of the pColorAttachmentFormats member of the VkCommandBufferInheritanceRenderingInfo structure included in the pNext chain of VkCommandBufferBeginInfo::pInheritanceInfo used to begin recording each element of pCommandBuffers **must** be VK_FORMAT_UNDEFINED
- VUID-vkCmdExecuteCommands-pDepthAttachment-06029
  If vkCmdExecuteCommands is being called within a render pass instance begun with vkCmdBeginRendering, if the VkRenderingInfo::pDepthAttachment->imageView parameter to

vkCmdBeginRendering is not VK_NULL_HANDLE, the value of the depthAttachmentFormat member of the VkCommandBufferInheritanceRenderingInfo structure included in the pNext chain of VkCommandBufferBeginInfo::pInheritanceInfo used to begin recording each element of pCommandBuffers **must** be equal to the format used to create that image view

- VUID-vkCmdExecuteCommands-pStencilAttachment-06030
  If vkCmdExecuteCommands is being called within a render pass instance begun with vkCmdBeginRendering, if the VkRenderingInfo::pStencilAttachment->imageView parameter to vkCmdBeginRendering is not VK_NULL_HANDLE, the value of the stencilAttachmentFormat member of the VkCommandBufferInheritanceRenderingInfo structure included in the pNext chain of VkCommandBufferBeginInfo::pInheritanceInfo used to begin recording each element of pCommandBuffers **must** be equal to the format used to create that image view
- VUID-vkCmdExecuteCommands-pDepthAttachment-06774
  If vkCmdExecuteCommands is being called within a render pass instance begun with vkCmdBeginRendering and the VkRenderingInfo::pDepthAttachment->imageView parameter to vkCmdBeginRendering was VK_NULL_HANDLE, the value of the depthAttachmentFormat member of the VkCommandBufferInheritanceRenderingInfo structure included in the pNext chain of VkCommandBufferBeginInfo::pInheritanceInfo used to begin recording each element of pCommandBuffers **must** be VK_FORMAT_UNDEFINED
- VUID-vkCmdExecuteCommands-pStencilAttachment-06775
  If vkCmdExecuteCommands is being called within a render pass instance begun with vkCmdBeginRendering and the VkRenderingInfo::pStencilAttachment->imageView parameter to vkCmdBeginRendering was VK_NULL_HANDLE, the value of the stencilAttachmentFormat member of the VkCommandBufferInheritanceRenderingInfo structure included in the pNext chain of VkCommandBufferBeginInfo::pInheritanceInfo used to begin recording each element of pCommandBuffers **must** be VK_FORMAT_UNDEFINED
- VUID-vkCmdExecuteCommands-viewMask-06031
  If vkCmdExecuteCommands is being called within a render pass instance begun with vkCmdBeginRendering, the viewMask member of the VkCommandBufferInheritanceRenderingInfo structure included in the pNext chain of VkCommandBufferBeginInfo::pInheritanceInfo used to begin recording each element of pCommandBuffers **must** be equal to the VkRenderingInfo::viewMask parameter to vkCmdBeginRendering
- VUID-vkCmdExecuteCommands-commandBuffer-09375
  commandBuffer **must** not be a secondary command buffer

Valid Usage (Implicit)

- VUID-vkCmdExecuteCommands-commandBuffer-parameter
  commandBuffer **must** be a valid VkCommandBuffer handle
- VUID-vkCmdExecuteCommands-pCommandBuffers-parameter
  pCommandBuffers **must** be a valid pointer to an array of commandBufferCount valid VkCommandBuffer handles

- VUID-vkCmdExecuteCommands-commandBuffer-recording
  `commandBuffer` **must** be in the recording state
- VUID-vkCmdExecuteCommands-commandBuffer-cmdpool
  The `VkCommandPool` that `commandBuffer` was allocated from **must** support transfer, graphics, or compute operations
- VUID-vkCmdExecuteCommands-commandBufferCount-arraylength
  `commandBufferCount` **must** be greater than `0`
- VUID-vkCmdExecuteCommands-commonparent
  Both of `commandBuffer`, and the elements of `pCommandBuffers` **must** have been created, allocated, or retrieved from the same VkDevice

Host Synchronization

- Host access to `commandBuffer` **must** be externally synchronized
- Host access to the `VkCommandPool` that `commandBuffer` was allocated from **must** be externally synchronized

Command Properties

Command Buffer Levels	Render Pass Scope	Supported Queue Types	Command Type
Primary Secondary	Both	Transfer Graphics Compute	Indirection

6.8. Command Buffer Device Mask

Each command buffer has a piece of state storing the current device mask of the command buffer. This mask controls which physical devices within the logical device all subsequent commands will execute on, including state-setting commands, action commands, and synchronization commands.

Scissor and viewport state (excluding the count of each) **can** be different values on each physical device (only when set as dynamic state), and each physical device will render using its local copy of the state. Other state is shared between physical devices, such that all physical devices use the most recently set values for the state. However, when recording an action command that uses a piece of state, the most recent command that set that state **must** have included all physical devices that execute the action command in its current device mask.

The command buffer's device mask is orthogonal to the `pCommandBufferDeviceMasks` member of VkDeviceGroupSubmitInfo. Commands only execute on a physical device if the device index is set in both device masks.

If the `pNext` chain of VkCommandBufferBeginInfo includes a `VkDeviceGroupCommandBufferBeginInfo`

structure, then that structure includes an initial device mask for the command buffer.

The VkDeviceGroupCommandBufferBeginInfo structure is defined as:

```
// Provided by VK_VERSION_1_1
typedef struct VkDeviceGroupCommandBufferBeginInfo {
    VkStructureType    sType;
    const void*        pNext;
    uint32_t           deviceMask;
} VkDeviceGroupCommandBufferBeginInfo;
```

- sType is a VkStructureType value identifying this structure.
- pNext is NULL or a pointer to a structure extending this structure.
- deviceMask is the initial value of the command buffer's device mask.

The initial device mask also acts as an upper bound on the set of devices that **can** ever be in the device mask in the command buffer.

If this structure is not present, the initial value of a command buffer's device mask includes all physical devices in the logical device when the command buffer begins recording.

Valid Usage

- VUID-VkDeviceGroupCommandBufferBeginInfo-deviceMask-00106
  deviceMask **must** be a valid device mask value
- VUID-VkDeviceGroupCommandBufferBeginInfo-deviceMask-00107
  deviceMask **must** not be zero

Valid Usage (Implicit)

- VUID-VkDeviceGroupCommandBufferBeginInfo-sType-sType
  sType **must** be VK_STRUCTURE_TYPE_DEVICE_GROUP_COMMAND_BUFFER_BEGIN_INFO

To update the current device mask of a command buffer, call:

```
// Provided by VK_VERSION_1_1
void vkCmdSetDeviceMask(
    VkCommandBuffer                             commandBuffer,
    uint32_t                                    deviceMask);
```

- commandBuffer is command buffer whose current device mask is modified.
- deviceMask is the new value of the current device mask.

deviceMask is used to filter out subsequent commands from executing on all physical devices whose

bit indices are not set in the mask, except commands beginning a render pass instance, commands transitioning to the next subpass in the render pass instance, and commands ending a render pass instance, which always execute on the set of physical devices whose bit indices are included in the `deviceMask` member of the VkDeviceGroupRenderPassBeginInfo structure passed to the command beginning the corresponding render pass instance.

Valid Usage

- VUID-vkCmdSetDeviceMask-deviceMask-00108
  `deviceMask` **must** be a valid device mask value
- VUID-vkCmdSetDeviceMask-deviceMask-00109
  `deviceMask` **must** not be zero
- VUID-vkCmdSetDeviceMask-deviceMask-00110
  `deviceMask` **must** not include any set bits that were not in the VkDeviceGroupCommandBufferBeginInfo::`deviceMask` value when the command buffer began recording
- VUID-vkCmdSetDeviceMask-deviceMask-00111
  If `vkCmdSetDeviceMask` is called inside a render pass instance, `deviceMask` **must** not include any set bits that were not in the VkDeviceGroupRenderPassBeginInfo::`deviceMask` value when the render pass instance began recording

Valid Usage (Implicit)

- VUID-vkCmdSetDeviceMask-commandBuffer-parameter
  `commandBuffer` **must** be a valid VkCommandBuffer handle
- VUID-vkCmdSetDeviceMask-commandBuffer-recording
  `commandBuffer` **must** be in the recording state
- VUID-vkCmdSetDeviceMask-commandBuffer-cmdpool
  The `VkCommandPool` that `commandBuffer` was allocated from **must** support graphics, compute, or transfer operations

Host Synchronization

- Host access to `commandBuffer` **must** be externally synchronized
- Host access to the `VkCommandPool` that `commandBuffer` was allocated from **must** be externally synchronized

Command Properties

Command Buffer Levels	Render Pass Scope	Supported Queue Types	Command Type
Primary Secondary	Both	Graphics Compute Transfer	State

Chapter 7. Synchronization and Cache Control

Synchronization of access to resources is primarily the responsibility of the application in Vulkan. The order of execution of commands with respect to the host and other commands on the device has few implicit guarantees, and needs to be explicitly specified. Memory caches and other optimizations are also explicitly managed, requiring that the flow of data through the system is largely under application control.

Whilst some implicit guarantees exist between commands, five explicit synchronization mechanisms are exposed by Vulkan:

Fences

Fences **can** be used to communicate to the host that execution of some task on the device has completed, controlling resource access between host and device.

Semaphores

Semaphores **can** be used to control resource access across multiple queues.

Events

Events provide a fine-grained synchronization primitive which **can** be signaled either within a command buffer or by the host, and **can** be waited upon within a command buffer or queried on the host. Events **can** be used to control resource access within a single queue.

Pipeline Barriers

Pipeline barriers also provide synchronization control within a command buffer, but at a single point, rather than with separate signal and wait operations. Pipeline barriers **can** be used to control resource access within a single queue.

Render Pass Objects

Render pass objects provide a synchronization framework for rendering tasks, built upon the concepts in this chapter. Many cases that would otherwise need an application to use other synchronization primitives **can** be expressed more efficiently as part of a render pass. Render pass objects **can** be used to control resource access within a single queue.

7.1. Execution and Memory Dependencies

An *operation* is an arbitrary amount of work to be executed on the host, a device, or an external entity such as a presentation engine. Synchronization commands introduce explicit *execution dependencies*, and *memory dependencies* between two sets of operations defined by the command's two *synchronization scopes*.

The synchronization scopes define which other operations a synchronization command is able to create execution dependencies with. Any type of operation that is not in a synchronization command's synchronization scopes will not be included in the resulting dependency. For example, for many synchronization commands, the synchronization scopes **can** be limited to just operations executing in specific pipeline stages, which allows other pipeline stages to be excluded from a

dependency. Other scoping options are possible, depending on the particular command.

An *execution dependency* is a guarantee that for two sets of operations, the first set **must** *happen-before* the second set. If an operation happens-before another operation, then the first operation **must** complete before the second operation is initiated. More precisely:

- Let **Ops**$_1$ and **Ops**$_2$ be separate sets of operations.
- Let **Sync** be a synchronization command.
- Let **Scope**$_{1st}$ and **Scope**$_{2nd}$ be the synchronization scopes of **Sync**.
- Let **ScopedOps**$_1$ be the intersection of sets **Ops**$_1$ and **Scope**$_{1st}$.
- Let **ScopedOps**$_2$ be the intersection of sets **Ops**$_2$ and **Scope**$_{2nd}$.
- Submitting **Ops**$_1$, **Sync** and **Ops**$_2$ for execution, in that order, will result in execution dependency **ExeDep** between **ScopedOps**$_1$ and **ScopedOps**$_2$.
- Execution dependency **ExeDep** guarantees that **ScopedOps**$_1$ happen-before **ScopedOps**$_2$.

An *execution dependency chain* is a sequence of execution dependencies that form a happens-before relation between the first dependency's **ScopedOps**$_1$ and the final dependency's **ScopedOps**$_2$. For each consecutive pair of execution dependencies, a chain exists if the intersection of **Scope**$_{2nd}$ in the first dependency and **Scope**$_{1st}$ in the second dependency is not an empty set. The formation of a single execution dependency from an execution dependency chain can be described by substituting the following in the description of execution dependencies:

- Let **Sync** be a set of synchronization commands that generate an execution dependency chain.
- Let **Scope**$_{1st}$ be the first synchronization scope of the first command in **Sync**.
- Let **Scope**$_{2nd}$ be the second synchronization scope of the last command in **Sync**.

Execution dependencies alone are not sufficient to guarantee that values resulting from writes in one set of operations **can** be read from another set of operations.

Three additional types of operations are used to control memory access. *Availability operations* cause the values generated by specified memory write accesses to become *available* to a memory domain for future access. Any available value remains available until a subsequent write to the same memory location occurs (whether it is made available or not) or the memory is freed. *Memory domain operations* cause writes that are available to a source memory domain to become available to a destination memory domain (an example of this is making writes available to the host domain available to the device domain). *Visibility operations* cause values available to a memory domain to become *visible* to specified memory accesses.

Availability, visibility, memory domains, and memory domain operations are formally defined in the Availability and Visibility section of the Memory Model chapter. Which API operations perform each of these operations is defined in Availability, Visibility, and Domain Operations.

A *memory dependency* is an execution dependency which includes availability and visibility operations such that:

- The first set of operations happens-before the availability operation.

- The availability operation happens-before the visibility operation.
- The visibility operation happens-before the second set of operations.

Once written values are made visible to a particular type of memory access, they **can** be read or written by that type of memory access. Most synchronization commands in Vulkan define a memory dependency.

The specific memory accesses that are made available and visible are defined by the *access scopes* of a memory dependency. Any type of access that is in a memory dependency's first access scope and occurs in $\textbf{ScopedOps}_1$ is made available. Any type of access that is in a memory dependency's second access scope and occurs in $\textbf{ScopedOps}_2$ has any available writes made visible to it. Any type of operation that is not in a synchronization command's access scopes will not be included in the resulting dependency.

A memory dependency enforces availability and visibility of memory accesses and execution order between two sets of operations. Adding to the description of execution dependency chains:

- Let $\textbf{MemOps}_1$ be the set of memory accesses performed by $\textbf{ScopedOps}_1$.
- Let $\textbf{MemOps}_2$ be the set of memory accesses performed by $\textbf{ScopedOps}_2$.
- Let $\textbf{AccessScope}_{1st}$ be the first access scope of the first command in the **Sync** chain.
- Let $\textbf{AccessScope}_{2nd}$ be the second access scope of the last command in the **Sync** chain.
- Let $\textbf{ScopedMemOps}_1$ be the intersection of sets $\textbf{MemOps}_1$ and $\textbf{AccessScope}_{1st}$.
- Let $\textbf{ScopedMemOps}_2$ be the intersection of sets $\textbf{MemOps}_2$ and $\textbf{AccessScope}_{2nd}$.
- Submitting $\textbf{Ops}_1$, **Sync**, and $\textbf{Ops}_2$ for execution, in that order, will result in a memory dependency **MemDep** between $\textbf{ScopedOps}_1$ and $\textbf{ScopedOps}_2$.
- Memory dependency **MemDep** guarantees that:
  - Memory writes in $\textbf{ScopedMemOps}_1$ are made available.
  - Available memory writes, including those from $\textbf{ScopedMemOps}_1$, are made visible to $\textbf{ScopedMemOps}_2$.

NOTE

Execution and memory dependencies are used to solve data hazards, i.e. to ensure that read and write operations occur in a well-defined order. Write-after-read hazards can be solved with just an execution dependency, but read-after-write and write-after-write hazards need appropriate memory dependencies to be included between them. If an application does not include dependencies to solve these hazards, the results and execution orders of memory accesses are undefined.

7.1.1. Image Layout Transitions

Image subresources **can** be transitioned from one layout to another as part of a memory dependency (e.g. by using an image memory barrier). When a layout transition is specified in a memory dependency, it happens-after the availability operations in the memory dependency, and happens-before the visibility operations. Image layout transitions **may** perform read and write accesses on all memory bound to the image subresource range, so applications **must** ensure that all memory writes have been made available before a layout transition is executed. Available memory

is automatically made visible to a layout transition, and writes performed by a layout transition are automatically made available.

Layout transitions always apply to a particular image subresource range, and specify both an old layout and new layout. The old layout **must** either be VK_IMAGE_LAYOUT_UNDEFINED, or match the current layout of the image subresource range. If the old layout matches the current layout of the image subresource range, the transition preserves the contents of that range. If the old layout is VK_IMAGE_LAYOUT_UNDEFINED, the contents of that range **may** be discarded.

NOTE

Image layout transitions with VK_IMAGE_LAYOUT_UNDEFINED allow the implementation to discard the image subresource range, which can provide performance or power benefits. Tile-based architectures may be able to avoid flushing tile data to memory, and immediate style renderers may be able to achieve fast metadata clears to reinitialize frame buffer compression state, or similar.

If the contents of an attachment are not needed after a render pass completes, then applications **should** use VK_ATTACHMENT_STORE_OP_DONT_CARE.

As image layout transitions **may** perform read and write accesses on the memory bound to the image, if the image subresource affected by the layout transition is bound to peer memory for any device in the current device mask then the memory heap the bound memory comes from **must** support the VK_PEER_MEMORY_FEATURE_GENERIC_SRC_BIT and VK_PEER_MEMORY_FEATURE_GENERIC_DST_BIT capabilities as returned by vkGetDeviceGroupPeerMemoryFeatures.

NOTE

Applications **must** ensure that layout transitions happen-after all operations accessing the image with the old layout, and happen-before any operations that will access the image with the new layout. Layout transitions are potentially read/write operations, so not defining appropriate memory dependencies to guarantee this will result in a data race.

Image layout transitions interact with memory aliasing.

Layout transitions that are performed via image memory barriers execute in their entirety in submission order, relative to other image layout transitions submitted to the same queue, including those performed by render passes. In effect there is an implicit execution dependency from each such layout transition to all layout transitions previously submitted to the same queue.

7.1.2. Pipeline Stages

The work performed by an action command consists of multiple operations, which are performed as a sequence of logically independent steps known as *pipeline stages*. The exact pipeline stages executed depend on the particular command that is used, and current command buffer state when the command was recorded.

NOTE

Operations performed by synchronization commands (e.g. availability and visibility operations) are not executed by a defined pipeline stage. However other commands can still synchronize with them by using the synchronization scopes to create a dependency chain.

Execution of operations across pipeline stages **must** adhere to implicit ordering guarantees, particularly including pipeline stage order. Otherwise, execution across pipeline stages **may** overlap or execute out of order with regards to other stages, unless otherwise enforced by an execution dependency.

Several of the synchronization commands include pipeline stage parameters, restricting the synchronization scopes for that command to just those stages. This allows fine grained control over the exact execution dependencies and accesses performed by action commands. Implementations **should** use these pipeline stages to avoid unnecessary stalls or cache flushing.

Bits which **can** be set in a VkPipelineStageFlags2 mask, specifying stages of execution, are:

```
// Provided by VK_VERSION_1_3
// Flag bits for VkPipelineStageFlagBits2
typedef VkFlags64 VkPipelineStageFlagBits2;
static const VkPipelineStageFlagBits2 VK_PIPELINE_STAGE_2_NONE = 0ULL;
static const VkPipelineStageFlagBits2 VK_PIPELINE_STAGE_2_NONE_KHR = 0ULL;
static const VkPipelineStageFlagBits2 VK_PIPELINE_STAGE_2_TOP_OF_PIPE_BIT =
0x00000001ULL;
static const VkPipelineStageFlagBits2 VK_PIPELINE_STAGE_2_TOP_OF_PIPE_BIT_KHR =
0x00000001ULL;
static const VkPipelineStageFlagBits2 VK_PIPELINE_STAGE_2_DRAW_INDIRECT_BIT =
0x00000002ULL;
static const VkPipelineStageFlagBits2 VK_PIPELINE_STAGE_2_DRAW_INDIRECT_BIT_KHR =
0x00000002ULL;
static const VkPipelineStageFlagBits2 VK_PIPELINE_STAGE_2_VERTEX_INPUT_BIT =
0x00000004ULL;
static const VkPipelineStageFlagBits2 VK_PIPELINE_STAGE_2_VERTEX_INPUT_BIT_KHR =
0x00000004ULL;
static const VkPipelineStageFlagBits2 VK_PIPELINE_STAGE_2_VERTEX_SHADER_BIT =
0x00000008ULL;
static const VkPipelineStageFlagBits2 VK_PIPELINE_STAGE_2_VERTEX_SHADER_BIT_KHR =
0x00000008ULL;
static const VkPipelineStageFlagBits2
VK_PIPELINE_STAGE_2_TESSELLATION_CONTROL_SHADER_BIT = 0x00000010ULL;
static const VkPipelineStageFlagBits2
VK_PIPELINE_STAGE_2_TESSELLATION_CONTROL_SHADER_BIT_KHR = 0x00000010ULL;
static const VkPipelineStageFlagBits2
VK_PIPELINE_STAGE_2_TESSELLATION_EVALUATION_SHADER_BIT = 0x00000020ULL;
static const VkPipelineStageFlagBits2
VK_PIPELINE_STAGE_2_TESSELLATION_EVALUATION_SHADER_BIT_KHR = 0x00000020ULL;
static const VkPipelineStageFlagBits2 VK_PIPELINE_STAGE_2_GEOMETRY_SHADER_BIT =
0x00000040ULL;
static const VkPipelineStageFlagBits2 VK_PIPELINE_STAGE_2_GEOMETRY_SHADER_BIT_KHR =
0x00000040ULL;
static const VkPipelineStageFlagBits2 VK_PIPELINE_STAGE_2_FRAGMENT_SHADER_BIT =
0x00000080ULL;
static const VkPipelineStageFlagBits2 VK_PIPELINE_STAGE_2_FRAGMENT_SHADER_BIT_KHR =
0x00000080ULL;
static const VkPipelineStageFlagBits2 VK_PIPELINE_STAGE_2_EARLY_FRAGMENT_TESTS_BIT =
```

```
0x00000100ULL;
static const VkPipelineStageFlagBits2 VK_PIPELINE_STAGE_2_EARLY_FRAGMENT_TESTS_BIT_KHR
= 0x00000100ULL;
static const VkPipelineStageFlagBits2 VK_PIPELINE_STAGE_2_LATE_FRAGMENT_TESTS_BIT =
0x00000200ULL;
static const VkPipelineStageFlagBits2 VK_PIPELINE_STAGE_2_LATE_FRAGMENT_TESTS_BIT_KHR
= 0x00000200ULL;
static const VkPipelineStageFlagBits2 VK_PIPELINE_STAGE_2_COLOR_ATTACHMENT_OUTPUT_BIT
= 0x00000400ULL;
static const VkPipelineStageFlagBits2
VK_PIPELINE_STAGE_2_COLOR_ATTACHMENT_OUTPUT_BIT_KHR = 0x00000400ULL;
static const VkPipelineStageFlagBits2 VK_PIPELINE_STAGE_2_COMPUTE_SHADER_BIT =
0x00000800ULL;
static const VkPipelineStageFlagBits2 VK_PIPELINE_STAGE_2_COMPUTE_SHADER_BIT_KHR =
0x00000800ULL;
static const VkPipelineStageFlagBits2 VK_PIPELINE_STAGE_2_ALL_TRANSFER_BIT =
0x00001000ULL;
static const VkPipelineStageFlagBits2 VK_PIPELINE_STAGE_2_ALL_TRANSFER_BIT_KHR =
0x00001000ULL;
static const VkPipelineStageFlagBits2 VK_PIPELINE_STAGE_2_TRANSFER_BIT =
0x00001000ULL;
static const VkPipelineStageFlagBits2 VK_PIPELINE_STAGE_2_TRANSFER_BIT_KHR =
0x00001000ULL;
static const VkPipelineStageFlagBits2 VK_PIPELINE_STAGE_2_BOTTOM_OF_PIPE_BIT =
0x00002000ULL;
static const VkPipelineStageFlagBits2 VK_PIPELINE_STAGE_2_BOTTOM_OF_PIPE_BIT_KHR =
0x00002000ULL;
static const VkPipelineStageFlagBits2 VK_PIPELINE_STAGE_2_HOST_BIT = 0x00004000ULL;
static const VkPipelineStageFlagBits2 VK_PIPELINE_STAGE_2_HOST_BIT_KHR =
0x00004000ULL;
static const VkPipelineStageFlagBits2 VK_PIPELINE_STAGE_2_ALL_GRAPHICS_BIT =
0x00008000ULL;
static const VkPipelineStageFlagBits2 VK_PIPELINE_STAGE_2_ALL_GRAPHICS_BIT_KHR =
0x00008000ULL;
static const VkPipelineStageFlagBits2 VK_PIPELINE_STAGE_2_ALL_COMMANDS_BIT =
0x00010000ULL;
static const VkPipelineStageFlagBits2 VK_PIPELINE_STAGE_2_ALL_COMMANDS_BIT_KHR =
0x00010000ULL;
static const VkPipelineStageFlagBits2 VK_PIPELINE_STAGE_2_COPY_BIT = 0x100000000ULL;
static const VkPipelineStageFlagBits2 VK_PIPELINE_STAGE_2_COPY_BIT_KHR =
0x100000000ULL;
static const VkPipelineStageFlagBits2 VK_PIPELINE_STAGE_2_RESOLVE_BIT =
0x200000000ULL;
static const VkPipelineStageFlagBits2 VK_PIPELINE_STAGE_2_RESOLVE_BIT_KHR =
0x200000000ULL;
static const VkPipelineStageFlagBits2 VK_PIPELINE_STAGE_2_BLIT_BIT = 0x400000000ULL;
static const VkPipelineStageFlagBits2 VK_PIPELINE_STAGE_2_BLIT_BIT_KHR =
0x400000000ULL;
static const VkPipelineStageFlagBits2 VK_PIPELINE_STAGE_2_CLEAR_BIT = 0x800000000ULL;
static const VkPipelineStageFlagBits2 VK_PIPELINE_STAGE_2_CLEAR_BIT_KHR =
0x800000000ULL;
```

```
static const VkPipelineStageFlagBits2 VK_PIPELINE_STAGE_2_INDEX_INPUT_BIT =
0x1000000000ULL;
static const VkPipelineStageFlagBits2 VK_PIPELINE_STAGE_2_INDEX_INPUT_BIT_KHR =
0x1000000000ULL;
static const VkPipelineStageFlagBits2 VK_PIPELINE_STAGE_2_VERTEX_ATTRIBUTE_INPUT_BIT =
0x2000000000ULL;
static const VkPipelineStageFlagBits2
VK_PIPELINE_STAGE_2_VERTEX_ATTRIBUTE_INPUT_BIT_KHR = 0x2000000000ULL;
static const VkPipelineStageFlagBits2
VK_PIPELINE_STAGE_2_PRE_RASTERIZATION_SHADERS_BIT = 0x4000000000ULL;
static const VkPipelineStageFlagBits2
VK_PIPELINE_STAGE_2_PRE_RASTERIZATION_SHADERS_BIT_KHR = 0x4000000000ULL;
```

- VK_PIPELINE_STAGE_2_NONE specifies no stages of execution.
- VK_PIPELINE_STAGE_2_DRAW_INDIRECT_BIT specifies the stage of the pipeline where indirect command parameters are consumed.
- VK_PIPELINE_STAGE_2_INDEX_INPUT_BIT specifies the stage of the pipeline where index buffers are consumed.
- VK_PIPELINE_STAGE_2_VERTEX_ATTRIBUTE_INPUT_BIT specifies the stage of the pipeline where vertex buffers are consumed.
- VK_PIPELINE_STAGE_2_VERTEX_INPUT_BIT is equivalent to the logical OR of:
  - VK_PIPELINE_STAGE_2_INDEX_INPUT_BIT
  - VK_PIPELINE_STAGE_2_VERTEX_ATTRIBUTE_INPUT_BIT
- VK_PIPELINE_STAGE_2_VERTEX_SHADER_BIT specifies the vertex shader stage.
- VK_PIPELINE_STAGE_2_TESSELLATION_CONTROL_SHADER_BIT specifies the tessellation control shader stage.
- VK_PIPELINE_STAGE_2_TESSELLATION_EVALUATION_SHADER_BIT specifies the tessellation evaluation shader stage.
- VK_PIPELINE_STAGE_2_GEOMETRY_SHADER_BIT specifies the geometry shader stage.
- VK_PIPELINE_STAGE_2_PRE_RASTERIZATION_SHADERS_BIT is equivalent to specifying all supported pre-rasterization shader stages:
  - VK_PIPELINE_STAGE_2_VERTEX_SHADER_BIT
  - VK_PIPELINE_STAGE_2_TESSELLATION_CONTROL_SHADER_BIT
  - VK_PIPELINE_STAGE_2_TESSELLATION_EVALUATION_SHADER_BIT
  - VK_PIPELINE_STAGE_2_GEOMETRY_SHADER_BIT
- VK_PIPELINE_STAGE_2_FRAGMENT_SHADER_BIT specifies the fragment shader stage.
- VK_PIPELINE_STAGE_2_EARLY_FRAGMENT_TESTS_BIT specifies the stage of the pipeline where early fragment tests (depth and stencil tests before fragment shading) are performed. This stage also includes render pass load operations for framebuffer attachments with a depth/stencil format.
- VK_PIPELINE_STAGE_2_LATE_FRAGMENT_TESTS_BIT specifies the stage of the pipeline where late fragment tests (depth and stencil tests after fragment shading) are performed. This stage also

includes render pass store operations for framebuffer attachments with a depth/stencil format.

- VK_PIPELINE_STAGE_2_COLOR_ATTACHMENT_OUTPUT_BIT specifies the stage of the pipeline where final color values are output from the pipeline. This stage includes blending, logic operations, render pass load and store operations for color attachments, render pass multisample resolve operations, and vkCmdClearAttachments.
- VK_PIPELINE_STAGE_2_COMPUTE_SHADER_BIT specifies the compute shader stage.
- VK_PIPELINE_STAGE_2_HOST_BIT specifies a pseudo-stage indicating execution on the host of reads/writes of device memory. This stage is not invoked by any commands recorded in a command buffer.
- VK_PIPELINE_STAGE_2_COPY_BIT specifies the execution of all copy commands, including vkCmdCopyQueryPoolResults.
- VK_PIPELINE_STAGE_2_BLIT_BIT specifies the execution of vkCmdBlitImage.
- VK_PIPELINE_STAGE_2_RESOLVE_BIT specifies the execution of vkCmdResolveImage.
- VK_PIPELINE_STAGE_2_CLEAR_BIT specifies the execution of clear commands, with the exception of vkCmdClearAttachments.
- VK_PIPELINE_STAGE_2_ALL_TRANSFER_BIT is equivalent to specifying all of:
  - VK_PIPELINE_STAGE_2_COPY_BIT
  - VK_PIPELINE_STAGE_2_BLIT_BIT
  - VK_PIPELINE_STAGE_2_RESOLVE_BIT
  - VK_PIPELINE_STAGE_2_CLEAR_BIT
  - VK_PIPELINE_STAGE_2_ACCELERATION_STRUCTURE_COPY_BIT_KHR
- VK_PIPELINE_STAGE_2_ALL_GRAPHICS_BIT specifies the execution of all graphics pipeline stages, and is equivalent to the logical OR of:
  - VK_PIPELINE_STAGE_2_DRAW_INDIRECT_BIT
  - VK_PIPELINE_STAGE_2_VERTEX_INPUT_BIT
  - VK_PIPELINE_STAGE_2_VERTEX_SHADER_BIT
  - VK_PIPELINE_STAGE_2_TESSELLATION_CONTROL_SHADER_BIT
  - VK_PIPELINE_STAGE_2_TESSELLATION_EVALUATION_SHADER_BIT
  - VK_PIPELINE_STAGE_2_GEOMETRY_SHADER_BIT
  - VK_PIPELINE_STAGE_2_FRAGMENT_SHADER_BIT
  - VK_PIPELINE_STAGE_2_EARLY_FRAGMENT_TESTS_BIT
  - VK_PIPELINE_STAGE_2_LATE_FRAGMENT_TESTS_BIT
  - VK_PIPELINE_STAGE_2_COLOR_ATTACHMENT_OUTPUT_BIT
- VK_PIPELINE_STAGE_2_ALL_COMMANDS_BIT specifies all operations performed by all commands supported on the queue it is used with.
- VK_PIPELINE_STAGE_2_TOP_OF_PIPE_BIT is equivalent to VK_PIPELINE_STAGE_2_ALL_COMMANDS_BIT with VkAccessFlags2 set to 0 when specified in the second synchronization scope, but equivalent to VK_PIPELINE_STAGE_2_NONE in the first scope.

- VK_PIPELINE_STAGE_2_BOTTOM_OF_PIPE_BIT is equivalent to VK_PIPELINE_STAGE_2_ALL_COMMANDS_BIT with VkAccessFlags2 set to 0 when specified in the first synchronization scope, but equivalent to VK_PIPELINE_STAGE_2_NONE in the second scope.

NOTE	The TOP and BOTTOM pipeline stages are deprecated, and applications should prefer VK_PIPELINE_STAGE_2_ALL_COMMANDS_BIT and VK_PIPELINE_STAGE_2_NONE.

NOTE	The VkPipelineStageFlags2 bitmask goes beyond the 31 individual bit flags allowable within a C99 enum, which is how VkPipelineStageFlagBits is defined. The first 31 values are common to both, and are interchangeable.

VkPipelineStageFlags2 is a bitmask type for setting a mask of zero or more VkPipelineStageFlagBits2 flags:

```
// Provided by VK_VERSION_1_3
typedef VkFlags64 VkPipelineStageFlags2;
```

Bits which **can** be set in a VkPipelineStageFlags mask, specifying stages of execution, are:

```
// Provided by VK_VERSION_1_0
typedef enum VkPipelineStageFlagBits {
    VK_PIPELINE_STAGE_TOP_OF_PIPE_BIT = 0x00000001,
    VK_PIPELINE_STAGE_DRAW_INDIRECT_BIT = 0x00000002,
    VK_PIPELINE_STAGE_VERTEX_INPUT_BIT = 0x00000004,
    VK_PIPELINE_STAGE_VERTEX_SHADER_BIT = 0x00000008,
    VK_PIPELINE_STAGE_TESSELLATION_CONTROL_SHADER_BIT = 0x00000010,
    VK_PIPELINE_STAGE_TESSELLATION_EVALUATION_SHADER_BIT = 0x00000020,
    VK_PIPELINE_STAGE_GEOMETRY_SHADER_BIT = 0x00000040,
    VK_PIPELINE_STAGE_FRAGMENT_SHADER_BIT = 0x00000080,
    VK_PIPELINE_STAGE_EARLY_FRAGMENT_TESTS_BIT = 0x00000100,
    VK_PIPELINE_STAGE_LATE_FRAGMENT_TESTS_BIT = 0x00000200,
    VK_PIPELINE_STAGE_COLOR_ATTACHMENT_OUTPUT_BIT = 0x00000400,
    VK_PIPELINE_STAGE_COMPUTE_SHADER_BIT = 0x00000800,
    VK_PIPELINE_STAGE_TRANSFER_BIT = 0x00001000,
    VK_PIPELINE_STAGE_BOTTOM_OF_PIPE_BIT = 0x00002000,
    VK_PIPELINE_STAGE_HOST_BIT = 0x00004000,
    VK_PIPELINE_STAGE_ALL_GRAPHICS_BIT = 0x00008000,
    VK_PIPELINE_STAGE_ALL_COMMANDS_BIT = 0x00010000,
  // Provided by VK_VERSION_1_3
    VK_PIPELINE_STAGE_NONE = 0,
} VkPipelineStageFlagBits;
```

These values all have the same meaning as the equivalently named values for VkPipelineStageFlags2.

- VK_PIPELINE_STAGE_NONE specifies no stages of execution.
- VK_PIPELINE_STAGE_DRAW_INDIRECT_BIT specifies the stage of the pipeline where VkDrawIndirect* /

VkDispatchIndirect* / VkTraceRaysIndirect* data structures are consumed.

- VK_PIPELINE_STAGE_VERTEX_INPUT_BIT specifies the stage of the pipeline where vertex and index buffers are consumed.
- VK_PIPELINE_STAGE_VERTEX_SHADER_BIT specifies the vertex shader stage.
- VK_PIPELINE_STAGE_TESSELLATION_CONTROL_SHADER_BIT specifies the tessellation control shader stage.
- VK_PIPELINE_STAGE_TESSELLATION_EVALUATION_SHADER_BIT specifies the tessellation evaluation shader stage.
- VK_PIPELINE_STAGE_GEOMETRY_SHADER_BIT specifies the geometry shader stage.
- VK_PIPELINE_STAGE_FRAGMENT_SHADER_BIT specifies the fragment shader stage.
- VK_PIPELINE_STAGE_EARLY_FRAGMENT_TESTS_BIT specifies the stage of the pipeline where early fragment tests (depth and stencil tests before fragment shading) are performed. This stage also includes render pass load operations for framebuffer attachments with a depth/stencil format.
- VK_PIPELINE_STAGE_LATE_FRAGMENT_TESTS_BIT specifies the stage of the pipeline where late fragment tests (depth and stencil tests after fragment shading) are performed. This stage also includes render pass store operations for framebuffer attachments with a depth/stencil format.
- VK_PIPELINE_STAGE_COLOR_ATTACHMENT_OUTPUT_BIT specifies the stage of the pipeline after blending where the final color values are output from the pipeline. This stage includes blending, logic operations, render pass load and store operations for color attachments, render pass multisample resolve operations, and vkCmdClearAttachments.
- VK_PIPELINE_STAGE_COMPUTE_SHADER_BIT specifies the execution of a compute shader.
- VK_PIPELINE_STAGE_TRANSFER_BIT specifies the following commands:
  - All copy commands, including vkCmdCopyQueryPoolResults
  - vkCmdBlitImage2 and vkCmdBlitImage
  - vkCmdResolveImage2 and vkCmdResolveImage
  - All clear commands, with the exception of vkCmdClearAttachments
- VK_PIPELINE_STAGE_HOST_BIT specifies a pseudo-stage indicating execution on the host of reads/writes of device memory. This stage is not invoked by any commands recorded in a command buffer.
- VK_PIPELINE_STAGE_ALL_GRAPHICS_BIT specifies the execution of all graphics pipeline stages, and is equivalent to the logical OR of:
  - VK_PIPELINE_STAGE_DRAW_INDIRECT_BIT
  - VK_PIPELINE_STAGE_VERTEX_INPUT_BIT
  - VK_PIPELINE_STAGE_VERTEX_SHADER_BIT
  - VK_PIPELINE_STAGE_TESSELLATION_CONTROL_SHADER_BIT
  - VK_PIPELINE_STAGE_TESSELLATION_EVALUATION_SHADER_BIT
  - VK_PIPELINE_STAGE_GEOMETRY_SHADER_BIT
  - VK_PIPELINE_STAGE_FRAGMENT_SHADER_BIT

    - VK_PIPELINE_STAGE_EARLY_FRAGMENT_TESTS_BIT
    - VK_PIPELINE_STAGE_LATE_FRAGMENT_TESTS_BIT
    - VK_PIPELINE_STAGE_COLOR_ATTACHMENT_OUTPUT_BIT
- VK_PIPELINE_STAGE_ALL_COMMANDS_BIT specifies all operations performed by all commands supported on the queue it is used with.
- VK_PIPELINE_STAGE_TOP_OF_PIPE_BIT is equivalent to VK_PIPELINE_STAGE_ALL_COMMANDS_BIT with VkAccessFlags set to 0 when specified in the second synchronization scope, but specifies no stage of execution when specified in the first scope.
- VK_PIPELINE_STAGE_BOTTOM_OF_PIPE_BIT is equivalent to VK_PIPELINE_STAGE_ALL_COMMANDS_BIT with VkAccessFlags set to 0 when specified in the first synchronization scope, but specifies no stage of execution when specified in the second scope.

```
// Provided by VK_VERSION_1_0
typedef VkFlags VkPipelineStageFlags;
```

VkPipelineStageFlags is a bitmask type for setting a mask of zero or more VkPipelineStageFlagBits.

If a synchronization command includes a source stage mask, its first synchronization scope only includes execution of the pipeline stages specified in that mask and any logically earlier stages. Its first access scope only includes memory accesses performed by pipeline stages explicitly specified in the source stage mask.

If a synchronization command includes a destination stage mask, its second synchronization scope only includes execution of the pipeline stages specified in that mask and any logically later stages. Its second access scope only includes memory accesses performed by pipeline stages explicitly specified in the destination stage mask.

NOTE	Note that access scopes do not interact with the logically earlier or later stages for either scope - only the stages the application specifies are considered part of each access scope.

Certain pipeline stages are only available on queues that support a particular set of operations. The following table lists, for each pipeline stage flag, which queue capability flag **must** be supported by the queue. When multiple flags are enumerated in the second column of the table, it means that the pipeline stage is supported on the queue if it supports any of the listed capability flags. For further details on queue capabilities see Physical Device Enumeration and Queues.

Table 3. Supported Pipeline Stage Flags

Pipeline stage flag	**Required queue capability flag**
VK_PIPELINE_STAGE_2_NONE	None required
VK_PIPELINE_STAGE_2_TOP_OF_PIPE_BIT	None required
VK_PIPELINE_STAGE_2_DRAW_INDIRECT_BIT	VK_QUEUE_GRAPHICS_BIT or VK_QUEUE_COMPUTE_BIT

Pipeline stage flag	Required queue capability flag
VK_PIPELINE_STAGE_2_VERTEX_INPUT_BIT	VK_QUEUE_GRAPHICS_BIT
VK_PIPELINE_STAGE_2_VERTEX_SHADER_BIT	VK_QUEUE_GRAPHICS_BIT
VK_PIPELINE_STAGE_2_TESSELLATION_CONTROL_SHADER_BIT	VK_QUEUE_GRAPHICS_BIT
VK_PIPELINE_STAGE_2_TESSELLATION_EVALUATION_SHADER_BIT	VK_QUEUE_GRAPHICS_BIT
VK_PIPELINE_STAGE_2_GEOMETRY_SHADER_BIT	VK_QUEUE_GRAPHICS_BIT
VK_PIPELINE_STAGE_2_FRAGMENT_SHADER_BIT	VK_QUEUE_GRAPHICS_BIT
VK_PIPELINE_STAGE_2_EARLY_FRAGMENT_TESTS_BIT	VK_QUEUE_GRAPHICS_BIT
VK_PIPELINE_STAGE_2_LATE_FRAGMENT_TESTS_BIT	VK_QUEUE_GRAPHICS_BIT
VK_PIPELINE_STAGE_2_COLOR_ATTACHMENT_OUTPUT_BIT	VK_QUEUE_GRAPHICS_BIT
VK_PIPELINE_STAGE_2_COMPUTE_SHADER_BIT	VK_QUEUE_COMPUTE_BIT
VK_PIPELINE_STAGE_2_ALL_TRANSFER_BIT	VK_QUEUE_GRAPHICS_BIT or VK_QUEUE_COMPUTE_BIT or VK_QUEUE_TRANSFER_BIT
VK_PIPELINE_STAGE_2_BOTTOM_OF_PIPE_BIT	None required
VK_PIPELINE_STAGE_2_HOST_BIT	None required
VK_PIPELINE_STAGE_2_ALL_GRAPHICS_BIT	VK_QUEUE_GRAPHICS_BIT
VK_PIPELINE_STAGE_2_ALL_COMMANDS_BIT	None required
VK_PIPELINE_STAGE_2_COPY_BIT	VK_QUEUE_GRAPHICS_BIT or VK_QUEUE_COMPUTE_BIT or VK_QUEUE_TRANSFER_BIT
VK_PIPELINE_STAGE_2_RESOLVE_BIT	VK_QUEUE_GRAPHICS_BIT or VK_QUEUE_COMPUTE_BIT or VK_QUEUE_TRANSFER_BIT
VK_PIPELINE_STAGE_2_BLIT_BIT	VK_QUEUE_GRAPHICS_BIT or VK_QUEUE_COMPUTE_BIT or VK_QUEUE_TRANSFER_BIT
VK_PIPELINE_STAGE_2_CLEAR_BIT	VK_QUEUE_GRAPHICS_BIT or VK_QUEUE_COMPUTE_BIT or VK_QUEUE_TRANSFER_BIT
VK_PIPELINE_STAGE_2_INDEX_INPUT_BIT	VK_QUEUE_GRAPHICS_BIT
VK_PIPELINE_STAGE_2_VERTEX_ATTRIBUTE_INPUT_BIT	VK_QUEUE_GRAPHICS_BIT
VK_PIPELINE_STAGE_2_PRE_RASTERIZATION_SHADERS_BIT	VK_QUEUE_GRAPHICS_BIT
VK_PIPELINE_STAGE_2_COMMAND_PREPROCESS_BIT_EXT	VK_QUEUE_GRAPHICS_BIT or VK_QUEUE_COMPUTE_BIT
VK_PIPELINE_STAGE_2_ACCELERATION_STRUCTURE_COPY_BIT_KHR	VK_QUEUE_GRAPHICS_BIT or VK_QUEUE_COMPUTE_BIT or VK_QUEUE_TRANSFER_BIT

Pipeline stages that execute as a result of a command logically complete execution in a specific order, such that completion of a logically later pipeline stage **must** not happen-before completion of

a logically earlier stage. This means that including any stage in the source stage mask for a particular synchronization command also implies that any logically earlier stages are included in $\textbf{Scope}_{1st}$ for that command.

Similarly, initiation of a logically earlier pipeline stage **must** not happen-after initiation of a logically later pipeline stage. Including any given stage in the destination stage mask for a particular synchronization command also implies that any logically later stages are included in $\textbf{Scope}_{2nd}$ for that command.

NOTE

Implementations **may** not support synchronization at every pipeline stage for every synchronization operation. If a pipeline stage that an implementation does not support synchronization for appears in a source stage mask, it **may** substitute any logically later stage in its place for the first synchronization scope. If a pipeline stage that an implementation does not support synchronization for appears in a destination stage mask, it **may** substitute any logically earlier stage in its place for the second synchronization scope.

For example, if an implementation is unable to signal an event immediately after vertex shader execution is complete, it **may** instead signal the event after color attachment output has completed.

If an implementation makes such a substitution, it **must** not affect the semantics of execution or memory dependencies or image and buffer memory barriers.

Graphics pipelines are executable on queues supporting `VK_QUEUE_GRAPHICS_BIT`. Stages executed by graphics pipelines **can** only be specified in commands recorded for queues supporting `VK_QUEUE_GRAPHICS_BIT`.

The graphics pipeline executes the following stages, with the logical ordering of the stages matching the order specified here:

- `VK_PIPELINE_STAGE_2_DRAW_INDIRECT_BIT`
- `VK_PIPELINE_STAGE_2_INDEX_INPUT_BIT`
- `VK_PIPELINE_STAGE_2_VERTEX_ATTRIBUTE_INPUT_BIT`
- `VK_PIPELINE_STAGE_2_VERTEX_SHADER_BIT`
- `VK_PIPELINE_STAGE_2_TESSELLATION_CONTROL_SHADER_BIT`
- `VK_PIPELINE_STAGE_2_TESSELLATION_EVALUATION_SHADER_BIT`
- `VK_PIPELINE_STAGE_2_GEOMETRY_SHADER_BIT`
- `VK_PIPELINE_STAGE_2_EARLY_FRAGMENT_TESTS_BIT`
- `VK_PIPELINE_STAGE_2_FRAGMENT_SHADER_BIT`
- `VK_PIPELINE_STAGE_2_LATE_FRAGMENT_TESTS_BIT`
- `VK_PIPELINE_STAGE_2_COLOR_ATTACHMENT_OUTPUT_BIT`

For the compute pipeline, the following stages occur in this order:

- VK_PIPELINE_STAGE_2_DRAW_INDIRECT_BIT
- VK_PIPELINE_STAGE_2_COMPUTE_SHADER_BIT

For the transfer pipeline, the following stages occur in this order:

- VK_PIPELINE_STAGE_2_TRANSFER_BIT

For host operations, only one pipeline stage occurs, so no order is guaranteed:

- VK_PIPELINE_STAGE_2_HOST_BIT

7.1.3. Access Types

Memory in Vulkan **can** be accessed from within shader invocations and via some fixed-function stages of the pipeline. The *access type* is a function of the descriptor type used, or how a fixed-function stage accesses memory.

Some synchronization commands take sets of access types as parameters to define the access scopes of a memory dependency. If a synchronization command includes a *source access mask*, its first access scope only includes accesses via the access types specified in that mask. Similarly, if a synchronization command includes a *destination access mask*, its second access scope only includes accesses via the access types specified in that mask.

Bits which **can** be set in the srcAccessMask and dstAccessMask members of VkMemoryBarrier2KHR, VkImageMemoryBarrier2KHR, and VkBufferMemoryBarrier2KHR, specifying access behavior, are:

```
// Provided by VK_VERSION_1_3
// Flag bits for VkAccessFlagBits2
typedef VkFlags64 VkAccessFlagBits2;
static const VkAccessFlagBits2 VK_ACCESS_2_NONE = 0ULL;
static const VkAccessFlagBits2 VK_ACCESS_2_NONE_KHR = 0ULL;
static const VkAccessFlagBits2 VK_ACCESS_2_INDIRECT_COMMAND_READ_BIT = 0x00000001ULL;
static const VkAccessFlagBits2 VK_ACCESS_2_INDIRECT_COMMAND_READ_BIT_KHR =
0x00000001ULL;
static const VkAccessFlagBits2 VK_ACCESS_2_INDEX_READ_BIT = 0x00000002ULL;
static const VkAccessFlagBits2 VK_ACCESS_2_INDEX_READ_BIT_KHR = 0x00000002ULL;
static const VkAccessFlagBits2 VK_ACCESS_2_VERTEX_ATTRIBUTE_READ_BIT = 0x00000004ULL;
static const VkAccessFlagBits2 VK_ACCESS_2_VERTEX_ATTRIBUTE_READ_BIT_KHR =
0x00000004ULL;
static const VkAccessFlagBits2 VK_ACCESS_2_UNIFORM_READ_BIT = 0x00000008ULL;
static const VkAccessFlagBits2 VK_ACCESS_2_UNIFORM_READ_BIT_KHR = 0x00000008ULL;
static const VkAccessFlagBits2 VK_ACCESS_2_INPUT_ATTACHMENT_READ_BIT = 0x00000010ULL;
static const VkAccessFlagBits2 VK_ACCESS_2_INPUT_ATTACHMENT_READ_BIT_KHR =
0x00000010ULL;
static const VkAccessFlagBits2 VK_ACCESS_2_SHADER_READ_BIT = 0x00000020ULL;
static const VkAccessFlagBits2 VK_ACCESS_2_SHADER_READ_BIT_KHR = 0x00000020ULL;
static const VkAccessFlagBits2 VK_ACCESS_2_SHADER_WRITE_BIT = 0x00000040ULL;
static const VkAccessFlagBits2 VK_ACCESS_2_SHADER_WRITE_BIT_KHR = 0x00000040ULL;
static const VkAccessFlagBits2 VK_ACCESS_2_COLOR_ATTACHMENT_READ_BIT = 0x00000080ULL;
static const VkAccessFlagBits2 VK_ACCESS_2_COLOR_ATTACHMENT_READ_BIT_KHR =
```

```
0x00000080ULL;
static const VkAccessFlagBits2 VK_ACCESS_2_COLOR_ATTACHMENT_WRITE_BIT = 0x00000100ULL;
static const VkAccessFlagBits2 VK_ACCESS_2_COLOR_ATTACHMENT_WRITE_BIT_KHR =
0x00000100ULL;
static const VkAccessFlagBits2 VK_ACCESS_2_DEPTH_STENCIL_ATTACHMENT_READ_BIT =
0x00000200ULL;
static const VkAccessFlagBits2 VK_ACCESS_2_DEPTH_STENCIL_ATTACHMENT_READ_BIT_KHR =
0x00000200ULL;
static const VkAccessFlagBits2 VK_ACCESS_2_DEPTH_STENCIL_ATTACHMENT_WRITE_BIT =
0x00000400ULL;
static const VkAccessFlagBits2 VK_ACCESS_2_DEPTH_STENCIL_ATTACHMENT_WRITE_BIT_KHR =
0x00000400ULL;
static const VkAccessFlagBits2 VK_ACCESS_2_TRANSFER_READ_BIT = 0x00000800ULL;
static const VkAccessFlagBits2 VK_ACCESS_2_TRANSFER_READ_BIT_KHR = 0x00000800ULL;
static const VkAccessFlagBits2 VK_ACCESS_2_TRANSFER_WRITE_BIT = 0x00001000ULL;
static const VkAccessFlagBits2 VK_ACCESS_2_TRANSFER_WRITE_BIT_KHR = 0x00001000ULL;
static const VkAccessFlagBits2 VK_ACCESS_2_HOST_READ_BIT = 0x00002000ULL;
static const VkAccessFlagBits2 VK_ACCESS_2_HOST_READ_BIT_KHR = 0x00002000ULL;
static const VkAccessFlagBits2 VK_ACCESS_2_HOST_WRITE_BIT = 0x00004000ULL;
static const VkAccessFlagBits2 VK_ACCESS_2_HOST_WRITE_BIT_KHR = 0x00004000ULL;
static const VkAccessFlagBits2 VK_ACCESS_2_MEMORY_READ_BIT = 0x00008000ULL;
static const VkAccessFlagBits2 VK_ACCESS_2_MEMORY_READ_BIT_KHR = 0x00008000ULL;
static const VkAccessFlagBits2 VK_ACCESS_2_MEMORY_WRITE_BIT = 0x00010000ULL;
static const VkAccessFlagBits2 VK_ACCESS_2_MEMORY_WRITE_BIT_KHR = 0x00010000ULL;
static const VkAccessFlagBits2 VK_ACCESS_2_SHADER_SAMPLED_READ_BIT = 0x100000000ULL;
static const VkAccessFlagBits2 VK_ACCESS_2_SHADER_SAMPLED_READ_BIT_KHR =
0x100000000ULL;
static const VkAccessFlagBits2 VK_ACCESS_2_SHADER_STORAGE_READ_BIT = 0x200000000ULL;
static const VkAccessFlagBits2 VK_ACCESS_2_SHADER_STORAGE_READ_BIT_KHR =
0x200000000ULL;
static const VkAccessFlagBits2 VK_ACCESS_2_SHADER_STORAGE_WRITE_BIT = 0x400000000ULL;
static const VkAccessFlagBits2 VK_ACCESS_2_SHADER_STORAGE_WRITE_BIT_KHR =
0x400000000ULL;
```

- VK_ACCESS_2_NONE specifies no accesses.
- VK_ACCESS_2_MEMORY_READ_BIT specifies all read accesses. It is always valid in any access mask, and is treated as equivalent to setting all READ access flags that are valid where it is used.
- VK_ACCESS_2_MEMORY_WRITE_BIT specifies all write accesses. It is always valid in any access mask, and is treated as equivalent to setting all WRITE access flags that are valid where it is used.
- VK_ACCESS_2_INDIRECT_COMMAND_READ_BIT specifies read access to command data read from indirect buffers as part of an indirect drawing or dispatch command. Such access occurs in the VK_PIPELINE_STAGE_2_DRAW_INDIRECT_BIT pipeline stage.
- VK_ACCESS_2_INDEX_READ_BIT specifies read access to an index buffer as part of an indexed drawing command, bound by vkCmdBindIndexBuffer. Such access occurs in the VK_PIPELINE_STAGE_2_INDEX_INPUT_BIT pipeline stage.
- VK_ACCESS_2_VERTEX_ATTRIBUTE_READ_BIT specifies read access to a vertex buffer as part of a drawing command, bound by vkCmdBindVertexBuffers. Such access occurs in the

VK_PIPELINE_STAGE_2_VERTEX_ATTRIBUTE_INPUT_BIT pipeline stage.

- VK_ACCESS_2_UNIFORM_READ_BIT specifies read access to a uniform buffer in any shader pipeline stage.
- VK_ACCESS_2_INPUT_ATTACHMENT_READ_BIT specifies read access to an input attachment within a render pass during fragment shading. Such access occurs in the VK_PIPELINE_STAGE_2_FRAGMENT_SHADER_BIT pipeline stage.
- VK_ACCESS_2_SHADER_SAMPLED_READ_BIT specifies read access to a uniform texel buffer or sampled image in any shader pipeline stage.
- VK_ACCESS_2_SHADER_STORAGE_READ_BIT specifies read access to a storage buffer, physical storage buffer, storage texel buffer, or storage image in any shader pipeline stage.
- VK_ACCESS_2_SHADER_READ_BIT is equivalent to the logical OR of:
  - VK_ACCESS_2_SHADER_SAMPLED_READ_BIT
  - VK_ACCESS_2_SHADER_STORAGE_READ_BIT
- VK_ACCESS_2_SHADER_STORAGE_WRITE_BIT specifies write access to a storage buffer, physical storage buffer, storage texel buffer, or storage image in any shader pipeline stage.
- VK_ACCESS_2_SHADER_WRITE_BIT is equivalent to VK_ACCESS_2_SHADER_STORAGE_WRITE_BIT.
- VK_ACCESS_2_COLOR_ATTACHMENT_READ_BIT specifies read access to a color attachment, such as via blending, logic operations or certain render pass load operations. Such access occurs in the VK_PIPELINE_STAGE_2_COLOR_ATTACHMENT_OUTPUT_BIT pipeline stage.
- VK_ACCESS_2_COLOR_ATTACHMENT_WRITE_BIT specifies write access to a color attachment during a render pass or via certain render pass load, store, and multisample resolve operations. Such access occurs in the VK_PIPELINE_STAGE_2_COLOR_ATTACHMENT_OUTPUT_BIT pipeline stage.
- VK_ACCESS_2_DEPTH_STENCIL_ATTACHMENT_READ_BIT specifies read access to a depth/stencil attachment, via depth or stencil operations or certain render pass load operations. Such access occurs in the VK_PIPELINE_STAGE_2_EARLY_FRAGMENT_TESTS_BIT or VK_PIPELINE_STAGE_2_LATE_FRAGMENT_TESTS_BIT pipeline stages.
- VK_ACCESS_2_DEPTH_STENCIL_ATTACHMENT_WRITE_BIT specifies write access to a depth/stencil attachment, via depth or stencil operations or certain render pass load and store operations. Such access occurs in the VK_PIPELINE_STAGE_2_EARLY_FRAGMENT_TESTS_BIT or VK_PIPELINE_STAGE_2_LATE_FRAGMENT_TESTS_BIT pipeline stages.
- VK_ACCESS_2_TRANSFER_READ_BIT specifies read access to an image or buffer in a copy operation. Such access occurs in the VK_PIPELINE_STAGE_2_COPY_BIT, VK_PIPELINE_STAGE_2_BLIT_BIT, or VK_PIPELINE_STAGE_2_RESOLVE_BIT pipeline stages.
- VK_ACCESS_2_TRANSFER_WRITE_BIT specifies write access to an image or buffer in a clear or copy operation. Such access occurs in the VK_PIPELINE_STAGE_2_COPY_BIT, VK_PIPELINE_STAGE_2_BLIT_BIT, VK_PIPELINE_STAGE_2_CLEAR_BIT, or VK_PIPELINE_STAGE_2_RESOLVE_BIT pipeline stages.
- VK_ACCESS_2_HOST_READ_BIT specifies read access by a host operation. Accesses of this type are not performed through a resource, but directly on memory. Such access occurs in the VK_PIPELINE_STAGE_2_HOST_BIT pipeline stage.
- VK_ACCESS_2_HOST_WRITE_BIT specifies write access by a host operation. Accesses of this type are

not performed through a resource, but directly on memory. Such access occurs in the VK_PIPELINE_STAGE_2_HOST_BIT pipeline stage.

NOTE In situations where an application wishes to select all access types for a given set of pipeline stages, VK_ACCESS_2_MEMORY_READ_BIT or VK_ACCESS_2_MEMORY_WRITE_BIT can be used. This is particularly useful when specifying stages that only have a single access type.

NOTE The VkAccessFlags2 bitmask goes beyond the 31 individual bit flags allowable within a C99 enum, which is how VkAccessFlagBits is defined. The first 31 values are common to both, and are interchangeable.

VkAccessFlags2 is a bitmask type for setting a mask of zero or more VkAccessFlagBits2:

```
// Provided by VK_VERSION_1_3
typedef VkFlags64 VkAccessFlags2;
```

Bits which **can** be set in the srcAccessMask and dstAccessMask members of VkSubpassDependency, VkMemoryBarrier, VkBufferMemoryBarrier, and VkImageMemoryBarrier, specifying access behavior, are:

```
// Provided by VK_VERSION_1_0
typedef enum VkAccessFlagBits {
    VK_ACCESS_INDIRECT_COMMAND_READ_BIT = 0x00000001,
    VK_ACCESS_INDEX_READ_BIT = 0x00000002,
    VK_ACCESS_VERTEX_ATTRIBUTE_READ_BIT = 0x00000004,
    VK_ACCESS_UNIFORM_READ_BIT = 0x00000008,
    VK_ACCESS_INPUT_ATTACHMENT_READ_BIT = 0x00000010,
    VK_ACCESS_SHADER_READ_BIT = 0x00000020,
    VK_ACCESS_SHADER_WRITE_BIT = 0x00000040,
    VK_ACCESS_COLOR_ATTACHMENT_READ_BIT = 0x00000080,
    VK_ACCESS_COLOR_ATTACHMENT_WRITE_BIT = 0x00000100,
    VK_ACCESS_DEPTH_STENCIL_ATTACHMENT_READ_BIT = 0x00000200,
    VK_ACCESS_DEPTH_STENCIL_ATTACHMENT_WRITE_BIT = 0x00000400,
    VK_ACCESS_TRANSFER_READ_BIT = 0x00000800,
    VK_ACCESS_TRANSFER_WRITE_BIT = 0x00001000,
    VK_ACCESS_HOST_READ_BIT = 0x00002000,
    VK_ACCESS_HOST_WRITE_BIT = 0x00004000,
    VK_ACCESS_MEMORY_READ_BIT = 0x00008000,
    VK_ACCESS_MEMORY_WRITE_BIT = 0x00010000,
  // Provided by VK_VERSION_1_3
    VK_ACCESS_NONE = 0,
} VkAccessFlagBits;
```

These values all have the same meaning as the equivalently named values for VkAccessFlags2.

- VK_ACCESS_NONE specifies no accesses.

- VK_ACCESS_MEMORY_READ_BIT specifies all read accesses. It is always valid in any access mask, and is treated as equivalent to setting all READ access flags that are valid where it is used.
- VK_ACCESS_MEMORY_WRITE_BIT specifies all write accesses. It is always valid in any access mask, and is treated as equivalent to setting all WRITE access flags that are valid where it is used.
- VK_ACCESS_INDIRECT_COMMAND_READ_BIT specifies read access to indirect command data read as part of an indirect drawing or dispatching command. Such access occurs in the VK_PIPELINE_STAGE_DRAW_INDIRECT_BIT pipeline stage.
- VK_ACCESS_INDEX_READ_BIT specifies read access to an index buffer as part of an indexed drawing command, bound by vkCmdBindIndexBuffer. Such access occurs in the VK_PIPELINE_STAGE_VERTEX_INPUT_BIT pipeline stage.
- VK_ACCESS_VERTEX_ATTRIBUTE_READ_BIT specifies read access to a vertex buffer as part of a drawing command, bound by vkCmdBindVertexBuffers. Such access occurs in the VK_PIPELINE_STAGE_VERTEX_INPUT_BIT pipeline stage.
- VK_ACCESS_UNIFORM_READ_BIT specifies read access to a uniform buffer in any shader pipeline stage.
- VK_ACCESS_INPUT_ATTACHMENT_READ_BIT specifies read access to an input attachment within a render pass during fragment shading. Such access occurs in the VK_PIPELINE_STAGE_FRAGMENT_SHADER_BIT pipeline stage.
- VK_ACCESS_SHADER_READ_BIT specifies read access to a uniform texel buffer, sampled image, storage buffer, physical storage buffer, storage texel buffer, or storage image in any shader pipeline stage.
- VK_ACCESS_SHADER_WRITE_BIT specifies write access to a storage buffer, physical storage buffer, storage texel buffer, or storage image in any shader pipeline stage.
- VK_ACCESS_COLOR_ATTACHMENT_READ_BIT specifies read access to a color attachment, such as via blending, logic operations or certain render pass load operations. Such access occurs in the VK_PIPELINE_STAGE_COLOR_ATTACHMENT_OUTPUT_BIT pipeline stage.
- VK_ACCESS_COLOR_ATTACHMENT_WRITE_BIT specifies write access to a color, resolve, or depth/stencil resolve attachment during a render pass or via certain render pass load and store operations. Such access occurs in the VK_PIPELINE_STAGE_COLOR_ATTACHMENT_OUTPUT_BIT pipeline stage.
- VK_ACCESS_DEPTH_STENCIL_ATTACHMENT_READ_BIT specifies read access to a depth/stencil attachment, via depth or stencil operations or certain render pass load operations. Such access occurs in the VK_PIPELINE_STAGE_EARLY_FRAGMENT_TESTS_BIT or VK_PIPELINE_STAGE_LATE_FRAGMENT_TESTS_BIT pipeline stages.
- VK_ACCESS_DEPTH_STENCIL_ATTACHMENT_WRITE_BIT specifies write access to a depth/stencil attachment, via depth or stencil operations or certain render pass load and store operations. Such access occurs in the VK_PIPELINE_STAGE_EARLY_FRAGMENT_TESTS_BIT or VK_PIPELINE_STAGE_LATE_FRAGMENT_TESTS_BIT pipeline stages.
- VK_ACCESS_TRANSFER_READ_BIT specifies read access to an image or buffer in a copy operation. Such access occurs in the VK_PIPELINE_STAGE_2_ALL_TRANSFER_BIT pipeline stage.
- VK_ACCESS_TRANSFER_WRITE_BIT specifies write access to an image or buffer in a clear or copy operation. Such access occurs in the VK_PIPELINE_STAGE_2_ALL_TRANSFER_BIT pipeline stage.
- VK_ACCESS_HOST_READ_BIT specifies read access by a host operation. Accesses of this type are not

performed through a resource, but directly on memory. Such access occurs in the VK_PIPELINE_STAGE_HOST_BIT pipeline stage.

- VK_ACCESS_HOST_WRITE_BIT specifies write access by a host operation. Accesses of this type are not performed through a resource, but directly on memory. Such access occurs in the VK_PIPELINE_STAGE_HOST_BIT pipeline stage.

Certain access types are only performed by a subset of pipeline stages. Any synchronization command that takes both stage masks and access masks uses both to define the access scopes - only the specified access types performed by the specified stages are included in the access scope. An application **must** not specify an access flag in a synchronization command if it does not include a pipeline stage in the corresponding stage mask that is able to perform accesses of that type. The following table lists, for each access flag, which pipeline stages **can** perform that type of access.

Table 4. Supported Access Types

Access flag	Supported pipeline stages
VK_ACCESS_2_NONE	Any
VK_ACCESS_2_INDIRECT_COMMAND_READ_BIT	VK_PIPELINE_STAGE_2_DRAW_INDIRECT_BIT,
VK_ACCESS_2_INDEX_READ_BIT	VK_PIPELINE_STAGE_2_VERTEX_INPUT_BIT, VK_PIPELINE_STAGE_2_INDEX_INPUT_BIT
VK_ACCESS_2_VERTEX_ATTRIBUTE_READ_BIT	VK_PIPELINE_STAGE_2_VERTEX_INPUT_BIT, VK_PIPELINE_STAGE_2_VERTEX_ATTRIBUTE_INPUT_BIT
VK_ACCESS_2_UNIFORM_READ_BIT	VK_PIPELINE_STAGE_2_VERTEX_SHADER_BIT, VK_PIPELINE_STAGE_2_TESSELLATION_CONTROL_SHADER_BIT, VK_PIPELINE_STAGE_2_TESSELLATION_EVALUATION_SHADER_BIT, VK_PIPELINE_STAGE_2_GEOMETRY_SHADER_BIT, VK_PIPELINE_STAGE_2_FRAGMENT_SHADER_BIT, VK_PIPELINE_STAGE_2_COMPUTE_SHADER_BIT,
VK_ACCESS_2_INPUT_ATTACHMENT_READ_BIT	VK_PIPELINE_STAGE_2_FRAGMENT_SHADER_BIT,
VK_ACCESS_2_SHADER_READ_BIT	VK_PIPELINE_STAGE_2_VERTEX_SHADER_BIT, VK_PIPELINE_STAGE_2_TESSELLATION_CONTROL_SHADER_BIT, VK_PIPELINE_STAGE_2_TESSELLATION_EVALUATION_SHADER_BIT, VK_PIPELINE_STAGE_2_GEOMETRY_SHADER_BIT, VK_PIPELINE_STAGE_2_FRAGMENT_SHADER_BIT, VK_PIPELINE_STAGE_2_COMPUTE_SHADER_BIT,
VK_ACCESS_2_SHADER_WRITE_BIT	VK_PIPELINE_STAGE_2_VERTEX_SHADER_BIT, VK_PIPELINE_STAGE_2_TESSELLATION_CONTROL_SHADER_BIT, VK_PIPELINE_STAGE_2_TESSELLATION_EVALUATION_SHADER_BIT, VK_PIPELINE_STAGE_2_GEOMETRY_SHADER_BIT, VK_PIPELINE_STAGE_2_FRAGMENT_SHADER_BIT, VK_PIPELINE_STAGE_2_COMPUTE_SHADER_BIT,

Access flag	Supported pipeline stages
VK_ACCESS_2_COLOR_ATTACHMENT_READ_BIT	VK_PIPELINE_STAGE_2_FRAGMENT_SHADER_BIT, VK_PIPELINE_STAGE_2_COLOR_ATTACHMENT_OUTPUT_BIT
VK_ACCESS_2_COLOR_ATTACHMENT_WRITE_BIT	VK_PIPELINE_STAGE_2_COLOR_ATTACHMENT_OUTPUT_BIT
VK_ACCESS_2_DEPTH_STENCIL_ATTACHMENT_READ_BIT	VK_PIPELINE_STAGE_2_FRAGMENT_SHADER_BIT, VK_PIPELINE_STAGE_2_EARLY_FRAGMENT_TESTS_BIT, VK_PIPELINE_STAGE_2_LATE_FRAGMENT_TESTS_BIT
VK_ACCESS_2_DEPTH_STENCIL_ATTACHMENT_WRITE_BIT	VK_PIPELINE_STAGE_2_EARLY_FRAGMENT_TESTS_BIT, VK_PIPELINE_STAGE_2_LATE_FRAGMENT_TESTS_BIT
VK_ACCESS_2_TRANSFER_READ_BIT	VK_PIPELINE_STAGE_2_ALL_TRANSFER_BIT, VK_PIPELINE_STAGE_2_COPY_BIT, VK_PIPELINE_STAGE_2_RESOLVE_BIT, VK_PIPELINE_STAGE_2_BLIT_BIT, VK_PIPELINE_STAGE_2_ACCELERATION_STRUCTURE_COPY_BIT_KHR,
VK_ACCESS_2_TRANSFER_WRITE_BIT	VK_PIPELINE_STAGE_2_ALL_TRANSFER_BIT, VK_PIPELINE_STAGE_2_COPY_BIT, VK_PIPELINE_STAGE_2_RESOLVE_BIT, VK_PIPELINE_STAGE_2_BLIT_BIT, VK_PIPELINE_STAGE_2_CLEAR_BIT, VK_PIPELINE_STAGE_2_ACCELERATION_STRUCTURE_COPY_BIT_KHR,
VK_ACCESS_2_HOST_READ_BIT	VK_PIPELINE_STAGE_2_HOST_BIT
VK_ACCESS_2_HOST_WRITE_BIT	VK_PIPELINE_STAGE_2_HOST_BIT
VK_ACCESS_2_MEMORY_READ_BIT	Any
VK_ACCESS_2_MEMORY_WRITE_BIT	Any
VK_ACCESS_2_SHADER_SAMPLED_READ_BIT	VK_PIPELINE_STAGE_2_VERTEX_SHADER_BIT, VK_PIPELINE_STAGE_2_TESSELLATION_CONTROL_SHADER_BIT, VK_PIPELINE_STAGE_2_TESSELLATION_EVALUATION_SHADER_BIT, VK_PIPELINE_STAGE_2_GEOMETRY_SHADER_BIT, VK_PIPELINE_STAGE_2_FRAGMENT_SHADER_BIT, VK_PIPELINE_STAGE_2_COMPUTE_SHADER_BIT,
VK_ACCESS_2_SHADER_STORAGE_READ_BIT	VK_PIPELINE_STAGE_2_VERTEX_SHADER_BIT, VK_PIPELINE_STAGE_2_TESSELLATION_CONTROL_SHADER_BIT, VK_PIPELINE_STAGE_2_TESSELLATION_EVALUATION_SHADER_BIT, VK_PIPELINE_STAGE_2_GEOMETRY_SHADER_BIT, VK_PIPELINE_STAGE_2_FRAGMENT_SHADER_BIT, VK_PIPELINE_STAGE_2_COMPUTE_SHADER_BIT,

Access flag	Supported pipeline stages
VK_ACCESS_2_SHADER_STORAGE_WRITE_BIT	VK_PIPELINE_STAGE_2_VERTEX_SHADER_BIT, VK_PIPELINE_STAGE_2_TESSELLATION_CONTROL_SHADER_BIT, VK_PIPELINE_STAGE_2_TESSELLATION_EVALUATION_SHADER_BIT, VK_PIPELINE_STAGE_2_GEOMETRY_SHADER_BIT, VK_PIPELINE_STAGE_2_FRAGMENT_SHADER_BIT, VK_PIPELINE_STAGE_2_COMPUTE_SHADER_BIT,
VK_ACCESS_2_COMMAND_PREPROCESS_READ_BIT_EXT	VK_PIPELINE_STAGE_2_COMMAND_PREPROCESS_BIT_EXT
VK_ACCESS_2_COMMAND_PREPROCESS_WRITE_BIT_EXT	VK_PIPELINE_STAGE_2_COMMAND_PREPROCESS_BIT_EXT

```
// Provided by VK_VERSION_1_0
typedef VkFlags VkAccessFlags;
```

VkAccessFlags is a bitmask type for setting a mask of zero or more VkAccessFlagBits.

If a memory object does not have the VK_MEMORY_PROPERTY_HOST_COHERENT_BIT property, then vkFlushMappedMemoryRanges **must** be called in order to guarantee that writes to the memory object from the host are made available to the host domain, where they **can** be further made available to the device domain via a domain operation. Similarly, vkInvalidateMappedMemoryRanges **must** be called to guarantee that writes which are available to the host domain are made visible to host operations.

If the memory object does have the VK_MEMORY_PROPERTY_HOST_COHERENT_BIT property flag, writes to the memory object from the host are automatically made available to the host domain. Similarly, writes made available to the host domain are automatically made visible to the host.

NOTE Queue submission commands automatically perform a domain operation from host to device for all writes performed before the command executes, so in most cases an explicit memory barrier is not needed for this case. In the few circumstances where a submit does not occur between the host write and the device read access, writes **can** be made available by using an explicit memory barrier.

7.1.4. Framebuffer Region Dependencies

Pipeline stages that operate on, or with respect to, the framebuffer are collectively the *framebuffer-space* pipeline stages. These stages are:

- VK_PIPELINE_STAGE_FRAGMENT_SHADER_BIT
- VK_PIPELINE_STAGE_EARLY_FRAGMENT_TESTS_BIT
- VK_PIPELINE_STAGE_LATE_FRAGMENT_TESTS_BIT
- VK_PIPELINE_STAGE_COLOR_ATTACHMENT_OUTPUT_BIT

For these pipeline stages, an execution or memory dependency from the first set of operations to the second set **can** either be a single *framebuffer-global* dependency, or split into multiple

framebuffer-local dependencies. A dependency with non-framebuffer-space pipeline stages is neither framebuffer-global nor framebuffer-local.

A *framebuffer region* is a set of sample (x, y, layer, sample) coordinates that is a subset of the entire framebuffer.

Both synchronization scopes of a framebuffer-local dependency include only the operations performed within corresponding framebuffer regions (as defined below). No ordering guarantees are made between different framebuffer regions for a framebuffer-local dependency.

Both synchronization scopes of a framebuffer-global dependency include operations on all framebuffer-regions.

If the first synchronization scope includes operations on pixels/fragments with N samples and the second synchronization scope includes operations on pixels/fragments with M samples, where N does not equal M, then a framebuffer region containing all samples at a given (x, y, layer) coordinate in the first synchronization scope corresponds to a region containing all samples at the same coordinate in the second synchronization scope. In other words, it is a pixel granularity dependency. If N equals M, then a framebuffer region containing a single (x, y, layer, sample) coordinate in the first synchronization scope corresponds to a region containing the same sample at the same coordinate in the second synchronization scope. In other words, it is a sample granularity dependency.

NOTE Since fragment shader invocations are not specified to run in any particular groupings, the size of a framebuffer region is implementation-dependent, not known to the application, and **must** be assumed to be no larger than specified above.

NOTE Practically, the pixel vs. sample granularity dependency means that if an input attachment has a different number of samples than the pipeline's `rasterizationSamples`, then a fragment **can** access any sample in the input attachment's pixel even if it only uses framebuffer-local dependencies. If the input attachment has the same number of samples, then the fragment **can** only access the covered samples in its input `SampleMask` (i.e. the fragment operations happen-after a framebuffer-local dependency for each sample the fragment covers). To access samples that are not covered, a framebuffer-global dependency is required.

If a synchronization command includes a `dependencyFlags` parameter, and specifies the `VK_DEPENDENCY_BY_REGION_BIT` flag, then it defines framebuffer-local dependencies for the framebuffer-space pipeline stages in that synchronization command, for all framebuffer regions. If no `dependencyFlags` parameter is included, or the `VK_DEPENDENCY_BY_REGION_BIT` flag is not specified, then a framebuffer-global dependency is specified for those stages. The `VK_DEPENDENCY_BY_REGION_BIT` flag does not affect the dependencies between non-framebuffer-space pipeline stages, nor does it affect the dependencies between framebuffer-space and non-framebuffer-space pipeline stages.

NOTE Framebuffer-local dependencies are more efficient for most architectures; particularly tile-based architectures - which can keep framebuffer-regions entirely

> in on-chip registers and thus avoid external bandwidth across such a dependency. Including a framebuffer-global dependency in your rendering will usually force all implementations to flush data to memory, or to a higher level cache, breaking any potential locality optimizations.

7.1.5. View-Local Dependencies

In a render pass instance that has multiview enabled, dependencies **can** be either view-local or view-global.

A view-local dependency only includes operations from a single source view from the source subpass in the first synchronization scope, and only includes operations from a single destination view from the destination subpass in the second synchronization scope. A view-global dependency includes all views in the view mask of the source and destination subpasses in the corresponding synchronization scopes.

If a synchronization command includes a `dependencyFlags` parameter and specifies the `VK_DEPENDENCY_VIEW_LOCAL_BIT` flag, then it defines view-local dependencies for that synchronization command, for all views. If no `dependencyFlags` parameter is included or the `VK_DEPENDENCY_VIEW_LOCAL_BIT` flag is not specified, then a view-global dependency is specified.

7.1.6. Device-Local Dependencies

Dependencies **can** be either device-local or non-device-local. A device-local dependency acts as multiple separate dependencies, one for each physical device that executes the synchronization command, where each dependency only includes operations from that physical device in both synchronization scopes. A non-device-local dependency is a single dependency where both synchronization scopes include operations from all physical devices that participate in the synchronization command. For subpass dependencies, all physical devices in the VkDeviceGroupRenderPassBeginInfo::`deviceMask` participate in the dependency, and for pipeline barriers all physical devices that are set in the command buffer's current device mask participate in the dependency.

If a synchronization command includes a `dependencyFlags` parameter and specifies the `VK_DEPENDENCY_DEVICE_GROUP_BIT` flag, then it defines a non-device-local dependency for that synchronization command. If no `dependencyFlags` parameter is included or the `VK_DEPENDENCY_DEVICE_GROUP_BIT` flag is not specified, then it defines device-local dependencies for that synchronization command, for all participating physical devices.

Semaphore and event dependencies are device-local and only execute on the one physical device that performs the dependency.

7.2. Implicit Synchronization Guarantees

A small number of implicit ordering guarantees are provided by Vulkan, ensuring that the order in which commands are submitted is meaningful, and avoiding unnecessary complexity in common operations.

Submission order is a fundamental ordering in Vulkan, giving meaning to the order in which action and synchronization commands are recorded and submitted to a single queue. Explicit and implicit ordering guarantees between commands in Vulkan all work on the premise that this ordering is meaningful. This order does not itself define any execution or memory dependencies; synchronization commands and other orderings within the API use this ordering to define their scopes.

Submission order for any given set of commands is based on the order in which they were recorded to command buffers and then submitted. This order is determined as follows:

1. The initial order is determined by the order in which vkQueueSubmit and vkQueueSubmit2 commands are executed on the host, for a single queue, from first to last.
2. The order in which VkSubmitInfo structures are specified in the `pSubmits` parameter of vkQueueSubmit, or in which VkSubmitInfo2 structures are specified in the `pSubmits` parameter of vkQueueSubmit2, from lowest index to highest.
3. The order in which command buffers are specified in the `pCommandBuffers` member of VkSubmitInfo or VkSubmitInfo2 from lowest index to highest.
4. The order in which commands outside of a render pass were recorded to a command buffer on the host, from first to last.
5. The order in which commands inside a single subpass were recorded to a command buffer on the host, from first to last.

NOTE When using a render pass object with multiple subpasses, commands in different subpasses have no defined submission order relative to each other, regardless of the order in which the subpasses were recorded. Commands within a subpass are still ordered relative to other commands in the same subpass, and those outside of the render pass.

State commands do not execute any operations on the device, instead they set the state of the command buffer when they execute on the host, in the order that they are recorded. Action commands consume the current state of the command buffer when they are recorded, and will execute state changes on the device as required to match the recorded state.

The order of primitives passing through the graphics pipeline and image layout transitions as part of an image memory barrier provide additional guarantees based on submission order.

Execution of pipeline stages within a given command also has a loose ordering, dependent only on a single command.

Signal operation order is a fundamental ordering in Vulkan, giving meaning to the order in which semaphore and fence signal operations occur when submitted to a single queue. The signal operation order for queue operations is determined as follows:

1. The initial order is determined by the order in which vkQueueSubmit and vkQueueSubmit2 commands are executed on the host, for a single queue, from first to last.
2. The order in which VkSubmitInfo structures are specified in the `pSubmits` parameter of vkQueueSubmit, or in which VkSubmitInfo2 structures are specified in the `pSubmits` parameter

of vkQueueSubmit2, from lowest index to highest.

3. The fence signal operation defined by the `fence` parameter of a vkQueueSubmit or vkQueueSubmit2 or vkQueueBindSparse command is ordered after all semaphore signal operations defined by that command.

Semaphore signal operations defined by a single VkSubmitInfo or VkSubmitInfo2 or VkBindSparseInfo structure are unordered with respect to other semaphore signal operations defined within the same structure.

The vkSignalSemaphore command does not execute on a queue but instead performs the signal operation from the host. The semaphore signal operation defined by executing a vkSignalSemaphore command happens-after the vkSignalSemaphore command is invoked and happens-before the command returns.

When signaling timeline semaphores, it is the responsibility of the application to ensure that they are ordered such that the semaphore value is strictly increasing. Because the first synchronization scope for a semaphore signal operation contains all semaphore signal operations which occur earlier in submission order, all semaphore signal operations contained in any given batch are guaranteed to happen-after all semaphore signal operations contained in any previous batches. However, no ordering guarantee is provided between the semaphore signal operations defined within a single batch. This, combined with the requirement that timeline semaphore values strictly increase, means that it is invalid to signal the same timeline semaphore twice within a single batch.

NOTE

If an application wishes to ensure that some semaphore signal operation happens-after some other semaphore signal operation, it can submit a separate batch containing only semaphore signal operations, which will happen-after the semaphore signal operations in any earlier batches.

When signaling a semaphore from the host, the only ordering guarantee is that the signal operation happens-after when vkSignalSemaphore is called and happens-before it returns. Therefore, it is invalid to call `vkSignalSemaphore` while there are any outstanding signal operations on that semaphore from any queue submissions unless those queue submissions have some dependency which ensures that they happen-after the host signal operation. One example of this would be if the pending signal operation is, itself, waiting on the same semaphore at a lower value and the call to `vkSignalSemaphore` signals that lower value. Furthermore, if there are two or more processes or threads signaling the same timeline semaphore from the host, the application must ensure that the `vkSignalSemaphore` with the lower semaphore value returns before `vkSignalSemaphore` is called with the higher value.

7.3. Fences

Fences are a synchronization primitive that **can** be used to insert a dependency from a queue to the host. Fences have two states - signaled and unsignaled. A fence **can** be signaled as part of the execution of a queue submission command. Fences **can** be unsignaled on the host with vkResetFences. Fences **can** be waited on by the host with the vkWaitForFences command, and the

current state **can** be queried with vkGetFenceStatus.

The internal data of a fence **may** include a reference to any resources and pending work associated with signal or unsignal operations performed on that fence object, collectively referred to as the fence's *payload*. Mechanisms to import and export that internal data to and from fences are provided below. These mechanisms indirectly enable applications to share fence state between two or more fences and other synchronization primitives across process and API boundaries.

Fences are represented by `VkFence` handles:

```
// Provided by VK_VERSION_1_0
VK_DEFINE_NON_DISPATCHABLE_HANDLE(VkFence)
```

To create a fence, call:

```
// Provided by VK_VERSION_1_0
VkResult vkCreateFence(
    VkDevice                                    device,
    const VkFenceCreateInfo*                    pCreateInfo,
    const VkAllocationCallbacks*                pAllocator,
    VkFence*                                    pFence);
```

- `device` is the logical device that creates the fence.
- `pCreateInfo` is a pointer to a VkFenceCreateInfo structure containing information about how the fence is to be created.
- `pAllocator` controls host memory allocation as described in the Memory Allocation chapter.
- `pFence` is a pointer to a handle in which the resulting fence object is returned.

Valid Usage (Implicit)

- VUID-vkCreateFence-device-parameter
  `device` **must** be a valid VkDevice handle
- VUID-vkCreateFence-pCreateInfo-parameter
  `pCreateInfo` **must** be a valid pointer to a valid VkFenceCreateInfo structure
- VUID-vkCreateFence-pAllocator-parameter
  If `pAllocator` is not `NULL`, `pAllocator` **must** be a valid pointer to a valid VkAllocationCallbacks structure
- VUID-vkCreateFence-pFence-parameter
  `pFence` **must** be a valid pointer to a VkFence handle

Return Codes

Success

- VK_SUCCESS

Failure

- VK_ERROR_OUT_OF_HOST_MEMORY
- VK_ERROR_OUT_OF_DEVICE_MEMORY

The VkFenceCreateInfo structure is defined as:

```
// Provided by VK_VERSION_1_0
typedef struct VkFenceCreateInfo {
    VkStructureType       sType;
    const void*           pNext;
    VkFenceCreateFlags    flags;
} VkFenceCreateInfo;
```

- sType is a VkStructureType value identifying this structure.
- pNext is NULL or a pointer to a structure extending this structure.
- flags is a bitmask of VkFenceCreateFlagBits specifying the initial state and behavior of the fence.

Valid Usage (Implicit)

- VUID-VkFenceCreateInfo-sType-sType
  sType **must** be VK_STRUCTURE_TYPE_FENCE_CREATE_INFO
- VUID-VkFenceCreateInfo-pNext-pNext
  pNext **must** be NULL or a pointer to a valid instance of VkExportFenceCreateInfo
- VUID-VkFenceCreateInfo-sType-unique
  The sType value of each struct in the pNext chain **must** be unique
- VUID-VkFenceCreateInfo-flags-parameter
  flags **must** be a valid combination of VkFenceCreateFlagBits values

```
// Provided by VK_VERSION_1_0
typedef enum VkFenceCreateFlagBits {
    VK_FENCE_CREATE_SIGNALED_BIT = 0x00000001,
} VkFenceCreateFlagBits;
```

- VK_FENCE_CREATE_SIGNALED_BIT specifies that the fence object is created in the signaled state. Otherwise, it is created in the unsignaled state.

```
// Provided by VK_VERSION_1_0
typedef VkFlags VkFenceCreateFlags;
```

VkFenceCreateFlags is a bitmask type for setting a mask of zero or more VkFenceCreateFlagBits.

To create a fence whose payload **can** be exported to external handles, add a VkExportFenceCreateInfo structure to the pNext chain of the VkFenceCreateInfo structure. The VkExportFenceCreateInfo structure is defined as:

```
// Provided by VK_VERSION_1_1
typedef struct VkExportFenceCreateInfo {
    VkStructureType                   sType;
    const void*                       pNext;
    VkExternalFenceHandleTypeFlags    handleTypes;
} VkExportFenceCreateInfo;
```

- sType is a VkStructureType value identifying this structure.
- pNext is NULL or a pointer to a structure extending this structure.
- handleTypes is a bitmask of VkExternalFenceHandleTypeFlagBits specifying one or more fence handle types the application **can** export from the resulting fence. The application **can** request multiple handle types for the same fence.

Valid Usage

- VUID-VkExportFenceCreateInfo-handleTypes-01446
  The bits in handleTypes **must** be supported and compatible, as reported by VkExternalFenceProperties

Valid Usage (Implicit)

- VUID-VkExportFenceCreateInfo-sType-sType
  sType **must** be VK_STRUCTURE_TYPE_EXPORT_FENCE_CREATE_INFO
- VUID-VkExportFenceCreateInfo-handleTypes-parameter
  handleTypes **must** be a valid combination of VkExternalFenceHandleTypeFlagBits values

To destroy a fence, call:

```
// Provided by VK_VERSION_1_0
void vkDestroyFence(
    VkDevice                                    device,
    VkFence                                     fence,
    const VkAllocationCallbacks*                pAllocator);
```

- `device` is the logical device that destroys the fence.
- `fence` is the handle of the fence to destroy.
- `pAllocator` controls host memory allocation as described in the Memory Allocation chapter.

Valid Usage

- VUID-vkDestroyFence-fence-01120
  All queue submission commands that refer to `fence` **must** have completed execution
- VUID-vkDestroyFence-fence-01121
  If `VkAllocationCallbacks` were provided when `fence` was created, a compatible set of callbacks **must** be provided here
- VUID-vkDestroyFence-fence-01122
  If no `VkAllocationCallbacks` were provided when `fence` was created, `pAllocator` **must** be `NULL`

Valid Usage (Implicit)

- VUID-vkDestroyFence-device-parameter
  `device` **must** be a valid VkDevice handle
- VUID-vkDestroyFence-fence-parameter
  If `fence` is not VK_NULL_HANDLE, `fence` **must** be a valid VkFence handle
- VUID-vkDestroyFence-pAllocator-parameter
  If `pAllocator` is not `NULL`, `pAllocator` **must** be a valid pointer to a valid VkAllocationCallbacks structure
- VUID-vkDestroyFence-fence-parent
  If `fence` is a valid handle, it **must** have been created, allocated, or retrieved from `device`

Host Synchronization

- Host access to `fence` **must** be externally synchronized

To query the status of a fence from the host, call:

```
// Provided by VK_VERSION_1_0
VkResult vkGetFenceStatus(
    VkDevice                                    device,
    VkFence                                     fence);
```

- `device` is the logical device that owns the fence.
- `fence` is the handle of the fence to query.

Upon success, vkGetFenceStatus returns the status of the fence object, with the following return codes:

Table 5. Fence Object Status Codes

Status	Meaning
VK_SUCCESS	The fence specified by fence is signaled.
VK_NOT_READY	The fence specified by fence is unsignaled.
VK_ERROR_DEVICE_LOST	The device has been lost. See Lost Device.

If a queue submission command is pending execution, then the value returned by this command **may** immediately be out of date.

If the device has been lost (see Lost Device), vkGetFenceStatus **may** return any of the above status codes. If the device has been lost and vkGetFenceStatus is called repeatedly, it will eventually return either VK_SUCCESS or VK_ERROR_DEVICE_LOST.

Valid Usage (Implicit)

- VUID-vkGetFenceStatus-device-parameter
  device **must** be a valid VkDevice handle
- VUID-vkGetFenceStatus-fence-parameter
  fence **must** be a valid VkFence handle
- VUID-vkGetFenceStatus-fence-parent
  fence **must** have been created, allocated, or retrieved from device

Return Codes

Success

- VK_SUCCESS
- VK_NOT_READY

Failure

- VK_ERROR_OUT_OF_HOST_MEMORY
- VK_ERROR_OUT_OF_DEVICE_MEMORY
- VK_ERROR_DEVICE_LOST

To set the state of fences to unsignaled from the host, call:

```
// Provided by VK_VERSION_1_0
VkResult vkResetFences(
    VkDevice                                    device,
    uint32_t                                    fenceCount,
    const VkFence*                              pFences);
```

- `device` is the logical device that owns the fences.
- `fenceCount` is the number of fences to reset.
- `pFences` is a pointer to an array of fence handles to reset.

If any member of `pFences` currently has its payload imported with temporary permanence, that fence's prior permanent payload is first restored. The remaining operations described therefore operate on the restored payload.

When vkResetFences is executed on the host, it defines a *fence unsignal operation* for each fence, which resets the fence to the unsignaled state.

If any member of `pFences` is already in the unsignaled state when vkResetFences is executed, then vkResetFences has no effect on that fence.

Valid Usage

- VUID-vkResetFences-pFences-01123
  Each element of `pFences` **must** not be currently associated with any queue command that has not yet completed execution on that queue

Valid Usage (Implicit)

- VUID-vkResetFences-device-parameter
  `device` **must** be a valid VkDevice handle
- VUID-vkResetFences-pFences-parameter
  `pFences` **must** be a valid pointer to an array of `fenceCount` valid VkFence handles
- VUID-vkResetFences-fenceCount-arraylength
  `fenceCount` **must** be greater than `0`
- VUID-vkResetFences-pFences-parent
  Each element of `pFences` **must** have been created, allocated, or retrieved from `device`

Host Synchronization

- Host access to each member of `pFences` **must** be externally synchronized

Return Codes

Success

- VK_SUCCESS

Failure

- VK_ERROR_OUT_OF_DEVICE_MEMORY

When a fence is submitted to a queue as part of a queue submission command, it defines a memory dependency on the batches that were submitted as part of that command, and defines a *fence signal operation* which sets the fence to the signaled state.

The first synchronization scope includes every batch submitted in the same queue submission command. Fence signal operations that are defined by vkQueueSubmit or vkQueueSubmit2 additionally include in the first synchronization scope all commands that occur earlier in submission order. Fence signal operations that are defined by vkQueueSubmit or vkQueueSubmit2 or vkQueueBindSparse additionally include in the first synchronization scope any semaphore and fence signal operations that occur earlier in signal operation order.

The second synchronization scope only includes the fence signal operation.

The first access scope includes all memory access performed by the device.

The second access scope is empty.

To wait for one or more fences to enter the signaled state on the host, call:

```
// Provided by VK_VERSION_1_0
VkResult vkWaitForFences(
    VkDevice                                    device,
    uint32_t                                    fenceCount,
    const VkFence*                              pFences,
    VkBool32                                    waitAll,
    uint64_t                                    timeout);
```

- device is the logical device that owns the fences.
- fenceCount is the number of fences to wait on.
- pFences is a pointer to an array of fenceCount fence handles.
- waitAll is the condition that **must** be satisfied to successfully unblock the wait. If waitAll is VK_TRUE, then the condition is that all fences in pFences are signaled. Otherwise, the condition is that at least one fence in pFences is signaled.
- timeout is the timeout period in units of nanoseconds. timeout is adjusted to the closest value allowed by the implementation-dependent timeout accuracy, which **may** be substantially longer than one nanosecond, and **may** be longer than the requested period.

If the condition is satisfied when vkWaitForFences is called, then vkWaitForFences returns

immediately. If the condition is not satisfied at the time vkWaitForFences is called, then vkWaitForFences will block and wait until the condition is satisfied or the timeout has expired, whichever is sooner.

If timeout is zero, then vkWaitForFences does not wait, but simply returns the current state of the fences. VK_TIMEOUT will be returned in this case if the condition is not satisfied, even though no actual wait was performed.

If the condition is satisfied before the timeout has expired, vkWaitForFences returns VK_SUCCESS. Otherwise, vkWaitForFences returns VK_TIMEOUT after the timeout has expired.

If device loss occurs (see Lost Device) before the timeout has expired, vkWaitForFences **must** return in finite time with either VK_SUCCESS or VK_ERROR_DEVICE_LOST.

NOTE	While we guarantee that vkWaitForFences **must** return in finite time, no guarantees are made that it returns immediately upon device loss. However, the application can reasonably expect that the delay will be on the order of seconds and that calling vkWaitForFences will not result in a permanently (or seemingly permanently) dead process.

Valid Usage (Implicit)

- VUID-vkWaitForFences-device-parameter
  device **must** be a valid VkDevice handle
- VUID-vkWaitForFences-pFences-parameter
  pFences **must** be a valid pointer to an array of fenceCount valid VkFence handles
- VUID-vkWaitForFences-fenceCount-arraylength
  fenceCount **must** be greater than 0
- VUID-vkWaitForFences-pFences-parent
  Each element of pFences **must** have been created, allocated, or retrieved from device

Return Codes

Success

- VK_SUCCESS
- VK_TIMEOUT

Failure

- VK_ERROR_OUT_OF_HOST_MEMORY
- VK_ERROR_OUT_OF_DEVICE_MEMORY
- VK_ERROR_DEVICE_LOST

An execution dependency is defined by waiting for a fence to become signaled, either via vkWaitForFences or by polling on vkGetFenceStatus.

The first synchronization scope includes only the fence signal operation.

The second synchronization scope includes the host operations of vkWaitForFences or vkGetFenceStatus indicating that the fence has become signaled.

NOTE	Signaling a fence and waiting on the host does not guarantee that the results of memory accesses will be visible to the host, as the access scope of a memory dependency defined by a fence only includes device access. A memory barrier or other memory dependency **must** be used to guarantee this. See the description of host access types for more information.

7.3.1. Importing Fence Payloads

Applications **can** import a fence payload into an existing fence using an external fence handle. The effects of the import operation will be either temporary or permanent, as specified by the application. If the import is temporary, the fence will be *restored* to its permanent state the next time that fence is passed to vkResetFences.

NOTE	Restoring a fence to its prior permanent payload is a distinct operation from resetting a fence payload. See vkResetFences for more detail.

Performing a subsequent temporary import on a fence before resetting it has no effect on this requirement; the next unsignal of the fence **must** still restore its last permanent state. A permanent payload import behaves as if the target fence was destroyed, and a new fence was created with the same handle but the imported payload. Because importing a fence payload temporarily or permanently detaches the existing payload from a fence, similar usage restrictions to those applied to `vkDestroyFence` are applied to any command that imports a fence payload. Which of these import types is used is referred to as the import operation's *permanence*. Each handle type supports either one or both types of permanence.

The implementation **must** perform the import operation by either referencing or copying the payload referred to by the specified external fence handle, depending on the handle's type. The import method used is referred to as the handle type's *transference*. When using handle types with reference transference, importing a payload to a fence adds the fence to the set of all fences sharing that payload. This set includes the fence from which the payload was exported. Fence signaling, waiting, and resetting operations performed on any fence in the set **must** behave as if the set were a single fence. Importing a payload using handle types with copy transference creates a duplicate copy of the payload at the time of import, but makes no further reference to it. Fence signaling, waiting, and resetting operations performed on the target of copy imports **must** not affect any other fence or payload.

Export operations have the same transference as the specified handle type's import operations. Additionally, exporting a fence payload to a handle with copy transference has the same side effects on the source fence's payload as executing a fence reset operation. If the fence was using a temporarily imported payload, the fence's prior permanent payload will be restored.

External synchronization allows implementations to modify an object's internal state, i.e. payload, without internal synchronization. However, for fences sharing a payload across processes,

satisfying the external synchronization requirements of VkFence parameters as if all fences in the set were the same object is sometimes infeasible. Satisfying valid usage constraints on the state of a fence would similarly require impractical coordination or levels of trust between processes. Therefore, these constraints only apply to a specific fence handle, not to its payload. For distinct fence objects which share a payload:

- If multiple commands which queue a signal operation, or which unsignal a fence, are called concurrently, behavior will be as if the commands were called in an arbitrary sequential order.
- If a queue submission command is called with a fence that is sharing a payload, and the payload is already associated with another queue command that has not yet completed execution, either one or both of the commands will cause the fence to become signaled when they complete execution.
- If a fence payload is reset while it is associated with a queue command that has not yet completed execution, the payload will become unsignaled, but **may** become signaled again when the command completes execution.
- In the preceding cases, any of the devices associated with the fences sharing the payload **may** be lost, or any of the queue submission or fence reset commands **may** return VK_ERROR_INITIALIZATION_FAILED.

Other than these non-deterministic results, behavior is well defined. In particular:

- The implementation **must** not crash or enter an internally inconsistent state where future valid Vulkan commands might cause undefined results,
- Timeouts on future wait commands on fences sharing the payload **must** be effective.

NOTE

These rules allow processes to synchronize access to shared memory without trusting each other. However, such processes must still be cautious not to use the shared fence for more than synchronizing access to the shared memory. For example, a process should not use a fence with shared payload to tell when commands it submitted to a queue have completed and objects used by those commands may be destroyed, since the other process can accidentally or maliciously cause the fence to signal before the commands actually complete.

When a fence is using an imported payload, its VkExportFenceCreateInfo::handleTypes value is specified when creating the fence from which the payload was exported, rather than specified when creating the fence. Additionally, VkExternalFenceProperties::exportFromImportedHandleTypes restricts which handle types **can** be exported from such a fence based on the specific handle type used to import the current payload.

When importing a fence payload, it is the responsibility of the application to ensure the external handles meet all valid usage requirements. However, implementations **must** perform sufficient validation of external handles to ensure that the operation results in a valid fence which will not cause program termination, device loss, queue stalls, host thread stalls, or corruption of other resources when used as allowed according to its import parameters. If the external handle provided does not meet these requirements, the implementation **must** fail the fence payload import operation with the error code VK_ERROR_INVALID_EXTERNAL_HANDLE.

7.4. Semaphores

Semaphores are a synchronization primitive that **can** be used to insert a dependency between queue operations or between a queue operation and the host. Binary semaphores have two states - signaled and unsignaled. Timeline semaphores have a strictly increasing 64-bit unsigned integer payload and are signaled with respect to a particular reference value. A semaphore **can** be signaled after execution of a queue operation is completed, and a queue operation **can** wait for a semaphore to become signaled before it begins execution. A timeline semaphore **can** additionally be signaled from the host with the vkSignalSemaphore command and waited on from the host with the vkWaitSemaphores command.

The internal data of a semaphore **may** include a reference to any resources and pending work associated with signal or unsignal operations performed on that semaphore object, collectively referred to as the semaphore's *payload*. Mechanisms to import and export that internal data to and from semaphores are provided below. These mechanisms indirectly enable applications to share semaphore state between two or more semaphores and other synchronization primitives across process and API boundaries.

Semaphores are represented by `VkSemaphore` handles:

```
// Provided by VK_VERSION_1_0
VK_DEFINE_NON_DISPATCHABLE_HANDLE(VkSemaphore)
```

To create a semaphore, call:

```
// Provided by VK_VERSION_1_0
VkResult vkCreateSemaphore(
    VkDevice                                    device,
    const VkSemaphoreCreateInfo*                pCreateInfo,
    const VkAllocationCallbacks*                pAllocator,
    VkSemaphore*                                pSemaphore);
```

- `device` is the logical device that creates the semaphore.
- `pCreateInfo` is a pointer to a VkSemaphoreCreateInfo structure containing information about how the semaphore is to be created.
- `pAllocator` controls host memory allocation as described in the Memory Allocation chapter.
- `pSemaphore` is a pointer to a handle in which the resulting semaphore object is returned.

Valid Usage (Implicit)

- VUID-vkCreateSemaphore-device-parameter
  `device` **must** be a valid VkDevice handle
- VUID-vkCreateSemaphore-pCreateInfo-parameter
  `pCreateInfo` **must** be a valid pointer to a valid VkSemaphoreCreateInfo structure

- VUID-vkCreateSemaphore-pAllocator-parameter
  If `pAllocator` is not `NULL`, `pAllocator` **must** be a valid pointer to a valid VkAllocationCallbacks structure
- VUID-vkCreateSemaphore-pSemaphore-parameter
  `pSemaphore` **must** be a valid pointer to a VkSemaphore handle

Return Codes

Success

- `VK_SUCCESS`

Failure

- `VK_ERROR_OUT_OF_HOST_MEMORY`
- `VK_ERROR_OUT_OF_DEVICE_MEMORY`

The `VkSemaphoreCreateInfo` structure is defined as:

```
// Provided by VK_VERSION_1_0
typedef struct VkSemaphoreCreateInfo {
    VkStructureType           sType;
    const void*               pNext;
    VkSemaphoreCreateFlags    flags;
} VkSemaphoreCreateInfo;
```

- `sType` is a VkStructureType value identifying this structure.
- `pNext` is `NULL` or a pointer to a structure extending this structure.
- `flags` is reserved for future use.

Valid Usage (Implicit)

- VUID-VkSemaphoreCreateInfo-sType-sType
  `sType` **must** be `VK_STRUCTURE_TYPE_SEMAPHORE_CREATE_INFO`
- VUID-VkSemaphoreCreateInfo-pNext-pNext
  Each `pNext` member of any structure (including this one) in the `pNext` chain **must** be either `NULL` or a pointer to a valid instance of VkExportSemaphoreCreateInfo or VkSemaphoreTypeCreateInfo
- VUID-VkSemaphoreCreateInfo-sType-unique
  The `sType` value of each struct in the `pNext` chain **must** be unique
- VUID-VkSemaphoreCreateInfo-flags-zerobitmask
  `flags` **must** be `0`

```
// Provided by VK_VERSION_1_0
typedef VkFlags VkSemaphoreCreateFlags;
```

VkSemaphoreCreateFlags is a bitmask type for setting a mask, but is currently reserved for future use.

The VkSemaphoreTypeCreateInfo structure is defined as:

```
// Provided by VK_VERSION_1_2
typedef struct VkSemaphoreTypeCreateInfo {
    VkStructureType    sType;
    const void*        pNext;
    VkSemaphoreType    semaphoreType;
    uint64_t           initialValue;
} VkSemaphoreTypeCreateInfo;
```

- sType is a VkStructureType value identifying this structure.
- pNext is NULL or a pointer to a structure extending this structure.
- semaphoreType is a VkSemaphoreType value specifying the type of the semaphore.
- initialValue is the initial payload value if semaphoreType is VK_SEMAPHORE_TYPE_TIMELINE.

To create a semaphore of a specific type, add a VkSemaphoreTypeCreateInfo structure to the VkSemaphoreCreateInfo::pNext chain.

If no VkSemaphoreTypeCreateInfo structure is included in the pNext chain of VkSemaphoreCreateInfo, then the created semaphore will have a default VkSemaphoreType of VK_SEMAPHORE_TYPE_BINARY.

Valid Usage

- VUID-VkSemaphoreTypeCreateInfo-timelineSemaphore-03252
  If the timelineSemaphore feature is not enabled, semaphoreType **must** not equal VK_SEMAPHORE_TYPE_TIMELINE
- VUID-VkSemaphoreTypeCreateInfo-semaphoreType-03279
  If semaphoreType is VK_SEMAPHORE_TYPE_BINARY, initialValue **must** be zero

Valid Usage (Implicit)

- VUID-VkSemaphoreTypeCreateInfo-sType-sType
  sType **must** be VK_STRUCTURE_TYPE_SEMAPHORE_TYPE_CREATE_INFO
- VUID-VkSemaphoreTypeCreateInfo-semaphoreType-parameter
  semaphoreType **must** be a valid VkSemaphoreType value

Possible values of VkSemaphoreTypeCreateInfo::semaphoreType, specifying the type of a semaphore, are:

```
// Provided by VK_VERSION_1_2
typedef enum VkSemaphoreType {
    VK_SEMAPHORE_TYPE_BINARY = 0,
    VK_SEMAPHORE_TYPE_TIMELINE = 1,
} VkSemaphoreType;
```

- VK_SEMAPHORE_TYPE_BINARY specifies a *binary semaphore* type that has a boolean payload indicating whether the semaphore is currently signaled or unsignaled. When created, the semaphore is in the unsignaled state.
- VK_SEMAPHORE_TYPE_TIMELINE specifies a *timeline semaphore* type that has a strictly increasing 64-bit unsigned integer payload indicating whether the semaphore is signaled with respect to a particular reference value. When created, the semaphore payload has the value given by the initialValue field of VkSemaphoreTypeCreateInfo.

To create a semaphore whose payload **can** be exported to external handles, add a VkExportSemaphoreCreateInfo structure to the pNext chain of the VkSemaphoreCreateInfo structure. The VkExportSemaphoreCreateInfo structure is defined as:

```
// Provided by VK_VERSION_1_1
typedef struct VkExportSemaphoreCreateInfo {
    VkStructureType                       sType;
    const void*                           pNext;
    VkExternalSemaphoreHandleTypeFlags    handleTypes;
} VkExportSemaphoreCreateInfo;
```

- sType is a VkStructureType value identifying this structure.
- pNext is NULL or a pointer to a structure extending this structure.
- handleTypes is a bitmask of VkExternalSemaphoreHandleTypeFlagBits specifying one or more semaphore handle types the application **can** export from the resulting semaphore. The application **can** request multiple handle types for the same semaphore.

Valid Usage

- VUID-VkExportSemaphoreCreateInfo-handleTypes-01124
  The bits in handleTypes **must** be supported and compatible, as reported by VkExternalSemaphoreProperties

Valid Usage (Implicit)

- VUID-VkExportSemaphoreCreateInfo-sType-sType
  sType **must** be VK_STRUCTURE_TYPE_EXPORT_SEMAPHORE_CREATE_INFO
- VUID-VkExportSemaphoreCreateInfo-handleTypes-parameter
  handleTypes **must** be a valid combination of VkExternalSemaphoreHandleTypeFlagBits values

To destroy a semaphore, call:

```
// Provided by VK_VERSION_1_0
void vkDestroySemaphore(
    VkDevice                                    device,
    VkSemaphore                                 semaphore,
    const VkAllocationCallbacks*                pAllocator);
```

- `device` is the logical device that destroys the semaphore.
- `semaphore` is the handle of the semaphore to destroy.
- `pAllocator` controls host memory allocation as described in the Memory Allocation chapter.

Valid Usage

- VUID-vkDestroySemaphore-semaphore-05149
  All submitted batches that refer to `semaphore` **must** have completed execution
- VUID-vkDestroySemaphore-semaphore-01138
  If `VkAllocationCallbacks` were provided when `semaphore` was created, a compatible set of callbacks **must** be provided here
- VUID-vkDestroySemaphore-semaphore-01139
  If no `VkAllocationCallbacks` were provided when `semaphore` was created, `pAllocator` **must** be `NULL`

Valid Usage (Implicit)

- VUID-vkDestroySemaphore-device-parameter
  `device` **must** be a valid VkDevice handle
- VUID-vkDestroySemaphore-semaphore-parameter
  If `semaphore` is not VK_NULL_HANDLE, `semaphore` **must** be a valid VkSemaphore handle
- VUID-vkDestroySemaphore-pAllocator-parameter
  If `pAllocator` is not `NULL`, `pAllocator` **must** be a valid pointer to a valid VkAllocationCallbacks structure
- VUID-vkDestroySemaphore-semaphore-parent
  If `semaphore` is a valid handle, it **must** have been created, allocated, or retrieved from `device`

Host Synchronization

- Host access to `semaphore` **must** be externally synchronized

7.4.1. Semaphore Signaling

When a batch is submitted to a queue via a queue submission, and it includes semaphores to be signaled, it defines a memory dependency on the batch, and defines *semaphore signal operations* which set the semaphores to the signaled state.

In case of semaphores created with a VkSemaphoreType of `VK_SEMAPHORE_TYPE_TIMELINE` the semaphore is considered signaled with respect to the counter value set to be signaled as specified in VkTimelineSemaphoreSubmitInfo or VkSemaphoreSignalInfo.

The first synchronization scope includes every command submitted in the same batch. In the case of vkQueueSubmit2, the first synchronization scope is limited to the pipeline stage specified by VkSemaphoreSubmitInfo::`stageMask`. Semaphore signal operations that are defined by vkQueueSubmit or vkQueueSubmit2 additionally include all commands that occur earlier in submission order. Semaphore signal operations that are defined by vkQueueSubmit or vkQueueSubmit2 or vkQueueBindSparse additionally include in the first synchronization scope any semaphore and fence signal operations that occur earlier in signal operation order.

The second synchronization scope includes only the semaphore signal operation.

The first access scope includes all memory access performed by the device.

The second access scope is empty.

7.4.2. Semaphore Waiting

When a batch is submitted to a queue via a queue submission, and it includes semaphores to be waited on, it defines a memory dependency between prior semaphore signal operations and the batch, and defines *semaphore wait operations*.

Such semaphore wait operations set the semaphores created with a VkSemaphoreType of `VK_SEMAPHORE_TYPE_BINARY` to the unsignaled state. In case of semaphores created with a VkSemaphoreType of `VK_SEMAPHORE_TYPE_TIMELINE` a prior semaphore signal operation defines a memory dependency with a semaphore wait operation if the value the semaphore is signaled with is greater than or equal to the value the semaphore is waited with, thus the semaphore will continue to be considered signaled with respect to the counter value waited on as specified in VkTimelineSemaphoreSubmitInfo.

The first synchronization scope includes one semaphore signal operation for each semaphore waited on by this batch. The specific signal operation waited on for each semaphore **must** meet the following criteria:

- for binary semaphores, the signal operation is either earlier in submission order on the same queue, or is submitted by a command whose host operation happens-before this batch is submitted on the host
- for binary semaphores, no wait operation exists that happens-after the signal operation and happens-before this wait operation
- the signal operation is not guaranteed to happen-after the semaphore wait operation in this batch

- for timeline semaphores, the signal value is greater than or equal to the wait value

If multiple semaphore signal operations meet these criteria, any of those operations **may** be included in the first synchronization scope. When waiting on a binary semaphore, applications **must** ensure that exactly one semaphore signal operation meets these criteria.

The second synchronization scope includes every command submitted in the same batch. In the case of vkQueueSubmit, the second synchronization scope is limited to operations on the pipeline stages determined by the destination stage mask specified by the corresponding element of `pWaitDstStageMask`. In the case of vkQueueSubmit2, the second synchronization scope is limited to the pipeline stage specified by VkSemaphoreSubmitInfo::`stageMask`. Also, in the case of either vkQueueSubmit2 or vkQueueSubmit, the second synchronization scope additionally includes all commands that occur later in submission order.

The first access scope is empty.

The second access scope includes all memory access performed by the device.

The semaphore wait operation happens-after the first set of operations in the execution dependency, and happens-before the second set of operations in the execution dependency.

NOTE	Unlike timeline semaphores, fences or events, waiting for a binary semaphore also unsignals that semaphore when the wait completes. Applications **must** ensure that between two such wait operations, the semaphore is signaled again, with execution dependencies used to ensure these occur in order. Binary semaphore waits and signals should thus occur in discrete 1:1 pairs.

7.4.3. Semaphore State Requirements for Wait Operations

Before waiting on a semaphore, the application **must** ensure the semaphore is in a valid state for a wait operation. Specifically, when a semaphore wait operation is submitted to a queue:

- A binary semaphore **must** be signaled, or have an associated semaphore signal operation that is pending execution.
- Any semaphore signal operations on which the pending binary semaphore signal operation depends **must** also be completed or pending execution.
- There **must** be no other queue waiting on the same binary semaphore when the operation executes.

7.4.4. Host Operations on Semaphores

In addition to semaphore signal operations and semaphore wait operations submitted to device queues, timeline semaphores support the following host operations:

- Query the current counter value of the semaphore using the vkGetSemaphoreCounterValue command.
- Wait for a set of semaphores to reach particular counter values using the vkWaitSemaphores command.

- Signal the semaphore with a particular counter value from the host using the vkSignalSemaphore command.

To query the current counter value of a semaphore created with a VkSemaphoreType of VK_SEMAPHORE_TYPE_TIMELINE from the host, call:

```
// Provided by VK_VERSION_1_2
VkResult vkGetSemaphoreCounterValue(
    VkDevice                                    device,
    VkSemaphore                                 semaphore,
    uint64_t*                                   pValue);
```

- device is the logical device that owns the semaphore.
- semaphore is the handle of the semaphore to query.
- pValue is a pointer to a 64-bit integer value in which the current counter value of the semaphore is returned.

NOTE If a queue submission command is pending execution, then the value returned by this command **may** immediately be out of date.

Valid Usage

- VUID-vkGetSemaphoreCounterValue-semaphore-03255
  semaphore **must** have been created with a VkSemaphoreType of VK_SEMAPHORE_TYPE_TIMELINE

Valid Usage (Implicit)

- VUID-vkGetSemaphoreCounterValue-device-parameter
  device **must** be a valid VkDevice handle
- VUID-vkGetSemaphoreCounterValue-semaphore-parameter
  semaphore **must** be a valid VkSemaphore handle
- VUID-vkGetSemaphoreCounterValue-pValue-parameter
  pValue **must** be a valid pointer to a uint64_t value
- VUID-vkGetSemaphoreCounterValue-semaphore-parent
  semaphore **must** have been created, allocated, or retrieved from device

Return Codes

Success

- VK_SUCCESS

Failure

- VK_ERROR_OUT_OF_HOST_MEMORY
- VK_ERROR_OUT_OF_DEVICE_MEMORY
- VK_ERROR_DEVICE_LOST

To wait for a set of semaphores created with a VkSemaphoreType of VK_SEMAPHORE_TYPE_TIMELINE to reach particular counter values on the host, call:

```
// Provided by VK_VERSION_1_2
VkResult vkWaitSemaphores(
    VkDevice                                    device,
    const VkSemaphoreWaitInfo*                  pWaitInfo,
    uint64_t                                    timeout);
```

- device is the logical device that owns the semaphores.
- pWaitInfo is a pointer to a VkSemaphoreWaitInfo structure containing information about the wait condition.
- timeout is the timeout period in units of nanoseconds. timeout is adjusted to the closest value allowed by the implementation-dependent timeout accuracy, which **may** be substantially longer than one nanosecond, and **may** be longer than the requested period.

If the condition is satisfied when vkWaitSemaphores is called, then vkWaitSemaphores returns immediately. If the condition is not satisfied at the time vkWaitSemaphores is called, then vkWaitSemaphores will block and wait until the condition is satisfied or the timeout has expired, whichever is sooner.

If timeout is zero, then vkWaitSemaphores does not wait, but simply returns information about the current state of the semaphores. VK_TIMEOUT will be returned in this case if the condition is not satisfied, even though no actual wait was performed.

If the condition is satisfied before the timeout has expired, vkWaitSemaphores returns VK_SUCCESS. Otherwise, vkWaitSemaphores returns VK_TIMEOUT after the timeout has expired.

If device loss occurs (see Lost Device) before the timeout has expired, vkWaitSemaphores **must** return in finite time with either VK_SUCCESS or VK_ERROR_DEVICE_LOST.

Valid Usage (Implicit)

- VUID-vkWaitSemaphores-device-parameter
  device **must** be a valid VkDevice handle
- VUID-vkWaitSemaphores-pWaitInfo-parameter
  pWaitInfo **must** be a valid pointer to a valid VkSemaphoreWaitInfo structure

Return Codes

Success

- VK_SUCCESS
- VK_TIMEOUT

Failure

- VK_ERROR_OUT_OF_HOST_MEMORY
- VK_ERROR_OUT_OF_DEVICE_MEMORY
- VK_ERROR_DEVICE_LOST

The VkSemaphoreWaitInfo structure is defined as:

```
// Provided by VK_VERSION_1_2
typedef struct VkSemaphoreWaitInfo {
    VkStructureType         sType;
    const void*             pNext;
    VkSemaphoreWaitFlags    flags;
    uint32_t                semaphoreCount;
    const VkSemaphore*      pSemaphores;
    const uint64_t*         pValues;
} VkSemaphoreWaitInfo;
```

- sType is a VkStructureType value identifying this structure.
- pNext is NULL or a pointer to a structure extending this structure.
- flags is a bitmask of VkSemaphoreWaitFlagBits specifying additional parameters for the semaphore wait operation.
- semaphoreCount is the number of semaphores to wait on.
- pSemaphores is a pointer to an array of semaphoreCount semaphore handles to wait on.
- pValues is a pointer to an array of semaphoreCount timeline semaphore values.

Valid Usage

- VUID-VkSemaphoreWaitInfo-pSemaphores-03256
  All of the elements of pSemaphores **must** reference a semaphore that was created with a VkSemaphoreType of VK_SEMAPHORE_TYPE_TIMELINE

Valid Usage (Implicit)

- VUID-VkSemaphoreWaitInfo-sType-sType
  sType **must** be VK_STRUCTURE_TYPE_SEMAPHORE_WAIT_INFO
- VUID-VkSemaphoreWaitInfo-pNext-pNext

pNext **must** be NULL

- VUID-VkSemaphoreWaitInfo-flags-parameter
  flags **must** be a valid combination of VkSemaphoreWaitFlagBits values
- VUID-VkSemaphoreWaitInfo-pSemaphores-parameter
  pSemaphores **must** be a valid pointer to an array of semaphoreCount valid VkSemaphore handles
- VUID-VkSemaphoreWaitInfo-pValues-parameter
  pValues **must** be a valid pointer to an array of semaphoreCount uint64_t values
- VUID-VkSemaphoreWaitInfo-semaphoreCount-arraylength
  semaphoreCount **must** be greater than 0

Bits which **can** be set in VkSemaphoreWaitInfo::flags, specifying additional parameters of a semaphore wait operation, are:

```
// Provided by VK_VERSION_1_2
typedef enum VkSemaphoreWaitFlagBits {
    VK_SEMAPHORE_WAIT_ANY_BIT = 0x00000001,
} VkSemaphoreWaitFlagBits;
```

- VK_SEMAPHORE_WAIT_ANY_BIT specifies that the semaphore wait condition is that at least one of the semaphores in VkSemaphoreWaitInfo::pSemaphores has reached the value specified by the corresponding element of VkSemaphoreWaitInfo::pValues. If VK_SEMAPHORE_WAIT_ANY_BIT is not set, the semaphore wait condition is that all of the semaphores in VkSemaphoreWaitInfo::pSemaphores have reached the value specified by the corresponding element of VkSemaphoreWaitInfo::pValues.

```
// Provided by VK_VERSION_1_2
typedef VkFlags VkSemaphoreWaitFlags;
```

VkSemaphoreWaitFlags is a bitmask type for setting a mask of zero or more VkSemaphoreWaitFlagBits.

To signal a semaphore created with a VkSemaphoreType of VK_SEMAPHORE_TYPE_TIMELINE with a particular counter value, on the host, call:

```
// Provided by VK_VERSION_1_2
VkResult vkSignalSemaphore(
    VkDevice                                    device,
    const VkSemaphoreSignalInfo*                pSignalInfo);
```

- device is the logical device that owns the semaphore.
- pSignalInfo is a pointer to a VkSemaphoreSignalInfo structure containing information about the signal operation.

When vkSignalSemaphore is executed on the host, it defines and immediately executes a *semaphore*

signal operation which sets the timeline semaphore to the given value.

The first synchronization scope is defined by the host execution model, but includes execution of `vkSignalSemaphore` on the host and anything that happened-before it.

The second synchronization scope is empty.

Valid Usage (Implicit)

- VUID-vkSignalSemaphore-device-parameter
  `device` **must** be a valid VkDevice handle
- VUID-vkSignalSemaphore-pSignalInfo-parameter
  `pSignalInfo` **must** be a valid pointer to a valid VkSemaphoreSignalInfo structure

Return Codes

Success

- `VK_SUCCESS`

Failure

- `VK_ERROR_OUT_OF_HOST_MEMORY`
- `VK_ERROR_OUT_OF_DEVICE_MEMORY`

The `VkSemaphoreSignalInfo` structure is defined as:

```
// Provided by VK_VERSION_1_2
typedef struct VkSemaphoreSignalInfo {
    VkStructureType    sType;
    const void*        pNext;
    VkSemaphore        semaphore;
    uint64_t           value;
} VkSemaphoreSignalInfo;
```

- `sType` is a VkStructureType value identifying this structure.
- `pNext` is `NULL` or a pointer to a structure extending this structure.
- `semaphore` is the handle of the semaphore to signal.
- `value` is the value to signal.

Valid Usage

- VUID-VkSemaphoreSignalInfo-semaphore-03257
  `semaphore` **must** have been created with a VkSemaphoreType of `VK_SEMAPHORE_TYPE_TIMELINE`

- VUID-VkSemaphoreSignalInfo-value-03258
  `value` **must** have a value greater than the current value of the semaphore
- VUID-VkSemaphoreSignalInfo-value-03259
  `value` **must** be less than the value of any pending semaphore signal operations
- VUID-VkSemaphoreSignalInfo-value-03260
  `value` **must** have a value which does not differ from the current value of the semaphore or the value of any outstanding semaphore wait or signal operation on `semaphore` by more than `maxTimelineSemaphoreValueDifference`

Valid Usage (Implicit)

- VUID-VkSemaphoreSignalInfo-sType-sType
  `sType` **must** be `VK_STRUCTURE_TYPE_SEMAPHORE_SIGNAL_INFO`
- VUID-VkSemaphoreSignalInfo-pNext-pNext
  `pNext` **must** be `NULL`
- VUID-VkSemaphoreSignalInfo-semaphore-parameter
  `semaphore` **must** be a valid VkSemaphore handle

7.4.5. Importing Semaphore Payloads

Applications **can** import a semaphore payload into an existing semaphore using an external semaphore handle. The effects of the import operation will be either temporary or permanent, as specified by the application. If the import is temporary, the implementation **must** restore the semaphore to its prior permanent state after submitting the next semaphore wait operation. Performing a subsequent temporary import on a semaphore before performing a semaphore wait has no effect on this requirement; the next wait submitted on the semaphore **must** still restore its last permanent state. A permanent payload import behaves as if the target semaphore was destroyed, and a new semaphore was created with the same handle but the imported payload. Because importing a semaphore payload temporarily or permanently detaches the existing payload from a semaphore, similar usage restrictions to those applied to `vkDestroySemaphore` are applied to any command that imports a semaphore payload. Which of these import types is used is referred to as the import operation's *permanence*. Each handle type supports either one or both types of permanence.

The implementation **must** perform the import operation by either referencing or copying the payload referred to by the specified external semaphore handle, depending on the handle's type. The import method used is referred to as the handle type's *transference*. When using handle types with reference transference, importing a payload to a semaphore adds the semaphore to the set of all semaphores sharing that payload. This set includes the semaphore from which the payload was exported. Semaphore signaling and waiting operations performed on any semaphore in the set **must** behave as if the set were a single semaphore. Importing a payload using handle types with copy transference creates a duplicate copy of the payload at the time of import, but makes no further reference to it. Semaphore signaling and waiting operations performed on the target of copy imports **must** not affect any other semaphore or payload.

Export operations have the same transference as the specified handle type's import operations. Additionally, exporting a semaphore payload to a handle with copy transference has the same side effects on the source semaphore's payload as executing a semaphore wait operation. If the semaphore was using a temporarily imported payload, the semaphore's prior permanent payload will be restored.

External synchronization allows implementations to modify an object's internal state, i.e. payload, without internal synchronization. However, for semaphores sharing a payload across processes, satisfying the external synchronization requirements of `VkSemaphore` parameters as if all semaphores in the set were the same object is sometimes infeasible. Satisfying the wait operation state requirements would similarly require impractical coordination or levels of trust between processes. Therefore, these constraints only apply to a specific semaphore handle, not to its payload. For distinct semaphore objects which share a payload, if the semaphores are passed to separate queue submission commands concurrently, behavior will be as if the commands were called in an arbitrary sequential order. If the wait operation state requirements are violated for the shared payload by a queue submission command, or if a signal operation is queued for a shared payload that is already signaled or has a pending signal operation, effects **must** be limited to one or more of the following:

- Returning `VK_ERROR_INITIALIZATION_FAILED` from the command which resulted in the violation.
- Losing the logical device on which the violation occurred immediately or at a future time, resulting in a `VK_ERROR_DEVICE_LOST` error from subsequent commands, including the one causing the violation.
- Continuing execution of the violating command or operation as if the semaphore wait completed successfully after an implementation-dependent timeout. In this case, the state of the payload becomes undefined, and future operations on semaphores sharing the payload will be subject to these same rules. The semaphore **must** be destroyed or have its payload replaced by an import operation to again have a well-defined state.

NOTE

These rules allow processes to synchronize access to shared memory without trusting each other. However, such processes must still be cautious not to use the shared semaphore for more than synchronizing access to the shared memory. For example, a process should not use a shared semaphore as part of an execution dependency chain that, when complete, leads to objects being destroyed, if it does not trust other processes sharing the semaphore payload.

When a semaphore is using an imported payload, its VkExportSemaphoreCreateInfo::`handleTypes` value is specified when creating the semaphore from which the payload was exported, rather than specified when creating the semaphore. Additionally, VkExternalSemaphoreProperties ::`exportFromImportedHandleTypes` restricts which handle types **can** be exported from such a semaphore based on the specific handle type used to import the current payload.

When importing a semaphore payload, it is the responsibility of the application to ensure the external handles meet all valid usage requirements. However, implementations **must** perform sufficient validation of external handles to ensure that the operation results in a valid semaphore which will not cause program termination, device loss, queue stalls, or corruption of other resources when used as allowed according to its import parameters, and excepting those side

effects allowed for violations of the valid semaphore state for wait operations rules. If the external handle provided does not meet these requirements, the implementation **must** fail the semaphore payload import operation with the error code VK_ERROR_INVALID_EXTERNAL_HANDLE.

In addition, when importing a semaphore payload that is not compatible with the payload type corresponding to the VkSemaphoreType the semaphore was created with, the implementation **may** fail the semaphore payload import operation with the error code VK_ERROR_INVALID_EXTERNAL_HANDLE.

NOTE

As the introduction of the external semaphore handle type VK_EXTERNAL_SEMAPHORE_HANDLE_TYPE_D3D12_FENCE_BIT predates that of timeline semaphores, support for importing semaphore payloads from external handles of that type into semaphores created (implicitly or explicitly) with a VkSemaphoreType of VK_SEMAPHORE_TYPE_BINARY is preserved for backwards compatibility. However, applications **should** prefer importing such handle types into semaphores created with a VkSemaphoreType of VK_SEMAPHORE_TYPE_TIMELINE.

7.5. Events

Events are a synchronization primitive that **can** be used to insert a fine-grained dependency between commands submitted to the same queue, or between the host and a queue. Events **must** not be used to insert a dependency between commands submitted to different queues. Events have two states - signaled and unsignaled. An application **can** signal or unsignal an event either on the host or on the device. A device **can** be made to wait for an event to become signaled before executing further operations. No command exists to wait for an event to become signaled on the host, but the current state of an event **can** be queried.

Events are represented by VkEvent handles:

```
// Provided by VK_VERSION_1_0
VK_DEFINE_NON_DISPATCHABLE_HANDLE(VkEvent)
```

To create an event, call:

```
// Provided by VK_VERSION_1_0
VkResult vkCreateEvent(
    VkDevice                                    device,
    const VkEventCreateInfo*                    pCreateInfo,
    const VkAllocationCallbacks*                pAllocator,
    VkEvent*                                    pEvent);
```

- device is the logical device that creates the event.
- pCreateInfo is a pointer to a VkEventCreateInfo structure containing information about how the event is to be created.
- pAllocator controls host memory allocation as described in the Memory Allocation chapter.
- pEvent is a pointer to a handle in which the resulting event object is returned.

When created, the event object is in the unsignaled state.

Valid Usage

- VUID-vkCreateEvent-device-09672
  `device` **must** support at least one queue family with one of the `VK_QUEUE_COMPUTE_BIT`, or `VK_QUEUE_GRAPHICS_BIT` capabilities

Valid Usage (Implicit)

- VUID-vkCreateEvent-device-parameter
  `device` **must** be a valid VkDevice handle
- VUID-vkCreateEvent-pCreateInfo-parameter
  `pCreateInfo` **must** be a valid pointer to a valid VkEventCreateInfo structure
- VUID-vkCreateEvent-pAllocator-parameter
  If `pAllocator` is not `NULL`, `pAllocator` **must** be a valid pointer to a valid VkAllocationCallbacks structure
- VUID-vkCreateEvent-pEvent-parameter
  `pEvent` **must** be a valid pointer to a VkEvent handle

Return Codes

Success

- `VK_SUCCESS`

Failure

- `VK_ERROR_OUT_OF_HOST_MEMORY`
- `VK_ERROR_OUT_OF_DEVICE_MEMORY`

The `VkEventCreateInfo` structure is defined as:

```
// Provided by VK_VERSION_1_0
typedef struct VkEventCreateInfo {
    VkStructureType       sType;
    const void*           pNext;
    VkEventCreateFlags    flags;
} VkEventCreateInfo;
```

- `sType` is a VkStructureType value identifying this structure.
- `pNext` is `NULL` or a pointer to a structure extending this structure.
- `flags` is a bitmask of VkEventCreateFlagBits defining additional creation parameters.

Valid Usage (Implicit)

- VUID-VkEventCreateInfo-sType-sType
  `sType` **must** be `VK_STRUCTURE_TYPE_EVENT_CREATE_INFO`
- VUID-VkEventCreateInfo-pNext-pNext
  `pNext` **must** be `NULL`
- VUID-VkEventCreateInfo-flags-parameter
  `flags` **must** be a valid combination of VkEventCreateFlagBits values

```
// Provided by VK_VERSION_1_0
typedef enum VkEventCreateFlagBits {
  // Provided by VK_VERSION_1_3
    VK_EVENT_CREATE_DEVICE_ONLY_BIT = 0x00000001,
} VkEventCreateFlagBits;
```

- `VK_EVENT_CREATE_DEVICE_ONLY_BIT` specifies that host event commands will not be used with this event.

```
// Provided by VK_VERSION_1_0
typedef VkFlags VkEventCreateFlags;
```

`VkEventCreateFlags` is a bitmask type for setting a mask of VkEventCreateFlagBits.

To destroy an event, call:

```
// Provided by VK_VERSION_1_0
void vkDestroyEvent(
    VkDevice                                    device,
    VkEvent                                     event,
    const VkAllocationCallbacks*                pAllocator);
```

- `device` is the logical device that destroys the event.
- `event` is the handle of the event to destroy.
- `pAllocator` controls host memory allocation as described in the Memory Allocation chapter.

Valid Usage

- VUID-vkDestroyEvent-event-01145
  All submitted commands that refer to `event` **must** have completed execution
- VUID-vkDestroyEvent-event-01146
  If `VkAllocationCallbacks` were provided when `event` was created, a compatible set of callbacks **must** be provided here

- VUID-vkDestroyEvent-event-01147
  If no VkAllocationCallbacks were provided when event was created, pAllocator **must** be NULL

Valid Usage (Implicit)

- VUID-vkDestroyEvent-device-parameter
  device **must** be a valid VkDevice handle
- VUID-vkDestroyEvent-event-parameter
  If event is not VK_NULL_HANDLE, event **must** be a valid VkEvent handle
- VUID-vkDestroyEvent-pAllocator-parameter
  If pAllocator is not NULL, pAllocator **must** be a valid pointer to a valid VkAllocationCallbacks structure
- VUID-vkDestroyEvent-event-parent
  If event is a valid handle, it **must** have been created, allocated, or retrieved from device

Host Synchronization

- Host access to event **must** be externally synchronized

To query the state of an event from the host, call:

```
// Provided by VK_VERSION_1_0
VkResult vkGetEventStatus(
    VkDevice                                    device,
    VkEvent                                     event);
```

- device is the logical device that owns the event.
- event is the handle of the event to query.

Upon success, vkGetEventStatus returns the state of the event object with the following return codes:

Table 6. Event Object Status Codes

Status	Meaning
VK_EVENT_SET	The event specified by event is signaled.
VK_EVENT_RESET	The event specified by event is unsignaled.

If a vkCmdSetEvent or vkCmdResetEvent command is in a command buffer that is in the pending state, then the value returned by this command **may** immediately be out of date.

The state of an event **can** be updated by the host. The state of the event is immediately changed, and subsequent calls to vkGetEventStatus will return the new state. If an event is already in the requested state, then updating it to the same state has no effect.

Valid Usage

- VUID-vkGetEventStatus-event-03940
  event **must** not have been created with VK_EVENT_CREATE_DEVICE_ONLY_BIT

Valid Usage (Implicit)

- VUID-vkGetEventStatus-device-parameter
  device **must** be a valid VkDevice handle
- VUID-vkGetEventStatus-event-parameter
  event **must** be a valid VkEvent handle
- VUID-vkGetEventStatus-event-parent
  event **must** have been created, allocated, or retrieved from device

Return Codes

Success

- VK_EVENT_SET
- VK_EVENT_RESET

Failure

- VK_ERROR_OUT_OF_HOST_MEMORY
- VK_ERROR_OUT_OF_DEVICE_MEMORY
- VK_ERROR_DEVICE_LOST

To set the state of an event to signaled from the host, call:

```
// Provided by VK_VERSION_1_0
VkResult vkSetEvent(
    VkDevice                                    device,
    VkEvent                                     event);
```

- device is the logical device that owns the event.
- event is the event to set.

When vkSetEvent is executed on the host, it defines an *event signal operation* which sets the event to the signaled state.

If event is already in the signaled state when vkSetEvent is executed, then vkSetEvent has no effect, and no event signal operation occurs.

NOTE	If a command buffer is waiting for an event to be signaled from the host, the application must signal the event before submitting the command buffer, as described in the queue forward progress section.

Valid Usage

- VUID-vkSetEvent-event-03941
  event **must** not have been created with VK_EVENT_CREATE_DEVICE_ONLY_BIT
- VUID-vkSetEvent-event-09543
  event **must** not be waited on by a command buffer in the pending state

Valid Usage (Implicit)

- VUID-vkSetEvent-device-parameter
  device **must** be a valid VkDevice handle
- VUID-vkSetEvent-event-parameter
  event **must** be a valid VkEvent handle
- VUID-vkSetEvent-event-parent
  event **must** have been created, allocated, or retrieved from device

Host Synchronization

- Host access to event **must** be externally synchronized

Return Codes

Success

- VK_SUCCESS

Failure

- VK_ERROR_OUT_OF_HOST_MEMORY
- VK_ERROR_OUT_OF_DEVICE_MEMORY

To set the state of an event to unsignaled from the host, call:

```
// Provided by VK_VERSION_1_0
VkResult vkResetEvent(
    VkDevice                                    device,
    VkEvent                                     event);
```

- `device` is the logical device that owns the event.
- `event` is the event to reset.

When vkResetEvent is executed on the host, it defines an *event unsignal operation* which resets the event to the unsignaled state.

If `event` is already in the unsignaled state when vkResetEvent is executed, then vkResetEvent has no effect, and no event unsignal operation occurs.

Valid Usage

- VUID-vkResetEvent-event-03821
  There **must** be an execution dependency between `vkResetEvent` and the execution of any vkCmdWaitEvents that includes `event` in its `pEvents` parameter
- VUID-vkResetEvent-event-03822
  There **must** be an execution dependency between `vkResetEvent` and the execution of any vkCmdWaitEvents2 that includes `event` in its `pEvents` parameter
- VUID-vkResetEvent-event-03823
  `event` **must** not have been created with `VK_EVENT_CREATE_DEVICE_ONLY_BIT`

Valid Usage (Implicit)

- VUID-vkResetEvent-device-parameter
  `device` **must** be a valid VkDevice handle
- VUID-vkResetEvent-event-parameter
  `event` **must** be a valid VkEvent handle
- VUID-vkResetEvent-event-parent
  `event` **must** have been created, allocated, or retrieved from `device`

Host Synchronization

- Host access to `event` **must** be externally synchronized

Return Codes

Success

- VK_SUCCESS

Failure

- VK_ERROR_OUT_OF_DEVICE_MEMORY

The state of an event **can** also be updated on the device by commands inserted in command buffers.

To signal an event from a device, call:

```
// Provided by VK_VERSION_1_3
void vkCmdSetEvent2(
    VkCommandBuffer                             commandBuffer,
    VkEvent                                     event,
    const VkDependencyInfo*                     pDependencyInfo);
```

- commandBuffer is the command buffer into which the command is recorded.
- event is the event that will be signaled.
- pDependencyInfo is a pointer to a VkDependencyInfo structure defining the first scopes of this operation.

When vkCmdSetEvent2 is submitted to a queue, it defines the first half of memory dependencies defined by pDependencyInfo, as well as an event signal operation which sets the event to the signaled state. A memory dependency is defined between the event signal operation and commands that occur earlier in submission order.

The first synchronization scope and access scope are defined by the union of all the memory dependencies defined by pDependencyInfo, and are applied to all operations that occur earlier in submission order. Queue family ownership transfers and image layout transitions defined by pDependencyInfo are also included in the first scopes.

The second synchronization scope includes only the event signal operation, and any queue family ownership transfers and image layout transitions defined by pDependencyInfo.

The second access scope includes only queue family ownership transfers and image layout transitions.

Future vkCmdWaitEvents2 commands rely on all values of each element in pDependencyInfo matching exactly with those used to signal the corresponding event. vkCmdWaitEvents **must** not be used to wait on the result of a signal operation defined by vkCmdSetEvent2.

NOTE	The extra information provided by vkCmdSetEvent2 compared to vkCmdSetEvent allows implementations to more efficiently schedule the operations required to satisfy the requested dependencies. With vkCmdSetEvent, the full dependency

> information is not known until vkCmdWaitEvents is recorded, forcing implementations to insert the required operations at that point and not before.

If `event` is already in the signaled state when vkCmdSetEvent2 is executed on the device, then vkCmdSetEvent2 has no effect, no event signal operation occurs, and no dependency is generated.

Valid Usage

- VUID-vkCmdSetEvent2-synchronization2-03824
  The `synchronization2` feature **must** be enabled
- VUID-vkCmdSetEvent2-dependencyFlags-03825
  The `dependencyFlags` member of `pDependencyInfo` **must** be `0`
- VUID-vkCmdSetEvent2-srcStageMask-09391
  The `srcStageMask` member of any element of the `pMemoryBarriers`, `pBufferMemoryBarriers`, or `pImageMemoryBarriers` members of `pDependencyInfo` **must** not include `VK_PIPELINE_STAGE_2_HOST_BIT`
- VUID-vkCmdSetEvent2-dstStageMask-09392
  The `dstStageMask` member of any element of the `pMemoryBarriers`, `pBufferMemoryBarriers`, or `pImageMemoryBarriers` members of `pDependencyInfo` **must** not include `VK_PIPELINE_STAGE_2_HOST_BIT`
- VUID-vkCmdSetEvent2-commandBuffer-03826
  The current device mask of `commandBuffer` **must** include exactly one physical device
- VUID-vkCmdSetEvent2-srcStageMask-03827
  The `srcStageMask` member of any element of the `pMemoryBarriers`, `pBufferMemoryBarriers`, or `pImageMemoryBarriers` members of `pDependencyInfo` **must** only include pipeline stages valid for the queue family that was used to create the command pool that `commandBuffer` was allocated from
- VUID-vkCmdSetEvent2-dstStageMask-03828
  The `dstStageMask` member of any element of the `pMemoryBarriers`, `pBufferMemoryBarriers`, or `pImageMemoryBarriers` members of `pDependencyInfo` **must** only include pipeline stages valid for the queue family that was used to create the command pool that `commandBuffer` was allocated from

Valid Usage (Implicit)

- VUID-vkCmdSetEvent2-commandBuffer-parameter
  `commandBuffer` **must** be a valid VkCommandBuffer handle
- VUID-vkCmdSetEvent2-event-parameter
  `event` **must** be a valid VkEvent handle
- VUID-vkCmdSetEvent2-pDependencyInfo-parameter
  `pDependencyInfo` **must** be a valid pointer to a valid VkDependencyInfo structure
- VUID-vkCmdSetEvent2-commandBuffer-recording
  `commandBuffer` **must** be in the recording state

- VUID-vkCmdSetEvent2-commandBuffer-cmdpool
  The `VkCommandPool` that `commandBuffer` was allocated from **must** support graphics, or compute operations
- VUID-vkCmdSetEvent2-renderpass
  This command **must** only be called outside of a render pass instance
- VUID-vkCmdSetEvent2-commonparent
  Both of `commandBuffer`, and `event` **must** have been created, allocated, or retrieved from the same VkDevice

Host Synchronization

- Host access to `commandBuffer` **must** be externally synchronized
- Host access to the `VkCommandPool` that `commandBuffer` was allocated from **must** be externally synchronized

Command Properties

Command Buffer Levels	Render Pass Scope	Supported Queue Types	Command Type
Primary Secondary	Outside	Graphics Compute	Synchronization

The `VkDependencyInfo` structure is defined as:

```
// Provided by VK_VERSION_1_3
typedef struct VkDependencyInfo {
    VkStructureType                  sType;
    const void*                      pNext;
    VkDependencyFlags                dependencyFlags;
    uint32_t                         memoryBarrierCount;
    const VkMemoryBarrier2*          pMemoryBarriers;
    uint32_t                         bufferMemoryBarrierCount;
    const VkBufferMemoryBarrier2*    pBufferMemoryBarriers;
    uint32_t                         imageMemoryBarrierCount;
    const VkImageMemoryBarrier2*     pImageMemoryBarriers;
} VkDependencyInfo;
```

- `sType` is a VkStructureType value identifying this structure.
- `pNext` is `NULL` or a pointer to a structure extending this structure.
- `dependencyFlags` is a bitmask of VkDependencyFlagBits specifying how execution and memory dependencies are formed.
- `memoryBarrierCount` is the length of the `pMemoryBarriers` array.

- `pMemoryBarriers` is a pointer to an array of VkMemoryBarrier2 structures defining memory dependencies between any memory accesses.
- `bufferMemoryBarrierCount` is the length of the `pBufferMemoryBarriers` array.
- `pBufferMemoryBarriers` is a pointer to an array of VkBufferMemoryBarrier2 structures defining memory dependencies between buffer ranges.
- `imageMemoryBarrierCount` is the length of the `pImageMemoryBarriers` array.
- `pImageMemoryBarriers` is a pointer to an array of VkImageMemoryBarrier2 structures defining memory dependencies between image subresources.

This structure defines a set of memory dependencies, as well as queue family ownership transfer operations and image layout transitions.

Each member of `pMemoryBarriers`, `pBufferMemoryBarriers`, and `pImageMemoryBarriers` defines a separate memory dependency.

Valid Usage (Implicit)

- VUID-VkDependencyInfo-sType-sType
  `sType` **must** be `VK_STRUCTURE_TYPE_DEPENDENCY_INFO`
- VUID-VkDependencyInfo-pNext-pNext
  `pNext` **must** be `NULL`
- VUID-VkDependencyInfo-dependencyFlags-parameter
  `dependencyFlags` **must** be a valid combination of VkDependencyFlagBits values
- VUID-VkDependencyInfo-pMemoryBarriers-parameter
  If `memoryBarrierCount` is not `0`, `pMemoryBarriers` **must** be a valid pointer to an array of `memoryBarrierCount` valid VkMemoryBarrier2 structures
- VUID-VkDependencyInfo-pBufferMemoryBarriers-parameter
  If `bufferMemoryBarrierCount` is not `0`, `pBufferMemoryBarriers` **must** be a valid pointer to an array of `bufferMemoryBarrierCount` valid VkBufferMemoryBarrier2 structures
- VUID-VkDependencyInfo-pImageMemoryBarriers-parameter
  If `imageMemoryBarrierCount` is not `0`, `pImageMemoryBarriers` **must** be a valid pointer to an array of `imageMemoryBarrierCount` valid VkImageMemoryBarrier2 structures

To set the state of an event to signaled from a device, call:

```
// Provided by VK_VERSION_1_0
void vkCmdSetEvent(
    VkCommandBuffer                             commandBuffer,
    VkEvent                                     event,
    VkPipelineStageFlags                        stageMask);
```

- `commandBuffer` is the command buffer into which the command is recorded.
- `event` is the event that will be signaled.

- `stageMask` specifies the source stage mask used to determine the first synchronization scope.

`vkCmdSetEvent` behaves identically to vkCmdSetEvent2, except that it does not define an access scope, and **must** only be used with vkCmdWaitEvents, not vkCmdWaitEvents2.

Valid Usage

- VUID-vkCmdSetEvent-stageMask-04090
  If the `geometryShader` feature is not enabled, `stageMask` **must** not contain `VK_PIPELINE_STAGE_GEOMETRY_SHADER_BIT`
- VUID-vkCmdSetEvent-stageMask-04091
  If the `tessellationShader` feature is not enabled, `stageMask` **must** not contain `VK_PIPELINE_STAGE_TESSELLATION_CONTROL_SHADER_BIT` or `VK_PIPELINE_STAGE_TESSELLATION_EVALUATION_SHADER_BIT`
- VUID-vkCmdSetEvent-stageMask-03937
  If the `synchronization2` feature is not enabled, `stageMask` **must** not be `0`
- VUID-vkCmdSetEvent-stageMask-06457
  Any pipeline stage included in `stageMask` **must** be supported by the capabilities of the queue family specified by the `queueFamilyIndex` member of the VkCommandPoolCreateInfo structure that was used to create the `VkCommandPool` that `commandBuffer` was allocated from, as specified in the table of supported pipeline stages
- VUID-vkCmdSetEvent-stageMask-01149
  `stageMask` **must** not include `VK_PIPELINE_STAGE_HOST_BIT`
- VUID-vkCmdSetEvent-commandBuffer-01152
  The current device mask of `commandBuffer` **must** include exactly one physical device

Valid Usage (Implicit)

- VUID-vkCmdSetEvent-commandBuffer-parameter
  `commandBuffer` **must** be a valid VkCommandBuffer handle
- VUID-vkCmdSetEvent-event-parameter
  `event` **must** be a valid VkEvent handle
- VUID-vkCmdSetEvent-stageMask-parameter
  `stageMask` **must** be a valid combination of VkPipelineStageFlagBits values
- VUID-vkCmdSetEvent-commandBuffer-recording
  `commandBuffer` **must** be in the recording state
- VUID-vkCmdSetEvent-commandBuffer-cmdpool
  The `VkCommandPool` that `commandBuffer` was allocated from **must** support graphics, or compute operations
- VUID-vkCmdSetEvent-renderpass
  This command **must** only be called outside of a render pass instance
- VUID-vkCmdSetEvent-commonparent

Both of `commandBuffer`, and `event` **must** have been created, allocated, or retrieved from the same VkDevice

Host Synchronization

- Host access to `commandBuffer` **must** be externally synchronized
- Host access to the `VkCommandPool` that `commandBuffer` was allocated from **must** be externally synchronized

Command Properties

Command Buffer Levels	Render Pass Scope	Supported Queue Types	Command Type
Primary Secondary	Outside	Graphics Compute	Synchronization

To unsignal the event from a device, call:

```
// Provided by VK_VERSION_1_3
void vkCmdResetEvent2(
    VkCommandBuffer                             commandBuffer,
    VkEvent                                     event,
    VkPipelineStageFlags2                       stageMask);
```

- `commandBuffer` is the command buffer into which the command is recorded.
- `event` is the event that will be unsignaled.
- `stageMask` is a VkPipelineStageFlags2 mask of pipeline stages used to determine the first synchronization scope.

When vkCmdResetEvent2 is submitted to a queue, it defines an execution dependency on commands that were submitted before it, and defines an event unsignal operation which resets the event to the unsignaled state.

The first synchronization scope includes all commands that occur earlier in submission order. The synchronization scope is limited to operations by `stageMask` or stages that are logically earlier than `stageMask`.

The second synchronization scope includes only the event unsignal operation.

If `event` is already in the unsignaled state when vkCmdResetEvent2 is executed on the device, then this command has no effect, no event unsignal operation occurs, and no execution dependency is generated.

Valid Usage

- VUID-vkCmdResetEvent2-stageMask-03929
  If the `geometryShader` feature is not enabled, `stageMask` **must** not contain `VK_PIPELINE_STAGE_2_GEOMETRY_SHADER_BIT`
- VUID-vkCmdResetEvent2-stageMask-03930
  If the `tessellationShader` feature is not enabled, `stageMask` **must** not contain `VK_PIPELINE_STAGE_2_TESSELLATION_CONTROL_SHADER_BIT` or `VK_PIPELINE_STAGE_2_TESSELLATION_EVALUATION_SHADER_BIT`
- VUID-vkCmdResetEvent2-synchronization2-03829
  The `synchronization2` feature **must** be enabled
- VUID-vkCmdResetEvent2-stageMask-03830
  `stageMask` **must** not include `VK_PIPELINE_STAGE_2_HOST_BIT`
- VUID-vkCmdResetEvent2-event-03831
  There **must** be an execution dependency between `vkCmdResetEvent2` and the execution of any vkCmdWaitEvents that includes `event` in its `pEvents` parameter
- VUID-vkCmdResetEvent2-event-03832
  There **must** be an execution dependency between `vkCmdResetEvent2` and the execution of any vkCmdWaitEvents2 that includes `event` in its `pEvents` parameter
- VUID-vkCmdResetEvent2-commandBuffer-03833
  `commandBuffer`'s current device mask **must** include exactly one physical device

Valid Usage (Implicit)

- VUID-vkCmdResetEvent2-commandBuffer-parameter
  `commandBuffer` **must** be a valid VkCommandBuffer handle
- VUID-vkCmdResetEvent2-event-parameter
  `event` **must** be a valid VkEvent handle
- VUID-vkCmdResetEvent2-stageMask-parameter
  `stageMask` **must** be a valid combination of VkPipelineStageFlagBits2 values
- VUID-vkCmdResetEvent2-commandBuffer-recording
  `commandBuffer` **must** be in the recording state
- VUID-vkCmdResetEvent2-commandBuffer-cmdpool
  The `VkCommandPool` that `commandBuffer` was allocated from **must** support graphics, or compute operations
- VUID-vkCmdResetEvent2-renderpass
  This command **must** only be called outside of a render pass instance
- VUID-vkCmdResetEvent2-commonparent
  Both of `commandBuffer`, and `event` **must** have been created, allocated, or retrieved from the same VkDevice

Host Synchronization

- Host access to `commandBuffer` **must** be externally synchronized
- Host access to the `VkCommandPool` that `commandBuffer` was allocated from **must** be externally synchronized

Command Properties

Command Buffer Levels	Render Pass Scope	Supported Queue Types	Command Type
Primary Secondary	Outside	Graphics Compute	Synchronization

To set the state of an event to unsignaled from a device, call:

```
// Provided by VK_VERSION_1_0
void vkCmdResetEvent(
    VkCommandBuffer                             commandBuffer,
    VkEvent                                     event,
    VkPipelineStageFlags                        stageMask);
```

- `commandBuffer` is the command buffer into which the command is recorded.
- `event` is the event that will be unsignaled.
- `stageMask` is a bitmask of VkPipelineStageFlagBits specifying the source stage mask used to determine when the `event` is unsignaled.

`vkCmdResetEvent` behaves identically to vkCmdResetEvent2.

Valid Usage

- VUID-vkCmdResetEvent-stageMask-04090
  If the `geometryShader` feature is not enabled, `stageMask` **must** not contain `VK_PIPELINE_STAGE_GEOMETRY_SHADER_BIT`
- VUID-vkCmdResetEvent-stageMask-04091
  If the `tessellationShader` feature is not enabled, `stageMask` **must** not contain `VK_PIPELINE_STAGE_TESSELLATION_CONTROL_SHADER_BIT` or `VK_PIPELINE_STAGE_TESSELLATION_EVALUATION_SHADER_BIT`
- VUID-vkCmdResetEvent-stageMask-03937
  If the `synchronization2` feature is not enabled, `stageMask` **must** not be `0`
- VUID-vkCmdResetEvent-stageMask-06458
  Any pipeline stage included in `stageMask` **must** be supported by the capabilities of the queue family specified by the `queueFamilyIndex` member of the

VkCommandPoolCreateInfo structure that was used to create the VkCommandPool that commandBuffer was allocated from, as specified in the table of supported pipeline stages

- VUID-vkCmdResetEvent-stageMask-01153
  stageMask **must** not include VK_PIPELINE_STAGE_HOST_BIT
- VUID-vkCmdResetEvent-event-03834
  There **must** be an execution dependency between vkCmdResetEvent and the execution of any vkCmdWaitEvents that includes event in its pEvents parameter
- VUID-vkCmdResetEvent-event-03835
  There **must** be an execution dependency between vkCmdResetEvent and the execution of any vkCmdWaitEvents2 that includes event in its pEvents parameter
- VUID-vkCmdResetEvent-commandBuffer-01157
  commandBuffer's current device mask **must** include exactly one physical device

Valid Usage (Implicit)

- VUID-vkCmdResetEvent-commandBuffer-parameter
  commandBuffer **must** be a valid VkCommandBuffer handle
- VUID-vkCmdResetEvent-event-parameter
  event **must** be a valid VkEvent handle
- VUID-vkCmdResetEvent-stageMask-parameter
  stageMask **must** be a valid combination of VkPipelineStageFlagBits values
- VUID-vkCmdResetEvent-commandBuffer-recording
  commandBuffer **must** be in the recording state
- VUID-vkCmdResetEvent-commandBuffer-cmdpool
  The VkCommandPool that commandBuffer was allocated from **must** support graphics, or compute operations
- VUID-vkCmdResetEvent-renderpass
  This command **must** only be called outside of a render pass instance
- VUID-vkCmdResetEvent-commonparent
  Both of commandBuffer, and event **must** have been created, allocated, or retrieved from the same VkDevice

Host Synchronization

- Host access to commandBuffer **must** be externally synchronized
- Host access to the VkCommandPool that commandBuffer was allocated from **must** be externally synchronized

Command Properties

Command Buffer Levels	Render Pass Scope	Supported Queue Types	Command Type
Primary Secondary	Outside	Graphics Compute	Synchronization

To wait for one or more events to enter the signaled state on a device, call:

```
// Provided by VK_VERSION_1_3
void vkCmdWaitEvents2(
    VkCommandBuffer                             commandBuffer,
    uint32_t                                    eventCount,
    const VkEvent*                              pEvents,
    const VkDependencyInfo*                     pDependencyInfos);
```

- `commandBuffer` is the command buffer into which the command is recorded.
- `eventCount` is the length of the `pEvents` array.
- `pEvents` is a pointer to an array of `eventCount` events to wait on.
- `pDependencyInfos` is a pointer to an array of `eventCount` VkDependencyInfo structures, defining the second synchronization scope.

When `vkCmdWaitEvents2` is submitted to a queue, it inserts memory dependencies according to the elements of `pDependencyInfos` and each corresponding element of `pEvents`. `vkCmdWaitEvents2` **must** not be used to wait on event signal operations occurring on other queues, or signal operations executed by vkCmdSetEvent.

The first synchronization scope and access scope of each memory dependency defined by any element i of `pDependencyInfos` are applied to operations that occurred earlier in submission order than the last event signal operation on element i of `pEvents`.

Signal operations for an event at index i are only included if:

- The event was signaled by a vkCmdSetEvent2 command that occurred earlier in submission order with a `dependencyInfo` parameter exactly equal to the element of `pDependencyInfos` at index i ; or
- The event was created without `VK_EVENT_CREATE_DEVICE_ONLY_BIT`, and the first synchronization scope defined by the element of `pDependencyInfos` at index i only includes host operations (`VK_PIPELINE_STAGE_2_HOST_BIT`).

The second synchronization scope and access scope of each memory dependency defined by any element i of `pDependencyInfos` are applied to operations that occurred later in submission order than `vkCmdWaitEvents2`.

NOTE vkCmdWaitEvents2 is used with vkCmdSetEvent2 to define a memory dependency

between two sets of action commands, roughly in the same way as pipeline barriers, but split into two commands such that work between the two **may** execute unhindered.

NOTE

Applications should be careful to avoid race conditions when using events. There is no direct ordering guarantee between `vkCmdSetEvent2` and vkCmdResetEvent2, vkCmdResetEvent, or vkCmdSetEvent. Another execution dependency (e.g. a pipeline barrier or semaphore with `VK_PIPELINE_STAGE_2_ALL_COMMANDS_BIT`) is needed to prevent such a race condition.

Valid Usage

- VUID-vkCmdWaitEvents2-synchronization2-03836
  The `synchronization2` feature **must** be enabled
- VUID-vkCmdWaitEvents2-pEvents-03837
  Members of `pEvents` **must** not have been signaled by vkCmdSetEvent
- VUID-vkCmdWaitEvents2-pEvents-03838
  For any element i of `pEvents`, if that event is signaled by vkCmdSetEvent2, that command's `dependencyInfo` parameter **must** be exactly equal to the ith element of `pDependencyInfos`
- VUID-vkCmdWaitEvents2-pEvents-03839
  For any element i of `pEvents`, if that event is signaled by vkSetEvent, barriers in the ith element of `pDependencyInfos` **must** include only host operations in their first synchronization scope
- VUID-vkCmdWaitEvents2-pEvents-03840
  For any element i of `pEvents`, if barriers in the ith element of `pDependencyInfos` include only host operations, the ith element of `pEvents` **must** be signaled before vkCmdWaitEvents2 is executed
- VUID-vkCmdWaitEvents2-pEvents-03841
  For any element i of `pEvents`, if barriers in the ith element of `pDependencyInfos` do not include host operations, the ith element of `pEvents` **must** be signaled by a corresponding vkCmdSetEvent2 that occurred earlier in submission order
- VUID-vkCmdWaitEvents2-srcStageMask-03842
  The `srcStageMask` member of any element of the `pMemoryBarriers`, `pBufferMemoryBarriers`, or `pImageMemoryBarriers` members of `pDependencyInfos` **must** only include pipeline stages valid for the queue family that was used to create the command pool that `commandBuffer` was allocated from
- VUID-vkCmdWaitEvents2-dstStageMask-03843
  The `dstStageMask` member of any element of the `pMemoryBarriers`, `pBufferMemoryBarriers`, or `pImageMemoryBarriers` members of `pDependencyInfos` **must** only include pipeline stages valid for the queue family that was used to create the command pool that `commandBuffer` was allocated from
- VUID-vkCmdWaitEvents2-dependencyFlags-03844
  If `vkCmdWaitEvents2` is being called inside a render pass instance, the `srcStageMask` member of any element of the `pMemoryBarriers`, `pBufferMemoryBarriers`, or `pImageMemoryBarriers`

members of pDependencyInfos **must** not include VK_PIPELINE_STAGE_2_HOST_BIT

- VUID-vkCmdWaitEvents2-commandBuffer-03846
  commandBuffer's current device mask **must** include exactly one physical device

Valid Usage (Implicit)

- VUID-vkCmdWaitEvents2-commandBuffer-parameter
  commandBuffer **must** be a valid VkCommandBuffer handle
- VUID-vkCmdWaitEvents2-pEvents-parameter
  pEvents **must** be a valid pointer to an array of eventCount valid VkEvent handles
- VUID-vkCmdWaitEvents2-pDependencyInfos-parameter
  pDependencyInfos **must** be a valid pointer to an array of eventCount valid VkDependencyInfo structures
- VUID-vkCmdWaitEvents2-commandBuffer-recording
  commandBuffer **must** be in the recording state
- VUID-vkCmdWaitEvents2-commandBuffer-cmdpool
  The VkCommandPool that commandBuffer was allocated from **must** support graphics, or compute operations
- VUID-vkCmdWaitEvents2-eventCount-arraylength
  eventCount **must** be greater than 0
- VUID-vkCmdWaitEvents2-commonparent
  Both of commandBuffer, and the elements of pEvents **must** have been created, allocated, or retrieved from the same VkDevice

Host Synchronization

- Host access to commandBuffer **must** be externally synchronized
- Host access to the VkCommandPool that commandBuffer was allocated from **must** be externally synchronized

Command Properties

Command Buffer Levels	Render Pass Scope	Supported Queue Types	Command Type
Primary Secondary	Both	Graphics Compute	Synchronization

To wait for one or more events to enter the signaled state on a device, call:

```
// Provided by VK_VERSION_1_0
void vkCmdWaitEvents(
    VkCommandBuffer                             commandBuffer,
    uint32_t                                    eventCount,
    const VkEvent*                              pEvents,
    VkPipelineStageFlags                        srcStageMask,
    VkPipelineStageFlags                        dstStageMask,
    uint32_t                                    memoryBarrierCount,
    const VkMemoryBarrier*                      pMemoryBarriers,
    uint32_t                                    bufferMemoryBarrierCount,
    const VkBufferMemoryBarrier*                pBufferMemoryBarriers,
    uint32_t                                    imageMemoryBarrierCount,
    const VkImageMemoryBarrier*                 pImageMemoryBarriers);
```

- `commandBuffer` is the command buffer into which the command is recorded.
- `eventCount` is the length of the `pEvents` array.
- `pEvents` is a pointer to an array of event object handles to wait on.
- `srcStageMask` is a bitmask of VkPipelineStageFlagBits specifying the source stage mask.
- `dstStageMask` is a bitmask of VkPipelineStageFlagBits specifying the destination stage mask.
- `memoryBarrierCount` is the length of the `pMemoryBarriers` array.
- `pMemoryBarriers` is a pointer to an array of VkMemoryBarrier structures.
- `bufferMemoryBarrierCount` is the length of the `pBufferMemoryBarriers` array.
- `pBufferMemoryBarriers` is a pointer to an array of VkBufferMemoryBarrier structures.
- `imageMemoryBarrierCount` is the length of the `pImageMemoryBarriers` array.
- `pImageMemoryBarriers` is a pointer to an array of VkImageMemoryBarrier structures.

`vkCmdWaitEvents` is largely similar to vkCmdWaitEvents2, but **can** only wait on signal operations defined by vkCmdSetEvent. As vkCmdSetEvent does not define any access scopes, `vkCmdWaitEvents` defines the first access scope for each event signal operation in addition to its own access scopes.

NOTE

Since vkCmdSetEvent does not have any dependency information beyond a stage mask, implementations do not have the same opportunity to perform availability and visibility operations or image layout transitions in advance as they do with vkCmdSetEvent2 and vkCmdWaitEvents2.

When `vkCmdWaitEvents` is submitted to a queue, it defines a memory dependency between prior event signal operations on the same queue or the host, and subsequent commands. `vkCmdWaitEvents` **must** not be used to wait on event signal operations occurring on other queues.

The first synchronization scope only includes event signal operations that operate on members of `pEvents`, and the operations that happened-before the event signal operations. Event signal operations performed by vkCmdSetEvent that occur earlier in submission order are included in the first synchronization scope, if the logically latest pipeline stage in their `stageMask` parameter is logically earlier than or equal to the logically latest pipeline stage in `srcStageMask`. Event signal

operations performed by vkSetEvent are only included in the first synchronization scope if VK_PIPELINE_STAGE_HOST_BIT is included in srcStageMask.

The second synchronization scope includes all commands that occur later in submission order. The second synchronization scope is limited to operations on the pipeline stages determined by the destination stage mask specified by dstStageMask.

The first access scope is limited to accesses in the pipeline stages determined by the source stage mask specified by srcStageMask. Within that, the first access scope only includes the first access scopes defined by elements of the pMemoryBarriers, pBufferMemoryBarriers and pImageMemoryBarriers arrays, which each define a set of memory barriers. If no memory barriers are specified, then the first access scope includes no accesses.

The second access scope is limited to accesses in the pipeline stages determined by the destination stage mask specified by dstStageMask. Within that, the second access scope only includes the second access scopes defined by elements of the pMemoryBarriers, pBufferMemoryBarriers and pImageMemoryBarriers arrays, which each define a set of memory barriers. If no memory barriers are specified, then the second access scope includes no accesses.

Valid Usage

- VUID-vkCmdWaitEvents-srcStageMask-04090
  If the geometryShader feature is not enabled, srcStageMask **must** not contain VK_PIPELINE_STAGE_GEOMETRY_SHADER_BIT
- VUID-vkCmdWaitEvents-srcStageMask-04091
  If the tessellationShader feature is not enabled, srcStageMask **must** not contain VK_PIPELINE_STAGE_TESSELLATION_CONTROL_SHADER_BIT or VK_PIPELINE_STAGE_TESSELLATION_EVALUATION_SHADER_BIT
- VUID-vkCmdWaitEvents-srcStageMask-03937
  If the synchronization2 feature is not enabled, srcStageMask **must** not be 0
- VUID-vkCmdWaitEvents-dstStageMask-04090
  If the geometryShader feature is not enabled, dstStageMask **must** not contain VK_PIPELINE_STAGE_GEOMETRY_SHADER_BIT
- VUID-vkCmdWaitEvents-dstStageMask-04091
  If the tessellationShader feature is not enabled, dstStageMask **must** not contain VK_PIPELINE_STAGE_TESSELLATION_CONTROL_SHADER_BIT or VK_PIPELINE_STAGE_TESSELLATION_EVALUATION_SHADER_BIT
- VUID-vkCmdWaitEvents-dstStageMask-03937
  If the synchronization2 feature is not enabled, dstStageMask **must** not be 0
- VUID-vkCmdWaitEvents-srcAccessMask-02815
  The srcAccessMask member of each element of pMemoryBarriers **must** only include access flags that are supported by one or more of the pipeline stages in srcStageMask, as specified in the table of supported access types
- VUID-vkCmdWaitEvents-dstAccessMask-02816
  The dstAccessMask member of each element of pMemoryBarriers **must** only include access

flags that are supported by one or more of the pipeline stages in dstStageMask, as specified in the table of supported access types

- VUID-vkCmdWaitEvents-pBufferMemoryBarriers-02817
  For any element of pBufferMemoryBarriers, if its srcQueueFamilyIndex and dstQueueFamilyIndex members are equal, or if its srcQueueFamilyIndex is the queue family index that was used to create the command pool that commandBuffer was allocated from, then its srcAccessMask member **must** only contain access flags that are supported by one or more of the pipeline stages in srcStageMask, as specified in the table of supported access types
- VUID-vkCmdWaitEvents-pBufferMemoryBarriers-02818
  For any element of pBufferMemoryBarriers, if its srcQueueFamilyIndex and dstQueueFamilyIndex members are equal, or if its dstQueueFamilyIndex is the queue family index that was used to create the command pool that commandBuffer was allocated from, then its dstAccessMask member **must** only contain access flags that are supported by one or more of the pipeline stages in dstStageMask, as specified in the table of supported access types
- VUID-vkCmdWaitEvents-pImageMemoryBarriers-02819
  For any element of pImageMemoryBarriers, if its srcQueueFamilyIndex and dstQueueFamilyIndex members are equal, or if its srcQueueFamilyIndex is the queue family index that was used to create the command pool that commandBuffer was allocated from, then its srcAccessMask member **must** only contain access flags that are supported by one or more of the pipeline stages in srcStageMask, as specified in the table of supported access types
- VUID-vkCmdWaitEvents-pImageMemoryBarriers-02820
  For any element of pImageMemoryBarriers, if its srcQueueFamilyIndex and dstQueueFamilyIndex members are equal, or if its dstQueueFamilyIndex is the queue family index that was used to create the command pool that commandBuffer was allocated from, then its dstAccessMask member **must** only contain access flags that are supported by one or more of the pipeline stages in dstStageMask, as specified in the table of supported access types
- VUID-vkCmdWaitEvents-srcStageMask-06459
  Any pipeline stage included in srcStageMask **must** be supported by the capabilities of the queue family specified by the queueFamilyIndex member of the VkCommandPoolCreateInfo structure that was used to create the VkCommandPool that commandBuffer was allocated from, as specified in the table of supported pipeline stages
- VUID-vkCmdWaitEvents-dstStageMask-06460
  Any pipeline stage included in dstStageMask **must** be supported by the capabilities of the queue family specified by the queueFamilyIndex member of the VkCommandPoolCreateInfo structure that was used to create the VkCommandPool that commandBuffer was allocated from, as specified in the table of supported pipeline stages
- VUID-vkCmdWaitEvents-srcStageMask-01158
  srcStageMask **must** be the bitwise OR of the stageMask parameter used in previous calls to vkCmdSetEvent with any of the elements of pEvents and VK_PIPELINE_STAGE_HOST_BIT if any of the elements of pEvents was set using vkSetEvent
- VUID-vkCmdWaitEvents-srcStageMask-07308

If vkCmdWaitEvents is being called inside a render pass instance, srcStageMask **must** not include VK_PIPELINE_STAGE_HOST_BIT

- VUID-vkCmdWaitEvents-srcQueueFamilyIndex-02803
  The srcQueueFamilyIndex and dstQueueFamilyIndex members of any element of pBufferMemoryBarriers or pImageMemoryBarriers **must** be equal
- VUID-vkCmdWaitEvents-commandBuffer-01167
  commandBuffer's current device mask **must** include exactly one physical device
- VUID-vkCmdWaitEvents-pEvents-03847
  Elements of pEvents **must** not have been signaled by vkCmdSetEvent2

Valid Usage (Implicit)

- VUID-vkCmdWaitEvents-commandBuffer-parameter
  commandBuffer **must** be a valid VkCommandBuffer handle
- VUID-vkCmdWaitEvents-pEvents-parameter
  pEvents **must** be a valid pointer to an array of eventCount valid VkEvent handles
- VUID-vkCmdWaitEvents-srcStageMask-parameter
  srcStageMask **must** be a valid combination of VkPipelineStageFlagBits values
- VUID-vkCmdWaitEvents-dstStageMask-parameter
  dstStageMask **must** be a valid combination of VkPipelineStageFlagBits values
- VUID-vkCmdWaitEvents-pMemoryBarriers-parameter
  If memoryBarrierCount is not 0, pMemoryBarriers **must** be a valid pointer to an array of memoryBarrierCount valid VkMemoryBarrier structures
- VUID-vkCmdWaitEvents-pBufferMemoryBarriers-parameter
  If bufferMemoryBarrierCount is not 0, pBufferMemoryBarriers **must** be a valid pointer to an array of bufferMemoryBarrierCount valid VkBufferMemoryBarrier structures
- VUID-vkCmdWaitEvents-pImageMemoryBarriers-parameter
  If imageMemoryBarrierCount is not 0, pImageMemoryBarriers **must** be a valid pointer to an array of imageMemoryBarrierCount valid VkImageMemoryBarrier structures
- VUID-vkCmdWaitEvents-commandBuffer-recording
  commandBuffer **must** be in the recording state
- VUID-vkCmdWaitEvents-commandBuffer-cmdpool
  The VkCommandPool that commandBuffer was allocated from **must** support graphics, or compute operations
- VUID-vkCmdWaitEvents-eventCount-arraylength
  eventCount **must** be greater than 0
- VUID-vkCmdWaitEvents-commonparent
  Both of commandBuffer, and the elements of pEvents **must** have been created, allocated, or retrieved from the same VkDevice

Host Synchronization

- Host access to `commandBuffer` **must** be externally synchronized
- Host access to the `VkCommandPool` that `commandBuffer` was allocated from **must** be externally synchronized

Command Properties

Command Buffer Levels	Render Pass Scope	Supported Queue Types	Command Type
Primary Secondary	Both	Graphics Compute	Synchronization

7.6. Pipeline Barriers

To record a pipeline barrier, call:

```
// Provided by VK_VERSION_1_3
void vkCmdPipelineBarrier2(
    VkCommandBuffer                             commandBuffer,
    const VkDependencyInfo*                     pDependencyInfo);
```

- `commandBuffer` is the command buffer into which the command is recorded.
- `pDependencyInfo` is a pointer to a VkDependencyInfo structure defining the scopes of this operation.

When vkCmdPipelineBarrier2 is submitted to a queue, it defines memory dependencies between commands that were submitted to the same queue before it, and those submitted to the same queue after it.

The first synchronization scope and access scope of each memory dependency defined by `pDependencyInfo` are applied to operations that occurred earlier in submission order.

The second synchronization scope and access scope of each memory dependency defined by `pDependencyInfo` are applied to operations that occurred later in submission order.

If `vkCmdPipelineBarrier2` is recorded within a render pass instance, the synchronization scopes are limited to a subset of operations within the same subpass or render pass instance.

Valid Usage

- VUID-vkCmdPipelineBarrier2-None-07889
  If `vkCmdPipelineBarrier2` is called within a render pass instance using a VkRenderPass

object, the render pass **must** have been created with at least one subpass dependency that expresses a dependency from the current subpass to itself, does not include VK_DEPENDENCY_BY_REGION_BIT if this command does not, does not include VK_DEPENDENCY_VIEW_LOCAL_BIT if this command does not, and has synchronization scopes and access scopes that are all supersets of the scopes defined in this command

- VUID-vkCmdPipelineBarrier2-bufferMemoryBarrierCount-01178
  If vkCmdPipelineBarrier2 is called within a render pass instance using a VkRenderPass object, it **must** not include any buffer memory barriers
- VUID-vkCmdPipelineBarrier2-image-04073
  If vkCmdPipelineBarrier2 is called within a render pass instance using a VkRenderPass object, the image member of any image memory barrier included in this command **must** be an attachment used in the current subpass both as an input attachment, and as either a color, or depth/stencil attachment
- VUID-vkCmdPipelineBarrier2-oldLayout-01181
  If vkCmdPipelineBarrier2 is called within a render pass instance, the oldLayout and newLayout members of any image memory barrier included in this command **must** be equal
- VUID-vkCmdPipelineBarrier2-srcQueueFamilyIndex-01182
  If vkCmdPipelineBarrier2 is called within a render pass instance, the srcQueueFamilyIndex and dstQueueFamilyIndex members of any memory barrier included in this command **must** be equal
- VUID-vkCmdPipelineBarrier2-None-07890
  If vkCmdPipelineBarrier2 is called within a render pass instance, and the source stage masks of any memory barriers include framebuffer-space stages, destination stage masks of all memory barriers **must** only include framebuffer-space stages
- VUID-vkCmdPipelineBarrier2-dependencyFlags-07891
  If vkCmdPipelineBarrier2 is called within a render pass instance, and the source stage masks of any memory barriers include framebuffer-space stages, then dependencyFlags **must** include VK_DEPENDENCY_BY_REGION_BIT
- VUID-vkCmdPipelineBarrier2-None-07892
  If vkCmdPipelineBarrier2 is called within a render pass instance, the source and destination stage masks of any memory barriers **must** only include graphics pipeline stages
- VUID-vkCmdPipelineBarrier2-dependencyFlags-01186
  If vkCmdPipelineBarrier2 is called outside of a render pass instance, the dependency flags **must** not include VK_DEPENDENCY_VIEW_LOCAL_BIT
- VUID-vkCmdPipelineBarrier2-None-07893
  If vkCmdPipelineBarrier2 is called inside a render pass instance, and there is more than one view in the current subpass, dependency flags **must** include VK_DEPENDENCY_VIEW_LOCAL_BIT
- VUID-vkCmdPipelineBarrier2-None-09553
  vkCmdPipelineBarrier2 **must** not be called within a render pass instance started with vkCmdBeginRendering

- VUID-vkCmdPipelineBarrier2-synchronization2-03848
  The `synchronization2` feature **must** be enabled
- VUID-vkCmdPipelineBarrier2-srcStageMask-09673
  The `srcStageMask` member of any element of the `pMemoryBarriers` member of `pDependencyInfo` **must** only include pipeline stages valid for the queue family that was used to create the command pool that `commandBuffer` was allocated from
- VUID-vkCmdPipelineBarrier2-dstStageMask-09674
  The `dstStageMask` member of any element of the `pMemoryBarriers` member of `pDependencyInfo` **must** only include pipeline stages valid for the queue family that was used to create the command pool that `commandBuffer` was allocated from
- VUID-vkCmdPipelineBarrier2-srcStageMask-09675
  If a buffer or image memory barrier does not specify an acquire operation, the respective `srcStageMask` member of the element of the `pBufferMemoryBarriers` or `pImageMemoryBarriers` members of `pDependencyInfo` **must** only include pipeline stages valid for the queue family that was used to create the command pool that `commandBuffer` was allocated from
- VUID-vkCmdPipelineBarrier2-dstStageMask-09676
  If a buffer or image memory barrier does not specify an release operation, the respective `dstStageMask` member of the element of the `pBufferMemoryBarriers` or `pImageMemoryBarriers` members of `pDependencyInfo` **must** only include pipeline stages valid for the queue family that was used to create the command pool that `commandBuffer` was allocated from

Valid Usage (Implicit)

- VUID-vkCmdPipelineBarrier2-commandBuffer-parameter
  `commandBuffer` **must** be a valid VkCommandBuffer handle
- VUID-vkCmdPipelineBarrier2-pDependencyInfo-parameter
  `pDependencyInfo` **must** be a valid pointer to a valid VkDependencyInfo structure
- VUID-vkCmdPipelineBarrier2-commandBuffer-recording
  `commandBuffer` **must** be in the recording state
- VUID-vkCmdPipelineBarrier2-commandBuffer-cmdpool
  The `VkCommandPool` that `commandBuffer` was allocated from **must** support transfer, graphics, or compute operations

Host Synchronization

- Host access to `commandBuffer` **must** be externally synchronized
- Host access to the `VkCommandPool` that `commandBuffer` was allocated from **must** be externally synchronized

Command Properties

Command Buffer Levels	Render Pass Scope	Supported Queue Types	Command Type
Primary Secondary	Both	Transfer Graphics Compute	Synchronization

To record a pipeline barrier, call:

```
// Provided by VK_VERSION_1_0
void vkCmdPipelineBarrier(
    VkCommandBuffer                             commandBuffer,
    VkPipelineStageFlags                        srcStageMask,
    VkPipelineStageFlags                        dstStageMask,
    VkDependencyFlags                           dependencyFlags,
    uint32_t                                    memoryBarrierCount,
    const VkMemoryBarrier*                      pMemoryBarriers,
    uint32_t                                    bufferMemoryBarrierCount,
    const VkBufferMemoryBarrier*                pBufferMemoryBarriers,
    uint32_t                                    imageMemoryBarrierCount,
    const VkImageMemoryBarrier*                 pImageMemoryBarriers);
```

- `commandBuffer` is the command buffer into which the command is recorded.
- `srcStageMask` is a bitmask of VkPipelineStageFlagBits specifying the source stages.
- `dstStageMask` is a bitmask of VkPipelineStageFlagBits specifying the destination stages.
- `dependencyFlags` is a bitmask of VkDependencyFlagBits specifying how execution and memory dependencies are formed.
- `memoryBarrierCount` is the length of the `pMemoryBarriers` array.
- `pMemoryBarriers` is a pointer to an array of VkMemoryBarrier structures.
- `bufferMemoryBarrierCount` is the length of the `pBufferMemoryBarriers` array.
- `pBufferMemoryBarriers` is a pointer to an array of VkBufferMemoryBarrier structures.
- `imageMemoryBarrierCount` is the length of the `pImageMemoryBarriers` array.
- `pImageMemoryBarriers` is a pointer to an array of VkImageMemoryBarrier structures.

`vkCmdPipelineBarrier` operates almost identically to vkCmdPipelineBarrier2, except that the scopes and barriers are defined as direct parameters rather than being defined by a VkDependencyInfo.

When vkCmdPipelineBarrier is submitted to a queue, it defines a memory dependency between commands that were submitted to the same queue before it, and those submitted to the same queue after it.

If vkCmdPipelineBarrier was recorded outside a render pass instance, the first synchronization

scope includes all commands that occur earlier in submission order. If vkCmdPipelineBarrier was recorded inside a render pass instance, the first synchronization scope includes only commands that occur earlier in submission order within the same subpass. In either case, the first synchronization scope is limited to operations on the pipeline stages determined by the source stage mask specified by `srcStageMask`.

If vkCmdPipelineBarrier was recorded outside a render pass instance, the second synchronization scope includes all commands that occur later in submission order. If vkCmdPipelineBarrier was recorded inside a render pass instance, the second synchronization scope includes only commands that occur later in submission order within the same subpass. In either case, the second synchronization scope is limited to operations on the pipeline stages determined by the destination stage mask specified by `dstStageMask`.

The first access scope is limited to accesses in the pipeline stages determined by the source stage mask specified by `srcStageMask`. Within that, the first access scope only includes the first access scopes defined by elements of the `pMemoryBarriers`, `pBufferMemoryBarriers` and `pImageMemoryBarriers` arrays, which each define a set of memory barriers. If no memory barriers are specified, then the first access scope includes no accesses.

The second access scope is limited to accesses in the pipeline stages determined by the destination stage mask specified by `dstStageMask`. Within that, the second access scope only includes the second access scopes defined by elements of the `pMemoryBarriers`, `pBufferMemoryBarriers` and `pImageMemoryBarriers` arrays, which each define a set of memory barriers. If no memory barriers are specified, then the second access scope includes no accesses.

If `dependencyFlags` includes `VK_DEPENDENCY_BY_REGION_BIT`, then any dependency between framebuffer-space pipeline stages is framebuffer-local - otherwise it is framebuffer-global.

Valid Usage

- VUID-vkCmdPipelineBarrier-srcStageMask-04090
  If the `geometryShader` feature is not enabled, `srcStageMask` **must** not contain `VK_PIPELINE_STAGE_GEOMETRY_SHADER_BIT`
- VUID-vkCmdPipelineBarrier-srcStageMask-04091
  If the `tessellationShader` feature is not enabled, `srcStageMask` **must** not contain `VK_PIPELINE_STAGE_TESSELLATION_CONTROL_SHADER_BIT` or `VK_PIPELINE_STAGE_TESSELLATION_EVALUATION_SHADER_BIT`
- VUID-vkCmdPipelineBarrier-srcStageMask-03937
  If the `synchronization2` feature is not enabled, `srcStageMask` **must** not be `0`
- VUID-vkCmdPipelineBarrier-dstStageMask-04090
  If the `geometryShader` feature is not enabled, `dstStageMask` **must** not contain `VK_PIPELINE_STAGE_GEOMETRY_SHADER_BIT`
- VUID-vkCmdPipelineBarrier-dstStageMask-04091
  If the `tessellationShader` feature is not enabled, `dstStageMask` **must** not contain `VK_PIPELINE_STAGE_TESSELLATION_CONTROL_SHADER_BIT` or `VK_PIPELINE_STAGE_TESSELLATION_EVALUATION_SHADER_BIT`

- VUID-vkCmdPipelineBarrier-dstStageMask-03937
  If the `synchronization2` feature is not enabled, `dstStageMask` **must** not be `0`

- VUID-vkCmdPipelineBarrier-srcAccessMask-02815
  The `srcAccessMask` member of each element of `pMemoryBarriers` **must** only include access flags that are supported by one or more of the pipeline stages in `srcStageMask`, as specified in the table of supported access types

- VUID-vkCmdPipelineBarrier-dstAccessMask-02816
  The `dstAccessMask` member of each element of `pMemoryBarriers` **must** only include access flags that are supported by one or more of the pipeline stages in `dstStageMask`, as specified in the table of supported access types

- VUID-vkCmdPipelineBarrier-pBufferMemoryBarriers-02817
  For any element of `pBufferMemoryBarriers`, if its `srcQueueFamilyIndex` and `dstQueueFamilyIndex` members are equal, or if its `srcQueueFamilyIndex` is the queue family index that was used to create the command pool that `commandBuffer` was allocated from, then its `srcAccessMask` member **must** only contain access flags that are supported by one or more of the pipeline stages in `srcStageMask`, as specified in the table of supported access types

- VUID-vkCmdPipelineBarrier-pBufferMemoryBarriers-02818
  For any element of `pBufferMemoryBarriers`, if its `srcQueueFamilyIndex` and `dstQueueFamilyIndex` members are equal, or if its `dstQueueFamilyIndex` is the queue family index that was used to create the command pool that `commandBuffer` was allocated from, then its `dstAccessMask` member **must** only contain access flags that are supported by one or more of the pipeline stages in `dstStageMask`, as specified in the table of supported access types

- VUID-vkCmdPipelineBarrier-pImageMemoryBarriers-02819
  For any element of `pImageMemoryBarriers`, if its `srcQueueFamilyIndex` and `dstQueueFamilyIndex` members are equal, or if its `srcQueueFamilyIndex` is the queue family index that was used to create the command pool that `commandBuffer` was allocated from, then its `srcAccessMask` member **must** only contain access flags that are supported by one or more of the pipeline stages in `srcStageMask`, as specified in the table of supported access types

- VUID-vkCmdPipelineBarrier-pImageMemoryBarriers-02820
  For any element of `pImageMemoryBarriers`, if its `srcQueueFamilyIndex` and `dstQueueFamilyIndex` members are equal, or if its `dstQueueFamilyIndex` is the queue family index that was used to create the command pool that `commandBuffer` was allocated from, then its `dstAccessMask` member **must** only contain access flags that are supported by one or more of the pipeline stages in `dstStageMask`, as specified in the table of supported access types

- VUID-vkCmdPipelineBarrier-None-07889
  If `vkCmdPipelineBarrier` is called within a render pass instance using a VkRenderPass object, the render pass **must** have been created with at least one subpass dependency that expresses a dependency from the current subpass to itself, does not include `VK_DEPENDENCY_BY_REGION_BIT` if this command does not, does not include `VK_DEPENDENCY_VIEW_LOCAL_BIT` if this command does not, and has synchronization scopes

and access scopes that are all supersets of the scopes defined in this command

- VUID-vkCmdPipelineBarrier-bufferMemoryBarrierCount-01178
  If `vkCmdPipelineBarrier` is called within a render pass instance using a VkRenderPass object, it **must** not include any buffer memory barriers
- VUID-vkCmdPipelineBarrier-image-04073
  If `vkCmdPipelineBarrier` is called within a render pass instance using a VkRenderPass object, the `image` member of any image memory barrier included in this command **must** be an attachment used in the current subpass both as an input attachment, and as either a color, or depth/stencil attachment
- VUID-vkCmdPipelineBarrier-oldLayout-01181
  If `vkCmdPipelineBarrier` is called within a render pass instance, the `oldLayout` and `newLayout` members of any image memory barrier included in this command **must** be equal
- VUID-vkCmdPipelineBarrier-srcQueueFamilyIndex-01182
  If `vkCmdPipelineBarrier` is called within a render pass instance, the `srcQueueFamilyIndex` and `dstQueueFamilyIndex` members of any memory barrier included in this command **must** be equal
- VUID-vkCmdPipelineBarrier-None-07890
  If `vkCmdPipelineBarrier` is called within a render pass instance, and the source stage masks of any memory barriers include framebuffer-space stages, destination stage masks of all memory barriers **must** only include framebuffer-space stages
- VUID-vkCmdPipelineBarrier-dependencyFlags-07891
  If `vkCmdPipelineBarrier` is called within a render pass instance, and the source stage masks of any memory barriers include framebuffer-space stages, then `dependencyFlags` **must** include `VK_DEPENDENCY_BY_REGION_BIT`
- VUID-vkCmdPipelineBarrier-None-07892
  If `vkCmdPipelineBarrier` is called within a render pass instance, the source and destination stage masks of any memory barriers **must** only include graphics pipeline stages
- VUID-vkCmdPipelineBarrier-dependencyFlags-01186
  If `vkCmdPipelineBarrier` is called outside of a render pass instance, the dependency flags **must** not include `VK_DEPENDENCY_VIEW_LOCAL_BIT`
- VUID-vkCmdPipelineBarrier-None-07893
  If `vkCmdPipelineBarrier` is called inside a render pass instance, and there is more than one view in the current subpass, dependency flags **must** include `VK_DEPENDENCY_VIEW_LOCAL_BIT`
- VUID-vkCmdPipelineBarrier-None-09553
  `vkCmdPipelineBarrier` **must** not be called within a render pass instance started with vkCmdBeginRendering
- VUID-vkCmdPipelineBarrier-srcStageMask-06461
  Any pipeline stage included in `srcStageMask` **must** be supported by the capabilities of the queue family specified by the `queueFamilyIndex` member of the VkCommandPoolCreateInfo structure that was used to create the `VkCommandPool` that `commandBuffer` was allocated from, as specified in the table of supported pipeline stages
- VUID-vkCmdPipelineBarrier-dstStageMask-06462

Any pipeline stage included in `dstStageMask` **must** be supported by the capabilities of the queue family specified by the `queueFamilyIndex` member of the VkCommandPoolCreateInfo structure that was used to create the `VkCommandPool` that `commandBuffer` was allocated from, as specified in the table of supported pipeline stages

- VUID-vkCmdPipelineBarrier-srcStageMask-09633
  If either `srcStageMask` or `dstStageMask` includes `VK_PIPELINE_STAGE_HOST_BIT`, for any element of `pImageMemoryBarriers`, `srcQueueFamilyIndex` and `dstQueueFamilyIndex` **must** be equal
- VUID-vkCmdPipelineBarrier-srcStageMask-09634
  If either `srcStageMask` or `dstStageMask` includes `VK_PIPELINE_STAGE_HOST_BIT`, for any element of `pBufferMemoryBarriers`, `srcQueueFamilyIndex` and `dstQueueFamilyIndex` **must** be equal

Valid Usage (Implicit)

- VUID-vkCmdPipelineBarrier-commandBuffer-parameter
  `commandBuffer` **must** be a valid VkCommandBuffer handle
- VUID-vkCmdPipelineBarrier-srcStageMask-parameter
  `srcStageMask` **must** be a valid combination of VkPipelineStageFlagBits values
- VUID-vkCmdPipelineBarrier-dstStageMask-parameter
  `dstStageMask` **must** be a valid combination of VkPipelineStageFlagBits values
- VUID-vkCmdPipelineBarrier-dependencyFlags-parameter
  `dependencyFlags` **must** be a valid combination of VkDependencyFlagBits values
- VUID-vkCmdPipelineBarrier-pMemoryBarriers-parameter
  If `memoryBarrierCount` is not `0`, `pMemoryBarriers` **must** be a valid pointer to an array of `memoryBarrierCount` valid VkMemoryBarrier structures
- VUID-vkCmdPipelineBarrier-pBufferMemoryBarriers-parameter
  If `bufferMemoryBarrierCount` is not `0`, `pBufferMemoryBarriers` **must** be a valid pointer to an array of `bufferMemoryBarrierCount` valid VkBufferMemoryBarrier structures
- VUID-vkCmdPipelineBarrier-pImageMemoryBarriers-parameter
  If `imageMemoryBarrierCount` is not `0`, `pImageMemoryBarriers` **must** be a valid pointer to an array of `imageMemoryBarrierCount` valid VkImageMemoryBarrier structures
- VUID-vkCmdPipelineBarrier-commandBuffer-recording
  `commandBuffer` **must** be in the recording state
- VUID-vkCmdPipelineBarrier-commandBuffer-cmdpool
  The `VkCommandPool` that `commandBuffer` was allocated from **must** support transfer, graphics, or compute operations

Host Synchronization

- Host access to `commandBuffer` **must** be externally synchronized

- Host access to the VkCommandPool that commandBuffer was allocated from **must** be externally synchronized

Command Properties

Command Buffer Levels	Render Pass Scope	Supported Queue Types	Command Type
Primary Secondary	Both	Transfer Graphics Compute	Synchronization

Bits which **can** be set in vkCmdPipelineBarrier::dependencyFlags, specifying how execution and memory dependencies are formed, are:

```
// Provided by VK_VERSION_1_0
typedef enum VkDependencyFlagBits {
    VK_DEPENDENCY_BY_REGION_BIT = 0x00000001,
  // Provided by VK_VERSION_1_1
    VK_DEPENDENCY_DEVICE_GROUP_BIT = 0x00000004,
  // Provided by VK_VERSION_1_1
    VK_DEPENDENCY_VIEW_LOCAL_BIT = 0x00000002,
} VkDependencyFlagBits;
```

- VK_DEPENDENCY_BY_REGION_BIT specifies that dependencies will be framebuffer-local.
- VK_DEPENDENCY_VIEW_LOCAL_BIT specifies that dependencies will be view-local.
- VK_DEPENDENCY_DEVICE_GROUP_BIT specifies that dependencies are non-device-local.

```
// Provided by VK_VERSION_1_0
typedef VkFlags VkDependencyFlags;
```

VkDependencyFlags is a bitmask type for setting a mask of zero or more VkDependencyFlagBits.

7.7. Memory Barriers

Memory barriers are used to explicitly control access to buffer and image subresource ranges. Memory barriers are used to transfer ownership between queue families, change image layouts, and define availability and visibility operations. They explicitly define the access types and buffer and image subresource ranges that are included in the access scopes of a memory dependency that is created by a synchronization command that includes them.

7.7.1. Global Memory Barriers

Global memory barriers apply to memory accesses involving all memory objects that exist at the

time of its execution.

The VkMemoryBarrier2 structure is defined as:

```
// Provided by VK_VERSION_1_3
typedef struct VkMemoryBarrier2 {
    VkStructureType          sType;
    const void*              pNext;
    VkPipelineStageFlags2    srcStageMask;
    VkAccessFlags2           srcAccessMask;
    VkPipelineStageFlags2    dstStageMask;
    VkAccessFlags2           dstAccessMask;
} VkMemoryBarrier2;
```

- sType is a VkStructureType value identifying this structure.
- pNext is NULL or a pointer to a structure extending this structure.
- srcStageMask is a VkPipelineStageFlags2 mask of pipeline stages to be included in the first synchronization scope.
- srcAccessMask is a VkAccessFlags2 mask of access flags to be included in the first access scope.
- dstStageMask is a VkPipelineStageFlags2 mask of pipeline stages to be included in the second synchronization scope.
- dstAccessMask is a VkAccessFlags2 mask of access flags to be included in the second access scope.

This structure defines a memory dependency affecting all device memory.

The first synchronization scope and access scope described by this structure include only operations and memory accesses specified by srcStageMask and srcAccessMask.

The second synchronization scope and access scope described by this structure include only operations and memory accesses specified by dstStageMask and dstAccessMask.

Valid Usage

- VUID-VkMemoryBarrier2-srcStageMask-03929
  If the geometryShader feature is not enabled, srcStageMask **must** not contain VK_PIPELINE_STAGE_2_GEOMETRY_SHADER_BIT
- VUID-VkMemoryBarrier2-srcStageMask-03930
  If the tessellationShader feature is not enabled, srcStageMask **must** not contain VK_PIPELINE_STAGE_2_TESSELLATION_CONTROL_SHADER_BIT or VK_PIPELINE_STAGE_2_TESSELLATION_EVALUATION_SHADER_BIT
- VUID-VkMemoryBarrier2-srcAccessMask-03900
  If srcAccessMask includes VK_ACCESS_2_INDIRECT_COMMAND_READ_BIT, srcStageMask **must** include VK_PIPELINE_STAGE_2_DRAW_INDIRECT_BIT, VK_PIPELINE_STAGE_2_ALL_GRAPHICS_BIT, or VK_PIPELINE_STAGE_2_ALL_COMMANDS_BIT

- VUID-VkMemoryBarrier2-srcAccessMask-03901
  If `srcAccessMask` includes `VK_ACCESS_2_INDEX_READ_BIT`, `srcStageMask` **must** include `VK_PIPELINE_STAGE_2_INDEX_INPUT_BIT`, `VK_PIPELINE_STAGE_2_VERTEX_INPUT_BIT`, `VK_PIPELINE_STAGE_2_ALL_GRAPHICS_BIT`, or `VK_PIPELINE_STAGE_2_ALL_COMMANDS_BIT`
- VUID-VkMemoryBarrier2-srcAccessMask-03902
  If `srcAccessMask` includes `VK_ACCESS_2_VERTEX_ATTRIBUTE_READ_BIT`, `srcStageMask` **must** include `VK_PIPELINE_STAGE_2_VERTEX_ATTRIBUTE_INPUT_BIT`, `VK_PIPELINE_STAGE_2_VERTEX_INPUT_BIT`, `VK_PIPELINE_STAGE_2_ALL_GRAPHICS_BIT`, or `VK_PIPELINE_STAGE_2_ALL_COMMANDS_BIT`
- VUID-VkMemoryBarrier2-srcAccessMask-03903
  If `srcAccessMask` includes `VK_ACCESS_2_INPUT_ATTACHMENT_READ_BIT`, `srcStageMask` **must** include `VK_PIPELINE_STAGE_2_FRAGMENT_SHADER_BIT`, `VK_PIPELINE_STAGE_2_SUBPASS_SHADER_BIT_HUAWEI`, `VK_PIPELINE_STAGE_2_ALL_GRAPHICS_BIT`, or `VK_PIPELINE_STAGE_2_ALL_COMMANDS_BIT`
- VUID-VkMemoryBarrier2-srcAccessMask-03904
  If `srcAccessMask` includes `VK_ACCESS_2_UNIFORM_READ_BIT`, `srcStageMask` **must** include `VK_PIPELINE_STAGE_2_ALL_GRAPHICS_BIT`, `VK_PIPELINE_STAGE_2_ALL_COMMANDS_BIT`, or one of the `VK_PIPELINE_STAGE_*_SHADER_BIT` stages
- VUID-VkMemoryBarrier2-srcAccessMask-03905
  If `srcAccessMask` includes `VK_ACCESS_2_SHADER_SAMPLED_READ_BIT`, `srcStageMask` **must** include `VK_PIPELINE_STAGE_2_ALL_GRAPHICS_BIT`, `VK_PIPELINE_STAGE_2_ALL_COMMANDS_BIT`, or one of the `VK_PIPELINE_STAGE_*_SHADER_BIT` stages
- VUID-VkMemoryBarrier2-srcAccessMask-03906
  If `srcAccessMask` includes `VK_ACCESS_2_SHADER_STORAGE_READ_BIT`, `srcStageMask` **must** include `VK_PIPELINE_STAGE_2_ALL_GRAPHICS_BIT`, `VK_PIPELINE_STAGE_2_ALL_COMMANDS_BIT`, or one of the `VK_PIPELINE_STAGE_*_SHADER_BIT` stages
- VUID-VkMemoryBarrier2-srcAccessMask-03907
  If `srcAccessMask` includes `VK_ACCESS_2_SHADER_STORAGE_WRITE_BIT`, `srcStageMask` **must** include `VK_PIPELINE_STAGE_2_ALL_GRAPHICS_BIT`, `VK_PIPELINE_STAGE_2_ALL_COMMANDS_BIT`, or one of the `VK_PIPELINE_STAGE_*_SHADER_BIT` stages
- VUID-VkMemoryBarrier2-srcAccessMask-07454
  If `srcAccessMask` includes `VK_ACCESS_2_SHADER_READ_BIT`, `srcStageMask` **must** include `VK_PIPELINE_STAGE_2_ALL_GRAPHICS_BIT`, `VK_PIPELINE_STAGE_2_ALL_COMMANDS_BIT`, or one of the `VK_PIPELINE_STAGE_*_SHADER_BIT` stages
- VUID-VkMemoryBarrier2-srcAccessMask-03909
  If `srcAccessMask` includes `VK_ACCESS_2_SHADER_WRITE_BIT`, `srcStageMask` **must** include `VK_PIPELINE_STAGE_2_ALL_GRAPHICS_BIT`, `VK_PIPELINE_STAGE_2_ALL_COMMANDS_BIT`, or one of the `VK_PIPELINE_STAGE_*_SHADER_BIT` stages
- VUID-VkMemoryBarrier2-srcAccessMask-03910
  If `srcAccessMask` includes `VK_ACCESS_2_COLOR_ATTACHMENT_READ_BIT`, `srcStageMask` **must** include `VK_PIPELINE_STAGE_2_COLOR_ATTACHMENT_OUTPUT_BIT` `VK_PIPELINE_STAGE_2_ALL_GRAPHICS_BIT`, or `VK_PIPELINE_STAGE_2_ALL_COMMANDS_BIT`
- VUID-VkMemoryBarrier2-srcAccessMask-03911
  If `srcAccessMask` includes `VK_ACCESS_2_COLOR_ATTACHMENT_WRITE_BIT`, `srcStageMask` **must**

include VK_PIPELINE_STAGE_2_COLOR_ATTACHMENT_OUTPUT_BIT VK_PIPELINE_STAGE_2_ALL_GRAPHICS_BIT, or VK_PIPELINE_STAGE_2_ALL_COMMANDS_BIT

- VUID-VkMemoryBarrier2-srcAccessMask-03912
  If srcAccessMask includes VK_ACCESS_2_DEPTH_STENCIL_ATTACHMENT_READ_BIT, srcStageMask **must** include VK_PIPELINE_STAGE_2_EARLY_FRAGMENT_TESTS_BIT, VK_PIPELINE_STAGE_2_LATE_FRAGMENT_TESTS_BIT, VK_PIPELINE_STAGE_2_ALL_GRAPHICS_BIT, or VK_PIPELINE_STAGE_2_ALL_COMMANDS_BIT
- VUID-VkMemoryBarrier2-srcAccessMask-03913
  If srcAccessMask includes VK_ACCESS_2_DEPTH_STENCIL_ATTACHMENT_WRITE_BIT, srcStageMask **must** include VK_PIPELINE_STAGE_2_EARLY_FRAGMENT_TESTS_BIT, VK_PIPELINE_STAGE_2_LATE_FRAGMENT_TESTS_BIT, VK_PIPELINE_STAGE_2_ALL_GRAPHICS_BIT, or VK_PIPELINE_STAGE_2_ALL_COMMANDS_BIT
- VUID-VkMemoryBarrier2-srcAccessMask-03914
  If srcAccessMask includes VK_ACCESS_2_TRANSFER_READ_BIT, srcStageMask **must** include VK_PIPELINE_STAGE_2_COPY_BIT, VK_PIPELINE_STAGE_2_BLIT_BIT, VK_PIPELINE_STAGE_2_RESOLVE_BIT, VK_PIPELINE_STAGE_2_ALL_TRANSFER_BIT, or VK_PIPELINE_STAGE_2_ALL_COMMANDS_BIT
- VUID-VkMemoryBarrier2-srcAccessMask-03915
  If srcAccessMask includes VK_ACCESS_2_TRANSFER_WRITE_BIT, srcStageMask **must** include VK_PIPELINE_STAGE_2_COPY_BIT, VK_PIPELINE_STAGE_2_BLIT_BIT, VK_PIPELINE_STAGE_2_RESOLVE_BIT, VK_PIPELINE_STAGE_2_CLEAR_BIT, VK_PIPELINE_STAGE_2_ALL_TRANSFER_BIT, VK_PIPELINE_STAGE_2_ALL_COMMANDS_BIT
- VUID-VkMemoryBarrier2-srcAccessMask-03916
  If srcAccessMask includes VK_ACCESS_2_HOST_READ_BIT, srcStageMask **must** include VK_PIPELINE_STAGE_2_HOST_BIT
- VUID-VkMemoryBarrier2-srcAccessMask-03917
  If srcAccessMask includes VK_ACCESS_2_HOST_WRITE_BIT, srcStageMask **must** include VK_PIPELINE_STAGE_2_HOST_BIT
- VUID-VkMemoryBarrier2-dstStageMask-03929
  If the geometryShader feature is not enabled, dstStageMask **must** not contain VK_PIPELINE_STAGE_2_GEOMETRY_SHADER_BIT
- VUID-VkMemoryBarrier2-dstStageMask-03930
  If the tessellationShader feature is not enabled, dstStageMask **must** not contain VK_PIPELINE_STAGE_2_TESSELLATION_CONTROL_SHADER_BIT or VK_PIPELINE_STAGE_2_TESSELLATION_EVALUATION_SHADER_BIT
- VUID-VkMemoryBarrier2-dstAccessMask-03900
  If dstAccessMask includes VK_ACCESS_2_INDIRECT_COMMAND_READ_BIT, dstStageMask **must** include VK_PIPELINE_STAGE_2_DRAW_INDIRECT_BIT, VK_PIPELINE_STAGE_2_ALL_GRAPHICS_BIT, or VK_PIPELINE_STAGE_2_ALL_COMMANDS_BIT
- VUID-VkMemoryBarrier2-dstAccessMask-03901
  If dstAccessMask includes VK_ACCESS_2_INDEX_READ_BIT, dstStageMask **must** include VK_PIPELINE_STAGE_2_INDEX_INPUT_BIT, VK_PIPELINE_STAGE_2_VERTEX_INPUT_BIT, VK_PIPELINE_STAGE_2_ALL_GRAPHICS_BIT, or VK_PIPELINE_STAGE_2_ALL_COMMANDS_BIT

- VUID-VkMemoryBarrier2-dstAccessMask-03902
  If dstAccessMask includes VK_ACCESS_2_VERTEX_ATTRIBUTE_READ_BIT, dstStageMask **must** include VK_PIPELINE_STAGE_2_VERTEX_ATTRIBUTE_INPUT_BIT, VK_PIPELINE_STAGE_2_VERTEX_INPUT_BIT, VK_PIPELINE_STAGE_2_ALL_GRAPHICS_BIT, or VK_PIPELINE_STAGE_2_ALL_COMMANDS_BIT
- VUID-VkMemoryBarrier2-dstAccessMask-03903
  If dstAccessMask includes VK_ACCESS_2_INPUT_ATTACHMENT_READ_BIT, dstStageMask **must** include VK_PIPELINE_STAGE_2_FRAGMENT_SHADER_BIT, VK_PIPELINE_STAGE_2_SUBPASS_SHADER_BIT_HUAWEI, VK_PIPELINE_STAGE_2_ALL_GRAPHICS_BIT, or VK_PIPELINE_STAGE_2_ALL_COMMANDS_BIT
- VUID-VkMemoryBarrier2-dstAccessMask-03904
  If dstAccessMask includes VK_ACCESS_2_UNIFORM_READ_BIT, dstStageMask **must** include VK_PIPELINE_STAGE_2_ALL_GRAPHICS_BIT, VK_PIPELINE_STAGE_2_ALL_COMMANDS_BIT, or one of the VK_PIPELINE_STAGE_*_SHADER_BIT stages
- VUID-VkMemoryBarrier2-dstAccessMask-03905
  If dstAccessMask includes VK_ACCESS_2_SHADER_SAMPLED_READ_BIT, dstStageMask **must** include VK_PIPELINE_STAGE_2_ALL_GRAPHICS_BIT, VK_PIPELINE_STAGE_2_ALL_COMMANDS_BIT, or one of the VK_PIPELINE_STAGE_*_SHADER_BIT stages
- VUID-VkMemoryBarrier2-dstAccessMask-03906
  If dstAccessMask includes VK_ACCESS_2_SHADER_STORAGE_READ_BIT, dstStageMask **must** include VK_PIPELINE_STAGE_2_ALL_GRAPHICS_BIT, VK_PIPELINE_STAGE_2_ALL_COMMANDS_BIT, or one of the VK_PIPELINE_STAGE_*_SHADER_BIT stages
- VUID-VkMemoryBarrier2-dstAccessMask-03907
  If dstAccessMask includes VK_ACCESS_2_SHADER_STORAGE_WRITE_BIT, dstStageMask **must** include VK_PIPELINE_STAGE_2_ALL_GRAPHICS_BIT, VK_PIPELINE_STAGE_2_ALL_COMMANDS_BIT, or one of the VK_PIPELINE_STAGE_*_SHADER_BIT stages
- VUID-VkMemoryBarrier2-dstAccessMask-07454
  If dstAccessMask includes VK_ACCESS_2_SHADER_READ_BIT, dstStageMask **must** include VK_PIPELINE_STAGE_2_ALL_GRAPHICS_BIT, VK_PIPELINE_STAGE_2_ALL_COMMANDS_BIT, or one of the VK_PIPELINE_STAGE_*_SHADER_BIT stages
- VUID-VkMemoryBarrier2-dstAccessMask-03909
  If dstAccessMask includes VK_ACCESS_2_SHADER_WRITE_BIT, dstStageMask **must** include VK_PIPELINE_STAGE_2_ALL_GRAPHICS_BIT, VK_PIPELINE_STAGE_2_ALL_COMMANDS_BIT, or one of the VK_PIPELINE_STAGE_*_SHADER_BIT stages
- VUID-VkMemoryBarrier2-dstAccessMask-03910
  If dstAccessMask includes VK_ACCESS_2_COLOR_ATTACHMENT_READ_BIT, dstStageMask **must** include VK_PIPELINE_STAGE_2_COLOR_ATTACHMENT_OUTPUT_BIT VK_PIPELINE_STAGE_2_ALL_GRAPHICS_BIT, or VK_PIPELINE_STAGE_2_ALL_COMMANDS_BIT
- VUID-VkMemoryBarrier2-dstAccessMask-03911
  If dstAccessMask includes VK_ACCESS_2_COLOR_ATTACHMENT_WRITE_BIT, dstStageMask **must** include VK_PIPELINE_STAGE_2_COLOR_ATTACHMENT_OUTPUT_BIT VK_PIPELINE_STAGE_2_ALL_GRAPHICS_BIT, or VK_PIPELINE_STAGE_2_ALL_COMMANDS_BIT
- VUID-VkMemoryBarrier2-dstAccessMask-03912
  If dstAccessMask includes VK_ACCESS_2_DEPTH_STENCIL_ATTACHMENT_READ_BIT, dstStageMask

must include VK_PIPELINE_STAGE_2_EARLY_FRAGMENT_TESTS_BIT, VK_PIPELINE_STAGE_2_LATE_FRAGMENT_TESTS_BIT, VK_PIPELINE_STAGE_2_ALL_GRAPHICS_BIT, or VK_PIPELINE_STAGE_2_ALL_COMMANDS_BIT

- VUID-VkMemoryBarrier2-dstAccessMask-03913
  If dstAccessMask includes VK_ACCESS_2_DEPTH_STENCIL_ATTACHMENT_WRITE_BIT, dstStageMask **must** include VK_PIPELINE_STAGE_2_EARLY_FRAGMENT_TESTS_BIT, VK_PIPELINE_STAGE_2_LATE_FRAGMENT_TESTS_BIT, VK_PIPELINE_STAGE_2_ALL_GRAPHICS_BIT, or VK_PIPELINE_STAGE_2_ALL_COMMANDS_BIT
- VUID-VkMemoryBarrier2-dstAccessMask-03914
  If dstAccessMask includes VK_ACCESS_2_TRANSFER_READ_BIT, dstStageMask **must** include VK_PIPELINE_STAGE_2_COPY_BIT, VK_PIPELINE_STAGE_2_BLIT_BIT, VK_PIPELINE_STAGE_2_RESOLVE_BIT, VK_PIPELINE_STAGE_2_ALL_TRANSFER_BIT, or VK_PIPELINE_STAGE_2_ALL_COMMANDS_BIT
- VUID-VkMemoryBarrier2-dstAccessMask-03915
  If dstAccessMask includes VK_ACCESS_2_TRANSFER_WRITE_BIT, dstStageMask **must** include VK_PIPELINE_STAGE_2_COPY_BIT, VK_PIPELINE_STAGE_2_BLIT_BIT, VK_PIPELINE_STAGE_2_RESOLVE_BIT, VK_PIPELINE_STAGE_2_CLEAR_BIT, VK_PIPELINE_STAGE_2_ALL_TRANSFER_BIT, VK_PIPELINE_STAGE_2_ALL_COMMANDS_BIT
- VUID-VkMemoryBarrier2-dstAccessMask-03916
  If dstAccessMask includes VK_ACCESS_2_HOST_READ_BIT, dstStageMask **must** include VK_PIPELINE_STAGE_2_HOST_BIT
- VUID-VkMemoryBarrier2-dstAccessMask-03917
  If dstAccessMask includes VK_ACCESS_2_HOST_WRITE_BIT, dstStageMask **must** include VK_PIPELINE_STAGE_2_HOST_BIT

Valid Usage (Implicit)

- VUID-VkMemoryBarrier2-sType-sType
  sType **must** be VK_STRUCTURE_TYPE_MEMORY_BARRIER_2
- VUID-VkMemoryBarrier2-srcStageMask-parameter
  srcStageMask **must** be a valid combination of VkPipelineStageFlagBits2 values
- VUID-VkMemoryBarrier2-srcAccessMask-parameter
  srcAccessMask **must** be a valid combination of VkAccessFlagBits2 values
- VUID-VkMemoryBarrier2-dstStageMask-parameter
  dstStageMask **must** be a valid combination of VkPipelineStageFlagBits2 values
- VUID-VkMemoryBarrier2-dstAccessMask-parameter
  dstAccessMask **must** be a valid combination of VkAccessFlagBits2 values

The VkMemoryBarrier structure is defined as:

```
// Provided by VK_VERSION_1_0
typedef struct VkMemoryBarrier {
    VkStructureType    sType;
    const void*        pNext;
    VkAccessFlags      srcAccessMask;
    VkAccessFlags      dstAccessMask;
} VkMemoryBarrier;
```

- `sType` is a VkStructureType value identifying this structure.
- `pNext` is `NULL` or a pointer to a structure extending this structure.
- `srcAccessMask` is a bitmask of VkAccessFlagBits specifying a source access mask.
- `dstAccessMask` is a bitmask of VkAccessFlagBits specifying a destination access mask.

The first access scope is limited to access types in the source access mask specified by `srcAccessMask`.

The second access scope is limited to access types in the destination access mask specified by `dstAccessMask`.

Valid Usage (Implicit)

- VUID-VkMemoryBarrier-sType-sType
  `sType` **must** be `VK_STRUCTURE_TYPE_MEMORY_BARRIER`
- VUID-VkMemoryBarrier-pNext-pNext
  `pNext` **must** be `NULL`
- VUID-VkMemoryBarrier-srcAccessMask-parameter
  `srcAccessMask` **must** be a valid combination of VkAccessFlagBits values
- VUID-VkMemoryBarrier-dstAccessMask-parameter
  `dstAccessMask` **must** be a valid combination of VkAccessFlagBits values

7.7.2. Buffer Memory Barriers

Buffer memory barriers only apply to memory accesses involving a specific buffer range. That is, a memory dependency formed from a buffer memory barrier is scoped to access via the specified buffer range. Buffer memory barriers **can** also be used to define a queue family ownership transfer for the specified buffer range.

The `VkBufferMemoryBarrier2` structure is defined as:

```
// Provided by VK_VERSION_1_3
typedef struct VkBufferMemoryBarrier2 {
    VkStructureType          sType;
    const void*              pNext;
    VkPipelineStageFlags2    srcStageMask;
    VkAccessFlags2           srcAccessMask;
    VkPipelineStageFlags2    dstStageMask;
    VkAccessFlags2           dstAccessMask;
    uint32_t                 srcQueueFamilyIndex;
    uint32_t                 dstQueueFamilyIndex;
    VkBuffer                 buffer;
    VkDeviceSize             offset;
    VkDeviceSize             size;
} VkBufferMemoryBarrier2;
```

- `sType` is a VkStructureType value identifying this structure.
- `pNext` is `NULL` or a pointer to a structure extending this structure.
- `srcStageMask` is a VkPipelineStageFlags2 mask of pipeline stages to be included in the first synchronization scope.
- `srcAccessMask` is a VkAccessFlags2 mask of access flags to be included in the first access scope.
- `dstStageMask` is a VkPipelineStageFlags2 mask of pipeline stages to be included in the second synchronization scope.
- `dstAccessMask` is a VkAccessFlags2 mask of access flags to be included in the second access scope.
- `srcQueueFamilyIndex` is the source queue family for a queue family ownership transfer.
- `dstQueueFamilyIndex` is the destination queue family for a queue family ownership transfer.
- `buffer` is a handle to the buffer whose backing memory is affected by the barrier.
- `offset` is an offset in bytes into the backing memory for `buffer`; this is relative to the base offset as bound to the buffer (see vkBindBufferMemory).
- `size` is a size in bytes of the affected area of backing memory for `buffer`, or `VK_WHOLE_SIZE` to use the range from `offset` to the end of the buffer.

This structure defines a memory dependency limited to a range of a buffer, and **can** define a queue family ownership transfer operation for that range.

The first synchronization scope and access scope described by this structure include only operations and memory accesses specified by `srcStageMask` and `srcAccessMask`.

The second synchronization scope and access scope described by this structure include only operations and memory accesses specified by `dstStageMask` and `dstAccessMask`.

Both access scopes are limited to only memory accesses to `buffer` in the range defined by `offset` and `size`.

If `buffer` was created with `VK_SHARING_MODE_EXCLUSIVE`, and `srcQueueFamilyIndex` is not equal to `dstQueueFamilyIndex`, this memory barrier defines a queue family ownership transfer operation.

When executed on a queue in the family identified by srcQueueFamilyIndex, this barrier defines a queue family release operation for the specified buffer range, and the second synchronization scope does not apply to this operation. When executed on a queue in the family identified by dstQueueFamilyIndex, this barrier defines a queue family acquire operation for the specified buffer range, and the first synchronization scope does not apply to this operation.

A queue family ownership transfer operation is also defined if the values are not equal, and either is one of the special queue family values reserved for external memory ownership transfers, as described in Queue Family Ownership Transfer. A queue family release operation is defined when dstQueueFamilyIndex is one of those values, and a queue family acquire operation is defined when srcQueueFamilyIndex is one of those values.

Valid Usage

- VUID-VkBufferMemoryBarrier2-srcStageMask-03929
  If the geometryShader feature is not enabled, srcStageMask **must** not contain VK_PIPELINE_STAGE_2_GEOMETRY_SHADER_BIT
- VUID-VkBufferMemoryBarrier2-srcStageMask-03930
  If the tessellationShader feature is not enabled, srcStageMask **must** not contain VK_PIPELINE_STAGE_2_TESSELLATION_CONTROL_SHADER_BIT or VK_PIPELINE_STAGE_2_TESSELLATION_EVALUATION_SHADER_BIT
- VUID-VkBufferMemoryBarrier2-srcAccessMask-03900
  If srcAccessMask includes VK_ACCESS_2_INDIRECT_COMMAND_READ_BIT, srcStageMask **must** include VK_PIPELINE_STAGE_2_DRAW_INDIRECT_BIT, VK_PIPELINE_STAGE_2_ALL_GRAPHICS_BIT, or VK_PIPELINE_STAGE_2_ALL_COMMANDS_BIT
- VUID-VkBufferMemoryBarrier2-srcAccessMask-03901
  If srcAccessMask includes VK_ACCESS_2_INDEX_READ_BIT, srcStageMask **must** include VK_PIPELINE_STAGE_2_INDEX_INPUT_BIT, VK_PIPELINE_STAGE_2_VERTEX_INPUT_BIT, VK_PIPELINE_STAGE_2_ALL_GRAPHICS_BIT, or VK_PIPELINE_STAGE_2_ALL_COMMANDS_BIT
- VUID-VkBufferMemoryBarrier2-srcAccessMask-03902
  If srcAccessMask includes VK_ACCESS_2_VERTEX_ATTRIBUTE_READ_BIT, srcStageMask **must** include VK_PIPELINE_STAGE_2_VERTEX_ATTRIBUTE_INPUT_BIT, VK_PIPELINE_STAGE_2_VERTEX_INPUT_BIT, VK_PIPELINE_STAGE_2_ALL_GRAPHICS_BIT, or VK_PIPELINE_STAGE_2_ALL_COMMANDS_BIT
- VUID-VkBufferMemoryBarrier2-srcAccessMask-03903
  If srcAccessMask includes VK_ACCESS_2_INPUT_ATTACHMENT_READ_BIT, srcStageMask **must** include VK_PIPELINE_STAGE_2_FRAGMENT_SHADER_BIT, VK_PIPELINE_STAGE_2_SUBPASS_SHADER_BIT_HUAWEI, VK_PIPELINE_STAGE_2_ALL_GRAPHICS_BIT, or VK_PIPELINE_STAGE_2_ALL_COMMANDS_BIT
- VUID-VkBufferMemoryBarrier2-srcAccessMask-03904
  If srcAccessMask includes VK_ACCESS_2_UNIFORM_READ_BIT, srcStageMask **must** include VK_PIPELINE_STAGE_2_ALL_GRAPHICS_BIT, VK_PIPELINE_STAGE_2_ALL_COMMANDS_BIT, or one of the VK_PIPELINE_STAGE_*_SHADER_BIT stages
- VUID-VkBufferMemoryBarrier2-srcAccessMask-03905

If srcAccessMask includes VK_ACCESS_2_SHADER_SAMPLED_READ_BIT, srcStageMask **must** include VK_PIPELINE_STAGE_2_ALL_GRAPHICS_BIT, VK_PIPELINE_STAGE_2_ALL_COMMANDS_BIT, or one of the VK_PIPELINE_STAGE_*_SHADER_BIT stages

- VUID-VkBufferMemoryBarrier2-srcAccessMask-03906
  If srcAccessMask includes VK_ACCESS_2_SHADER_STORAGE_READ_BIT, srcStageMask **must** include VK_PIPELINE_STAGE_2_ALL_GRAPHICS_BIT, VK_PIPELINE_STAGE_2_ALL_COMMANDS_BIT, or one of the VK_PIPELINE_STAGE_*_SHADER_BIT stages
- VUID-VkBufferMemoryBarrier2-srcAccessMask-03907
  If srcAccessMask includes VK_ACCESS_2_SHADER_STORAGE_WRITE_BIT, srcStageMask **must** include VK_PIPELINE_STAGE_2_ALL_GRAPHICS_BIT, VK_PIPELINE_STAGE_2_ALL_COMMANDS_BIT, or one of the VK_PIPELINE_STAGE_*_SHADER_BIT stages
- VUID-VkBufferMemoryBarrier2-srcAccessMask-07454
  If srcAccessMask includes VK_ACCESS_2_SHADER_READ_BIT, srcStageMask **must** include VK_PIPELINE_STAGE_2_ALL_GRAPHICS_BIT, VK_PIPELINE_STAGE_2_ALL_COMMANDS_BIT, or one of the VK_PIPELINE_STAGE_*_SHADER_BIT stages
- VUID-VkBufferMemoryBarrier2-srcAccessMask-03909
  If srcAccessMask includes VK_ACCESS_2_SHADER_WRITE_BIT, srcStageMask **must** include VK_PIPELINE_STAGE_2_ALL_GRAPHICS_BIT, VK_PIPELINE_STAGE_2_ALL_COMMANDS_BIT, or one of the VK_PIPELINE_STAGE_*_SHADER_BIT stages
- VUID-VkBufferMemoryBarrier2-srcAccessMask-03910
  If srcAccessMask includes VK_ACCESS_2_COLOR_ATTACHMENT_READ_BIT, srcStageMask **must** include VK_PIPELINE_STAGE_2_COLOR_ATTACHMENT_OUTPUT_BIT VK_PIPELINE_STAGE_2_ALL_GRAPHICS_BIT, or VK_PIPELINE_STAGE_2_ALL_COMMANDS_BIT
- VUID-VkBufferMemoryBarrier2-srcAccessMask-03911
  If srcAccessMask includes VK_ACCESS_2_COLOR_ATTACHMENT_WRITE_BIT, srcStageMask **must** include VK_PIPELINE_STAGE_2_COLOR_ATTACHMENT_OUTPUT_BIT VK_PIPELINE_STAGE_2_ALL_GRAPHICS_BIT, or VK_PIPELINE_STAGE_2_ALL_COMMANDS_BIT
- VUID-VkBufferMemoryBarrier2-srcAccessMask-03912
  If srcAccessMask includes VK_ACCESS_2_DEPTH_STENCIL_ATTACHMENT_READ_BIT, srcStageMask **must** include VK_PIPELINE_STAGE_2_EARLY_FRAGMENT_TESTS_BIT, VK_PIPELINE_STAGE_2_LATE_FRAGMENT_TESTS_BIT, VK_PIPELINE_STAGE_2_ALL_GRAPHICS_BIT, or VK_PIPELINE_STAGE_2_ALL_COMMANDS_BIT
- VUID-VkBufferMemoryBarrier2-srcAccessMask-03913
  If srcAccessMask includes VK_ACCESS_2_DEPTH_STENCIL_ATTACHMENT_WRITE_BIT, srcStageMask **must** include VK_PIPELINE_STAGE_2_EARLY_FRAGMENT_TESTS_BIT, VK_PIPELINE_STAGE_2_LATE_FRAGMENT_TESTS_BIT, VK_PIPELINE_STAGE_2_ALL_GRAPHICS_BIT, or VK_PIPELINE_STAGE_2_ALL_COMMANDS_BIT
- VUID-VkBufferMemoryBarrier2-srcAccessMask-03914
  If srcAccessMask includes VK_ACCESS_2_TRANSFER_READ_BIT, srcStageMask **must** include VK_PIPELINE_STAGE_2_COPY_BIT, VK_PIPELINE_STAGE_2_BLIT_BIT, VK_PIPELINE_STAGE_2_RESOLVE_BIT, VK_PIPELINE_STAGE_2_ALL_TRANSFER_BIT, or VK_PIPELINE_STAGE_2_ALL_COMMANDS_BIT
- VUID-VkBufferMemoryBarrier2-srcAccessMask-03915
  If srcAccessMask includes VK_ACCESS_2_TRANSFER_WRITE_BIT, srcStageMask **must** include

VK_PIPELINE_STAGE_2_COPY_BIT, VK_PIPELINE_STAGE_2_BLIT_BIT, VK_PIPELINE_STAGE_2_RESOLVE_BIT, VK_PIPELINE_STAGE_2_CLEAR_BIT, VK_PIPELINE_STAGE_2_ALL_TRANSFER_BIT, VK_PIPELINE_STAGE_2_ALL_COMMANDS_BIT

- VUID-VkBufferMemoryBarrier2-srcAccessMask-03916
  If srcAccessMask includes VK_ACCESS_2_HOST_READ_BIT, srcStageMask **must** include VK_PIPELINE_STAGE_2_HOST_BIT
- VUID-VkBufferMemoryBarrier2-srcAccessMask-03917
  If srcAccessMask includes VK_ACCESS_2_HOST_WRITE_BIT, srcStageMask **must** include VK_PIPELINE_STAGE_2_HOST_BIT
- VUID-VkBufferMemoryBarrier2-dstStageMask-03929
  If the geometryShader feature is not enabled, dstStageMask **must** not contain VK_PIPELINE_STAGE_2_GEOMETRY_SHADER_BIT
- VUID-VkBufferMemoryBarrier2-dstStageMask-03930
  If the tessellationShader feature is not enabled, dstStageMask **must** not contain VK_PIPELINE_STAGE_2_TESSELLATION_CONTROL_SHADER_BIT or VK_PIPELINE_STAGE_2_TESSELLATION_EVALUATION_SHADER_BIT
- VUID-VkBufferMemoryBarrier2-dstAccessMask-03900
  If dstAccessMask includes VK_ACCESS_2_INDIRECT_COMMAND_READ_BIT, dstStageMask **must** include VK_PIPELINE_STAGE_2_DRAW_INDIRECT_BIT, VK_PIPELINE_STAGE_2_ALL_GRAPHICS_BIT, or VK_PIPELINE_STAGE_2_ALL_COMMANDS_BIT
- VUID-VkBufferMemoryBarrier2-dstAccessMask-03901
  If dstAccessMask includes VK_ACCESS_2_INDEX_READ_BIT, dstStageMask **must** include VK_PIPELINE_STAGE_2_INDEX_INPUT_BIT, VK_PIPELINE_STAGE_2_VERTEX_INPUT_BIT, VK_PIPELINE_STAGE_2_ALL_GRAPHICS_BIT, or VK_PIPELINE_STAGE_2_ALL_COMMANDS_BIT
- VUID-VkBufferMemoryBarrier2-dstAccessMask-03902
  If dstAccessMask includes VK_ACCESS_2_VERTEX_ATTRIBUTE_READ_BIT, dstStageMask **must** include VK_PIPELINE_STAGE_2_VERTEX_ATTRIBUTE_INPUT_BIT, VK_PIPELINE_STAGE_2_VERTEX_INPUT_BIT, VK_PIPELINE_STAGE_2_ALL_GRAPHICS_BIT, or VK_PIPELINE_STAGE_2_ALL_COMMANDS_BIT
- VUID-VkBufferMemoryBarrier2-dstAccessMask-03903
  If dstAccessMask includes VK_ACCESS_2_INPUT_ATTACHMENT_READ_BIT, dstStageMask **must** include VK_PIPELINE_STAGE_2_FRAGMENT_SHADER_BIT, VK_PIPELINE_STAGE_2_SUBPASS_SHADER_BIT_HUAWEI, VK_PIPELINE_STAGE_2_ALL_GRAPHICS_BIT, or VK_PIPELINE_STAGE_2_ALL_COMMANDS_BIT
- VUID-VkBufferMemoryBarrier2-dstAccessMask-03904
  If dstAccessMask includes VK_ACCESS_2_UNIFORM_READ_BIT, dstStageMask **must** include VK_PIPELINE_STAGE_2_ALL_GRAPHICS_BIT, VK_PIPELINE_STAGE_2_ALL_COMMANDS_BIT, or one of the VK_PIPELINE_STAGE_*_SHADER_BIT stages
- VUID-VkBufferMemoryBarrier2-dstAccessMask-03905
  If dstAccessMask includes VK_ACCESS_2_SHADER_SAMPLED_READ_BIT, dstStageMask **must** include VK_PIPELINE_STAGE_2_ALL_GRAPHICS_BIT, VK_PIPELINE_STAGE_2_ALL_COMMANDS_BIT, or one of the VK_PIPELINE_STAGE_*_SHADER_BIT stages
- VUID-VkBufferMemoryBarrier2-dstAccessMask-03906

If dstAccessMask includes VK_ACCESS_2_SHADER_STORAGE_READ_BIT, dstStageMask **must** include VK_PIPELINE_STAGE_2_ALL_GRAPHICS_BIT, VK_PIPELINE_STAGE_2_ALL_COMMANDS_BIT, or one of the VK_PIPELINE_STAGE_*_SHADER_BIT stages

- VUID-VkBufferMemoryBarrier2-dstAccessMask-03907
  If dstAccessMask includes VK_ACCESS_2_SHADER_STORAGE_WRITE_BIT, dstStageMask **must** include VK_PIPELINE_STAGE_2_ALL_GRAPHICS_BIT, VK_PIPELINE_STAGE_2_ALL_COMMANDS_BIT, or one of the VK_PIPELINE_STAGE_*_SHADER_BIT stages
- VUID-VkBufferMemoryBarrier2-dstAccessMask-07454
  If dstAccessMask includes VK_ACCESS_2_SHADER_READ_BIT, dstStageMask **must** include VK_PIPELINE_STAGE_2_ALL_GRAPHICS_BIT, VK_PIPELINE_STAGE_2_ALL_COMMANDS_BIT, or one of the VK_PIPELINE_STAGE_*_SHADER_BIT stages
- VUID-VkBufferMemoryBarrier2-dstAccessMask-03909
  If dstAccessMask includes VK_ACCESS_2_SHADER_WRITE_BIT, dstStageMask **must** include VK_PIPELINE_STAGE_2_ALL_GRAPHICS_BIT, VK_PIPELINE_STAGE_2_ALL_COMMANDS_BIT, or one of the VK_PIPELINE_STAGE_*_SHADER_BIT stages
- VUID-VkBufferMemoryBarrier2-dstAccessMask-03910
  If dstAccessMask includes VK_ACCESS_2_COLOR_ATTACHMENT_READ_BIT, dstStageMask **must** include VK_PIPELINE_STAGE_2_COLOR_ATTACHMENT_OUTPUT_BIT VK_PIPELINE_STAGE_2_ALL_GRAPHICS_BIT, or VK_PIPELINE_STAGE_2_ALL_COMMANDS_BIT
- VUID-VkBufferMemoryBarrier2-dstAccessMask-03911
  If dstAccessMask includes VK_ACCESS_2_COLOR_ATTACHMENT_WRITE_BIT, dstStageMask **must** include VK_PIPELINE_STAGE_2_COLOR_ATTACHMENT_OUTPUT_BIT VK_PIPELINE_STAGE_2_ALL_GRAPHICS_BIT, or VK_PIPELINE_STAGE_2_ALL_COMMANDS_BIT
- VUID-VkBufferMemoryBarrier2-dstAccessMask-03912
  If dstAccessMask includes VK_ACCESS_2_DEPTH_STENCIL_ATTACHMENT_READ_BIT, dstStageMask **must** include VK_PIPELINE_STAGE_2_EARLY_FRAGMENT_TESTS_BIT, VK_PIPELINE_STAGE_2_LATE_FRAGMENT_TESTS_BIT, VK_PIPELINE_STAGE_2_ALL_GRAPHICS_BIT, or VK_PIPELINE_STAGE_2_ALL_COMMANDS_BIT
- VUID-VkBufferMemoryBarrier2-dstAccessMask-03913
  If dstAccessMask includes VK_ACCESS_2_DEPTH_STENCIL_ATTACHMENT_WRITE_BIT, dstStageMask **must** include VK_PIPELINE_STAGE_2_EARLY_FRAGMENT_TESTS_BIT, VK_PIPELINE_STAGE_2_LATE_FRAGMENT_TESTS_BIT, VK_PIPELINE_STAGE_2_ALL_GRAPHICS_BIT, or VK_PIPELINE_STAGE_2_ALL_COMMANDS_BIT
- VUID-VkBufferMemoryBarrier2-dstAccessMask-03914
  If dstAccessMask includes VK_ACCESS_2_TRANSFER_READ_BIT, dstStageMask **must** include VK_PIPELINE_STAGE_2_COPY_BIT, VK_PIPELINE_STAGE_2_BLIT_BIT, VK_PIPELINE_STAGE_2_RESOLVE_BIT, VK_PIPELINE_STAGE_2_ALL_TRANSFER_BIT, or VK_PIPELINE_STAGE_2_ALL_COMMANDS_BIT
- VUID-VkBufferMemoryBarrier2-dstAccessMask-03915
  If dstAccessMask includes VK_ACCESS_2_TRANSFER_WRITE_BIT, dstStageMask **must** include VK_PIPELINE_STAGE_2_COPY_BIT, VK_PIPELINE_STAGE_2_BLIT_BIT, VK_PIPELINE_STAGE_2_RESOLVE_BIT, VK_PIPELINE_STAGE_2_CLEAR_BIT, VK_PIPELINE_STAGE_2_ALL_TRANSFER_BIT, VK_PIPELINE_STAGE_2_ALL_COMMANDS_BIT
- VUID-VkBufferMemoryBarrier2-dstAccessMask-03916

If dstAccessMask includes VK_ACCESS_2_HOST_READ_BIT, dstStageMask **must** include VK_PIPELINE_STAGE_2_HOST_BIT

- VUID-VkBufferMemoryBarrier2-dstAccessMask-03917
  If dstAccessMask includes VK_ACCESS_2_HOST_WRITE_BIT, dstStageMask **must** include VK_PIPELINE_STAGE_2_HOST_BIT
- VUID-VkBufferMemoryBarrier2-offset-01187
  offset **must** be less than the size of buffer
- VUID-VkBufferMemoryBarrier2-size-01188
  If size is not equal to VK_WHOLE_SIZE, size **must** be greater than 0
- VUID-VkBufferMemoryBarrier2-size-01189
  If size is not equal to VK_WHOLE_SIZE, size **must** be less than or equal to than the size of buffer minus offset
- VUID-VkBufferMemoryBarrier2-buffer-01931
  If buffer is non-sparse then it **must** be bound completely and contiguously to a single VkDeviceMemory object
- VUID-VkBufferMemoryBarrier2-buffer-09095
  If buffer was created with a sharing mode of VK_SHARING_MODE_EXCLUSIVE, and srcQueueFamilyIndex and dstQueueFamilyIndex are not equal, srcQueueFamilyIndex **must** be VK_QUEUE_FAMILY_EXTERNAL, or a valid queue family
- VUID-VkBufferMemoryBarrier2-buffer-09096
  If buffer was created with a sharing mode of VK_SHARING_MODE_EXCLUSIVE, and srcQueueFamilyIndex and dstQueueFamilyIndex are not equal, dstQueueFamilyIndex **must** be VK_QUEUE_FAMILY_EXTERNAL, or a valid queue family
- VUID-VkBufferMemoryBarrier2-srcQueueFamilyIndex-04087
  If srcQueueFamilyIndex is not equal to dstQueueFamilyIndex, at least one of srcQueueFamilyIndex or dstQueueFamilyIndex **must** not be VK_QUEUE_FAMILY_EXTERNAL
- VUID-VkBufferMemoryBarrier2-None-09097
  If the value of VkApplicationInfo::apiVersion used to create the VkInstance is not greater than or equal to Version 1.1, srcQueueFamilyIndex **must** not be VK_QUEUE_FAMILY_EXTERNAL
- VUID-VkBufferMemoryBarrier2-None-09098
  If the value of VkApplicationInfo::apiVersion used to create the VkInstance is not greater than or equal to Version 1.1, dstQueueFamilyIndex **must** not be VK_QUEUE_FAMILY_EXTERNAL
- VUID-VkBufferMemoryBarrier2-srcStageMask-03851
  If either srcStageMask or dstStageMask includes VK_PIPELINE_STAGE_2_HOST_BIT, srcQueueFamilyIndex and dstQueueFamilyIndex **must** be equal

Valid Usage (Implicit)

- VUID-VkBufferMemoryBarrier2-sType-sType
  sType **must** be VK_STRUCTURE_TYPE_BUFFER_MEMORY_BARRIER_2
- VUID-VkBufferMemoryBarrier2-pNext-pNext
  pNext **must** be NULL

- VUID-VkBufferMemoryBarrier2-srcStageMask-parameter
  `srcStageMask` **must** be a valid combination of VkPipelineStageFlagBits2 values
- VUID-VkBufferMemoryBarrier2-srcAccessMask-parameter
  `srcAccessMask` **must** be a valid combination of VkAccessFlagBits2 values
- VUID-VkBufferMemoryBarrier2-dstStageMask-parameter
  `dstStageMask` **must** be a valid combination of VkPipelineStageFlagBits2 values
- VUID-VkBufferMemoryBarrier2-dstAccessMask-parameter
  `dstAccessMask` **must** be a valid combination of VkAccessFlagBits2 values
- VUID-VkBufferMemoryBarrier2-buffer-parameter
  `buffer` **must** be a valid VkBuffer handle

The `VkBufferMemoryBarrier` structure is defined as:

```
// Provided by VK_VERSION_1_0
typedef struct VkBufferMemoryBarrier {
    VkStructureType    sType;
    const void*        pNext;
    VkAccessFlags      srcAccessMask;
    VkAccessFlags      dstAccessMask;
    uint32_t           srcQueueFamilyIndex;
    uint32_t           dstQueueFamilyIndex;
    VkBuffer           buffer;
    VkDeviceSize       offset;
    VkDeviceSize       size;
} VkBufferMemoryBarrier;
```

- `sType` is a VkStructureType value identifying this structure.
- `pNext` is `NULL` or a pointer to a structure extending this structure.
- `srcAccessMask` is a bitmask of VkAccessFlagBits specifying a source access mask.
- `dstAccessMask` is a bitmask of VkAccessFlagBits specifying a destination access mask.
- `srcQueueFamilyIndex` is the source queue family for a queue family ownership transfer.
- `dstQueueFamilyIndex` is the destination queue family for a queue family ownership transfer.
- `buffer` is a handle to the buffer whose backing memory is affected by the barrier.
- `offset` is an offset in bytes into the backing memory for `buffer`; this is relative to the base offset as bound to the buffer (see vkBindBufferMemory).
- `size` is a size in bytes of the affected area of backing memory for `buffer`, or `VK_WHOLE_SIZE` to use the range from `offset` to the end of the buffer.

The first access scope is limited to access to memory through the specified buffer range, via access types in the source access mask specified by `srcAccessMask`. If `srcAccessMask` includes `VK_ACCESS_HOST_WRITE_BIT`, a memory domain operation is performed where available memory in the host domain is also made available to the device domain.

The second access scope is limited to access to memory through the specified buffer range, via access types in the destination access mask specified by dstAccessMask. If dstAccessMask includes VK_ACCESS_HOST_WRITE_BIT or VK_ACCESS_HOST_READ_BIT, a memory domain operation is performed where available memory in the device domain is also made available to the host domain.

NOTE	When VK_MEMORY_PROPERTY_HOST_COHERENT_BIT is used, available memory in host domain is automatically made visible to host domain, and any host write is automatically made available to host domain.

If srcQueueFamilyIndex is not equal to dstQueueFamilyIndex, and srcQueueFamilyIndex is equal to the current queue family, then the memory barrier defines a queue family release operation for the specified buffer range, and the second synchronization scope of the calling command does not apply to this operation.

If dstQueueFamilyIndex is not equal to srcQueueFamilyIndex, and dstQueueFamilyIndex is equal to the current queue family, then the memory barrier defines a queue family acquire operation for the specified buffer range, and the first synchronization scope of the calling command does not apply to this operation.

Valid Usage

- VUID-VkBufferMemoryBarrier-offset-01187
  offset **must** be less than the size of buffer
- VUID-VkBufferMemoryBarrier-size-01188
  If size is not equal to VK_WHOLE_SIZE, size **must** be greater than 0
- VUID-VkBufferMemoryBarrier-size-01189
  If size is not equal to VK_WHOLE_SIZE, size **must** be less than or equal to than the size of buffer minus offset
- VUID-VkBufferMemoryBarrier-buffer-01931
  If buffer is non-sparse then it **must** be bound completely and contiguously to a single VkDeviceMemory object
- VUID-VkBufferMemoryBarrier-buffer-09095
  If buffer was created with a sharing mode of VK_SHARING_MODE_EXCLUSIVE, and srcQueueFamilyIndex and dstQueueFamilyIndex are not equal, srcQueueFamilyIndex **must** be VK_QUEUE_FAMILY_EXTERNAL, or a valid queue family
- VUID-VkBufferMemoryBarrier-buffer-09096
  If buffer was created with a sharing mode of VK_SHARING_MODE_EXCLUSIVE, and srcQueueFamilyIndex and dstQueueFamilyIndex are not equal, dstQueueFamilyIndex **must** be VK_QUEUE_FAMILY_EXTERNAL, or a valid queue family
- VUID-VkBufferMemoryBarrier-srcQueueFamilyIndex-04087
  If srcQueueFamilyIndex is not equal to dstQueueFamilyIndex, at least one of srcQueueFamilyIndex or dstQueueFamilyIndex **must** not be VK_QUEUE_FAMILY_EXTERNAL
- VUID-VkBufferMemoryBarrier-None-09097
  If the value of VkApplicationInfo::apiVersion used to create the VkInstance is not greater than or equal to Version 1.1, srcQueueFamilyIndex **must** not be VK_QUEUE_FAMILY_EXTERNAL

- VUID-VkBufferMemoryBarrier-None-09098
  If the value of VkApplicationInfo::apiVersion used to create the VkInstance is not greater than or equal to Version 1.1, dstQueueFamilyIndex **must** not be VK_QUEUE_FAMILY_EXTERNAL
- VUID-VkBufferMemoryBarrier-None-09049
  If buffer was created with a sharing mode of VK_SHARING_MODE_CONCURRENT, at least one of srcQueueFamilyIndex and dstQueueFamilyIndex **must** be VK_QUEUE_FAMILY_IGNORED
- VUID-VkBufferMemoryBarrier-None-09050
  If buffer was created with a sharing mode of VK_SHARING_MODE_CONCURRENT, srcQueueFamilyIndex **must** be VK_QUEUE_FAMILY_IGNORED or VK_QUEUE_FAMILY_EXTERNAL
- VUID-VkBufferMemoryBarrier-None-09051
  If buffer was created with a sharing mode of VK_SHARING_MODE_CONCURRENT, dstQueueFamilyIndex **must** be VK_QUEUE_FAMILY_IGNORED or VK_QUEUE_FAMILY_EXTERNAL

Valid Usage (Implicit)

- VUID-VkBufferMemoryBarrier-sType-sType
  sType **must** be VK_STRUCTURE_TYPE_BUFFER_MEMORY_BARRIER
- VUID-VkBufferMemoryBarrier-pNext-pNext
  pNext **must** be NULL
- VUID-VkBufferMemoryBarrier-buffer-parameter
  buffer **must** be a valid VkBuffer handle

VK_WHOLE_SIZE is a special value indicating that the entire remaining length of a buffer following a given offset should be used. It **can** be specified for VkBufferMemoryBarrier::size and other structures.

```
#define VK_WHOLE_SIZE                   (~0ULL)
```

7.7.3. Image Memory Barriers

Image memory barriers only apply to memory accesses involving a specific image subresource range. That is, a memory dependency formed from an image memory barrier is scoped to access via the specified image subresource range. Image memory barriers **can** also be used to define image layout transitions or a queue family ownership transfer for the specified image subresource range.

The VkImageMemoryBarrier2 structure is defined as:

```
// Provided by VK_VERSION_1_3
typedef struct VkImageMemoryBarrier2 {
    VkStructureType            sType;
    const void*                pNext;
    VkPipelineStageFlags2      srcStageMask;
    VkAccessFlags2             srcAccessMask;
    VkPipelineStageFlags2      dstStageMask;
    VkAccessFlags2             dstAccessMask;
    VkImageLayout              oldLayout;
    VkImageLayout              newLayout;
    uint32_t                   srcQueueFamilyIndex;
    uint32_t                   dstQueueFamilyIndex;
    VkImage                    image;
    VkImageSubresourceRange    subresourceRange;
} VkImageMemoryBarrier2;
```

- `sType` is a VkStructureType value identifying this structure.
- `pNext` is `NULL` or a pointer to a structure extending this structure.
- `srcStageMask` is a VkPipelineStageFlags2 mask of pipeline stages to be included in the first synchronization scope.
- `srcAccessMask` is a VkAccessFlags2 mask of access flags to be included in the first access scope.
- `dstStageMask` is a VkPipelineStageFlags2 mask of pipeline stages to be included in the second synchronization scope.
- `dstAccessMask` is a VkAccessFlags2 mask of access flags to be included in the second access scope.
- `oldLayout` is the old layout in an image layout transition.
- `newLayout` is the new layout in an image layout transition.
- `srcQueueFamilyIndex` is the source queue family for a queue family ownership transfer.
- `dstQueueFamilyIndex` is the destination queue family for a queue family ownership transfer.
- `image` is a handle to the image affected by this barrier.
- `subresourceRange` describes the image subresource range within `image` that is affected by this barrier.

This structure defines a memory dependency limited to an image subresource range, and **can** define a queue family ownership transfer operation and image layout transition for that subresource range.

The first synchronization scope and access scope described by this structure include only operations and memory accesses specified by `srcStageMask` and `srcAccessMask`.

The second synchronization scope and access scope described by this structure include only operations and memory accesses specified by `dstStageMask` and `dstAccessMask`.

Both access scopes are limited to only memory accesses to `image` in the subresource range defined by `subresourceRange`.

If image was created with VK_SHARING_MODE_EXCLUSIVE, and srcQueueFamilyIndex is not equal to dstQueueFamilyIndex, this memory barrier defines a queue family ownership transfer operation. When executed on a queue in the family identified by srcQueueFamilyIndex, this barrier defines a queue family release operation for the specified image subresource range, and the second synchronization scope does not apply to this operation. When executed on a queue in the family identified by dstQueueFamilyIndex, this barrier defines a queue family acquire operation for the specified image subresource range, and the first synchronization, the first synchronization scope does not apply to this operation.

A queue family ownership transfer operation is also defined if the values are not equal, and either is one of the special queue family values reserved for external memory ownership transfers, as described in Queue Family Ownership Transfer. A queue family release operation is defined when dstQueueFamilyIndex is one of those values, and a queue family acquire operation is defined when srcQueueFamilyIndex is one of those values.

If oldLayout is not equal to newLayout, then the memory barrier defines an image layout transition for the specified image subresource range. If this memory barrier defines a queue family ownership transfer operation, the layout transition is only executed once between the queues.

NOTE	When the old and new layout are equal, the layout values are ignored - data is preserved no matter what values are specified, or what layout the image is currently in.

If image has a multi-planar format and the image is *disjoint*, then including VK_IMAGE_ASPECT_COLOR_BIT in the aspectMask member of subresourceRange is equivalent to including VK_IMAGE_ASPECT_PLANE_0_BIT, VK_IMAGE_ASPECT_PLANE_1_BIT, and (for three-plane formats only) VK_IMAGE_ASPECT_PLANE_2_BIT.

Valid Usage

- VUID-VkImageMemoryBarrier2-srcStageMask-03929
  If the geometryShader feature is not enabled, srcStageMask **must** not contain VK_PIPELINE_STAGE_2_GEOMETRY_SHADER_BIT
- VUID-VkImageMemoryBarrier2-srcStageMask-03930
  If the tessellationShader feature is not enabled, srcStageMask **must** not contain VK_PIPELINE_STAGE_2_TESSELLATION_CONTROL_SHADER_BIT or VK_PIPELINE_STAGE_2_TESSELLATION_EVALUATION_SHADER_BIT
- VUID-VkImageMemoryBarrier2-srcAccessMask-03900
  If srcAccessMask includes VK_ACCESS_2_INDIRECT_COMMAND_READ_BIT, srcStageMask **must** include VK_PIPELINE_STAGE_2_DRAW_INDIRECT_BIT, VK_PIPELINE_STAGE_2_ALL_GRAPHICS_BIT, or VK_PIPELINE_STAGE_2_ALL_COMMANDS_BIT
- VUID-VkImageMemoryBarrier2-srcAccessMask-03901
  If srcAccessMask includes VK_ACCESS_2_INDEX_READ_BIT, srcStageMask **must** include VK_PIPELINE_STAGE_2_INDEX_INPUT_BIT, VK_PIPELINE_STAGE_2_VERTEX_INPUT_BIT, VK_PIPELINE_STAGE_2_ALL_GRAPHICS_BIT, or VK_PIPELINE_STAGE_2_ALL_COMMANDS_BIT
- VUID-VkImageMemoryBarrier2-srcAccessMask-03902

If srcAccessMask includes VK_ACCESS_2_VERTEX_ATTRIBUTE_READ_BIT, srcStageMask **must** include VK_PIPELINE_STAGE_2_VERTEX_ATTRIBUTE_INPUT_BIT, VK_PIPELINE_STAGE_2_VERTEX_INPUT_BIT, VK_PIPELINE_STAGE_2_ALL_GRAPHICS_BIT, or VK_PIPELINE_STAGE_2_ALL_COMMANDS_BIT

- VUID-VkImageMemoryBarrier2-srcAccessMask-03903
  If srcAccessMask includes VK_ACCESS_2_INPUT_ATTACHMENT_READ_BIT, srcStageMask **must** include VK_PIPELINE_STAGE_2_FRAGMENT_SHADER_BIT, VK_PIPELINE_STAGE_2_SUBPASS_SHADER_BIT_HUAWEI, VK_PIPELINE_STAGE_2_ALL_GRAPHICS_BIT, or VK_PIPELINE_STAGE_2_ALL_COMMANDS_BIT
- VUID-VkImageMemoryBarrier2-srcAccessMask-03904
  If srcAccessMask includes VK_ACCESS_2_UNIFORM_READ_BIT, srcStageMask **must** include VK_PIPELINE_STAGE_2_ALL_GRAPHICS_BIT, VK_PIPELINE_STAGE_2_ALL_COMMANDS_BIT, or one of the VK_PIPELINE_STAGE_*_SHADER_BIT stages
- VUID-VkImageMemoryBarrier2-srcAccessMask-03905
  If srcAccessMask includes VK_ACCESS_2_SHADER_SAMPLED_READ_BIT, srcStageMask **must** include VK_PIPELINE_STAGE_2_ALL_GRAPHICS_BIT, VK_PIPELINE_STAGE_2_ALL_COMMANDS_BIT, or one of the VK_PIPELINE_STAGE_*_SHADER_BIT stages
- VUID-VkImageMemoryBarrier2-srcAccessMask-03906
  If srcAccessMask includes VK_ACCESS_2_SHADER_STORAGE_READ_BIT, srcStageMask **must** include VK_PIPELINE_STAGE_2_ALL_GRAPHICS_BIT, VK_PIPELINE_STAGE_2_ALL_COMMANDS_BIT, or one of the VK_PIPELINE_STAGE_*_SHADER_BIT stages
- VUID-VkImageMemoryBarrier2-srcAccessMask-03907
  If srcAccessMask includes VK_ACCESS_2_SHADER_STORAGE_WRITE_BIT, srcStageMask **must** include VK_PIPELINE_STAGE_2_ALL_GRAPHICS_BIT, VK_PIPELINE_STAGE_2_ALL_COMMANDS_BIT, or one of the VK_PIPELINE_STAGE_*_SHADER_BIT stages
- VUID-VkImageMemoryBarrier2-srcAccessMask-07454
  If srcAccessMask includes VK_ACCESS_2_SHADER_READ_BIT, srcStageMask **must** include VK_PIPELINE_STAGE_2_ALL_GRAPHICS_BIT, VK_PIPELINE_STAGE_2_ALL_COMMANDS_BIT, or one of the VK_PIPELINE_STAGE_*_SHADER_BIT stages
- VUID-VkImageMemoryBarrier2-srcAccessMask-03909
  If srcAccessMask includes VK_ACCESS_2_SHADER_WRITE_BIT, srcStageMask **must** include VK_PIPELINE_STAGE_2_ALL_GRAPHICS_BIT, VK_PIPELINE_STAGE_2_ALL_COMMANDS_BIT, or one of the VK_PIPELINE_STAGE_*_SHADER_BIT stages
- VUID-VkImageMemoryBarrier2-srcAccessMask-03910
  If srcAccessMask includes VK_ACCESS_2_COLOR_ATTACHMENT_READ_BIT, srcStageMask **must** include VK_PIPELINE_STAGE_2_COLOR_ATTACHMENT_OUTPUT_BIT VK_PIPELINE_STAGE_2_ALL_GRAPHICS_BIT, or VK_PIPELINE_STAGE_2_ALL_COMMANDS_BIT
- VUID-VkImageMemoryBarrier2-srcAccessMask-03911
  If srcAccessMask includes VK_ACCESS_2_COLOR_ATTACHMENT_WRITE_BIT, srcStageMask **must** include VK_PIPELINE_STAGE_2_COLOR_ATTACHMENT_OUTPUT_BIT VK_PIPELINE_STAGE_2_ALL_GRAPHICS_BIT, or VK_PIPELINE_STAGE_2_ALL_COMMANDS_BIT
- VUID-VkImageMemoryBarrier2-srcAccessMask-03912
  If srcAccessMask includes VK_ACCESS_2_DEPTH_STENCIL_ATTACHMENT_READ_BIT, srcStageMask **must** include VK_PIPELINE_STAGE_2_EARLY_FRAGMENT_TESTS_BIT,

VK_PIPELINE_STAGE_2_LATE_FRAGMENT_TESTS_BIT, VK_PIPELINE_STAGE_2_ALL_GRAPHICS_BIT, or VK_PIPELINE_STAGE_2_ALL_COMMANDS_BIT

- VUID-VkImageMemoryBarrier2-srcAccessMask-03913
  If srcAccessMask includes VK_ACCESS_2_DEPTH_STENCIL_ATTACHMENT_WRITE_BIT, srcStageMask **must** include VK_PIPELINE_STAGE_2_EARLY_FRAGMENT_TESTS_BIT, VK_PIPELINE_STAGE_2_LATE_FRAGMENT_TESTS_BIT, VK_PIPELINE_STAGE_2_ALL_GRAPHICS_BIT, or VK_PIPELINE_STAGE_2_ALL_COMMANDS_BIT
- VUID-VkImageMemoryBarrier2-srcAccessMask-03914
  If srcAccessMask includes VK_ACCESS_2_TRANSFER_READ_BIT, srcStageMask **must** include VK_PIPELINE_STAGE_2_COPY_BIT, VK_PIPELINE_STAGE_2_BLIT_BIT, VK_PIPELINE_STAGE_2_RESOLVE_BIT, VK_PIPELINE_STAGE_2_ALL_TRANSFER_BIT, or VK_PIPELINE_STAGE_2_ALL_COMMANDS_BIT
- VUID-VkImageMemoryBarrier2-srcAccessMask-03915
  If srcAccessMask includes VK_ACCESS_2_TRANSFER_WRITE_BIT, srcStageMask **must** include VK_PIPELINE_STAGE_2_COPY_BIT, VK_PIPELINE_STAGE_2_BLIT_BIT, VK_PIPELINE_STAGE_2_RESOLVE_BIT, VK_PIPELINE_STAGE_2_CLEAR_BIT, VK_PIPELINE_STAGE_2_ALL_TRANSFER_BIT, VK_PIPELINE_STAGE_2_ALL_COMMANDS_BIT
- VUID-VkImageMemoryBarrier2-srcAccessMask-03916
  If srcAccessMask includes VK_ACCESS_2_HOST_READ_BIT, srcStageMask **must** include VK_PIPELINE_STAGE_2_HOST_BIT
- VUID-VkImageMemoryBarrier2-srcAccessMask-03917
  If srcAccessMask includes VK_ACCESS_2_HOST_WRITE_BIT, srcStageMask **must** include VK_PIPELINE_STAGE_2_HOST_BIT
- VUID-VkImageMemoryBarrier2-dstStageMask-03929
  If the geometryShader feature is not enabled, dstStageMask **must** not contain VK_PIPELINE_STAGE_2_GEOMETRY_SHADER_BIT
- VUID-VkImageMemoryBarrier2-dstStageMask-03930
  If the tessellationShader feature is not enabled, dstStageMask **must** not contain VK_PIPELINE_STAGE_2_TESSELLATION_CONTROL_SHADER_BIT or VK_PIPELINE_STAGE_2_TESSELLATION_EVALUATION_SHADER_BIT
- VUID-VkImageMemoryBarrier2-dstAccessMask-03900
  If dstAccessMask includes VK_ACCESS_2_INDIRECT_COMMAND_READ_BIT, dstStageMask **must** include VK_PIPELINE_STAGE_2_DRAW_INDIRECT_BIT, VK_PIPELINE_STAGE_2_ALL_GRAPHICS_BIT, or VK_PIPELINE_STAGE_2_ALL_COMMANDS_BIT
- VUID-VkImageMemoryBarrier2-dstAccessMask-03901
  If dstAccessMask includes VK_ACCESS_2_INDEX_READ_BIT, dstStageMask **must** include VK_PIPELINE_STAGE_2_INDEX_INPUT_BIT, VK_PIPELINE_STAGE_2_VERTEX_INPUT_BIT, VK_PIPELINE_STAGE_2_ALL_GRAPHICS_BIT, or VK_PIPELINE_STAGE_2_ALL_COMMANDS_BIT
- VUID-VkImageMemoryBarrier2-dstAccessMask-03902
  If dstAccessMask includes VK_ACCESS_2_VERTEX_ATTRIBUTE_READ_BIT, dstStageMask **must** include VK_PIPELINE_STAGE_2_VERTEX_ATTRIBUTE_INPUT_BIT, VK_PIPELINE_STAGE_2_VERTEX_INPUT_BIT, VK_PIPELINE_STAGE_2_ALL_GRAPHICS_BIT, or VK_PIPELINE_STAGE_2_ALL_COMMANDS_BIT

- VUID-VkImageMemoryBarrier2-dstAccessMask-03903
  If dstAccessMask includes VK_ACCESS_2_INPUT_ATTACHMENT_READ_BIT, dstStageMask **must** include VK_PIPELINE_STAGE_2_FRAGMENT_SHADER_BIT, VK_PIPELINE_STAGE_2_SUBPASS_SHADER_BIT_HUAWEI, VK_PIPELINE_STAGE_2_ALL_GRAPHICS_BIT, or VK_PIPELINE_STAGE_2_ALL_COMMANDS_BIT
- VUID-VkImageMemoryBarrier2-dstAccessMask-03904
  If dstAccessMask includes VK_ACCESS_2_UNIFORM_READ_BIT, dstStageMask **must** include VK_PIPELINE_STAGE_2_ALL_GRAPHICS_BIT, VK_PIPELINE_STAGE_2_ALL_COMMANDS_BIT, or one of the VK_PIPELINE_STAGE_*_SHADER_BIT stages
- VUID-VkImageMemoryBarrier2-dstAccessMask-03905
  If dstAccessMask includes VK_ACCESS_2_SHADER_SAMPLED_READ_BIT, dstStageMask **must** include VK_PIPELINE_STAGE_2_ALL_GRAPHICS_BIT, VK_PIPELINE_STAGE_2_ALL_COMMANDS_BIT, or one of the VK_PIPELINE_STAGE_*_SHADER_BIT stages
- VUID-VkImageMemoryBarrier2-dstAccessMask-03906
  If dstAccessMask includes VK_ACCESS_2_SHADER_STORAGE_READ_BIT, dstStageMask **must** include VK_PIPELINE_STAGE_2_ALL_GRAPHICS_BIT, VK_PIPELINE_STAGE_2_ALL_COMMANDS_BIT, or one of the VK_PIPELINE_STAGE_*_SHADER_BIT stages
- VUID-VkImageMemoryBarrier2-dstAccessMask-03907
  If dstAccessMask includes VK_ACCESS_2_SHADER_STORAGE_WRITE_BIT, dstStageMask **must** include VK_PIPELINE_STAGE_2_ALL_GRAPHICS_BIT, VK_PIPELINE_STAGE_2_ALL_COMMANDS_BIT, or one of the VK_PIPELINE_STAGE_*_SHADER_BIT stages
- VUID-VkImageMemoryBarrier2-dstAccessMask-07454
  If dstAccessMask includes VK_ACCESS_2_SHADER_READ_BIT, dstStageMask **must** include VK_PIPELINE_STAGE_2_ALL_GRAPHICS_BIT, VK_PIPELINE_STAGE_2_ALL_COMMANDS_BIT, or one of the VK_PIPELINE_STAGE_*_SHADER_BIT stages
- VUID-VkImageMemoryBarrier2-dstAccessMask-03909
  If dstAccessMask includes VK_ACCESS_2_SHADER_WRITE_BIT, dstStageMask **must** include VK_PIPELINE_STAGE_2_ALL_GRAPHICS_BIT, VK_PIPELINE_STAGE_2_ALL_COMMANDS_BIT, or one of the VK_PIPELINE_STAGE_*_SHADER_BIT stages
- VUID-VkImageMemoryBarrier2-dstAccessMask-03910
  If dstAccessMask includes VK_ACCESS_2_COLOR_ATTACHMENT_READ_BIT, dstStageMask **must** include VK_PIPELINE_STAGE_2_COLOR_ATTACHMENT_OUTPUT_BIT VK_PIPELINE_STAGE_2_ALL_GRAPHICS_BIT, or VK_PIPELINE_STAGE_2_ALL_COMMANDS_BIT
- VUID-VkImageMemoryBarrier2-dstAccessMask-03911
  If dstAccessMask includes VK_ACCESS_2_COLOR_ATTACHMENT_WRITE_BIT, dstStageMask **must** include VK_PIPELINE_STAGE_2_COLOR_ATTACHMENT_OUTPUT_BIT VK_PIPELINE_STAGE_2_ALL_GRAPHICS_BIT, or VK_PIPELINE_STAGE_2_ALL_COMMANDS_BIT
- VUID-VkImageMemoryBarrier2-dstAccessMask-03912
  If dstAccessMask includes VK_ACCESS_2_DEPTH_STENCIL_ATTACHMENT_READ_BIT, dstStageMask **must** include VK_PIPELINE_STAGE_2_EARLY_FRAGMENT_TESTS_BIT, VK_PIPELINE_STAGE_2_LATE_FRAGMENT_TESTS_BIT, VK_PIPELINE_STAGE_2_ALL_GRAPHICS_BIT, or VK_PIPELINE_STAGE_2_ALL_COMMANDS_BIT
- VUID-VkImageMemoryBarrier2-dstAccessMask-03913
  If dstAccessMask includes VK_ACCESS_2_DEPTH_STENCIL_ATTACHMENT_WRITE_BIT, dstStageMask

must include VK_PIPELINE_STAGE_2_EARLY_FRAGMENT_TESTS_BIT, VK_PIPELINE_STAGE_2_LATE_FRAGMENT_TESTS_BIT, VK_PIPELINE_STAGE_2_ALL_GRAPHICS_BIT, or VK_PIPELINE_STAGE_2_ALL_COMMANDS_BIT

- VUID-VkImageMemoryBarrier2-dstAccessMask-03914
  If dstAccessMask includes VK_ACCESS_2_TRANSFER_READ_BIT, dstStageMask **must** include VK_PIPELINE_STAGE_2_COPY_BIT, VK_PIPELINE_STAGE_2_BLIT_BIT, VK_PIPELINE_STAGE_2_RESOLVE_BIT, VK_PIPELINE_STAGE_2_ALL_TRANSFER_BIT, or VK_PIPELINE_STAGE_2_ALL_COMMANDS_BIT
- VUID-VkImageMemoryBarrier2-dstAccessMask-03915
  If dstAccessMask includes VK_ACCESS_2_TRANSFER_WRITE_BIT, dstStageMask **must** include VK_PIPELINE_STAGE_2_COPY_BIT, VK_PIPELINE_STAGE_2_BLIT_BIT, VK_PIPELINE_STAGE_2_RESOLVE_BIT, VK_PIPELINE_STAGE_2_CLEAR_BIT, VK_PIPELINE_STAGE_2_ALL_TRANSFER_BIT, VK_PIPELINE_STAGE_2_ALL_COMMANDS_BIT
- VUID-VkImageMemoryBarrier2-dstAccessMask-03916
  If dstAccessMask includes VK_ACCESS_2_HOST_READ_BIT, dstStageMask **must** include VK_PIPELINE_STAGE_2_HOST_BIT
- VUID-VkImageMemoryBarrier2-dstAccessMask-03917
  If dstAccessMask includes VK_ACCESS_2_HOST_WRITE_BIT, dstStageMask **must** include VK_PIPELINE_STAGE_2_HOST_BIT
- VUID-VkImageMemoryBarrier2-oldLayout-01208
  If srcQueueFamilyIndex and dstQueueFamilyIndex define a queue family ownership transfer or oldLayout and newLayout define an image layout transition, and oldLayout or newLayout is VK_IMAGE_LAYOUT_COLOR_ATTACHMENT_OPTIMAL then image **must** have been created with VK_IMAGE_USAGE_COLOR_ATTACHMENT_BIT
- VUID-VkImageMemoryBarrier2-oldLayout-01209
  If srcQueueFamilyIndex and dstQueueFamilyIndex define a queue family ownership transfer or oldLayout and newLayout define an image layout transition, and oldLayout or newLayout is VK_IMAGE_LAYOUT_DEPTH_STENCIL_ATTACHMENT_OPTIMAL then image **must** have been created with VK_IMAGE_USAGE_DEPTH_STENCIL_ATTACHMENT_BIT
- VUID-VkImageMemoryBarrier2-oldLayout-01210
  If srcQueueFamilyIndex and dstQueueFamilyIndex define a queue family ownership transfer or oldLayout and newLayout define an image layout transition, and oldLayout or newLayout is VK_IMAGE_LAYOUT_DEPTH_STENCIL_READ_ONLY_OPTIMAL then image **must** have been created with VK_IMAGE_USAGE_DEPTH_STENCIL_ATTACHMENT_BIT
- VUID-VkImageMemoryBarrier2-oldLayout-01211
  If srcQueueFamilyIndex and dstQueueFamilyIndex define a queue family ownership transfer or oldLayout and newLayout define an image layout transition, and oldLayout or newLayout is VK_IMAGE_LAYOUT_SHADER_READ_ONLY_OPTIMAL then image **must** have been created with VK_IMAGE_USAGE_SAMPLED_BIT or VK_IMAGE_USAGE_INPUT_ATTACHMENT_BIT
- VUID-VkImageMemoryBarrier2-oldLayout-01212
  If srcQueueFamilyIndex and dstQueueFamilyIndex define a queue family ownership transfer or oldLayout and newLayout define an image layout transition, and oldLayout or newLayout is VK_IMAGE_LAYOUT_TRANSFER_SRC_OPTIMAL then image **must** have been created with VK_IMAGE_USAGE_TRANSFER_SRC_BIT

- VUID-VkImageMemoryBarrier2-oldLayout-01213
  If `srcQueueFamilyIndex` and `dstQueueFamilyIndex` define a queue family ownership transfer or `oldLayout` and `newLayout` define an image layout transition, and `oldLayout` or `newLayout` is `VK_IMAGE_LAYOUT_TRANSFER_DST_OPTIMAL` then `image` **must** have been created with `VK_IMAGE_USAGE_TRANSFER_DST_BIT`
- VUID-VkImageMemoryBarrier2-oldLayout-01197
  If `srcQueueFamilyIndex` and `dstQueueFamilyIndex` define a queue family ownership transfer or `oldLayout` and `newLayout` define an image layout transition, `oldLayout` **must** be `VK_IMAGE_LAYOUT_UNDEFINED` or the current layout of the image subresources affected by the barrier
- VUID-VkImageMemoryBarrier2-newLayout-01198
  If `srcQueueFamilyIndex` and `dstQueueFamilyIndex` define a queue family ownership transfer or `oldLayout` and `newLayout` define an image layout transition, `newLayout` **must** not be `VK_IMAGE_LAYOUT_UNDEFINED` or `VK_IMAGE_LAYOUT_PREINITIALIZED`
- VUID-VkImageMemoryBarrier2-oldLayout-01658
  If `srcQueueFamilyIndex` and `dstQueueFamilyIndex` define a queue family ownership transfer or `oldLayout` and `newLayout` define an image layout transition, and `oldLayout` or `newLayout` is `VK_IMAGE_LAYOUT_DEPTH_READ_ONLY_STENCIL_ATTACHMENT_OPTIMAL` then `image` **must** have been created with `VK_IMAGE_USAGE_DEPTH_STENCIL_ATTACHMENT_BIT`
- VUID-VkImageMemoryBarrier2-oldLayout-01659
  If `srcQueueFamilyIndex` and `dstQueueFamilyIndex` define a queue family ownership transfer or `oldLayout` and `newLayout` define an image layout transition, and `oldLayout` or `newLayout` is `VK_IMAGE_LAYOUT_DEPTH_ATTACHMENT_STENCIL_READ_ONLY_OPTIMAL` then `image` **must** have been created with `VK_IMAGE_USAGE_DEPTH_STENCIL_ATTACHMENT_BIT`
- VUID-VkImageMemoryBarrier2-srcQueueFamilyIndex-04065
  If `srcQueueFamilyIndex` and `dstQueueFamilyIndex` define a queue family ownership transfer or `oldLayout` and `newLayout` define an image layout transition, and `oldLayout` or `newLayout` is `VK_IMAGE_LAYOUT_DEPTH_READ_ONLY_OPTIMAL` then `image` **must** have been created with at least one of `VK_IMAGE_USAGE_DEPTH_STENCIL_ATTACHMENT_BIT`, `VK_IMAGE_USAGE_SAMPLED_BIT`, or `VK_IMAGE_USAGE_INPUT_ATTACHMENT_BIT`
- VUID-VkImageMemoryBarrier2-srcQueueFamilyIndex-04066
  If `srcQueueFamilyIndex` and `dstQueueFamilyIndex` define a queue family ownership transfer or `oldLayout` and `newLayout` define an image layout transition, and `oldLayout` or `newLayout` is `VK_IMAGE_LAYOUT_DEPTH_ATTACHMENT_OPTIMAL` then `image` **must** have been created with `VK_IMAGE_USAGE_DEPTH_STENCIL_ATTACHMENT_BIT` set
- VUID-VkImageMemoryBarrier2-srcQueueFamilyIndex-04067
  If `srcQueueFamilyIndex` and `dstQueueFamilyIndex` define a queue family ownership transfer or `oldLayout` and `newLayout` define an image layout transition, and `oldLayout` or `newLayout` is `VK_IMAGE_LAYOUT_STENCIL_READ_ONLY_OPTIMAL` then `image` **must** have been created with at least one of `VK_IMAGE_USAGE_DEPTH_STENCIL_ATTACHMENT_BIT`, `VK_IMAGE_USAGE_SAMPLED_BIT`, or `VK_IMAGE_USAGE_INPUT_ATTACHMENT_BIT`
- VUID-VkImageMemoryBarrier2-srcQueueFamilyIndex-04068
  If `srcQueueFamilyIndex` and `dstQueueFamilyIndex` define a queue family ownership transfer or `oldLayout` and `newLayout` define an image layout transition, and `oldLayout` or `newLayout` is `VK_IMAGE_LAYOUT_STENCIL_ATTACHMENT_OPTIMAL` then `image` **must** have been created with

VK_IMAGE_USAGE_DEPTH_STENCIL_ATTACHMENT_BIT set

- VUID-VkImageMemoryBarrier2-synchronization2-07793
  If the synchronization2 feature is not enabled, oldLayout **must** not be VK_IMAGE_LAYOUT_ATTACHMENT_OPTIMAL_KHR or VK_IMAGE_LAYOUT_READ_ONLY_OPTIMAL_KHR
- VUID-VkImageMemoryBarrier2-synchronization2-07794
  If the synchronization2 feature is not enabled, newLayout **must** not be VK_IMAGE_LAYOUT_ATTACHMENT_OPTIMAL_KHR or VK_IMAGE_LAYOUT_READ_ONLY_OPTIMAL_KHR
- VUID-VkImageMemoryBarrier2-srcQueueFamilyIndex-03938
  If srcQueueFamilyIndex and dstQueueFamilyIndex define a queue family ownership transfer or oldLayout and newLayout define an image layout transition, and oldLayout or newLayout is VK_IMAGE_LAYOUT_ATTACHMENT_OPTIMAL, image **must** have been created with VK_IMAGE_USAGE_COLOR_ATTACHMENT_BIT or VK_IMAGE_USAGE_DEPTH_STENCIL_ATTACHMENT_BIT
- VUID-VkImageMemoryBarrier2-srcQueueFamilyIndex-03939
  If srcQueueFamilyIndex and dstQueueFamilyIndex define a queue family ownership transfer or oldLayout and newLayout define an image layout transition, and oldLayout or newLayout is VK_IMAGE_LAYOUT_READ_ONLY_OPTIMAL, image **must** have been created with at least one of VK_IMAGE_USAGE_DEPTH_STENCIL_ATTACHMENT_BIT, VK_IMAGE_USAGE_SAMPLED_BIT, or VK_IMAGE_USAGE_INPUT_ATTACHMENT_BIT
- VUID-VkImageMemoryBarrier2-image-09117
  If image was created with a sharing mode of VK_SHARING_MODE_EXCLUSIVE, and srcQueueFamilyIndex and dstQueueFamilyIndex are not equal, srcQueueFamilyIndex **must** be VK_QUEUE_FAMILY_EXTERNAL, or a valid queue family
- VUID-VkImageMemoryBarrier2-image-09118
  If image was created with a sharing mode of VK_SHARING_MODE_EXCLUSIVE, and srcQueueFamilyIndex and dstQueueFamilyIndex are not equal, dstQueueFamilyIndex **must** be VK_QUEUE_FAMILY_EXTERNAL, or a valid queue family
- VUID-VkImageMemoryBarrier2-srcQueueFamilyIndex-04070
  If srcQueueFamilyIndex is not equal to dstQueueFamilyIndex, at least one of srcQueueFamilyIndex or dstQueueFamilyIndex **must** not be VK_QUEUE_FAMILY_EXTERNAL
- VUID-VkImageMemoryBarrier2-None-09119
  If the value of VkApplicationInfo::apiVersion used to create the VkInstance is not greater than or equal to Version 1.1, srcQueueFamilyIndex **must** not be VK_QUEUE_FAMILY_EXTERNAL
- VUID-VkImageMemoryBarrier2-None-09120
  If the value of VkApplicationInfo::apiVersion used to create the VkInstance is not greater than or equal to Version 1.1, dstQueueFamilyIndex **must** not be VK_QUEUE_FAMILY_EXTERNAL
- VUID-VkImageMemoryBarrier2-subresourceRange-01486
  subresourceRange.baseMipLevel **must** be less than the mipLevels specified in VkImageCreateInfo when image was created
- VUID-VkImageMemoryBarrier2-subresourceRange-01724
  If subresourceRange.levelCount is not VK_REMAINING_MIP_LEVELS, subresourceRange.baseMipLevel + subresourceRange.levelCount **must** be less than or equal to the mipLevels specified in VkImageCreateInfo when image was created
- VUID-VkImageMemoryBarrier2-subresourceRange-01488

`subresourceRange.baseArrayLayer` **must** be less than the `arrayLayers` specified in VkImageCreateInfo when `image` was created

- VUID-VkImageMemoryBarrier2-subresourceRange-01725
  If `subresourceRange.layerCount` is not `VK_REMAINING_ARRAY_LAYERS`, `subresourceRange.baseArrayLayer` + `subresourceRange.layerCount` **must** be less than or equal to the `arrayLayers` specified in VkImageCreateInfo when `image` was created
- VUID-VkImageMemoryBarrier2-image-01932
  If `image` is non-sparse then it **must** be bound completely and contiguously to a single `VkDeviceMemory` object
- VUID-VkImageMemoryBarrier2-image-09241
  If `image` has a color format that is single-plane, then the `aspectMask` member of `subresourceRange` **must** be `VK_IMAGE_ASPECT_COLOR_BIT`
- VUID-VkImageMemoryBarrier2-image-09242
  If `image` has a color format and is not *disjoint*, then the `aspectMask` member of `subresourceRange` **must** be `VK_IMAGE_ASPECT_COLOR_BIT`
- VUID-VkImageMemoryBarrier2-image-01672
  If `image` has a multi-planar format and the image is *disjoint*, then the `aspectMask` member of `subresourceRange` **must** include at least one multi-planar aspect mask bit or `VK_IMAGE_ASPECT_COLOR_BIT`
- VUID-VkImageMemoryBarrier2-image-03320
  If `image` has a depth/stencil format with both depth and stencil and the `separateDepthStencilLayouts` feature is not enabled, then the `aspectMask` member of `subresourceRange` **must** include both `VK_IMAGE_ASPECT_DEPTH_BIT` and `VK_IMAGE_ASPECT_STENCIL_BIT`
- VUID-VkImageMemoryBarrier2-image-03319
  If `image` has a depth/stencil format with both depth and stencil and the `separateDepthStencilLayouts` feature is enabled, then the `aspectMask` member of `subresourceRange` **must** include either or both `VK_IMAGE_ASPECT_DEPTH_BIT` and `VK_IMAGE_ASPECT_STENCIL_BIT`
- VUID-VkImageMemoryBarrier2-aspectMask-08702
  If the `aspectMask` member of `subresourceRange` includes `VK_IMAGE_ASPECT_DEPTH_BIT`, `oldLayout` and `newLayout` **must** not be one of `VK_IMAGE_LAYOUT_STENCIL_ATTACHMENT_OPTIMAL` or `VK_IMAGE_LAYOUT_STENCIL_READ_ONLY_OPTIMAL`
- VUID-VkImageMemoryBarrier2-aspectMask-08703
  If the `aspectMask` member of `subresourceRange` includes `VK_IMAGE_ASPECT_STENCIL_BIT`, `oldLayout` and `newLayout` **must** not be one of `VK_IMAGE_LAYOUT_DEPTH_ATTACHMENT_OPTIMAL` or `VK_IMAGE_LAYOUT_DEPTH_READ_ONLY_OPTIMAL`
- VUID-VkImageMemoryBarrier2-subresourceRange-09601
  `subresourceRange.aspectMask` **must** be valid for the `format` the `image` was created with
- VUID-VkImageMemoryBarrier2-srcStageMask-03854
  If either `srcStageMask` or `dstStageMask` includes `VK_PIPELINE_STAGE_2_HOST_BIT`, `srcQueueFamilyIndex` and `dstQueueFamilyIndex` **must** be equal
- VUID-VkImageMemoryBarrier2-srcStageMask-03855

If `srcStageMask` includes `VK_PIPELINE_STAGE_2_HOST_BIT`, and `srcQueueFamilyIndex` and `dstQueueFamilyIndex` define a queue family ownership transfer or `oldLayout` and `newLayout` define an image layout transition, `oldLayout` **must** be one of `VK_IMAGE_LAYOUT_PREINITIALIZED`, `VK_IMAGE_LAYOUT_UNDEFINED`, or `VK_IMAGE_LAYOUT_GENERAL`

Valid Usage (Implicit)

- VUID-VkImageMemoryBarrier2-sType-sType
  `sType` **must** be `VK_STRUCTURE_TYPE_IMAGE_MEMORY_BARRIER_2`
- VUID-VkImageMemoryBarrier2-pNext-pNext
  `pNext` **must** be `NULL`
- VUID-VkImageMemoryBarrier2-srcStageMask-parameter
  `srcStageMask` **must** be a valid combination of VkPipelineStageFlagBits2 values
- VUID-VkImageMemoryBarrier2-srcAccessMask-parameter
  `srcAccessMask` **must** be a valid combination of VkAccessFlagBits2 values
- VUID-VkImageMemoryBarrier2-dstStageMask-parameter
  `dstStageMask` **must** be a valid combination of VkPipelineStageFlagBits2 values
- VUID-VkImageMemoryBarrier2-dstAccessMask-parameter
  `dstAccessMask` **must** be a valid combination of VkAccessFlagBits2 values
- VUID-VkImageMemoryBarrier2-oldLayout-parameter
  `oldLayout` **must** be a valid VkImageLayout value
- VUID-VkImageMemoryBarrier2-newLayout-parameter
  `newLayout` **must** be a valid VkImageLayout value
- VUID-VkImageMemoryBarrier2-image-parameter
  `image` **must** be a valid VkImage handle
- VUID-VkImageMemoryBarrier2-subresourceRange-parameter
  `subresourceRange` **must** be a valid VkImageSubresourceRange structure

The `VkImageMemoryBarrier` structure is defined as:

```
// Provided by VK_VERSION_1_0
typedef struct VkImageMemoryBarrier {
    VkStructureType            sType;
    const void*                pNext;
    VkAccessFlags              srcAccessMask;
    VkAccessFlags              dstAccessMask;
    VkImageLayout              oldLayout;
    VkImageLayout              newLayout;
    uint32_t                   srcQueueFamilyIndex;
    uint32_t                   dstQueueFamilyIndex;
    VkImage                    image;
    VkImageSubresourceRange    subresourceRange;
} VkImageMemoryBarrier;
```

- `sType` is a VkStructureType value identifying this structure.
- `pNext` is `NULL` or a pointer to a structure extending this structure.
- `srcAccessMask` is a bitmask of VkAccessFlagBits specifying a source access mask.
- `dstAccessMask` is a bitmask of VkAccessFlagBits specifying a destination access mask.
- `oldLayout` is the old layout in an image layout transition.
- `newLayout` is the new layout in an image layout transition.
- `srcQueueFamilyIndex` is the source queue family for a queue family ownership transfer.
- `dstQueueFamilyIndex` is the destination queue family for a queue family ownership transfer.
- `image` is a handle to the image affected by this barrier.
- `subresourceRange` describes the image subresource range within `image` that is affected by this barrier.

The first access scope is limited to access to memory through the specified image subresource range, via access types in the source access mask specified by `srcAccessMask`. If `srcAccessMask` includes `VK_ACCESS_HOST_WRITE_BIT`, memory writes performed by that access type are also made visible, as that access type is not performed through a resource.

The second access scope is limited to access to memory through the specified image subresource range, via access types in the destination access mask specified by `dstAccessMask`. If `dstAccessMask` includes `VK_ACCESS_HOST_WRITE_BIT` or `VK_ACCESS_HOST_READ_BIT`, available memory writes are also made visible to accesses of those types, as those access types are not performed through a resource.

If `srcQueueFamilyIndex` is not equal to `dstQueueFamilyIndex`, and `srcQueueFamilyIndex` is equal to the current queue family, then the memory barrier defines a queue family release operation for the specified image subresource range, and the second synchronization scope of the calling command does not apply to this operation.

If `dstQueueFamilyIndex` is not equal to `srcQueueFamilyIndex`, and `dstQueueFamilyIndex` is equal to the current queue family, then the memory barrier defines a queue family acquire operation for the specified image subresource range, and the first synchronization scope of the calling command does not apply to this operation.

If the synchronization2 feature is not enabled or oldLayout is not equal to newLayout, oldLayout and newLayout define an image layout transition for the specified image subresource range.

NOTE	If the synchronization2 feature is enabled, when the old and new layout are equal, the layout values are ignored - data is preserved no matter what values are specified, or what layout the image is currently in.

If image has a multi-planar format and the image is *disjoint*, then including VK_IMAGE_ASPECT_COLOR_BIT in the aspectMask member of subresourceRange is equivalent to including VK_IMAGE_ASPECT_PLANE_0_BIT, VK_IMAGE_ASPECT_PLANE_1_BIT, and (for three-plane formats only) VK_IMAGE_ASPECT_PLANE_2_BIT.

Valid Usage

- VUID-VkImageMemoryBarrier-oldLayout-01208
  If srcQueueFamilyIndex and dstQueueFamilyIndex define a queue family ownership transfer or oldLayout and newLayout define an image layout transition, and oldLayout or newLayout is VK_IMAGE_LAYOUT_COLOR_ATTACHMENT_OPTIMAL then image **must** have been created with VK_IMAGE_USAGE_COLOR_ATTACHMENT_BIT
- VUID-VkImageMemoryBarrier-oldLayout-01209
  If srcQueueFamilyIndex and dstQueueFamilyIndex define a queue family ownership transfer or oldLayout and newLayout define an image layout transition, and oldLayout or newLayout is VK_IMAGE_LAYOUT_DEPTH_STENCIL_ATTACHMENT_OPTIMAL then image **must** have been created with VK_IMAGE_USAGE_DEPTH_STENCIL_ATTACHMENT_BIT
- VUID-VkImageMemoryBarrier-oldLayout-01210
  If srcQueueFamilyIndex and dstQueueFamilyIndex define a queue family ownership transfer or oldLayout and newLayout define an image layout transition, and oldLayout or newLayout is VK_IMAGE_LAYOUT_DEPTH_STENCIL_READ_ONLY_OPTIMAL then image **must** have been created with VK_IMAGE_USAGE_DEPTH_STENCIL_ATTACHMENT_BIT
- VUID-VkImageMemoryBarrier-oldLayout-01211
  If srcQueueFamilyIndex and dstQueueFamilyIndex define a queue family ownership transfer or oldLayout and newLayout define an image layout transition, and oldLayout or newLayout is VK_IMAGE_LAYOUT_SHADER_READ_ONLY_OPTIMAL then image **must** have been created with VK_IMAGE_USAGE_SAMPLED_BIT or VK_IMAGE_USAGE_INPUT_ATTACHMENT_BIT
- VUID-VkImageMemoryBarrier-oldLayout-01212
  If srcQueueFamilyIndex and dstQueueFamilyIndex define a queue family ownership transfer or oldLayout and newLayout define an image layout transition, and oldLayout or newLayout is VK_IMAGE_LAYOUT_TRANSFER_SRC_OPTIMAL then image **must** have been created with VK_IMAGE_USAGE_TRANSFER_SRC_BIT
- VUID-VkImageMemoryBarrier-oldLayout-01213
  If srcQueueFamilyIndex and dstQueueFamilyIndex define a queue family ownership transfer or oldLayout and newLayout define an image layout transition, and oldLayout or newLayout is VK_IMAGE_LAYOUT_TRANSFER_DST_OPTIMAL then image **must** have been created with VK_IMAGE_USAGE_TRANSFER_DST_BIT
- VUID-VkImageMemoryBarrier-oldLayout-01197

If srcQueueFamilyIndex and dstQueueFamilyIndex define a queue family ownership transfer or oldLayout and newLayout define an image layout transition, oldLayout **must** be VK_IMAGE_LAYOUT_UNDEFINED or the current layout of the image subresources affected by the barrier

- VUID-VkImageMemoryBarrier-newLayout-01198
  If srcQueueFamilyIndex and dstQueueFamilyIndex define a queue family ownership transfer or oldLayout and newLayout define an image layout transition, newLayout **must** not be VK_IMAGE_LAYOUT_UNDEFINED or VK_IMAGE_LAYOUT_PREINITIALIZED
- VUID-VkImageMemoryBarrier-oldLayout-01658
  If srcQueueFamilyIndex and dstQueueFamilyIndex define a queue family ownership transfer or oldLayout and newLayout define an image layout transition, and oldLayout or newLayout is VK_IMAGE_LAYOUT_DEPTH_READ_ONLY_STENCIL_ATTACHMENT_OPTIMAL then image **must** have been created with VK_IMAGE_USAGE_DEPTH_STENCIL_ATTACHMENT_BIT
- VUID-VkImageMemoryBarrier-oldLayout-01659
  If srcQueueFamilyIndex and dstQueueFamilyIndex define a queue family ownership transfer or oldLayout and newLayout define an image layout transition, and oldLayout or newLayout is VK_IMAGE_LAYOUT_DEPTH_ATTACHMENT_STENCIL_READ_ONLY_OPTIMAL then image **must** have been created with VK_IMAGE_USAGE_DEPTH_STENCIL_ATTACHMENT_BIT
- VUID-VkImageMemoryBarrier-srcQueueFamilyIndex-04065
  If srcQueueFamilyIndex and dstQueueFamilyIndex define a queue family ownership transfer or oldLayout and newLayout define an image layout transition, and oldLayout or newLayout is VK_IMAGE_LAYOUT_DEPTH_READ_ONLY_OPTIMAL then image **must** have been created with at least one of VK_IMAGE_USAGE_DEPTH_STENCIL_ATTACHMENT_BIT, VK_IMAGE_USAGE_SAMPLED_BIT, or VK_IMAGE_USAGE_INPUT_ATTACHMENT_BIT
- VUID-VkImageMemoryBarrier-srcQueueFamilyIndex-04066
  If srcQueueFamilyIndex and dstQueueFamilyIndex define a queue family ownership transfer or oldLayout and newLayout define an image layout transition, and oldLayout or newLayout is VK_IMAGE_LAYOUT_DEPTH_ATTACHMENT_OPTIMAL then image **must** have been created with VK_IMAGE_USAGE_DEPTH_STENCIL_ATTACHMENT_BIT set
- VUID-VkImageMemoryBarrier-srcQueueFamilyIndex-04067
  If srcQueueFamilyIndex and dstQueueFamilyIndex define a queue family ownership transfer or oldLayout and newLayout define an image layout transition, and oldLayout or newLayout is VK_IMAGE_LAYOUT_STENCIL_READ_ONLY_OPTIMAL then image **must** have been created with at least one of VK_IMAGE_USAGE_DEPTH_STENCIL_ATTACHMENT_BIT, VK_IMAGE_USAGE_SAMPLED_BIT, or VK_IMAGE_USAGE_INPUT_ATTACHMENT_BIT
- VUID-VkImageMemoryBarrier-srcQueueFamilyIndex-04068
  If srcQueueFamilyIndex and dstQueueFamilyIndex define a queue family ownership transfer or oldLayout and newLayout define an image layout transition, and oldLayout or newLayout is VK_IMAGE_LAYOUT_STENCIL_ATTACHMENT_OPTIMAL then image **must** have been created with VK_IMAGE_USAGE_DEPTH_STENCIL_ATTACHMENT_BIT set
- VUID-VkImageMemoryBarrier-synchronization2-07793
  If the synchronization2 feature is not enabled, oldLayout **must** not be VK_IMAGE_LAYOUT_ATTACHMENT_OPTIMAL_KHR or VK_IMAGE_LAYOUT_READ_ONLY_OPTIMAL_KHR
- VUID-VkImageMemoryBarrier-synchronization2-07794

If the synchronization2 feature is not enabled, newLayout **must** not be VK_IMAGE_LAYOUT_ATTACHMENT_OPTIMAL_KHR or VK_IMAGE_LAYOUT_READ_ONLY_OPTIMAL_KHR

- VUID-VkImageMemoryBarrier-srcQueueFamilyIndex-03938
  If srcQueueFamilyIndex and dstQueueFamilyIndex define a queue family ownership transfer or oldLayout and newLayout define an image layout transition, and oldLayout or newLayout is VK_IMAGE_LAYOUT_ATTACHMENT_OPTIMAL, image **must** have been created with VK_IMAGE_USAGE_COLOR_ATTACHMENT_BIT or VK_IMAGE_USAGE_DEPTH_STENCIL_ATTACHMENT_BIT
- VUID-VkImageMemoryBarrier-srcQueueFamilyIndex-03939
  If srcQueueFamilyIndex and dstQueueFamilyIndex define a queue family ownership transfer or oldLayout and newLayout define an image layout transition, and oldLayout or newLayout is VK_IMAGE_LAYOUT_READ_ONLY_OPTIMAL, image **must** have been created with at least one of VK_IMAGE_USAGE_DEPTH_STENCIL_ATTACHMENT_BIT, VK_IMAGE_USAGE_SAMPLED_BIT, or VK_IMAGE_USAGE_INPUT_ATTACHMENT_BIT
- VUID-VkImageMemoryBarrier-image-09117
  If image was created with a sharing mode of VK_SHARING_MODE_EXCLUSIVE, and srcQueueFamilyIndex and dstQueueFamilyIndex are not equal, srcQueueFamilyIndex **must** be VK_QUEUE_FAMILY_EXTERNAL, or a valid queue family
- VUID-VkImageMemoryBarrier-image-09118
  If image was created with a sharing mode of VK_SHARING_MODE_EXCLUSIVE, and srcQueueFamilyIndex and dstQueueFamilyIndex are not equal, dstQueueFamilyIndex **must** be VK_QUEUE_FAMILY_EXTERNAL, or a valid queue family
- VUID-VkImageMemoryBarrier-srcQueueFamilyIndex-04070
  If srcQueueFamilyIndex is not equal to dstQueueFamilyIndex, at least one of srcQueueFamilyIndex or dstQueueFamilyIndex **must** not be VK_QUEUE_FAMILY_EXTERNAL
- VUID-VkImageMemoryBarrier-None-09119
  If the value of VkApplicationInfo::apiVersion used to create the VkInstance is not greater than or equal to Version 1.1, srcQueueFamilyIndex **must** not be VK_QUEUE_FAMILY_EXTERNAL
- VUID-VkImageMemoryBarrier-None-09120
  If the value of VkApplicationInfo::apiVersion used to create the VkInstance is not greater than or equal to Version 1.1, dstQueueFamilyIndex **must** not be VK_QUEUE_FAMILY_EXTERNAL
- VUID-VkImageMemoryBarrier-subresourceRange-01486
  subresourceRange.baseMipLevel **must** be less than the mipLevels specified in VkImageCreateInfo when image was created
- VUID-VkImageMemoryBarrier-subresourceRange-01724
  If subresourceRange.levelCount is not VK_REMAINING_MIP_LEVELS, subresourceRange.baseMipLevel + subresourceRange.levelCount **must** be less than or equal to the mipLevels specified in VkImageCreateInfo when image was created
- VUID-VkImageMemoryBarrier-subresourceRange-01488
  subresourceRange.baseArrayLayer **must** be less than the arrayLayers specified in VkImageCreateInfo when image was created
- VUID-VkImageMemoryBarrier-subresourceRange-01725
  If subresourceRange.layerCount is not VK_REMAINING_ARRAY_LAYERS, subresourceRange.baseArrayLayer + subresourceRange.layerCount **must** be less than or

equal to the arrayLayers specified in VkImageCreateInfo when image was created

- VUID-VkImageMemoryBarrier-image-01932
  If image is non-sparse then it **must** be bound completely and contiguously to a single VkDeviceMemory object
- VUID-VkImageMemoryBarrier-image-09241
  If image has a color format that is single-plane, then the aspectMask member of subresourceRange **must** be VK_IMAGE_ASPECT_COLOR_BIT
- VUID-VkImageMemoryBarrier-image-09242
  If image has a color format and is not *disjoint*, then the aspectMask member of subresourceRange **must** be VK_IMAGE_ASPECT_COLOR_BIT
- VUID-VkImageMemoryBarrier-image-01672
  If image has a multi-planar format and the image is *disjoint*, then the aspectMask member of subresourceRange **must** include at least one multi-planar aspect mask bit or VK_IMAGE_ASPECT_COLOR_BIT
- VUID-VkImageMemoryBarrier-image-03320
  If image has a depth/stencil format with both depth and stencil and the separateDepthStencilLayouts feature is not enabled, then the aspectMask member of subresourceRange **must** include both VK_IMAGE_ASPECT_DEPTH_BIT and VK_IMAGE_ASPECT_STENCIL_BIT
- VUID-VkImageMemoryBarrier-image-03319
  If image has a depth/stencil format with both depth and stencil and the separateDepthStencilLayouts feature is enabled, then the aspectMask member of subresourceRange **must** include either or both VK_IMAGE_ASPECT_DEPTH_BIT and VK_IMAGE_ASPECT_STENCIL_BIT
- VUID-VkImageMemoryBarrier-aspectMask-08702
  If the aspectMask member of subresourceRange includes VK_IMAGE_ASPECT_DEPTH_BIT, oldLayout and newLayout **must** not be one of VK_IMAGE_LAYOUT_STENCIL_ATTACHMENT_OPTIMAL or VK_IMAGE_LAYOUT_STENCIL_READ_ONLY_OPTIMAL
- VUID-VkImageMemoryBarrier-aspectMask-08703
  If the aspectMask member of subresourceRange includes VK_IMAGE_ASPECT_STENCIL_BIT, oldLayout and newLayout **must** not be one of VK_IMAGE_LAYOUT_DEPTH_ATTACHMENT_OPTIMAL or VK_IMAGE_LAYOUT_DEPTH_READ_ONLY_OPTIMAL
- VUID-VkImageMemoryBarrier-subresourceRange-09601
  subresourceRange.aspectMask **must** be valid for the format the image was created with
- VUID-VkImageMemoryBarrier-None-09052
  If image was created with a sharing mode of VK_SHARING_MODE_CONCURRENT, at least one of srcQueueFamilyIndex and dstQueueFamilyIndex **must** be VK_QUEUE_FAMILY_IGNORED
- VUID-VkImageMemoryBarrier-None-09053
  If image was created with a sharing mode of VK_SHARING_MODE_CONCURRENT, srcQueueFamilyIndex **must** be VK_QUEUE_FAMILY_IGNORED or VK_QUEUE_FAMILY_EXTERNAL
- VUID-VkImageMemoryBarrier-None-09054
  If image was created with a sharing mode of VK_SHARING_MODE_CONCURRENT, dstQueueFamilyIndex **must** be VK_QUEUE_FAMILY_IGNORED or VK_QUEUE_FAMILY_EXTERNAL

Valid Usage (Implicit)

- VUID-VkImageMemoryBarrier-sType-sType
  `sType` **must** be `VK_STRUCTURE_TYPE_IMAGE_MEMORY_BARRIER`
- VUID-VkImageMemoryBarrier-pNext-pNext
  `pNext` **must** be `NULL`
- VUID-VkImageMemoryBarrier-oldLayout-parameter
  `oldLayout` **must** be a valid VkImageLayout value
- VUID-VkImageMemoryBarrier-newLayout-parameter
  `newLayout` **must** be a valid VkImageLayout value
- VUID-VkImageMemoryBarrier-image-parameter
  `image` **must** be a valid VkImage handle
- VUID-VkImageMemoryBarrier-subresourceRange-parameter
  `subresourceRange` **must** be a valid VkImageSubresourceRange structure

7.7.4. Queue Family Ownership Transfer

Resources created with a VkSharingMode of `VK_SHARING_MODE_EXCLUSIVE` **must** have their ownership explicitly transferred from one queue family to another in order to access their content in a well-defined manner on a queue in a different queue family.

The special queue family index `VK_QUEUE_FAMILY_IGNORED` indicates that a queue family parameter or member is ignored.

```
#define VK_QUEUE_FAMILY_IGNORED           (~0U)
```

Resources shared with external APIs or instances using external memory **must** also explicitly manage ownership transfers between local and external queues (or equivalent constructs in external APIs) regardless of the VkSharingMode specified when creating them.

The special queue family index `VK_QUEUE_FAMILY_EXTERNAL` represents any queue external to the resource's current Vulkan instance, as long as the queue uses the same underlying device group or physical device, and the same driver version as the resource's VkDevice, as indicated by VkPhysicalDeviceIDProperties::`deviceUUID` and VkPhysicalDeviceIDProperties::`driverUUID`.

```
#define VK_QUEUE_FAMILY_EXTERNAL          (~1U)
```

If memory dependencies are correctly expressed between uses of such a resource between two queues in different families, but no ownership transfer is defined, the contents of that resource are undefined for any read accesses performed by the second queue family.

NOTE If an application does not need the contents of a resource to remain valid when transferring from one queue family to another, then the ownership transfer **should**

be skipped.

A queue family ownership transfer consists of two distinct parts:

1. Release exclusive ownership from the source queue family
2. Acquire exclusive ownership for the destination queue family

An application **must** ensure that these operations occur in the correct order by defining an execution dependency between them, e.g. using a semaphore.

A *release operation* is used to release exclusive ownership of a range of a buffer or image subresource range. A release operation is defined by executing a buffer memory barrier (for a buffer range) or an image memory barrier (for an image subresource range) using a pipeline barrier command, on a queue from the source queue family. The `srcQueueFamilyIndex` parameter of the barrier **must** be the source queue family index, and the `dstQueueFamilyIndex` parameter to the destination queue family index. `dstAccessMask` is ignored for such a barrier, such that no visibility operation is executed - the value of this mask does not affect the validity of the barrier. The release operation happens-after the availability operation. `dstStageMask` is also ignored for such a barrier as defined by buffer memory ownership transfer and image memory ownership transfer.

An *acquire operation* is used to acquire exclusive ownership of a range of a buffer or image subresource range. An acquire operation is defined by executing a buffer memory barrier (for a buffer range) or an image memory barrier (for an image subresource range) using a pipeline barrier command, on a queue from the destination queue family. The buffer range or image subresource range specified in an acquire operation **must** match exactly that of a previous release operation. The `srcQueueFamilyIndex` parameter of the barrier **must** be the source queue family index, and the `dstQueueFamilyIndex` parameter to the destination queue family index. `srcAccessMask` is ignored for such a barrier, such that no availability operation is executed - the value of this mask does not affect the validity of the barrier. The acquire operation happens-before the visibility operation. `srcStageMask` is also ignored for such a barrier as defined by buffer memory ownership transfer and image memory ownership transfer. As the first synchronization scope for an acquire operation is empty there is no happens-before dependency. Such a dependency **can** be introduced by using `VK_PIPELINE_STAGE_ALL_COMMANDS_BIT`.

NOTE

Whilst it is not invalid to provide destination or source access masks for memory barriers used for release or acquire operations, respectively, they have no practical effect. Access after a release operation has undefined results, and so visibility for those accesses has no practical effect. Similarly, write access before an acquire operation will produce undefined results for future access, so availability of those writes has no practical use. In an earlier version of the specification, these were required to match on both sides - but this was subsequently relaxed. These masks **should** be set to 0.

NOTE

Since a release and acquire operation does not synchronize with second and first scopes respectively, the `VK_PIPELINE_STAGE_ALL_COMMANDS_BIT` stage must be used to wait for a release operation to complete. Typically, a release and acquire pair is performed by a VkSemaphore signal and wait in their respective queues. Signaling a semaphore with vkQueueSubmit waits for `VK_PIPELINE_STAGE_ALL_COMMANDS_BIT`.

> With vkQueueSubmit2, `stageMask` for the signal semaphore must be `VK_PIPELINE_STAGE_ALL_COMMANDS_BIT`. Similarly, for the acquire operation, waiting for a semaphore must use `VK_PIPELINE_STAGE_ALL_COMMANDS_BIT` to make sure the acquire operation is synchronized.

If the transfer is via an image memory barrier, and an image layout transition is desired, then the values of `oldLayout` and `newLayout` in the *release operation*'s memory barrier **must** be equal to values of `oldLayout` and `newLayout` in the *acquire operation*'s memory barrier. Although the image layout transition is submitted twice, it will only be executed once. A layout transition specified in this way happens-after the *release operation* and happens-before the *acquire operation*.

If the values of `srcQueueFamilyIndex` and `dstQueueFamilyIndex` are equal, no ownership transfer is performed, and the barrier operates as if they were both set to `VK_QUEUE_FAMILY_IGNORED`.

Queue family ownership transfers **may** perform read and write accesses on all memory bound to the image subresource or buffer range, so applications **must** ensure that all memory writes have been made available before a queue family ownership transfer is executed. Available memory is automatically made visible to queue family release and acquire operations, and writes performed by those operations are automatically made available.

Once a queue family has acquired ownership of a buffer range or image subresource range of a `VK_SHARING_MODE_EXCLUSIVE` resource, its contents are undefined to other queue families unless ownership is transferred. The contents of any portion of another resource which aliases memory that is bound to the transferred buffer or image subresource range are undefined after a release or acquire operation.

> **NOTE** Because events **cannot** be used directly for inter-queue synchronization, and because vkCmdSetEvent does not have the queue family index or memory barrier parameters needed by a *release operation*, the release and acquire operations of a queue family ownership transfer **can** only be performed using vkCmdPipelineBarrier.

7.8. Wait Idle Operations

To wait on the host for the completion of outstanding queue operations for a given queue, call:

```
// Provided by VK_VERSION_1_0
VkResult vkQueueWaitIdle(
    VkQueue                                     queue);
```

- `queue` is the queue on which to wait.

`vkQueueWaitIdle` is equivalent to having submitted a valid fence to every previously executed queue submission command that accepts a fence, then waiting for all of those fences to signal using vkWaitForFences with an infinite timeout and `waitAll` set to `VK_TRUE`.

Valid Usage (Implicit)

- VUID-vkQueueWaitIdle-queue-parameter
  `queue` **must** be a valid VkQueue handle

Host Synchronization

- Host access to `queue` **must** be externally synchronized

Command Properties

Command Buffer Levels	Render Pass Scope	Supported Queue Types	Command Type
-	-	Any	-

Return Codes

Success

- `VK_SUCCESS`

Failure

- `VK_ERROR_OUT_OF_HOST_MEMORY`
- `VK_ERROR_OUT_OF_DEVICE_MEMORY`
- `VK_ERROR_DEVICE_LOST`

To wait on the host for the completion of outstanding queue operations for all queues on a given logical device, call:

```
// Provided by VK_VERSION_1_0
VkResult vkDeviceWaitIdle(
    VkDevice                                    device);
```

- `device` is the logical device to idle.

`vkDeviceWaitIdle` is equivalent to calling `vkQueueWaitIdle` for all queues owned by `device`.

Valid Usage (Implicit)

- VUID-vkDeviceWaitIdle-device-parameter
  `device` **must** be a valid VkDevice handle

Host Synchronization

- Host access to all `VkQueue` objects created from `device` **must** be externally synchronized

Return Codes

Success

- `VK_SUCCESS`

Failure

- `VK_ERROR_OUT_OF_HOST_MEMORY`
- `VK_ERROR_OUT_OF_DEVICE_MEMORY`
- `VK_ERROR_DEVICE_LOST`

7.9. Host Write Ordering Guarantees

When batches of command buffers are submitted to a queue via a queue submission command, it defines a memory dependency with prior host operations, and execution of command buffers submitted to the queue.

The first synchronization scope includes execution of vkQueueSubmit on the host and anything that happened-before it, as defined by the host memory model.

NOTE Some systems allow writes that do not directly integrate with the host memory model; these have to be synchronized by the application manually. One example of this is non-temporal store instructions on x86; to ensure these happen-before submission, applications should call `_mm_sfence()`.

The second synchronization scope includes all commands submitted in the same queue submission, and all commands that occur later in submission order.

The first access scope includes all host writes to mappable device memory that are available to the host memory domain.

The second access scope includes all memory access performed by the device.

7.10. Synchronization and Multiple Physical Devices

If a logical device includes more than one physical device, then fences, semaphores, and events all still have a single instance of the signaled state.

A fence becomes signaled when all physical devices complete the necessary queue operations.

Semaphore wait and signal operations all include a device index that is the sole physical device that performs the operation. These indices are provided in the VkDeviceGroupSubmitInfo and

VkDeviceGroupBindSparseInfo structures. Semaphores are not exclusively owned by any physical device. For example, a semaphore can be signaled by one physical device and then waited on by a different physical device.

An event **can** only be waited on by the same physical device that signaled it (or the host).

Chapter 8. Render Pass

Draw commands **must** be recorded within a *render pass instance*. Each render pass instance defines a set of image resources, referred to as *attachments*, used during rendering.

To begin a render pass instance, call:

```
// Provided by VK_VERSION_1_3
void vkCmdBeginRendering(
    VkCommandBuffer                             commandBuffer,
    const VkRenderingInfo*                      pRenderingInfo);
```

- `commandBuffer` is the command buffer in which to record the command.
- `pRenderingInfo` is a pointer to a VkRenderingInfo structure specifying details of the render pass instance to begin.

After beginning a render pass instance, the command buffer is ready to record draw commands.

If `pRenderingInfo->flags` includes `VK_RENDERING_RESUMING_BIT` then this render pass is resumed from a render pass instance that has been suspended earlier in submission order.

Valid Usage

- VUID-vkCmdBeginRendering-dynamicRendering-06446
  The `dynamicRendering` feature **must** be enabled
- VUID-vkCmdBeginRendering-commandBuffer-06068
  If `commandBuffer` is a secondary command buffer, `pRenderingInfo->flags` **must** not include `VK_RENDERING_CONTENTS_SECONDARY_COMMAND_BUFFERS_BIT`
- VUID-vkCmdBeginRendering-pRenderingInfo-09588
  If `pRenderingInfo->pDepthAttachment` is not `NULL` and `pRenderingInfo->pDepthAttachment->imageView` is not VK_NULL_HANDLE, `pRenderingInfo->pDepthAttachment->imageView` **must** be in the layout specified by `pRenderingInfo->pDepthAttachment->imageLayout`
- VUID-vkCmdBeginRendering-pRenderingInfo-09589
  If `pRenderingInfo->pDepthAttachment` is not `NULL`, `pRenderingInfo->pDepthAttachment->imageView` is not VK_NULL_HANDLE, `pRenderingInfo->pDepthAttachment->imageResolveMode` is not `VK_RESOLVE_MODE_NONE`, and `pRenderingInfo->pDepthAttachment->resolveImageView` is not VK_NULL_HANDLE, `pRenderingInfo->pDepthAttachment->resolveImageView` **must** be in the layout specified by `pRenderingInfo->pDepthAttachment->resolveImageLayout`
- VUID-vkCmdBeginRendering-pRenderingInfo-09590
  If `pRenderingInfo->pStencilAttachment` is not `NULL` and `pRenderingInfo->pStencilAttachment->imageView` is not VK_NULL_HANDLE, `pRenderingInfo->pStencilAttachment->imageView` **must** be in the layout specified by `pRenderingInfo->pStencilAttachment->imageLayout`
- VUID-vkCmdBeginRendering-pRenderingInfo-09591

If pRenderingInfo->pStencilAttachment is not NULL, pRenderingInfo->pStencilAttachment->imageView is not VK_NULL_HANDLE, pRenderingInfo->pStencilAttachment->imageResolveMode is not VK_RESOLVE_MODE_NONE, and pRenderingInfo->pStencilAttachment->resolveImageView is not VK_NULL_HANDLE, pRenderingInfo->pStencilAttachment->resolveImageView **must** be in the layout specified by pRenderingInfo->pStencilAttachment->resolveImageLayout

- VUID-vkCmdBeginRendering-pRenderingInfo-09592
  For any element of pRenderingInfo->pColorAttachments, if imageView is not VK_NULL_HANDLE, that image view **must** be in the layout specified by imageLayout
- VUID-vkCmdBeginRendering-pRenderingInfo-09593
  For any element of pRenderingInfo->pColorAttachments, if imageView is not VK_NULL_HANDLE and resolveMode is not VK_RESOLVE_MODE_NONE, and resolveImageView is not VK_NULL_HANDLE, resolveImageView **must** be in the layout specified by resolveImageLayout

Valid Usage (Implicit)

- VUID-vkCmdBeginRendering-commandBuffer-parameter
  commandBuffer **must** be a valid VkCommandBuffer handle
- VUID-vkCmdBeginRendering-pRenderingInfo-parameter
  pRenderingInfo **must** be a valid pointer to a valid VkRenderingInfo structure
- VUID-vkCmdBeginRendering-commandBuffer-recording
  commandBuffer **must** be in the recording state
- VUID-vkCmdBeginRendering-commandBuffer-cmdpool
  The VkCommandPool that commandBuffer was allocated from **must** support graphics operations
- VUID-vkCmdBeginRendering-renderpass
  This command **must** only be called outside of a render pass instance

Host Synchronization

- Host access to commandBuffer **must** be externally synchronized
- Host access to the VkCommandPool that commandBuffer was allocated from **must** be externally synchronized

Command Properties

Command Buffer Levels	Render Pass Scope	Supported Queue Types	Command Type
Primary Secondary	Outside	Graphics	Action State

The VkRenderingInfo structure is defined as:

```
// Provided by VK_VERSION_1_3
typedef struct VkRenderingInfo {
    VkStructureType                     sType;
    const void*                         pNext;
    VkRenderingFlags                    flags;
    VkRect2D                            renderArea;
    uint32_t                            layerCount;
    uint32_t                            viewMask;
    uint32_t                            colorAttachmentCount;
    const VkRenderingAttachmentInfo*    pColorAttachments;
    const VkRenderingAttachmentInfo*    pDepthAttachment;
    const VkRenderingAttachmentInfo*    pStencilAttachment;
} VkRenderingInfo;
```

- sType is a VkStructureType value identifying this structure.
- pNext is NULL or a pointer to a structure extending this structure.
- flags is a bitmask of VkRenderingFlagBits.
- renderArea is the render area that is affected by the render pass instance.
- layerCount is the number of layers rendered to in each attachment when viewMask is 0.
- viewMask is the view mask indicating the indices of attachment layers that will be rendered when it is not 0.
- colorAttachmentCount is the number of elements in pColorAttachments.
- pColorAttachments is a pointer to an array of colorAttachmentCount VkRenderingAttachmentInfo structures describing any color attachments used.
- pDepthAttachment is a pointer to a VkRenderingAttachmentInfo structure describing a depth attachment.
- pStencilAttachment is a pointer to a VkRenderingAttachmentInfo structure describing a stencil attachment.

If viewMask is not 0, multiview is enabled.

If there is an instance of VkDeviceGroupRenderPassBeginInfo included in the pNext chain and its deviceRenderAreaCount member is not 0, then renderArea is ignored, and the render area is defined per-device by that structure.

Each element of the pColorAttachments array corresponds to an output location in the shader, i.e. if the shader declares an output variable decorated with a Location value of **X**, then it uses the attachment provided in pColorAttachments[**X**]. If the imageView member of any element of pColorAttachments is VK_NULL_HANDLE, writes to the corresponding location by a fragment are discarded.

Valid Usage

- VUID-VkRenderingInfo-viewMask-06069
  If `viewMask` is `0`, `layerCount` **must** not be `0`
- VUID-VkRenderingInfo-multisampledRenderToSingleSampled-06857
  `imageView` members of `pDepthAttachment`, `pStencilAttachment`, and elements of `pColorAttachments` that are not VK_NULL_HANDLE **must** have been created with the same `sampleCount`
- VUID-VkRenderingInfo-imageView-09429
  `imageView` members of elements of `pColorAttachments` that are not VK_NULL_HANDLE **must** have been created with the same `sampleCount`
- VUID-VkRenderingInfo-None-08994
  If VkDeviceGroupRenderPassBeginInfo::`deviceRenderAreaCount` is 0, `renderArea.extent.width` **must** be greater than 0
- VUID-VkRenderingInfo-None-08995
  If VkDeviceGroupRenderPassBeginInfo::`deviceRenderAreaCount` is 0, `renderArea.extent.height` **must** be greater than 0
- VUID-VkRenderingInfo-pNext-06077
  If the `pNext` chain does not contain VkDeviceGroupRenderPassBeginInfo or its `deviceRenderAreaCount` member is equal to 0, `renderArea.offset.x` **must** be greater than or equal to 0
- VUID-VkRenderingInfo-pNext-06078
  If the `pNext` chain does not contain VkDeviceGroupRenderPassBeginInfo or its `deviceRenderAreaCount` member is equal to 0, `renderArea.offset.y` **must** be greater than or equal to 0
- VUID-VkRenderingInfo-pNext-07815
  If the `pNext` chain does not contain VkDeviceGroupRenderPassBeginInfo or its `deviceRenderAreaCount` member is equal to 0, the sum of `renderArea.extent.width` and `renderArea.offset.x` **must** be less than or equal to `maxFramebufferWidth`
- VUID-VkRenderingInfo-pNext-07816
  If the `pNext` chain does not contain VkDeviceGroupRenderPassBeginInfo or its `deviceRenderAreaCount` member is equal to 0, the sum of `renderArea.extent.height` and `renderArea.offset.y` **must** be less than or equal to `maxFramebufferHeight`
- VUID-VkRenderingInfo-pNext-06079
  If the `pNext` chain does not contain VkDeviceGroupRenderPassBeginInfo or its `deviceRenderAreaCount` member is equal to 0, the width of the `imageView` member of any element of `pColorAttachments`, `pDepthAttachment`, or `pStencilAttachment` that is not VK_NULL_HANDLE **must** be greater than or equal to `renderArea.offset.x` + `renderArea.extent.width`
- VUID-VkRenderingInfo-pNext-06080
  If the `pNext` chain does not contain VkDeviceGroupRenderPassBeginInfo or its `deviceRenderAreaCount` member is equal to 0, the height of the `imageView` member of any element of `pColorAttachments`, `pDepthAttachment`, or `pStencilAttachment` that is not

VK_NULL_HANDLE **must** be greater than or equal to `renderArea.offset.y` + `renderArea.extent.height`

- VUID-VkRenderingInfo-pNext-06083
  If the `pNext` chain contains VkDeviceGroupRenderPassBeginInfo, the width of the `imageView` member of any element of `pColorAttachments`, `pDepthAttachment`, or `pStencilAttachment` that is not VK_NULL_HANDLE **must** be greater than or equal to the sum of the `offset.x` and `extent.width` members of each element of `pDeviceRenderAreas`
- VUID-VkRenderingInfo-pNext-06084
  If the `pNext` chain contains VkDeviceGroupRenderPassBeginInfo, the height of the `imageView` member of any element of `pColorAttachments`, `pDepthAttachment`, or `pStencilAttachment` that is not VK_NULL_HANDLE **must** be greater than or equal to the sum of the `offset.y` and `extent.height` members of each element of `pDeviceRenderAreas`
- VUID-VkRenderingInfo-pDepthAttachment-06085
  If neither `pDepthAttachment` or `pStencilAttachment` are `NULL` and the `imageView` member of either structure is not VK_NULL_HANDLE, the `imageView` member of each structure **must** be the same
- VUID-VkRenderingInfo-pDepthAttachment-06086
  If neither `pDepthAttachment` or `pStencilAttachment` are `NULL`, and the `resolveMode` member of each is not `VK_RESOLVE_MODE_NONE`, the `resolveImageView` member of each structure **must** be the same
- VUID-VkRenderingInfo-colorAttachmentCount-06087
  If `colorAttachmentCount` is not `0` and the `imageView` member of an element of `pColorAttachments` is not VK_NULL_HANDLE, that `imageView` **must** have been created with `VK_IMAGE_USAGE_COLOR_ATTACHMENT_BIT`
- VUID-VkRenderingInfo-colorAttachmentCount-09476
  If `colorAttachmentCount` is not `0` and there is an element of `pColorAttachments` with its `imageView` member not VK_NULL_HANDLE, and its `resolveMode` member not set to `VK_RESOLVE_MODE_NONE`, the `resolveImageView` member of that element of `pColorAttachments` **must** have been created with `VK_IMAGE_USAGE_COLOR_ATTACHMENT_BIT`
- VUID-VkRenderingInfo-pDepthAttachment-06547
  If `pDepthAttachment` is not `NULL` and `pDepthAttachment->imageView` is not VK_NULL_HANDLE, `pDepthAttachment->imageView` **must** have been created with a format that includes a depth component
- VUID-VkRenderingInfo-pDepthAttachment-06088
  If `pDepthAttachment` is not `NULL` and `pDepthAttachment->imageView` is not VK_NULL_HANDLE, `pDepthAttachment->imageView` **must** have been created with `VK_IMAGE_USAGE_DEPTH_STENCIL_ATTACHMENT_BIT`
- VUID-VkRenderingInfo-pDepthAttachment-09477
  If `pDepthAttachment` is not `NULL` and `pDepthAttachment->resolveMode` is not `VK_RESOLVE_MODE_NONE`, `pDepthAttachment->resolveImageView` **must** have been created with `VK_IMAGE_USAGE_DEPTH_STENCIL_ATTACHMENT_BIT`
- VUID-VkRenderingInfo-pStencilAttachment-06548
  If `pStencilAttachment` is not `NULL` and `pStencilAttachment->imageView` is not VK_NULL_HANDLE, `pStencilAttachment->imageView` **must** have been created with a format

that includes a stencil aspect

- VUID-VkRenderingInfo-pStencilAttachment-06089
  If `pStencilAttachment` is not `NULL` and `pStencilAttachment->imageView` is not `VK_NULL_HANDLE`, `pStencilAttachment->imageView` **must** have been created with a stencil usage including `VK_IMAGE_USAGE_DEPTH_STENCIL_ATTACHMENT_BIT`
- VUID-VkRenderingInfo-pStencilAttachment-09478
  If `pStencilAttachment` is not `NULL` and `pStencilAttachment->resolveMode` is not `VK_RESOLVE_MODE_NONE`, `pStencilAttachment->resolveImageView` **must** have been created with `VK_IMAGE_USAGE_DEPTH_STENCIL_ATTACHMENT_BIT`
- VUID-VkRenderingInfo-colorAttachmentCount-06090
  If `colorAttachmentCount` is not `0` and the `imageView` member of an element of `pColorAttachments` is not `VK_NULL_HANDLE`, the `layout` member of that element of `pColorAttachments` **must** not be `VK_IMAGE_LAYOUT_DEPTH_STENCIL_ATTACHMENT_OPTIMAL` or `VK_IMAGE_LAYOUT_DEPTH_STENCIL_READ_ONLY_OPTIMAL`
- VUID-VkRenderingInfo-colorAttachmentCount-06091
  If `colorAttachmentCount` is not `0` and the `imageView` member of an element of `pColorAttachments` is not `VK_NULL_HANDLE`, if the `resolveMode` member of that element of `pColorAttachments` is not `VK_RESOLVE_MODE_NONE`, its `resolveImageLayout` member **must** not be `VK_IMAGE_LAYOUT_DEPTH_STENCIL_ATTACHMENT_OPTIMAL` or `VK_IMAGE_LAYOUT_DEPTH_STENCIL_READ_ONLY_OPTIMAL`
- VUID-VkRenderingInfo-pDepthAttachment-06092
  If `pDepthAttachment` is not `NULL` and `pDepthAttachment->imageView` is not `VK_NULL_HANDLE`, `pDepthAttachment->layout` **must** not be `VK_IMAGE_LAYOUT_COLOR_ATTACHMENT_OPTIMAL`
- VUID-VkRenderingInfo-pDepthAttachment-06093
  If `pDepthAttachment` is not `NULL`, `pDepthAttachment->imageView` is not `VK_NULL_HANDLE`, and `pDepthAttachment->resolveMode` is not `VK_RESOLVE_MODE_NONE`, `pDepthAttachment->resolveImageLayout` **must** not be `VK_IMAGE_LAYOUT_COLOR_ATTACHMENT_OPTIMAL`
- VUID-VkRenderingInfo-pStencilAttachment-06094
  If `pStencilAttachment` is not `NULL` and `pStencilAttachment->imageView` is not `VK_NULL_HANDLE`, `pStencilAttachment->layout` **must** not be `VK_IMAGE_LAYOUT_COLOR_ATTACHMENT_OPTIMAL`
- VUID-VkRenderingInfo-pStencilAttachment-06095
  If `pStencilAttachment` is not `NULL`, `pStencilAttachment->imageView` is not `VK_NULL_HANDLE`, and `pStencilAttachment->resolveMode` is not `VK_RESOLVE_MODE_NONE`, `pStencilAttachment->resolveImageLayout` **must** not be `VK_IMAGE_LAYOUT_COLOR_ATTACHMENT_OPTIMAL`
- VUID-VkRenderingInfo-colorAttachmentCount-06096
  If `colorAttachmentCount` is not `0` and the `imageView` member of an element of `pColorAttachments` is not `VK_NULL_HANDLE`, the `layout` member of that element of `pColorAttachments` **must** not be `VK_IMAGE_LAYOUT_DEPTH_READ_ONLY_STENCIL_ATTACHMENT_OPTIMAL` or `VK_IMAGE_LAYOUT_DEPTH_ATTACHMENT_STENCIL_READ_ONLY_OPTIMAL`
- VUID-VkRenderingInfo-colorAttachmentCount-06097
  If `colorAttachmentCount` is not `0` and the `imageView` member of an element of `pColorAttachments` is not `VK_NULL_HANDLE`, if the `resolveMode` member of that element of

pColorAttachments is not VK_RESOLVE_MODE_NONE, its resolveImageLayout member **must** not be VK_IMAGE_LAYOUT_DEPTH_READ_ONLY_STENCIL_ATTACHMENT_OPTIMAL or VK_IMAGE_LAYOUT_DEPTH_ATTACHMENT_STENCIL_READ_ONLY_OPTIMAL

- VUID-VkRenderingInfo-pDepthAttachment-06098
  If pDepthAttachment is not NULL, pDepthAttachment->imageView is not VK_NULL_HANDLE, and pDepthAttachment->resolveMode is not VK_RESOLVE_MODE_NONE, pDepthAttachment->resolveImageLayout **must** not be VK_IMAGE_LAYOUT_DEPTH_READ_ONLY_STENCIL_ATTACHMENT_OPTIMAL
- VUID-VkRenderingInfo-pStencilAttachment-06099
  If pStencilAttachment is not NULL, pStencilAttachment->imageView is not VK_NULL_HANDLE, and pStencilAttachment->resolveMode is not VK_RESOLVE_MODE_NONE, pStencilAttachment->resolveImageLayout **must** not be VK_IMAGE_LAYOUT_DEPTH_ATTACHMENT_STENCIL_READ_ONLY_OPTIMAL
- VUID-VkRenderingInfo-colorAttachmentCount-06100
  If colorAttachmentCount is not 0 and the imageView member of an element of pColorAttachments is not VK_NULL_HANDLE, the layout member of that element of pColorAttachments **must** not be VK_IMAGE_LAYOUT_DEPTH_ATTACHMENT_OPTIMAL, VK_IMAGE_LAYOUT_DEPTH_READ_ONLY_OPTIMAL, VK_IMAGE_LAYOUT_STENCIL_ATTACHMENT_OPTIMAL, or VK_IMAGE_LAYOUT_STENCIL_READ_ONLY_OPTIMAL
- VUID-VkRenderingInfo-colorAttachmentCount-06101
  If colorAttachmentCount is not 0 and the imageView member of an element of pColorAttachments is not VK_NULL_HANDLE, if the resolveMode member of that element of pColorAttachments is not VK_RESOLVE_MODE_NONE, its resolveImageLayout member **must** not be VK_IMAGE_LAYOUT_DEPTH_ATTACHMENT_OPTIMAL, VK_IMAGE_LAYOUT_DEPTH_READ_ONLY_OPTIMAL, VK_IMAGE_LAYOUT_STENCIL_ATTACHMENT_OPTIMAL, or VK_IMAGE_LAYOUT_STENCIL_READ_ONLY_OPTIMAL
- VUID-VkRenderingInfo-pDepthAttachment-07732
  If pDepthAttachment is not NULL and pDepthAttachment->imageView is not VK_NULL_HANDLE, pDepthAttachment->layout **must** not be VK_IMAGE_LAYOUT_STENCIL_ATTACHMENT_OPTIMAL or VK_IMAGE_LAYOUT_STENCIL_READ_ONLY_OPTIMAL
- VUID-VkRenderingInfo-pDepthAttachment-07733
  If pDepthAttachment is not NULL, pDepthAttachment->imageView is not VK_NULL_HANDLE, and pDepthAttachment->resolveMode is not VK_RESOLVE_MODE_NONE, pDepthAttachment->resolveImageLayout **must** not be VK_IMAGE_LAYOUT_STENCIL_ATTACHMENT_OPTIMAL or VK_IMAGE_LAYOUT_STENCIL_READ_ONLY_OPTIMAL
- VUID-VkRenderingInfo-pStencilAttachment-07734
  If pStencilAttachment is not NULL and pStencilAttachment->imageView is not VK_NULL_HANDLE, pStencilAttachment->layout **must** not be VK_IMAGE_LAYOUT_DEPTH_ATTACHMENT_OPTIMAL or VK_IMAGE_LAYOUT_DEPTH_READ_ONLY_OPTIMAL
- VUID-VkRenderingInfo-pStencilAttachment-07735
  If pStencilAttachment is not NULL, pStencilAttachment->imageView is not VK_NULL_HANDLE, and pStencilAttachment->resolveMode is not VK_RESOLVE_MODE_NONE, pStencilAttachment->resolveImageLayout **must** not be VK_IMAGE_LAYOUT_DEPTH_ATTACHMENT_OPTIMAL or VK_IMAGE_LAYOUT_DEPTH_READ_ONLY_OPTIMAL

- VUID-VkRenderingInfo-pDepthAttachment-06102
  If pDepthAttachment is not NULL and pDepthAttachment->imageView is not VK_NULL_HANDLE, pDepthAttachment->resolveMode **must** be one of the bits set in VkPhysicalDeviceDepthStencilResolveProperties::supportedDepthResolveModes
- VUID-VkRenderingInfo-pStencilAttachment-06103
  If pStencilAttachment is not NULL and pStencilAttachment->imageView is not VK_NULL_HANDLE, pStencilAttachment->resolveMode **must** be one of the bits set in VkPhysicalDeviceDepthStencilResolveProperties::supportedStencilResolveModes
- VUID-VkRenderingInfo-pDepthAttachment-06104
  If pDepthAttachment or pStencilAttachment are both not NULL, pDepthAttachment->imageView and pStencilAttachment->imageView are both not VK_NULL_HANDLE, and VkPhysicalDeviceDepthStencilResolveProperties::independentResolveNone is VK_FALSE, the resolveMode of both structures **must** be the same value
- VUID-VkRenderingInfo-pDepthAttachment-06105
  If pDepthAttachment or pStencilAttachment are both not NULL, pDepthAttachment->imageView and pStencilAttachment->imageView are both not VK_NULL_HANDLE, VkPhysicalDeviceDepthStencilResolveProperties::independentResolve is VK_FALSE, and the resolveMode of neither structure is VK_RESOLVE_MODE_NONE, the resolveMode of both structures **must** be the same value
- VUID-VkRenderingInfo-colorAttachmentCount-06106
  colorAttachmentCount **must** be less than or equal to VkPhysicalDeviceLimits::maxColorAttachments
- VUID-VkRenderingInfo-multiview-06127
  If the multiview feature is not enabled, viewMask **must** be 0
- VUID-VkRenderingInfo-viewMask-06128
  The index of the most significant bit in viewMask **must** be less than maxMultiviewViewCount
- VUID-VkRenderingInfo-None-09044
  Valid attachments specified by this structure **must** not be bound to memory locations that are bound to any other valid attachments specified by this structure
- VUID-VkRenderingInfo-colorAttachmentCount-09479
  If colorAttachmentCount is not 0 and the imageView member of an element of pColorAttachments is not VK_NULL_HANDLE, that imageView **must** have been created with the identity swizzle
- VUID-VkRenderingInfo-colorAttachmentCount-09480
  If colorAttachmentCount is not 0, and there is an element of pColorAttachments with its imageView member not set to VK_NULL_HANDLE and its resolveMode member not set to VK_RESOLVE_MODE_NONE, the resolveImageView member of that element of pColorAttachments **must** have been created with the identity swizzle
- VUID-VkRenderingInfo-pDepthAttachment-09481
  If pDepthAttachment is not NULL and pDepthAttachment->imageView is not VK_NULL_HANDLE, pDepthAttachment->imageView **must** have been created with the identity swizzle
- VUID-VkRenderingInfo-pDepthAttachment-09482
  If pDepthAttachment is not NULL, pDepthAttachment->imageView is not VK_NULL_HANDLE, and

pDepthAttachment->resolveMode is not VK_RESOLVE_MODE_NONE, pDepthAttachment->resolveImageView **must** have been created with the identity swizzle

- VUID-VkRenderingInfo-pStencilAttachment-09483
  If pStencilAttachment is not NULL and pStencilAttachment->imageView is not VK_NULL_HANDLE, pStencilAttachment->imageView **must** have been created with the identity swizzle
- VUID-VkRenderingInfo-pStencilAttachment-09484
  If pStencilAttachment is not NULL, pStencilAttachment->imageView is not VK_NULL_HANDLE, and pStencilAttachment->resolveMode is not VK_RESOLVE_MODE_NONE, pStencilAttachment->resolveImageView **must** have been created with the identity swizzle

Valid Usage (Implicit)

- VUID-VkRenderingInfo-sType-sType
  sType **must** be VK_STRUCTURE_TYPE_RENDERING_INFO
- VUID-VkRenderingInfo-pNext-pNext
  pNext **must** be NULL or a pointer to a valid instance of VkDeviceGroupRenderPassBeginInfo
- VUID-VkRenderingInfo-sType-unique
  The sType value of each struct in the pNext chain **must** be unique
- VUID-VkRenderingInfo-flags-parameter
  flags **must** be a valid combination of VkRenderingFlagBits values
- VUID-VkRenderingInfo-pColorAttachments-parameter
  If colorAttachmentCount is not 0, pColorAttachments **must** be a valid pointer to an array of colorAttachmentCount valid VkRenderingAttachmentInfo structures
- VUID-VkRenderingInfo-pDepthAttachment-parameter
  If pDepthAttachment is not NULL, pDepthAttachment **must** be a valid pointer to a valid VkRenderingAttachmentInfo structure
- VUID-VkRenderingInfo-pStencilAttachment-parameter
  If pStencilAttachment is not NULL, pStencilAttachment **must** be a valid pointer to a valid VkRenderingAttachmentInfo structure

Bits which **can** be set in VkRenderingInfo::flags describing additional properties of the render pass are:

```
// Provided by VK_VERSION_1_3
typedef enum VkRenderingFlagBits {
    VK_RENDERING_CONTENTS_SECONDARY_COMMAND_BUFFERS_BIT = 0x00000001,
    VK_RENDERING_SUSPENDING_BIT = 0x00000002,
    VK_RENDERING_RESUMING_BIT = 0x00000004,
    VK_RENDERING_CONTENTS_SECONDARY_COMMAND_BUFFERS_BIT_KHR =
VK_RENDERING_CONTENTS_SECONDARY_COMMAND_BUFFERS_BIT,
    VK_RENDERING_SUSPENDING_BIT_KHR = VK_RENDERING_SUSPENDING_BIT,
    VK_RENDERING_RESUMING_BIT_KHR = VK_RENDERING_RESUMING_BIT,
} VkRenderingFlagBits;
```

- VK_RENDERING_CONTENTS_SECONDARY_COMMAND_BUFFERS_BIT specifies that draw calls for the render pass instance will be recorded in secondary command buffers.
- VK_RENDERING_RESUMING_BIT specifies that the render pass instance is resuming an earlier suspended render pass instance.
- VK_RENDERING_SUSPENDING_BIT specifies that the render pass instance will be suspended.

The contents of pRenderingInfo **must** match between suspended render pass instances and the render pass instances that resume them, other than the presence or absence of the VK_RENDERING_RESUMING_BIT, VK_RENDERING_SUSPENDING_BIT, and VK_RENDERING_CONTENTS_SECONDARY_COMMAND_BUFFERS_BIT flags. No action or synchronization commands, or other render pass instances, are allowed between suspending and resuming render pass instances.

```
// Provided by VK_VERSION_1_3
typedef VkFlags VkRenderingFlags;
```

VkRenderingFlags is a bitmask type for setting a mask of zero or more VkRenderingFlagBits.

The VkRenderingAttachmentInfo structure is defined as:

```
// Provided by VK_VERSION_1_3
typedef struct VkRenderingAttachmentInfo {
    VkStructureType          sType;
    const void*              pNext;
    VkImageView              imageView;
    VkImageLayout            imageLayout;
    VkResolveModeFlagBits    resolveMode;
    VkImageView              resolveImageView;
    VkImageLayout            resolveImageLayout;
    VkAttachmentLoadOp       loadOp;
    VkAttachmentStoreOp      storeOp;
    VkClearValue             clearValue;
} VkRenderingAttachmentInfo;
```

- sType is a VkStructureType value identifying this structure.

- pNext is NULL or a pointer to a structure extending this structure.
- imageView is the image view that will be used for rendering.
- imageLayout is the layout that imageView will be in during rendering.
- resolveMode is a VkResolveModeFlagBits value defining how data written to imageView will be resolved into resolveImageView.
- resolveImageView is an image view used to write resolved data at the end of rendering.
- resolveImageLayout is the layout that resolveImageView will be in during rendering.
- loadOp is a VkAttachmentLoadOp value defining the load operation for the attachment.
- storeOp is a VkAttachmentStoreOp value defining the store operation for the attachment.
- clearValue is a VkClearValue structure defining values used to clear imageView when loadOp is VK_ATTACHMENT_LOAD_OP_CLEAR.

Values in imageView are loaded and stored according to the values of loadOp and storeOp, within the render area for each device specified in VkRenderingInfo. If imageView is VK_NULL_HANDLE, other members of this structure are ignored; writes to this attachment will be discarded, and no load, store, or multisample resolve operations will be performed.

If resolveMode is VK_RESOLVE_MODE_NONE, then resolveImageView is ignored. If resolveMode is not VK_RESOLVE_MODE_NONE, and resolveImageView is not VK_NULL_HANDLE, a render pass multisample resolve operation is defined for the attachment subresource.

NOTE	The resolve mode and store operation are independent; it is valid to write both resolved and unresolved values, and equally valid to discard the unresolved values while writing the resolved ones.

Store and resolve operations are only performed at the end of a render pass instance that does not specify the VK_RENDERING_SUSPENDING_BIT_KHR flag.

Load operations are only performed at the beginning of a render pass instance that does not specify the VK_RENDERING_RESUMING_BIT_KHR flag.

Image contents at the end of a suspended render pass instance remain defined for access by a resuming render pass instance.

Valid Usage

- VUID-VkRenderingAttachmentInfo-imageView-06129
  If imageView is not VK_NULL_HANDLE and has a non-integer color format, resolveMode **must** be VK_RESOLVE_MODE_NONE or VK_RESOLVE_MODE_AVERAGE_BIT
- VUID-VkRenderingAttachmentInfo-imageView-06130
  If imageView is not VK_NULL_HANDLE and has an integer color format, resolveMode **must** be VK_RESOLVE_MODE_NONE or VK_RESOLVE_MODE_SAMPLE_ZERO_BIT
- VUID-VkRenderingAttachmentInfo-imageView-06861
  imageView **must** not have a sample count of VK_SAMPLE_COUNT_1_BIT if all of the following

hold:

  - imageView is not VK_NULL_HANDLE
  - resolveMode is not VK_RESOLVE_MODE_NONE

- VUID-VkRenderingAttachmentInfo-imageView-06862
  resolveImageView **must** not be VK_NULL_HANDLE if all of the following hold:

  - imageView is not VK_NULL_HANDLE
  - resolveMode is not VK_RESOLVE_MODE_NONE

- VUID-VkRenderingAttachmentInfo-imageView-06864
  If imageView is not VK_NULL_HANDLE, resolveImageView is not VK_NULL_HANDLE, and resolveMode is not VK_RESOLVE_MODE_NONE, resolveImageView **must** have a sample count of VK_SAMPLE_COUNT_1_BIT

- VUID-VkRenderingAttachmentInfo-imageView-06865
  If imageView is not VK_NULL_HANDLE, resolveImageView is not VK_NULL_HANDLE, and resolveMode is not VK_RESOLVE_MODE_NONE, imageView and resolveImageView **must** have the same VkFormat

- VUID-VkRenderingAttachmentInfo-imageView-06135
  If imageView is not VK_NULL_HANDLE, imageLayout **must** not be VK_IMAGE_LAYOUT_UNDEFINED, VK_IMAGE_LAYOUT_SHADER_READ_ONLY_OPTIMAL, VK_IMAGE_LAYOUT_TRANSFER_SRC_OPTIMAL, VK_IMAGE_LAYOUT_TRANSFER_DST_OPTIMAL, or VK_IMAGE_LAYOUT_PREINITIALIZED

- VUID-VkRenderingAttachmentInfo-imageView-06136
  If imageView is not VK_NULL_HANDLE and resolveMode is not VK_RESOLVE_MODE_NONE, resolveImageLayout **must** not be VK_IMAGE_LAYOUT_UNDEFINED, VK_IMAGE_LAYOUT_DEPTH_STENCIL_READ_ONLY_OPTIMAL, VK_IMAGE_LAYOUT_SHADER_READ_ONLY_OPTIMAL, VK_IMAGE_LAYOUT_TRANSFER_SRC_OPTIMAL, VK_IMAGE_LAYOUT_TRANSFER_DST_OPTIMAL, or VK_IMAGE_LAYOUT_PREINITIALIZED

- VUID-VkRenderingAttachmentInfo-imageView-06137
  If imageView is not VK_NULL_HANDLE and resolveMode is not VK_RESOLVE_MODE_NONE, resolveImageLayout **must** not be VK_IMAGE_LAYOUT_DEPTH_READ_ONLY_OPTIMAL or VK_IMAGE_LAYOUT_STENCIL_READ_ONLY_OPTIMAL

- VUID-VkRenderingAttachmentInfo-imageView-06142
  If imageView is not VK_NULL_HANDLE and resolveMode is not VK_RESOLVE_MODE_NONE, resolveImageLayout **must** not be VK_IMAGE_LAYOUT_READ_ONLY_OPTIMAL_KHR

Valid Usage (Implicit)

- VUID-VkRenderingAttachmentInfo-sType-sType
  sType **must** be VK_STRUCTURE_TYPE_RENDERING_ATTACHMENT_INFO

- VUID-VkRenderingAttachmentInfo-pNext-pNext
  pNext **must** be NULL

- VUID-VkRenderingAttachmentInfo-imageView-parameter
  If imageView is not VK_NULL_HANDLE, imageView **must** be a valid VkImageView handle

- VUID-VkRenderingAttachmentInfo-imageLayout-parameter
  `imageLayout` **must** be a valid VkImageLayout value
- VUID-VkRenderingAttachmentInfo-resolveMode-parameter
  If `resolveMode` is not `0`, `resolveMode` **must** be a valid VkResolveModeFlagBits value
- VUID-VkRenderingAttachmentInfo-resolveImageView-parameter
  If `resolveImageView` is not VK_NULL_HANDLE, `resolveImageView` **must** be a valid VkImageView handle
- VUID-VkRenderingAttachmentInfo-resolveImageLayout-parameter
  `resolveImageLayout` **must** be a valid VkImageLayout value
- VUID-VkRenderingAttachmentInfo-loadOp-parameter
  `loadOp` **must** be a valid VkAttachmentLoadOp value
- VUID-VkRenderingAttachmentInfo-storeOp-parameter
  `storeOp` **must** be a valid VkAttachmentStoreOp value
- VUID-VkRenderingAttachmentInfo-clearValue-parameter
  `clearValue` **must** be a valid VkClearValue union
- VUID-VkRenderingAttachmentInfo-commonparent
  Both of `imageView`, and `resolveImageView` that are valid handles of non-ignored parameters **must** have been created, allocated, or retrieved from the same VkDevice

To end a render pass instance, call:

```
// Provided by VK_VERSION_1_3
void vkCmdEndRendering(
    VkCommandBuffer                             commandBuffer);
```

- `commandBuffer` is the command buffer in which to record the command.

If the value of `pRenderingInfo->flags` used to begin this render pass instance included `VK_RENDERING_SUSPENDING_BIT`, then this render pass is suspended and will be resumed later in submission order.

Valid Usage

- VUID-vkCmdEndRendering-None-06161
  The current render pass instance **must** have been begun with vkCmdBeginRendering
- VUID-vkCmdEndRendering-commandBuffer-06162
  The current render pass instance **must** have been begun in `commandBuffer`
- VUID-vkCmdEndRendering-None-06999
  If `vkCmdBeginQuery*` was called within the render pass, the corresponding `vkCmdEndQuery*` **must** have been called subsequently within the same subpass

Valid Usage (Implicit)

- VUID-vkCmdEndRendering-commandBuffer-parameter
  `commandBuffer` **must** be a valid VkCommandBuffer handle
- VUID-vkCmdEndRendering-commandBuffer-recording
  `commandBuffer` **must** be in the recording state
- VUID-vkCmdEndRendering-commandBuffer-cmdpool
  The `VkCommandPool` that `commandBuffer` was allocated from **must** support graphics operations
- VUID-vkCmdEndRendering-renderpass
  This command **must** only be called inside of a render pass instance

Host Synchronization

- Host access to `commandBuffer` **must** be externally synchronized
- Host access to the `VkCommandPool` that `commandBuffer` was allocated from **must** be externally synchronized

Command Properties

Command Buffer Levels	Render Pass Scope	Supported Queue Types	Command Type
Primary Secondary	Inside	Graphics	Action State

NOTE For more complex rendering graphs, it is possible to pre-define a static *render pass* object, which as well as allowing draw commands, allows the definition of framebuffer-local dependencies between multiple subpasses. These objects have a lot of setup cost compared to vkCmdBeginRendering, but use of subpass dependencies can confer important performance benefits on some devices.

8.1. Render Pass Objects

A render pass object represents a collection of attachments, subpasses, and dependencies between the subpasses, and describes how the attachments are used over the course of the subpasses.

Render passes are represented by `VkRenderPass` handles:

```
// Provided by VK_VERSION_1_0
VK_DEFINE_NON_DISPATCHABLE_HANDLE(VkRenderPass)
```

An *attachment description* describes the properties of an attachment including its format, sample count, and how its contents are treated at the beginning and end of each render pass instance.

A *subpass* represents a phase of rendering that reads and writes a subset of the attachments in a render pass. Rendering commands are recorded into a particular subpass of a render pass instance.

A *subpass description* describes the subset of attachments that is involved in the execution of a subpass. Each subpass **can** read from some attachments as *input attachments*, write to some as *color attachments* or *depth/stencil attachments*, and perform *multisample resolve operations* to *resolve attachments*. A subpass description **can** also include a set of *preserve attachments*, which are attachments that are not read or written by the subpass but whose contents **must** be preserved throughout the subpass.

A subpass *uses an attachment* if the attachment is a color, depth/stencil, resolve, depth/stencil resolve, or input attachment for that subpass (as determined by the `pColorAttachments`, `pDepthStencilAttachment`, `pResolveAttachments`, VkSubpassDescriptionDepthStencilResolve ::`pDepthStencilResolveAttachment`, and `pInputAttachments` members of VkSubpassDescription, respectively). A subpass does not use an attachment if that attachment is preserved by the subpass. The *first use of an attachment* is in the lowest numbered subpass that uses that attachment. Similarly, the *last use of an attachment* is in the highest numbered subpass that uses that attachment.

The subpasses in a render pass all render to the same dimensions, and fragments for pixel (x,y,layer) in one subpass **can** only read attachment contents written by previous subpasses at that same (x,y,layer) location.

NOTE

By describing a complete set of subpasses in advance, render passes provide the implementation an opportunity to optimize the storage and transfer of attachment data between subpasses.

In practice, this means that subpasses with a simple framebuffer-space dependency **may** be merged into a single tiled rendering pass, keeping the attachment data on-chip for the duration of a render pass instance. However, it is also quite common for a render pass to only contain a single subpass.

Subpass dependencies describe execution and memory dependencies between subpasses.

A *subpass dependency chain* is a sequence of subpass dependencies in a render pass, where the source subpass of each subpass dependency (after the first) equals the destination subpass of the previous dependency.

Execution of subpasses **may** overlap or execute out of order with regards to other subpasses, unless otherwise enforced by an execution dependency. Each subpass only respects submission order for commands recorded in the same subpass, and the vkCmdBeginRenderPass and vkCmdEndRenderPass commands that delimit the render pass - commands within other subpasses are not included. This affects most other implicit ordering guarantees.

A render pass describes the structure of subpasses and attachments independent of any specific image views for the attachments. The specific image views that will be used for the attachments,

and their dimensions, are specified in VkFramebuffer objects. Framebuffers are created with respect to a specific render pass that the framebuffer is compatible with (see Render Pass Compatibility). Collectively, a render pass and a framebuffer define the complete render target state for one or more subpasses as well as the algorithmic dependencies between the subpasses.

The various pipeline stages of the drawing commands for a given subpass **may** execute concurrently and/or out of order, both within and across drawing commands, whilst still respecting pipeline order. However for a given (x,y,layer,sample) sample location, certain per-sample operations are performed in rasterization order.

VK_ATTACHMENT_UNUSED is a constant indicating that a render pass attachment is not used.

```
#define VK_ATTACHMENT_UNUSED              (~0U)
```

8.2. Render Pass Creation

To create a render pass, call:

```
// Provided by VK_VERSION_1_0
VkResult vkCreateRenderPass(
    VkDevice                                    device,
    const VkRenderPassCreateInfo*               pCreateInfo,
    const VkAllocationCallbacks*                pAllocator,
    VkRenderPass*                               pRenderPass);
```

- device is the logical device that creates the render pass.
- pCreateInfo is a pointer to a VkRenderPassCreateInfo structure describing the parameters of the render pass.
- pAllocator controls host memory allocation as described in the Memory Allocation chapter.
- pRenderPass is a pointer to a VkRenderPass handle in which the resulting render pass object is returned.

Valid Usage

- VUID-vkCreateRenderPass-device-10000
  device **must** support at least one queue family with the VK_QUEUE_GRAPHICS_BIT capability

Valid Usage (Implicit)

- VUID-vkCreateRenderPass-device-parameter
  device **must** be a valid VkDevice handle
- VUID-vkCreateRenderPass-pCreateInfo-parameter
  pCreateInfo **must** be a valid pointer to a valid VkRenderPassCreateInfo structure

- VUID-vkCreateRenderPass-pAllocator-parameter
  If `pAllocator` is not `NULL`, `pAllocator` **must** be a valid pointer to a valid VkAllocationCallbacks structure
- VUID-vkCreateRenderPass-pRenderPass-parameter
  `pRenderPass` **must** be a valid pointer to a VkRenderPass handle

Return Codes

Success

- `VK_SUCCESS`

Failure

- `VK_ERROR_OUT_OF_HOST_MEMORY`
- `VK_ERROR_OUT_OF_DEVICE_MEMORY`

The `VkRenderPassCreateInfo` structure is defined as:

```
// Provided by VK_VERSION_1_0
typedef struct VkRenderPassCreateInfo {
    VkStructureType                   sType;
    const void*                       pNext;
    VkRenderPassCreateFlags           flags;
    uint32_t                          attachmentCount;
    const VkAttachmentDescription*    pAttachments;
    uint32_t                          subpassCount;
    const VkSubpassDescription*       pSubpasses;
    uint32_t                          dependencyCount;
    const VkSubpassDependency*        pDependencies;
} VkRenderPassCreateInfo;
```

- `sType` is a VkStructureType value identifying this structure.
- `pNext` is `NULL` or a pointer to a structure extending this structure.
- `flags` is reserved for future use.
- `attachmentCount` is the number of attachments used by this render pass.
- `pAttachments` is a pointer to an array of `attachmentCount` VkAttachmentDescription structures describing the attachments used by the render pass.
- `subpassCount` is the number of subpasses to create.
- `pSubpasses` is a pointer to an array of `subpassCount` VkSubpassDescription structures describing each subpass.
- `dependencyCount` is the number of memory dependencies between pairs of subpasses.
- `pDependencies` is a pointer to an array of `dependencyCount` VkSubpassDependency structures describing dependencies between pairs of subpasses.

NOTE Care should be taken to avoid a data race here; if any subpasses access attachments with overlapping memory locations, and one of those accesses is a write, a subpass dependency needs to be included between them.

Valid Usage

- VUID-VkRenderPassCreateInfo-attachment-00834
  If the `attachment` member of any element of `pInputAttachments`, `pColorAttachments`, `pResolveAttachments` or `pDepthStencilAttachment`, or any element of `pPreserveAttachments` in any element of `pSubpasses` is not `VK_ATTACHMENT_UNUSED`, then it **must** be less than `attachmentCount`
- VUID-VkRenderPassCreateInfo-pAttachments-00836
  For any member of `pAttachments` with a `loadOp` equal to `VK_ATTACHMENT_LOAD_OP_CLEAR`, the first use of that attachment **must** not specify a `layout` equal to `VK_IMAGE_LAYOUT_SHADER_READ_ONLY_OPTIMAL` or `VK_IMAGE_LAYOUT_DEPTH_STENCIL_READ_ONLY_OPTIMAL`
- VUID-VkRenderPassCreateInfo-pAttachments-02511
  For any member of `pAttachments` with a `stencilLoadOp` equal to `VK_ATTACHMENT_LOAD_OP_CLEAR`, the first use of that attachment **must** not specify a `layout` equal to `VK_IMAGE_LAYOUT_SHADER_READ_ONLY_OPTIMAL` or `VK_IMAGE_LAYOUT_DEPTH_STENCIL_READ_ONLY_OPTIMAL`
- VUID-VkRenderPassCreateInfo-pAttachments-01566
  For any member of `pAttachments` with a `loadOp` equal to `VK_ATTACHMENT_LOAD_OP_CLEAR`, the first use of that attachment **must** not specify a `layout` equal to `VK_IMAGE_LAYOUT_DEPTH_READ_ONLY_STENCIL_ATTACHMENT_OPTIMAL`
- VUID-VkRenderPassCreateInfo-pAttachments-01567
  For any member of `pAttachments` with a `stencilLoadOp` equal to `VK_ATTACHMENT_LOAD_OP_CLEAR`, the first use of that attachment **must** not specify a `layout` equal to `VK_IMAGE_LAYOUT_DEPTH_ATTACHMENT_STENCIL_READ_ONLY_OPTIMAL`
- VUID-VkRenderPassCreateInfo-pNext-01926
  If the `pNext` chain includes a VkRenderPassInputAttachmentAspectCreateInfo structure, the `subpass` member of each element of its `pAspectReferences` member **must** be less than `subpassCount`
- VUID-VkRenderPassCreateInfo-pNext-01927
  If the `pNext` chain includes a VkRenderPassInputAttachmentAspectCreateInfo structure, the `inputAttachmentIndex` member of each element of its `pAspectReferences` member **must** be less than the value of `inputAttachmentCount` in the element of `pSubpasses` identified by its `subpass` member
- VUID-VkRenderPassCreateInfo-pNext-01963
  If the `pNext` chain includes a VkRenderPassInputAttachmentAspectCreateInfo structure, for any element of the `pInputAttachments` member of any element of `pSubpasses` where the `attachment` member is not `VK_ATTACHMENT_UNUSED`, the `aspectMask` member of the corresponding element of VkRenderPassInputAttachmentAspectCreateInfo ::`pAspectReferences` **must** only include aspects that are present in images of the format

specified by the element of pAttachments at attachment

- VUID-VkRenderPassCreateInfo-pNext-01928
  If the pNext chain includes a VkRenderPassMultiviewCreateInfo structure, and its subpassCount member is not zero, that member **must** be equal to the value of subpassCount
- VUID-VkRenderPassCreateInfo-pNext-01929
  If the pNext chain includes a VkRenderPassMultiviewCreateInfo structure, if its dependencyCount member is not zero, it **must** be equal to dependencyCount
- VUID-VkRenderPassCreateInfo-pNext-01930
  If the pNext chain includes a VkRenderPassMultiviewCreateInfo structure, for each non-zero element of pViewOffsets, the srcSubpass and dstSubpass members of pDependencies at the same index **must** not be equal
- VUID-VkRenderPassCreateInfo-pNext-02512
  If the pNext chain includes a VkRenderPassMultiviewCreateInfo structure, for any element of pDependencies with a dependencyFlags member that does not include VK_DEPENDENCY_VIEW_LOCAL_BIT, the corresponding element of the pViewOffsets member of that VkRenderPassMultiviewCreateInfo instance **must** be 0
- VUID-VkRenderPassCreateInfo-pNext-02513
  If the pNext chain includes a VkRenderPassMultiviewCreateInfo structure, elements of its pViewMasks member **must** either all be 0, or all not be 0
- VUID-VkRenderPassCreateInfo-pNext-02514
  If the pNext chain includes a VkRenderPassMultiviewCreateInfo structure, and each element of its pViewMasks member is 0, the dependencyFlags member of each element of pDependencies **must** not include VK_DEPENDENCY_VIEW_LOCAL_BIT
- VUID-VkRenderPassCreateInfo-pNext-02515
  If the pNext chain includes a VkRenderPassMultiviewCreateInfo structure, and each element of its pViewMasks member is 0, its correlationMaskCount member **must** be 0
- VUID-VkRenderPassCreateInfo-pDependencies-00837
  For any element of pDependencies, if the srcSubpass is not VK_SUBPASS_EXTERNAL, all stage flags included in the srcStageMask member of that dependency **must** be a pipeline stage supported by the pipeline identified by the pipelineBindPoint member of the source subpass
- VUID-VkRenderPassCreateInfo-pDependencies-00838
  For any element of pDependencies, if the dstSubpass is not VK_SUBPASS_EXTERNAL, all stage flags included in the dstStageMask member of that dependency **must** be a pipeline stage supported by the pipeline identified by the pipelineBindPoint member of the destination subpass
- VUID-VkRenderPassCreateInfo-pDependencies-06866
  For any element of pDependencies, if its srcSubpass is not VK_SUBPASS_EXTERNAL, it **must** be less than subpassCount
- VUID-VkRenderPassCreateInfo-pDependencies-06867
  For any element of pDependencies, if its dstSubpass is not VK_SUBPASS_EXTERNAL, it **must** be less than subpassCount

Valid Usage (Implicit)

- VUID-VkRenderPassCreateInfo-sType-sType
  `sType` **must** be `VK_STRUCTURE_TYPE_RENDER_PASS_CREATE_INFO`
- VUID-VkRenderPassCreateInfo-pNext-pNext
  Each `pNext` member of any structure (including this one) in the `pNext` chain **must** be either `NULL` or a pointer to a valid instance of VkRenderPassInputAttachmentAspectCreateInfo or VkRenderPassMultiviewCreateInfo
- VUID-VkRenderPassCreateInfo-sType-unique
  The `sType` value of each struct in the `pNext` chain **must** be unique
- VUID-VkRenderPassCreateInfo-flags-zerobitmask
  `flags` **must** be `0`
- VUID-VkRenderPassCreateInfo-pAttachments-parameter
  If `attachmentCount` is not `0`, `pAttachments` **must** be a valid pointer to an array of `attachmentCount` valid VkAttachmentDescription structures
- VUID-VkRenderPassCreateInfo-pSubpasses-parameter
  `pSubpasses` **must** be a valid pointer to an array of `subpassCount` valid VkSubpassDescription structures
- VUID-VkRenderPassCreateInfo-pDependencies-parameter
  If `dependencyCount` is not `0`, `pDependencies` **must** be a valid pointer to an array of `dependencyCount` valid VkSubpassDependency structures
- VUID-VkRenderPassCreateInfo-subpassCount-arraylength
  `subpassCount` **must** be greater than `0`

Bits which **can** be set in VkRenderPassCreateInfo::`flags`, describing additional properties of the render pass, are:

```
// Provided by VK_VERSION_1_0
typedef enum VkRenderPassCreateFlagBits {
} VkRenderPassCreateFlagBits;
```

NOTE All bits for this type are defined by extensions, and none of those extensions are enabled in this build of the specification.

```
// Provided by VK_VERSION_1_0
typedef VkFlags VkRenderPassCreateFlags;
```

`VkRenderPassCreateFlags` is a bitmask type for setting a mask of zero or more VkRenderPassCreateFlagBits.

If the VkRenderPassCreateInfo::`pNext` chain includes a `VkRenderPassMultiviewCreateInfo` structure, then that structure includes an array of view masks, view offsets, and correlation masks for the

render pass.

The VkRenderPassMultiviewCreateInfo structure is defined as:

```
// Provided by VK_VERSION_1_1
typedef struct VkRenderPassMultiviewCreateInfo {
    VkStructureType    sType;
    const void*        pNext;
    uint32_t           subpassCount;
    const uint32_t*    pViewMasks;
    uint32_t           dependencyCount;
    const int32_t*     pViewOffsets;
    uint32_t           correlationMaskCount;
    const uint32_t*    pCorrelationMasks;
} VkRenderPassMultiviewCreateInfo;
```

- sType is a VkStructureType value identifying this structure.
- pNext is NULL or a pointer to a structure extending this structure.
- subpassCount is zero or the number of subpasses in the render pass.
- pViewMasks is a pointer to an array of subpassCount view masks, where each mask is a bitfield of view indices describing which views rendering is broadcast to in each subpass, when multiview is enabled. If subpassCount is zero, each view mask is treated as zero.
- dependencyCount is zero or the number of dependencies in the render pass.
- pViewOffsets is a pointer to an array of dependencyCount view offsets, one for each dependency. If dependencyCount is zero, each dependency's view offset is treated as zero. Each view offset controls which views in the source subpass the views in the destination subpass depend on.
- correlationMaskCount is zero or the number of correlation masks.
- pCorrelationMasks is a pointer to an array of correlationMaskCount view masks indicating sets of views that **may** be more efficient to render concurrently.

When a subpass uses a non-zero view mask, *multiview* functionality is considered to be enabled. Multiview is all-or-nothing for a render pass - that is, either all subpasses **must** have a non-zero view mask (though some subpasses **may** have only one view) or all **must** be zero. Multiview causes all drawing and clear commands in the subpass to behave as if they were broadcast to each view, where a view is represented by one layer of the framebuffer attachments. All draws and clears are broadcast to each *view index* whose bit is set in the view mask. The view index is provided in the ViewIndex shader input variable, and color, depth/stencil, and input attachments all read/write the layer of the framebuffer corresponding to the view index.

If the view mask is zero for all subpasses, multiview is considered to be disabled and all drawing commands execute normally, without this additional broadcasting.

Some implementations **may** not support multiview in conjunction with geometry shaders or tessellation shaders.

When multiview is enabled, the VK_DEPENDENCY_VIEW_LOCAL_BIT bit in a dependency **can** be used to

express a view-local dependency, meaning that each view in the destination subpass depends on a single view in the source subpass. Unlike pipeline barriers, a subpass dependency **can** potentially have a different view mask in the source subpass and the destination subpass. If the dependency is view-local, then each view (dstView) in the destination subpass depends on the view dstView + `pViewOffsets`[dependency] in the source subpass. If there is not such a view in the source subpass, then this dependency does not affect that view in the destination subpass. If the dependency is not view-local, then all views in the destination subpass depend on all views in the source subpass, and the view offset is ignored. A non-zero view offset is not allowed in a self-dependency.

The elements of `pCorrelationMasks` are a set of masks of views indicating that views in the same mask **may** exhibit spatial coherency between the views, making it more efficient to render them concurrently. Correlation masks **must** not have a functional effect on the results of the multiview rendering.

When multiview is enabled, at the beginning of each subpass all non-render pass state is undefined. In particular, each time vkCmdBeginRenderPass or vkCmdNextSubpass is called the graphics pipeline **must** be bound, any relevant descriptor sets or vertex/index buffers **must** be bound, and any relevant dynamic state or push constants **must** be set before they are used.

Valid Usage

- VUID-VkRenderPassMultiviewCreateInfo-pCorrelationMasks-00841
  Each view index **must** not be set in more than one element of `pCorrelationMasks`
- VUID-VkRenderPassMultiviewCreateInfo-multiview-06555
  If the `multiview` feature is not enabled, each element of `pViewMasks` **must** be `0`
- VUID-VkRenderPassMultiviewCreateInfo-pViewMasks-06697
  The index of the most significant bit in each element of `pViewMasks` **must** be less than `maxMultiviewViewCount`

Valid Usage (Implicit)

- VUID-VkRenderPassMultiviewCreateInfo-sType-sType
  `sType` **must** be `VK_STRUCTURE_TYPE_RENDER_PASS_MULTIVIEW_CREATE_INFO`
- VUID-VkRenderPassMultiviewCreateInfo-pViewMasks-parameter
  If `subpassCount` is not `0`, `pViewMasks` **must** be a valid pointer to an array of `subpassCount` `uint32_t` values
- VUID-VkRenderPassMultiviewCreateInfo-pViewOffsets-parameter
  If `dependencyCount` is not `0`, `pViewOffsets` **must** be a valid pointer to an array of `dependencyCount` `int32_t` values
- VUID-VkRenderPassMultiviewCreateInfo-pCorrelationMasks-parameter
  If `correlationMaskCount` is not `0`, `pCorrelationMasks` **must** be a valid pointer to an array of `correlationMaskCount` `uint32_t` values

The `VkAttachmentDescription` structure is defined as:

```
// Provided by VK_VERSION_1_0
typedef struct VkAttachmentDescription {
    VkAttachmentDescriptionFlags    flags;
    VkFormat                        format;
    VkSampleCountFlagBits           samples;
    VkAttachmentLoadOp              loadOp;
    VkAttachmentStoreOp             storeOp;
    VkAttachmentLoadOp              stencilLoadOp;
    VkAttachmentStoreOp             stencilStoreOp;
    VkImageLayout                   initialLayout;
    VkImageLayout                   finalLayout;
} VkAttachmentDescription;
```

- `flags` is a bitmask of VkAttachmentDescriptionFlagBits specifying additional properties of the attachment.
- `format` is a VkFormat value specifying the format of the image view that will be used for the attachment.
- `samples` is a VkSampleCountFlagBits value specifying the number of samples of the image.
- `loadOp` is a VkAttachmentLoadOp value specifying how the contents of color and depth components of the attachment are treated at the beginning of the subpass where it is first used.
- `storeOp` is a VkAttachmentStoreOp value specifying how the contents of color and depth components of the attachment are treated at the end of the subpass where it is last used.
- `stencilLoadOp` is a VkAttachmentLoadOp value specifying how the contents of stencil components of the attachment are treated at the beginning of the subpass where it is first used.
- `stencilStoreOp` is a VkAttachmentStoreOp value specifying how the contents of stencil components of the attachment are treated at the end of the last subpass where it is used.
- `initialLayout` is the layout the attachment image subresource will be in when a render pass instance begins.
- `finalLayout` is the layout the attachment image subresource will be transitioned to when a render pass instance ends.

If the attachment uses a color format, then `loadOp` and `storeOp` are used, and `stencilLoadOp` and `stencilStoreOp` are ignored. If the format has depth and/or stencil components, `loadOp` and `storeOp` apply only to the depth data, while `stencilLoadOp` and `stencilStoreOp` define how the stencil data is handled. `loadOp` and `stencilLoadOp` define the load operations for the attachment. `storeOp` and `stencilStoreOp` define the store operations for the attachment. If an attachment is not used by any subpass, `loadOp`, `storeOp`, `stencilStoreOp`, and `stencilLoadOp` will be ignored for that attachment, and no load or store ops will be performed. However, any transition specified by `initialLayout` and `finalLayout` will still be executed.

If `flags` includes `VK_ATTACHMENT_DESCRIPTION_MAY_ALIAS_BIT`, then the attachment is treated as if it shares physical memory with another attachment in the same render pass. This information limits the ability of the implementation to reorder certain operations (like layout transitions and the `loadOp`) such that it is not improperly reordered against other uses of the same physical memory via a different attachment. This is described in more detail below.

If a render pass uses multiple attachments that alias the same device memory, those attachments **must** each include the VK_ATTACHMENT_DESCRIPTION_MAY_ALIAS_BIT bit in their attachment description flags. Attachments aliasing the same memory occurs in multiple ways:

- Multiple attachments being assigned the same image view as part of framebuffer creation.
- Attachments using distinct image views that correspond to the same image subresource of an image.
- Attachments using views of distinct image subresources which are bound to overlapping memory ranges.

NOTE

Render passes **must** include subpass dependencies (either directly or via a subpass dependency chain) between any two subpasses that operate on the same attachment or aliasing attachments and those subpass dependencies **must** include execution and memory dependencies separating uses of the aliases, if at least one of those subpasses writes to one of the aliases. These dependencies **must** not include the VK_DEPENDENCY_BY_REGION_BIT if the aliases are views of distinct image subresources which overlap in memory.

Multiple attachments that alias the same memory **must** not be used in a single subpass. A given attachment index **must** not be used multiple times in a single subpass, with one exception: two subpass attachments **can** use the same attachment index if at least one use is as an input attachment and neither use is as a resolve or preserve attachment. In other words, the same view **can** be used simultaneously as an input and color or depth/stencil attachment, but **must** not be used as multiple color or depth/stencil attachments nor as resolve or preserve attachments.

If a set of attachments alias each other, then all except the first to be used in the render pass **must** use an initialLayout of VK_IMAGE_LAYOUT_UNDEFINED, since the earlier uses of the other aliases make their contents undefined. Once an alias has been used and a different alias has been used after it, the first alias **must** not be used in any later subpasses. However, an application **can** assign the same image view to multiple aliasing attachment indices, which allows that image view to be used multiple times even if other aliases are used in between.

NOTE

Once an attachment needs the VK_ATTACHMENT_DESCRIPTION_MAY_ALIAS_BIT bit, there **should** be no additional cost of introducing additional aliases, and using these additional aliases **may** allow more efficient clearing of the attachments on multiple uses via VK_ATTACHMENT_LOAD_OP_CLEAR.

Valid Usage

- VUID-VkAttachmentDescription-format-06699
  If format includes a color or depth component and loadOp is VK_ATTACHMENT_LOAD_OP_LOAD, then initialLayout **must** not be VK_IMAGE_LAYOUT_UNDEFINED
- VUID-VkAttachmentDescription-finalLayout-00843
  finalLayout **must** not be VK_IMAGE_LAYOUT_UNDEFINED or VK_IMAGE_LAYOUT_PREINITIALIZED
- VUID-VkAttachmentDescription-format-03280
  If format is a color format, initialLayout **must** not be

VK_IMAGE_LAYOUT_DEPTH_STENCIL_ATTACHMENT_OPTIMAL or VK_IMAGE_LAYOUT_DEPTH_STENCIL_READ_ONLY_OPTIMAL

- VUID-VkAttachmentDescription-format-03281
  If format is a depth/stencil format, initialLayout **must** not be VK_IMAGE_LAYOUT_COLOR_ATTACHMENT_OPTIMAL
- VUID-VkAttachmentDescription-format-03282
  If format is a color format, finalLayout **must** not be VK_IMAGE_LAYOUT_DEPTH_STENCIL_ATTACHMENT_OPTIMAL or VK_IMAGE_LAYOUT_DEPTH_STENCIL_READ_ONLY_OPTIMAL
- VUID-VkAttachmentDescription-format-03283
  If format is a depth/stencil format, finalLayout **must** not be VK_IMAGE_LAYOUT_COLOR_ATTACHMENT_OPTIMAL
- VUID-VkAttachmentDescription-format-06487
  If format is a color format, initialLayout **must** not be VK_IMAGE_LAYOUT_DEPTH_ATTACHMENT_STENCIL_READ_ONLY_OPTIMAL or VK_IMAGE_LAYOUT_DEPTH_READ_ONLY_STENCIL_ATTACHMENT_OPTIMAL
- VUID-VkAttachmentDescription-format-06488
  If format is a color format, finalLayout **must** not be VK_IMAGE_LAYOUT_DEPTH_ATTACHMENT_STENCIL_READ_ONLY_OPTIMAL or VK_IMAGE_LAYOUT_DEPTH_READ_ONLY_STENCIL_ATTACHMENT_OPTIMAL
- VUID-VkAttachmentDescription-separateDepthStencilLayouts-03284
  If the separateDepthStencilLayouts feature is not enabled, initialLayout **must** not be VK_IMAGE_LAYOUT_DEPTH_ATTACHMENT_OPTIMAL, VK_IMAGE_LAYOUT_DEPTH_READ_ONLY_OPTIMAL, VK_IMAGE_LAYOUT_STENCIL_ATTACHMENT_OPTIMAL, or VK_IMAGE_LAYOUT_STENCIL_READ_ONLY_OPTIMAL,
- VUID-VkAttachmentDescription-separateDepthStencilLayouts-03285
  If the separateDepthStencilLayouts feature is not enabled, finalLayout **must** not be VK_IMAGE_LAYOUT_DEPTH_ATTACHMENT_OPTIMAL, VK_IMAGE_LAYOUT_DEPTH_READ_ONLY_OPTIMAL, VK_IMAGE_LAYOUT_STENCIL_ATTACHMENT_OPTIMAL, or VK_IMAGE_LAYOUT_STENCIL_READ_ONLY_OPTIMAL,
- VUID-VkAttachmentDescription-format-03286
  If format is a color format, initialLayout **must** not be VK_IMAGE_LAYOUT_DEPTH_ATTACHMENT_OPTIMAL, VK_IMAGE_LAYOUT_DEPTH_READ_ONLY_OPTIMAL, VK_IMAGE_LAYOUT_STENCIL_ATTACHMENT_OPTIMAL, or VK_IMAGE_LAYOUT_STENCIL_READ_ONLY_OPTIMAL
- VUID-VkAttachmentDescription-format-03287
  If format is a color format, finalLayout **must** not be VK_IMAGE_LAYOUT_DEPTH_ATTACHMENT_OPTIMAL, VK_IMAGE_LAYOUT_DEPTH_READ_ONLY_OPTIMAL, VK_IMAGE_LAYOUT_STENCIL_ATTACHMENT_OPTIMAL, or VK_IMAGE_LAYOUT_STENCIL_READ_ONLY_OPTIMAL
- VUID-VkAttachmentDescription-format-06906
  If format is a depth/stencil format which includes both depth and stencil components, initialLayout **must** not be VK_IMAGE_LAYOUT_STENCIL_ATTACHMENT_OPTIMAL or VK_IMAGE_LAYOUT_STENCIL_READ_ONLY_OPTIMAL

- VUID-VkAttachmentDescription-format-06907
  If `format` is a depth/stencil format which includes both depth and stencil components, `finalLayout` **must** not be `VK_IMAGE_LAYOUT_STENCIL_ATTACHMENT_OPTIMAL` or `VK_IMAGE_LAYOUT_STENCIL_READ_ONLY_OPTIMAL`
- VUID-VkAttachmentDescription-format-03290
  If `format` is a depth/stencil format which includes only the depth component, `initialLayout` **must** not be `VK_IMAGE_LAYOUT_STENCIL_ATTACHMENT_OPTIMAL` or `VK_IMAGE_LAYOUT_STENCIL_READ_ONLY_OPTIMAL`
- VUID-VkAttachmentDescription-format-03291
  If `format` is a depth/stencil format which includes only the depth component, `finalLayout` **must** not be `VK_IMAGE_LAYOUT_STENCIL_ATTACHMENT_OPTIMAL` or `VK_IMAGE_LAYOUT_STENCIL_READ_ONLY_OPTIMAL`
- VUID-VkAttachmentDescription-samples-08745
  `samples` **must** be a valid VkSampleCountFlagBits value that is set in `imageCreateSampleCounts` (as defined in Image Creation Limits) for the given `format`
- VUID-VkAttachmentDescription-format-06698
  `format` **must** not be VK_FORMAT_UNDEFINED
- VUID-VkAttachmentDescription-format-06700
  If `format` includes a stencil component and `stencilLoadOp` is `VK_ATTACHMENT_LOAD_OP_LOAD`, then `initialLayout` **must** not be `VK_IMAGE_LAYOUT_UNDEFINED`
- VUID-VkAttachmentDescription-format-03292
  If `format` is a depth/stencil format which includes only the stencil component, `initialLayout` **must** not be `VK_IMAGE_LAYOUT_DEPTH_ATTACHMENT_OPTIMAL` or `VK_IMAGE_LAYOUT_DEPTH_READ_ONLY_OPTIMAL`
- VUID-VkAttachmentDescription-format-03293
  If `format` is a depth/stencil format which includes only the stencil component, `finalLayout` **must** not be `VK_IMAGE_LAYOUT_DEPTH_ATTACHMENT_OPTIMAL` or `VK_IMAGE_LAYOUT_DEPTH_READ_ONLY_OPTIMAL`
- VUID-VkAttachmentDescription-format-06242
  If `format` is a depth/stencil format which includes both depth and stencil components, `initialLayout` **must** not be `VK_IMAGE_LAYOUT_DEPTH_ATTACHMENT_OPTIMAL` or `VK_IMAGE_LAYOUT_DEPTH_READ_ONLY_OPTIMAL`
- VUID-VkAttachmentDescription-format-06243
  If `format` is a depth/stencil format which includes both depth and stencil components, `finalLayout` **must** not be `VK_IMAGE_LAYOUT_DEPTH_ATTACHMENT_OPTIMAL` or `VK_IMAGE_LAYOUT_DEPTH_READ_ONLY_OPTIMAL`

Valid Usage (Implicit)

- VUID-VkAttachmentDescription-flags-parameter
  `flags` **must** be a valid combination of VkAttachmentDescriptionFlagBits values
- VUID-VkAttachmentDescription-format-parameter
  `format` **must** be a valid VkFormat value

- VUID-VkAttachmentDescription-samples-parameter
  `samples` **must** be a valid VkSampleCountFlagBits value
- VUID-VkAttachmentDescription-loadOp-parameter
  `loadOp` **must** be a valid VkAttachmentLoadOp value
- VUID-VkAttachmentDescription-storeOp-parameter
  `storeOp` **must** be a valid VkAttachmentStoreOp value
- VUID-VkAttachmentDescription-stencilLoadOp-parameter
  `stencilLoadOp` **must** be a valid VkAttachmentLoadOp value
- VUID-VkAttachmentDescription-stencilStoreOp-parameter
  `stencilStoreOp` **must** be a valid VkAttachmentStoreOp value
- VUID-VkAttachmentDescription-initialLayout-parameter
  `initialLayout` **must** be a valid VkImageLayout value
- VUID-VkAttachmentDescription-finalLayout-parameter
  `finalLayout` **must** be a valid VkImageLayout value

Bits which **can** be set in VkAttachmentDescription::`flags`, describing additional properties of the attachment, are:

```
// Provided by VK_VERSION_1_0
typedef enum VkAttachmentDescriptionFlagBits {
    VK_ATTACHMENT_DESCRIPTION_MAY_ALIAS_BIT = 0x00000001,
} VkAttachmentDescriptionFlagBits;
```

- `VK_ATTACHMENT_DESCRIPTION_MAY_ALIAS_BIT` specifies that the attachment aliases the same device memory as other attachments.

```
// Provided by VK_VERSION_1_0
typedef VkFlags VkAttachmentDescriptionFlags;
```

`VkAttachmentDescriptionFlags` is a bitmask type for setting a mask of zero or more VkAttachmentDescriptionFlagBits.

The `VkRenderPassInputAttachmentAspectCreateInfo` structure is defined as:

```
// Provided by VK_VERSION_1_1
typedef struct VkRenderPassInputAttachmentAspectCreateInfo {
    VkStructureType                              sType;
    const void*                                  pNext;
    uint32_t                                     aspectReferenceCount;
    const VkInputAttachmentAspectReference*      pAspectReferences;
} VkRenderPassInputAttachmentAspectCreateInfo;
```

- `sType` is a VkStructureType value identifying this structure.

- `pNext` is `NULL` or a pointer to a structure extending this structure.
- `aspectReferenceCount` is the number of elements in the `pAspectReferences` array.
- `pAspectReferences` is a pointer to an array of `aspectReferenceCount` VkInputAttachmentAspectReference structures containing a mask describing which aspect(s) **can** be accessed for a given input attachment within a given subpass.

To specify which aspects of an input attachment **can** be read, add a VkRenderPassInputAttachmentAspectCreateInfo structure to the `pNext` chain of the VkRenderPassCreateInfo structure:

An application **can** access any aspect of an input attachment that does not have a specified aspect mask in the `pAspectReferences` array. Otherwise, an application **must** not access aspect(s) of an input attachment other than those in its specified aspect mask.

Valid Usage (Implicit)

- VUID-VkRenderPassInputAttachmentAspectCreateInfo-sType-sType
  `sType` **must** be `VK_STRUCTURE_TYPE_RENDER_PASS_INPUT_ATTACHMENT_ASPECT_CREATE_INFO`
- VUID-VkRenderPassInputAttachmentAspectCreateInfo-pAspectReferences-parameter
  `pAspectReferences` **must** be a valid pointer to an array of `aspectReferenceCount` valid VkInputAttachmentAspectReference structures
- VUID-VkRenderPassInputAttachmentAspectCreateInfo-aspectReferenceCount-arraylength
  `aspectReferenceCount` **must** be greater than `0`

The `VkInputAttachmentAspectReference` structure is defined as:

```
// Provided by VK_VERSION_1_1
typedef struct VkInputAttachmentAspectReference {
    uint32_t              subpass;
    uint32_t              inputAttachmentIndex;
    VkImageAspectFlags    aspectMask;
} VkInputAttachmentAspectReference;
```

- `subpass` is an index into the `pSubpasses` array of the parent `VkRenderPassCreateInfo` structure.
- `inputAttachmentIndex` is an index into the `pInputAttachments` of the specified subpass.
- `aspectMask` is a mask of which aspect(s) **can** be accessed within the specified subpass.

This structure specifies an aspect mask for a specific input attachment of a specific subpass in the render pass.

`subpass` and `inputAttachmentIndex` index into the render pass as:

```
pCreateInfo->pSubpasses[subpass].pInputAttachments[inputAttachmentIndex]
```

Valid Usage

- VUID-VkInputAttachmentAspectReference-aspectMask-01964
  `aspectMask` **must** not include `VK_IMAGE_ASPECT_METADATA_BIT`

Valid Usage (Implicit)

- VUID-VkInputAttachmentAspectReference-aspectMask-parameter
  `aspectMask` **must** be a valid combination of VkImageAspectFlagBits values
- VUID-VkInputAttachmentAspectReference-aspectMask-requiredbitmask
  `aspectMask` **must** not be `0`

The `VkSubpassDescription` structure is defined as:

```
// Provided by VK_VERSION_1_0
typedef struct VkSubpassDescription {
    VkSubpassDescriptionFlags       flags;
    VkPipelineBindPoint             pipelineBindPoint;
    uint32_t                        inputAttachmentCount;
    const VkAttachmentReference*    pInputAttachments;
    uint32_t                        colorAttachmentCount;
    const VkAttachmentReference*    pColorAttachments;
    const VkAttachmentReference*    pResolveAttachments;
    const VkAttachmentReference*    pDepthStencilAttachment;
    uint32_t                        preserveAttachmentCount;
    const uint32_t*                 pPreserveAttachments;
} VkSubpassDescription;
```

- `flags` is a bitmask of VkSubpassDescriptionFlagBits specifying usage of the subpass.
- `pipelineBindPoint` is a VkPipelineBindPoint value specifying the pipeline type supported for this subpass.
- `inputAttachmentCount` is the number of input attachments.
- `pInputAttachments` is a pointer to an array of VkAttachmentReference structures defining the input attachments for this subpass and their layouts.
- `colorAttachmentCount` is the number of color attachments.
- `pColorAttachments` is a pointer to an array of `colorAttachmentCount` VkAttachmentReference structures defining the color attachments for this subpass and their layouts.
- `pResolveAttachments` is `NULL` or a pointer to an array of `colorAttachmentCount` VkAttachmentReference structures defining the resolve attachments for this subpass and their layouts.
- `pDepthStencilAttachment` is a pointer to a VkAttachmentReference structure specifying the depth/stencil attachment for this subpass and its layout.

- `preserveAttachmentCount` is the number of preserved attachments.
- `pPreserveAttachments` is a pointer to an array of `preserveAttachmentCount` render pass attachment indices identifying attachments that are not used by this subpass, but whose contents **must** be preserved throughout the subpass.

Each element of the `pInputAttachments` array corresponds to an input attachment index in a fragment shader, i.e. if a shader declares an image variable decorated with a `InputAttachmentIndex` value of **X**, then it uses the attachment provided in `pInputAttachments`[**X**]. Input attachments **must** also be bound to the pipeline in a descriptor set. If the `attachment` member of any element of `pInputAttachments` is `VK_ATTACHMENT_UNUSED`, the application **must** not read from the corresponding input attachment index. Fragment shaders **can** use subpass input variables to access the contents of an input attachment at the fragment's (x, y, layer) framebuffer coordinates.

Each element of the `pColorAttachments` array corresponds to an output location in the shader, i.e. if the shader declares an output variable decorated with a `Location` value of **X**, then it uses the attachment provided in `pColorAttachments`[**X**]. If the `attachment` member of any element of `pColorAttachments` is `VK_ATTACHMENT_UNUSED`, then writes to the corresponding location by a fragment shader are discarded.

If `pResolveAttachments` is not `NULL`, each of its elements corresponds to a color attachment (the element in `pColorAttachments` at the same index), and a multisample resolve operation is defined for each attachment unless the resolve attachment index is `VK_ATTACHMENT_UNUSED`.

Similarly, if VkSubpassDescriptionDepthStencilResolve::`pDepthStencilResolveAttachment` is not `NULL` and does not have the value `VK_ATTACHMENT_UNUSED`, it corresponds to the depth/stencil attachment in `pDepthStencilAttachment`, and multisample resolve operation for depth and stencil are defined by VkSubpassDescriptionDepthStencilResolve::`depthResolveMode` and VkSubpassDescriptionDepthStencilResolve::`stencilResolveMode`, respectively. If VkSubpassDescriptionDepthStencilResolve::`depthResolveMode` is `VK_RESOLVE_MODE_NONE` or the `pDepthStencilResolveAttachment` does not have a depth aspect, no resolve operation is performed for the depth attachment. If VkSubpassDescriptionDepthStencilResolve::`stencilResolveMode` is `VK_RESOLVE_MODE_NONE` or the `pDepthStencilResolveAttachment` does not have a stencil aspect, no resolve operation is performed for the stencil attachment.

If `pDepthStencilAttachment` is `NULL`, or if its attachment index is `VK_ATTACHMENT_UNUSED`, it indicates that no depth/stencil attachment will be used in the subpass.

The contents of an attachment within the render area become undefined at the start of a subpass **S** if all of the following conditions are true:

- The attachment is used as a color, depth/stencil, or resolve attachment in any subpass in the render pass.
- There is a subpass $\mathbf{S}_1$ that uses or preserves the attachment, and a subpass dependency from $\mathbf{S}_1$ to **S**.
- The attachment is not used or preserved in subpass **S**.

Once the contents of an attachment become undefined in subpass **S**, they remain undefined for subpasses in subpass dependency chains starting with subpass **S** until they are written again.

However, they remain valid for subpasses in other subpass dependency chains starting with subpass $\mathbf{S}_1$ if those subpasses use or preserve the attachment.

Valid Usage

- VUID-VkSubpassDescription-attachment-06912
  If the `attachment` member of an element of `pInputAttachments` is not `VK_ATTACHMENT_UNUSED`, its `layout` member **must** not be `VK_IMAGE_LAYOUT_COLOR_ATTACHMENT_OPTIMAL` or `VK_IMAGE_LAYOUT_DEPTH_STENCIL_ATTACHMENT_OPTIMAL`
- VUID-VkSubpassDescription-attachment-06913
  If the `attachment` member of an element of `pColorAttachments` is not `VK_ATTACHMENT_UNUSED`, its `layout` member **must** not be `VK_IMAGE_LAYOUT_DEPTH_STENCIL_ATTACHMENT_OPTIMAL` or `VK_IMAGE_LAYOUT_SHADER_READ_ONLY_OPTIMAL`
- VUID-VkSubpassDescription-attachment-06914
  If the `attachment` member of an element of `pResolveAttachments` is not `VK_ATTACHMENT_UNUSED`, its `layout` member **must** not be `VK_IMAGE_LAYOUT_DEPTH_STENCIL_ATTACHMENT_OPTIMAL` or `VK_IMAGE_LAYOUT_SHADER_READ_ONLY_OPTIMAL`
- VUID-VkSubpassDescription-attachment-06915
  If the `attachment` member of `pDepthStencilAttachment` is not `VK_ATTACHMENT_UNUSED`, ts `layout` member **must** not be `VK_IMAGE_LAYOUT_COLOR_ATTACHMENT_OPTIMAL` or `VK_IMAGE_LAYOUT_SHADER_READ_ONLY_OPTIMAL`
- VUID-VkSubpassDescription-attachment-06916
  If the `attachment` member of an element of `pColorAttachments` is not `VK_ATTACHMENT_UNUSED`, its `layout` member **must** not be `VK_IMAGE_LAYOUT_DEPTH_ATTACHMENT_STENCIL_READ_ONLY_OPTIMAL` or `VK_IMAGE_LAYOUT_DEPTH_READ_ONLY_STENCIL_ATTACHMENT_OPTIMAL`
- VUID-VkSubpassDescription-attachment-06917
  If the `attachment` member of an element of `pResolveAttachments` is not `VK_ATTACHMENT_UNUSED`, its `layout` member **must** not be `VK_IMAGE_LAYOUT_DEPTH_ATTACHMENT_STENCIL_READ_ONLY_OPTIMAL` or `VK_IMAGE_LAYOUT_DEPTH_READ_ONLY_STENCIL_ATTACHMENT_OPTIMAL`
- VUID-VkSubpassDescription-attachment-06918
  If the `attachment` member of an element of `pInputAttachments` is not `VK_ATTACHMENT_UNUSED`, its `layout` member **must** not be `VK_IMAGE_LAYOUT_DEPTH_ATTACHMENT_OPTIMAL` or `VK_IMAGE_LAYOUT_STENCIL_ATTACHMENT_OPTIMAL`
- VUID-VkSubpassDescription-attachment-06919
  If the `attachment` member of an element of `pColorAttachments` is not `VK_ATTACHMENT_UNUSED`, its `layout` member **must** not be `VK_IMAGE_LAYOUT_DEPTH_ATTACHMENT_OPTIMAL`, `VK_IMAGE_LAYOUT_DEPTH_READ_ONLY_OPTIMAL`, `VK_IMAGE_LAYOUT_STENCIL_ATTACHMENT_OPTIMAL`, or `VK_IMAGE_LAYOUT_STENCIL_READ_ONLY_OPTIMAL`
- VUID-VkSubpassDescription-attachment-06920
  If the `attachment` member of an element of `pResolveAttachments` is not `VK_ATTACHMENT_UNUSED`, its `layout` member **must** not be

VK_IMAGE_LAYOUT_DEPTH_ATTACHMENT_OPTIMAL, VK_IMAGE_LAYOUT_DEPTH_READ_ONLY_OPTIMAL, VK_IMAGE_LAYOUT_STENCIL_ATTACHMENT_OPTIMAL, or VK_IMAGE_LAYOUT_STENCIL_READ_ONLY_OPTIMAL

- VUID-VkSubpassDescription-pipelineBindPoint-04952
  pipelineBindPoint **must** be VK_PIPELINE_BIND_POINT_GRAPHICS
- VUID-VkSubpassDescription-colorAttachmentCount-00845
  colorAttachmentCount **must** be less than or equal to VkPhysicalDeviceLimits::maxColorAttachments
- VUID-VkSubpassDescription-loadOp-00846
  If the first use of an attachment in this render pass is as an input attachment, and the attachment is not also used as a color or depth/stencil attachment in the same subpass, then loadOp **must** not be VK_ATTACHMENT_LOAD_OP_CLEAR
- VUID-VkSubpassDescription-pResolveAttachments-00847
  If pResolveAttachments is not NULL, for each resolve attachment that is not VK_ATTACHMENT_UNUSED, the corresponding color attachment **must** not be VK_ATTACHMENT_UNUSED
- VUID-VkSubpassDescription-pResolveAttachments-00848
  If pResolveAttachments is not NULL, for each resolve attachment that is not VK_ATTACHMENT_UNUSED, the corresponding color attachment **must** not have a sample count of VK_SAMPLE_COUNT_1_BIT
- VUID-VkSubpassDescription-pResolveAttachments-00849
  If pResolveAttachments is not NULL, each resolve attachment that is not VK_ATTACHMENT_UNUSED **must** have a sample count of VK_SAMPLE_COUNT_1_BIT
- VUID-VkSubpassDescription-pResolveAttachments-00850
  If pResolveAttachments is not NULL, each resolve attachment that is not VK_ATTACHMENT_UNUSED **must** have the same VkFormat as its corresponding color attachment
- VUID-VkSubpassDescription-pColorAttachments-09430
  All attachments in pColorAttachments that are not VK_ATTACHMENT_UNUSED **must** have the same sample count
- VUID-VkSubpassDescription-pInputAttachments-02647
  All attachments in pInputAttachments that are not VK_ATTACHMENT_UNUSED **must** have image formats whose potential format features contain at least VK_FORMAT_FEATURE_COLOR_ATTACHMENT_BIT or VK_FORMAT_FEATURE_DEPTH_STENCIL_ATTACHMENT_BIT
- VUID-VkSubpassDescription-pColorAttachments-02648
  All attachments in pColorAttachments that are not VK_ATTACHMENT_UNUSED **must** have image formats whose potential format features contain VK_FORMAT_FEATURE_COLOR_ATTACHMENT_BIT
- VUID-VkSubpassDescription-pResolveAttachments-02649
  All attachments in pResolveAttachments that are not VK_ATTACHMENT_UNUSED **must** have image formats whose potential format features contain VK_FORMAT_FEATURE_COLOR_ATTACHMENT_BIT
- VUID-VkSubpassDescription-pDepthStencilAttachment-02650

If pDepthStencilAttachment is not NULL and the attachment is not VK_ATTACHMENT_UNUSED then it **must** have an image format whose potential format features contain VK_FORMAT_FEATURE_DEPTH_STENCIL_ATTACHMENT_BIT

- VUID-VkSubpassDescription-pDepthStencilAttachment-01418
  If pDepthStencilAttachment is not VK_ATTACHMENT_UNUSED and any attachments in pColorAttachments are not VK_ATTACHMENT_UNUSED, they **must** have the same sample count
- VUID-VkSubpassDescription-attachment-00853
  Each element of pPreserveAttachments **must** not be VK_ATTACHMENT_UNUSED
- VUID-VkSubpassDescription-pPreserveAttachments-00854
  Each element of pPreserveAttachments **must** not also be an element of any other member of the subpass description
- VUID-VkSubpassDescription-layout-02519
  If any attachment is used by more than one VkAttachmentReference member, then each use **must** use the same layout
- VUID-VkSubpassDescription-pDepthStencilAttachment-04438
  pDepthStencilAttachment and pColorAttachments **must** not contain references to the same attachment

Valid Usage (Implicit)

- VUID-VkSubpassDescription-flags-zerobitmask
  flags **must** be 0
- VUID-VkSubpassDescription-pipelineBindPoint-parameter
  pipelineBindPoint **must** be a valid VkPipelineBindPoint value
- VUID-VkSubpassDescription-pInputAttachments-parameter
  If inputAttachmentCount is not 0, pInputAttachments **must** be a valid pointer to an array of inputAttachmentCount valid VkAttachmentReference structures
- VUID-VkSubpassDescription-pColorAttachments-parameter
  If colorAttachmentCount is not 0, pColorAttachments **must** be a valid pointer to an array of colorAttachmentCount valid VkAttachmentReference structures
- VUID-VkSubpassDescription-pResolveAttachments-parameter
  If colorAttachmentCount is not 0, and pResolveAttachments is not NULL, pResolveAttachments **must** be a valid pointer to an array of colorAttachmentCount valid VkAttachmentReference structures
- VUID-VkSubpassDescription-pDepthStencilAttachment-parameter
  If pDepthStencilAttachment is not NULL, pDepthStencilAttachment **must** be a valid pointer to a valid VkAttachmentReference structure
- VUID-VkSubpassDescription-pPreserveAttachments-parameter
  If preserveAttachmentCount is not 0, pPreserveAttachments **must** be a valid pointer to an array of preserveAttachmentCount uint32_t values

Bits which **can** be set in VkSubpassDescription::flags, specifying usage of the subpass, are:

```
// Provided by VK_VERSION_1_0
typedef enum VkSubpassDescriptionFlagBits {
} VkSubpassDescriptionFlagBits;
```

NOTE All bits for this type are defined by extensions, and none of those extensions are enabled in this build of the specification.

```
// Provided by VK_VERSION_1_0
typedef VkFlags VkSubpassDescriptionFlags;
```

VkSubpassDescriptionFlags is a bitmask type for setting a mask of zero or more VkSubpassDescriptionFlagBits.

The VkAttachmentReference structure is defined as:

```
// Provided by VK_VERSION_1_0
typedef struct VkAttachmentReference {
    uint32_t         attachment;
    VkImageLayout    layout;
} VkAttachmentReference;
```

- attachment is either an integer value identifying an attachment at the corresponding index in VkRenderPassCreateInfo::pAttachments, or VK_ATTACHMENT_UNUSED to signify that this attachment is not used.
- layout is a VkImageLayout value specifying the layout the attachment uses during the subpass.

Valid Usage

- VUID-VkAttachmentReference-layout-03077
  If attachment is not VK_ATTACHMENT_UNUSED, layout **must** not be VK_IMAGE_LAYOUT_UNDEFINED, VK_IMAGE_LAYOUT_PREINITIALIZED, or VK_IMAGE_LAYOUT_PRESENT_SRC_KHR
- VUID-VkAttachmentReference-separateDepthStencilLayouts-03313
  If the separateDepthStencilLayouts feature is not enabled, and attachment is not VK_ATTACHMENT_UNUSED, layout **must** not be VK_IMAGE_LAYOUT_DEPTH_ATTACHMENT_OPTIMAL, VK_IMAGE_LAYOUT_DEPTH_READ_ONLY_OPTIMAL, VK_IMAGE_LAYOUT_STENCIL_ATTACHMENT_OPTIMAL, or VK_IMAGE_LAYOUT_STENCIL_READ_ONLY_OPTIMAL,

Valid Usage (Implicit)

- VUID-VkAttachmentReference-layout-parameter
  layout **must** be a valid VkImageLayout value

VK_SUBPASS_EXTERNAL is a special subpass index value expanding synchronization scope outside a subpass. It is described in more detail by VkSubpassDependency.

```
#define VK_SUBPASS_EXTERNAL             (~0U)
```

The VkSubpassDependency structure is defined as:

```
// Provided by VK_VERSION_1_0
typedef struct VkSubpassDependency {
    uint32_t                srcSubpass;
    uint32_t                dstSubpass;
    VkPipelineStageFlags    srcStageMask;
    VkPipelineStageFlags    dstStageMask;
    VkAccessFlags           srcAccessMask;
    VkAccessFlags           dstAccessMask;
    VkDependencyFlags       dependencyFlags;
} VkSubpassDependency;
```

- srcSubpass is the subpass index of the first subpass in the dependency, or VK_SUBPASS_EXTERNAL.
- dstSubpass is the subpass index of the second subpass in the dependency, or VK_SUBPASS_EXTERNAL.
- srcStageMask is a bitmask of VkPipelineStageFlagBits specifying the source stage mask.
- dstStageMask is a bitmask of VkPipelineStageFlagBits specifying the destination stage mask
- srcAccessMask is a bitmask of VkAccessFlagBits specifying a source access mask.
- dstAccessMask is a bitmask of VkAccessFlagBits specifying a destination access mask.
- dependencyFlags is a bitmask of VkDependencyFlagBits.

If srcSubpass is equal to dstSubpass then the VkSubpassDependency does not directly define a dependency. Instead, it enables pipeline barriers to be used in a render pass instance within the identified subpass, where the scopes of one pipeline barrier **must** be a subset of those described by one subpass dependency. Subpass dependencies specified in this way that include framebuffer-space stages in the srcStageMask **must** only include framebuffer-space stages in dstStageMask, and **must** include VK_DEPENDENCY_BY_REGION_BIT. When a subpass dependency is specified in this way for a subpass that has more than one view in its view mask, its dependencyFlags **must** include VK_DEPENDENCY_VIEW_LOCAL_BIT.

If srcSubpass and dstSubpass are not equal, when a render pass instance which includes a subpass dependency is submitted to a queue, it defines a dependency between the subpasses identified by srcSubpass and dstSubpass.

If srcSubpass is equal to VK_SUBPASS_EXTERNAL, the first synchronization scope includes commands that occur earlier in submission order than the vkCmdBeginRenderPass used to begin the render pass instance. Otherwise, the first set of commands includes all commands submitted as part of the subpass instance identified by srcSubpass and any load, store, or multisample resolve operations on attachments used in srcSubpass. In either case, the first synchronization scope is limited to

operations on the pipeline stages determined by the source stage mask specified by srcStageMask.

If dstSubpass is equal to VK_SUBPASS_EXTERNAL, the second synchronization scope includes commands that occur later in submission order than the vkCmdEndRenderPass used to end the render pass instance. Otherwise, the second set of commands includes all commands submitted as part of the subpass instance identified by dstSubpass and any load, store, and multisample resolve operations on attachments used in dstSubpass. In either case, the second synchronization scope is limited to operations on the pipeline stages determined by the destination stage mask specified by dstStageMask.

The first access scope is limited to accesses in the pipeline stages determined by the source stage mask specified by srcStageMask. It is also limited to access types in the source access mask specified by srcAccessMask.

The second access scope is limited to accesses in the pipeline stages determined by the destination stage mask specified by dstStageMask. It is also limited to access types in the destination access mask specified by dstAccessMask.

The availability and visibility operations defined by a subpass dependency affect the execution of image layout transitions within the render pass.

NOTE

For non-attachment resources, the memory dependency expressed by subpass dependency is nearly identical to that of a VkMemoryBarrier (with matching srcAccessMask and dstAccessMask parameters) submitted as a part of a vkCmdPipelineBarrier (with matching srcStageMask and dstStageMask parameters). The only difference being that its scopes are limited to the identified subpasses rather than potentially affecting everything before and after.

For attachments however, subpass dependencies work more like a VkImageMemoryBarrier defined similarly to the VkMemoryBarrier above, the queue family indices set to VK_QUEUE_FAMILY_IGNORED, and layouts as follows:

- The equivalent to oldLayout is the attachment's layout according to the subpass description for srcSubpass.
- The equivalent to newLayout is the attachment's layout according to the subpass description for dstSubpass.

Valid Usage

- VUID-VkSubpassDependency-srcStageMask-04090
  If the geometryShader feature is not enabled, srcStageMask **must** not contain VK_PIPELINE_STAGE_GEOMETRY_SHADER_BIT
- VUID-VkSubpassDependency-srcStageMask-04091
  If the tessellationShader feature is not enabled, srcStageMask **must** not contain VK_PIPELINE_STAGE_TESSELLATION_CONTROL_SHADER_BIT or VK_PIPELINE_STAGE_TESSELLATION_EVALUATION_SHADER_BIT
- VUID-VkSubpassDependency-srcStageMask-03937

If the synchronization2 feature is not enabled, srcStageMask **must** not be 0

- VUID-VkSubpassDependency-dstStageMask-04090
  If the geometryShader feature is not enabled, dstStageMask **must** not contain VK_PIPELINE_STAGE_GEOMETRY_SHADER_BIT
- VUID-VkSubpassDependency-dstStageMask-04091
  If the tessellationShader feature is not enabled, dstStageMask **must** not contain VK_PIPELINE_STAGE_TESSELLATION_CONTROL_SHADER_BIT or VK_PIPELINE_STAGE_TESSELLATION_EVALUATION_SHADER_BIT
- VUID-VkSubpassDependency-dstStageMask-03937
  If the synchronization2 feature is not enabled, dstStageMask **must** not be 0
- VUID-VkSubpassDependency-srcSubpass-00864
  srcSubpass **must** be less than or equal to dstSubpass, unless one of them is VK_SUBPASS_EXTERNAL, to avoid cyclic dependencies and ensure a valid execution order
- VUID-VkSubpassDependency-srcSubpass-00865
  srcSubpass and dstSubpass **must** not both be equal to VK_SUBPASS_EXTERNAL
- VUID-VkSubpassDependency-srcSubpass-06809
  If srcSubpass is equal to dstSubpass and srcStageMask includes a framebuffer-space stage, dstStageMask **must** only contain framebuffer-space stages
- VUID-VkSubpassDependency-srcAccessMask-00868
  Any access flag included in srcAccessMask **must** be supported by one of the pipeline stages in srcStageMask, as specified in the table of supported access types
- VUID-VkSubpassDependency-dstAccessMask-00869
  Any access flag included in dstAccessMask **must** be supported by one of the pipeline stages in dstStageMask, as specified in the table of supported access types
- VUID-VkSubpassDependency-srcSubpass-02243
  If srcSubpass equals dstSubpass, and srcStageMask and dstStageMask both include a framebuffer-space stage, then dependencyFlags **must** include VK_DEPENDENCY_BY_REGION_BIT
- VUID-VkSubpassDependency-dependencyFlags-02520
  If dependencyFlags includes VK_DEPENDENCY_VIEW_LOCAL_BIT, srcSubpass **must** not be equal to VK_SUBPASS_EXTERNAL
- VUID-VkSubpassDependency-dependencyFlags-02521
  If dependencyFlags includes VK_DEPENDENCY_VIEW_LOCAL_BIT, dstSubpass **must** not be equal to VK_SUBPASS_EXTERNAL
- VUID-VkSubpassDependency-srcSubpass-00872
  If srcSubpass equals dstSubpass and that subpass has more than one bit set in the view mask, then dependencyFlags **must** include VK_DEPENDENCY_VIEW_LOCAL_BIT

Valid Usage (Implicit)

- VUID-VkSubpassDependency-srcStageMask-parameter
  srcStageMask **must** be a valid combination of VkPipelineStageFlagBits values

- VUID-VkSubpassDependency-dstStageMask-parameter
  `dstStageMask` **must** be a valid combination of VkPipelineStageFlagBits values
- VUID-VkSubpassDependency-srcAccessMask-parameter
  `srcAccessMask` **must** be a valid combination of VkAccessFlagBits values
- VUID-VkSubpassDependency-dstAccessMask-parameter
  `dstAccessMask` **must** be a valid combination of VkAccessFlagBits values
- VUID-VkSubpassDependency-dependencyFlags-parameter
  `dependencyFlags` **must** be a valid combination of VkDependencyFlagBits values

When multiview is enabled, the execution of the multiple views of one subpass **may** not occur simultaneously or even back-to-back, and rather **may** be interleaved with the execution of other subpasses. The load and store operations apply to attachments on a per-view basis. For example, an attachment using `VK_ATTACHMENT_LOAD_OP_CLEAR` will have each view cleared on first use, but the first use of one view may be temporally distant from the first use of another view.

NOTE

A good mental model for multiview is to think of a multiview subpass as if it were a collection of individual (per-view) subpasses that are logically grouped together and described as a single multiview subpass in the API. Similarly, a multiview attachment can be thought of like several individual attachments that happen to be layers in a single image. A view-local dependency between two multiview subpasses acts like a set of one-to-one dependencies between corresponding pairs of per-view subpasses. A view-global dependency between two multiview subpasses acts like a set of N × M dependencies between all pairs of per-view subpasses in the source and destination. Thus, it is a more compact representation which also makes clear the commonality and reuse that is present between views in a subpass. This interpretation motivates the answers to questions like “when does the load op apply” - it is on the first use of each view of an attachment, as if each view was a separate attachment.

The content of each view follows the description in attachment content behavior. In particular, if an attachment is preserved, all views within the attachment are preserved.

If there is no subpass dependency from `VK_SUBPASS_EXTERNAL` to the first subpass that uses an attachment, then an implicit subpass dependency exists from `VK_SUBPASS_EXTERNAL` to the first subpass it is used in. The implicit subpass dependency only exists if there exists an automatic layout transition away from `initialLayout`. The subpass dependency operates as if defined with the following parameters:

```
VkSubpassDependency implicitDependency = {
    .srcSubpass = VK_SUBPASS_EXTERNAL,
    .dstSubpass = firstSubpass, // First subpass attachment is used in
    .srcStageMask = VK_PIPELINE_STAGE_NONE,
    .dstStageMask = VK_PIPELINE_STAGE_ALL_COMMANDS_BIT,
    .srcAccessMask = 0,
    .dstAccessMask = VK_ACCESS_INPUT_ATTACHMENT_READ_BIT |
```

```
                    VK_ACCESS_COLOR_ATTACHMENT_READ_BIT |
                    VK_ACCESS_COLOR_ATTACHMENT_WRITE_BIT |
                    VK_ACCESS_DEPTH_STENCIL_ATTACHMENT_READ_BIT |
                    VK_ACCESS_DEPTH_STENCIL_ATTACHMENT_WRITE_BIT,
    .dependencyFlags = 0
};
```

Similarly, if there is no subpass dependency from the last subpass that uses an attachment to `VK_SUBPASS_EXTERNAL`, then an implicit subpass dependency exists from the last subpass it is used in to `VK_SUBPASS_EXTERNAL`. The implicit subpass dependency only exists if there exists an automatic layout transition into `finalLayout`. The subpass dependency operates as if defined with the following parameters:

```
VkSubpassDependency implicitDependency = {
    .srcSubpass = lastSubpass, // Last subpass attachment is used in
    .dstSubpass = VK_SUBPASS_EXTERNAL,
    .srcStageMask = VK_PIPELINE_STAGE_ALL_COMMANDS_BIT,
    .dstStageMask = VK_PIPELINE_STAGE_NONE,
    .srcAccessMask = VK_ACCESS_COLOR_ATTACHMENT_WRITE_BIT |
                     VK_ACCESS_DEPTH_STENCIL_ATTACHMENT_WRITE_BIT,
    .dstAccessMask = 0,
    .dependencyFlags = 0
};
```

As subpasses **may** overlap or execute out of order with regards to other subpasses unless a subpass dependency chain describes otherwise, the layout transitions required between subpasses **cannot** be known to an application. Instead, an application provides the layout that each attachment **must** be in at the start and end of a render pass, and the layout it **must** be in during each subpass it is used in. The implementation then **must** execute layout transitions between subpasses in order to guarantee that the images are in the layouts required by each subpass, and in the final layout at the end of the render pass.

Automatic layout transitions apply to the entire image subresource attached to the framebuffer. If multiview is not enabled and the attachment is a view of a 1D or 2D image, the automatic layout transitions apply to the number of layers specified by VkFramebufferCreateInfo::`layers`. If multiview is enabled and the attachment is a view of a 1D or 2D image, the automatic layout transitions apply to the layers corresponding to views which are used by some subpass in the render pass, even if that subpass does not reference the given attachment. If the attachment view is a 2D or 2D array view of a 3D image, even if the attachment view only refers to a subset of the slices of the selected mip level of the 3D image, automatic layout transitions apply to the entire subresource referenced which is the entire mip level in this case.

Automatic layout transitions away from the layout used in a subpass happen-after the availability operations for all dependencies with that subpass as the `srcSubpass`.

Automatic layout transitions into the layout used in a subpass happen-before the visibility operations for all dependencies with that subpass as the `dstSubpass`.

Automatic layout transitions away from `initialLayout` happen-after the availability operations for all dependencies with a `srcSubpass` equal to `VK_SUBPASS_EXTERNAL`, where `dstSubpass` uses the attachment that will be transitioned. For attachments created with `VK_ATTACHMENT_DESCRIPTION_MAY_ALIAS_BIT`, automatic layout transitions away from `initialLayout` happen-after the availability operations for all dependencies with a `srcSubpass` equal to `VK_SUBPASS_EXTERNAL`, where `dstSubpass` uses any aliased attachment.

Automatic layout transitions into `finalLayout` happen-before the visibility operations for all dependencies with a `dstSubpass` equal to `VK_SUBPASS_EXTERNAL`, where `srcSubpass` uses the attachment that will be transitioned. For attachments created with `VK_ATTACHMENT_DESCRIPTION_MAY_ALIAS_BIT`, automatic layout transitions into `finalLayout` happen-before the visibility operations for all dependencies with a `dstSubpass` equal to `VK_SUBPASS_EXTERNAL`, where `srcSubpass` uses any aliased attachment.

If two subpasses use the same attachment, and both subpasses use the attachment in a read-only layout, no subpass dependency needs to be specified between those subpasses. If an implementation treats those layouts separately, it **must** insert an implicit subpass dependency between those subpasses to separate the uses in each layout. The subpass dependency operates as if defined with the following parameters:

```
// Used for input attachments
VkPipelineStageFlags inputAttachmentStages = VK_PIPELINE_STAGE_FRAGMENT_SHADER_BIT;
VkAccessFlags inputAttachmentDstAccess = VK_ACCESS_INPUT_ATTACHMENT_READ_BIT;

// Used for depth/stencil attachments
VkPipelineStageFlags depthStencilAttachmentStages =
VK_PIPELINE_STAGE_EARLY_FRAGMENT_TESTS_BIT |
VK_PIPELINE_STAGE_LATE_FRAGMENT_TESTS_BIT;
VkAccessFlags depthStencilAttachmentDstAccess =
VK_ACCESS_DEPTH_STENCIL_ATTACHMENT_READ_BIT;

VkSubpassDependency implicitDependency = {
    .srcSubpass = firstSubpass;
    .dstSubpass = secondSubpass;
    .srcStageMask = inputAttachmentStages | depthStencilAttachmentStages;
    .dstStageMask = inputAttachmentStages | depthStencilAttachmentStages;
    .srcAccessMask = 0;
    .dstAccessMask = inputAttachmentDstAccess | depthStencilAttachmentDstAccess;
    .dependencyFlags = 0;
};
```

A more extensible version of render pass creation is also defined below.

To create a render pass, call:

```
// Provided by VK_VERSION_1_2
VkResult vkCreateRenderPass2(
    VkDevice                                    device,
    const VkRenderPassCreateInfo2*              pCreateInfo,
    const VkAllocationCallbacks*                pAllocator,
    VkRenderPass*                               pRenderPass);
```

- `device` is the logical device that creates the render pass.
- `pCreateInfo` is a pointer to a VkRenderPassCreateInfo2 structure describing the parameters of the render pass.
- `pAllocator` controls host memory allocation as described in the Memory Allocation chapter.
- `pRenderPass` is a pointer to a VkRenderPass handle in which the resulting render pass object is returned.

This command is functionally identical to vkCreateRenderPass, but includes extensible sub-structures that include `sType` and `pNext` parameters, allowing them to be more easily extended.

Valid Usage

- VUID-vkCreateRenderPass2-device-10001
  `device` **must** support at least one queue family with the `VK_QUEUE_GRAPHICS_BIT` capability

Valid Usage (Implicit)

- VUID-vkCreateRenderPass2-device-parameter
  `device` **must** be a valid VkDevice handle
- VUID-vkCreateRenderPass2-pCreateInfo-parameter
  `pCreateInfo` **must** be a valid pointer to a valid VkRenderPassCreateInfo2 structure
- VUID-vkCreateRenderPass2-pAllocator-parameter
  If `pAllocator` is not `NULL`, `pAllocator` **must** be a valid pointer to a valid VkAllocationCallbacks structure
- VUID-vkCreateRenderPass2-pRenderPass-parameter
  `pRenderPass` **must** be a valid pointer to a VkRenderPass handle

Return Codes

Success

- `VK_SUCCESS`

Failure

- `VK_ERROR_OUT_OF_HOST_MEMORY`
- `VK_ERROR_OUT_OF_DEVICE_MEMORY`

The VkRenderPassCreateInfo2 structure is defined as:

```
// Provided by VK_VERSION_1_2
typedef struct VkRenderPassCreateInfo2 {
    VkStructureType                   sType;
    const void*                       pNext;
    VkRenderPassCreateFlags           flags;
    uint32_t                          attachmentCount;
    const VkAttachmentDescription2*   pAttachments;
    uint32_t                          subpassCount;
    const VkSubpassDescription2*      pSubpasses;
    uint32_t                          dependencyCount;
    const VkSubpassDependency2*       pDependencies;
    uint32_t                          correlatedViewMaskCount;
    const uint32_t*                   pCorrelatedViewMasks;
} VkRenderPassCreateInfo2;
```

- sType is a VkStructureType value identifying this structure.
- pNext is NULL or a pointer to a structure extending this structure.
- flags is reserved for future use.
- attachmentCount is the number of attachments used by this render pass.
- pAttachments is a pointer to an array of attachmentCount VkAttachmentDescription2 structures describing the attachments used by the render pass.
- subpassCount is the number of subpasses to create.
- pSubpasses is a pointer to an array of subpassCount VkSubpassDescription2 structures describing each subpass.
- dependencyCount is the number of dependencies between pairs of subpasses.
- pDependencies is a pointer to an array of dependencyCount VkSubpassDependency2 structures describing dependencies between pairs of subpasses.
- correlatedViewMaskCount is the number of correlation masks.
- pCorrelatedViewMasks is a pointer to an array of view masks indicating sets of views that **may** be more efficient to render concurrently.

Parameters defined by this structure with the same name as those in VkRenderPassCreateInfo have the identical effect to those parameters; the child structures are variants of those used in VkRenderPassCreateInfo which add sType and pNext parameters, allowing them to be extended.

If the VkSubpassDescription2::viewMask member of any element of pSubpasses is not zero, *multiview* functionality is considered to be enabled for this render pass.

correlatedViewMaskCount and pCorrelatedViewMasks have the same effect as VkRenderPassMultiviewCreateInfo::correlationMaskCount and VkRenderPassMultiviewCreateInfo ::pCorrelationMasks, respectively.

Valid Usage

- VUID-VkRenderPassCreateInfo2-None-03049
  If any two subpasses operate on attachments with overlapping ranges of the same VkDeviceMemory object, and at least one subpass writes to that area of VkDeviceMemory, a subpass dependency **must** be included (either directly or via some intermediate subpasses) between them
- VUID-VkRenderPassCreateInfo2-attachment-03050
  If the attachment member of any element of pInputAttachments, pColorAttachments, pResolveAttachments or pDepthStencilAttachment, or the attachment indexed by any element of pPreserveAttachments in any element of pSubpasses is bound to a range of a VkDeviceMemory object that overlaps with any other attachment in any subpass (including the same subpass), the VkAttachmentDescription2 structures describing them **must** include VK_ATTACHMENT_DESCRIPTION_MAY_ALIAS_BIT in flags
- VUID-VkRenderPassCreateInfo2-attachment-03051
  If the attachment member of any element of pInputAttachments, pColorAttachments, pResolveAttachments or pDepthStencilAttachment, or any element of pPreserveAttachments in any element of pSubpasses is not VK_ATTACHMENT_UNUSED, then it **must** be less than attachmentCount
- VUID-VkRenderPassCreateInfo2-pSubpasses-06473
  If the pSubpasses pNext chain includes a VkSubpassDescriptionDepthStencilResolve structure and the pDepthStencilResolveAttachment member is not NULL and does not have the value VK_ATTACHMENT_UNUSED, then attachment **must** be less than attachmentCount
- VUID-VkRenderPassCreateInfo2-pAttachments-02522
  For any member of pAttachments with a loadOp equal to VK_ATTACHMENT_LOAD_OP_CLEAR, the first use of that attachment **must** not specify a layout equal to VK_IMAGE_LAYOUT_SHADER_READ_ONLY_OPTIMAL, VK_IMAGE_LAYOUT_DEPTH_STENCIL_READ_ONLY_OPTIMAL, or VK_IMAGE_LAYOUT_DEPTH_READ_ONLY_STENCIL_ATTACHMENT_OPTIMAL
- VUID-VkRenderPassCreateInfo2-pAttachments-02523
  For any member of pAttachments with a stencilLoadOp equal to VK_ATTACHMENT_LOAD_OP_CLEAR, the first use of that attachment **must** not specify a layout equal to VK_IMAGE_LAYOUT_SHADER_READ_ONLY_OPTIMAL, VK_IMAGE_LAYOUT_DEPTH_STENCIL_READ_ONLY_OPTIMAL, or VK_IMAGE_LAYOUT_DEPTH_ATTACHMENT_STENCIL_READ_ONLY_OPTIMAL
- VUID-VkRenderPassCreateInfo2-pDependencies-03054
  For any element of pDependencies, if the srcSubpass is not VK_SUBPASS_EXTERNAL, all stage flags included in the srcStageMask member of that dependency **must** be a pipeline stage supported by the pipeline identified by the pipelineBindPoint member of the source subpass
- VUID-VkRenderPassCreateInfo2-pDependencies-03055
  For any element of pDependencies, if the dstSubpass is not VK_SUBPASS_EXTERNAL, all stage flags included in the dstStageMask member of that dependency **must** be a pipeline stage supported by the pipeline identified by the pipelineBindPoint member of the destination

subpass

- VUID-VkRenderPassCreateInfo2-pCorrelatedViewMasks-03056
  The set of bits included in any element of `pCorrelatedViewMasks` **must** not overlap with the set of bits included in any other element of `pCorrelatedViewMasks`
- VUID-VkRenderPassCreateInfo2-viewMask-03057
  If the VkSubpassDescription2::`viewMask` member of all elements of `pSubpasses` is `0`, `correlatedViewMaskCount` **must** be `0`
- VUID-VkRenderPassCreateInfo2-viewMask-03058
  The VkSubpassDescription2::`viewMask` member of all elements of `pSubpasses` **must** either all be `0`, or all not be `0`
- VUID-VkRenderPassCreateInfo2-viewMask-03059
  If the VkSubpassDescription2::`viewMask` member of all elements of `pSubpasses` is `0`, the `dependencyFlags` member of any element of `pDependencies` **must** not include `VK_DEPENDENCY_VIEW_LOCAL_BIT`
- VUID-VkRenderPassCreateInfo2-pDependencies-03060
  For any element of `pDependencies` where its `srcSubpass` member equals its `dstSubpass` member, if the `viewMask` member of the corresponding element of `pSubpasses` includes more than one bit, its `dependencyFlags` member **must** include `VK_DEPENDENCY_VIEW_LOCAL_BIT`
- VUID-VkRenderPassCreateInfo2-attachment-02525
  If the `attachment` member of any element of the `pInputAttachments` member of any element of `pSubpasses` is not `VK_ATTACHMENT_UNUSED`, the `aspectMask` member of that element of `pInputAttachments` **must** only include aspects that are present in images of the format specified by the element of `pAttachments` specified by `attachment`
- VUID-VkRenderPassCreateInfo2-srcSubpass-02526
  The `srcSubpass` member of each element of `pDependencies` **must** be less than `subpassCount`
- VUID-VkRenderPassCreateInfo2-dstSubpass-02527
  The `dstSubpass` member of each element of `pDependencies` **must** be less than `subpassCount`
- VUID-VkRenderPassCreateInfo2-attachment-06244
  If the `attachment` member of the `pDepthStencilAttachment` member of an element of `pSubpasses` is not `VK_ATTACHMENT_UNUSED`, the `layout` member of that same structure is either `VK_IMAGE_LAYOUT_DEPTH_ATTACHMENT_OPTIMAL` or `VK_IMAGE_LAYOUT_DEPTH_READ_ONLY_OPTIMAL`, and the `pNext` chain of that structure does not include a VkAttachmentReferenceStencilLayout structure, then the element of `pAttachments` with an index equal to `attachment` **must** not have a `format` that includes both depth and stencil components
- VUID-VkRenderPassCreateInfo2-attachment-06245
  If the `attachment` member of the `pDepthStencilAttachment` member of an element of `pSubpasses` is not `VK_ATTACHMENT_UNUSED` and the `layout` member of that same structure is either `VK_IMAGE_LAYOUT_STENCIL_ATTACHMENT_OPTIMAL` or `VK_IMAGE_LAYOUT_STENCIL_READ_ONLY_OPTIMAL`, then the element of `pAttachments` with an index equal to `attachment` **must** have a `format` that includes only a stencil component
- VUID-VkRenderPassCreateInfo2-attachment-06246

If the attachment member of the pDepthStencilAttachment member of an element of pSubpasses is not VK_ATTACHMENT_UNUSED and the layout member of that same structure is either VK_IMAGE_LAYOUT_DEPTH_ATTACHMENT_OPTIMAL or VK_IMAGE_LAYOUT_DEPTH_READ_ONLY_OPTIMAL, then the element of pAttachments with an index equal to attachment **must** not have a format that includes only a stencil component

Valid Usage (Implicit)

- VUID-VkRenderPassCreateInfo2-sType-sType
  sType **must** be VK_STRUCTURE_TYPE_RENDER_PASS_CREATE_INFO_2
- VUID-VkRenderPassCreateInfo2-pNext-pNext
  pNext **must** be NULL
- VUID-VkRenderPassCreateInfo2-flags-zerobitmask
  flags **must** be 0
- VUID-VkRenderPassCreateInfo2-pAttachments-parameter
  If attachmentCount is not 0, pAttachments **must** be a valid pointer to an array of attachmentCount valid VkAttachmentDescription2 structures
- VUID-VkRenderPassCreateInfo2-pSubpasses-parameter
  pSubpasses **must** be a valid pointer to an array of subpassCount valid VkSubpassDescription2 structures
- VUID-VkRenderPassCreateInfo2-pDependencies-parameter
  If dependencyCount is not 0, pDependencies **must** be a valid pointer to an array of dependencyCount valid VkSubpassDependency2 structures
- VUID-VkRenderPassCreateInfo2-pCorrelatedViewMasks-parameter
  If correlatedViewMaskCount is not 0, pCorrelatedViewMasks **must** be a valid pointer to an array of correlatedViewMaskCount uint32_t values
- VUID-VkRenderPassCreateInfo2-subpassCount-arraylength
  subpassCount **must** be greater than 0

The VkAttachmentDescription2 structure is defined as:

```
// Provided by VK_VERSION_1_2
typedef struct VkAttachmentDescription2 {
    VkStructureType                 sType;
    const void*                     pNext;
    VkAttachmentDescriptionFlags    flags;
    VkFormat                        format;
    VkSampleCountFlagBits           samples;
    VkAttachmentLoadOp              loadOp;
    VkAttachmentStoreOp             storeOp;
    VkAttachmentLoadOp              stencilLoadOp;
    VkAttachmentStoreOp             stencilStoreOp;
    VkImageLayout                   initialLayout;
    VkImageLayout                   finalLayout;
} VkAttachmentDescription2;
```

- `sType` is a VkStructureType value identifying this structure.
- `pNext` is `NULL` or a pointer to a structure extending this structure.
- `flags` is a bitmask of VkAttachmentDescriptionFlagBits specifying additional properties of the attachment.
- `format` is a VkFormat value specifying the format of the image that will be used for the attachment.
- `samples` is a VkSampleCountFlagBits value specifying the number of samples of the image.
- `loadOp` is a VkAttachmentLoadOp value specifying how the contents of color and depth components of the attachment are treated at the beginning of the subpass where it is first used.
- `storeOp` is a VkAttachmentStoreOp value specifying how the contents of color and depth components of the attachment are treated at the end of the subpass where it is last used.
- `stencilLoadOp` is a VkAttachmentLoadOp value specifying how the contents of stencil components of the attachment are treated at the beginning of the subpass where it is first used.
- `stencilStoreOp` is a VkAttachmentStoreOp value specifying how the contents of stencil components of the attachment are treated at the end of the last subpass where it is used.
- `initialLayout` is the layout the attachment image subresource will be in when a render pass instance begins.
- `finalLayout` is the layout the attachment image subresource will be transitioned to when a render pass instance ends.

Parameters defined by this structure with the same name as those in VkAttachmentDescription have the identical effect to those parameters.

If the `separateDepthStencilLayouts` feature is enabled, and `format` is a depth/stencil format, `initialLayout` and `finalLayout` **can** be set to a layout that only specifies the layout of the depth aspect.

If the `pNext` chain includes a VkAttachmentDescriptionStencilLayout structure, then the `stencilInitialLayout` and `stencilFinalLayout` members specify the initial and final layouts of the

stencil aspect of a depth/stencil format, and `initialLayout` and `finalLayout` only apply to the depth aspect. For depth-only formats, the VkAttachmentDescriptionStencilLayout structure is ignored. For stencil-only formats, the initial and final layouts of the stencil aspect are taken from the VkAttachmentDescriptionStencilLayout structure if present, or `initialLayout` and `finalLayout` if not present.

If `format` is a depth/stencil format, and either `initialLayout` or `finalLayout` does not specify a layout for the stencil aspect, then the application **must** specify the initial and final layouts of the stencil aspect by including a VkAttachmentDescriptionStencilLayout structure in the `pNext` chain.

Valid Usage

- VUID-VkAttachmentDescription2-format-06699
  If `format` includes a color or depth component and `loadOp` is `VK_ATTACHMENT_LOAD_OP_LOAD`, then `initialLayout` **must** not be `VK_IMAGE_LAYOUT_UNDEFINED`
- VUID-VkAttachmentDescription2-finalLayout-00843
  `finalLayout` **must** not be `VK_IMAGE_LAYOUT_UNDEFINED` or `VK_IMAGE_LAYOUT_PREINITIALIZED`
- VUID-VkAttachmentDescription2-format-03280
  If `format` is a color format, `initialLayout` **must** not be `VK_IMAGE_LAYOUT_DEPTH_STENCIL_ATTACHMENT_OPTIMAL` or `VK_IMAGE_LAYOUT_DEPTH_STENCIL_READ_ONLY_OPTIMAL`
- VUID-VkAttachmentDescription2-format-03281
  If `format` is a depth/stencil format, `initialLayout` **must** not be `VK_IMAGE_LAYOUT_COLOR_ATTACHMENT_OPTIMAL`
- VUID-VkAttachmentDescription2-format-03282
  If `format` is a color format, `finalLayout` **must** not be `VK_IMAGE_LAYOUT_DEPTH_STENCIL_ATTACHMENT_OPTIMAL` or `VK_IMAGE_LAYOUT_DEPTH_STENCIL_READ_ONLY_OPTIMAL`
- VUID-VkAttachmentDescription2-format-03283
  If `format` is a depth/stencil format, `finalLayout` **must** not be `VK_IMAGE_LAYOUT_COLOR_ATTACHMENT_OPTIMAL`
- VUID-VkAttachmentDescription2-format-06487
  If `format` is a color format, `initialLayout` **must** not be `VK_IMAGE_LAYOUT_DEPTH_ATTACHMENT_STENCIL_READ_ONLY_OPTIMAL` or `VK_IMAGE_LAYOUT_DEPTH_READ_ONLY_STENCIL_ATTACHMENT_OPTIMAL`
- VUID-VkAttachmentDescription2-format-06488
  If `format` is a color format, `finalLayout` **must** not be `VK_IMAGE_LAYOUT_DEPTH_ATTACHMENT_STENCIL_READ_ONLY_OPTIMAL` or `VK_IMAGE_LAYOUT_DEPTH_READ_ONLY_STENCIL_ATTACHMENT_OPTIMAL`
- VUID-VkAttachmentDescription2-separateDepthStencilLayouts-03284
  If the `separateDepthStencilLayouts` feature is not enabled, `initialLayout` **must** not be `VK_IMAGE_LAYOUT_DEPTH_ATTACHMENT_OPTIMAL`, `VK_IMAGE_LAYOUT_DEPTH_READ_ONLY_OPTIMAL`, `VK_IMAGE_LAYOUT_STENCIL_ATTACHMENT_OPTIMAL`, or `VK_IMAGE_LAYOUT_STENCIL_READ_ONLY_OPTIMAL`,

- VUID-VkAttachmentDescription2-separateDepthStencilLayouts-03285
  If the separateDepthStencilLayouts feature is not enabled, finalLayout **must** not be VK_IMAGE_LAYOUT_DEPTH_ATTACHMENT_OPTIMAL, VK_IMAGE_LAYOUT_DEPTH_READ_ONLY_OPTIMAL, VK_IMAGE_LAYOUT_STENCIL_ATTACHMENT_OPTIMAL, or VK_IMAGE_LAYOUT_STENCIL_READ_ONLY_OPTIMAL,
- VUID-VkAttachmentDescription2-format-03286
  If format is a color format, initialLayout **must** not be VK_IMAGE_LAYOUT_DEPTH_ATTACHMENT_OPTIMAL, VK_IMAGE_LAYOUT_DEPTH_READ_ONLY_OPTIMAL, VK_IMAGE_LAYOUT_STENCIL_ATTACHMENT_OPTIMAL, or VK_IMAGE_LAYOUT_STENCIL_READ_ONLY_OPTIMAL
- VUID-VkAttachmentDescription2-format-03287
  If format is a color format, finalLayout **must** not be VK_IMAGE_LAYOUT_DEPTH_ATTACHMENT_OPTIMAL, VK_IMAGE_LAYOUT_DEPTH_READ_ONLY_OPTIMAL, VK_IMAGE_LAYOUT_STENCIL_ATTACHMENT_OPTIMAL, or VK_IMAGE_LAYOUT_STENCIL_READ_ONLY_OPTIMAL
- VUID-VkAttachmentDescription2-format-06906
  If format is a depth/stencil format which includes both depth and stencil components, initialLayout **must** not be VK_IMAGE_LAYOUT_STENCIL_ATTACHMENT_OPTIMAL or VK_IMAGE_LAYOUT_STENCIL_READ_ONLY_OPTIMAL
- VUID-VkAttachmentDescription2-format-06907
  If format is a depth/stencil format which includes both depth and stencil components, finalLayout **must** not be VK_IMAGE_LAYOUT_STENCIL_ATTACHMENT_OPTIMAL or VK_IMAGE_LAYOUT_STENCIL_READ_ONLY_OPTIMAL
- VUID-VkAttachmentDescription2-format-03290
  If format is a depth/stencil format which includes only the depth component, initialLayout **must** not be VK_IMAGE_LAYOUT_STENCIL_ATTACHMENT_OPTIMAL or VK_IMAGE_LAYOUT_STENCIL_READ_ONLY_OPTIMAL
- VUID-VkAttachmentDescription2-format-03291
  If format is a depth/stencil format which includes only the depth component, finalLayout **must** not be VK_IMAGE_LAYOUT_STENCIL_ATTACHMENT_OPTIMAL or VK_IMAGE_LAYOUT_STENCIL_READ_ONLY_OPTIMAL
- VUID-VkAttachmentDescription2-samples-08745
  samples **must** be a valid VkSampleCountFlagBits value that is set in imageCreateSampleCounts (as defined in Image Creation Limits) for the given format
- VUID-VkAttachmentDescription2-pNext-06704
  If the pNext chain does not include a VkAttachmentDescriptionStencilLayout structure, format includes a stencil component, and stencilLoadOp is VK_ATTACHMENT_LOAD_OP_LOAD, then initialLayout **must** not be VK_IMAGE_LAYOUT_UNDEFINED
- VUID-VkAttachmentDescription2-pNext-06705
  If the pNext chain includes a VkAttachmentDescriptionStencilLayout structure, format includes a stencil component, and stencilLoadOp is VK_ATTACHMENT_LOAD_OP_LOAD, then VkAttachmentDescriptionStencilLayout::stencilInitialLayout **must** not be VK_IMAGE_LAYOUT_UNDEFINED
- VUID-VkAttachmentDescription2-format-06249

If `format` is a depth/stencil format which includes both depth and stencil components, and `initialLayout` is `VK_IMAGE_LAYOUT_DEPTH_ATTACHMENT_OPTIMAL` or `VK_IMAGE_LAYOUT_DEPTH_READ_ONLY_OPTIMAL`, the `pNext` chain **must** include a VkAttachmentDescriptionStencilLayout structure

- VUID-VkAttachmentDescription2-format-06250
  If `format` is a depth/stencil format which includes both depth and stencil components, and `finalLayout` is `VK_IMAGE_LAYOUT_DEPTH_ATTACHMENT_OPTIMAL` or `VK_IMAGE_LAYOUT_DEPTH_READ_ONLY_OPTIMAL`, the `pNext` chain **must** include a VkAttachmentDescriptionStencilLayout structure
- VUID-VkAttachmentDescription2-format-06247
  If the `pNext` chain does not include a VkAttachmentDescriptionStencilLayout structure and `format` only includes a stencil component, `initialLayout` **must** not be `VK_IMAGE_LAYOUT_DEPTH_ATTACHMENT_OPTIMAL` or `VK_IMAGE_LAYOUT_DEPTH_READ_ONLY_OPTIMAL`
- VUID-VkAttachmentDescription2-format-06248
  If the `pNext` chain does not include a VkAttachmentDescriptionStencilLayout structure and `format` only includes a stencil component, `finalLayout` **must** not be `VK_IMAGE_LAYOUT_DEPTH_ATTACHMENT_OPTIMAL` or `VK_IMAGE_LAYOUT_DEPTH_READ_ONLY_OPTIMAL`
- VUID-VkAttachmentDescription2-format-09332
  `format` **must** not be `VK_FORMAT_UNDEFINED`

Valid Usage (Implicit)

- VUID-VkAttachmentDescription2-sType-sType
  `sType` **must** be `VK_STRUCTURE_TYPE_ATTACHMENT_DESCRIPTION_2`
- VUID-VkAttachmentDescription2-pNext-pNext
  `pNext` **must** be `NULL` or a pointer to a valid instance of VkAttachmentDescriptionStencilLayout
- VUID-VkAttachmentDescription2-sType-unique
  The `sType` value of each struct in the `pNext` chain **must** be unique
- VUID-VkAttachmentDescription2-flags-parameter
  `flags` **must** be a valid combination of VkAttachmentDescriptionFlagBits values
- VUID-VkAttachmentDescription2-format-parameter
  `format` **must** be a valid VkFormat value
- VUID-VkAttachmentDescription2-samples-parameter
  `samples` **must** be a valid VkSampleCountFlagBits value
- VUID-VkAttachmentDescription2-loadOp-parameter
  `loadOp` **must** be a valid VkAttachmentLoadOp value
- VUID-VkAttachmentDescription2-storeOp-parameter
  `storeOp` **must** be a valid VkAttachmentStoreOp value
- VUID-VkAttachmentDescription2-stencilLoadOp-parameter
  `stencilLoadOp` **must** be a valid VkAttachmentLoadOp value
- VUID-VkAttachmentDescription2-stencilStoreOp-parameter

stencilStoreOp **must** be a valid VkAttachmentStoreOp value

- VUID-VkAttachmentDescription2-initialLayout-parameter
  initialLayout **must** be a valid VkImageLayout value
- VUID-VkAttachmentDescription2-finalLayout-parameter
  finalLayout **must** be a valid VkImageLayout value

The VkAttachmentDescriptionStencilLayout structure is defined as:

```
// Provided by VK_VERSION_1_2
typedef struct VkAttachmentDescriptionStencilLayout {
    VkStructureType    sType;
    void*              pNext;
    VkImageLayout      stencilInitialLayout;
    VkImageLayout      stencilFinalLayout;
} VkAttachmentDescriptionStencilLayout;
```

- sType is a VkStructureType value identifying this structure.
- pNext is NULL or a pointer to a structure extending this structure.
- stencilInitialLayout is the layout the stencil aspect of the attachment image subresource will be in when a render pass instance begins.
- stencilFinalLayout is the layout the stencil aspect of the attachment image subresource will be transitioned to when a render pass instance ends.

Valid Usage

- VUID-VkAttachmentDescriptionStencilLayout-stencilInitialLayout-03308
  stencilInitialLayout **must** not be VK_IMAGE_LAYOUT_COLOR_ATTACHMENT_OPTIMAL, VK_IMAGE_LAYOUT_DEPTH_ATTACHMENT_OPTIMAL, VK_IMAGE_LAYOUT_DEPTH_READ_ONLY_OPTIMAL, VK_IMAGE_LAYOUT_DEPTH_STENCIL_ATTACHMENT_OPTIMAL, VK_IMAGE_LAYOUT_DEPTH_STENCIL_READ_ONLY_OPTIMAL, VK_IMAGE_LAYOUT_DEPTH_ATTACHMENT_STENCIL_READ_ONLY_OPTIMAL, or VK_IMAGE_LAYOUT_DEPTH_READ_ONLY_STENCIL_ATTACHMENT_OPTIMAL
- VUID-VkAttachmentDescriptionStencilLayout-stencilFinalLayout-03309
  stencilFinalLayout **must** not be VK_IMAGE_LAYOUT_COLOR_ATTACHMENT_OPTIMAL, VK_IMAGE_LAYOUT_DEPTH_ATTACHMENT_OPTIMAL, VK_IMAGE_LAYOUT_DEPTH_READ_ONLY_OPTIMAL, VK_IMAGE_LAYOUT_DEPTH_STENCIL_ATTACHMENT_OPTIMAL, VK_IMAGE_LAYOUT_DEPTH_STENCIL_READ_ONLY_OPTIMAL, VK_IMAGE_LAYOUT_DEPTH_ATTACHMENT_STENCIL_READ_ONLY_OPTIMAL, or VK_IMAGE_LAYOUT_DEPTH_READ_ONLY_STENCIL_ATTACHMENT_OPTIMAL
- VUID-VkAttachmentDescriptionStencilLayout-stencilFinalLayout-03310
  stencilFinalLayout **must** not be VK_IMAGE_LAYOUT_UNDEFINED or VK_IMAGE_LAYOUT_PREINITIALIZED

Valid Usage (Implicit)

- VUID-VkAttachmentDescriptionStencilLayout-sType-sType
  `sType` **must** be `VK_STRUCTURE_TYPE_ATTACHMENT_DESCRIPTION_STENCIL_LAYOUT`
- VUID-VkAttachmentDescriptionStencilLayout-stencilInitialLayout-parameter
  `stencilInitialLayout` **must** be a valid VkImageLayout value
- VUID-VkAttachmentDescriptionStencilLayout-stencilFinalLayout-parameter
  `stencilFinalLayout` **must** be a valid VkImageLayout value

The `VkSubpassDescription2` structure is defined as:

```
// Provided by VK_VERSION_1_2
typedef struct VkSubpassDescription2 {
    VkStructureType                    sType;
    const void*                        pNext;
    VkSubpassDescriptionFlags          flags;
    VkPipelineBindPoint                pipelineBindPoint;
    uint32_t                           viewMask;
    uint32_t                           inputAttachmentCount;
    const VkAttachmentReference2*      pInputAttachments;
    uint32_t                           colorAttachmentCount;
    const VkAttachmentReference2*      pColorAttachments;
    const VkAttachmentReference2*      pResolveAttachments;
    const VkAttachmentReference2*      pDepthStencilAttachment;
    uint32_t                           preserveAttachmentCount;
    const uint32_t*                    pPreserveAttachments;
} VkSubpassDescription2;
```

- `sType` is a VkStructureType value identifying this structure.
- `pNext` is `NULL` or a pointer to a structure extending this structure.
- `flags` is a bitmask of VkSubpassDescriptionFlagBits specifying usage of the subpass.
- `pipelineBindPoint` is a VkPipelineBindPoint value specifying the pipeline type supported for this subpass.
- `viewMask` is a bitfield of view indices describing which views rendering is broadcast to in this subpass, when multiview is enabled.
- `inputAttachmentCount` is the number of input attachments.
- `pInputAttachments` is a pointer to an array of VkAttachmentReference2 structures defining the input attachments for this subpass and their layouts.
- `colorAttachmentCount` is the number of color attachments.
- `pColorAttachments` is a pointer to an array of `colorAttachmentCount` VkAttachmentReference2 structures defining the color attachments for this subpass and their layouts.
- `pResolveAttachments` is `NULL` or a pointer to an array of `colorAttachmentCount`

VkAttachmentReference2 structures defining the resolve attachments for this subpass and their layouts.

- `pDepthStencilAttachment` is a pointer to a VkAttachmentReference2 structure specifying the depth/stencil attachment for this subpass and its layout.
- `preserveAttachmentCount` is the number of preserved attachments.
- `pPreserveAttachments` is a pointer to an array of `preserveAttachmentCount` render pass attachment indices identifying attachments that are not used by this subpass, but whose contents **must** be preserved throughout the subpass.

Parameters defined by this structure with the same name as those in VkSubpassDescription have the identical effect to those parameters.

`viewMask` has the same effect for the described subpass as VkRenderPassMultiviewCreateInfo ::`pViewMasks` has on each corresponding subpass.

Valid Usage

- VUID-VkSubpassDescription2-attachment-06912
  If the `attachment` member of an element of `pInputAttachments` is not `VK_ATTACHMENT_UNUSED`, its `layout` member **must** not be `VK_IMAGE_LAYOUT_COLOR_ATTACHMENT_OPTIMAL` or `VK_IMAGE_LAYOUT_DEPTH_STENCIL_ATTACHMENT_OPTIMAL`
- VUID-VkSubpassDescription2-attachment-06913
  If the `attachment` member of an element of `pColorAttachments` is not `VK_ATTACHMENT_UNUSED`, its `layout` member **must** not be `VK_IMAGE_LAYOUT_DEPTH_STENCIL_ATTACHMENT_OPTIMAL` or `VK_IMAGE_LAYOUT_SHADER_READ_ONLY_OPTIMAL`
- VUID-VkSubpassDescription2-attachment-06914
  If the `attachment` member of an element of `pResolveAttachments` is not `VK_ATTACHMENT_UNUSED`, its `layout` member **must** not be `VK_IMAGE_LAYOUT_DEPTH_STENCIL_ATTACHMENT_OPTIMAL` or `VK_IMAGE_LAYOUT_SHADER_READ_ONLY_OPTIMAL`
- VUID-VkSubpassDescription2-attachment-06915
  If the `attachment` member of `pDepthStencilAttachment` is not `VK_ATTACHMENT_UNUSED`, ts `layout` member **must** not be `VK_IMAGE_LAYOUT_COLOR_ATTACHMENT_OPTIMAL` or `VK_IMAGE_LAYOUT_SHADER_READ_ONLY_OPTIMAL`
- VUID-VkSubpassDescription2-attachment-06916
  If the `attachment` member of an element of `pColorAttachments` is not `VK_ATTACHMENT_UNUSED`, its `layout` member **must** not be `VK_IMAGE_LAYOUT_DEPTH_ATTACHMENT_STENCIL_READ_ONLY_OPTIMAL` or `VK_IMAGE_LAYOUT_DEPTH_READ_ONLY_STENCIL_ATTACHMENT_OPTIMAL`
- VUID-VkSubpassDescription2-attachment-06917
  If the `attachment` member of an element of `pResolveAttachments` is not `VK_ATTACHMENT_UNUSED`, its `layout` member **must** not be `VK_IMAGE_LAYOUT_DEPTH_ATTACHMENT_STENCIL_READ_ONLY_OPTIMAL` or `VK_IMAGE_LAYOUT_DEPTH_READ_ONLY_STENCIL_ATTACHMENT_OPTIMAL`

- VUID-VkSubpassDescription2-attachment-06918
  If the attachment member of an element of pInputAttachments is not VK_ATTACHMENT_UNUSED, its layout member **must** not be VK_IMAGE_LAYOUT_DEPTH_ATTACHMENT_OPTIMAL or VK_IMAGE_LAYOUT_STENCIL_ATTACHMENT_OPTIMAL
- VUID-VkSubpassDescription2-attachment-06919
  If the attachment member of an element of pColorAttachments is not VK_ATTACHMENT_UNUSED, its layout member **must** not be VK_IMAGE_LAYOUT_DEPTH_ATTACHMENT_OPTIMAL, VK_IMAGE_LAYOUT_DEPTH_READ_ONLY_OPTIMAL, VK_IMAGE_LAYOUT_STENCIL_ATTACHMENT_OPTIMAL, or VK_IMAGE_LAYOUT_STENCIL_READ_ONLY_OPTIMAL
- VUID-VkSubpassDescription2-attachment-06920
  If the attachment member of an element of pResolveAttachments is not VK_ATTACHMENT_UNUSED, its layout member **must** not be VK_IMAGE_LAYOUT_DEPTH_ATTACHMENT_OPTIMAL, VK_IMAGE_LAYOUT_DEPTH_READ_ONLY_OPTIMAL, VK_IMAGE_LAYOUT_STENCIL_ATTACHMENT_OPTIMAL, or VK_IMAGE_LAYOUT_STENCIL_READ_ONLY_OPTIMAL
- VUID-VkSubpassDescription2-attachment-06251
  If the attachment member of pDepthStencilAttachment is not VK_ATTACHMENT_UNUSED and its pNext chain includes a VkAttachmentReferenceStencilLayout structure, the layout member of pDepthStencilAttachment **must** not be VK_IMAGE_LAYOUT_STENCIL_ATTACHMENT_OPTIMAL or VK_IMAGE_LAYOUT_STENCIL_READ_ONLY_OPTIMAL
- VUID-VkSubpassDescription2-pipelineBindPoint-04953
  pipelineBindPoint **must** be VK_PIPELINE_BIND_POINT_GRAPHICS
- VUID-VkSubpassDescription2-colorAttachmentCount-03063
  colorAttachmentCount **must** be less than or equal to VkPhysicalDeviceLimits ::maxColorAttachments
- VUID-VkSubpassDescription2-loadOp-03064
  If the first use of an attachment in this render pass is as an input attachment, and the attachment is not also used as a color or depth/stencil attachment in the same subpass, then loadOp **must** not be VK_ATTACHMENT_LOAD_OP_CLEAR
- VUID-VkSubpassDescription2-pResolveAttachments-03065
  If pResolveAttachments is not NULL, for each resolve attachment that does not have the value VK_ATTACHMENT_UNUSED, the corresponding color attachment **must** not have the value VK_ATTACHMENT_UNUSED
- VUID-VkSubpassDescription2-pResolveAttachments-03066
  If pResolveAttachments is not NULL, for each resolve attachment that is not VK_ATTACHMENT_UNUSED, the corresponding color attachment **must** not have a sample count of VK_SAMPLE_COUNT_1_BIT
- VUID-VkSubpassDescription2-pResolveAttachments-03068
  Each element of pResolveAttachments **must** have the same VkFormat as its corresponding color attachment
- VUID-VkSubpassDescription2-pResolveAttachments-03067
  If pResolveAttachments is not NULL, each resolve attachment that is not VK_ATTACHMENT_UNUSED **must** have a sample count of VK_SAMPLE_COUNT_1_BIT

- VUID-VkSubpassDescription2-pInputAttachments-02897
  All attachments in `pInputAttachments` that are not `VK_ATTACHMENT_UNUSED`

  must have image formats whose potential format features contain at least `VK_FORMAT_FEATURE_COLOR_ATTACHMENT_BIT` or `VK_FORMAT_FEATURE_DEPTH_STENCIL_ATTACHMENT_BIT`
- VUID-VkSubpassDescription2-pColorAttachments-02898
  All attachments in `pColorAttachments` that are not `VK_ATTACHMENT_UNUSED` **must** have image formats whose potential format features contain `VK_FORMAT_FEATURE_COLOR_ATTACHMENT_BIT`
- VUID-VkSubpassDescription2-pResolveAttachments-02899
  All attachments in `pResolveAttachments` that are not `VK_ATTACHMENT_UNUSED` **must** have image formats whose potential format features contain `VK_FORMAT_FEATURE_COLOR_ATTACHMENT_BIT`
- VUID-VkSubpassDescription2-pDepthStencilAttachment-02900
  If `pDepthStencilAttachment` is not `NULL` and the attachment is not `VK_ATTACHMENT_UNUSED` then it **must** have an image format whose potential format features contain `VK_FORMAT_FEATURE_DEPTH_STENCIL_ATTACHMENT_BIT`
- VUID-VkSubpassDescription2-multisampledRenderToSingleSampled-06872
  All attachments in `pDepthStencilAttachment` or `pColorAttachments` that are not `VK_ATTACHMENT_UNUSED` **must** have the same sample count
- VUID-VkSubpassDescription2-attachment-03073
  Each element of `pPreserveAttachments` **must** not be `VK_ATTACHMENT_UNUSED`
- VUID-VkSubpassDescription2-pPreserveAttachments-03074
  Each element of `pPreserveAttachments` **must** not also be an element of any other member of the subpass description
- VUID-VkSubpassDescription2-layout-02528
  If any attachment is used by more than one VkAttachmentReference2 member, then each use **must** use the same `layout`
- VUID-VkSubpassDescription2-attachment-02799
  If the `attachment` member of any element of `pInputAttachments` is not `VK_ATTACHMENT_UNUSED`, then the `aspectMask` member **must** be a valid combination of VkImageAspectFlagBits
- VUID-VkSubpassDescription2-attachment-02800
  If the `attachment` member of any element of `pInputAttachments` is not `VK_ATTACHMENT_UNUSED`, then the `aspectMask` member **must** not be `0`
- VUID-VkSubpassDescription2-attachment-02801
  If the `attachment` member of any element of `pInputAttachments` is not `VK_ATTACHMENT_UNUSED`, then the `aspectMask` member **must** not include `VK_IMAGE_ASPECT_METADATA_BIT`
- VUID-VkSubpassDescription2-pDepthStencilAttachment-04440
  An attachment **must** not be used in both `pDepthStencilAttachment` and `pColorAttachments`
- VUID-VkSubpassDescription2-multiview-06558
  If the `multiview` feature is not enabled, `viewMask` **must** be `0`
- VUID-VkSubpassDescription2-viewMask-06706
  The index of the most significant bit in `viewMask` **must** be less than `maxMultiviewViewCount`

Valid Usage (Implicit)

- VUID-VkSubpassDescription2-sType-sType
  `sType` **must** be `VK_STRUCTURE_TYPE_SUBPASS_DESCRIPTION_2`
- VUID-VkSubpassDescription2-pNext-pNext
  `pNext` **must** be `NULL` or a pointer to a valid instance of VkSubpassDescriptionDepthStencilResolve
- VUID-VkSubpassDescription2-sType-unique
  The `sType` value of each struct in the `pNext` chain **must** be unique
- VUID-VkSubpassDescription2-flags-zerobitmask
  `flags` **must** be `0`
- VUID-VkSubpassDescription2-pipelineBindPoint-parameter
  `pipelineBindPoint` **must** be a valid VkPipelineBindPoint value
- VUID-VkSubpassDescription2-pInputAttachments-parameter
  If `inputAttachmentCount` is not `0`, `pInputAttachments` **must** be a valid pointer to an array of `inputAttachmentCount` valid VkAttachmentReference2 structures
- VUID-VkSubpassDescription2-pColorAttachments-parameter
  If `colorAttachmentCount` is not `0`, `pColorAttachments` **must** be a valid pointer to an array of `colorAttachmentCount` valid VkAttachmentReference2 structures
- VUID-VkSubpassDescription2-pResolveAttachments-parameter
  If `colorAttachmentCount` is not `0`, and `pResolveAttachments` is not `NULL`, `pResolveAttachments` **must** be a valid pointer to an array of `colorAttachmentCount` valid VkAttachmentReference2 structures
- VUID-VkSubpassDescription2-pDepthStencilAttachment-parameter
  If `pDepthStencilAttachment` is not `NULL`, `pDepthStencilAttachment` **must** be a valid pointer to a valid VkAttachmentReference2 structure
- VUID-VkSubpassDescription2-pPreserveAttachments-parameter
  If `preserveAttachmentCount` is not `0`, `pPreserveAttachments` **must** be a valid pointer to an array of `preserveAttachmentCount` `uint32_t` values

The `VkSubpassDescriptionDepthStencilResolve` structure is defined as:

```
// Provided by VK_VERSION_1_2
typedef struct VkSubpassDescriptionDepthStencilResolve {
    VkStructureType                  sType;
    const void*                      pNext;
    VkResolveModeFlagBits            depthResolveMode;
    VkResolveModeFlagBits            stencilResolveMode;
    const VkAttachmentReference2*    pDepthStencilResolveAttachment;
} VkSubpassDescriptionDepthStencilResolve;
```

- `sType` is a VkStructureType value identifying this structure.

- pNext is NULL or a pointer to a structure extending this structure.
- depthResolveMode is a VkResolveModeFlagBits value describing the depth resolve mode.
- stencilResolveMode is a VkResolveModeFlagBits value describing the stencil resolve mode.
- pDepthStencilResolveAttachment is NULL or a pointer to a VkAttachmentReference2 structure defining the depth/stencil resolve attachment for this subpass and its layout.

If the pNext chain of VkSubpassDescription2 includes a VkSubpassDescriptionDepthStencilResolve structure, then that structure describes multisample resolve operations for the depth/stencil attachment in a subpass. If this structure is not included in the pNext chain of VkSubpassDescription2, or if it is and either pDepthStencilResolveAttachment is NULL or its attachment index is VK_ATTACHMENT_UNUSED, it indicates that no depth/stencil resolve attachment will be used in the subpass.

Valid Usage

- VUID-VkSubpassDescriptionDepthStencilResolve-pDepthStencilResolveAttachment-03177
  If pDepthStencilResolveAttachment is not NULL and does not have the value VK_ATTACHMENT_UNUSED, pDepthStencilAttachment **must** not be NULL or have the value VK_ATTACHMENT_UNUSED
- VUID-VkSubpassDescriptionDepthStencilResolve-pDepthStencilResolveAttachment-03179
  If pDepthStencilResolveAttachment is not NULL and does not have the value VK_ATTACHMENT_UNUSED, pDepthStencilAttachment **must** not have a sample count of VK_SAMPLE_COUNT_1_BIT
- VUID-VkSubpassDescriptionDepthStencilResolve-pDepthStencilResolveAttachment-03180
  If pDepthStencilResolveAttachment is not NULL and does not have the value VK_ATTACHMENT_UNUSED, pDepthStencilResolveAttachment **must** have a sample count of VK_SAMPLE_COUNT_1_BIT
- VUID-VkSubpassDescriptionDepthStencilResolve-pDepthStencilResolveAttachment-02651
  If pDepthStencilResolveAttachment is not NULL and does not have the value VK_ATTACHMENT_UNUSED then it **must** have an image format whose potential format features contain VK_FORMAT_FEATURE_DEPTH_STENCIL_ATTACHMENT_BIT
- VUID-VkSubpassDescriptionDepthStencilResolve-pDepthStencilResolveAttachment-03181
  If pDepthStencilResolveAttachment is not NULL and does not have the value VK_ATTACHMENT_UNUSED and VkFormat of pDepthStencilResolveAttachment has a depth component, then the VkFormat of pDepthStencilAttachment **must** have a depth component with the same number of bits and numeric format
- VUID-VkSubpassDescriptionDepthStencilResolve-pDepthStencilResolveAttachment-03182
  If pDepthStencilResolveAttachment is not NULL and does not have the value VK_ATTACHMENT_UNUSED, and VkFormat of pDepthStencilResolveAttachment has a stencil component, then the VkFormat of pDepthStencilAttachment **must** have a stencil component with the same number of bits and numeric format
- VUID-VkSubpassDescriptionDepthStencilResolve-pDepthStencilResolveAttachment-03178
  If pDepthStencilResolveAttachment is not NULL and does not have the value VK_ATTACHMENT_UNUSED, depthResolveMode and stencilResolveMode **must** not both be

VK_RESOLVE_MODE_NONE

- VUID-VkSubpassDescriptionDepthStencilResolve-depthResolveMode-03183
  If pDepthStencilResolveAttachment is not NULL and does not have the value VK_ATTACHMENT_UNUSED and the VkFormat of pDepthStencilResolveAttachment has a depth component, then the value of depthResolveMode **must** be one of the bits set in VkPhysicalDeviceDepthStencilResolveProperties::supportedDepthResolveModes or VK_RESOLVE_MODE_NONE
- VUID-VkSubpassDescriptionDepthStencilResolve-stencilResolveMode-03184
  If pDepthStencilResolveAttachment is not NULL and does not have the value VK_ATTACHMENT_UNUSED and the VkFormat of pDepthStencilResolveAttachment has a stencil component, then the value of stencilResolveMode **must** be one of the bits set in VkPhysicalDeviceDepthStencilResolveProperties::supportedStencilResolveModes or VK_RESOLVE_MODE_NONE
- VUID-VkSubpassDescriptionDepthStencilResolve-pDepthStencilResolveAttachment-03185
  If pDepthStencilResolveAttachment is not NULL and does not have the value VK_ATTACHMENT_UNUSED, the VkFormat of pDepthStencilResolveAttachment has both depth and stencil components, VkPhysicalDeviceDepthStencilResolveProperties::independentResolve is VK_FALSE, and VkPhysicalDeviceDepthStencilResolveProperties::independentResolveNone is VK_FALSE, then the values of depthResolveMode and stencilResolveMode **must** be identical
- VUID-VkSubpassDescriptionDepthStencilResolve-pDepthStencilResolveAttachment-03186
  If pDepthStencilResolveAttachment is not NULL and does not have the value VK_ATTACHMENT_UNUSED, the VkFormat of pDepthStencilResolveAttachment has both depth and stencil components, VkPhysicalDeviceDepthStencilResolveProperties::independentResolve is VK_FALSE and VkPhysicalDeviceDepthStencilResolveProperties::independentResolveNone is VK_TRUE, then the values of depthResolveMode and stencilResolveMode **must** be identical or one of them **must** be VK_RESOLVE_MODE_NONE

Valid Usage (Implicit)

- VUID-VkSubpassDescriptionDepthStencilResolve-sType-sType
  sType **must** be VK_STRUCTURE_TYPE_SUBPASS_DESCRIPTION_DEPTH_STENCIL_RESOLVE
- VUID-VkSubpassDescriptionDepthStencilResolve-pDepthStencilResolveAttachment-parameter
  If pDepthStencilResolveAttachment is not NULL, pDepthStencilResolveAttachment **must** be a valid pointer to a valid VkAttachmentReference2 structure

The VkAttachmentReference2 structure is defined as:

```
// Provided by VK_VERSION_1_2
typedef struct VkAttachmentReference2 {
    VkStructureType       sType;
    const void*           pNext;
    uint32_t              attachment;
    VkImageLayout         layout;
    VkImageAspectFlags    aspectMask;
} VkAttachmentReference2;
```

- `sType` is a VkStructureType value identifying this structure.
- `pNext` is `NULL` or a pointer to a structure extending this structure.
- `attachment` is either an integer value identifying an attachment at the corresponding index in VkRenderPassCreateInfo2::`pAttachments`, or `VK_ATTACHMENT_UNUSED` to signify that this attachment is not used.
- `layout` is a VkImageLayout value specifying the layout the attachment uses during the subpass.
- `aspectMask` is a mask of which aspect(s) **can** be accessed within the specified subpass as an input attachment.

Parameters defined by this structure with the same name as those in VkAttachmentReference have the identical effect to those parameters.

`aspectMask` is ignored when this structure is used to describe anything other than an input attachment reference.

If the `separateDepthStencilLayouts` feature is enabled, and `attachment` has a depth/stencil format, `layout` **can** be set to a layout that only specifies the layout of the depth aspect.

If `layout` only specifies the layout of the depth aspect of the attachment, the layout of the stencil aspect is specified by the `stencilLayout` member of a VkAttachmentReferenceStencilLayout structure included in the `pNext` chain. Otherwise, `layout` describes the layout for all relevant image aspects.

Valid Usage

- VUID-VkAttachmentReference2-layout-03077
  If `attachment` is not `VK_ATTACHMENT_UNUSED`, `layout` **must** not be `VK_IMAGE_LAYOUT_UNDEFINED`, `VK_IMAGE_LAYOUT_PREINITIALIZED`, or `VK_IMAGE_LAYOUT_PRESENT_SRC_KHR`
- VUID-VkAttachmentReference2-separateDepthStencilLayouts-03313
  If the `separateDepthStencilLayouts` feature is not enabled, and `attachment` is not `VK_ATTACHMENT_UNUSED`, `layout` **must** not be `VK_IMAGE_LAYOUT_DEPTH_ATTACHMENT_OPTIMAL`, `VK_IMAGE_LAYOUT_DEPTH_READ_ONLY_OPTIMAL`, `VK_IMAGE_LAYOUT_STENCIL_ATTACHMENT_OPTIMAL`, or `VK_IMAGE_LAYOUT_STENCIL_READ_ONLY_OPTIMAL`,

Valid Usage (Implicit)

- VUID-VkAttachmentReference2-sType-sType
  `sType` **must** be `VK_STRUCTURE_TYPE_ATTACHMENT_REFERENCE_2`
- VUID-VkAttachmentReference2-pNext-pNext
  `pNext` **must** be `NULL` or a pointer to a valid instance of VkAttachmentReferenceStencilLayout
- VUID-VkAttachmentReference2-sType-unique
  The `sType` value of each struct in the `pNext` chain **must** be unique
- VUID-VkAttachmentReference2-layout-parameter
  `layout` **must** be a valid VkImageLayout value

The `VkAttachmentReferenceStencilLayout` structure is defined as:

```
// Provided by VK_VERSION_1_2
typedef struct VkAttachmentReferenceStencilLayout {
    VkStructureType    sType;
    void*              pNext;
    VkImageLayout      stencilLayout;
} VkAttachmentReferenceStencilLayout;
```

- `sType` is a VkStructureType value identifying this structure.
- `pNext` is `NULL` or a pointer to a structure extending this structure.
- `stencilLayout` is a VkImageLayout value specifying the layout the stencil aspect of the attachment uses during the subpass.

Valid Usage

- VUID-VkAttachmentReferenceStencilLayout-stencilLayout-03318
  `stencilLayout` **must** not be `VK_IMAGE_LAYOUT_UNDEFINED`, `VK_IMAGE_LAYOUT_PREINITIALIZED`, `VK_IMAGE_LAYOUT_COLOR_ATTACHMENT_OPTIMAL`, `VK_IMAGE_LAYOUT_DEPTH_ATTACHMENT_OPTIMAL`, `VK_IMAGE_LAYOUT_DEPTH_READ_ONLY_OPTIMAL`, `VK_IMAGE_LAYOUT_DEPTH_STENCIL_ATTACHMENT_OPTIMAL`, `VK_IMAGE_LAYOUT_DEPTH_STENCIL_READ_ONLY_OPTIMAL`, `VK_IMAGE_LAYOUT_DEPTH_ATTACHMENT_STENCIL_READ_ONLY_OPTIMAL`, `VK_IMAGE_LAYOUT_DEPTH_READ_ONLY_STENCIL_ATTACHMENT_OPTIMAL`, or `VK_IMAGE_LAYOUT_PRESENT_SRC_KHR`

Valid Usage (Implicit)

- VUID-VkAttachmentReferenceStencilLayout-sType-sType
  `sType` **must** be `VK_STRUCTURE_TYPE_ATTACHMENT_REFERENCE_STENCIL_LAYOUT`

- VUID-VkAttachmentReferenceStencilLayout-stencilLayout-parameter
  `stencilLayout` **must** be a valid VkImageLayout value

The `VkSubpassDependency2` structure is defined as:

```
// Provided by VK_VERSION_1_2
typedef struct VkSubpassDependency2 {
    VkStructureType         sType;
    const void*             pNext;
    uint32_t                srcSubpass;
    uint32_t                dstSubpass;
    VkPipelineStageFlags    srcStageMask;
    VkPipelineStageFlags    dstStageMask;
    VkAccessFlags           srcAccessMask;
    VkAccessFlags           dstAccessMask;
    VkDependencyFlags       dependencyFlags;
    int32_t                 viewOffset;
} VkSubpassDependency2;
```

- `sType` is a VkStructureType value identifying this structure.
- `pNext` is `NULL` or a pointer to a structure extending this structure.
- `srcSubpass` is the subpass index of the first subpass in the dependency, or `VK_SUBPASS_EXTERNAL`.
- `dstSubpass` is the subpass index of the second subpass in the dependency, or `VK_SUBPASS_EXTERNAL`.
- `srcStageMask` is a bitmask of VkPipelineStageFlagBits specifying the source stage mask.
- `dstStageMask` is a bitmask of VkPipelineStageFlagBits specifying the destination stage mask
- `srcAccessMask` is a bitmask of VkAccessFlagBits specifying a source access mask.
- `dstAccessMask` is a bitmask of VkAccessFlagBits specifying a destination access mask.
- `dependencyFlags` is a bitmask of VkDependencyFlagBits.
- `viewOffset` controls which views in the source subpass the views in the destination subpass depend on.

Parameters defined by this structure with the same name as those in VkSubpassDependency have the identical effect to those parameters.

`viewOffset` has the same effect for the described subpass dependency as VkRenderPassMultiviewCreateInfo::`pViewOffsets` has on each corresponding subpass dependency.

If a VkMemoryBarrier2 is included in the `pNext` chain, `srcStageMask`, `dstStageMask`, `srcAccessMask`, and `dstAccessMask` parameters are ignored. The synchronization and access scopes instead are defined by the parameters of VkMemoryBarrier2.

Valid Usage

- VUID-VkSubpassDependency2-srcStageMask-04090
  If the `geometryShader` feature is not enabled, `srcStageMask` **must** not contain `VK_PIPELINE_STAGE_GEOMETRY_SHADER_BIT`
- VUID-VkSubpassDependency2-srcStageMask-04091
  If the `tessellationShader` feature is not enabled, `srcStageMask` **must** not contain `VK_PIPELINE_STAGE_TESSELLATION_CONTROL_SHADER_BIT` or `VK_PIPELINE_STAGE_TESSELLATION_EVALUATION_SHADER_BIT`
- VUID-VkSubpassDependency2-srcStageMask-03937
  If the `synchronization2` feature is not enabled, `srcStageMask` **must** not be `0`
- VUID-VkSubpassDependency2-dstStageMask-04090
  If the `geometryShader` feature is not enabled, `dstStageMask` **must** not contain `VK_PIPELINE_STAGE_GEOMETRY_SHADER_BIT`
- VUID-VkSubpassDependency2-dstStageMask-04091
  If the `tessellationShader` feature is not enabled, `dstStageMask` **must** not contain `VK_PIPELINE_STAGE_TESSELLATION_CONTROL_SHADER_BIT` or `VK_PIPELINE_STAGE_TESSELLATION_EVALUATION_SHADER_BIT`
- VUID-VkSubpassDependency2-dstStageMask-03937
  If the `synchronization2` feature is not enabled, `dstStageMask` **must** not be `0`
- VUID-VkSubpassDependency2-srcSubpass-03084
  `srcSubpass` **must** be less than or equal to `dstSubpass`, unless one of them is `VK_SUBPASS_EXTERNAL`, to avoid cyclic dependencies and ensure a valid execution order
- VUID-VkSubpassDependency2-srcSubpass-03085
  `srcSubpass` and `dstSubpass` **must** not both be equal to `VK_SUBPASS_EXTERNAL`
- VUID-VkSubpassDependency2-srcSubpass-06810
  If `srcSubpass` is equal to `dstSubpass` and `srcStageMask` includes a framebuffer-space stage, `dstStageMask` **must** only contain framebuffer-space stages
- VUID-VkSubpassDependency2-srcAccessMask-03088
  Any access flag included in `srcAccessMask` **must** be supported by one of the pipeline stages in `srcStageMask`, as specified in the table of supported access types
- VUID-VkSubpassDependency2-dstAccessMask-03089
  Any access flag included in `dstAccessMask` **must** be supported by one of the pipeline stages in `dstStageMask`, as specified in the table of supported access types
- VUID-VkSubpassDependency2-dependencyFlags-03090
  If `dependencyFlags` includes `VK_DEPENDENCY_VIEW_LOCAL_BIT`, `srcSubpass` **must** not be equal to `VK_SUBPASS_EXTERNAL`
- VUID-VkSubpassDependency2-dependencyFlags-03091
  If `dependencyFlags` includes `VK_DEPENDENCY_VIEW_LOCAL_BIT`, `dstSubpass` **must** not be equal to `VK_SUBPASS_EXTERNAL`
- VUID-VkSubpassDependency2-srcSubpass-02245
  If `srcSubpass` equals `dstSubpass`, and `srcStageMask` and `dstStageMask` both include a

framebuffer-space stage, then `dependencyFlags` **must** include `VK_DEPENDENCY_BY_REGION_BIT`

- VUID-VkSubpassDependency2-viewOffset-02530
  If `viewOffset` is not equal to `0`, `srcSubpass` **must** not be equal to `dstSubpass`
- VUID-VkSubpassDependency2-dependencyFlags-03092
  If `dependencyFlags` does not include `VK_DEPENDENCY_VIEW_LOCAL_BIT`, `viewOffset` **must** be `0`

Valid Usage (Implicit)

- VUID-VkSubpassDependency2-sType-sType
  `sType` **must** be `VK_STRUCTURE_TYPE_SUBPASS_DEPENDENCY_2`
- VUID-VkSubpassDependency2-pNext-pNext
  `pNext` **must** be `NULL` or a pointer to a valid instance of VkMemoryBarrier2
- VUID-VkSubpassDependency2-sType-unique
  The `sType` value of each struct in the `pNext` chain **must** be unique
- VUID-VkSubpassDependency2-srcStageMask-parameter
  `srcStageMask` **must** be a valid combination of VkPipelineStageFlagBits values
- VUID-VkSubpassDependency2-dstStageMask-parameter
  `dstStageMask` **must** be a valid combination of VkPipelineStageFlagBits values
- VUID-VkSubpassDependency2-srcAccessMask-parameter
  `srcAccessMask` **must** be a valid combination of VkAccessFlagBits values
- VUID-VkSubpassDependency2-dstAccessMask-parameter
  `dstAccessMask` **must** be a valid combination of VkAccessFlagBits values
- VUID-VkSubpassDependency2-dependencyFlags-parameter
  `dependencyFlags` **must** be a valid combination of VkDependencyFlagBits values

To destroy a render pass, call:

```
// Provided by VK_VERSION_1_0
void vkDestroyRenderPass(
    VkDevice                                    device,
    VkRenderPass                                renderPass,
    const VkAllocationCallbacks*                pAllocator);
```

- `device` is the logical device that destroys the render pass.
- `renderPass` is the handle of the render pass to destroy.
- `pAllocator` controls host memory allocation as described in the Memory Allocation chapter.

Valid Usage

- VUID-vkDestroyRenderPass-renderPass-00873
  All submitted commands that refer to `renderPass` **must** have completed execution

- VUID-vkDestroyRenderPass-renderPass-00874
  If `VkAllocationCallbacks` were provided when `renderPass` was created, a compatible set of callbacks **must** be provided here
- VUID-vkDestroyRenderPass-renderPass-00875
  If no `VkAllocationCallbacks` were provided when `renderPass` was created, `pAllocator` **must** be `NULL`

Valid Usage (Implicit)

- VUID-vkDestroyRenderPass-device-parameter
  `device` **must** be a valid VkDevice handle
- VUID-vkDestroyRenderPass-renderPass-parameter
  If `renderPass` is not VK_NULL_HANDLE, `renderPass` **must** be a valid VkRenderPass handle
- VUID-vkDestroyRenderPass-pAllocator-parameter
  If `pAllocator` is not `NULL`, `pAllocator` **must** be a valid pointer to a valid VkAllocationCallbacks structure
- VUID-vkDestroyRenderPass-renderPass-parent
  If `renderPass` is a valid handle, it **must** have been created, allocated, or retrieved from `device`

Host Synchronization

- Host access to `renderPass` **must** be externally synchronized

8.3. Render Pass Compatibility

Framebuffers and graphics pipelines are created based on a specific render pass object. They **must** only be used with that render pass object, or one compatible with it.

Two attachment references are compatible if they have matching format and sample count, or are both `VK_ATTACHMENT_UNUSED` or the pointer that would contain the reference is `NULL`.

Two arrays of attachment references are compatible if all corresponding pairs of attachments are compatible. If the arrays are of different lengths, attachment references not present in the smaller array are treated as `VK_ATTACHMENT_UNUSED`.

Two render passes are compatible if their corresponding color, input, resolve, and depth/stencil attachment references are compatible and if they are otherwise identical except for:

- Initial and final image layout in attachment descriptions
- Load and store operations in attachment descriptions
- Image layout in attachment references

As an additional special case, if two render passes have a single subpass, the resolve attachment reference compatibility requirements are ignored.

A framebuffer is compatible with a render pass if it was created using the same render pass or a compatible render pass.

8.4. Framebuffers

Render passes operate in conjunction with *framebuffers*. Framebuffers represent a collection of specific memory attachments that a render pass instance uses.

Framebuffers are represented by `VkFramebuffer` handles:

```
// Provided by VK_VERSION_1_0
VK_DEFINE_NON_DISPATCHABLE_HANDLE(VkFramebuffer)
```

To create a framebuffer, call:

```
// Provided by VK_VERSION_1_0
VkResult vkCreateFramebuffer(
    VkDevice                                    device,
    const VkFramebufferCreateInfo*              pCreateInfo,
    const VkAllocationCallbacks*                pAllocator,
    VkFramebuffer*                              pFramebuffer);
```

- `device` is the logical device that creates the framebuffer.
- `pCreateInfo` is a pointer to a VkFramebufferCreateInfo structure describing additional information about framebuffer creation.
- `pAllocator` controls host memory allocation as described in the Memory Allocation chapter.
- `pFramebuffer` is a pointer to a VkFramebuffer handle in which the resulting framebuffer object is returned.

Valid Usage

- VUID-vkCreateFramebuffer-device-10002
  `device` **must** support at least one queue family with the `VK_QUEUE_GRAPHICS_BIT` capability
- VUID-vkCreateFramebuffer-pCreateInfo-02777
  If `pCreateInfo->flags` does not include `VK_FRAMEBUFFER_CREATE_IMAGELESS_BIT`, and `attachmentCount` is not `0`, each element of `pCreateInfo->pAttachments` **must** have been created on `device`

Valid Usage (Implicit)

- VUID-vkCreateFramebuffer-device-parameter

`device` **must** be a valid VkDevice handle

- VUID-vkCreateFramebuffer-pCreateInfo-parameter
  `pCreateInfo` **must** be a valid pointer to a valid VkFramebufferCreateInfo structure
- VUID-vkCreateFramebuffer-pAllocator-parameter
  If `pAllocator` is not `NULL`, `pAllocator` **must** be a valid pointer to a valid VkAllocationCallbacks structure
- VUID-vkCreateFramebuffer-pFramebuffer-parameter
  `pFramebuffer` **must** be a valid pointer to a VkFramebuffer handle

Return Codes

Success

- `VK_SUCCESS`

Failure

- `VK_ERROR_OUT_OF_HOST_MEMORY`
- `VK_ERROR_OUT_OF_DEVICE_MEMORY`

The `VkFramebufferCreateInfo` structure is defined as:

```
// Provided by VK_VERSION_1_0
typedef struct VkFramebufferCreateInfo {
    VkStructureType             sType;
    const void*                 pNext;
    VkFramebufferCreateFlags    flags;
    VkRenderPass                renderPass;
    uint32_t                    attachmentCount;
    const VkImageView*          pAttachments;
    uint32_t                    width;
    uint32_t                    height;
    uint32_t                    layers;
} VkFramebufferCreateInfo;
```

- `sType` is a VkStructureType value identifying this structure.
- `pNext` is `NULL` or a pointer to a structure extending this structure.
- `flags` is a bitmask of VkFramebufferCreateFlagBits
- `renderPass` is a render pass defining what render passes the framebuffer will be compatible with. See Render Pass Compatibility for details.
- `attachmentCount` is the number of attachments.
- `pAttachments` is a pointer to an array of VkImageView handles, each of which will be used as the corresponding attachment in a render pass instance. If `flags` includes `VK_FRAMEBUFFER_CREATE_IMAGELESS_BIT`, this parameter is ignored.

- `width`, `height` and `layers` define the dimensions of the framebuffer. If the render pass uses multiview, then `layers` **must** be one and each attachment requires a number of layers that is greater than the maximum bit index set in the view mask in the subpasses in which it is used.

It is legal for a subpass to use no color or depth/stencil attachments, either because it has no attachment references or because all of them are `VK_ATTACHMENT_UNUSED`. This kind of subpass **can** use shader side effects such as image stores and atomics to produce an output. In this case, the subpass continues to use the `width`, `height`, and `layers` of the framebuffer to define the dimensions of the rendering area, and the `rasterizationSamples` from each pipeline's VkPipelineMultisampleStateCreateInfo to define the number of samples used in rasterization; however, if VkPhysicalDeviceFeatures::`variableMultisampleRate` is `VK_FALSE`, then all pipelines to be bound with the subpass **must** have the same value for VkPipelineMultisampleStateCreateInfo ::`rasterizationSamples`. In all such cases, `rasterizationSamples` **must** be a valid VkSampleCountFlagBits value that is set in VkPhysicalDeviceLimits ::`framebufferNoAttachmentsSampleCounts`.

Valid Usage

- VUID-VkFramebufferCreateInfo-attachmentCount-00876
  `attachmentCount` **must** be equal to the attachment count specified in `renderPass`
- VUID-VkFramebufferCreateInfo-flags-02778
  If `flags` does not include `VK_FRAMEBUFFER_CREATE_IMAGELESS_BIT` and `attachmentCount` is not `0`, `pAttachments` **must** be a valid pointer to an array of `attachmentCount` valid VkImageView handles
- VUID-VkFramebufferCreateInfo-pAttachments-00877
  If `flags` does not include `VK_FRAMEBUFFER_CREATE_IMAGELESS_BIT`, each element of `pAttachments` that is used as a color attachment or resolve attachment by `renderPass` **must** have been created with a `usage` value including `VK_IMAGE_USAGE_COLOR_ATTACHMENT_BIT`
- VUID-VkFramebufferCreateInfo-pAttachments-02633
  If `flags` does not include `VK_FRAMEBUFFER_CREATE_IMAGELESS_BIT`, each element of `pAttachments` that is used as a depth/stencil attachment by `renderPass` **must** have been created with a `usage` value including `VK_IMAGE_USAGE_DEPTH_STENCIL_ATTACHMENT_BIT`
- VUID-VkFramebufferCreateInfo-pAttachments-02634
  If `flags` does not include `VK_FRAMEBUFFER_CREATE_IMAGELESS_BIT`, each element of `pAttachments` that is used as a depth/stencil resolve attachment by `renderPass` **must** have been created with a `usage` value including `VK_IMAGE_USAGE_DEPTH_STENCIL_ATTACHMENT_BIT`
- VUID-VkFramebufferCreateInfo-pAttachments-00879
  If `renderpass` is not VK_NULL_HANDLE, `flags` does not include `VK_FRAMEBUFFER_CREATE_IMAGELESS_BIT`, each element of `pAttachments` that is used as an input attachment by `renderPass` **must** have been created with a `usage` value including `VK_IMAGE_USAGE_INPUT_ATTACHMENT_BIT`
- VUID-VkFramebufferCreateInfo-pAttachments-00880
  If `flags` does not include `VK_FRAMEBUFFER_CREATE_IMAGELESS_BIT`, each element of `pAttachments` **must** have been created with a VkFormat value that matches the VkFormat specified by the corresponding `VkAttachmentDescription` in `renderPass`

- VUID-VkFramebufferCreateInfo-pAttachments-00881
  If `flags` does not include `VK_FRAMEBUFFER_CREATE_IMAGELESS_BIT`, each element of `pAttachments` **must** have been created with a `samples` value that matches the `samples` value specified by the corresponding `VkAttachmentDescription` in `renderPass`
- VUID-VkFramebufferCreateInfo-flags-04533
  If `flags` does not include `VK_FRAMEBUFFER_CREATE_IMAGELESS_BIT`, each element of `pAttachments` that is used as an input, color, resolve, or depth/stencil attachment by `renderPass` **must** have been created with a VkImageCreateInfo::`extent.width` greater than or equal to `width`
- VUID-VkFramebufferCreateInfo-flags-04534
  If `flags` does not include `VK_FRAMEBUFFER_CREATE_IMAGELESS_BIT`, each element of `pAttachments` that is used as an input, color, resolve, or depth/stencil attachment by `renderPass` **must** have been created with a VkImageCreateInfo::`extent.height` greater than or equal to `height`
- VUID-VkFramebufferCreateInfo-flags-04535
  If `flags` does not include `VK_FRAMEBUFFER_CREATE_IMAGELESS_BIT`, each element of `pAttachments` that is used as an input, color, resolve, or depth/stencil attachment by `renderPass` **must** have been created with a VkImageViewCreateInfo::`subresourceRange.layerCount` greater than or equal to `layers`
- VUID-VkFramebufferCreateInfo-renderPass-04536
  If `renderPass` was specified with non-zero view masks, each element of `pAttachments` that is used as an input, color, resolve, or depth/stencil attachment by `renderPass` **must** have a `layerCount` greater than the index of the most significant bit set in any of those view masks
- VUID-VkFramebufferCreateInfo-pAttachments-00883
  If `flags` does not include `VK_FRAMEBUFFER_CREATE_IMAGELESS_BIT`, each element of `pAttachments` **must** only specify a single mip level
- VUID-VkFramebufferCreateInfo-pAttachments-00884
  If `flags` does not include `VK_FRAMEBUFFER_CREATE_IMAGELESS_BIT`, each element of `pAttachments` **must** have been created with the identity swizzle
- VUID-VkFramebufferCreateInfo-width-00885
  `width` **must** be greater than `0`
- VUID-VkFramebufferCreateInfo-width-00886
  `width` **must** be less than or equal to `maxFramebufferWidth`
- VUID-VkFramebufferCreateInfo-height-00887
  `height` **must** be greater than `0`
- VUID-VkFramebufferCreateInfo-height-00888
  `height` **must** be less than or equal to `maxFramebufferHeight`
- VUID-VkFramebufferCreateInfo-layers-00889
  `layers` **must** be greater than `0`
- VUID-VkFramebufferCreateInfo-layers-00890
  `layers` **must** be less than or equal to `maxFramebufferLayers`
- VUID-VkFramebufferCreateInfo-renderPass-02531
  If `renderPass` was specified with non-zero view masks, `layers` **must** be `1`

- VUID-VkFramebufferCreateInfo-pAttachments-00891
  If `flags` does not include `VK_FRAMEBUFFER_CREATE_IMAGELESS_BIT`, each element of `pAttachments` that is a 2D or 2D array image view taken from a 3D image **must** not be a depth/stencil format
- VUID-VkFramebufferCreateInfo-flags-03189
  If the `imagelessFramebuffer` feature is not enabled, `flags` **must** not include `VK_FRAMEBUFFER_CREATE_IMAGELESS_BIT`
- VUID-VkFramebufferCreateInfo-flags-03190
  If `flags` includes `VK_FRAMEBUFFER_CREATE_IMAGELESS_BIT`, the `pNext` chain **must** include a VkFramebufferAttachmentsCreateInfo structure
- VUID-VkFramebufferCreateInfo-flags-03191
  If `flags` includes `VK_FRAMEBUFFER_CREATE_IMAGELESS_BIT`, the `attachmentImageInfoCount` member of a VkFramebufferAttachmentsCreateInfo structure in the `pNext` chain **must** be equal to either zero or `attachmentCount`
- VUID-VkFramebufferCreateInfo-flags-04541
  If `flags` includes `VK_FRAMEBUFFER_CREATE_IMAGELESS_BIT`, the `width` member of any element of the `pAttachmentImageInfos` member of a VkFramebufferAttachmentsCreateInfo structure in the `pNext` chain that is used as an input, color, resolve or depth/stencil attachment in `renderPass` **must** be greater than or equal to `width`
- VUID-VkFramebufferCreateInfo-flags-04542
  If `flags` includes `VK_FRAMEBUFFER_CREATE_IMAGELESS_BIT`, the `height` member of any element of the `pAttachmentImageInfos` member of a VkFramebufferAttachmentsCreateInfo structure in the `pNext` chain that is used as an input, color, resolve or depth/stencil attachment in `renderPass` **must** be greater than or equal to `height`
- VUID-VkFramebufferCreateInfo-renderPass-03198
  If multiview is enabled for `renderPass` and `flags` includes `VK_FRAMEBUFFER_CREATE_IMAGELESS_BIT`, the `layerCount` member of any element of the `pAttachmentImageInfos` member of a VkFramebufferAttachmentsCreateInfo structure included in the `pNext` chain used as an input, color, resolve, or depth/stencil attachment in `renderPass` **must** be greater than the maximum bit index set in the view mask in the subpasses in which it is used in `renderPass`
- VUID-VkFramebufferCreateInfo-renderPass-04546
  If multiview is not enabled for `renderPass` and `flags` includes `VK_FRAMEBUFFER_CREATE_IMAGELESS_BIT`, the `layerCount` member of any element of the `pAttachmentImageInfos` member of a VkFramebufferAttachmentsCreateInfo structure included in the `pNext` chain used as an input, color, resolve, or depth/stencil attachment in `renderPass` **must** be greater than or equal to `layers`
- VUID-VkFramebufferCreateInfo-flags-03201
  If `flags` includes `VK_FRAMEBUFFER_CREATE_IMAGELESS_BIT`, the `usage` member of any element of the `pAttachmentImageInfos` member of a VkFramebufferAttachmentsCreateInfo structure included in the `pNext` chain that refers to an attachment used as a color attachment or resolve attachment by `renderPass` **must** include `VK_IMAGE_USAGE_COLOR_ATTACHMENT_BIT`
- VUID-VkFramebufferCreateInfo-flags-03202

If `flags` includes `VK_FRAMEBUFFER_CREATE_IMAGELESS_BIT`, the `usage` member of any element of the `pAttachmentImageInfos` member of a VkFramebufferAttachmentsCreateInfo structure included in the `pNext` chain that refers to an attachment used as a depth/stencil attachment by `renderPass` **must** include `VK_IMAGE_USAGE_DEPTH_STENCIL_ATTACHMENT_BIT`

- VUID-VkFramebufferCreateInfo-flags-03204
  If `flags` includes `VK_FRAMEBUFFER_CREATE_IMAGELESS_BIT`, the `usage` member of any element of the `pAttachmentImageInfos` member of a VkFramebufferAttachmentsCreateInfo structure included in the `pNext` chain that refers to an attachment used as an input attachment by `renderPass` **must** include `VK_IMAGE_USAGE_INPUT_ATTACHMENT_BIT`
- VUID-VkFramebufferCreateInfo-flags-03205
  If `flags` includes `VK_FRAMEBUFFER_CREATE_IMAGELESS_BIT`, at least one element of the `pViewFormats` member of any element of the `pAttachmentImageInfos` member of a VkFramebufferAttachmentsCreateInfo structure included in the `pNext` chain **must** be equal to the corresponding value of VkAttachmentDescription::`format` used to create `renderPass`
- VUID-VkFramebufferCreateInfo-flags-04113
  If `flags` does not include `VK_FRAMEBUFFER_CREATE_IMAGELESS_BIT`, each element of `pAttachments` **must** have been created with VkImageViewCreateInfo::`viewType` not equal to `VK_IMAGE_VIEW_TYPE_3D`

Valid Usage (Implicit)

- VUID-VkFramebufferCreateInfo-sType-sType
  `sType` **must** be `VK_STRUCTURE_TYPE_FRAMEBUFFER_CREATE_INFO`
- VUID-VkFramebufferCreateInfo-pNext-pNext
  `pNext` **must** be `NULL` or a pointer to a valid instance of VkFramebufferAttachmentsCreateInfo
- VUID-VkFramebufferCreateInfo-sType-unique
  The `sType` value of each struct in the `pNext` chain **must** be unique
- VUID-VkFramebufferCreateInfo-flags-parameter
  `flags` **must** be a valid combination of VkFramebufferCreateFlagBits values
- VUID-VkFramebufferCreateInfo-renderPass-parameter
  `renderPass` **must** be a valid VkRenderPass handle
- VUID-VkFramebufferCreateInfo-commonparent
  Both of `renderPass`, and the elements of `pAttachments` that are valid handles of non-ignored parameters **must** have been created, allocated, or retrieved from the same VkDevice

The `VkFramebufferAttachmentsCreateInfo` structure is defined as:

```
// Provided by VK_VERSION_1_2
typedef struct VkFramebufferAttachmentsCreateInfo {
    VkStructureType                              sType;
    const void*                                  pNext;
    uint32_t                                     attachmentImageInfoCount;
    const VkFramebufferAttachmentImageInfo*      pAttachmentImageInfos;
} VkFramebufferAttachmentsCreateInfo;
```

- `sType` is a VkStructureType value identifying this structure.
- `pNext` is `NULL` or a pointer to a structure extending this structure.
- `attachmentImageInfoCount` is the number of attachments being described.
- `pAttachmentImageInfos` is a pointer to an array of VkFramebufferAttachmentImageInfo structures, each structure describing a number of parameters of the corresponding attachment in a render pass instance.

Valid Usage (Implicit)

- VUID-VkFramebufferAttachmentsCreateInfo-sType-sType
  `sType` **must** be `VK_STRUCTURE_TYPE_FRAMEBUFFER_ATTACHMENTS_CREATE_INFO`
- VUID-VkFramebufferAttachmentsCreateInfo-pAttachmentImageInfos-parameter
  If `attachmentImageInfoCount` is not `0`, `pAttachmentImageInfos` **must** be a valid pointer to an array of `attachmentImageInfoCount` valid VkFramebufferAttachmentImageInfo structures

The `VkFramebufferAttachmentImageInfo` structure is defined as:

```
// Provided by VK_VERSION_1_2
typedef struct VkFramebufferAttachmentImageInfo {
    VkStructureType       sType;
    const void*           pNext;
    VkImageCreateFlags    flags;
    VkImageUsageFlags     usage;
    uint32_t              width;
    uint32_t              height;
    uint32_t              layerCount;
    uint32_t              viewFormatCount;
    const VkFormat*       pViewFormats;
} VkFramebufferAttachmentImageInfo;
```

- `sType` is a VkStructureType value identifying this structure.
- `pNext` is `NULL` or a pointer to a structure extending this structure.
- `flags` is a bitmask of VkImageCreateFlagBits, matching the value of VkImageCreateInfo::`flags` used to create an image that will be used with this framebuffer.
- `usage` is a bitmask of VkImageUsageFlagBits, matching the value of VkImageCreateInfo::`usage`

used to create an image used with this framebuffer.

- `width` is the width of the image view used for rendering.
- `height` is the height of the image view used for rendering.
- `layerCount` is the number of array layers of the image view used for rendering.
- `viewFormatCount` is the number of entries in the `pViewFormats` array, matching the value of VkImageFormatListCreateInfo::`viewFormatCount` used to create an image used with this framebuffer.
- `pViewFormats` is a pointer to an array of VkFormat values specifying all of the formats which **can** be used when creating views of the image, matching the value of VkImageFormatListCreateInfo::`pViewFormats` used to create an image used with this framebuffer.

Images that **can** be used with the framebuffer when beginning a render pass, as specified by VkRenderPassAttachmentBeginInfo, **must** be created with parameters that are identical to those specified here.

Valid Usage

- VUID-VkFramebufferAttachmentImageInfo-viewFormatCount-09536
  If `viewFormatCount` is not 0, each element of `pViewFormats` **must** not be `VK_FORMAT_UNDEFINED`

Valid Usage (Implicit)

- VUID-VkFramebufferAttachmentImageInfo-sType-sType
  `sType` **must** be `VK_STRUCTURE_TYPE_FRAMEBUFFER_ATTACHMENT_IMAGE_INFO`
- VUID-VkFramebufferAttachmentImageInfo-pNext-pNext
  `pNext` **must** be `NULL`
- VUID-VkFramebufferAttachmentImageInfo-flags-parameter
  `flags` **must** be a valid combination of VkImageCreateFlagBits values
- VUID-VkFramebufferAttachmentImageInfo-usage-parameter
  `usage` **must** be a valid combination of VkImageUsageFlagBits values
- VUID-VkFramebufferAttachmentImageInfo-usage-requiredbitmask
  `usage` **must** not be `0`
- VUID-VkFramebufferAttachmentImageInfo-pViewFormats-parameter
  If `viewFormatCount` is not `0`, `pViewFormats` **must** be a valid pointer to an array of `viewFormatCount` valid VkFormat values

Bits which **can** be set in VkFramebufferCreateInfo::`flags`, specifying options for framebuffers, are:

```
// Provided by VK_VERSION_1_0
typedef enum VkFramebufferCreateFlagBits {
  // Provided by VK_VERSION_1_2
    VK_FRAMEBUFFER_CREATE_IMAGELESS_BIT = 0x00000001,
} VkFramebufferCreateFlagBits;
```

- VK_FRAMEBUFFER_CREATE_IMAGELESS_BIT specifies that image views are not specified, and only attachment compatibility information will be provided via a VkFramebufferAttachmentImageInfo structure.

```
// Provided by VK_VERSION_1_0
typedef VkFlags VkFramebufferCreateFlags;
```

VkFramebufferCreateFlags is a bitmask type for setting a mask of zero or more VkFramebufferCreateFlagBits.

To destroy a framebuffer, call:

```
// Provided by VK_VERSION_1_0
void vkDestroyFramebuffer(
    VkDevice                                    device,
    VkFramebuffer                               framebuffer,
    const VkAllocationCallbacks*                pAllocator);
```

- device is the logical device that destroys the framebuffer.
- framebuffer is the handle of the framebuffer to destroy.
- pAllocator controls host memory allocation as described in the Memory Allocation chapter.

Valid Usage

- VUID-vkDestroyFramebuffer-framebuffer-00892
  All submitted commands that refer to framebuffer **must** have completed execution
- VUID-vkDestroyFramebuffer-framebuffer-00893
  If VkAllocationCallbacks were provided when framebuffer was created, a compatible set of callbacks **must** be provided here
- VUID-vkDestroyFramebuffer-framebuffer-00894
  If no VkAllocationCallbacks were provided when framebuffer was created, pAllocator **must** be NULL

Valid Usage (Implicit)

- VUID-vkDestroyFramebuffer-device-parameter
  device **must** be a valid VkDevice handle

- VUID-vkDestroyFramebuffer-framebuffer-parameter
  If `framebuffer` is not VK_NULL_HANDLE, `framebuffer` **must** be a valid VkFramebuffer handle
- VUID-vkDestroyFramebuffer-pAllocator-parameter
  If `pAllocator` is not `NULL`, `pAllocator` **must** be a valid pointer to a valid VkAllocationCallbacks structure
- VUID-vkDestroyFramebuffer-framebuffer-parent
  If `framebuffer` is a valid handle, it **must** have been created, allocated, or retrieved from `device`

Host Synchronization

- Host access to `framebuffer` **must** be externally synchronized

8.5. Render Pass Load Operations

Render pass load operations define the initial values of an attachment during a render pass instance.

Load operations for attachments with a depth/stencil format execute in the `VK_PIPELINE_STAGE_EARLY_FRAGMENT_TESTS_BIT` pipeline stage. Load operations for attachments with a color format execute in the `VK_PIPELINE_STAGE_COLOR_ATTACHMENT_OUTPUT_BIT` pipeline stage. The load operation for each sample in an attachment happens-before any recorded command which accesses the sample in that render pass instance via that attachment or an alias.

NOTE Because load operations always happen first, external synchronization with attachment access only needs to synchronize the load operations with previous commands; not the operations within the render pass instance.

Load operations only update values within the defined render area for the render pass instance. However, any writes performed by a load operation (as defined by its access masks) to a given attachment **may** read and write back any memory locations within the image subresource bound for that attachment. For depth/stencil images, writes to one aspect **may** also result in read-modify-write operations for the other aspect.

NOTE As entire subresources could be accessed by load operations, applications cannot safely access values outside of the render area during a render pass instance when a load operation that modifies values is used.

Load operations that **can** be used for a render pass are:

```
// Provided by VK_VERSION_1_0
typedef enum VkAttachmentLoadOp {
    VK_ATTACHMENT_LOAD_OP_LOAD = 0,
    VK_ATTACHMENT_LOAD_OP_CLEAR = 1,
    VK_ATTACHMENT_LOAD_OP_DONT_CARE = 2,
} VkAttachmentLoadOp;
```

- VK_ATTACHMENT_LOAD_OP_LOAD specifies that the previous contents of the image within the render area will be preserved as the initial values. For attachments with a depth/stencil format, this uses the access type VK_ACCESS_DEPTH_STENCIL_ATTACHMENT_READ_BIT. For attachments with a color format, this uses the access type VK_ACCESS_COLOR_ATTACHMENT_READ_BIT.
- VK_ATTACHMENT_LOAD_OP_CLEAR specifies that the contents within the render area will be cleared to a uniform value, which is specified when a render pass instance is begun. For attachments with a depth/stencil format, this uses the access type VK_ACCESS_DEPTH_STENCIL_ATTACHMENT_WRITE_BIT. For attachments with a color format, this uses the access type VK_ACCESS_COLOR_ATTACHMENT_WRITE_BIT.
- VK_ATTACHMENT_LOAD_OP_DONT_CARE specifies that the previous contents within the area need not be preserved; the contents of the attachment will be undefined inside the render area. For attachments with a depth/stencil format, this uses the access type VK_ACCESS_DEPTH_STENCIL_ATTACHMENT_WRITE_BIT. For attachments with a color format, this uses the access type VK_ACCESS_COLOR_ATTACHMENT_WRITE_BIT.

During a render pass instance, input and color attachments with color formats that have a component size of 8, 16, or 32 bits **must** be represented in the attachment's format throughout the instance. Attachments with other floating- or fixed-point color formats, or with depth components **may** be represented in a format with a precision higher than the attachment format, but **must** be represented with the same range. When such a component is loaded via the loadOp, it will be converted into an implementation-dependent format used by the render pass. Such components **must** be converted from the render pass format, to the format of the attachment, before they are resolved or stored at the end of a render pass instance via storeOp. Conversions occur as described in Numeric Representation and Computation and Fixed-Point Data Conversions.

8.6. Render Pass Store Operations

Render pass store operations define how values written to an attachment during a render pass instance are stored to memory.

Store operations for attachments with a depth/stencil format execute in the VK_PIPELINE_STAGE_LATE_FRAGMENT_TESTS_BIT pipeline stage. Store operations for attachments with a color format execute in the VK_PIPELINE_STAGE_COLOR_ATTACHMENT_OUTPUT_BIT pipeline stage. The store operation for each sample in an attachment happens-after any recorded command which accesses the sample via that attachment or an alias.

NOTE

Because store operations always happen after other accesses in a render pass instance, external synchronization with attachment access in an earlier render pass only needs to synchronize with the store operations; not the operations within the

render pass instance. This does not apply when using VK_ATTACHMENT_STORE_OP_NONE.

Store operations only update values within the defined render area for the render pass instance. However, any writes performed by a store operation (as defined by its access masks) to a given attachment **may** read and write back any memory locations within the image subresource bound for that attachment. For depth/stencil images, writes to one aspect **may** also result in read-modify-write operations for the other aspect.

NOTE As entire subresources could be accessed by store operations, applications cannot safely access values outside of the render area via aliased resources during a render pass instance when a store operation that modifies values is used.

Possible values of VkAttachmentDescription::storeOp and stencilStoreOp, specifying how the contents of the attachment are treated, are:

```
// Provided by VK_VERSION_1_0
typedef enum VkAttachmentStoreOp {
    VK_ATTACHMENT_STORE_OP_STORE = 0,
    VK_ATTACHMENT_STORE_OP_DONT_CARE = 1,
  // Provided by VK_VERSION_1_3
    VK_ATTACHMENT_STORE_OP_NONE = 1000301000,
} VkAttachmentStoreOp;
```

- VK_ATTACHMENT_STORE_OP_STORE specifies the contents generated during the render pass and within the render area are written to memory. For attachments with a depth/stencil format, this uses the access type VK_ACCESS_DEPTH_STENCIL_ATTACHMENT_WRITE_BIT. For attachments with a color format, this uses the access type VK_ACCESS_COLOR_ATTACHMENT_WRITE_BIT.
- VK_ATTACHMENT_STORE_OP_DONT_CARE specifies the contents within the render area are not needed after rendering, and **may** be discarded; the contents of the attachment will be undefined inside the render area. For attachments with a depth/stencil format, this uses the access type VK_ACCESS_DEPTH_STENCIL_ATTACHMENT_WRITE_BIT. For attachments with a color format, this uses the access type VK_ACCESS_COLOR_ATTACHMENT_WRITE_BIT.
- VK_ATTACHMENT_STORE_OP_NONE specifies the contents within the render area are not accessed by the store operation as long as no values are written to the attachment during the render pass. If values are written during the render pass, this behaves identically to VK_ATTACHMENT_STORE_OP_DONT_CARE and with matching access semantics.

NOTE VK_ATTACHMENT_STORE_OP_DONT_CARE **can** cause contents generated during previous render passes to be discarded before reaching memory, even if no write to the attachment occurs during the current render pass.

8.7. Render Pass Multisample Resolve Operations

Render pass multisample resolve operations combine sample values from a single pixel in a multisample attachment and store the result to the corresponding pixel in a single sample attachment.

Multisample resolve operations for attachments execute in the VK_PIPELINE_STAGE_COLOR_ATTACHMENT_OUTPUT_BIT pipeline stage. A final resolve operation for all pixels in the render area happens-after any recorded command which writes a pixel via the multisample attachment to be resolved or an explicit alias of it in the subpass that it is specified. Any single sample attachment specified for use in a multisample resolve operation **may** have its contents modified at any point once rendering begins for the render pass instance. Reads from the multisample attachment can be synchronized with VK_ACCESS_COLOR_ATTACHMENT_READ_BIT. Access to the single sample attachment can be synchronized with VK_ACCESS_COLOR_ATTACHMENT_READ_BIT and VK_ACCESS_COLOR_ATTACHMENT_WRITE_BIT. These pipeline stage and access types are used whether the attachments are color or depth/stencil attachments.

When using render pass objects, a subpass dependency specified with the above pipeline stages and access flags will ensure synchronization with multisample resolve operations for any attachments that were last accessed by that subpass. This allows later subpasses to read resolved values as input attachments.

Resolve operations only update values within the defined render area for the render pass instance. However, any writes performed by a resolve operation (as defined by its access masks) to a given attachment **may** read and write back any memory locations within the image subresource bound for that attachment. For depth/stencil images, writes to one aspect **may** also result in read-modify-write operations for the other aspect.

NOTE	As entire subresources could be accessed by multisample resolve operations, applications cannot safely access values outside of the render area via aliased resources during a render pass instance when a multisample resolve operation is performed.

Multisample values in a multisample attachment are combined according to the resolve mode used:

```
// Provided by VK_VERSION_1_2
typedef enum VkResolveModeFlagBits {
    VK_RESOLVE_MODE_NONE = 0,
    VK_RESOLVE_MODE_SAMPLE_ZERO_BIT = 0x00000001,
    VK_RESOLVE_MODE_AVERAGE_BIT = 0x00000002,
    VK_RESOLVE_MODE_MIN_BIT = 0x00000004,
    VK_RESOLVE_MODE_MAX_BIT = 0x00000008,
} VkResolveModeFlagBits;
```

- VK_RESOLVE_MODE_NONE indicates that no resolve operation is done.
- VK_RESOLVE_MODE_SAMPLE_ZERO_BIT indicates that result of the resolve operation is equal to the value of sample 0.
- VK_RESOLVE_MODE_AVERAGE_BIT indicates that result of the resolve operation is the average of the sample values.
- VK_RESOLVE_MODE_MIN_BIT indicates that result of the resolve operation is the minimum of the sample values.
- VK_RESOLVE_MODE_MAX_BIT indicates that result of the resolve operation is the maximum of the

sample values.

If no resolve mode is otherwise specified, VK_RESOLVE_MODE_AVERAGE_BIT is used.

```
// Provided by VK_VERSION_1_2
typedef VkFlags VkResolveModeFlags;
```

VkResolveModeFlags is a bitmask type for setting a mask of zero or more VkResolveModeFlagBits.

8.8. Render Pass Commands

An application records the commands for a render pass instance one subpass at a time, by beginning a render pass instance, iterating over the subpasses to record commands for that subpass, and then ending the render pass instance.

To begin a render pass instance, call:

```
// Provided by VK_VERSION_1_0
void vkCmdBeginRenderPass(
    VkCommandBuffer                             commandBuffer,
    const VkRenderPassBeginInfo*                pRenderPassBegin,
    VkSubpassContents                           contents);
```

- commandBuffer is the command buffer in which to record the command.
- pRenderPassBegin is a pointer to a VkRenderPassBeginInfo structure specifying the render pass to begin an instance of, and the framebuffer the instance uses.
- contents is a VkSubpassContents value specifying how the commands in the first subpass will be provided.

After beginning a render pass instance, the command buffer is ready to record the commands for the first subpass of that render pass.

Valid Usage

- VUID-vkCmdBeginRenderPass-initialLayout-00895
  If any of the initialLayout or finalLayout member of the VkAttachmentDescription structures or the layout member of the VkAttachmentReference structures specified when creating the render pass specified in the renderPass member of pRenderPassBegin is VK_IMAGE_LAYOUT_COLOR_ATTACHMENT_OPTIMAL then the corresponding attachment image view of the framebuffer specified in the framebuffer member of pRenderPassBegin **must** have been created with a usage value including VK_IMAGE_USAGE_COLOR_ATTACHMENT_BIT
- VUID-vkCmdBeginRenderPass-initialLayout-01758
  If any of the initialLayout or finalLayout member of the VkAttachmentDescription structures or the layout member of the VkAttachmentReference structures specified when creating the render pass specified in the renderPass member of pRenderPassBegin is

VK_IMAGE_LAYOUT_DEPTH_READ_ONLY_STENCIL_ATTACHMENT_OPTIMAL, VK_IMAGE_LAYOUT_DEPTH_ATTACHMENT_STENCIL_READ_ONLY_OPTIMAL, VK_IMAGE_LAYOUT_DEPTH_STENCIL_ATTACHMENT_OPTIMAL, or VK_IMAGE_LAYOUT_DEPTH_STENCIL_READ_ONLY_OPTIMAL then the corresponding attachment image view of the framebuffer specified in the framebuffer member of pRenderPassBegin **must** have been created with a usage value including VK_IMAGE_USAGE_DEPTH_STENCIL_ATTACHMENT_BIT

- VUID-vkCmdBeginRenderPass-initialLayout-02842
  If any of the initialLayout or finalLayout member of the VkAttachmentDescription structures or the layout member of the VkAttachmentReference structures specified when creating the render pass specified in the renderPass member of pRenderPassBegin is VK_IMAGE_LAYOUT_DEPTH_ATTACHMENT_OPTIMAL, or VK_IMAGE_LAYOUT_DEPTH_READ_ONLY_OPTIMAL, VK_IMAGE_LAYOUT_STENCIL_ATTACHMENT_OPTIMAL, or VK_IMAGE_LAYOUT_STENCIL_READ_ONLY_OPTIMAL then the corresponding attachment image view of the framebuffer specified in the framebuffer member of pRenderPassBegin **must** have been created with a usage value including VK_IMAGE_USAGE_DEPTH_STENCIL_ATTACHMENT_BIT
- VUID-vkCmdBeginRenderPass-stencilInitialLayout-02843
  If any of the stencilInitialLayout or stencilFinalLayout member of the VkAttachmentDescriptionStencilLayout structures or the stencilLayout member of the VkAttachmentReferenceStencilLayout structures specified when creating the render pass specified in the renderPass member of pRenderPassBegin is VK_IMAGE_LAYOUT_STENCIL_ATTACHMENT_OPTIMAL, or VK_IMAGE_LAYOUT_STENCIL_READ_ONLY_OPTIMAL then the corresponding attachment image view of the framebuffer specified in the framebuffer member of pRenderPassBegin **must** have been created with a usage value including VK_IMAGE_USAGE_DEPTH_STENCIL_ATTACHMENT_BIT
- VUID-vkCmdBeginRenderPass-initialLayout-00897
  If any of the initialLayout or finalLayout member of the VkAttachmentDescription structures or the layout member of the VkAttachmentReference structures specified when creating the render pass specified in the renderPass member of pRenderPassBegin is VK_IMAGE_LAYOUT_SHADER_READ_ONLY_OPTIMAL then the corresponding attachment image view of the framebuffer specified in the framebuffer member of pRenderPassBegin **must** have been created with a usage value including VK_IMAGE_USAGE_SAMPLED_BIT or VK_IMAGE_USAGE_INPUT_ATTACHMENT_BIT
- VUID-vkCmdBeginRenderPass-initialLayout-00898
  If any of the initialLayout or finalLayout member of the VkAttachmentDescription structures or the layout member of the VkAttachmentReference structures specified when creating the render pass specified in the renderPass member of pRenderPassBegin is VK_IMAGE_LAYOUT_TRANSFER_SRC_OPTIMAL then the corresponding attachment image view of the framebuffer specified in the framebuffer member of pRenderPassBegin **must** have been created with a usage value including VK_IMAGE_USAGE_TRANSFER_SRC_BIT
- VUID-vkCmdBeginRenderPass-initialLayout-00899
  If any of the initialLayout or finalLayout member of the VkAttachmentDescription structures or the layout member of the VkAttachmentReference structures specified when creating the render pass specified in the renderPass member of pRenderPassBegin is

VK_IMAGE_LAYOUT_TRANSFER_DST_OPTIMAL then the corresponding attachment image view of the framebuffer specified in the framebuffer member of pRenderPassBegin **must** have been created with a usage value including VK_IMAGE_USAGE_TRANSFER_DST_BIT

- VUID-vkCmdBeginRenderPass-initialLayout-00900
  If the initialLayout member of any of the VkAttachmentDescription structures specified when creating the render pass specified in the renderPass member of pRenderPassBegin is not VK_IMAGE_LAYOUT_UNDEFINED, then each such initialLayout **must** be equal to the current layout of the corresponding attachment image subresource of the framebuffer specified in the framebuffer member of pRenderPassBegin
- VUID-vkCmdBeginRenderPass-srcStageMask-06451
  The srcStageMask members of any element of the pDependencies member of VkRenderPassCreateInfo used to create renderPass **must** be supported by the capabilities of the queue family identified by the queueFamilyIndex member of the VkCommandPoolCreateInfo used to create the command pool which commandBuffer was allocated from
- VUID-vkCmdBeginRenderPass-dstStageMask-06452
  The dstStageMask members of any element of the pDependencies member of VkRenderPassCreateInfo used to create renderPass **must** be supported by the capabilities of the queue family identified by the queueFamilyIndex member of the VkCommandPoolCreateInfo used to create the command pool which commandBuffer was allocated from
- VUID-vkCmdBeginRenderPass-framebuffer-02532
  For any attachment in framebuffer that is used by renderPass and is bound to memory locations that are also bound to another attachment used by renderPass, and if at least one of those uses causes either attachment to be written to, both attachments **must** have had the VK_ATTACHMENT_DESCRIPTION_MAY_ALIAS_BIT set
- VUID-vkCmdBeginRenderPass-framebuffer-09045
  If any attachments specified in framebuffer are used by renderPass and are bound to overlapping memory locations, there **must** be only one that is used as a color attachment, depth/stencil, or resolve attachment in any subpass

Valid Usage (Implicit)

- VUID-vkCmdBeginRenderPass-commandBuffer-parameter
  commandBuffer **must** be a valid VkCommandBuffer handle
- VUID-vkCmdBeginRenderPass-pRenderPassBegin-parameter
  pRenderPassBegin **must** be a valid pointer to a valid VkRenderPassBeginInfo structure
- VUID-vkCmdBeginRenderPass-contents-parameter
  contents **must** be a valid VkSubpassContents value
- VUID-vkCmdBeginRenderPass-commandBuffer-recording
  commandBuffer **must** be in the recording state
- VUID-vkCmdBeginRenderPass-commandBuffer-cmdpool
  The VkCommandPool that commandBuffer was allocated from **must** support graphics

operations

- VUID-vkCmdBeginRenderPass-renderpass
  This command **must** only be called outside of a render pass instance
- VUID-vkCmdBeginRenderPass-bufferlevel
  `commandBuffer` **must** be a primary `VkCommandBuffer`

Host Synchronization

- Host access to `commandBuffer` **must** be externally synchronized
- Host access to the `VkCommandPool` that `commandBuffer` was allocated from **must** be externally synchronized

Command Properties

Command Buffer Levels	Render Pass Scope	Supported Queue Types	Command Type
Primary	Outside	Graphics	Action State Synchronization

Alternatively to begin a render pass, call:

```
// Provided by VK_VERSION_1_2
void vkCmdBeginRenderPass2(
    VkCommandBuffer                             commandBuffer,
    const VkRenderPassBeginInfo*                pRenderPassBegin,
    const VkSubpassBeginInfo*                   pSubpassBeginInfo);
```

- `commandBuffer` is the command buffer in which to record the command.
- `pRenderPassBegin` is a pointer to a VkRenderPassBeginInfo structure specifying the render pass to begin an instance of, and the framebuffer the instance uses.
- `pSubpassBeginInfo` is a pointer to a VkSubpassBeginInfo structure containing information about the subpass which is about to begin rendering.

After beginning a render pass instance, the command buffer is ready to record the commands for the first subpass of that render pass.

Valid Usage

- VUID-vkCmdBeginRenderPass2-framebuffer-02779
  Both the `framebuffer` and `renderPass` members of `pRenderPassBegin` **must** have been created on the same VkDevice that `commandBuffer` was allocated on

- VUID-vkCmdBeginRenderPass2-initialLayout-03094
  If any of the `initialLayout` or `finalLayout` member of the `VkAttachmentDescription` structures or the `layout` member of the `VkAttachmentReference` structures specified when creating the render pass specified in the `renderPass` member of `pRenderPassBegin` is `VK_IMAGE_LAYOUT_COLOR_ATTACHMENT_OPTIMAL` then the corresponding attachment image view of the framebuffer specified in the `framebuffer` member of `pRenderPassBegin` **must** have been created with a `usage` value including `VK_IMAGE_USAGE_COLOR_ATTACHMENT_BIT`
- VUID-vkCmdBeginRenderPass2-initialLayout-03096
  If any of the `initialLayout` or `finalLayout` member of the `VkAttachmentDescription` structures or the `layout` member of the `VkAttachmentReference` structures specified when creating the render pass specified in the `renderPass` member of `pRenderPassBegin` is `VK_IMAGE_LAYOUT_DEPTH_READ_ONLY_STENCIL_ATTACHMENT_OPTIMAL`, `VK_IMAGE_LAYOUT_DEPTH_ATTACHMENT_STENCIL_READ_ONLY_OPTIMAL`, `VK_IMAGE_LAYOUT_DEPTH_STENCIL_ATTACHMENT_OPTIMAL`, or `VK_IMAGE_LAYOUT_DEPTH_STENCIL_READ_ONLY_OPTIMAL` then the corresponding attachment image view of the framebuffer specified in the `framebuffer` member of `pRenderPassBegin` **must** have been created with a `usage` value including `VK_IMAGE_USAGE_DEPTH_STENCIL_ATTACHMENT_BIT`
- VUID-vkCmdBeginRenderPass2-initialLayout-02844
  If any of the `initialLayout` or `finalLayout` member of the `VkAttachmentDescription` structures or the `layout` member of the `VkAttachmentReference` structures specified when creating the render pass specified in the `renderPass` member of `pRenderPassBegin` is `VK_IMAGE_LAYOUT_DEPTH_ATTACHMENT_OPTIMAL`, or `VK_IMAGE_LAYOUT_DEPTH_READ_ONLY_OPTIMAL`, `VK_IMAGE_LAYOUT_STENCIL_ATTACHMENT_OPTIMAL`, or `VK_IMAGE_LAYOUT_STENCIL_READ_ONLY_OPTIMAL` then the corresponding attachment image view of the framebuffer specified in the `framebuffer` member of `pRenderPassBegin` **must** have been created with a `usage` value including `VK_IMAGE_USAGE_DEPTH_STENCIL_ATTACHMENT_BIT`
- VUID-vkCmdBeginRenderPass2-stencilInitialLayout-02845
  If any of the `stencilInitialLayout` or `stencilFinalLayout` member of the `VkAttachmentDescriptionStencilLayout` structures or the `stencilLayout` member of the `VkAttachmentReferenceStencilLayout` structures specified when creating the render pass specified in the `renderPass` member of `pRenderPassBegin` is `VK_IMAGE_LAYOUT_STENCIL_ATTACHMENT_OPTIMAL`, or `VK_IMAGE_LAYOUT_STENCIL_READ_ONLY_OPTIMAL` then the corresponding attachment image view of the framebuffer specified in the `framebuffer` member of `pRenderPassBegin` **must** have been created with a `usage` value including `VK_IMAGE_USAGE_DEPTH_STENCIL_ATTACHMENT_BIT`
- VUID-vkCmdBeginRenderPass2-initialLayout-03097
  If any of the `initialLayout` or `finalLayout` member of the `VkAttachmentDescription` structures or the `layout` member of the `VkAttachmentReference` structures specified when creating the render pass specified in the `renderPass` member of `pRenderPassBegin` is `VK_IMAGE_LAYOUT_SHADER_READ_ONLY_OPTIMAL` then the corresponding attachment image view of the framebuffer specified in the `framebuffer` member of `pRenderPassBegin` **must** have been created with a `usage` value including `VK_IMAGE_USAGE_SAMPLED_BIT` or `VK_IMAGE_USAGE_INPUT_ATTACHMENT_BIT`

- VUID-vkCmdBeginRenderPass2-initialLayout-03098
  If any of the `initialLayout` or `finalLayout` member of the `VkAttachmentDescription` structures or the `layout` member of the `VkAttachmentReference` structures specified when creating the render pass specified in the `renderPass` member of `pRenderPassBegin` is `VK_IMAGE_LAYOUT_TRANSFER_SRC_OPTIMAL` then the corresponding attachment image view of the framebuffer specified in the `framebuffer` member of `pRenderPassBegin` **must** have been created with a `usage` value including `VK_IMAGE_USAGE_TRANSFER_SRC_BIT`
- VUID-vkCmdBeginRenderPass2-initialLayout-03099
  If any of the `initialLayout` or `finalLayout` member of the `VkAttachmentDescription` structures or the `layout` member of the `VkAttachmentReference` structures specified when creating the render pass specified in the `renderPass` member of `pRenderPassBegin` is `VK_IMAGE_LAYOUT_TRANSFER_DST_OPTIMAL` then the corresponding attachment image view of the framebuffer specified in the `framebuffer` member of `pRenderPassBegin` **must** have been created with a `usage` value including `VK_IMAGE_USAGE_TRANSFER_DST_BIT`
- VUID-vkCmdBeginRenderPass2-initialLayout-03100
  If the `initialLayout` member of any of the `VkAttachmentDescription` structures specified when creating the render pass specified in the `renderPass` member of `pRenderPassBegin` is not `VK_IMAGE_LAYOUT_UNDEFINED`, then each such `initialLayout` **must** be equal to the current layout of the corresponding attachment image subresource of the framebuffer specified in the `framebuffer` member of `pRenderPassBegin`
- VUID-vkCmdBeginRenderPass2-srcStageMask-06453
  The `srcStageMask` members of any element of the `pDependencies` member of VkRenderPassCreateInfo used to create `renderPass` **must** be supported by the capabilities of the queue family identified by the `queueFamilyIndex` member of the VkCommandPoolCreateInfo used to create the command pool which `commandBuffer` was allocated from
- VUID-vkCmdBeginRenderPass2-dstStageMask-06454
  The `dstStageMask` members of any element of the `pDependencies` member of VkRenderPassCreateInfo used to create `renderPass` **must** be supported by the capabilities of the queue family identified by the `queueFamilyIndex` member of the VkCommandPoolCreateInfo used to create the command pool which `commandBuffer` was allocated from
- VUID-vkCmdBeginRenderPass2-framebuffer-02533
  For any attachment in `framebuffer` that is used by `renderPass` and is bound to memory locations that are also bound to another attachment used by `renderPass`, and if at least one of those uses causes either attachment to be written to, both attachments **must** have had the `VK_ATTACHMENT_DESCRIPTION_MAY_ALIAS_BIT` set
- VUID-vkCmdBeginRenderPass2-framebuffer-09046
  If any attachments specified in `framebuffer` are used by `renderPass` and are bound to overlapping memory locations, there **must** be only one that is used as a color attachment, depth/stencil, or resolve attachment in any subpass

Valid Usage (Implicit)

- VUID-vkCmdBeginRenderPass2-commandBuffer-parameter
  `commandBuffer` **must** be a valid VkCommandBuffer handle
- VUID-vkCmdBeginRenderPass2-pRenderPassBegin-parameter
  `pRenderPassBegin` **must** be a valid pointer to a valid VkRenderPassBeginInfo structure
- VUID-vkCmdBeginRenderPass2-pSubpassBeginInfo-parameter
  `pSubpassBeginInfo` **must** be a valid pointer to a valid VkSubpassBeginInfo structure
- VUID-vkCmdBeginRenderPass2-commandBuffer-recording
  `commandBuffer` **must** be in the recording state
- VUID-vkCmdBeginRenderPass2-commandBuffer-cmdpool
  The `VkCommandPool` that `commandBuffer` was allocated from **must** support graphics operations
- VUID-vkCmdBeginRenderPass2-renderpass
  This command **must** only be called outside of a render pass instance
- VUID-vkCmdBeginRenderPass2-bufferlevel
  `commandBuffer` **must** be a primary `VkCommandBuffer`

Host Synchronization

- Host access to `commandBuffer` **must** be externally synchronized
- Host access to the `VkCommandPool` that `commandBuffer` was allocated from **must** be externally synchronized

Command Properties

Command Buffer Levels	Render Pass Scope	Supported Queue Types	Command Type
Primary	Outside	Graphics	Action State Synchronization

The `VkRenderPassBeginInfo` structure is defined as:

```
// Provided by VK_VERSION_1_0
typedef struct VkRenderPassBeginInfo {
    VkStructureType        sType;
    const void*            pNext;
    VkRenderPass           renderPass;
    VkFramebuffer          framebuffer;
    VkRect2D               renderArea;
    uint32_t               clearValueCount;
    const VkClearValue*    pClearValues;
} VkRenderPassBeginInfo;
```

- `sType` is a VkStructureType value identifying this structure.
- `pNext` is `NULL` or a pointer to a structure extending this structure.
- `renderPass` is the render pass to begin an instance of.
- `framebuffer` is the framebuffer containing the attachments that are used with the render pass.
- `renderArea` is the render area that is affected by the render pass instance, and is described in more detail below.
- `clearValueCount` is the number of elements in `pClearValues`.
- `pClearValues` is a pointer to an array of `clearValueCount` VkClearValue structures containing clear values for each attachment, if the attachment uses a `loadOp` value of `VK_ATTACHMENT_LOAD_OP_CLEAR` or if the attachment has a depth/stencil format and uses a `stencilLoadOp` value of `VK_ATTACHMENT_LOAD_OP_CLEAR`. The array is indexed by attachment number. Only elements corresponding to cleared attachments are used. Other elements of `pClearValues` are ignored.

`renderArea` is the render area that is affected by the render pass instance. The effects of attachment load, store and multisample resolve operations are restricted to the pixels whose x and y coordinates fall within the render area on all attachments. The render area extends to all layers of `framebuffer`. The application **must** ensure (using scissor if necessary) that all rendering is contained within the render area. The render area **must** be contained within the framebuffer dimensions.

NOTE There **may** be a performance cost for using a render area smaller than the framebuffer, unless it matches the render area granularity for the render pass.

Valid Usage

- VUID-VkRenderPassBeginInfo-clearValueCount-00902
  `clearValueCount` **must** be greater than the largest attachment index in `renderPass` specifying a `loadOp` (or `stencilLoadOp`, if the attachment has a depth/stencil format) of `VK_ATTACHMENT_LOAD_OP_CLEAR`
- VUID-VkRenderPassBeginInfo-clearValueCount-04962
  If `clearValueCount` is not `0`, `pClearValues` **must** be a valid pointer to an array of `clearValueCount` VkClearValue unions
- VUID-VkRenderPassBeginInfo-renderPass-00904

renderPass **must** be compatible with the renderPass member of the VkFramebufferCreateInfo structure specified when creating framebuffer

- VUID-VkRenderPassBeginInfo-None-08996
  If the pNext chain does not contain VkDeviceGroupRenderPassBeginInfo or its deviceRenderAreaCount member is equal to 0, renderArea.extent.width **must** be greater than 0
- VUID-VkRenderPassBeginInfo-None-08997
  If the pNext chain does not contain VkDeviceGroupRenderPassBeginInfo or its deviceRenderAreaCount member is equal to 0, renderArea.extent.height **must** be greater than 0
- VUID-VkRenderPassBeginInfo-pNext-02850
  If the pNext chain does not contain VkDeviceGroupRenderPassBeginInfo or its deviceRenderAreaCount member is equal to 0, renderArea.offset.x **must** be greater than or equal to 0
- VUID-VkRenderPassBeginInfo-pNext-02851
  If the pNext chain does not contain VkDeviceGroupRenderPassBeginInfo or its deviceRenderAreaCount member is equal to 0, renderArea.offset.y **must** be greater than or equal to 0
- VUID-VkRenderPassBeginInfo-pNext-02852
  If the pNext chain does not contain VkDeviceGroupRenderPassBeginInfo or its deviceRenderAreaCount member is equal to 0, renderArea.offset.x + renderArea.extent.width **must** be less than or equal to VkFramebufferCreateInfo::width the framebuffer was created with
- VUID-VkRenderPassBeginInfo-pNext-02853
  If the pNext chain does not contain VkDeviceGroupRenderPassBeginInfo or its deviceRenderAreaCount member is equal to 0, renderArea.offset.y + renderArea.extent.height **must** be less than or equal to VkFramebufferCreateInfo::height the framebuffer was created with
- VUID-VkRenderPassBeginInfo-pNext-02856
  If the pNext chain contains VkDeviceGroupRenderPassBeginInfo, offset.x + extent.width of each element of pDeviceRenderAreas **must** be less than or equal to VkFramebufferCreateInfo::width the framebuffer was created with
- VUID-VkRenderPassBeginInfo-pNext-02857
  If the pNext chain contains VkDeviceGroupRenderPassBeginInfo, offset.y + extent.height of each element of pDeviceRenderAreas **must** be less than or equal to VkFramebufferCreateInfo::height the framebuffer was created with
- VUID-VkRenderPassBeginInfo-framebuffer-03207
  If framebuffer was created with a VkFramebufferCreateInfo::flags value that did not include VK_FRAMEBUFFER_CREATE_IMAGELESS_BIT, and the pNext chain includes a VkRenderPassAttachmentBeginInfo structure, its attachmentCount **must** be zero
- VUID-VkRenderPassBeginInfo-framebuffer-03208
  If framebuffer was created with a VkFramebufferCreateInfo::flags value that included VK_FRAMEBUFFER_CREATE_IMAGELESS_BIT, the attachmentCount of a VkRenderPassAttachmentBeginInfo structure included in the pNext chain **must** be equal

to the value of VkFramebufferAttachmentsCreateInfo::attachmentImageInfoCount used to create framebuffer

- VUID-VkRenderPassBeginInfo-framebuffer-02780
  If framebuffer was created with a VkFramebufferCreateInfo::flags value that included VK_FRAMEBUFFER_CREATE_IMAGELESS_BIT, each element of the pAttachments member of a VkRenderPassAttachmentBeginInfo structure included in the pNext chain **must** have been created on the same VkDevice as framebuffer and renderPass
- VUID-VkRenderPassBeginInfo-framebuffer-03209
  If framebuffer was created with a VkFramebufferCreateInfo::flags value that included VK_FRAMEBUFFER_CREATE_IMAGELESS_BIT, each element of the pAttachments member of a VkRenderPassAttachmentBeginInfo structure included in the pNext chain **must** be a VkImageView of an image created with a value of VkImageCreateInfo::flags equal to the flags member of the corresponding element of VkFramebufferAttachmentsCreateInfo ::pAttachmentImageInfos used to create framebuffer
- VUID-VkRenderPassBeginInfo-framebuffer-04627
  If framebuffer was created with a VkFramebufferCreateInfo::flags value that included VK_FRAMEBUFFER_CREATE_IMAGELESS_BIT, each element of the pAttachments member of a VkRenderPassAttachmentBeginInfo structure included in the pNext chain **must** be a VkImageView with an inherited usage equal to the usage member of the corresponding element of VkFramebufferAttachmentsCreateInfo::pAttachmentImageInfos used to create framebuffer
- VUID-VkRenderPassBeginInfo-framebuffer-03211
  If framebuffer was created with a VkFramebufferCreateInfo::flags value that included VK_FRAMEBUFFER_CREATE_IMAGELESS_BIT, each element of the pAttachments member of a VkRenderPassAttachmentBeginInfo structure included in the pNext chain **must** be a VkImageView with a width equal to the width member of the corresponding element of VkFramebufferAttachmentsCreateInfo::pAttachmentImageInfos used to create framebuffer
- VUID-VkRenderPassBeginInfo-framebuffer-03212
  If framebuffer was created with a VkFramebufferCreateInfo::flags value that included VK_FRAMEBUFFER_CREATE_IMAGELESS_BIT, each element of the pAttachments member of a VkRenderPassAttachmentBeginInfo structure included in the pNext chain **must** be a VkImageView with a height equal to the height member of the corresponding element of VkFramebufferAttachmentsCreateInfo::pAttachmentImageInfos used to create framebuffer
- VUID-VkRenderPassBeginInfo-framebuffer-03213
  If framebuffer was created with a VkFramebufferCreateInfo::flags value that included VK_FRAMEBUFFER_CREATE_IMAGELESS_BIT, each element of the pAttachments member of a VkRenderPassAttachmentBeginInfo structure included in the pNext chain **must** be a VkImageView of an image created with a value of VkImageViewCreateInfo ::subresourceRange.layerCount equal to the layerCount member of the corresponding element of VkFramebufferAttachmentsCreateInfo::pAttachmentImageInfos used to create framebuffer
- VUID-VkRenderPassBeginInfo-framebuffer-03214
  If framebuffer was created with a VkFramebufferCreateInfo::flags value that included VK_FRAMEBUFFER_CREATE_IMAGELESS_BIT, each element of the pAttachments member of a VkRenderPassAttachmentBeginInfo structure included in the pNext chain **must** be a

VkImageView of an image created with a value of VkImageFormatListCreateInfo::viewFormatCount equal to the viewFormatCount member of the corresponding element of VkFramebufferAttachmentsCreateInfo::pAttachmentImageInfos used to create framebuffer

- VUID-VkRenderPassBeginInfo-framebuffer-03215
  If framebuffer was created with a VkFramebufferCreateInfo::flags value that included VK_FRAMEBUFFER_CREATE_IMAGELESS_BIT, each element of the pAttachments member of a VkRenderPassAttachmentBeginInfo structure included in the pNext chain **must** be a VkImageView of an image created with a set of elements in VkImageFormatListCreateInfo::pViewFormats equal to the set of elements in the pViewFormats member of the corresponding element of VkFramebufferAttachmentsCreateInfo::pAttachmentImageInfos used to create framebuffer
- VUID-VkRenderPassBeginInfo-framebuffer-03216
  If framebuffer was created with a VkFramebufferCreateInfo::flags value that included VK_FRAMEBUFFER_CREATE_IMAGELESS_BIT, each element of the pAttachments member of a VkRenderPassAttachmentBeginInfo structure included in the pNext chain **must** be a VkImageView of an image created with a value of VkImageViewCreateInfo::format equal to the corresponding value of VkAttachmentDescription::format in renderPass
- VUID-VkRenderPassBeginInfo-framebuffer-09047
  If framebuffer was created with a VkFramebufferCreateInfo::flags value that included VK_FRAMEBUFFER_CREATE_IMAGELESS_BIT, each element of the pAttachments member of a VkRenderPassAttachmentBeginInfo structure included in the pNext chain **must** be a VkImageView of an image created with a value of VkImageCreateInfo::samples equal to the corresponding value of VkAttachmentDescription::samples in renderPass

Valid Usage (Implicit)

- VUID-VkRenderPassBeginInfo-sType-sType
  sType **must** be VK_STRUCTURE_TYPE_RENDER_PASS_BEGIN_INFO
- VUID-VkRenderPassBeginInfo-pNext-pNext
  Each pNext member of any structure (including this one) in the pNext chain **must** be either NULL or a pointer to a valid instance of VkDeviceGroupRenderPassBeginInfo or VkRenderPassAttachmentBeginInfo
- VUID-VkRenderPassBeginInfo-sType-unique
  The sType value of each struct in the pNext chain **must** be unique
- VUID-VkRenderPassBeginInfo-renderPass-parameter
  renderPass **must** be a valid VkRenderPass handle
- VUID-VkRenderPassBeginInfo-framebuffer-parameter
  framebuffer **must** be a valid VkFramebuffer handle
- VUID-VkRenderPassBeginInfo-commonparent
  Both of framebuffer, and renderPass **must** have been created, allocated, or retrieved from the same VkDevice

The VkSubpassBeginInfo structure is defined as:

```
// Provided by VK_VERSION_1_2
typedef struct VkSubpassBeginInfo {
    VkStructureType      sType;
    const void*          pNext;
    VkSubpassContents    contents;
} VkSubpassBeginInfo;
```

- `sType` is a VkStructureType value identifying this structure.
- `pNext` is `NULL` or a pointer to a structure extending this structure.
- `contents` is a VkSubpassContents value specifying how the commands in the next subpass will be provided.

Valid Usage (Implicit)

- VUID-VkSubpassBeginInfo-sType-sType
  `sType` **must** be `VK_STRUCTURE_TYPE_SUBPASS_BEGIN_INFO`
- VUID-VkSubpassBeginInfo-pNext-pNext
  `pNext` **must** be `NULL`
- VUID-VkSubpassBeginInfo-contents-parameter
  `contents` **must** be a valid VkSubpassContents value

Possible values of vkCmdBeginRenderPass::`contents`, specifying how the commands in the first subpass will be provided, are:

```
// Provided by VK_VERSION_1_0
typedef enum VkSubpassContents {
    VK_SUBPASS_CONTENTS_INLINE = 0,
    VK_SUBPASS_CONTENTS_SECONDARY_COMMAND_BUFFERS = 1,
} VkSubpassContents;
```

- `VK_SUBPASS_CONTENTS_INLINE` specifies that the contents of the subpass will be recorded inline in the primary command buffer, and secondary command buffers **must** not be executed within the subpass.
- `VK_SUBPASS_CONTENTS_SECONDARY_COMMAND_BUFFERS` specifies that the contents are recorded in secondary command buffers that will be called from the primary command buffer, and vkCmdExecuteCommands is the only valid command in the command buffer until vkCmdNextSubpass or vkCmdEndRenderPass.

If the `pNext` chain of VkRenderPassBeginInfo or VkRenderingInfo includes a `VkDeviceGroupRenderPassBeginInfo` structure, then that structure includes a device mask and set of render areas for the render pass instance.

The `VkDeviceGroupRenderPassBeginInfo` structure is defined as:

```
// Provided by VK_VERSION_1_1
typedef struct VkDeviceGroupRenderPassBeginInfo {
    VkStructureType    sType;
    const void*        pNext;
    uint32_t           deviceMask;
    uint32_t           deviceRenderAreaCount;
    const VkRect2D*    pDeviceRenderAreas;
} VkDeviceGroupRenderPassBeginInfo;
```

- `sType` is a VkStructureType value identifying this structure.
- `pNext` is `NULL` or a pointer to a structure extending this structure.
- `deviceMask` is the device mask for the render pass instance.
- `deviceRenderAreaCount` is the number of elements in the `pDeviceRenderAreas` array.
- `pDeviceRenderAreas` is a pointer to an array of VkRect2D structures defining the render area for each physical device.

The `deviceMask` serves several purposes. It is an upper bound on the set of physical devices that **can** be used during the render pass instance, and the initial device mask when the render pass instance begins. In addition, commands transitioning to the next subpass in a render pass instance and commands ending the render pass instance, and, accordingly render pass load, store, and multisample resolve operations and subpass dependencies corresponding to the render pass instance, are executed on the physical devices included in the device mask provided here.

If `deviceRenderAreaCount` is not zero, then the elements of `pDeviceRenderAreas` override the value of VkRenderPassBeginInfo::`renderArea`, and provide a render area specific to each physical device. These render areas serve the same purpose as VkRenderPassBeginInfo::`renderArea`, including controlling the region of attachments that are cleared by `VK_ATTACHMENT_LOAD_OP_CLEAR` and that are resolved into resolve attachments.

If this structure is not present, the render pass instance's device mask is the value of VkDeviceGroupCommandBufferBeginInfo::`deviceMask`. If this structure is not present or if `deviceRenderAreaCount` is zero, VkRenderPassBeginInfo::`renderArea` is used for all physical devices.

Valid Usage

- VUID-VkDeviceGroupRenderPassBeginInfo-deviceMask-00905
  `deviceMask` **must** be a valid device mask value
- VUID-VkDeviceGroupRenderPassBeginInfo-deviceMask-00906
  `deviceMask` **must** not be zero
- VUID-VkDeviceGroupRenderPassBeginInfo-deviceMask-00907
  `deviceMask` **must** be a subset of the command buffer's initial device mask
- VUID-VkDeviceGroupRenderPassBeginInfo-deviceRenderAreaCount-00908
  `deviceRenderAreaCount` **must** either be zero or equal to the number of physical devices in the logical device

- VUID-VkDeviceGroupRenderPassBeginInfo-offset-06166
  The `offset.x` member of any element of `pDeviceRenderAreas` **must** be greater than or equal to 0
- VUID-VkDeviceGroupRenderPassBeginInfo-offset-06167
  The `offset.y` member of any element of `pDeviceRenderAreas` **must** be greater than or equal to 0
- VUID-VkDeviceGroupRenderPassBeginInfo-offset-06168
  The sum of the `offset.x` and `extent.width` members of any element of `pDeviceRenderAreas` **must** be less than or equal to `maxFramebufferWidth`
- VUID-VkDeviceGroupRenderPassBeginInfo-offset-06169
  The sum of the `offset.y` and `extent.height` members of any element of `pDeviceRenderAreas` **must** be less than or equal to `maxFramebufferHeight`
- VUID-VkDeviceGroupRenderPassBeginInfo-extent-08998
  The `extent.width` member of any element of `pDeviceRenderAreas` **must** be greater than 0
- VUID-VkDeviceGroupRenderPassBeginInfo-extent-08999
  The `extent.height` member of any element of `pDeviceRenderAreas` **must** be greater than 0

Valid Usage (Implicit)

- VUID-VkDeviceGroupRenderPassBeginInfo-sType-sType
  `sType` **must** be `VK_STRUCTURE_TYPE_DEVICE_GROUP_RENDER_PASS_BEGIN_INFO`
- VUID-VkDeviceGroupRenderPassBeginInfo-pDeviceRenderAreas-parameter
  If `deviceRenderAreaCount` is not `0`, `pDeviceRenderAreas` **must** be a valid pointer to an array of `deviceRenderAreaCount` VkRect2D structures

The `VkRenderPassAttachmentBeginInfo` structure is defined as:

```
// Provided by VK_VERSION_1_2
typedef struct VkRenderPassAttachmentBeginInfo {
    VkStructureType       sType;
    const void*           pNext;
    uint32_t              attachmentCount;
    const VkImageView*    pAttachments;
} VkRenderPassAttachmentBeginInfo;
```

- `sType` is a VkStructureType value identifying this structure.
- `pNext` is `NULL` or a pointer to a structure extending this structure.
- `attachmentCount` is the number of attachments.
- `pAttachments` is a pointer to an array of `VkImageView` handles, each of which will be used as the corresponding attachment in the render pass instance.

Valid Usage

- VUID-VkRenderPassAttachmentBeginInfo-pAttachments-03218
  Each element of `pAttachments` **must** only specify a single mip level
- VUID-VkRenderPassAttachmentBeginInfo-pAttachments-03219
  Each element of `pAttachments` **must** have been created with the identity swizzle
- VUID-VkRenderPassAttachmentBeginInfo-pAttachments-04114
  Each element of `pAttachments` **must** have been created with VkImageViewCreateInfo ::`viewType` not equal to `VK_IMAGE_VIEW_TYPE_3D`

Valid Usage (Implicit)

- VUID-VkRenderPassAttachmentBeginInfo-sType-sType
  `sType` **must** be `VK_STRUCTURE_TYPE_RENDER_PASS_ATTACHMENT_BEGIN_INFO`
- VUID-VkRenderPassAttachmentBeginInfo-pAttachments-parameter
  If `attachmentCount` is not `0`, `pAttachments` **must** be a valid pointer to an array of `attachmentCount` valid VkImageView handles

To query the render area granularity, call:

```
// Provided by VK_VERSION_1_0
void vkGetRenderAreaGranularity(
    VkDevice                                    device,
    VkRenderPass                                renderPass,
    VkExtent2D*                                 pGranularity);
```

- `device` is the logical device that owns the render pass.
- `renderPass` is a handle to a render pass.
- `pGranularity` is a pointer to a VkExtent2D structure in which the granularity is returned.

The conditions leading to an optimal `renderArea` are:

- the `offset.x` member in `renderArea` is a multiple of the `width` member of the returned VkExtent2D (the horizontal granularity).
- the `offset.y` member in `renderArea` is a multiple of the `height` member of the returned VkExtent2D (the vertical granularity).
- either the `extent.width` member in `renderArea` is a multiple of the horizontal granularity or `offset.x`+`extent.width` is equal to the `width` of the `framebuffer` in the VkRenderPassBeginInfo.
- either the `extent.height` member in `renderArea` is a multiple of the vertical granularity or `offset.y`+`extent.height` is equal to the `height` of the `framebuffer` in the VkRenderPassBeginInfo.

Subpass dependencies are not affected by the render area, and apply to the entire image

subresources attached to the framebuffer as specified in the description of automatic layout transitions. Similarly, pipeline barriers are valid even if their effect extends outside the render area.

Valid Usage (Implicit)

- VUID-vkGetRenderAreaGranularity-device-parameter
  `device` **must** be a valid VkDevice handle
- VUID-vkGetRenderAreaGranularity-renderPass-parameter
  `renderPass` **must** be a valid VkRenderPass handle
- VUID-vkGetRenderAreaGranularity-pGranularity-parameter
  `pGranularity` **must** be a valid pointer to a VkExtent2D structure
- VUID-vkGetRenderAreaGranularity-renderPass-parent
  `renderPass` **must** have been created, allocated, or retrieved from `device`

To transition to the next subpass in the render pass instance after recording the commands for a subpass, call:

```
// Provided by VK_VERSION_1_0
void vkCmdNextSubpass(
    VkCommandBuffer                             commandBuffer,
    VkSubpassContents                           contents);
```

- `commandBuffer` is the command buffer in which to record the command.
- `contents` specifies how the commands in the next subpass will be provided, in the same fashion as the corresponding parameter of vkCmdBeginRenderPass.

The subpass index for a render pass begins at zero when `vkCmdBeginRenderPass` is recorded, and increments each time `vkCmdNextSubpass` is recorded.

After transitioning to the next subpass, the application **can** record the commands for that subpass.

Valid Usage

- VUID-vkCmdNextSubpass-None-00909
  The current subpass index **must** be less than the number of subpasses in the render pass minus one

Valid Usage (Implicit)

- VUID-vkCmdNextSubpass-commandBuffer-parameter
  `commandBuffer` **must** be a valid VkCommandBuffer handle
- VUID-vkCmdNextSubpass-contents-parameter

`contents` **must** be a valid VkSubpassContents value

- VUID-vkCmdNextSubpass-commandBuffer-recording
  `commandBuffer` **must** be in the recording state
- VUID-vkCmdNextSubpass-commandBuffer-cmdpool
  The `VkCommandPool` that `commandBuffer` was allocated from **must** support graphics operations
- VUID-vkCmdNextSubpass-renderpass
  This command **must** only be called inside of a render pass instance
- VUID-vkCmdNextSubpass-bufferlevel
  `commandBuffer` **must** be a primary `VkCommandBuffer`

Host Synchronization

- Host access to `commandBuffer` **must** be externally synchronized
- Host access to the `VkCommandPool` that `commandBuffer` was allocated from **must** be externally synchronized

Command Properties

Command Buffer Levels	Render Pass Scope	Supported Queue Types	Command Type
Primary	Inside	Graphics	Action State Synchronization

To transition to the next subpass in the render pass instance after recording the commands for a subpass, call:

```
// Provided by VK_VERSION_1_2
void vkCmdNextSubpass2(
    VkCommandBuffer                             commandBuffer,
    const VkSubpassBeginInfo*                   pSubpassBeginInfo,
    const VkSubpassEndInfo*                     pSubpassEndInfo);
```

- `commandBuffer` is the command buffer in which to record the command.
- `pSubpassBeginInfo` is a pointer to a VkSubpassBeginInfo structure containing information about the subpass which is about to begin rendering.
- `pSubpassEndInfo` is a pointer to a VkSubpassEndInfo structure containing information about how the previous subpass will be ended.

`vkCmdNextSubpass2` is semantically identical to vkCmdNextSubpass, except that it is extensible, and

that `contents` is provided as part of an extensible structure instead of as a flat parameter.

Valid Usage

- VUID-vkCmdNextSubpass2-None-03102
  The current subpass index **must** be less than the number of subpasses in the render pass minus one

Valid Usage (Implicit)

- VUID-vkCmdNextSubpass2-commandBuffer-parameter
  `commandBuffer` **must** be a valid VkCommandBuffer handle
- VUID-vkCmdNextSubpass2-pSubpassBeginInfo-parameter
  `pSubpassBeginInfo` **must** be a valid pointer to a valid VkSubpassBeginInfo structure
- VUID-vkCmdNextSubpass2-pSubpassEndInfo-parameter
  `pSubpassEndInfo` **must** be a valid pointer to a valid VkSubpassEndInfo structure
- VUID-vkCmdNextSubpass2-commandBuffer-recording
  `commandBuffer` **must** be in the recording state
- VUID-vkCmdNextSubpass2-commandBuffer-cmdpool
  The `VkCommandPool` that `commandBuffer` was allocated from **must** support graphics operations
- VUID-vkCmdNextSubpass2-renderpass
  This command **must** only be called inside of a render pass instance
- VUID-vkCmdNextSubpass2-bufferlevel
  `commandBuffer` **must** be a primary `VkCommandBuffer`

Host Synchronization

- Host access to `commandBuffer` **must** be externally synchronized
- Host access to the `VkCommandPool` that `commandBuffer` was allocated from **must** be externally synchronized

Command Properties

Command Buffer Levels	Render Pass Scope	Supported Queue Types	Command Type
Primary	Inside	Graphics	Action State Synchronization

To record a command to end a render pass instance after recording the commands for the last subpass, call:

```
// Provided by VK_VERSION_1_0
void vkCmdEndRenderPass(
    VkCommandBuffer                             commandBuffer);
```

- `commandBuffer` is the command buffer in which to end the current render pass instance.

Ending a render pass instance performs any multisample resolve operations on the final subpass.

Valid Usage

- VUID-vkCmdEndRenderPass-None-00910
  The current subpass index **must** be equal to the number of subpasses in the render pass minus one
- VUID-vkCmdEndRenderPass-None-06170
  The current render pass instance **must** not have been begun with vkCmdBeginRendering
- VUID-vkCmdEndRenderPass-None-07004
  If `vkCmdBeginQuery*` was called within a subpass of the render pass, the corresponding `vkCmdEndQuery*` **must** have been called subsequently within the same subpass

Valid Usage (Implicit)

- VUID-vkCmdEndRenderPass-commandBuffer-parameter
  `commandBuffer` **must** be a valid VkCommandBuffer handle
- VUID-vkCmdEndRenderPass-commandBuffer-recording
  `commandBuffer` **must** be in the recording state
- VUID-vkCmdEndRenderPass-commandBuffer-cmdpool
  The `VkCommandPool` that `commandBuffer` was allocated from **must** support graphics operations
- VUID-vkCmdEndRenderPass-renderpass
  This command **must** only be called inside of a render pass instance
- VUID-vkCmdEndRenderPass-bufferlevel
  `commandBuffer` **must** be a primary `VkCommandBuffer`

Host Synchronization

- Host access to `commandBuffer` **must** be externally synchronized
- Host access to the `VkCommandPool` that `commandBuffer` was allocated from **must** be externally synchronized

Command Properties

Command Buffer Levels	Render Pass Scope	Supported Queue Types	Command Type
Primary	Inside	Graphics	Action State Synchronization

To record a command to end a render pass instance after recording the commands for the last subpass, call:

```
// Provided by VK_VERSION_1_2
void vkCmdEndRenderPass2(
    VkCommandBuffer                             commandBuffer,
    const VkSubpassEndInfo*                     pSubpassEndInfo);
```

- `commandBuffer` is the command buffer in which to end the current render pass instance.
- `pSubpassEndInfo` is a pointer to a VkSubpassEndInfo structure containing information about how the last subpass will be ended.

`vkCmdEndRenderPass2` is semantically identical to vkCmdEndRenderPass, except that it is extensible.

Valid Usage

- VUID-vkCmdEndRenderPass2-None-03103
  The current subpass index **must** be equal to the number of subpasses in the render pass minus one
- VUID-vkCmdEndRenderPass2-None-06171
  The current render pass instance **must** not have been begun with vkCmdBeginRendering
- VUID-vkCmdEndRenderPass2-None-07005
  If `vkCmdBeginQuery*` was called within a subpass of the render pass, the corresponding `vkCmdEndQuery*` **must** have been called subsequently within the same subpass

Valid Usage (Implicit)

- VUID-vkCmdEndRenderPass2-commandBuffer-parameter
  `commandBuffer` **must** be a valid VkCommandBuffer handle
- VUID-vkCmdEndRenderPass2-pSubpassEndInfo-parameter
  `pSubpassEndInfo` **must** be a valid pointer to a valid VkSubpassEndInfo structure
- VUID-vkCmdEndRenderPass2-commandBuffer-recording
  `commandBuffer` **must** be in the recording state
- VUID-vkCmdEndRenderPass2-commandBuffer-cmdpool

The VkCommandPool that commandBuffer was allocated from **must** support graphics operations

- VUID-vkCmdEndRenderPass2-renderpass
  This command **must** only be called inside of a render pass instance
- VUID-vkCmdEndRenderPass2-bufferlevel
  commandBuffer **must** be a primary VkCommandBuffer

Host Synchronization

- Host access to commandBuffer **must** be externally synchronized
- Host access to the VkCommandPool that commandBuffer was allocated from **must** be externally synchronized

Command Properties

Command Buffer Levels	Render Pass Scope	Supported Queue Types	Command Type
Primary	Inside	Graphics	Action State Synchronization

The VkSubpassEndInfo structure is defined as:

```
// Provided by VK_VERSION_1_2
typedef struct VkSubpassEndInfo {
    VkStructureType    sType;
    const void*        pNext;
} VkSubpassEndInfo;
```

- sType is a VkStructureType value identifying this structure.
- pNext is NULL or a pointer to a structure extending this structure.

Valid Usage (Implicit)

- VUID-VkSubpassEndInfo-sType-sType
  sType **must** be VK_STRUCTURE_TYPE_SUBPASS_END_INFO
- VUID-VkSubpassEndInfo-pNext-pNext
  pNext **must** be NULL

8.9. Common Render Pass Data Races (Informative)

Due to the complexity of how rendering is performed, there are several ways an application can accidentally introduce a data race, usually by doing something that may seem benign but actually cannot be supported. This section indicates a number of the more common cases as guidelines to help avoid them.

8.9.1. Sampling From a Read-only Attachment

Vulkan includes read-only layouts for depth/stencil images, that allow the images to be both read during a render pass for the purposes of depth/stencil tests, and read as a non-attachment.

However, because `VK_ATTACHMENT_STORE_OP_STORE` and `VK_ATTACHMENT_STORE_OP_DONT_CARE` may perform write operations, even if no recorded command writes to an attachment, reading from an image while also using it as an attachment with these store operations can result in a data race. If the reads from the non-attachment are performed in a fragment shader where the accessed samples match those covered by the fragment shader, no data race will occur as store operations are guaranteed to operate after fragment shader execution for the set of samples the fragment covers. Notably, input attachments can also be used for this case. Reading other samples or in any other shader stage can result in unexpected behavior due to the potential for a data race, and validation errors should be generated for doing so. In practice, many applications have shipped reading samples outside of the covered fragment without any observable issue, but there is no guarantee that this will always work, and it is not advisable to rely on this in new or re-worked code bases. As `VK_ATTACHMENT_STORE_OP_NONE` is guaranteed to perform no writes, applications wishing to read an image as both an attachment and a non-attachment should make use of this store operation, coupled with a load operation that also performs no writes.

8.9.2. Non-overlapping Access Between Resources

When relying on non-overlapping accesses between attachments and other resources, it is important to note that load and store operations have fairly wide alignment requirements - potentially affecting entire subresources and adjacent depth/stencil aspects. This makes it invalid to access a non-attachment subresource that is simultaneously being used as an attachment where either access performs a write operation.

8.9.3. Depth/Stencil and Input Attachments

When rendering to only the depth OR stencil aspect of an image, an input attachment accessing the other aspect will always result in a data race.

8.9.4. Synchronization Options

There are several synchronization options available to synchronize between accesses to resources within a render pass. Some of the options are outlined below:

- A VkSubpassDependency in a render pass object can synchronize attachment writes and multisample resolve operations from a prior subpass for subsequent input attachment reads.
- A vkCmdPipelineBarrier inside a subpass can synchronize prior attachment writes in the

subpass with subsequent input attachment reads.

Chapter 9. Shaders

A shader specifies programmable operations that execute for each vertex, control point, tessellated vertex, primitive, fragment, or workgroup in the corresponding stage(s) of the graphics and compute pipelines.

Graphics pipelines include vertex shader execution as a result of primitive assembly, followed, if enabled, by tessellation control and evaluation shaders operating on patches, geometry shaders, if enabled, operating on primitives, and fragment shaders, if present, operating on fragments generated by Rasterization. In this specification, vertex, tessellation control, tessellation evaluation and geometry shaders are collectively referred to as pre-rasterization shader stages and occur in the logical pipeline before rasterization. The fragment shader occurs logically after rasterization.

Only the compute shader stage is included in a compute pipeline. Compute shaders operate on compute invocations in a workgroup.

Shaders **can** read from input variables, and read from and write to output variables. Input and output variables **can** be used to transfer data between shader stages, or to allow the shader to interact with values that exist in the execution environment. Similarly, the execution environment provides constants describing capabilities.

Shader variables are associated with execution environment-provided inputs and outputs using *built-in* decorations in the shader. The available decorations for each stage are documented in the following subsections.

9.1. Shader Modules

Shader modules contain *shader code* and one or more entry points. Shaders are selected from a shader module by specifying an entry point as part of pipeline creation. The stages of a pipeline **can** use shaders that come from different modules. The shader code defining a shader module **must** be in the SPIR-V format, as described by the Vulkan Environment for SPIR-V appendix.

Shader modules are represented by `VkShaderModule` handles:

```
// Provided by VK_VERSION_1_0
VK_DEFINE_NON_DISPATCHABLE_HANDLE(VkShaderModule)
```

To create a shader module, call:

```
// Provided by VK_VERSION_1_0
VkResult vkCreateShaderModule(
    VkDevice                                    device,
    const VkShaderModuleCreateInfo*             pCreateInfo,
    const VkAllocationCallbacks*                pAllocator,
    VkShaderModule*                             pShaderModule);
```

- `device` is the logical device that creates the shader module.

- `pCreateInfo` is a pointer to a VkShaderModuleCreateInfo structure.
- `pAllocator` controls host memory allocation as described in the Memory Allocation chapter.
- `pShaderModule` is a pointer to a VkShaderModule handle in which the resulting shader module object is returned.

Once a shader module has been created, any entry points it contains **can** be used in pipeline shader stages as described in Compute Pipelines and Graphics Pipelines.

Valid Usage

- VUID-vkCreateShaderModule-pCreateInfo-06904
  If `pCreateInfo` is not `NULL`, `pCreateInfo->pNext` **must** be `NULL`

Valid Usage (Implicit)

- VUID-vkCreateShaderModule-device-parameter
  `device` **must** be a valid VkDevice handle
- VUID-vkCreateShaderModule-pCreateInfo-parameter
  `pCreateInfo` **must** be a valid pointer to a valid VkShaderModuleCreateInfo structure
- VUID-vkCreateShaderModule-pAllocator-parameter
  If `pAllocator` is not `NULL`, `pAllocator` **must** be a valid pointer to a valid VkAllocationCallbacks structure
- VUID-vkCreateShaderModule-pShaderModule-parameter
  `pShaderModule` **must** be a valid pointer to a VkShaderModule handle

Return Codes

Success

- `VK_SUCCESS`

Failure

- `VK_ERROR_OUT_OF_HOST_MEMORY`
- `VK_ERROR_OUT_OF_DEVICE_MEMORY`

The `VkShaderModuleCreateInfo` structure is defined as:

```
// Provided by VK_VERSION_1_0
typedef struct VkShaderModuleCreateInfo {
    VkStructureType              sType;
    const void*                  pNext;
    VkShaderModuleCreateFlags    flags;
    size_t                       codeSize;
    const uint32_t*              pCode;
} VkShaderModuleCreateInfo;
```

- `sType` is a VkStructureType value identifying this structure.
- `pNext` is `NULL` or a pointer to a structure extending this structure.
- `flags` is reserved for future use.
- `codeSize` is the size, in bytes, of the code pointed to by `pCode`.
- `pCode` is a pointer to code that is used to create the shader module. The type and format of the code is determined from the content of the memory addressed by `pCode`.

Valid Usage

- VUID-VkShaderModuleCreateInfo-codeSize-08735
  `codeSize` **must** be a multiple of 4
- VUID-VkShaderModuleCreateInfo-pCode-08736
  `pCode` **must** point to valid SPIR-V code, formatted and packed as described by the Khronos SPIR-V Specification
- VUID-VkShaderModuleCreateInfo-pCode-08737
  `pCode` **must** adhere to the validation rules described by the Validation Rules within a Module section of the SPIR-V Environment appendix
- VUID-VkShaderModuleCreateInfo-pCode-08738
  `pCode` **must** declare the `Shader` capability for SPIR-V code
- VUID-VkShaderModuleCreateInfo-pCode-08739
  `pCode` **must** not declare any capability that is not supported by the API, as described by the Capabilities section of the SPIR-V Environment appendix
- VUID-VkShaderModuleCreateInfo-pCode-08740
  and `pCode` declares any of the capabilities listed in the SPIR-V Environment appendix, one of the corresponding requirements **must** be satisfied
- VUID-VkShaderModuleCreateInfo-pCode-08741
  `pCode` **must** not declare any SPIR-V extension that is not supported by the API, as described by the Extension section of the SPIR-V Environment appendix
- VUID-VkShaderModuleCreateInfo-pCode-08742
  and `pCode` declares any of the SPIR-V extensions listed in the SPIR-V Environment appendix, one of the corresponding requirements **must** be satisfied
- VUID-VkShaderModuleCreateInfo-codeSize-01085
  `codeSize` **must** be greater than 0

Valid Usage (Implicit)

- VUID-VkShaderModuleCreateInfo-sType-sType
  `sType` **must** be `VK_STRUCTURE_TYPE_SHADER_MODULE_CREATE_INFO`
- VUID-VkShaderModuleCreateInfo-flags-zerobitmask
  `flags` **must** be `0`
- VUID-VkShaderModuleCreateInfo-pCode-parameter
  `pCode` **must** be a valid pointer to an array of $\frac{codeSize}{4}$ `uint32_t` values

```
// Provided by VK_VERSION_1_0
typedef VkFlags VkShaderModuleCreateFlags;
```

`VkShaderModuleCreateFlags` is a bitmask type for setting a mask, but is currently reserved for future use.

To destroy a shader module, call:

```
// Provided by VK_VERSION_1_0
void vkDestroyShaderModule(
    VkDevice                                    device,
    VkShaderModule                              shaderModule,
    const VkAllocationCallbacks*                pAllocator);
```

- `device` is the logical device that destroys the shader module.
- `shaderModule` is the handle of the shader module to destroy.
- `pAllocator` controls host memory allocation as described in the Memory Allocation chapter.

A shader module **can** be destroyed while pipelines created using its shaders are still in use.

Valid Usage

- VUID-vkDestroyShaderModule-shaderModule-01092
  If `VkAllocationCallbacks` were provided when `shaderModule` was created, a compatible set of callbacks **must** be provided here
- VUID-vkDestroyShaderModule-shaderModule-01093
  If no `VkAllocationCallbacks` were provided when `shaderModule` was created, `pAllocator` **must** be `NULL`

Valid Usage (Implicit)

- VUID-vkDestroyShaderModule-device-parameter
  `device` **must** be a valid VkDevice handle

- VUID-vkDestroyShaderModule-shaderModule-parameter
  If `shaderModule` is not VK_NULL_HANDLE, `shaderModule` **must** be a valid VkShaderModule handle
- VUID-vkDestroyShaderModule-pAllocator-parameter
  If `pAllocator` is not `NULL`, `pAllocator` **must** be a valid pointer to a valid VkAllocationCallbacks structure
- VUID-vkDestroyShaderModule-shaderModule-parent
  If `shaderModule` is a valid handle, it **must** have been created, allocated, or retrieved from `device`

Host Synchronization

- Host access to `shaderModule` **must** be externally synchronized

9.2. Binding Shaders

Before a shader can be used it **must** be first bound to the command buffer.

Calling vkCmdBindPipeline binds all stages corresponding to the VkPipelineBindPoint.

The following table describes the relationship between shader stages and pipeline bind points:

Shader stage	Pipeline bind point	behavior controlled
• `VK_SHADER_STAGE_VERTEX_BIT` • `VK_SHADER_STAGE_TESSELLATION_CONTROL_BIT` • `VK_SHADER_STAGE_TESSELLATION_EVALUATION_BIT` • `VK_SHADER_STAGE_GEOMETRY_BIT` • `VK_SHADER_STAGE_FRAGMENT_BIT`	`VK_PIPELINE_BIND_POINT_GRAPHICS`	all drawing commands
• `VK_SHADER_STAGE_COMPUTE_BIT`	`VK_PIPELINE_BIND_POINT_COMPUTE`	all dispatch commands

9.3. Shader Execution

At each stage of the pipeline, multiple invocations of a shader **may** execute simultaneously. Further, invocations of a single shader produced as the result of different commands **may** execute simultaneously. The relative execution order of invocations of the same shader type is undefined. Shader invocations **may** complete in a different order than that in which the primitives they originated from were drawn or dispatched by the application. However, fragment shader outputs are written to attachments in rasterization order.

The relative execution order of invocations of different shader types is largely undefined. However, when invoking a shader whose inputs are generated from a previous pipeline stage, the shader invocations from the previous stage are guaranteed to have executed far enough to generate input values for all required inputs.

9.3.1. Shader Termination

A shader invocation that is *terminated* has finished executing instructions.

Executing `OpReturn` in the entry point, or executing `OpTerminateInvocation` in any function will terminate an invocation. Implementations **may** also terminate a shader invocation when `OpKill` is executed in any function; otherwise it becomes a helper invocation.

In addition to the above conditions, helper invocations **may** be terminated when all non-helper invocations in the same derivative group either terminate or become helper invocations.

A shader stage for a given command completes execution when all invocations for that stage have terminated.

NOTE

`OpKill` will behave the same as either `OpTerminateInvocation` or `OpDemoteToHelperInvocation` depending on the implementation. It is recommended that shader authors use `OpTerminateInvocation` or `OpDemoteToHelperInvocation` instead of `OpKill` whenever possible to produce more predictable behavior.

9.4. Shader Memory Access Ordering

The order in which image or buffer memory is read or written by shaders is largely undefined. For some shader types (vertex, tessellation evaluation, and in some cases, fragment), even the number of shader invocations that **may** perform loads and stores is undefined.

In particular, the following rules apply:

- Vertex and tessellation evaluation shaders will be invoked at least once for each unique vertex, as defined in those sections.
- Fragment shaders will be invoked zero or more times, as defined in that section.
- The relative execution order of invocations of the same shader type is undefined. A store issued by a shader when working on primitive B might complete prior to a store for primitive A, even if primitive A is specified prior to primitive B. This applies even to fragment shaders; while fragment shader outputs are always written to the framebuffer in rasterization order, stores executed by fragment shader invocations are not.
- The relative execution order of invocations of different shader types is largely undefined.

NOTE

The above limitations on shader invocation order make some forms of synchronization between shader invocations within a single set of primitives unimplementable. For example, having one invocation poll memory written by another invocation assumes that the other invocation has been launched and will complete its writes in finite time.

The Memory Model appendix defines the terminology and rules for how to correctly communicate between shader invocations, such as when a write is Visible-To a read, and what constitutes a Data Race.

Applications **must** not cause a data race.

The SPIR-V **SubgroupMemory**, **CrossWorkgroupMemory**, and **AtomicCounterMemory** memory semantics are ignored. Sequentially consistent atomics and barriers are not supported and **SequentiallyConsistent** is treated as **AcquireRelease**. **SequentiallyConsistent should** not be used.

9.5. Shader Inputs and Outputs

Data is passed into and out of shaders using variables with input or output storage class, respectively. User-defined inputs and outputs are connected between stages by matching their `Location` decorations. Additionally, data **can** be provided by or communicated to special functions provided by the execution environment using `BuiltIn` decorations.

In many cases, the same `BuiltIn` decoration **can** be used in multiple shader stages with similar meaning. The specific behavior of variables decorated as `BuiltIn` is documented in the following sections.

9.6. Vertex Shaders

Each vertex shader invocation operates on one vertex and its associated vertex attribute data, and outputs one vertex and associated data. Graphics pipelines **must** include a vertex shader, and the vertex shader stage is always the first shader stage in the graphics pipeline.

9.6.1. Vertex Shader Execution

A vertex shader **must** be executed at least once for each vertex specified by a drawing command. If the subpass includes multiple views in its view mask, the shader **may** be invoked separately for each view. During execution, the shader is presented with the index of the vertex and instance for which it has been invoked. Input variables declared in the vertex shader are filled by the implementation with the values of vertex attributes associated with the invocation being executed.

If the same vertex is specified multiple times in a drawing command (e.g. by including the same index value multiple times in an index buffer) the implementation **may** reuse the results of vertex shading if it can statically determine that the vertex shader invocations will produce identical results.

NOTE	It is implementation-dependent when and if results of vertex shading are reused, and thus how many times the vertex shader will be executed. This is true also if the vertex shader contains stores or atomic operations (see `vertexPipelineStoresAndAtomics`).

9.7. Tessellation Control Shaders

The tessellation control shader is used to read an input patch provided by the application and to produce an output patch. Each tessellation control shader invocation operates on an input patch (after all control points in the patch are processed by a vertex shader) and its associated data, and outputs a single control point of the output patch and its associated data, and **can** also output additional per-patch data. The input patch is sized according to the `patchControlPoints` member of VkPipelineTessellationStateCreateInfo, as part of input assembly.

The size of the output patch is controlled by the `OpExecutionMode OutputVertices` specified in the tessellation control or tessellation evaluation shaders, which **must** be specified in at least one of the shaders. The size of the input and output patches **must** each be greater than zero and less than or equal to `VkPhysicalDeviceLimits`::`maxTessellationPatchSize`.

9.7.1. Tessellation Control Shader Execution

A tessellation control shader is invoked at least once for each *output* vertex in a patch. If the subpass includes multiple views in its view mask, the shader **may** be invoked separately for each view.

Inputs to the tessellation control shader are generated by the vertex shader. Each invocation of the tessellation control shader **can** read the attributes of any incoming vertices and their associated data. The invocations corresponding to a given patch execute logically in parallel, with undefined relative execution order. However, the `OpControlBarrier` instruction **can** be used to provide limited control of the execution order by synchronizing invocations within a patch, effectively dividing tessellation control shader execution into a set of phases. Tessellation control shaders will read undefined values if one invocation reads a per-vertex or per-patch output written by another invocation at any point during the same phase, or if two invocations attempt to write different values to the same per-patch output in a single phase.

9.8. Tessellation Evaluation Shaders

The Tessellation Evaluation Shader operates on an input patch of control points and their associated data, and a single input barycentric coordinate indicating the invocation's relative position within the subdivided patch, and outputs a single vertex and its associated data.

9.8.1. Tessellation Evaluation Shader Execution

A tessellation evaluation shader is invoked at least once for each unique vertex generated by the tessellator. If the subpass includes multiple views in its view mask, the shader **may** be invoked separately for each view.

9.9. Geometry Shaders

The geometry shader operates on a group of vertices and their associated data assembled from a single input primitive, and emits zero or more output primitives and the group of vertices and their associated data required for each output primitive.

9.9.1. Geometry Shader Execution

A geometry shader is invoked at least once for each primitive produced by the tessellation stages, or at least once for each primitive generated by primitive assembly when tessellation is not in use. A shader can request that the geometry shader runs multiple instances. A geometry shader is invoked at least once for each instance. If the subpass includes multiple views in its view mask, the shader **may** be invoked separately for each view.

9.10. Fragment Shaders

Fragment shaders are invoked as a fragment operation in a graphics pipeline. Each fragment shader invocation operates on a single fragment and its associated data. With few exceptions, fragment shaders do not have access to any data associated with other fragments and are considered to execute in isolation of fragment shader invocations associated with other fragments.

9.11. Compute Shaders

Compute shaders are invoked via vkCmdDispatch and vkCmdDispatchIndirect commands. In general, they have access to similar resources as shader stages executing as part of a graphics pipeline.

Compute workloads are formed from groups of work items called workgroups and processed by the compute shader in the current compute pipeline. A workgroup is a collection of shader invocations that execute the same shader, potentially in parallel. Compute shaders execute in *global workgroups* which are divided into a number of *local workgroups* with a size that **can** be set by assigning a value to the `LocalSize` or `LocalSizeId` execution mode or via an object decorated by the `WorkgroupSize` decoration. An invocation within a local workgroup **can** share data with other members of the local workgroup through shared variables and issue memory and control flow barriers to synchronize with other members of the local workgroup.

9.12. Interpolation Decorations

Variables in the `Input` storage class in a fragment shader's interface are interpolated from the values specified by the primitive being rasterized.

NOTE	Interpolation decorations can be present on input and output variables in pre-rasterization shaders but have no effect on the interpolation performed.

An undecorated input variable will be interpolated with perspective-correct interpolation according to the primitive type being rasterized. Lines and polygons are interpolated in the same way as the primitive's clip coordinates. If the `NoPerspective` decoration is present, linear interpolation is instead used for lines and polygons. For points, as there is only a single vertex, input values are never interpolated and instead take the value written for the single vertex.

If the `Flat` decoration is present on an input variable, the value is not interpolated, and instead takes its value directly from the provoking vertex. Fragment shader inputs that are signed or unsigned integers, integer vectors, or any double-precision floating-point type **must** be decorated

with `Flat`.

Interpolation of input variables is performed at an implementation-defined position within the fragment area being shaded. The position is further constrained as follows:

- If the `Centroid` decoration is used, the interpolation position used for the variable **must** also fall within the bounds of the primitive being rasterized.
- If the `Sample` decoration is used, the interpolation position used for the variable **must** be at the position of the sample being shaded by the current fragment shader invocation.
- If a sample count of 1 is used, the interpolation position **must** be at the center of the fragment area.

NOTE	As `Centroid` restricts the possible interpolation position to the covered area of the primitive, the position can be forced to vary between neighboring fragments when it otherwise would not. Derivatives calculated based on these differing locations can produce inconsistent results compared to undecorated inputs. It is recommended that input variables used in derivative calculations are not decorated with `Centroid`.

9.13. Static Use

A SPIR-V module declares a global object in memory using the `OpVariable` instruction, which results in a pointer `x` to that object. A specific entry point in a SPIR-V module is said to *statically use* that object if that entry point's call tree contains a function containing a instruction with `x` as an `id` operand. A shader entry point also *statically uses* any variables explicitly declared in its interface.

9.14. Scope

A *scope* describes a set of shader invocations, where each such set is a *scope instance*. Each invocation belongs to one or more scope instances, but belongs to no more than one scope instance for each scope.

The operations available between invocations in a given scope instance vary, with smaller scopes generally able to perform more operations, and with greater efficiency.

9.14.1. Cross Device

All invocations executed in a Vulkan instance fall into a single *cross device scope instance*.

Whilst the `CrossDevice` scope is defined in SPIR-V, it is disallowed in Vulkan. API synchronization commands **can** be used to communicate between devices.

9.14.2. Device

All invocations executed on a single device form a *device scope instance*.

If the `vulkanMemoryModel` and `vulkanMemoryModelDeviceScope` features are enabled, this scope is represented in SPIR-V by the `Device Scope`, which **can** be used as a `Memory Scope` for barrier and

atomic operations.

There is no method to synchronize the execution of these invocations within SPIR-V, and this **can** only be done with API synchronization primitives.

Invocations executing on different devices in a device group operate in separate device scope instances.

9.14.3. Queue Family

Invocations executed by queues in a given queue family form a *queue family scope instance*.

This scope is identified in SPIR-V as the `QueueFamily Scope` if the `vulkanMemoryModel` feature is enabled, or if not, the `Device Scope`, which **can** be used as a `Memory Scope` for barrier and atomic operations.

There is no method to synchronize the execution of these invocations within SPIR-V, and this **can** only be done with API synchronization primitives.

Each invocation in a queue family scope instance **must** be in the same device scope instance.

9.14.4. Command

Any shader invocations executed as the result of a single command such as vkCmdDispatch or vkCmdDraw form a *command scope instance*. For indirect drawing commands with `drawCount` greater than one, invocations from separate draws are in separate command scope instances.

There is no specific `Scope` for communication across invocations in a command scope instance. As this has a clear boundary at the API level, coordination here **can** be performed in the API, rather than in SPIR-V.

Each invocation in a command scope instance **must** be in the same queue-family scope instance.

For shaders without defined workgroups, this set of invocations forms an *invocation group* as defined in the SPIR-V specification.

9.14.5. Primitive

Any fragment shader invocations executed as the result of rasterization of a single primitive form a *primitive scope instance*.

There is no specific `Scope` for communication across invocations in a primitive scope instance.

Any generated helper invocations are included in this scope instance.

Each invocation in a primitive scope instance **must** be in the same command scope instance.

Any input variables decorated with `Flat` are uniform within a primitive scope instance.

9.14.6. Workgroup

A *local workgroup* is a set of invocations that can synchronize and share data with each other using memory in the `Workgroup` storage class.

The `Workgroup Scope` can be used as both an `Execution Scope` and `Memory Scope` for barrier and atomic operations.

Each invocation in a local workgroup **must** be in the same command scope instance.

Only compute shaders have defined workgroups - other shader types **cannot** use workgroup functionality. For shaders that have defined workgroups, this set of invocations forms an *invocation group* as defined in the SPIR-V specification.

The amount of storage consumed by the variables declared with the `Workgroup` storage class is implementation-dependent. However, the amount of storage consumed may not exceed the largest block size that would be obtained if all active variables declared with `Workgroup` storage class were assigned offsets in an arbitrary order by successively taking the smallest valid offset according to the Standard Storage Buffer Layout rules, and with `Boolean` values considered as 32-bit integer values for the purpose of this calculation. (This is equivalent to using the GLSL std430 layout rules.)

9.14.7. Subgroup

A *subgroup* (see the subsection “Control Flow” of section 2 of the SPIR-V 1.3 Revision 1 specification) is a set of invocations that can synchronize and share data with each other efficiently.

The `Subgroup Scope` can be used as both an `Execution Scope` and `Memory Scope` for barrier and atomic operations. Other subgroup features allow the use of group operations with subgroup scope.

For shaders that have defined workgroups, each invocation in a subgroup **must** be in the same local workgroup.

In other shader stages, each invocation in a subgroup **must** be in the same device scope instance.

Only shader stages that support subgroup operations have defined subgroups.

NOTE

Subgroups are not guaranteed to be a subset of a single command in shaders that do not have defined workgroups. Values that are guaranteed to be uniform for a given command or sub command may then not be uniform for the subgroup, and vice versa. As such, applications must take care when dealing with mixed uniformity.

A somewhat common example of this would something like trying to optimize access to per-draw data using subgroup operations:

```
buffer { uint draw_data[]; };

flat in int vDrawID; // Passed through from vertex shader

void main()
{
```

```
    uint local_draw_data = subgroupBroadcastFirst(draw_data
[local_draw_data]);
}
```

This can be done in an attempt to optimize the shader to only perform the loads once per subgroup. However, if the implementation packs multiple draws into a single subgroup, invocations from draws with a different drawID are now receiving data from the wrong invocation. Applications should rely on implementations to do this kind of optimization automatically where the implementation can, rather than trying to force it.

9.14.8. Quad

A *quad scope instance* is formed of four shader invocations.

In a fragment shader, each invocation in a quad scope instance is formed of invocations in neighboring framebuffer locations (x_i, y_i), where:

- i is the index of the invocation within the scope instance.
- w and h are the number of pixels the fragment covers in the x and y axes.
- w and h are identical for all participating invocations.
- (x_0) = (x_1 - w) = (x_2) = (x_3 - w)
- (y_0) = (y_1) = (y_2 - h) = (y_3 - h)
- Each invocation has the same layer and sample indices.

In all shaders, each invocation in a quad scope instance is formed of invocations in adjacent subgroup invocation indices (s_i), where:

- i is the index of the invocation within the quad scope instance.
- (s_0) = (s_1 - 1) = (s_2 - 2) = (s_3 - 3)
- s_0 is an integer multiple of 4.

Each invocation in a quad scope instance **must** be in the same subgroup.

In a fragment shader, each invocation in a quad scope instance **must** be in the same primitive scope instance.

Fragment and compute shaders have defined quad scope instances. If the `quadOperationsInAllStages` limit is supported, any shader stages that support subgroup operations also have defined quad scope instances.

9.14.9. Invocation

The smallest *scope* is a single invocation; this is represented by the `Invocation` `Scope` in SPIR-V.

Fragment shader invocations **must** be in a primitive scope instance.

Invocations in shaders that have defined workgroups **must** be in a local workgroup.

Invocations in shaders that have a defined subgroup scope **must** be in a subgroup.

Invocations in shaders that have a defined quad scope **must** be in a quad scope instance.

All invocations in all stages **must** be in a command scope instance.

9.15. Group Operations

Group operations are executed by multiple invocations within a scope instance; with each invocation involved in calculating the result. This provides a mechanism for efficient communication between invocations in a particular scope instance.

Group operations all take a `Scope` defining the desired scope instance to operate within. Only the `Subgroup` scope **can** be used for these operations; the `subgroupSupportedOperations` limit defines which types of operation **can** be used.

9.15.1. Basic Group Operations

Basic group operations include the use of `OpGroupNonUniformElect`, `OpControlBarrier`, `OpMemoryBarrier`, and atomic operations.

`OpGroupNonUniformElect` **can** be used to choose a single invocation to perform a task for the whole group. Only the invocation with the lowest id in the group will return `true`.

The Memory Model appendix defines the operation of barriers and atomics.

9.15.2. Vote Group Operations

The vote group operations allow invocations within a group to compare values across a group. The types of votes enabled are:

- Do all active group invocations agree that an expression is true?
- Do any active group invocations evaluate an expression to true?
- Do all active group invocations have the same value of an expression?

NOTE	These operations are useful in combination with control flow in that they allow for developers to check whether conditions match across the group and choose potentially faster code-paths in these cases.

9.15.3. Arithmetic Group Operations

The arithmetic group operations allow invocations to perform scans and reductions across a group. The operators supported are add, mul, min, max, and, or, xor.

For reductions, every invocation in a group will obtain the cumulative result of these operators applied to all values in the group. For exclusive scans, each invocation in a group will obtain the cumulative result of these operators applied to all values in invocations with a lower index in the

group. Inclusive scans are identical to exclusive scans, except the cumulative result includes the operator applied to the value in the current invocation.

The order in which these operators are applied is implementation-dependent.

9.15.4. Ballot Group Operations

The ballot group operations allow invocations to perform more complex votes across the group. The ballot functionality allows all invocations within a group to provide a boolean value and get as a result what each invocation provided as their boolean value. The broadcast functionality allows values to be broadcast from an invocation to all other invocations within the group.

9.15.5. Shuffle Group Operations

The shuffle group operations allow invocations to read values from other invocations within a group.

9.15.6. Shuffle Relative Group Operations

The shuffle relative group operations allow invocations to read values from other invocations within the group relative to the current invocation in the group. The relative operations supported allow data to be shifted up and down through the invocations within a group.

9.15.7. Clustered Group Operations

The clustered group operations allow invocations to perform an operation among partitions of a group, such that the operation is only performed within the group invocations within a partition. The partitions for clustered group operations are consecutive power-of-two size groups of invocations and the cluster size **must** be known at pipeline creation time. The operations supported are add, mul, min, max, and, or, xor.

9.16. Quad Group Operations

Quad group operations (`OpGroupNonUniformQuad*`) are a specialized type of group operations that only operate on quad scope instances. Whilst these instructions do include a `Scope` parameter, this scope is always overridden; only the quad scope instance is included in its execution scope.

Fragment shaders that statically execute either `OpGroupNonUniformQuadBroadcast` or `OpGroupNonUniformQuadSwap` **must** launch sufficient invocations to ensure their correct operation; additional helper invocations are launched for framebuffer locations not covered by rasterized fragments if necessary.

The index used to select participating invocations is i, as described for a quad scope instance, defined as the *quad index* in the SPIR-V specification.

For `OpGroupNonUniformQuadBroadcast` this value is equal to `Index`. For `OpGroupNonUniformQuadSwap`, it is equal to the implicit `Index` used by each participating invocation.

9.17. Derivative Operations

Derivative operations calculate the partial derivative for an expression P as a function of an invocation's x and y coordinates.

Derivative operations operate on a set of invocations known as a *derivative group* as defined in the SPIR-V specification.

A derivative group in a fragment shader is equivalent to the primitive scope instance.

Derivatives are calculated assuming that P is piecewise linear and continuous within the derivative group.

The following control-flow restrictions apply to derivative operations:

- dynamic instances of explicit derivative instructions (`OpDPdx*`, `OpDPdy*`, and `OpFwidth*`) **must** be executed in control flow that is uniform within a derivative group.
- dynamic instances of implicit derivative operations **can** be executed in control flow that is not uniform within the derivative group, but results are undefined.

Fragment shaders that statically execute derivative operations **must** launch sufficient invocations to ensure their correct operation; additional helper invocations are launched for framebuffer locations not covered by rasterized fragments if necessary.

Derivative operations calculate their results as the difference between the result of P across invocations in the quad. For fine derivative operations (`OpDPdxFine` and `OpDPdyFine`), the values of $DPdx(P_i)$ are calculated as

$$DPdx(P_0) = DPdx(P_1) = P_1 - P_0$$

$$DPdx(P_2) = DPdx(P_3) = P_3 - P_2$$

and the values of $DPdy(P_i)$ are calculated as

$$DPdy(P_0) = DPdy(P_2) = P_2 - P_0$$

$$DPdy(P_1) = DPdy(P_3) = P_3 - P_1$$

where i is the index of each invocation as described in Quad.

Coarse derivative operations (`OpDPdxCoarse` and `OpDPdyCoarse`), calculate their results in roughly the same manner, but **may** only calculate two values instead of four (one for each of DPdx and DPdy), reusing the same result no matter the originating invocation. If an implementation does this, it **should** use the fine derivative calculations described for P_0.

NOTE Derivative values are calculated between fragments rather than pixels. If the

> fragment shader invocations involved in the calculation cover multiple pixels, these operations cover a wider area, resulting in larger derivative values. This in turn will result in a coarser LOD being selected for image sampling operations using derivatives.
>
> Applications may want to account for this when using multi-pixel fragments; if pixel derivatives are desired, applications should use explicit derivative operations and divide the results by the size of the fragment in each dimension as follows:
>
> $$DPdx(P_n)' = DPdx(P_n) / w$$
>
> $$DPdy(P_n)' = DPdy(P_n) / h$$
>
> where w and h are the size of the fragments in the quad, and $DPdx(P_n)'$ and $DPdy(P_n)'$ are the pixel derivatives.

The results for `OpDPdx` and `OpDPdy` **may** be calculated as either fine or coarse derivatives, with implementations favoring the most efficient approach. Implementations **must** choose coarse or fine consistently between the two.

Executing `OpFwidthFine`, `OpFwidthCoarse`, or `OpFwidth` is equivalent to executing the corresponding `OpDPdx*` and `OpDPdy*` instructions, taking the absolute value of the results, and summing them.

Executing an `OpImage*Sample*ImplicitLod` instruction is equivalent to executing `OpDPdx`(`Coordinate`) and `OpDPdy`(`Coordinate`), and passing the results as the `Grad` operands `dx` and `dy`.

> **NOTE** It is expected that using the `ImplicitLod` variants of sampling functions will be substantially more efficient than using the `ExplicitLod` variants with explicitly generated derivatives.

9.18. Helper Invocations

When performing derivative or quad group operations in a fragment shader, additional invocations **may** be spawned in order to ensure correct results. These additional invocations are known as *helper invocations* and **can** be identified by a non-zero value in the `HelperInvocation` built-in. Stores and atomics performed by helper invocations **must** not have any effect on memory except for the `Function`, `Private` and `Output` storage classes, and values returned by atomic instructions in helper invocations are undefined.

> **NOTE** While storage to `Output` storage class has an effect even in helper invocations, it does not mean that helper invocations have an effect on the framebuffer. `Output` variables in fragment shaders can be read from as well, and they behave more like `Private` variables for the duration of the shader invocation.

Helper invocations **may** be considered inactive for group operations other than derivative and quad group operations. All invocations in a quad scope instance **may** become permanently inactive

at any point once the only remaining invocations in that quad scope instance are helper invocations.

Chapter 10. Pipelines

The following figure shows a block diagram of the Vulkan pipelines. Some Vulkan commands specify geometric objects to be drawn or computational work to be performed, while others specify state controlling how objects are handled by the various pipeline stages, or control data transfer between memory organized as images and buffers. Commands are effectively sent through a processing pipeline, either a *graphics pipeline*, or a *compute pipeline*.

The first stage of the graphics pipeline (Input Assembler) assembles vertices to form geometric primitives such as points, lines, and triangles, based on a requested primitive topology. In the next stage (Vertex Shader) vertices **can** be transformed, computing positions and attributes for each vertex. If tessellation and/or geometry shaders are supported, they **can** then generate multiple primitives from a single input primitive, possibly changing the primitive topology or generating additional attribute data in the process.

The final resulting primitives are clipped to a clip volume in preparation for the next stage, Rasterization. The rasterizer produces a series of *fragments* associated with a region of the framebuffer, from a two-dimensional description of a point, line segment, or triangle. These fragments are processed by fragment operations to determine whether generated values will be written to the framebuffer. Fragment shading determines the values to be written to the framebuffer attachments. Framebuffer operations then read and write the color and depth/stencil attachments of the framebuffer for a given subpass of a render pass instance. The attachments **can** be used as input attachments in the fragment shader in a later subpass of the same render pass.

The compute pipeline is a separate pipeline from the graphics pipeline, which operates on one-, two-, or three-dimensional workgroups which **can** read from and write to buffer and image memory.

This ordering is meant only as a tool for describing Vulkan, not as a strict rule of how Vulkan is implemented, and we present it only as a means to organize the various operations of the pipelines. Actual ordering guarantees between pipeline stages are explained in detail in the synchronization chapter.

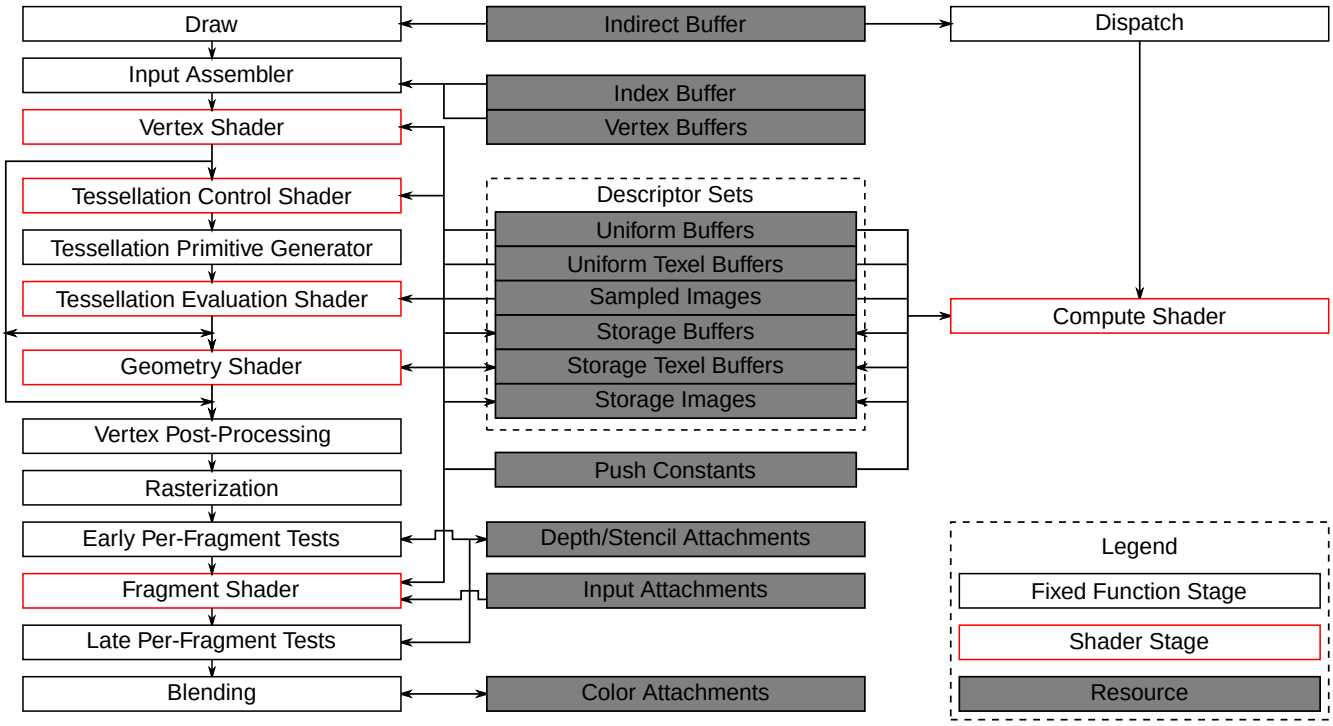

Figure 2. Block diagram of the Vulkan pipeline

Each pipeline is controlled by a monolithic object created from a description of all of the shader stages and any relevant fixed-function stages. Linking the whole pipeline together allows the optimization of shaders based on their input/outputs and eliminates expensive draw time state validation.

A pipeline object is bound to the current state using vkCmdBindPipeline. Any pipeline object state that is specified as dynamic is not applied to the current state when the pipeline object is bound, but is instead set by dynamic state setting commands.

No state, including dynamic state, is inherited from one command buffer to another.

Compute, and graphics pipelines are each represented by `VkPipeline` handles:

```
// Provided by VK_VERSION_1_0
VK_DEFINE_NON_DISPATCHABLE_HANDLE(VkPipeline)
```

10.1. Multiple Pipeline Creation

Multiple pipelines **can** be created in a single call by commands such as vkCreateComputePipelines, and vkCreateGraphicsPipelines.

The creation commands are passed an array `pCreateInfos` of `Vk*PipelineCreateInfo` structures specifying parameters of each pipeline to be created, and return a corresponding array of handles in `pPipelines`. Each element index *i* of `pPipelines` is created based on the corresponding element *i* of `pCreateInfos`.

Applications **can** group together similar pipelines to be created in a single call, and implementations are encouraged to look for reuse opportunities when creating a group.

When attempting to create many pipelines in a single command, it is possible that creation **may** fail for a subset of them. In this case, the corresponding elements of `pPipelines` will be VK_NULL_HANDLE. If creation fails for a pipeline despite valid arguments (for example, due to out of memory errors), the VkResult code returned by the pipeline creation command will indicate why. The implementation will attempt to create all pipelines, and only return VK_NULL_HANDLE values for those that actually failed.

If creation fails for a pipeline that has the `VK_PIPELINE_CREATE_EARLY_RETURN_ON_FAILURE_BIT` set in its `Vk*PipelineCreateInfo`, pipelines at an index in the `pPipelines` array greater than or equal to that of the failing pipeline will be VK_NULL_HANDLE.

If creation fails for multiple pipelines, the returned VkResult **must** be the return value of any one of the pipelines which did not succeed. An application **can** reliably clean up from a failed call by iterating over the `pPipelines` array and destroying every element that is not VK_NULL_HANDLE.

If the entire command fails and no pipelines are created, all elements of `pPipelines` will be VK_NULL_HANDLE.

10.2. Compute Pipelines

Compute pipelines consist of a single static compute shader stage and the pipeline layout.

The compute pipeline represents a compute shader and is created by calling `vkCreateComputePipelines` with `module` and `pName` selecting an entry point from a shader module, where that entry point defines a valid compute shader, in the VkPipelineShaderStageCreateInfo structure contained within the VkComputePipelineCreateInfo structure.

To create compute pipelines, call:

```
// Provided by VK_VERSION_1_0
VkResult vkCreateComputePipelines(
    VkDevice                                    device,
    VkPipelineCache                             pipelineCache,
    uint32_t                                    createInfoCount,
    const VkComputePipelineCreateInfo*          pCreateInfos,
    const VkAllocationCallbacks*                pAllocator,
    VkPipeline*                                 pPipelines);
```

- `device` is the logical device that creates the compute pipelines.
- `pipelineCache` is either VK_NULL_HANDLE, indicating that pipeline caching is disabled; or the handle of a valid pipeline cache object, in which case use of that cache is enabled for the duration of the command.
- `createInfoCount` is the length of the `pCreateInfos` and `pPipelines` arrays.
- `pCreateInfos` is a pointer to an array of VkComputePipelineCreateInfo structures.
- `pAllocator` controls host memory allocation as described in the Memory Allocation chapter.
- `pPipelines` is a pointer to an array of VkPipeline handles in which the resulting compute

pipeline objects are returned.

Pipelines are created and returned as described for Multiple Pipeline Creation.

Valid Usage

- VUID-vkCreateComputePipelines-device-09661
  `device` **must** support at least one queue family with the `VK_QUEUE_COMPUTE_BIT` capability
- VUID-vkCreateComputePipelines-flags-00695
  If the `flags` member of any element of `pCreateInfos` contains the `VK_PIPELINE_CREATE_DERIVATIVE_BIT` flag, and the `basePipelineIndex` member of that same element is not `-1`, `basePipelineIndex` **must** be less than the index into `pCreateInfos` that corresponds to that element
- VUID-vkCreateComputePipelines-flags-00696
  If the `flags` member of any element of `pCreateInfos` contains the `VK_PIPELINE_CREATE_DERIVATIVE_BIT` flag, the base pipeline **must** have been created with the `VK_PIPELINE_CREATE_ALLOW_DERIVATIVES_BIT` flag set
- VUID-vkCreateComputePipelines-pipelineCache-02873
  If `pipelineCache` was created with `VK_PIPELINE_CACHE_CREATE_EXTERNALLY_SYNCHRONIZED_BIT`, host access to `pipelineCache` **must** be externally synchronized

Valid Usage (Implicit)

- VUID-vkCreateComputePipelines-device-parameter
  `device` **must** be a valid VkDevice handle
- VUID-vkCreateComputePipelines-pipelineCache-parameter
  If `pipelineCache` is not VK_NULL_HANDLE, `pipelineCache` **must** be a valid VkPipelineCache handle
- VUID-vkCreateComputePipelines-pCreateInfos-parameter
  `pCreateInfos` **must** be a valid pointer to an array of `createInfoCount` valid VkComputePipelineCreateInfo structures
- VUID-vkCreateComputePipelines-pAllocator-parameter
  If `pAllocator` is not `NULL`, `pAllocator` **must** be a valid pointer to a valid VkAllocationCallbacks structure
- VUID-vkCreateComputePipelines-pPipelines-parameter
  `pPipelines` **must** be a valid pointer to an array of `createInfoCount` VkPipeline handles
- VUID-vkCreateComputePipelines-createInfoCount-arraylength
  `createInfoCount` **must** be greater than `0`
- VUID-vkCreateComputePipelines-pipelineCache-parent
  If `pipelineCache` is a valid handle, it **must** have been created, allocated, or retrieved from `device`

Return Codes

Success

- VK_SUCCESS

Failure

- VK_ERROR_OUT_OF_HOST_MEMORY
- VK_ERROR_OUT_OF_DEVICE_MEMORY

The VkComputePipelineCreateInfo structure is defined as:

```
// Provided by VK_VERSION_1_0
typedef struct VkComputePipelineCreateInfo {
    VkStructureType                    sType;
    const void*                        pNext;
    VkPipelineCreateFlags              flags;
    VkPipelineShaderStageCreateInfo    stage;
    VkPipelineLayout                   layout;
    VkPipeline                         basePipelineHandle;
    int32_t                            basePipelineIndex;
} VkComputePipelineCreateInfo;
```

- sType is a VkStructureType value identifying this structure.
- pNext is NULL or a pointer to a structure extending this structure.
- flags is a bitmask of VkPipelineCreateFlagBits specifying how the pipeline will be generated.
- stage is a VkPipelineShaderStageCreateInfo structure describing the compute shader.
- layout is the description of binding locations used by both the pipeline and descriptor sets used with the pipeline.
- basePipelineHandle is a pipeline to derive from.
- basePipelineIndex is an index into the pCreateInfos parameter to use as a pipeline to derive from.

The parameters basePipelineHandle and basePipelineIndex are described in more detail in Pipeline Derivatives.

Valid Usage

- VUID-VkComputePipelineCreateInfo-None-09497
  flags **must** be a valid combination of VkPipelineCreateFlagBits values
- VUID-VkComputePipelineCreateInfo-flags-07984
  If flags contains the VK_PIPELINE_CREATE_DERIVATIVE_BIT flag, and basePipelineIndex is -1, basePipelineHandle **must** be a valid compute VkPipeline handle
- VUID-VkComputePipelineCreateInfo-flags-07985

If `flags` contains the `VK_PIPELINE_CREATE_DERIVATIVE_BIT` flag, and `basePipelineHandle` is VK_NULL_HANDLE, `basePipelineIndex` **must** be a valid index into the calling command's `pCreateInfos` parameter

- VUID-VkComputePipelineCreateInfo-flags-07986
  If `flags` contains the `VK_PIPELINE_CREATE_DERIVATIVE_BIT` flag, `basePipelineIndex` **must** be -1 or `basePipelineHandle` **must** be VK_NULL_HANDLE
- VUID-VkComputePipelineCreateInfo-layout-07987
  If a push constant block is declared in a shader, a push constant range in `layout` **must** match the shader stage
- VUID-VkComputePipelineCreateInfo-layout-10069
  If a push constant block is declared in a shader, the block must be contained inside the push constant range in `layout` that matches the stage
- VUID-VkComputePipelineCreateInfo-layout-07988
  If a resource variables is declared in a shader, a descriptor slot in `layout` **must** match the shader stage
- VUID-VkComputePipelineCreateInfo-layout-07990
  If a resource variables is declared in a shader, a descriptor slot in `layout` **must** match the descriptor type
- VUID-VkComputePipelineCreateInfo-layout-07991
  If a resource variables is declared in a shader as an array, a descriptor slot in `layout` **must** match the descriptor count
- VUID-VkComputePipelineCreateInfo-pipelineCreationCacheControl-02875
  If the `pipelineCreationCacheControl` feature is not enabled, `flags` **must** not include `VK_PIPELINE_CREATE_FAIL_ON_PIPELINE_COMPILE_REQUIRED_BIT` or `VK_PIPELINE_CREATE_EARLY_RETURN_ON_FAILURE_BIT`
- VUID-VkComputePipelineCreateInfo-stage-00701
  The `stage` member of `stage` **must** be `VK_SHADER_STAGE_COMPUTE_BIT`
- VUID-VkComputePipelineCreateInfo-stage-00702
  The shader code for the entry point identified by `stage` and the rest of the state identified by this structure **must** adhere to the pipeline linking rules described in the Shader Interfaces chapter
- VUID-VkComputePipelineCreateInfo-layout-01687
  The number of resources in `layout` accessible to the compute shader stage **must** be less than or equal to `VkPhysicalDeviceLimits`::`maxPerStageResources`
- VUID-VkComputePipelineCreateInfo-pipelineStageCreationFeedbackCount-06566
  If VkPipelineCreationFeedbackCreateInfo::`pipelineStageCreationFeedbackCount` is not `0`, it **must** be 1

Valid Usage (Implicit)

- VUID-VkComputePipelineCreateInfo-sType-sType
  `sType` **must** be `VK_STRUCTURE_TYPE_COMPUTE_PIPELINE_CREATE_INFO`

- VUID-VkComputePipelineCreateInfo-pNext-pNext
  `pNext` **must** be `NULL` or a pointer to a valid instance of VkPipelineCreationFeedbackCreateInfo
- VUID-VkComputePipelineCreateInfo-sType-unique
  The `sType` value of each struct in the `pNext` chain **must** be unique
- VUID-VkComputePipelineCreateInfo-stage-parameter
  `stage` **must** be a valid VkPipelineShaderStageCreateInfo structure
- VUID-VkComputePipelineCreateInfo-layout-parameter
  `layout` **must** be a valid VkPipelineLayout handle
- VUID-VkComputePipelineCreateInfo-commonparent
  Both of `basePipelineHandle`, and `layout` that are valid handles of non-ignored parameters **must** have been created, allocated, or retrieved from the same VkDevice

The `VkPipelineShaderStageCreateInfo` structure is defined as:

```
// Provided by VK_VERSION_1_0
typedef struct VkPipelineShaderStageCreateInfo {
    VkStructureType                     sType;
    const void*                         pNext;
    VkPipelineShaderStageCreateFlags    flags;
    VkShaderStageFlagBits               stage;
    VkShaderModule                      module;
    const char*                         pName;
    const VkSpecializationInfo*         pSpecializationInfo;
} VkPipelineShaderStageCreateInfo;
```

- `sType` is a VkStructureType value identifying this structure.
- `pNext` is `NULL` or a pointer to a structure extending this structure.
- `flags` is a bitmask of VkPipelineShaderStageCreateFlagBits specifying how the pipeline shader stage will be generated.
- `stage` is a VkShaderStageFlagBits value specifying a single pipeline stage.
- `module` is a VkShaderModule object containing the shader code for this stage.
- `pName` is a pointer to a null-terminated UTF-8 string specifying the entry point name of the shader for this stage.
- `pSpecializationInfo` is a pointer to a VkSpecializationInfo structure, as described in Specialization Constants, or `NULL`.

The shader code used by the pipeline is defined by `module`.

Valid Usage

- VUID-VkPipelineShaderStageCreateInfo-stage-00704
  If the `geometryShader` feature is not enabled, `stage` **must** not be

VK_SHADER_STAGE_GEOMETRY_BIT

- VUID-VkPipelineShaderStageCreateInfo-stage-00705
  If the tessellationShader feature is not enabled, stage **must** not be VK_SHADER_STAGE_TESSELLATION_CONTROL_BIT or VK_SHADER_STAGE_TESSELLATION_EVALUATION_BIT
- VUID-VkPipelineShaderStageCreateInfo-stage-00706
  stage **must** not be VK_SHADER_STAGE_ALL_GRAPHICS, or VK_SHADER_STAGE_ALL
- VUID-VkPipelineShaderStageCreateInfo-pName-00707
  pName **must** be the name of an OpEntryPoint in module with an execution model that matches stage
- VUID-VkPipelineShaderStageCreateInfo-maxClipDistances-00708
  If the identified entry point includes any variable in its interface that is declared with the ClipDistance BuiltIn decoration, that variable **must** not have an array size greater than VkPhysicalDeviceLimits::maxClipDistances
- VUID-VkPipelineShaderStageCreateInfo-maxCullDistances-00709
  If the identified entry point includes any variable in its interface that is declared with the CullDistance BuiltIn decoration, that variable **must** not have an array size greater than VkPhysicalDeviceLimits::maxCullDistances
- VUID-VkPipelineShaderStageCreateInfo-maxCombinedClipAndCullDistances-00710
  If the identified entry point includes variables in its interface that are declared with the ClipDistance BuiltIn decoration and variables in its interface that are declared with the CullDistance BuiltIn decoration, those variables **must** not have array sizes which sum to more than VkPhysicalDeviceLimits::maxCombinedClipAndCullDistances
- VUID-VkPipelineShaderStageCreateInfo-maxSampleMaskWords-00711
  If the identified entry point includes any variable in its interface that is declared with the SampleMask BuiltIn decoration, that variable **must** not have an array size greater than VkPhysicalDeviceLimits::maxSampleMaskWords
- VUID-VkPipelineShaderStageCreateInfo-stage-00713
  If stage is VK_SHADER_STAGE_TESSELLATION_CONTROL_BIT or VK_SHADER_STAGE_TESSELLATION_EVALUATION_BIT, and the identified entry point has an OpExecutionMode instruction specifying a patch size with OutputVertices, the patch size **must** be greater than 0 and less than or equal to VkPhysicalDeviceLimits::maxTessellationPatchSize
- VUID-VkPipelineShaderStageCreateInfo-stage-00714
  If stage is VK_SHADER_STAGE_GEOMETRY_BIT, the identified entry point **must** have an OpExecutionMode instruction specifying a maximum output vertex count that is greater than 0 and less than or equal to VkPhysicalDeviceLimits::maxGeometryOutputVertices
- VUID-VkPipelineShaderStageCreateInfo-stage-00715
  If stage is VK_SHADER_STAGE_GEOMETRY_BIT, the identified entry point **must** have an OpExecutionMode instruction specifying an invocation count that is greater than 0 and less than or equal to VkPhysicalDeviceLimits::maxGeometryShaderInvocations
- VUID-VkPipelineShaderStageCreateInfo-stage-02596
  If stage is either VK_SHADER_STAGE_VERTEX_BIT, VK_SHADER_STAGE_TESSELLATION_CONTROL_BIT,

VK_SHADER_STAGE_TESSELLATION_EVALUATION_BIT, or VK_SHADER_STAGE_GEOMETRY_BIT, and the identified entry point writes to Layer for any primitive, it **must** write the same value to Layer for all vertices of a given primitive

- VUID-VkPipelineShaderStageCreateInfo-stage-02597
  If stage is either VK_SHADER_STAGE_VERTEX_BIT, VK_SHADER_STAGE_TESSELLATION_CONTROL_BIT, VK_SHADER_STAGE_TESSELLATION_EVALUATION_BIT, or VK_SHADER_STAGE_GEOMETRY_BIT, and the identified entry point writes to ViewportIndex for any primitive, it **must** write the same value to ViewportIndex for all vertices of a given primitive
- VUID-VkPipelineShaderStageCreateInfo-stage-06685
  If stage is VK_SHADER_STAGE_FRAGMENT_BIT, and the identified entry point writes to FragDepth in any execution path, all execution paths that are not exclusive to helper invocations **must** either discard the fragment, or write or initialize the value of FragDepth
- VUID-VkPipelineShaderStageCreateInfo-flags-02784
  If flags has the VK_PIPELINE_SHADER_STAGE_CREATE_ALLOW_VARYING_SUBGROUP_SIZE_BIT flag set, the subgroupSizeControl feature **must** be enabled
- VUID-VkPipelineShaderStageCreateInfo-flags-02785
  If flags has the VK_PIPELINE_SHADER_STAGE_CREATE_REQUIRE_FULL_SUBGROUPS_BIT flag set, the computeFullSubgroups feature **must** be enabled
- VUID-VkPipelineShaderStageCreateInfo-flags-08988
  If flags includes VK_PIPELINE_SHADER_STAGE_CREATE_REQUIRE_FULL_SUBGROUPS_BIT, stage **must** be VK_SHADER_STAGE_COMPUTE_BIT
- VUID-VkPipelineShaderStageCreateInfo-pNext-02754
  If a VkPipelineShaderStageRequiredSubgroupSizeCreateInfo structure is included in the pNext chain, flags **must** not have the VK_PIPELINE_SHADER_STAGE_CREATE_ALLOW_VARYING_SUBGROUP_SIZE_BIT flag set
- VUID-VkPipelineShaderStageCreateInfo-pNext-02755
  If a VkPipelineShaderStageRequiredSubgroupSizeCreateInfo structure is included in the pNext chain, the subgroupSizeControl feature **must** be enabled, and stage **must** be a valid bit specified in requiredSubgroupSizeStages
- VUID-VkPipelineShaderStageCreateInfo-pNext-02756
  If a VkPipelineShaderStageRequiredSubgroupSizeCreateInfo structure is included in the pNext chain and stage is VK_SHADER_STAGE_COMPUTE_BIT, the local workgroup size of the shader **must** be less than or equal to the product of VkPipelineShaderStageRequiredSubgroupSizeCreateInfo::requiredSubgroupSize and maxComputeWorkgroupSubgroups
- VUID-VkPipelineShaderStageCreateInfo-pNext-02757
  If a VkPipelineShaderStageRequiredSubgroupSizeCreateInfo structure is included in the pNext chain, and flags has the VK_PIPELINE_SHADER_STAGE_CREATE_REQUIRE_FULL_SUBGROUPS_BIT flag set, the local workgroup size in the X dimension of the pipeline **must** be a multiple of VkPipelineShaderStageRequiredSubgroupSizeCreateInfo::requiredSubgroupSize
- VUID-VkPipelineShaderStageCreateInfo-flags-02758
  If flags has both the VK_PIPELINE_SHADER_STAGE_CREATE_REQUIRE_FULL_SUBGROUPS_BIT and VK_PIPELINE_SHADER_STAGE_CREATE_ALLOW_VARYING_SUBGROUP_SIZE_BIT flags set, the local

workgroup size in the X dimension of the pipeline **must** be a multiple of `maxSubgroupSize`

- VUID-VkPipelineShaderStageCreateInfo-flags-02759
  If `flags` has the `VK_PIPELINE_SHADER_STAGE_CREATE_REQUIRE_FULL_SUBGROUPS_BIT` flag set and `flags` does not have the `VK_PIPELINE_SHADER_STAGE_CREATE_ALLOW_VARYING_SUBGROUP_SIZE_BIT` flag set and no VkPipelineShaderStageRequiredSubgroupSizeCreateInfo structure is included in the `pNext` chain, the local workgroup size in the X dimension of the pipeline **must** be a multiple of `subgroupSize`
- VUID-VkPipelineShaderStageCreateInfo-stage-08771
  `module` **must** be a valid VkShaderModule
- VUID-VkPipelineShaderStageCreateInfo-pSpecializationInfo-06849
  The shader code used by the pipeline **must** be valid as described by the Khronos SPIR-V Specification after applying the specializations provided in `pSpecializationInfo`, if any, and then converting all specialization constants into fixed constants

Valid Usage (Implicit)

- VUID-VkPipelineShaderStageCreateInfo-sType-sType
  `sType` **must** be `VK_STRUCTURE_TYPE_PIPELINE_SHADER_STAGE_CREATE_INFO`
- VUID-VkPipelineShaderStageCreateInfo-pNext-pNext
  Each `pNext` member of any structure (including this one) in the `pNext` chain **must** be either `NULL` or a pointer to a valid instance of VkPipelineShaderStageRequiredSubgroupSizeCreateInfo or VkShaderModuleCreateInfo
- VUID-VkPipelineShaderStageCreateInfo-sType-unique
  The `sType` value of each struct in the `pNext` chain **must** be unique
- VUID-VkPipelineShaderStageCreateInfo-flags-parameter
  `flags` **must** be a valid combination of VkPipelineShaderStageCreateFlagBits values
- VUID-VkPipelineShaderStageCreateInfo-stage-parameter
  `stage` **must** be a valid VkShaderStageFlagBits value
- VUID-VkPipelineShaderStageCreateInfo-module-parameter
  If `module` is not VK_NULL_HANDLE, `module` **must** be a valid VkShaderModule handle
- VUID-VkPipelineShaderStageCreateInfo-pName-parameter
  `pName` **must** be a null-terminated UTF-8 string
- VUID-VkPipelineShaderStageCreateInfo-pSpecializationInfo-parameter
  If `pSpecializationInfo` is not `NULL`, `pSpecializationInfo` **must** be a valid pointer to a valid VkSpecializationInfo structure

```
// Provided by VK_VERSION_1_0
typedef VkFlags VkPipelineShaderStageCreateFlags;
```

`VkPipelineShaderStageCreateFlags` is a bitmask type for setting a mask of zero or more VkPipelineShaderStageCreateFlagBits.

Possible values of the `flags` member of VkPipelineShaderStageCreateInfo specifying how a pipeline shader stage is created, are:

```
// Provided by VK_VERSION_1_0
typedef enum VkPipelineShaderStageCreateFlagBits {
  // Provided by VK_VERSION_1_3
    VK_PIPELINE_SHADER_STAGE_CREATE_ALLOW_VARYING_SUBGROUP_SIZE_BIT = 0x00000001,
  // Provided by VK_VERSION_1_3
    VK_PIPELINE_SHADER_STAGE_CREATE_REQUIRE_FULL_SUBGROUPS_BIT = 0x00000002,
} VkPipelineShaderStageCreateFlagBits;
```

- VK_PIPELINE_SHADER_STAGE_CREATE_ALLOW_VARYING_SUBGROUP_SIZE_BIT specifies that the SubgroupSize **may** vary in the shader stage.
- VK_PIPELINE_SHADER_STAGE_CREATE_REQUIRE_FULL_SUBGROUPS_BIT specifies that the subgroup sizes **must** be launched with all invocations active in the compute stage.

NOTE

If VK_PIPELINE_SHADER_STAGE_CREATE_ALLOW_VARYING_SUBGROUP_SIZE_BIT_EXT and VK_PIPELINE_SHADER_STAGE_CREATE_REQUIRE_FULL_SUBGROUPS_BIT_EXT are specified and minSubgroupSize does not equal maxSubgroupSize and no required subgroup size is specified, then the only way to guarantee that the 'X' dimension of the local workgroup size is a multiple of SubgroupSize is to make it a multiple of maxSubgroupSize. Under these conditions, you are guaranteed full subgroups but not any particular subgroup size.

Bits which **can** be set by commands and structures, specifying one or more shader stages, are:

```
// Provided by VK_VERSION_1_0
typedef enum VkShaderStageFlagBits {
    VK_SHADER_STAGE_VERTEX_BIT = 0x00000001,
    VK_SHADER_STAGE_TESSELLATION_CONTROL_BIT = 0x00000002,
    VK_SHADER_STAGE_TESSELLATION_EVALUATION_BIT = 0x00000004,
    VK_SHADER_STAGE_GEOMETRY_BIT = 0x00000008,
    VK_SHADER_STAGE_FRAGMENT_BIT = 0x00000010,
    VK_SHADER_STAGE_COMPUTE_BIT = 0x00000020,
    VK_SHADER_STAGE_ALL_GRAPHICS = 0x0000001F,
    VK_SHADER_STAGE_ALL = 0x7FFFFFFF,
} VkShaderStageFlagBits;
```

- VK_SHADER_STAGE_VERTEX_BIT specifies the vertex stage.
- VK_SHADER_STAGE_TESSELLATION_CONTROL_BIT specifies the tessellation control stage.
- VK_SHADER_STAGE_TESSELLATION_EVALUATION_BIT specifies the tessellation evaluation stage.
- VK_SHADER_STAGE_GEOMETRY_BIT specifies the geometry stage.
- VK_SHADER_STAGE_FRAGMENT_BIT specifies the fragment stage.
- VK_SHADER_STAGE_COMPUTE_BIT specifies the compute stage.

- VK_SHADER_STAGE_ALL_GRAPHICS is a combination of bits used as shorthand to specify all graphics stages defined above (excluding the compute stage).
- VK_SHADER_STAGE_ALL is a combination of bits used as shorthand to specify all shader stages supported by the device, including all additional stages which are introduced by extensions.

NOTE	VK_SHADER_STAGE_ALL_GRAPHICS only includes the original five graphics stages included in Vulkan 1.0, and not any stages added by extensions. Thus, it may not have the desired effect in all cases.

```
// Provided by VK_VERSION_1_0
typedef VkFlags VkShaderStageFlags;
```

VkShaderStageFlags is a bitmask type for setting a mask of zero or more VkShaderStageFlagBits.

The VkPipelineShaderStageRequiredSubgroupSizeCreateInfo structure is defined as:

```
// Provided by VK_VERSION_1_3
typedef struct VkPipelineShaderStageRequiredSubgroupSizeCreateInfo {
    VkStructureType    sType;
    void*              pNext;
    uint32_t           requiredSubgroupSize;
} VkPipelineShaderStageRequiredSubgroupSizeCreateInfo;
```

- sType is a VkStructureType value identifying this structure.
- pNext is NULL or a pointer to a structure extending this structure.
- requiredSubgroupSize is an unsigned integer value specifying the required subgroup size for the newly created pipeline shader stage.

If a VkPipelineShaderStageRequiredSubgroupSizeCreateInfo structure is included in the pNext chain of VkPipelineShaderStageCreateInfo, it specifies that the pipeline shader stage being compiled has a required subgroup size.

Valid Usage

- VUID-VkPipelineShaderStageRequiredSubgroupSizeCreateInfo-requiredSubgroupSize-02760
  requiredSubgroupSize **must** be a power-of-two integer
- VUID-VkPipelineShaderStageRequiredSubgroupSizeCreateInfo-requiredSubgroupSize-02761
  requiredSubgroupSize **must** be greater or equal to minSubgroupSize
- VUID-VkPipelineShaderStageRequiredSubgroupSizeCreateInfo-requiredSubgroupSize-02762
  requiredSubgroupSize **must** be less than or equal to maxSubgroupSize

Valid Usage (Implicit)

- VUID-VkPipelineShaderStageRequiredSubgroupSizeCreateInfo-sType-sType
  `sType` **must** be `VK_STRUCTURE_TYPE_PIPELINE_SHADER_STAGE_REQUIRED_SUBGROUP_SIZE_CREATE_INFO`

10.3. Graphics Pipelines

Graphics pipelines consist of multiple shader stages, multiple fixed-function pipeline stages, and a pipeline layout.

To create graphics pipelines, call:

```
// Provided by VK_VERSION_1_0
VkResult vkCreateGraphicsPipelines(
    VkDevice                                    device,
    VkPipelineCache                             pipelineCache,
    uint32_t                                    createInfoCount,
    const VkGraphicsPipelineCreateInfo*         pCreateInfos,
    const VkAllocationCallbacks*                pAllocator,
    VkPipeline*                                 pPipelines);
```

- `device` is the logical device that creates the graphics pipelines.
- `pipelineCache` is either VK_NULL_HANDLE, indicating that pipeline caching is disabled; or the handle of a valid pipeline cache object, in which case use of that cache is enabled for the duration of the command.
- `createInfoCount` is the length of the `pCreateInfos` and `pPipelines` arrays.
- `pCreateInfos` is a pointer to an array of VkGraphicsPipelineCreateInfo structures.
- `pAllocator` controls host memory allocation as described in the Memory Allocation chapter.
- `pPipelines` is a pointer to an array of VkPipeline handles in which the resulting graphics pipeline objects are returned.

The VkGraphicsPipelineCreateInfo structure includes an array of VkPipelineShaderStageCreateInfo structures for each of the desired active shader stages, as well as creation information for all relevant fixed-function stages, and a pipeline layout.

Pipelines are created and returned as described for Multiple Pipeline Creation.

Valid Usage

- VUID-vkCreateGraphicsPipelines-device-09662
  `device` **must** support at least one queue family with the `VK_QUEUE_GRAPHICS_BIT` capability
- VUID-vkCreateGraphicsPipelines-flags-00720
  If the `flags` member of any element of `pCreateInfos` contains the

VK_PIPELINE_CREATE_DERIVATIVE_BIT flag, and the basePipelineIndex member of that same element is not -1, basePipelineIndex **must** be less than the index into pCreateInfos that corresponds to that element

- VUID-vkCreateGraphicsPipelines-flags-00721
  If the flags member of any element of pCreateInfos contains the VK_PIPELINE_CREATE_DERIVATIVE_BIT flag, the base pipeline **must** have been created with the VK_PIPELINE_CREATE_ALLOW_DERIVATIVES_BIT flag set
- VUID-vkCreateGraphicsPipelines-pipelineCache-02876
  If pipelineCache was created with VK_PIPELINE_CACHE_CREATE_EXTERNALLY_SYNCHRONIZED_BIT, host access to pipelineCache **must** be externally synchronized

NOTE

An implicit cache may be provided by the implementation or a layer. For this reason, it is still valid to set VK_PIPELINE_CREATE_FAIL_ON_PIPELINE_COMPILE_REQUIRED_BIT on flags for any element of pCreateInfos while passing VK_NULL_HANDLE for pipelineCache.

Valid Usage (Implicit)

- VUID-vkCreateGraphicsPipelines-device-parameter
  device **must** be a valid VkDevice handle
- VUID-vkCreateGraphicsPipelines-pipelineCache-parameter
  If pipelineCache is not VK_NULL_HANDLE, pipelineCache **must** be a valid VkPipelineCache handle
- VUID-vkCreateGraphicsPipelines-pCreateInfos-parameter
  pCreateInfos **must** be a valid pointer to an array of createInfoCount valid VkGraphicsPipelineCreateInfo structures
- VUID-vkCreateGraphicsPipelines-pAllocator-parameter
  If pAllocator is not NULL, pAllocator **must** be a valid pointer to a valid VkAllocationCallbacks structure
- VUID-vkCreateGraphicsPipelines-pPipelines-parameter
  pPipelines **must** be a valid pointer to an array of createInfoCount VkPipeline handles
- VUID-vkCreateGraphicsPipelines-createInfoCount-arraylength
  createInfoCount **must** be greater than 0
- VUID-vkCreateGraphicsPipelines-pipelineCache-parent
  If pipelineCache is a valid handle, it **must** have been created, allocated, or retrieved from device

Return Codes

Success

- VK_SUCCESS

Failure

- VK_ERROR_OUT_OF_HOST_MEMORY
- VK_ERROR_OUT_OF_DEVICE_MEMORY

The VkGraphicsPipelineCreateInfo structure is defined as:

```
// Provided by VK_VERSION_1_0
typedef struct VkGraphicsPipelineCreateInfo {
    VkStructureType                                 sType;
    const void*                                     pNext;
    VkPipelineCreateFlags                           flags;
    uint32_t                                        stageCount;
    const VkPipelineShaderStageCreateInfo*          pStages;
    const VkPipelineVertexInputStateCreateInfo*     pVertexInputState;
    const VkPipelineInputAssemblyStateCreateInfo*   pInputAssemblyState;
    const VkPipelineTessellationStateCreateInfo*    pTessellationState;
    const VkPipelineViewportStateCreateInfo*        pViewportState;
    const VkPipelineRasterizationStateCreateInfo*   pRasterizationState;
    const VkPipelineMultisampleStateCreateInfo*     pMultisampleState;
    const VkPipelineDepthStencilStateCreateInfo*    pDepthStencilState;
    const VkPipelineColorBlendStateCreateInfo*      pColorBlendState;
    const VkPipelineDynamicStateCreateInfo*         pDynamicState;
    VkPipelineLayout                                layout;
    VkRenderPass                                    renderPass;
    uint32_t                                        subpass;
    VkPipeline                                      basePipelineHandle;
    int32_t                                         basePipelineIndex;
} VkGraphicsPipelineCreateInfo;
```

- sType is a VkStructureType value identifying this structure.
- pNext is NULL or a pointer to a structure extending this structure.
- flags is a bitmask of VkPipelineCreateFlagBits specifying how the pipeline will be generated.
- stageCount is the number of entries in the pStages array.
- pStages is a pointer to an array of stageCount VkPipelineShaderStageCreateInfo structures describing the set of the shader stages to be included in the graphics pipeline.
- pVertexInputState is a pointer to a VkPipelineVertexInputStateCreateInfo structure.
- pInputAssemblyState is a pointer to a VkPipelineInputAssemblyStateCreateInfo structure which determines input assembly behavior for vertex shading, as described in Drawing Commands.
- pTessellationState is a pointer to a VkPipelineTessellationStateCreateInfo structure defining tessellation state used by tessellation shaders.
- pViewportState is a pointer to a VkPipelineViewportStateCreateInfo structure defining viewport state used when rasterization is enabled.
- pRasterizationState is a pointer to a VkPipelineRasterizationStateCreateInfo structure defining rasterization state.

- `pMultisampleState` is a pointer to a VkPipelineMultisampleStateCreateInfo structure defining multisample state used when rasterization is enabled.
- `pDepthStencilState` is a pointer to a VkPipelineDepthStencilStateCreateInfo structure defining depth/stencil state used when rasterization is enabled for depth or stencil attachments accessed during rendering.
- `pColorBlendState` is a pointer to a VkPipelineColorBlendStateCreateInfo structure defining color blend state used when rasterization is enabled for any color attachments accessed during rendering.
- `pDynamicState` is a pointer to a VkPipelineDynamicStateCreateInfo structure defining which properties of the pipeline state object are dynamic and **can** be changed independently of the pipeline state. This **can** be `NULL`, which means no state in the pipeline is considered dynamic.
- `layout` is the description of binding locations used by both the pipeline and descriptor sets used with the pipeline.
- `renderPass` is a handle to a render pass object describing the environment in which the pipeline will be used. The pipeline **must** only be used with a render pass instance compatible with the one provided. See Render Pass Compatibility for more information.
- `subpass` is the index of the subpass in the render pass where this pipeline will be used.
- `basePipelineHandle` is a pipeline to derive from.
- `basePipelineIndex` is an index into the `pCreateInfos` parameter to use as a pipeline to derive from.

The parameters `basePipelineHandle` and `basePipelineIndex` are described in more detail in Pipeline Derivatives.

The state required for a graphics pipeline is divided into vertex input state, pre-rasterization shader state, fragment shader state, and fragment output state.

Vertex Input State

Vertex input state is defined by:

- VkPipelineVertexInputStateCreateInfo
- VkPipelineInputAssemblyStateCreateInfo

This state **must** be specified to create a complete graphics pipeline.

Pre-Rasterization Shader State

Pre-rasterization shader state is defined by:

- VkPipelineShaderStageCreateInfo entries for:
  - Vertex shaders
  - Tessellation control shaders
  - Tessellation evaluation shaders
  - Geometry shaders
- Within the VkPipelineLayout, the full pipeline layout **must** be specified.

- VkPipelineViewportStateCreateInfo
- VkPipelineRasterizationStateCreateInfo
- VkPipelineTessellationStateCreateInfo
- VkRenderPass and `subpass` parameter
- The `viewMask` parameter of VkPipelineRenderingCreateInfo (formats are ignored)

This state **must** be specified to create a complete graphics pipeline.

Fragment Shader State

Fragment shader state is defined by:

- A VkPipelineShaderStageCreateInfo entry for the fragment shader
- Within the VkPipelineLayout, the full pipeline layout **must** be specified.
- VkPipelineMultisampleStateCreateInfo if sample shading is enabled or `renderpass` is not VK_NULL_HANDLE
- VkPipelineDepthStencilStateCreateInfo
- VkRenderPass and `subpass` parameter
- The `viewMask` parameter of VkPipelineRenderingCreateInfo (formats are ignored)

If `rasterizerDiscardEnable` is `VK_FALSE` or `VK_DYNAMIC_STATE_RASTERIZER_DISCARD_ENABLE` is used, this state **must** be specified to create a complete graphics pipeline.

Fragment Output State

Fragment output state is defined by:

- VkPipelineColorBlendStateCreateInfo
- VkRenderPass and `subpass` parameter
- VkPipelineMultisampleStateCreateInfo
- VkPipelineRenderingCreateInfo

If `rasterizerDiscardEnable` is `VK_FALSE` or `VK_DYNAMIC_STATE_RASTERIZER_DISCARD_ENABLE` is used, this state **must** be specified to create a complete graphics pipeline.

Dynamic State

Dynamic state values set via `pDynamicState` **must** be ignored if the state they correspond to is not otherwise statically set by one of the state subsets used to create the pipeline. For example, if a pipeline only included pre-rasterization shader state, then any dynamic state value corresponding to depth or stencil testing has no effect.

Complete Graphics Pipelines

A complete graphics pipeline always includes pre-rasterization shader state, with other subsets included depending on that state as specified in the above sections.

Valid Usage

- VUID-VkGraphicsPipelineCreateInfo-None-09497
  `flags` **must** be a valid combination of VkPipelineCreateFlagBits values
- VUID-VkGraphicsPipelineCreateInfo-flags-07984
  If `flags` contains the `VK_PIPELINE_CREATE_DERIVATIVE_BIT` flag, and `basePipelineIndex` is -1, `basePipelineHandle` **must** be a valid graphics `VkPipeline` handle
- VUID-VkGraphicsPipelineCreateInfo-flags-07985
  If `flags` contains the `VK_PIPELINE_CREATE_DERIVATIVE_BIT` flag, and `basePipelineHandle` is VK_NULL_HANDLE, `basePipelineIndex` **must** be a valid index into the calling command's `pCreateInfos` parameter
- VUID-VkGraphicsPipelineCreateInfo-flags-07986
  If `flags` contains the `VK_PIPELINE_CREATE_DERIVATIVE_BIT` flag, `basePipelineIndex` **must** be -1 or `basePipelineHandle` **must** be VK_NULL_HANDLE
- VUID-VkGraphicsPipelineCreateInfo-layout-07987
  If a push constant block is declared in a shader, a push constant range in `layout` **must** match the shader stage
- VUID-VkGraphicsPipelineCreateInfo-layout-10069
  If a push constant block is declared in a shader, the block must be contained inside the push constant range in `layout` that matches the stage
- VUID-VkGraphicsPipelineCreateInfo-layout-07988
  If a resource variables is declared in a shader, a descriptor slot in `layout` **must** match the shader stage
- VUID-VkGraphicsPipelineCreateInfo-layout-07990
  If a resource variables is declared in a shader, a descriptor slot in `layout` **must** match the descriptor type
- VUID-VkGraphicsPipelineCreateInfo-layout-07991
  If a resource variables is declared in a shader as an array, a descriptor slot in `layout` **must** match the descriptor count
- VUID-VkGraphicsPipelineCreateInfo-stage-02096
  If the pipeline requires pre-rasterization shader state the `stage` member of one element of `pStages` **must** be `VK_SHADER_STAGE_VERTEX_BIT`
- VUID-VkGraphicsPipelineCreateInfo-pStages-00729
  If the pipeline requires pre-rasterization shader state and `pStages` includes a tessellation control shader stage, it **must** include a tessellation evaluation shader stage
- VUID-VkGraphicsPipelineCreateInfo-pStages-00730
  If the pipeline requires pre-rasterization shader state and `pStages` includes a tessellation evaluation shader stage, it **must** include a tessellation control shader stage
- VUID-VkGraphicsPipelineCreateInfo-pStages-09022
  If the pipeline requires pre-rasterization shader state and `pStages` includes a tessellation control shader stage, `pTessellationState` **must** be a valid pointer to a valid VkPipelineTessellationStateCreateInfo structure

- VUID-VkGraphicsPipelineCreateInfo-pStages-00732
  If the pipeline requires pre-rasterization shader state and pStages includes tessellation shader stages, the shader code of at least one stage **must** contain an OpExecutionMode instruction specifying the type of subdivision in the pipeline
- VUID-VkGraphicsPipelineCreateInfo-pStages-00733
  If the pipeline requires pre-rasterization shader state and pStages includes tessellation shader stages, and the shader code of both stages contain an OpExecutionMode instruction specifying the type of subdivision in the pipeline, they **must** both specify the same subdivision mode
- VUID-VkGraphicsPipelineCreateInfo-pStages-00734
  If the pipeline requires pre-rasterization shader state and pStages includes tessellation shader stages, the shader code of at least one stage **must** contain an OpExecutionMode instruction specifying the output patch size in the pipeline
- VUID-VkGraphicsPipelineCreateInfo-pStages-00735
  If the pipeline requires pre-rasterization shader state and pStages includes tessellation shader stages, and the shader code of both contain an OpExecutionMode instruction specifying the out patch size in the pipeline, they **must** both specify the same patch size
- VUID-VkGraphicsPipelineCreateInfo-pStages-08888
  If the pipeline is being created with pre-rasterization shader state and vertex input state and pStages includes tessellation shader stages, the topology member of pInputAssembly **must** be VK_PRIMITIVE_TOPOLOGY_PATCH_LIST
- VUID-VkGraphicsPipelineCreateInfo-topology-08889
  If the pipeline is being created with pre-rasterization shader state and vertex input state and the topology member of pInputAssembly is VK_PRIMITIVE_TOPOLOGY_PATCH_LIST, then pStages **must** include tessellation shader stages
- VUID-VkGraphicsPipelineCreateInfo-TessellationEvaluation-07723
  If the pipeline is being created with a TessellationEvaluation Execution Model, no Geometry Execution Model, uses the PointMode Execution Mode, and shaderTessellationAndGeometryPointSize is enabled, a PointSize decorated variable **must** be written to
- VUID-VkGraphicsPipelineCreateInfo-topology-08773
  If the pipeline is being created with a Vertex Execution Model and no TessellationEvaluation or Geometry Execution Model, and the topology member of pInputAssembly is VK_PRIMITIVE_TOPOLOGY_POINT_LIST, a PointSize decorated variable **must** be written to
- VUID-VkGraphicsPipelineCreateInfo-TessellationEvaluation-07724
  If the pipeline is being created with a TessellationEvaluation Execution Model, no Geometry Execution Model, uses the PointMode Execution Mode, and shaderTessellationAndGeometryPointSize is not enabled, a PointSize decorated variable **must** not be written to
- VUID-VkGraphicsPipelineCreateInfo-shaderTessellationAndGeometryPointSize-08776
  If the pipeline is being created with a Geometry Execution Model, uses the OutputPoints Execution Mode, and shaderTessellationAndGeometryPointSize is enabled, a PointSize decorated variable **must** be written to for every vertex emitted

- VUID-VkGraphicsPipelineCreateInfo-Geometry-07726
  If the pipeline is being created with a `Geometry Execution Model`, uses the `OutputPoints Execution Mode`, and `shaderTessellationAndGeometryPointSize` is not enabled, a `PointSize` decorated variable **must** not be written to
- VUID-VkGraphicsPipelineCreateInfo-pStages-00738
  If the pipeline requires pre-rasterization shader state and `pStages` includes a geometry shader stage, and does not include any tessellation shader stages, its shader code **must** contain an `OpExecutionMode` instruction specifying an input primitive type that is compatible with the primitive topology specified in `pInputAssembly`
- VUID-VkGraphicsPipelineCreateInfo-pStages-00739
  If the pipeline requires pre-rasterization shader state and `pStages` includes a geometry shader stage, and also includes tessellation shader stages, its shader code **must** contain an `OpExecutionMode` instruction specifying an input primitive type that is compatible with the primitive topology that is output by the tessellation stages
- VUID-VkGraphicsPipelineCreateInfo-pStages-00740
  If the pipeline requires pre-rasterization shader state and fragment shader state, it includes both a fragment shader and a geometry shader, and the fragment shader code reads from an input variable that is decorated with `PrimitiveId`, then the geometry shader code **must** write to a matching output variable, decorated with `PrimitiveId`, in all execution paths
- VUID-VkGraphicsPipelineCreateInfo-renderPass-06038
  If `renderPass` is not VK_NULL_HANDLE and the pipeline is being created with fragment shader state the fragment shader **must** not read from any input attachment that is defined as `VK_ATTACHMENT_UNUSED` in `subpass`
- VUID-VkGraphicsPipelineCreateInfo-pStages-00742
  If the pipeline requires pre-rasterization shader state and multiple pre-rasterization shader stages are included in `pStages`, the shader code for the entry points identified by those `pStages` and the rest of the state identified by this structure **must** adhere to the pipeline linking rules described in the Shader Interfaces chapter
- VUID-VkGraphicsPipelineCreateInfo-None-04889
  If the pipeline requires pre-rasterization shader state and fragment shader state, the fragment shader and last pre-rasterization shader stage and any relevant state **must** adhere to the pipeline linking rules described in the Shader Interfaces chapter
- VUID-VkGraphicsPipelineCreateInfo-renderPass-06041
  If `renderPass` is not VK_NULL_HANDLE, and the pipeline is being created with fragment output interface state, then for each color attachment in the subpass, if the potential format features of the format of the corresponding attachment description do not contain `VK_FORMAT_FEATURE_COLOR_ATTACHMENT_BLEND_BIT`, then the `blendEnable` member of the corresponding element of the `pAttachments` member of `pColorBlendState` **must** be `VK_FALSE`
- VUID-VkGraphicsPipelineCreateInfo-renderPass-07609
  If `renderPass` is not VK_NULL_HANDLE, the pipeline is being created with fragment output interface state, the `pColorBlendState` pointer is not `NULL`, the `attachmentCount` member of `pColorBlendState` is not ignored, and the subpass uses color attachments, the `attachmentCount` member of `pColorBlendState` **must** be equal to the `colorAttachmentCount` used to create `subpass`

- VUID-VkGraphicsPipelineCreateInfo-pDynamicStates-04130
  If the pipeline requires pre-rasterization shader state, and `pViewportState->pViewports` is not dynamic, then `pViewportState->pViewports` **must** be a valid pointer to an array of `pViewportState->viewportCount` valid `VkViewport` structures
- VUID-VkGraphicsPipelineCreateInfo-pDynamicStates-04131
  If the pipeline requires pre-rasterization shader state, and `pViewportState->pScissors` is not dynamic, then `pViewportState->pScissors` **must** be a valid pointer to an array of `pViewportState->scissorCount VkRect2D` structures
- VUID-VkGraphicsPipelineCreateInfo-pDynamicStates-00749
  If the pipeline requires pre-rasterization shader state, and the `wideLines` feature is not enabled, and no element of the `pDynamicStates` member of `pDynamicState` is `VK_DYNAMIC_STATE_LINE_WIDTH`, the `lineWidth` member of `pRasterizationState` **must** be `1.0`
- VUID-VkGraphicsPipelineCreateInfo-rasterizerDiscardEnable-09024
  If the pipeline requires pre-rasterization shader state, and the `VK_DYNAMIC_STATE_RASTERIZER_DISCARD_ENABLE` dynamic state is enabled or the `rasterizerDiscardEnable` member of `pRasterizationState` is `VK_FALSE`, `pViewportState` **must** be a valid pointer to a valid VkPipelineViewportStateCreateInfo structure
- VUID-VkGraphicsPipelineCreateInfo-pMultisampleState-09026
  If the pipeline requires fragment output interface state, `pMultisampleState` **must** be a valid pointer to a valid VkPipelineMultisampleStateCreateInfo structure
- VUID-VkGraphicsPipelineCreateInfo-pMultisampleState-09027
  If `pMultisampleState` is not `NULL` it **must** be a valid pointer to a valid VkPipelineMultisampleStateCreateInfo structure
- VUID-VkGraphicsPipelineCreateInfo-alphaToCoverageEnable-08891
  If the pipeline is being created with fragment shader state, the VkPipelineMultisampleStateCreateInfo::`alphaToCoverageEnable` is not ignored and is `VK_TRUE`, then the Fragment Output Interface **must** contain a variable for the alpha `Component` word in `Location` 0 at `Index` 0
- VUID-VkGraphicsPipelineCreateInfo-renderPass-09028
  If `renderPass` is not VK_NULL_HANDLE, the pipeline is being created with fragment shader state, and `subpass` uses a depth/stencil attachment, `pDepthStencilState` **must** be a valid pointer to a valid VkPipelineDepthStencilStateCreateInfo structure
- VUID-VkGraphicsPipelineCreateInfo-pDepthStencilState-09029
  If `pDepthStencilState` is not `NULL` it **must** be a valid pointer to a valid VkPipelineDepthStencilStateCreateInfo structure
- VUID-VkGraphicsPipelineCreateInfo-renderPass-09030
  If `renderPass` is not VK_NULL_HANDLE, the pipeline is being created with fragment output interface state, and `subpass` uses color attachments, `pColorBlendState` **must** be a valid pointer to a valid VkPipelineColorBlendStateCreateInfo structure
- VUID-VkGraphicsPipelineCreateInfo-pDynamicStates-00754
  If the pipeline requires pre-rasterization shader state, the `depthBiasClamp` feature is not enabled, no element of the `pDynamicStates` member of `pDynamicState` is `VK_DYNAMIC_STATE_DEPTH_BIAS`, and the `depthBiasEnable` member of `pRasterizationState` is `VK_TRUE`, the `depthBiasClamp` member of `pRasterizationState` **must** be `0.0`

- VUID-VkGraphicsPipelineCreateInfo-pDynamicStates-02510
  If the pipeline requires fragment shader state, and no element of the pDynamicStates member of pDynamicState is VK_DYNAMIC_STATE_DEPTH_BOUNDS, and the depthBoundsTestEnable member of pDepthStencilState is VK_TRUE, the minDepthBounds and maxDepthBounds members of pDepthStencilState **must** be between 0.0 and 1.0, inclusive
- VUID-VkGraphicsPipelineCreateInfo-subpass-00758
  If the pipeline requires fragment output interface state, rasterizationSamples is not dynamic, and subpass does not use any color and/or depth/stencil attachments, then the rasterizationSamples member of pMultisampleState **must** follow the rules for a zero-attachment subpass
- VUID-VkGraphicsPipelineCreateInfo-renderPass-06046
  If renderPass is not VK_NULL_HANDLE, subpass **must** be a valid subpass within renderPass
- VUID-VkGraphicsPipelineCreateInfo-renderPass-06047
  If renderPass is not VK_NULL_HANDLE, the pipeline is being created with pre-rasterization shader state, subpass viewMask is not 0, and multiviewTessellationShader is not enabled, then pStages **must** not include tessellation shaders
- VUID-VkGraphicsPipelineCreateInfo-renderPass-06048
  If renderPass is not VK_NULL_HANDLE, the pipeline is being created with pre-rasterization shader state, subpass viewMask is not 0, and multiviewGeometryShader is not enabled, then pStages **must** not include a geometry shader
- VUID-VkGraphicsPipelineCreateInfo-renderPass-06050
  If renderPass is not VK_NULL_HANDLE and the pipeline is being created with pre-rasterization shader state, and subpass viewMask is not 0, then all of the shaders in the pipeline **must** not include variables decorated with the Layer built-in decoration in their interfaces
- VUID-VkGraphicsPipelineCreateInfo-flags-00764
  flags **must** not contain the VK_PIPELINE_CREATE_DISPATCH_BASE flag
- VUID-VkGraphicsPipelineCreateInfo-pStages-01565
  If the pipeline requires fragment shader state and an input attachment was referenced by an aspectMask at renderPass creation time, the fragment shader **must** only read from the aspects that were specified for that input attachment
- VUID-VkGraphicsPipelineCreateInfo-layout-01688
  The number of resources in layout accessible to each shader stage that is used by the pipeline **must** be less than or equal to VkPhysicalDeviceLimits::maxPerStageResources
- VUID-VkGraphicsPipelineCreateInfo-pStages-02097
  If the pipeline requires vertex input state, and pVertexInputState is not dynamic, then pVertexInputState **must** be a valid pointer to a valid VkPipelineVertexInputStateCreateInfo structure
- VUID-VkGraphicsPipelineCreateInfo-Input-07904
  If the pipeline is being created with vertex input state and pVertexInputState is not dynamic, then all variables with the Input storage class decorated with Location in the Vertex Execution Model OpEntryPoint **must** contain a location in VkVertexInputAttributeDescription::location

- VUID-VkGraphicsPipelineCreateInfo-Input-08733
  If the pipeline requires vertex input state and pVertexInputState is not dynamic, then the numeric type associated with all Input variables of the corresponding Location in the Vertex Execution Model OpEntryPoint **must** be the same as VkVertexInputAttributeDescription::format
- VUID-VkGraphicsPipelineCreateInfo-pVertexInputState-08929
  If the pipeline is being created with vertex input state and pVertexInputState is not dynamic, and VkVertexInputAttributeDescription::format has a 64-bit component, then the scalar width associated with all Input variables of the corresponding Location in the Vertex Execution Model OpEntryPoint **must** be 64-bit
- VUID-VkGraphicsPipelineCreateInfo-pVertexInputState-08930
  If the pipeline is being created with vertex input state and pVertexInputState is not dynamic, and the scalar width associated with a Location decorated Input variable in the Vertex Execution Model OpEntryPoint is 64-bit, then the corresponding VkVertexInputAttributeDescription::format **must** have a 64-bit component
- VUID-VkGraphicsPipelineCreateInfo-pVertexInputState-09198
  If the pipeline is being created with vertex input state and pVertexInputState is not dynamic, and VkVertexInputAttributeDescription::format has a 64-bit component, then all Input variables at the corresponding Location in the Vertex Execution Model OpEntryPoint **must** not use components that are not present in the format
- VUID-VkGraphicsPipelineCreateInfo-dynamicPrimitiveTopologyUnrestricted-09031
  If the pipeline requires vertex input state, pInputAssemblyState **must** be a valid pointer to a valid VkPipelineInputAssemblyStateCreateInfo structure
- VUID-VkGraphicsPipelineCreateInfo-pInputAssemblyState-09032
  If pInputAssemblyState is not NULL it **must** be a valid pointer to a valid VkPipelineInputAssemblyStateCreateInfo structure
- VUID-VkGraphicsPipelineCreateInfo-pDynamicStates-03378
  If the value of VkApplicationInfo::apiVersion used to create the VkInstance is less than Version 1.3 there **must** be no element of the pDynamicStates member of pDynamicState set to VK_DYNAMIC_STATE_CULL_MODE, VK_DYNAMIC_STATE_FRONT_FACE, VK_DYNAMIC_STATE_PRIMITIVE_TOPOLOGY, VK_DYNAMIC_STATE_VIEWPORT_WITH_COUNT, VK_DYNAMIC_STATE_SCISSOR_WITH_COUNT, VK_DYNAMIC_STATE_VERTEX_INPUT_BINDING_STRIDE, VK_DYNAMIC_STATE_DEPTH_TEST_ENABLE, VK_DYNAMIC_STATE_DEPTH_WRITE_ENABLE, VK_DYNAMIC_STATE_DEPTH_COMPARE_OP, VK_DYNAMIC_STATE_DEPTH_BOUNDS_TEST_ENABLE, VK_DYNAMIC_STATE_STENCIL_TEST_ENABLE, or VK_DYNAMIC_STATE_STENCIL_OP
- VUID-VkGraphicsPipelineCreateInfo-pDynamicStates-03379
  If the pipeline requires pre-rasterization shader state, and VK_DYNAMIC_STATE_VIEWPORT_WITH_COUNT is included in the pDynamicStates array then viewportCount **must** be zero
- VUID-VkGraphicsPipelineCreateInfo-pDynamicStates-03380
  If the pipeline requires pre-rasterization shader state, and VK_DYNAMIC_STATE_SCISSOR_WITH_COUNT is included in the pDynamicStates array then scissorCount **must** be zero
- VUID-VkGraphicsPipelineCreateInfo-pDynamicStates-04132

If the pipeline requires pre-rasterization shader state, and VK_DYNAMIC_STATE_VIEWPORT_WITH_COUNT is included in the pDynamicStates array then VK_DYNAMIC_STATE_VIEWPORT **must** not be present

- VUID-VkGraphicsPipelineCreateInfo-pDynamicStates-04133
  If the pipeline requires pre-rasterization shader state, and VK_DYNAMIC_STATE_SCISSOR_WITH_COUNT is included in the pDynamicStates array then VK_DYNAMIC_STATE_SCISSOR **must** not be present
- VUID-VkGraphicsPipelineCreateInfo-pDynamicStates-04868
  If the value of VkApplicationInfo::apiVersion used to create the VkInstance is less than Version 1.3 there **must** be no element of the pDynamicStates member of pDynamicState set to VK_DYNAMIC_STATE_DEPTH_BIAS_ENABLE, VK_DYNAMIC_STATE_PRIMITIVE_RESTART_ENABLE, or VK_DYNAMIC_STATE_RASTERIZER_DISCARD_ENABLE
- VUID-VkGraphicsPipelineCreateInfo-pDynamicStates-04869
  If the extendedDynamicState2LogicOp feature is not enabled, there **must** be no element of the pDynamicStates member of pDynamicState set to VK_DYNAMIC_STATE_LOGIC_OP_EXT
- VUID-VkGraphicsPipelineCreateInfo-pDynamicStates-04870
  If the extendedDynamicState2PatchControlPoints feature is not enabled, there **must** be no element of the pDynamicStates member of pDynamicState set to VK_DYNAMIC_STATE_PATCH_CONTROL_POINTS_EXT
- VUID-VkGraphicsPipelineCreateInfo-pipelineCreationCacheControl-02878
  If the pipelineCreationCacheControl feature is not enabled, flags **must** not include VK_PIPELINE_CREATE_FAIL_ON_PIPELINE_COMPILE_REQUIRED_BIT or VK_PIPELINE_CREATE_EARLY_RETURN_ON_FAILURE_BIT
- VUID-VkGraphicsPipelineCreateInfo-dynamicRendering-06576
  If the dynamicRendering feature is not enabled and the pipeline requires pre-rasterization shader state, fragment shader state, or fragment output interface state, renderPass **must** not be VK_NULL_HANDLE
- VUID-VkGraphicsPipelineCreateInfo-multiview-06577
  If the multiview feature is not enabled, the pipeline requires pre-rasterization shader state, fragment shader state, or fragment output interface state, and renderPass is VK_NULL_HANDLE, VkPipelineRenderingCreateInfo::viewMask **must** be 0
- VUID-VkGraphicsPipelineCreateInfo-renderPass-06578
  If the pipeline requires pre-rasterization shader state, fragment shader state, or fragment output interface state, and renderPass is VK_NULL_HANDLE, the index of the most significant bit in VkPipelineRenderingCreateInfo::viewMask **must** be less than maxMultiviewViewCount
- VUID-VkGraphicsPipelineCreateInfo-renderPass-06579
  If the pipeline requires fragment output interface state, and renderPass is VK_NULL_HANDLE, and VkPipelineRenderingCreateInfo::colorAttachmentCount is not 0, VkPipelineRenderingCreateInfo::pColorAttachmentFormats **must** be a valid pointer to an array of colorAttachmentCount valid VkFormat values
- VUID-VkGraphicsPipelineCreateInfo-renderPass-06580
  If the pipeline requires fragment output interface state, and renderPass is VK_NULL_HANDLE, each element of VkPipelineRenderingCreateInfo

::pColorAttachmentFormats **must** be a valid VkFormat value

- VUID-VkGraphicsPipelineCreateInfo-renderPass-06582
  If the pipeline requires fragment output interface state, renderPass is VK_NULL_HANDLE, and any element of VkPipelineRenderingCreateInfo::pColorAttachmentFormats is not VK_FORMAT_UNDEFINED, that format **must** be a format with potential format features that include VK_FORMAT_FEATURE_COLOR_ATTACHMENT_BIT
- VUID-VkGraphicsPipelineCreateInfo-renderPass-06583
  If the pipeline requires fragment output interface state, and renderPass is VK_NULL_HANDLE, VkPipelineRenderingCreateInfo::depthAttachmentFormat **must** be a valid VkFormat value
- VUID-VkGraphicsPipelineCreateInfo-renderPass-06584
  If the pipeline requires fragment output interface state, and renderPass is VK_NULL_HANDLE, VkPipelineRenderingCreateInfo::stencilAttachmentFormat **must** be a valid VkFormat value
- VUID-VkGraphicsPipelineCreateInfo-renderPass-06585
  If the pipeline requires fragment output interface state, renderPass is VK_NULL_HANDLE, and VkPipelineRenderingCreateInfo::depthAttachmentFormat is not VK_FORMAT_UNDEFINED, it **must** be a format with potential format features that include VK_FORMAT_FEATURE_DEPTH_STENCIL_ATTACHMENT_BIT
- VUID-VkGraphicsPipelineCreateInfo-renderPass-06586
  If the pipeline requires fragment output interface state, renderPass is VK_NULL_HANDLE, and VkPipelineRenderingCreateInfo::stencilAttachmentFormat is not VK_FORMAT_UNDEFINED, it **must** be a format with potential format features that include VK_FORMAT_FEATURE_DEPTH_STENCIL_ATTACHMENT_BIT
- VUID-VkGraphicsPipelineCreateInfo-renderPass-06587
  If the pipeline requires fragment output interface state, renderPass is VK_NULL_HANDLE, and VkPipelineRenderingCreateInfo::depthAttachmentFormat is not VK_FORMAT_UNDEFINED, it **must** be a format that includes a depth component
- VUID-VkGraphicsPipelineCreateInfo-renderPass-06588
  If the pipeline requires fragment output interface state, renderPass is VK_NULL_HANDLE, and VkPipelineRenderingCreateInfo::stencilAttachmentFormat is not VK_FORMAT_UNDEFINED, it **must** be a format that includes a stencil component
- VUID-VkGraphicsPipelineCreateInfo-renderPass-06589
  If the pipeline requires fragment output interface state, renderPass is VK_NULL_HANDLE, VkPipelineRenderingCreateInfo::depthAttachmentFormat is not VK_FORMAT_UNDEFINED, and VkPipelineRenderingCreateInfo::stencilAttachmentFormat is not VK_FORMAT_UNDEFINED, depthAttachmentFormat **must** equal stencilAttachmentFormat
- VUID-VkGraphicsPipelineCreateInfo-renderPass-09033
  If renderPass is VK_NULL_HANDLE, the pipeline is being created with fragment shader state and fragment output interface state, and either of VkPipelineRenderingCreateInfo::depthAttachmentFormat or VkPipelineRenderingCreateInfo::stencilAttachmentFormat are not VK_FORMAT_UNDEFINED, pDepthStencilState **must** be a valid pointer to a valid VkPipelineDepthStencilStateCreateInfo structure
- VUID-VkGraphicsPipelineCreateInfo-pDepthStencilState-09034

If pDepthStencilState is not NULL it **must** be a valid pointer to a valid VkPipelineDepthStencilStateCreateInfo structure

- VUID-VkGraphicsPipelineCreateInfo-renderPass-09037
  If renderPass is VK_NULL_HANDLE, the pipeline is being created with fragment output interface state, and any element of VkPipelineRenderingCreateInfo ::pColorAttachmentFormats is not VK_FORMAT_UNDEFINED, pColorBlendState **must** be a valid pointer to a valid VkPipelineColorBlendStateCreateInfo structure
- VUID-VkGraphicsPipelineCreateInfo-pColorBlendState-09038
  If pColorBlendState is not NULL it **must** be a valid pointer to a valid VkPipelineColorBlendStateCreateInfo structure
- VUID-VkGraphicsPipelineCreateInfo-renderPass-06055
  If renderPass is VK_NULL_HANDLE, pColorBlendState is not dynamic, and the pipeline is being created with fragment output interface state, pColorBlendState->attachmentCount **must** be equal to VkPipelineRenderingCreateInfo::colorAttachmentCount
- VUID-VkGraphicsPipelineCreateInfo-renderPass-06057
  If renderPass is VK_NULL_HANDLE, the pipeline is being created with pre-rasterization shader state, VkPipelineRenderingCreateInfo::viewMask is not 0, and the multiviewTessellationShader feature is not enabled, then pStages **must** not include tessellation shaders
- VUID-VkGraphicsPipelineCreateInfo-renderPass-06058
  If renderPass is VK_NULL_HANDLE, the pipeline is being created with pre-rasterization shader state, VkPipelineRenderingCreateInfo::viewMask is not 0, and the multiviewGeometryShader feature is not enabled, then pStages **must** not include a geometry shader
- VUID-VkGraphicsPipelineCreateInfo-renderPass-06059
  If renderPass is VK_NULL_HANDLE, the pipeline is being created with pre-rasterization shader state, and VkPipelineRenderingCreateInfo::viewMask is not 0, all of the shaders in the pipeline **must** not include variables decorated with the Layer built-in decoration in their interfaces
- VUID-VkGraphicsPipelineCreateInfo-renderPass-06061
  If the pipeline requires fragment shader state, and renderPass is VK_NULL_HANDLE, fragment shaders in pStages **must** not include the InputAttachment capability
- VUID-VkGraphicsPipelineCreateInfo-renderPass-06062
  If the pipeline requires fragment output interface state and renderPass is VK_NULL_HANDLE, for each color attachment format defined by the pColorAttachmentFormats member of VkPipelineRenderingCreateInfo, if its potential format features do not contain VK_FORMAT_FEATURE_COLOR_ATTACHMENT_BLEND_BIT, then the blendEnable member of the corresponding element of the pAttachments member of pColorBlendState **must** be VK_FALSE
- VUID-VkGraphicsPipelineCreateInfo-pipelineStageCreationFeedbackCount-06594
  If VkPipelineCreationFeedbackCreateInfo::pipelineStageCreationFeedbackCount is not 0, it **must** be equal to stageCount
- VUID-VkGraphicsPipelineCreateInfo-pStages-06600
  If the pipeline requires pre-rasterization shader state or fragment shader state, pStages

must be a valid pointer to an array of `stageCount` valid VkPipelineShaderStageCreateInfo structures

- VUID-VkGraphicsPipelineCreateInfo-stageCount-09587
  If the pipeline does not require pre-rasterization shader state or fragment shader state, `stageCount` **must** be zero
- VUID-VkGraphicsPipelineCreateInfo-pRasterizationState-06601
  If the pipeline requires pre-rasterization shader state, `pRasterizationState` **must** be a valid pointer to a valid VkPipelineRasterizationStateCreateInfo structure
- VUID-VkGraphicsPipelineCreateInfo-layout-06602
  If the pipeline requires fragment shader state or pre-rasterization shader state, `layout` **must** be a valid VkPipelineLayout handle
- VUID-VkGraphicsPipelineCreateInfo-renderPass-06603
  If the pipeline requires pre-rasterization shader state, fragment shader state, or fragment output state, and `renderPass` is not VK_NULL_HANDLE, `renderPass` **must** be a valid VkRenderPass handle
- VUID-VkGraphicsPipelineCreateInfo-stageCount-09530
  If the pipeline requires pre-rasterization shader state, `stageCount` **must** be greater than `0`
- VUID-VkGraphicsPipelineCreateInfo-pStages-06894
  If the pipeline requires pre-rasterization shader state but not fragment shader state, elements of `pStages` **must** not have `stage` set to `VK_SHADER_STAGE_FRAGMENT_BIT`
- VUID-VkGraphicsPipelineCreateInfo-pStages-06895
  If the pipeline requires fragment shader state but not pre-rasterization shader state, elements of `pStages` **must** not have `stage` set to a shader stage which participates in pre-rasterization
- VUID-VkGraphicsPipelineCreateInfo-pStages-06896
  If the pipeline requires pre-rasterization shader state, all elements of `pStages` **must** have a `stage` set to a shader stage which participates in fragment shader state or pre-rasterization shader state
- VUID-VkGraphicsPipelineCreateInfo-stage-06897
  If the pipeline requires fragment shader state and/or pre-rasterization shader state, any value of `stage` **must** not be set in more than one element of `pStages`
- VUID-VkGraphicsPipelineCreateInfo-renderPass-08744
  If `renderPass` is VK_NULL_HANDLE, the pipeline requires fragment output state or fragment shader state, the pipeline enables sample shading, `rasterizationSamples` is not dynamic, and the `pNext` chain includes a VkPipelineRenderingCreateInfo structure, `rasterizationSamples` **must** be a valid VkSampleCountFlagBits value that is set in `imageCreateSampleCounts` (as defined in Image Creation Limits) for every element of `depthAttachmentFormat`, `stencilAttachmentFormat` and the `pColorAttachmentFormats` array which is not `VK_FORMAT_UNDEFINED`
- VUID-VkGraphicsPipelineCreateInfo-None-08893
  The pipeline **must** be created with pre-rasterization shader state
- VUID-VkGraphicsPipelineCreateInfo-pStages-08894
  If `pStages` includes a vertex shader stage, the pipeline **must** be created with vertex input

state

- VUID-VkGraphicsPipelineCreateInfo-pDynamicState-08896
  If `pDynamicState->pDynamicStates` includes `VK_DYNAMIC_STATE_RASTERIZER_DISCARD_ENABLE`, or if it does not and `pRasterizationState->rasterizerDiscardEnable` is `VK_FALSE`, the pipeline **must** be created with fragment shader state and fragment output interface state
- VUID-VkGraphicsPipelineCreateInfo-None-09043
  If the format of any color attachment is `VK_FORMAT_E5B9G9R9_UFLOAT_PACK32`, the `colorWriteMask` member of the corresponding element of `pColorBlendState->pAttachments` **must** either include all of `VK_COLOR_COMPONENT_R_BIT`, `VK_COLOR_COMPONENT_G_BIT`, and `VK_COLOR_COMPONENT_B_BIT`, or none of them

Valid Usage (Implicit)

- VUID-VkGraphicsPipelineCreateInfo-sType-sType
  `sType` **must** be `VK_STRUCTURE_TYPE_GRAPHICS_PIPELINE_CREATE_INFO`
- VUID-VkGraphicsPipelineCreateInfo-pNext-pNext
  Each `pNext` member of any structure (including this one) in the `pNext` chain **must** be either `NULL` or a pointer to a valid instance of VkPipelineCreationFeedbackCreateInfo or VkPipelineRenderingCreateInfo
- VUID-VkGraphicsPipelineCreateInfo-sType-unique
  The `sType` value of each struct in the `pNext` chain **must** be unique
- VUID-VkGraphicsPipelineCreateInfo-pDynamicState-parameter
  If `pDynamicState` is not `NULL`, `pDynamicState` **must** be a valid pointer to a valid VkPipelineDynamicStateCreateInfo structure
- VUID-VkGraphicsPipelineCreateInfo-commonparent
  Each of `basePipelineHandle`, `layout`, and `renderPass` that are valid handles of non-ignored parameters **must** have been created, allocated, or retrieved from the same VkDevice

The `VkPipelineRenderingCreateInfo` structure is defined as:

```
// Provided by VK_VERSION_1_3
typedef struct VkPipelineRenderingCreateInfo {
    VkStructureType    sType;
    const void*        pNext;
    uint32_t           viewMask;
    uint32_t           colorAttachmentCount;
    const VkFormat*    pColorAttachmentFormats;
    VkFormat           depthAttachmentFormat;
    VkFormat           stencilAttachmentFormat;
} VkPipelineRenderingCreateInfo;
```

- `sType` is a VkStructureType value identifying this structure.
- `pNext` is `NULL` or a pointer to a structure extending this structure.

- `viewMask` is the viewMask used for rendering.
- `colorAttachmentCount` is the number of entries in `pColorAttachmentFormats`
- `pColorAttachmentFormats` is a pointer to an array of VkFormat values defining the format of color attachments used in this pipeline.
- `depthAttachmentFormat` is a VkFormat value defining the format of the depth attachment used in this pipeline.
- `stencilAttachmentFormat` is a VkFormat value defining the format of the stencil attachment used in this pipeline.

When a pipeline is created without a VkRenderPass, if the `pNext` chain of VkGraphicsPipelineCreateInfo includes this structure, it specifies the view mask and format of attachments used for rendering. If this structure is not specified, and the pipeline does not include a VkRenderPass, `viewMask` and `colorAttachmentCount` are `0`, and `depthAttachmentFormat` and `stencilAttachmentFormat` are `VK_FORMAT_UNDEFINED`. If a graphics pipeline is created with a valid VkRenderPass, parameters of this structure are ignored.

If `depthAttachmentFormat`, `stencilAttachmentFormat`, or any element of `pColorAttachmentFormats` is `VK_FORMAT_UNDEFINED`, it indicates that the corresponding attachment is unused within the render pass. Valid formats indicate that an attachment **can** be used - but it is still valid to set the attachment to `NULL` when beginning rendering.

Valid Usage

- VUID-VkPipelineRenderingCreateInfo-colorAttachmentCount-09533
  `colorAttachmentCount` **must** be less than or equal to `maxColorAttachments`

Valid Usage (Implicit)

- VUID-VkPipelineRenderingCreateInfo-sType-sType
  `sType` **must** be `VK_STRUCTURE_TYPE_PIPELINE_RENDERING_CREATE_INFO`

Bits which **can** be set in

- VkGraphicsPipelineCreateInfo::`flags`
- VkComputePipelineCreateInfo::`flags`

specify how a pipeline is created, and are:

```
// Provided by VK_VERSION_1_0
typedef enum VkPipelineCreateFlagBits {
    VK_PIPELINE_CREATE_DISABLE_OPTIMIZATION_BIT = 0x00000001,
    VK_PIPELINE_CREATE_ALLOW_DERIVATIVES_BIT = 0x00000002,
    VK_PIPELINE_CREATE_DERIVATIVE_BIT = 0x00000004,
  // Provided by VK_VERSION_1_1
    VK_PIPELINE_CREATE_VIEW_INDEX_FROM_DEVICE_INDEX_BIT = 0x00000008,
  // Provided by VK_VERSION_1_1
    VK_PIPELINE_CREATE_DISPATCH_BASE_BIT = 0x00000010,
  // Provided by VK_VERSION_1_3
    VK_PIPELINE_CREATE_FAIL_ON_PIPELINE_COMPILE_REQUIRED_BIT = 0x00000100,
  // Provided by VK_VERSION_1_3
    VK_PIPELINE_CREATE_EARLY_RETURN_ON_FAILURE_BIT = 0x00000200,
  // Provided by VK_VERSION_1_1
    VK_PIPELINE_CREATE_DISPATCH_BASE = VK_PIPELINE_CREATE_DISPATCH_BASE_BIT,
} VkPipelineCreateFlagBits;
```

- VK_PIPELINE_CREATE_DISABLE_OPTIMIZATION_BIT specifies that the created pipeline will not be optimized. Using this flag **may** reduce the time taken to create the pipeline.
- VK_PIPELINE_CREATE_ALLOW_DERIVATIVES_BIT specifies that the pipeline to be created is allowed to be the parent of a pipeline that will be created in a subsequent pipeline creation call.
- VK_PIPELINE_CREATE_DERIVATIVE_BIT specifies that the pipeline to be created will be a child of a previously created parent pipeline.
- VK_PIPELINE_CREATE_VIEW_INDEX_FROM_DEVICE_INDEX_BIT specifies that any shader input variables decorated as ViewIndex will be assigned values as if they were decorated as DeviceIndex.
- VK_PIPELINE_CREATE_DISPATCH_BASE specifies that a compute pipeline **can** be used with vkCmdDispatchBase with a non-zero base workgroup.
- VK_PIPELINE_CREATE_FAIL_ON_PIPELINE_COMPILE_REQUIRED_BIT specifies that pipeline creation will fail if a compile is required for creation of a valid VkPipeline object; VK_PIPELINE_COMPILE_REQUIRED will be returned by pipeline creation, and the VkPipeline will be VK_NULL_HANDLE.
- When creating multiple pipelines, VK_PIPELINE_CREATE_EARLY_RETURN_ON_FAILURE_BIT specifies that control will be returned to the application if any individual pipeline returns a result which is not VK_SUCCESS rather than continuing to create additional pipelines.

It is valid to set both VK_PIPELINE_CREATE_ALLOW_DERIVATIVES_BIT and VK_PIPELINE_CREATE_DERIVATIVE_BIT. This allows a pipeline to be both a parent and possibly a child in a pipeline hierarchy. See Pipeline Derivatives for more information.

```
// Provided by VK_VERSION_1_0
typedef VkFlags VkPipelineCreateFlags;
```

VkPipelineCreateFlags is a bitmask type for setting a mask of zero or more VkPipelineCreateFlagBits.

The VkPipelineDynamicStateCreateInfo structure is defined as:

```
// Provided by VK_VERSION_1_0
typedef struct VkPipelineDynamicStateCreateInfo {
    VkStructureType                      sType;
    const void*                          pNext;
    VkPipelineDynamicStateCreateFlags    flags;
    uint32_t                             dynamicStateCount;
    const VkDynamicState*                pDynamicStates;
} VkPipelineDynamicStateCreateInfo;
```

- sType is a VkStructureType value identifying this structure.
- pNext is NULL or a pointer to a structure extending this structure.
- flags is reserved for future use.
- dynamicStateCount is the number of elements in the pDynamicStates array.
- pDynamicStates is a pointer to an array of VkDynamicState values specifying which pieces of pipeline state will use the values from dynamic state commands rather than from pipeline state creation information.

Valid Usage

- VUID-VkPipelineDynamicStateCreateInfo-pDynamicStates-01442
  Each element of pDynamicStates **must** be unique

Valid Usage (Implicit)

- VUID-VkPipelineDynamicStateCreateInfo-sType-sType
  sType **must** be VK_STRUCTURE_TYPE_PIPELINE_DYNAMIC_STATE_CREATE_INFO
- VUID-VkPipelineDynamicStateCreateInfo-pNext-pNext
  pNext **must** be NULL
- VUID-VkPipelineDynamicStateCreateInfo-flags-zerobitmask
  flags **must** be 0
- VUID-VkPipelineDynamicStateCreateInfo-pDynamicStates-parameter
  If dynamicStateCount is not 0, pDynamicStates **must** be a valid pointer to an array of dynamicStateCount valid VkDynamicState values

```
// Provided by VK_VERSION_1_0
typedef VkFlags VkPipelineDynamicStateCreateFlags;
```

VkPipelineDynamicStateCreateFlags is a bitmask type for setting a mask, but is currently reserved for future use.

The source of different pieces of dynamic state is specified by the VkPipelineDynamicStateCreateInfo::pDynamicStates property of the currently active pipeline, each of whose elements **must** be one of the values:

```
// Provided by VK_VERSION_1_0
typedef enum VkDynamicState {
    VK_DYNAMIC_STATE_VIEWPORT = 0,
    VK_DYNAMIC_STATE_SCISSOR = 1,
    VK_DYNAMIC_STATE_LINE_WIDTH = 2,
    VK_DYNAMIC_STATE_DEPTH_BIAS = 3,
    VK_DYNAMIC_STATE_BLEND_CONSTANTS = 4,
    VK_DYNAMIC_STATE_DEPTH_BOUNDS = 5,
    VK_DYNAMIC_STATE_STENCIL_COMPARE_MASK = 6,
    VK_DYNAMIC_STATE_STENCIL_WRITE_MASK = 7,
    VK_DYNAMIC_STATE_STENCIL_REFERENCE = 8,
  // Provided by VK_VERSION_1_3
    VK_DYNAMIC_STATE_CULL_MODE = 1000267000,
  // Provided by VK_VERSION_1_3
    VK_DYNAMIC_STATE_FRONT_FACE = 1000267001,
  // Provided by VK_VERSION_1_3
    VK_DYNAMIC_STATE_PRIMITIVE_TOPOLOGY = 1000267002,
  // Provided by VK_VERSION_1_3
    VK_DYNAMIC_STATE_VIEWPORT_WITH_COUNT = 1000267003,
  // Provided by VK_VERSION_1_3
    VK_DYNAMIC_STATE_SCISSOR_WITH_COUNT = 1000267004,
  // Provided by VK_VERSION_1_3
    VK_DYNAMIC_STATE_VERTEX_INPUT_BINDING_STRIDE = 1000267005,
  // Provided by VK_VERSION_1_3
    VK_DYNAMIC_STATE_DEPTH_TEST_ENABLE = 1000267006,
  // Provided by VK_VERSION_1_3
    VK_DYNAMIC_STATE_DEPTH_WRITE_ENABLE = 1000267007,
  // Provided by VK_VERSION_1_3
    VK_DYNAMIC_STATE_DEPTH_COMPARE_OP = 1000267008,
  // Provided by VK_VERSION_1_3
    VK_DYNAMIC_STATE_DEPTH_BOUNDS_TEST_ENABLE = 1000267009,
  // Provided by VK_VERSION_1_3
    VK_DYNAMIC_STATE_STENCIL_TEST_ENABLE = 1000267010,
  // Provided by VK_VERSION_1_3
    VK_DYNAMIC_STATE_STENCIL_OP = 1000267011,
  // Provided by VK_VERSION_1_3
    VK_DYNAMIC_STATE_RASTERIZER_DISCARD_ENABLE = 1000377001,
  // Provided by VK_VERSION_1_3
    VK_DYNAMIC_STATE_DEPTH_BIAS_ENABLE = 1000377002,
  // Provided by VK_VERSION_1_3
    VK_DYNAMIC_STATE_PRIMITIVE_RESTART_ENABLE = 1000377004,
} VkDynamicState;
```

- VK_DYNAMIC_STATE_VIEWPORT specifies that the pViewports state in VkPipelineViewportStateCreateInfo will be ignored and **must** be set dynamically with

vkCmdSetViewport before any drawing commands. The number of viewports used by a pipeline is still specified by the viewportCount member of VkPipelineViewportStateCreateInfo.

- VK_DYNAMIC_STATE_SCISSOR specifies that the pScissors state in VkPipelineViewportStateCreateInfo will be ignored and **must** be set dynamically with vkCmdSetScissor before any drawing commands. The number of scissor rectangles used by a pipeline is still specified by the scissorCount member of VkPipelineViewportStateCreateInfo.
- VK_DYNAMIC_STATE_LINE_WIDTH specifies that the lineWidth state in VkPipelineRasterizationStateCreateInfo will be ignored and **must** be set dynamically with vkCmdSetLineWidth before any drawing commands that generate line primitives for the rasterizer.
- VK_DYNAMIC_STATE_DEPTH_BIAS specifies that the depthBiasConstantFactor, depthBiasClamp and depthBiasSlopeFactor states in VkPipelineRasterizationStateCreateInfo will be ignored and **must** be set dynamically with vkCmdSetDepthBias before any draws are performed with depth bias enabled.
- VK_DYNAMIC_STATE_BLEND_CONSTANTS specifies that the blendConstants state in VkPipelineColorBlendStateCreateInfo will be ignored and **must** be set dynamically with vkCmdSetBlendConstants before any draws are performed with a pipeline state with VkPipelineColorBlendAttachmentState member blendEnable set to VK_TRUE and any of the blend functions using a constant blend color.
- VK_DYNAMIC_STATE_DEPTH_BOUNDS specifies that the minDepthBounds and maxDepthBounds states of VkPipelineDepthStencilStateCreateInfo will be ignored and **must** be set dynamically with vkCmdSetDepthBounds before any draws are performed with a pipeline state with VkPipelineDepthStencilStateCreateInfo member depthBoundsTestEnable set to VK_TRUE.
- VK_DYNAMIC_STATE_STENCIL_COMPARE_MASK specifies that the compareMask state in VkPipelineDepthStencilStateCreateInfo for both front and back will be ignored and **must** be set dynamically with vkCmdSetStencilCompareMask before any draws are performed with a pipeline state with VkPipelineDepthStencilStateCreateInfo member stencilTestEnable set to VK_TRUE
- VK_DYNAMIC_STATE_STENCIL_WRITE_MASK specifies that the writeMask state in VkPipelineDepthStencilStateCreateInfo for both front and back will be ignored and **must** be set dynamically with vkCmdSetStencilWriteMask before any draws are performed with a pipeline state with VkPipelineDepthStencilStateCreateInfo member stencilTestEnable set to VK_TRUE
- VK_DYNAMIC_STATE_STENCIL_REFERENCE specifies that the reference state in VkPipelineDepthStencilStateCreateInfo for both front and back will be ignored and **must** be set dynamically with vkCmdSetStencilReference before any draws are performed with a pipeline state with VkPipelineDepthStencilStateCreateInfo member stencilTestEnable set to VK_TRUE
- VK_DYNAMIC_STATE_CULL_MODE specifies that the cullMode state in VkPipelineRasterizationStateCreateInfo will be ignored and **must** be set dynamically with vkCmdSetCullMode before any drawing commands.
- VK_DYNAMIC_STATE_FRONT_FACE specifies that the frontFace state in VkPipelineRasterizationStateCreateInfo will be ignored and **must** be set dynamically with vkCmdSetFrontFace before any drawing commands.
- VK_DYNAMIC_STATE_PRIMITIVE_TOPOLOGY specifies that the topology state in

VkPipelineInputAssemblyStateCreateInfo only specifies the topology class, and the specific topology order and adjacency **must** be set dynamically with vkCmdSetPrimitiveTopology before any drawing commands.

- `VK_DYNAMIC_STATE_VIEWPORT_WITH_COUNT` specifies that the `viewportCount` and `pViewports` state in VkPipelineViewportStateCreateInfo will be ignored and **must** be set dynamically with vkCmdSetViewportWithCount before any draw call.
- `VK_DYNAMIC_STATE_SCISSOR_WITH_COUNT` specifies that the `scissorCount` and `pScissors` state in VkPipelineViewportStateCreateInfo will be ignored and **must** be set dynamically with vkCmdSetScissorWithCount before any draw call.
- `VK_DYNAMIC_STATE_VERTEX_INPUT_BINDING_STRIDE` specifies that the `stride` state in VkVertexInputBindingDescription will be ignored and **must** be set dynamically with vkCmdBindVertexBuffers2 before any draw call.
- `VK_DYNAMIC_STATE_DEPTH_TEST_ENABLE` specifies that the `depthTestEnable` state in VkPipelineDepthStencilStateCreateInfo will be ignored and **must** be set dynamically with vkCmdSetDepthTestEnable before any draw call.
- `VK_DYNAMIC_STATE_DEPTH_WRITE_ENABLE` specifies that the `depthWriteEnable` state in VkPipelineDepthStencilStateCreateInfo will be ignored and **must** be set dynamically with vkCmdSetDepthWriteEnable before any draw call.
- `VK_DYNAMIC_STATE_DEPTH_COMPARE_OP` specifies that the `depthCompareOp` state in VkPipelineDepthStencilStateCreateInfo will be ignored and **must** be set dynamically with vkCmdSetDepthCompareOp before any draw call.
- `VK_DYNAMIC_STATE_DEPTH_BOUNDS_TEST_ENABLE` specifies that the `depthBoundsTestEnable` state in VkPipelineDepthStencilStateCreateInfo will be ignored and **must** be set dynamically with vkCmdSetDepthBoundsTestEnable before any draw call.
- `VK_DYNAMIC_STATE_STENCIL_TEST_ENABLE` specifies that the `stencilTestEnable` state in VkPipelineDepthStencilStateCreateInfo will be ignored and **must** be set dynamically with vkCmdSetStencilTestEnable before any draw call.
- `VK_DYNAMIC_STATE_STENCIL_OP` specifies that the `failOp`, `passOp`, `depthFailOp`, and `compareOp` states in `VkPipelineDepthStencilStateCreateInfo` for both `front` and `back` will be ignored and **must** be set dynamically with vkCmdSetStencilOp before any draws are performed with a pipeline state with `VkPipelineDepthStencilStateCreateInfo` member `stencilTestEnable` set to `VK_TRUE`
- `VK_DYNAMIC_STATE_RASTERIZER_DISCARD_ENABLE` specifies that the `rasterizerDiscardEnable` state in VkPipelineRasterizationStateCreateInfo will be ignored and **must** be set dynamically with vkCmdSetRasterizerDiscardEnable before any drawing commands.
- `VK_DYNAMIC_STATE_DEPTH_BIAS_ENABLE` specifies that the `depthBiasEnable` state in VkPipelineRasterizationStateCreateInfo will be ignored and **must** be set dynamically with vkCmdSetDepthBiasEnable before any drawing commands.
- `VK_DYNAMIC_STATE_PRIMITIVE_RESTART_ENABLE` specifies that the `primitiveRestartEnable` state in VkPipelineInputAssemblyStateCreateInfo will be ignored and **must** be set dynamically with vkCmdSetPrimitiveRestartEnable before any drawing commands.

10.3.1. Valid Combinations of Stages for Graphics Pipelines

If tessellation shader stages are omitted, the tessellation shading and fixed-function stages of the pipeline are skipped.

If a geometry shader is omitted, the geometry shading stage is skipped.

If a fragment shader is omitted, fragment color outputs have undefined values, and the fragment depth value is determined by Fragment Operations state. This **can** be useful for depth-only rendering.

Presence of a shader stage in a pipeline is indicated by including a valid VkPipelineShaderStageCreateInfo with `module` and `pName` selecting an entry point from a shader module, where that entry point is valid for the stage specified by `stage`.

Presence of some of the fixed-function stages in the pipeline is implicitly derived from enabled shaders and provided state. For example, the fixed-function tessellator is always present when the pipeline has valid Tessellation Control and Tessellation Evaluation shaders.

For example:

- Depth/stencil-only rendering in a subpass with no color attachments
  - Active Pipeline Shader Stages
    - Vertex Shader
  - Required: Fixed-Function Pipeline Stages
    - VkPipelineVertexInputStateCreateInfo
    - VkPipelineInputAssemblyStateCreateInfo
    - VkPipelineViewportStateCreateInfo
    - VkPipelineRasterizationStateCreateInfo
    - VkPipelineMultisampleStateCreateInfo
    - VkPipelineDepthStencilStateCreateInfo
- Color-only rendering in a subpass with no depth/stencil attachment
  - Active Pipeline Shader Stages
    - Vertex Shader
    - Fragment Shader
  - Required: Fixed-Function Pipeline Stages
    - VkPipelineVertexInputStateCreateInfo
    - VkPipelineInputAssemblyStateCreateInfo
    - VkPipelineViewportStateCreateInfo
    - VkPipelineRasterizationStateCreateInfo
    - VkPipelineMultisampleStateCreateInfo
    - VkPipelineColorBlendStateCreateInfo

- Rendering pipeline with tessellation and geometry shaders
  - Active Pipeline Shader Stages
    - Vertex Shader
    - Tessellation Control Shader
    - Tessellation Evaluation Shader
    - Geometry Shader
    - Fragment Shader
  - Required: Fixed-Function Pipeline Stages
    - VkPipelineVertexInputStateCreateInfo
    - VkPipelineInputAssemblyStateCreateInfo
    - VkPipelineTessellationStateCreateInfo
    - VkPipelineViewportStateCreateInfo
    - VkPipelineRasterizationStateCreateInfo
    - VkPipelineMultisampleStateCreateInfo
    - VkPipelineDepthStencilStateCreateInfo
    - VkPipelineColorBlendStateCreateInfo

10.4. Pipeline Destruction

To destroy a pipeline, call:

```
// Provided by VK_VERSION_1_0
void vkDestroyPipeline(
    VkDevice                                    device,
    VkPipeline                                  pipeline,
    const VkAllocationCallbacks*                pAllocator);
```

- `device` is the logical device that destroys the pipeline.
- `pipeline` is the handle of the pipeline to destroy.
- `pAllocator` controls host memory allocation as described in the Memory Allocation chapter.

Valid Usage

- VUID-vkDestroyPipeline-pipeline-00765
  All submitted commands that refer to `pipeline` **must** have completed execution
- VUID-vkDestroyPipeline-pipeline-00766
  If `VkAllocationCallbacks` were provided when `pipeline` was created, a compatible set of callbacks **must** be provided here
- VUID-vkDestroyPipeline-pipeline-00767

If no VkAllocationCallbacks were provided when pipeline was created, pAllocator **must** be NULL

Valid Usage (Implicit)

- VUID-vkDestroyPipeline-device-parameter
  device **must** be a valid VkDevice handle
- VUID-vkDestroyPipeline-pipeline-parameter
  If pipeline is not VK_NULL_HANDLE, pipeline **must** be a valid VkPipeline handle
- VUID-vkDestroyPipeline-pAllocator-parameter
  If pAllocator is not NULL, pAllocator **must** be a valid pointer to a valid VkAllocationCallbacks structure
- VUID-vkDestroyPipeline-pipeline-parent
  If pipeline is a valid handle, it **must** have been created, allocated, or retrieved from device

Host Synchronization

- Host access to pipeline **must** be externally synchronized

10.5. Pipeline Derivatives

A pipeline derivative is a child pipeline created from a parent pipeline, where the child and parent are expected to have much commonality.

The goal of derivative pipelines is that they be cheaper to create using the parent as a starting point, and that it be more efficient (on either host or device) to switch/bind between children of the same parent.

A derivative pipeline is created by setting the VK_PIPELINE_CREATE_DERIVATIVE_BIT flag in the Vk*PipelineCreateInfo structure. If this is set, then exactly one of basePipelineHandle or basePipelineIndex members of the structure **must** have a valid handle/index, and specifies the parent pipeline. If basePipelineHandle is used, the parent pipeline **must** have already been created. If basePipelineIndex is used, then the parent is being created in the same command. VK_NULL_HANDLE acts as the invalid handle for basePipelineHandle, and -1 is the invalid index for basePipelineIndex. If basePipelineIndex is used, the base pipeline **must** appear earlier in the array. The base pipeline **must** have been created with the VK_PIPELINE_CREATE_ALLOW_DERIVATIVES_BIT flag set.

10.6. Pipeline Cache

Pipeline cache objects allow the result of pipeline construction to be reused between pipelines and between runs of an application. Reuse between pipelines is achieved by passing the same pipeline cache object when creating multiple related pipelines. Reuse across runs of an application is

achieved by retrieving pipeline cache contents in one run of an application, saving the contents, and using them to preinitialize a pipeline cache on a subsequent run. The contents of the pipeline cache objects are managed by the implementation. Applications **can** manage the host memory consumed by a pipeline cache object and control the amount of data retrieved from a pipeline cache object.

Pipeline cache objects are represented by `VkPipelineCache` handles:

```
// Provided by VK_VERSION_1_0
VK_DEFINE_NON_DISPATCHABLE_HANDLE(VkPipelineCache)
```

10.6.1. Creating a Pipeline Cache

To create pipeline cache objects, call:

```
// Provided by VK_VERSION_1_0
VkResult vkCreatePipelineCache(
    VkDevice                                    device,
    const VkPipelineCacheCreateInfo*            pCreateInfo,
    const VkAllocationCallbacks*                pAllocator,
    VkPipelineCache*                            pPipelineCache);
```

- `device` is the logical device that creates the pipeline cache object.
- `pCreateInfo` is a pointer to a VkPipelineCacheCreateInfo structure containing initial parameters for the pipeline cache object.
- `pAllocator` controls host memory allocation as described in the Memory Allocation chapter.
- `pPipelineCache` is a pointer to a VkPipelineCache handle in which the resulting pipeline cache object is returned.

NOTE Applications **can** track and manage the total host memory size of a pipeline cache object using the `pAllocator`. Applications **can** limit the amount of data retrieved from a pipeline cache object in `vkGetPipelineCacheData`. Implementations **should** not internally limit the total number of entries added to a pipeline cache object or the total host memory consumed.

Once created, a pipeline cache **can** be passed to the vkCreateGraphicsPipelines and vkCreateComputePipelines commands. If the pipeline cache passed into these commands is not VK_NULL_HANDLE, the implementation will query it for possible reuse opportunities and update it with new content. The use of the pipeline cache object in these commands is internally synchronized, and the same pipeline cache object **can** be used in multiple threads simultaneously.

If `flags` of `pCreateInfo` includes `VK_PIPELINE_CACHE_CREATE_EXTERNALLY_SYNCHRONIZED_BIT`, all commands that modify the returned pipeline cache object **must** be externally synchronized.

NOTE Implementations **should** make every effort to limit any critical sections to the

> actual accesses to the cache, which is expected to be significantly shorter than the duration of the `vkCreate*Pipelines` commands.

Valid Usage (Implicit)

- VUID-vkCreatePipelineCache-device-parameter
  `device` **must** be a valid VkDevice handle
- VUID-vkCreatePipelineCache-pCreateInfo-parameter
  `pCreateInfo` **must** be a valid pointer to a valid VkPipelineCacheCreateInfo structure
- VUID-vkCreatePipelineCache-pAllocator-parameter
  If `pAllocator` is not `NULL`, `pAllocator` **must** be a valid pointer to a valid VkAllocationCallbacks structure
- VUID-vkCreatePipelineCache-pPipelineCache-parameter
  `pPipelineCache` **must** be a valid pointer to a VkPipelineCache handle

Return Codes

Success

- `VK_SUCCESS`

Failure

- `VK_ERROR_OUT_OF_HOST_MEMORY`
- `VK_ERROR_OUT_OF_DEVICE_MEMORY`

The `VkPipelineCacheCreateInfo` structure is defined as:

```
// Provided by VK_VERSION_1_0
typedef struct VkPipelineCacheCreateInfo {
    VkStructureType              sType;
    const void*                  pNext;
    VkPipelineCacheCreateFlags   flags;
    size_t                       initialDataSize;
    const void*                  pInitialData;
} VkPipelineCacheCreateInfo;
```

- `sType` is a VkStructureType value identifying this structure.
- `pNext` is `NULL` or a pointer to a structure extending this structure.
- `flags` is a bitmask of VkPipelineCacheCreateFlagBits specifying the behavior of the pipeline cache.
- `initialDataSize` is the number of bytes in `pInitialData`. If `initialDataSize` is zero, the pipeline cache will initially be empty.
- `pInitialData` is a pointer to previously retrieved pipeline cache data. If the pipeline cache data is

incompatible (as defined below) with the device, the pipeline cache will be initially empty. If `initialDataSize` is zero, `pInitialData` is ignored.

Valid Usage

- VUID-VkPipelineCacheCreateInfo-initialDataSize-00768
  If `initialDataSize` is not `0`, it **must** be equal to the size of `pInitialData`, as returned by `vkGetPipelineCacheData` when `pInitialData` was originally retrieved
- VUID-VkPipelineCacheCreateInfo-initialDataSize-00769
  If `initialDataSize` is not `0`, `pInitialData` **must** have been retrieved from a previous call to `vkGetPipelineCacheData`
- VUID-VkPipelineCacheCreateInfo-pipelineCreationCacheControl-02892
  If the `pipelineCreationCacheControl` feature is not enabled, `flags` **must** not include `VK_PIPELINE_CACHE_CREATE_EXTERNALLY_SYNCHRONIZED_BIT`

Valid Usage (Implicit)

- VUID-VkPipelineCacheCreateInfo-sType-sType
  `sType` **must** be `VK_STRUCTURE_TYPE_PIPELINE_CACHE_CREATE_INFO`
- VUID-VkPipelineCacheCreateInfo-pNext-pNext
  `pNext` **must** be `NULL`
- VUID-VkPipelineCacheCreateInfo-flags-parameter
  `flags` **must** be a valid combination of VkPipelineCacheCreateFlagBits values
- VUID-VkPipelineCacheCreateInfo-pInitialData-parameter
  If `initialDataSize` is not `0`, `pInitialData` **must** be a valid pointer to an array of `initialDataSize` bytes

```
// Provided by VK_VERSION_1_0
typedef VkFlags VkPipelineCacheCreateFlags;
```

`VkPipelineCacheCreateFlags` is a bitmask type for setting a mask of zero or more VkPipelineCacheCreateFlagBits.

Bits which **can** be set in VkPipelineCacheCreateInfo::`flags`, specifying behavior of the pipeline cache, are:

```
typedef enum VkPipelineCacheCreateFlagBits {
  // Provided by VK_VERSION_1_3
    VK_PIPELINE_CACHE_CREATE_EXTERNALLY_SYNCHRONIZED_BIT = 0x00000001,
} VkPipelineCacheCreateFlagBits;
```

- `VK_PIPELINE_CACHE_CREATE_EXTERNALLY_SYNCHRONIZED_BIT` specifies that all commands that modify

the created VkPipelineCache will be externally synchronized. When set, the implementation **may** skip any unnecessary processing needed to support simultaneous modification from multiple threads where allowed.

10.6.2. Merging Pipeline Caches

Pipeline cache objects **can** be merged using the command:

```
// Provided by VK_VERSION_1_0
VkResult vkMergePipelineCaches(
    VkDevice                                    device,
    VkPipelineCache                             dstCache,
    uint32_t                                    srcCacheCount,
    const VkPipelineCache*                      pSrcCaches);
```

- `device` is the logical device that owns the pipeline cache objects.
- `dstCache` is the handle of the pipeline cache to merge results into.
- `srcCacheCount` is the length of the `pSrcCaches` array.
- `pSrcCaches` is a pointer to an array of pipeline cache handles, which will be merged into `dstCache`. The previous contents of `dstCache` are included after the merge.

NOTE	The details of the merge operation are implementation-dependent, but implementations **should** merge the contents of the specified pipelines and prune duplicate entries.

Valid Usage

- VUID-vkMergePipelineCaches-dstCache-00770
  `dstCache` **must** not appear in the list of source caches

Valid Usage (Implicit)

- VUID-vkMergePipelineCaches-device-parameter
  `device` **must** be a valid VkDevice handle
- VUID-vkMergePipelineCaches-dstCache-parameter
  `dstCache` **must** be a valid VkPipelineCache handle
- VUID-vkMergePipelineCaches-pSrcCaches-parameter
  `pSrcCaches` **must** be a valid pointer to an array of `srcCacheCount` valid VkPipelineCache handles
- VUID-vkMergePipelineCaches-srcCacheCount-arraylength
  `srcCacheCount` **must** be greater than `0`
- VUID-vkMergePipelineCaches-dstCache-parent
  `dstCache` **must** have been created, allocated, or retrieved from `device`

- VUID-vkMergePipelineCaches-pSrcCaches-parent
  Each element of pSrcCaches **must** have been created, allocated, or retrieved from device

Host Synchronization

- Host access to dstCache **must** be externally synchronized

Return Codes

Success

- VK_SUCCESS

Failure

- VK_ERROR_OUT_OF_HOST_MEMORY
- VK_ERROR_OUT_OF_DEVICE_MEMORY

10.6.3. Retrieving Pipeline Cache Data

Data **can** be retrieved from a pipeline cache object using the command:

```
// Provided by VK_VERSION_1_0
VkResult vkGetPipelineCacheData(
    VkDevice                                    device,
    VkPipelineCache                             pipelineCache,
    size_t*                                     pDataSize,
    void*                                       pData);
```

- device is the logical device that owns the pipeline cache.
- pipelineCache is the pipeline cache to retrieve data from.
- pDataSize is a pointer to a size_t value related to the amount of data in the pipeline cache, as described below.
- pData is either NULL or a pointer to a buffer.

If pData is NULL, then the maximum size of the data that **can** be retrieved from the pipeline cache, in bytes, is returned in pDataSize. Otherwise, pDataSize **must** point to a variable set by the application to the size of the buffer, in bytes, pointed to by pData, and on return the variable is overwritten with the amount of data actually written to pData. If pDataSize is less than the maximum size that **can** be retrieved by the pipeline cache, at most pDataSize bytes will be written to pData, and VK_INCOMPLETE will be returned instead of VK_SUCCESS, to indicate that not all of the pipeline cache was returned.

Any data written to pData is valid and **can** be provided as the pInitialData member of the VkPipelineCacheCreateInfo structure passed to vkCreatePipelineCache.

Two calls to vkGetPipelineCacheData with the same parameters **must** retrieve the same data unless a

command that modifies the contents of the cache is called between them.

The initial bytes written to `pData` **must** be a header as described in the Pipeline Cache Header section.

If `pDataSize` is less than what is necessary to store this header, nothing will be written to `pData` and zero will be written to `pDataSize`.

Valid Usage (Implicit)

- VUID-vkGetPipelineCacheData-device-parameter
  `device` **must** be a valid VkDevice handle
- VUID-vkGetPipelineCacheData-pipelineCache-parameter
  `pipelineCache` **must** be a valid VkPipelineCache handle
- VUID-vkGetPipelineCacheData-pDataSize-parameter
  `pDataSize` **must** be a valid pointer to a `size_t` value
- VUID-vkGetPipelineCacheData-pData-parameter
  If the value referenced by `pDataSize` is not `0`, and `pData` is not `NULL`, `pData` **must** be a valid pointer to an array of `pDataSize` bytes
- VUID-vkGetPipelineCacheData-pipelineCache-parent
  `pipelineCache` **must** have been created, allocated, or retrieved from `device`

Return Codes

Success

- `VK_SUCCESS`
- `VK_INCOMPLETE`

Failure

- `VK_ERROR_OUT_OF_HOST_MEMORY`
- `VK_ERROR_OUT_OF_DEVICE_MEMORY`

10.6.4. Pipeline Cache Header

Applications **can** store the data retrieved from the pipeline cache, and use these data, possibly in a future run of the application, to populate new pipeline cache objects. The results of pipeline compiles, however, **may** depend on the vendor ID, device ID, driver version, and other details of the device. To enable applications to detect when previously retrieved data is incompatible with the device, the pipeline cache data **must** begin with a valid pipeline cache header.

NOTE

Structures described in this section are not part of the Vulkan API and are only used to describe the representation of data elements in pipeline cache data. Accordingly, the valid usage clauses defined for structures defined in this section do not define valid usage conditions for APIs accepting pipeline cache data as input, as providing

> invalid pipeline cache data as input to any Vulkan API commands will result in the provided pipeline cache data being ignored.

Version one of the pipeline cache header is defined as:

```
// Provided by VK_VERSION_1_0
typedef struct VkPipelineCacheHeaderVersionOne {
    uint32_t                        headerSize;
    VkPipelineCacheHeaderVersion    headerVersion;
    uint32_t                        vendorID;
    uint32_t                        deviceID;
    uint8_t                         pipelineCacheUUID[VK_UUID_SIZE];
} VkPipelineCacheHeaderVersionOne;
```

- `headerSize` is the length in bytes of the pipeline cache header.
- `headerVersion` is a VkPipelineCacheHeaderVersion value specifying the version of the header. A consumer of the pipeline cache **should** use the cache version to interpret the remainder of the cache header.
- `vendorID` is the `VkPhysicalDeviceProperties`::`vendorID` of the implementation.
- `deviceID` is the `VkPhysicalDeviceProperties`::`deviceID` of the implementation.
- `pipelineCacheUUID` is the `VkPhysicalDeviceProperties`::`pipelineCacheUUID` of the implementation.

Unlike most structures declared by the Vulkan API, all fields of this structure are written with the least significant byte first, regardless of host byte-order.

The C language specification does not define the packing of structure members. This layout assumes tight structure member packing, with members laid out in the order listed in the structure, and the intended size of the structure is 32 bytes. If a compiler produces code that diverges from that pattern, applications **must** employ another method to set values at the correct offsets.

Valid Usage

- VUID-VkPipelineCacheHeaderVersionOne-headerSize-04967
  `headerSize` **must** be 32
- VUID-VkPipelineCacheHeaderVersionOne-headerVersion-04968
  `headerVersion` **must** be `VK_PIPELINE_CACHE_HEADER_VERSION_ONE`
- VUID-VkPipelineCacheHeaderVersionOne-headerSize-08990
  `headerSize` **must** not exceed the size of the pipeline cache

Valid Usage (Implicit)

- VUID-VkPipelineCacheHeaderVersionOne-headerVersion-parameter
  `headerVersion` **must** be a valid VkPipelineCacheHeaderVersion value

Possible values of the `headerVersion` value of the pipeline cache header are:

```
// Provided by VK_VERSION_1_0
typedef enum VkPipelineCacheHeaderVersion {
    VK_PIPELINE_CACHE_HEADER_VERSION_ONE = 1,
} VkPipelineCacheHeaderVersion;
```

- `VK_PIPELINE_CACHE_HEADER_VERSION_ONE` specifies version one of the pipeline cache, described by VkPipelineCacheHeaderVersionOne.

10.6.5. Destroying a Pipeline Cache

To destroy a pipeline cache, call:

```
// Provided by VK_VERSION_1_0
void vkDestroyPipelineCache(
    VkDevice                                    device,
    VkPipelineCache                             pipelineCache,
    const VkAllocationCallbacks*                pAllocator);
```

- `device` is the logical device that destroys the pipeline cache object.
- `pipelineCache` is the handle of the pipeline cache to destroy.
- `pAllocator` controls host memory allocation as described in the Memory Allocation chapter.

Valid Usage

- VUID-vkDestroyPipelineCache-pipelineCache-00771
  If `VkAllocationCallbacks` were provided when `pipelineCache` was created, a compatible set of callbacks **must** be provided here
- VUID-vkDestroyPipelineCache-pipelineCache-00772
  If no `VkAllocationCallbacks` were provided when `pipelineCache` was created, `pAllocator` **must** be `NULL`

Valid Usage (Implicit)

- VUID-vkDestroyPipelineCache-device-parameter
  `device` **must** be a valid VkDevice handle
- VUID-vkDestroyPipelineCache-pipelineCache-parameter
  If `pipelineCache` is not VK_NULL_HANDLE, `pipelineCache` **must** be a valid VkPipelineCache handle
- VUID-vkDestroyPipelineCache-pAllocator-parameter
  If `pAllocator` is not `NULL`, `pAllocator` **must** be a valid pointer to a valid VkAllocationCallbacks structure

- VUID-vkDestroyPipelineCache-pipelineCache-parent
  If `pipelineCache` is a valid handle, it **must** have been created, allocated, or retrieved from `device`

Host Synchronization

- Host access to `pipelineCache` **must** be externally synchronized

10.7. Specialization Constants

Specialization constants are a mechanism whereby constants in a SPIR-V module **can** have their constant value specified at the time the `VkPipeline` is created. This allows a SPIR-V module to have constants that **can** be modified while executing an application that uses the Vulkan API.

NOTE Specialization constants are useful to allow a compute shader to have its local workgroup size changed at runtime by the user, for example.

Each VkPipelineShaderStageCreateInfo structure contains a `pSpecializationInfo` member, which **can** be `NULL` to indicate no specialization constants, or point to a `VkSpecializationInfo` structure.

The `VkSpecializationInfo` structure is defined as:

```
// Provided by VK_VERSION_1_0
typedef struct VkSpecializationInfo {
    uint32_t                           mapEntryCount;
    const VkSpecializationMapEntry*    pMapEntries;
    size_t                             dataSize;
    const void*                        pData;
} VkSpecializationInfo;
```

- `mapEntryCount` is the number of entries in the `pMapEntries` array.
- `pMapEntries` is a pointer to an array of `VkSpecializationMapEntry` structures, which map constant IDs to offsets in `pData`.
- `dataSize` is the byte size of the `pData` buffer.
- `pData` contains the actual constant values to specialize with.

Valid Usage

- VUID-VkSpecializationInfo-offset-00773
  The `offset` member of each element of `pMapEntries` **must** be less than `dataSize`
- VUID-VkSpecializationInfo-pMapEntries-00774
  The `size` member of each element of `pMapEntries` **must** be less than or equal to `dataSize` minus `offset`

- VUID-VkSpecializationInfo-constantID-04911
  The `constantID` value of each element of `pMapEntries` **must** be unique within `pMapEntries`

Valid Usage (Implicit)

- VUID-VkSpecializationInfo-pMapEntries-parameter
  If `mapEntryCount` is not `0`, `pMapEntries` **must** be a valid pointer to an array of `mapEntryCount` valid VkSpecializationMapEntry structures
- VUID-VkSpecializationInfo-pData-parameter
  If `dataSize` is not `0`, `pData` **must** be a valid pointer to an array of `dataSize` bytes

The `VkSpecializationMapEntry` structure is defined as:

```
// Provided by VK_VERSION_1_0
typedef struct VkSpecializationMapEntry {
    uint32_t    constantID;
    uint32_t    offset;
    size_t      size;
} VkSpecializationMapEntry;
```

- `constantID` is the ID of the specialization constant in SPIR-V.
- `offset` is the byte offset of the specialization constant value within the supplied data buffer.
- `size` is the byte size of the specialization constant value within the supplied data buffer.

If a `constantID` value is not a specialization constant ID used in the shader, that map entry does not affect the behavior of the pipeline.

Valid Usage

- VUID-VkSpecializationMapEntry-constantID-00776
  For a `constantID` specialization constant declared in a shader, `size` **must** match the byte size of the `constantID`. If the specialization constant is of type `boolean`, `size` **must** be the byte size of VkBool32

In human readable SPIR-V:

```
OpDecorate %x SpecId 13 ; decorate .x component of WorkgroupSize with ID 13
OpDecorate %y SpecId 42 ; decorate .y component of WorkgroupSize with ID 42
OpDecorate %z SpecId 3  ; decorate .z component of WorkgroupSize with ID 3
OpDecorate %wgsize BuiltIn WorkgroupSize ; decorate WorkgroupSize onto constant
%i32 = OpTypeInt 32 0 ; declare an unsigned 32-bit type
%uvec3 = OpTypeVector %i32 3 ; declare a 3 element vector type of unsigned 32-bit
%x = OpSpecConstant %i32 1 ; declare the .x component of WorkgroupSize
%y = OpSpecConstant %i32 1 ; declare the .y component of WorkgroupSize
```

```
%z = OpSpecConstant %i32 1 ; declare the .z component of WorkgroupSize
%wgsize = OpSpecConstantComposite %uvec3 %x %y %z ; declare WorkgroupSize
```

From the above we have three specialization constants, one for each of the x, y & z elements of the WorkgroupSize vector.

Now to specialize the above via the specialization constants mechanism:

```
const VkSpecializationMapEntry entries[] =
{
    {
        .constantID = 13,
        .offset = 0 * sizeof(uint32_t),
        .size = sizeof(uint32_t)
    },
    {
        .constantID = 42,
        .offset = 1 * sizeof(uint32_t),
        .size = sizeof(uint32_t)
    },
    {
        .constantID = 3,
        .offset = 2 * sizeof(uint32_t),
        .size = sizeof(uint32_t)
    }
};

const uint32_t data[] = { 16, 8, 4 }; // our workgroup size is 16x8x4

const VkSpecializationInfo info =
{
    .mapEntryCount = 3,
    .pMapEntries  = entries,
    .dataSize = 3 * sizeof(uint32_t),
    .pData = data,
};
```

Then when calling vkCreateComputePipelines, and passing the `VkSpecializationInfo` we defined as the `pSpecializationInfo` parameter of VkPipelineShaderStageCreateInfo, we will create a compute pipeline with the runtime specified local workgroup size.

Another example would be that an application has a SPIR-V module that has some platform-dependent constants they wish to use.

In human readable SPIR-V:

```
OpDecorate %1 SpecId 0  ; decorate our signed 32-bit integer constant
OpDecorate %2 SpecId 12 ; decorate our 32-bit floating-point constant
%i32 = OpTypeInt 32 1   ; declare a signed 32-bit type
```

```
%float = OpTypeFloat 32 ; declare a 32-bit floating-point type
%1 = OpSpecConstant %i32 -1 ; some signed 32-bit integer constant
%2 = OpSpecConstant %float 0.5 ; some 32-bit floating-point constant
```

From the above we have two specialization constants, one is a signed 32-bit integer and the second is a 32-bit floating-point value.

Now to specialize the above via the specialization constants mechanism:

```
struct SpecializationData {
    int32_t data0;
    float data1;
};

const VkSpecializationMapEntry entries[] =
{
    {
        .constantID = 0,
        .offset = offsetof(SpecializationData, data0),
        .size = sizeof(SpecializationData::data0)
    },
    {
        .constantID = 12,
        .offset = offsetof(SpecializationData, data1),
        .size = sizeof(SpecializationData::data1)
    }
};

SpecializationData data;
data.data0 = -42;    // set the data for the 32-bit integer
data.data1 = 42.0f;  // set the data for the 32-bit floating-point

const VkSpecializationInfo info =
{
    .mapEntryCount = 2,
    .pMapEntries = entries,
    .dataSize = sizeof(data),
    .pdata = &data,
};
```

It is legal for a SPIR-V module with specializations to be compiled into a pipeline where no specialization information was provided. SPIR-V specialization constants contain default values such that if a specialization is not provided, the default value will be used. In the examples above, it would be valid for an application to only specialize some of the specialization constants within the SPIR-V module, and let the other constants use their default values encoded within the OpSpecConstant declarations.

10.8. Pipeline Binding

Once a pipeline has been created, it **can** be bound to the command buffer using the command:

```
// Provided by VK_VERSION_1_0
void vkCmdBindPipeline(
    VkCommandBuffer                             commandBuffer,
    VkPipelineBindPoint                         pipelineBindPoint,
    VkPipeline                                  pipeline);
```

- `commandBuffer` is the command buffer that the pipeline will be bound to.
- `pipelineBindPoint` is a VkPipelineBindPoint value specifying to which bind point the pipeline is bound. Binding one does not disturb the others.
- `pipeline` is the pipeline to be bound.

Once bound, a pipeline binding affects subsequent commands that interact with the given pipeline type in the command buffer until a different pipeline of the same type is bound to the bind point. Commands that do not interact with the given pipeline type **must** not be affected by the pipeline state.

Valid Usage

- VUID-vkCmdBindPipeline-pipelineBindPoint-00777
  If `pipelineBindPoint` is `VK_PIPELINE_BIND_POINT_COMPUTE`, the `VkCommandPool` that `commandBuffer` was allocated from **must** support compute operations
- VUID-vkCmdBindPipeline-pipelineBindPoint-00778
  If `pipelineBindPoint` is `VK_PIPELINE_BIND_POINT_GRAPHICS`, the `VkCommandPool` that `commandBuffer` was allocated from **must** support graphics operations
- VUID-vkCmdBindPipeline-pipelineBindPoint-00779
  If `pipelineBindPoint` is `VK_PIPELINE_BIND_POINT_COMPUTE`, `pipeline` **must** be a compute pipeline
- VUID-vkCmdBindPipeline-pipelineBindPoint-00780
  If `pipelineBindPoint` is `VK_PIPELINE_BIND_POINT_GRAPHICS`, `pipeline` **must** be a graphics pipeline
- VUID-vkCmdBindPipeline-pipeline-00781
  If the `variableMultisampleRate` feature is not supported, `pipeline` is a graphics pipeline, the current subpass uses no attachments, and this is not the first call to this function with a graphics pipeline after transitioning to the current subpass, then the sample count specified by this pipeline **must** match that set in the previous pipeline

Valid Usage (Implicit)

- VUID-vkCmdBindPipeline-commandBuffer-parameter

`commandBuffer` **must** be a valid VkCommandBuffer handle

- VUID-vkCmdBindPipeline-pipelineBindPoint-parameter
  `pipelineBindPoint` **must** be a valid VkPipelineBindPoint value
- VUID-vkCmdBindPipeline-pipeline-parameter
  `pipeline` **must** be a valid VkPipeline handle
- VUID-vkCmdBindPipeline-commandBuffer-recording
  `commandBuffer` **must** be in the recording state
- VUID-vkCmdBindPipeline-commandBuffer-cmdpool
  The `VkCommandPool` that `commandBuffer` was allocated from **must** support graphics, or compute operations
- VUID-vkCmdBindPipeline-commonparent
  Both of `commandBuffer`, and `pipeline` **must** have been created, allocated, or retrieved from the same VkDevice

Host Synchronization

- Host access to `commandBuffer` **must** be externally synchronized
- Host access to the `VkCommandPool` that `commandBuffer` was allocated from **must** be externally synchronized

Command Properties

Command Buffer Levels	Render Pass Scope	Supported Queue Types	Command Type
Primary Secondary	Both	Graphics Compute	State

Possible values of vkCmdBindPipeline::`pipelineBindPoint`, specifying the bind point of a pipeline object, are:

```
// Provided by VK_VERSION_1_0
typedef enum VkPipelineBindPoint {
    VK_PIPELINE_BIND_POINT_GRAPHICS = 0,
    VK_PIPELINE_BIND_POINT_COMPUTE = 1,
} VkPipelineBindPoint;
```

- `VK_PIPELINE_BIND_POINT_COMPUTE` specifies binding as a compute pipeline.
- `VK_PIPELINE_BIND_POINT_GRAPHICS` specifies binding as a graphics pipeline.

10.9. Dynamic State

When a pipeline object is bound, any pipeline object state that is not specified as dynamic is applied to the command buffer state. Pipeline object state that is specified as dynamic is not applied to the command buffer state at this time.

Instead, dynamic state **can** be modified at any time and persists for the lifetime of the command buffer, or until modified by another dynamic state setting command, or made invalid by binding a pipeline in which that state is statically specified.

When a pipeline object is bound, the following applies to each state parameter:

- If the state is not specified as dynamic in the new pipeline object, then that command buffer state is overwritten by the state in the new pipeline object. Before any draw or dispatch call with this pipeline there **must** not have been any calls to any of the corresponding dynamic state setting commands after this pipeline was bound.
- If the state is specified as dynamic in the new pipeline object, then that command buffer state is not disturbed. Before any draw or dispatch call with this pipeline there **must** have been at least one call to each of the corresponding dynamic state setting commands. The state-setting commands **must** be recorded after command buffer recording was begun, or after the last command binding a pipeline object with that state specified as static, whichever was the latter.
- If the state is not included (corresponding pointer in VkGraphicsPipelineCreateInfo was `NULL` or was ignored) in the new pipeline object, then that command buffer state is not disturbed.

Dynamic state that does not affect the result of operations **can** be left undefined.

NOTE	For example, if blending is disabled by the pipeline object state then the dynamic color blend constants do not need to be specified in the command buffer, even if this state is specified as dynamic in the pipeline object.
NOTE	Applications running on Vulkan implementations advertising an VkPhysicalDeviceDriverProperties::`conformanceVersion` less than 1.3.8.0 should be aware that rebinding the currently bound pipeline object may not reapply static state.

10.10. Pipeline Creation Feedback

Feedback about the creation of a particular pipeline object **can** be obtained by adding a `VkPipelineCreationFeedbackCreateInfo` structure to the `pNext` chain of VkGraphicsPipelineCreateInfo, or VkComputePipelineCreateInfo. The `VkPipelineCreationFeedbackCreateInfo` structure is defined as:

```
// Provided by VK_VERSION_1_3
typedef struct VkPipelineCreationFeedbackCreateInfo {
    VkStructureType                sType;
    const void*                    pNext;
    VkPipelineCreationFeedback*    pPipelineCreationFeedback;
    uint32_t                       pipelineStageCreationFeedbackCount;
    VkPipelineCreationFeedback*    pPipelineStageCreationFeedbacks;
} VkPipelineCreationFeedbackCreateInfo;
```

- `sType` is a VkStructureType value identifying this structure.
- `pNext` is `NULL` or a pointer to a structure extending this structure.
- `pPipelineCreationFeedback` is a pointer to a VkPipelineCreationFeedback structure.
- `pipelineStageCreationFeedbackCount` is the number of elements in `pPipelineStageCreationFeedbacks`.
- `pPipelineStageCreationFeedbacks` is a pointer to an array of `pipelineStageCreationFeedbackCount` VkPipelineCreationFeedback structures.

An implementation **should** write pipeline creation feedback to `pPipelineCreationFeedback` and **may** write pipeline stage creation feedback to `pPipelineStageCreationFeedbacks`. An implementation **must** set or clear the `VK_PIPELINE_CREATION_FEEDBACK_VALID_BIT` in VkPipelineCreationFeedback ::`flags` for `pPipelineCreationFeedback` and every element of `pPipelineStageCreationFeedbacks`.

NOTE	One common scenario for an implementation to skip per-stage feedback is when `VK_PIPELINE_CREATION_FEEDBACK_APPLICATION_PIPELINE_CACHE_HIT_BIT` is set in `pPipelineCreationFeedback`.

When chained to VkGraphicsPipelineCreateInfo, the `i` element of `pPipelineStageCreationFeedbacks` corresponds to the `i` element of VkGraphicsPipelineCreateInfo::`pStages`. When chained to VkComputePipelineCreateInfo, the first element of `pPipelineStageCreationFeedbacks` corresponds to VkComputePipelineCreateInfo::`stage`.

Valid Usage (Implicit)

- VUID-VkPipelineCreationFeedbackCreateInfo-sType-sType
  `sType` **must** be `VK_STRUCTURE_TYPE_PIPELINE_CREATION_FEEDBACK_CREATE_INFO`
- VUID-VkPipelineCreationFeedbackCreateInfo-pPipelineCreationFeedback-parameter
  `pPipelineCreationFeedback` **must** be a valid pointer to a VkPipelineCreationFeedback structure
- VUID-VkPipelineCreationFeedbackCreateInfo-pPipelineStageCreationFeedbacks-parameter
  If `pipelineStageCreationFeedbackCount` is not `0`, `pPipelineStageCreationFeedbacks` **must** be a valid pointer to an array of `pipelineStageCreationFeedbackCount` VkPipelineCreationFeedback structures

The VkPipelineCreationFeedback structure is defined as:

```
// Provided by VK_VERSION_1_3
typedef struct VkPipelineCreationFeedback {
    VkPipelineCreationFeedbackFlags    flags;
    uint64_t                           duration;
} VkPipelineCreationFeedback;
```

- flags is a bitmask of VkPipelineCreationFeedbackFlagBits providing feedback about the creation of a pipeline or of a pipeline stage.
- duration is the duration spent creating a pipeline or pipeline stage in nanoseconds.

If the VK_PIPELINE_CREATION_FEEDBACK_VALID_BIT is not set in flags, an implementation **must** not set any other bits in flags, and the values of all other VkPipelineCreationFeedback data members are undefined.

Possible values of the flags member of VkPipelineCreationFeedback are:

```
// Provided by VK_VERSION_1_3
typedef enum VkPipelineCreationFeedbackFlagBits {
    VK_PIPELINE_CREATION_FEEDBACK_VALID_BIT = 0x00000001,
    VK_PIPELINE_CREATION_FEEDBACK_APPLICATION_PIPELINE_CACHE_HIT_BIT = 0x00000002,
    VK_PIPELINE_CREATION_FEEDBACK_BASE_PIPELINE_ACCELERATION_BIT = 0x00000004,
    VK_PIPELINE_CREATION_FEEDBACK_VALID_BIT_EXT =
VK_PIPELINE_CREATION_FEEDBACK_VALID_BIT,
    VK_PIPELINE_CREATION_FEEDBACK_APPLICATION_PIPELINE_CACHE_HIT_BIT_EXT =
VK_PIPELINE_CREATION_FEEDBACK_APPLICATION_PIPELINE_CACHE_HIT_BIT,
    VK_PIPELINE_CREATION_FEEDBACK_BASE_PIPELINE_ACCELERATION_BIT_EXT =
VK_PIPELINE_CREATION_FEEDBACK_BASE_PIPELINE_ACCELERATION_BIT,
} VkPipelineCreationFeedbackFlagBits;
```

- VK_PIPELINE_CREATION_FEEDBACK_VALID_BIT indicates that the feedback information is valid.
- VK_PIPELINE_CREATION_FEEDBACK_APPLICATION_PIPELINE_CACHE_HIT_BIT indicates that a readily usable pipeline or pipeline stage was found in the pipelineCache specified by the application in the pipeline creation command.

  An implementation **should** set the VK_PIPELINE_CREATION_FEEDBACK_APPLICATION_PIPELINE_CACHE_HIT_BIT bit if it was able to avoid the large majority of pipeline or pipeline stage creation work by using the pipelineCache parameter of vkCreateGraphicsPipelines, or vkCreateComputePipelines. When an implementation sets this bit for the entire pipeline, it **may** leave it unset for any stage.

  NOTE Implementations are encouraged to provide a meaningful signal to applications using this bit. The intention is to communicate to the application that the pipeline or pipeline stage was created “as fast as it gets” using the pipeline cache provided by the application. If an implementation uses an internal cache, it is discouraged from setting this bit as the feedback would be unactionable.

- VK_PIPELINE_CREATION_FEEDBACK_BASE_PIPELINE_ACCELERATION_BIT indicates that the base pipeline specified by the basePipelineHandle or basePipelineIndex member of the Vk*PipelineCreateInfo structure was used to accelerate the creation of the pipeline.

  An implementation **should** set the VK_PIPELINE_CREATION_FEEDBACK_BASE_PIPELINE_ACCELERATION_BIT bit if it was able to avoid a significant amount of work by using the base pipeline.

NOTE	While "significant amount of work" is subjective, implementations are encouraged to provide a meaningful signal to applications using this bit. For example, a 1% reduction in duration may not warrant setting this bit, while a 50% reduction would.

```
// Provided by VK_VERSION_1_3
typedef VkFlags VkPipelineCreationFeedbackFlags;
```

VkPipelineCreationFeedbackFlags is a bitmask type for providing zero or more VkPipelineCreationFeedbackFlagBits.

Chapter 11. Memory Allocation

Vulkan memory is broken up into two categories, *host memory* and *device memory*.

11.1. Host Memory

Host memory is memory needed by the Vulkan implementation for non-device-visible storage.

NOTE	This memory **may** be used to store the implementation's representation and state of Vulkan objects.

Vulkan provides applications the opportunity to perform host memory allocations on behalf of the Vulkan implementation. If this feature is not used, the implementation will perform its own memory allocations. Since most memory allocations are off the critical path, this is not meant as a performance feature. Rather, this **can** be useful for certain embedded systems, for debugging purposes (e.g. putting a guard page after all host allocations), or for memory allocation logging.

Allocators are provided by the application as a pointer to a `VkAllocationCallbacks` structure:

```
// Provided by VK_VERSION_1_0
typedef struct VkAllocationCallbacks {
    void*                                   pUserData;
    PFN_vkAllocationFunction                pfnAllocation;
    PFN_vkReallocationFunction              pfnReallocation;
    PFN_vkFreeFunction                      pfnFree;
    PFN_vkInternalAllocationNotification    pfnInternalAllocation;
    PFN_vkInternalFreeNotification          pfnInternalFree;
} VkAllocationCallbacks;
```

- `pUserData` is a value to be interpreted by the implementation of the callbacks. When any of the callbacks in `VkAllocationCallbacks` are called, the Vulkan implementation will pass this value as the first parameter to the callback. This value **can** vary each time an allocator is passed into a command, even when the same object takes an allocator in multiple commands.
- `pfnAllocation` is a PFN_vkAllocationFunction pointer to an application-defined memory allocation function.
- `pfnReallocation` is a PFN_vkReallocationFunction pointer to an application-defined memory reallocation function.
- `pfnFree` is a PFN_vkFreeFunction pointer to an application-defined memory free function.
- `pfnInternalAllocation` is a PFN_vkInternalAllocationNotification pointer to an application-defined function that is called by the implementation when the implementation makes internal allocations.
- `pfnInternalFree` is a PFN_vkInternalFreeNotification pointer to an application-defined function that is called by the implementation when the implementation frees internal allocations.

Valid Usage

- VUID-VkAllocationCallbacks-pfnAllocation-00632
  `pfnAllocation` **must** be a valid pointer to a valid application-defined PFN_vkAllocationFunction
- VUID-VkAllocationCallbacks-pfnReallocation-00633
  `pfnReallocation` **must** be a valid pointer to a valid application-defined PFN_vkReallocationFunction
- VUID-VkAllocationCallbacks-pfnFree-00634
  `pfnFree` **must** be a valid pointer to a valid application-defined PFN_vkFreeFunction
- VUID-VkAllocationCallbacks-pfnInternalAllocation-00635
  If either of `pfnInternalAllocation` or `pfnInternalFree` is not `NULL`, both **must** be valid callbacks

The type of `pfnAllocation` is:

```
// Provided by VK_VERSION_1_0
typedef void* (VKAPI_PTR *PFN_vkAllocationFunction)(
    void*                                       pUserData,
    size_t                                      size,
    size_t                                      alignment,
    VkSystemAllocationScope                     allocationScope);
```

- `pUserData` is the value specified for VkAllocationCallbacks::`pUserData` in the allocator specified by the application.
- `size` is the size in bytes of the requested allocation.
- `alignment` is the requested alignment of the allocation in bytes and **must** be a power of two.
- `allocationScope` is a VkSystemAllocationScope value specifying the allocation scope of the lifetime of the allocation, as described here.

If `pfnAllocation` is unable to allocate the requested memory, it **must** return `NULL`. If the allocation was successful, it **must** return a valid pointer to memory allocation containing at least `size` bytes, and with the pointer value being a multiple of `alignment`.

NOTE

Correct Vulkan operation **cannot** be assumed if the application does not follow these rules.

For example, `pfnAllocation` (or `pfnReallocation`) could cause termination of running Vulkan instance(s) on a failed allocation for debugging purposes, either directly or indirectly. In these circumstances, it **cannot** be assumed that any part of any affected VkInstance objects are going to operate correctly (even vkDestroyInstance), and the application **must** ensure it cleans up properly via other means (e.g. process termination).

If pfnAllocation returns NULL, and if the implementation is unable to continue correct processing of the current command without the requested allocation, it **must** treat this as a runtime error, and generate VK_ERROR_OUT_OF_HOST_MEMORY at the appropriate time for the command in which the condition was detected, as described in Return Codes.

If the implementation is able to continue correct processing of the current command without the requested allocation, then it **may** do so, and **must** not generate VK_ERROR_OUT_OF_HOST_MEMORY as a result of this failed allocation.

The type of pfnReallocation is:

```
// Provided by VK_VERSION_1_0
typedef void* (VKAPI_PTR *PFN_vkReallocationFunction)(
    void*                                       pUserData,
    void*                                       pOriginal,
    size_t                                      size,
    size_t                                      alignment,
    VkSystemAllocationScope                     allocationScope);
```

- pUserData is the value specified for VkAllocationCallbacks::pUserData in the allocator specified by the application.
- pOriginal **must** be either NULL or a pointer previously returned by pfnReallocation or pfnAllocation of a compatible allocator.
- size is the size in bytes of the requested allocation.
- alignment is the requested alignment of the allocation in bytes and **must** be a power of two.
- allocationScope is a VkSystemAllocationScope value specifying the allocation scope of the lifetime of the allocation, as described here.

If the reallocation was successful, pfnReallocation **must** return an allocation with enough space for size bytes, and the contents of the original allocation from bytes zero to min(original size, new size) - 1 **must** be preserved in the returned allocation. If size is larger than the old size, the contents of the additional space are undefined. If satisfying these requirements involves creating a new allocation, then the old allocation **should** be freed.

If pOriginal is NULL, then pfnReallocation **must** behave equivalently to a call to PFN_vkAllocationFunction with the same parameter values (without pOriginal).

If size is zero, then pfnReallocation **must** behave equivalently to a call to PFN_vkFreeFunction with the same pUserData parameter value, and pMemory equal to pOriginal.

If pOriginal is non-NULL, the implementation **must** ensure that alignment is equal to the alignment used to originally allocate pOriginal.

If this function fails and pOriginal is non-NULL the application **must** not free the old allocation.

pfnReallocation **must** follow the same rules for return values as PFN_vkAllocationFunction.

The type of pfnFree is:

```
// Provided by VK_VERSION_1_0
typedef void (VKAPI_PTR *PFN_vkFreeFunction)(
    void*                                       pUserData,
    void*                                       pMemory);
```

- `pUserData` is the value specified for VkAllocationCallbacks::`pUserData` in the allocator specified by the application.
- `pMemory` is the allocation to be freed.

`pMemory` **may** be `NULL`, which the callback **must** handle safely. If `pMemory` is non-`NULL`, it **must** be a pointer previously allocated by `pfnAllocation` or `pfnReallocation`. The application **should** free this memory.

The type of `pfnInternalAllocation` is:

```
// Provided by VK_VERSION_1_0
typedef void (VKAPI_PTR *PFN_vkInternalAllocationNotification)(
    void*                                       pUserData,
    size_t                                      size,
    VkInternalAllocationType                    allocationType,
    VkSystemAllocationScope                     allocationScope);
```

- `pUserData` is the value specified for VkAllocationCallbacks::`pUserData` in the allocator specified by the application.
- `size` is the requested size of an allocation.
- `allocationType` is a VkInternalAllocationType value specifying the requested type of an allocation.
- `allocationScope` is a VkSystemAllocationScope value specifying the allocation scope of the lifetime of the allocation, as described here.

This is a purely informational callback.

The type of `pfnInternalFree` is:

```
// Provided by VK_VERSION_1_0
typedef void (VKAPI_PTR *PFN_vkInternalFreeNotification)(
    void*                                       pUserData,
    size_t                                      size,
    VkInternalAllocationType                    allocationType,
    VkSystemAllocationScope                     allocationScope);
```

- `pUserData` is the value specified for VkAllocationCallbacks::`pUserData` in the allocator specified by the application.
- `size` is the requested size of an allocation.

- `allocationType` is a VkInternalAllocationType value specifying the requested type of an allocation.
- `allocationScope` is a VkSystemAllocationScope value specifying the allocation scope of the lifetime of the allocation, as described here.

Each allocation has an *allocation scope* defining its lifetime and which object it is associated with. Possible values passed to the `allocationScope` parameter of the callback functions specified by VkAllocationCallbacks, indicating the allocation scope, are:

```
// Provided by VK_VERSION_1_0
typedef enum VkSystemAllocationScope {
    VK_SYSTEM_ALLOCATION_SCOPE_COMMAND = 0,
    VK_SYSTEM_ALLOCATION_SCOPE_OBJECT = 1,
    VK_SYSTEM_ALLOCATION_SCOPE_CACHE = 2,
    VK_SYSTEM_ALLOCATION_SCOPE_DEVICE = 3,
    VK_SYSTEM_ALLOCATION_SCOPE_INSTANCE = 4,
} VkSystemAllocationScope;
```

- `VK_SYSTEM_ALLOCATION_SCOPE_COMMAND` specifies that the allocation is scoped to the duration of the Vulkan command.
- `VK_SYSTEM_ALLOCATION_SCOPE_OBJECT` specifies that the allocation is scoped to the lifetime of the Vulkan object that is being created or used.
- `VK_SYSTEM_ALLOCATION_SCOPE_CACHE` specifies that the allocation is scoped to the lifetime of a `VkPipelineCache` object.
- `VK_SYSTEM_ALLOCATION_SCOPE_DEVICE` specifies that the allocation is scoped to the lifetime of the Vulkan device.
- `VK_SYSTEM_ALLOCATION_SCOPE_INSTANCE` specifies that the allocation is scoped to the lifetime of the Vulkan instance.

Most Vulkan commands operate on a single object, or there is a sole object that is being created or manipulated. When an allocation uses an allocation scope of `VK_SYSTEM_ALLOCATION_SCOPE_OBJECT` or `VK_SYSTEM_ALLOCATION_SCOPE_CACHE`, the allocation is scoped to the object being created or manipulated.

When an implementation requires host memory, it will make callbacks to the application using the most specific allocator and allocation scope available:

- If an allocation is scoped to the duration of a command, the allocator will use the `VK_SYSTEM_ALLOCATION_SCOPE_COMMAND` allocation scope. The most specific allocator available is used: if the object being created or manipulated has an allocator, that object's allocator will be used, else if the parent `VkDevice` has an allocator it will be used, else if the parent `VkInstance` has an allocator it will be used. Else,
- If an allocation is associated with a `VkPipelineCache` object, the allocator will use the `VK_SYSTEM_ALLOCATION_SCOPE_CACHE` allocation scope. The most specific allocator available is used (cache, else device, else instance). Else,

- If an allocation is scoped to the lifetime of an object, that object is being created or manipulated by the command, and that object's type is not `VkDevice` or `VkInstance`, the allocator will use an allocation scope of `VK_SYSTEM_ALLOCATION_SCOPE_OBJECT`. The most specific allocator available is used (object, else device, else instance). Else,
- If an allocation is scoped to the lifetime of a device, the allocator will use an allocation scope of `VK_SYSTEM_ALLOCATION_SCOPE_DEVICE`. The most specific allocator available is used (device, else instance). Else,
- If the allocation is scoped to the lifetime of an instance and the instance has an allocator, its allocator will be used with an allocation scope of `VK_SYSTEM_ALLOCATION_SCOPE_INSTANCE`.
- Otherwise an implementation will allocate memory through an alternative mechanism that is unspecified.

Objects that are allocated from pools do not specify their own allocator. When an implementation requires host memory for such an object, that memory is sourced from the object's parent pool's allocator.

The application is not expected to handle allocating memory that is intended for execution by the host due to the complexities of differing security implementations across multiple platforms. The implementation will allocate such memory internally and invoke an application provided informational callback when these *internal allocations* are allocated and freed. Upon allocation of executable memory, `pfnInternalAllocation` will be called. Upon freeing executable memory, `pfnInternalFree` will be called. An implementation will only call an informational callback for executable memory allocations and frees.

The `allocationType` parameter to the `pfnInternalAllocation` and `pfnInternalFree` functions **may** be one of the following values:

```
// Provided by VK_VERSION_1_0
typedef enum VkInternalAllocationType {
    VK_INTERNAL_ALLOCATION_TYPE_EXECUTABLE = 0,
} VkInternalAllocationType;
```

- `VK_INTERNAL_ALLOCATION_TYPE_EXECUTABLE` specifies that the allocation is intended for execution by the host.

An implementation **must** only make calls into an application-provided allocator during the execution of an API command. An implementation **must** only make calls into an application-provided allocator from the same thread that called the provoking API command. The implementation **should** not synchronize calls to any of the callbacks. If synchronization is needed, the callbacks **must** provide it themselves. The informational callbacks are subject to the same restrictions as the allocation callbacks.

If an implementation intends to make calls through a `VkAllocationCallbacks` structure between the time a `vkCreate*` command returns and the time a corresponding `vkDestroy*` command begins, that implementation **must** save a copy of the allocator before the `vkCreate*` command returns. The callback functions and any data structures they rely upon **must** remain valid for the lifetime of the object they are associated with.

If an allocator is provided to a vkCreate* command, a *compatible* allocator **must** be provided to the corresponding vkDestroy* command. Two VkAllocationCallbacks structures are compatible if memory allocated with pfnAllocation or pfnReallocation in each **can** be freed with pfnReallocation or pfnFree in the other. An allocator **must** not be provided to a vkDestroy* command if an allocator was not provided to the corresponding vkCreate* command.

If a non-NULL allocator is used, the pfnAllocation, pfnReallocation and pfnFree members **must** be non-NULL and point to valid implementations of the callbacks. An application **can** choose to not provide informational callbacks by setting both pfnInternalAllocation and pfnInternalFree to NULL. pfnInternalAllocation and pfnInternalFree **must** either both be NULL or both be non-NULL.

If pfnAllocation or pfnReallocation fail, the implementation **may** fail object creation and/or generate a VK_ERROR_OUT_OF_HOST_MEMORY error, as appropriate.

Allocation callbacks **must** not call any Vulkan commands.

The following sets of rules define when an implementation is permitted to call the allocator callbacks.

pfnAllocation or pfnReallocation **may** be called in the following situations:

- Allocations scoped to a VkDevice or VkInstance **may** be allocated from any API command.
- Allocations scoped to a command **may** be allocated from any API command.
- Allocations scoped to a VkPipelineCache **may** only be allocated from:
  - vkCreatePipelineCache
  - vkMergePipelineCaches for dstCache
  - vkCreateGraphicsPipelines for pipelineCache
  - vkCreateComputePipelines for pipelineCache
- Allocations scoped to a VkDescriptorPool **may** only be allocated from:
  - any command that takes the pool as a direct argument
  - vkAllocateDescriptorSets for the descriptorPool member of its pAllocateInfo parameter
  - vkCreateDescriptorPool
- Allocations scoped to a VkCommandPool **may** only be allocated from:
  - any command that takes the pool as a direct argument
  - vkCreateCommandPool
  - vkAllocateCommandBuffers for the commandPool member of its pAllocateInfo parameter
  - any vkCmd* command whose commandBuffer was allocated from that VkCommandPool
- Allocations scoped to any other object **may** only be allocated in that object's vkCreate* command.

pfnFree, or pfnReallocation with zero size, **may** be called in the following situations:

- Allocations scoped to a VkDevice or VkInstance **may** be freed from any API command.

- Allocations scoped to a command **must** be freed by any API command which allocates such memory.
- Allocations scoped to a `VkPipelineCache` **may** be freed from `vkDestroyPipelineCache`.
- Allocations scoped to a `VkDescriptorPool` **may** be freed from
  - any command that takes the pool as a direct argument
- Allocations scoped to a `VkCommandPool` **may** be freed from:
  - any command that takes the pool as a direct argument
  - `vkResetCommandBuffer` whose `commandBuffer` was allocated from that `VkCommandPool`
- Allocations scoped to any other object **may** be freed in that object's `vkDestroy*` command.
- Any command that allocates host memory **may** also free host memory of the same scope.

11.2. Device Memory

Device memory is memory that is visible to the device — for example the contents of the image or buffer objects, which **can** be natively used by the device.

11.2.1. Device Memory Properties

Memory properties of a physical device describe the memory heaps and memory types available.

To query memory properties, call:

```
// Provided by VK_VERSION_1_0
void vkGetPhysicalDeviceMemoryProperties(
    VkPhysicalDevice                            physicalDevice,
    VkPhysicalDeviceMemoryProperties*           pMemoryProperties);
```

- `physicalDevice` is the handle to the device to query.
- `pMemoryProperties` is a pointer to a VkPhysicalDeviceMemoryProperties structure in which the properties are returned.

Valid Usage (Implicit)

- VUID-vkGetPhysicalDeviceMemoryProperties-physicalDevice-parameter `physicalDevice` **must** be a valid VkPhysicalDevice handle
- VUID-vkGetPhysicalDeviceMemoryProperties-pMemoryProperties-parameter `pMemoryProperties` **must** be a valid pointer to a VkPhysicalDeviceMemoryProperties structure

The `VkPhysicalDeviceMemoryProperties` structure is defined as:

```
// Provided by VK_VERSION_1_0
typedef struct VkPhysicalDeviceMemoryProperties {
    uint32_t        memoryTypeCount;
    VkMemoryType    memoryTypes[VK_MAX_MEMORY_TYPES];
    uint32_t        memoryHeapCount;
    VkMemoryHeap    memoryHeaps[VK_MAX_MEMORY_HEAPS];
} VkPhysicalDeviceMemoryProperties;
```

- `memoryTypeCount` is the number of valid elements in the `memoryTypes` array.
- `memoryTypes` is an array of `VK_MAX_MEMORY_TYPES` VkMemoryType structures describing the *memory types* that **can** be used to access memory allocated from the heaps specified by `memoryHeaps`.
- `memoryHeapCount` is the number of valid elements in the `memoryHeaps` array.
- `memoryHeaps` is an array of `VK_MAX_MEMORY_HEAPS` VkMemoryHeap structures describing the *memory heaps* from which memory **can** be allocated.

The `VkPhysicalDeviceMemoryProperties` structure describes a number of *memory heaps* as well as a number of *memory types* that **can** be used to access memory allocated in those heaps. Each heap describes a memory resource of a particular size, and each memory type describes a set of memory properties (e.g. host cached vs. uncached) that **can** be used with a given memory heap. Allocations using a particular memory type will consume resources from the heap indicated by that memory type's heap index. More than one memory type **may** share each heap, and the heaps and memory types provide a mechanism to advertise an accurate size of the physical memory resources while allowing the memory to be used with a variety of different properties.

The number of memory heaps is given by `memoryHeapCount` and is less than or equal to `VK_MAX_MEMORY_HEAPS`. Each heap is described by an element of the `memoryHeaps` array as a VkMemoryHeap structure. The number of memory types available across all memory heaps is given by `memoryTypeCount` and is less than or equal to `VK_MAX_MEMORY_TYPES`. Each memory type is described by an element of the `memoryTypes` array as a VkMemoryType structure.

At least one heap **must** include `VK_MEMORY_HEAP_DEVICE_LOCAL_BIT` in VkMemoryHeap::`flags`. If there are multiple heaps that all have similar performance characteristics, they **may** all include `VK_MEMORY_HEAP_DEVICE_LOCAL_BIT`. In a unified memory architecture (UMA) system there is often only a single memory heap which is considered to be equally "local" to the host and to the device, and such an implementation **must** advertise the heap as device-local.

Each memory type returned by vkGetPhysicalDeviceMemoryProperties **must** have its `propertyFlags` set to one of the following values:

- 0
- `VK_MEMORY_PROPERTY_HOST_VISIBLE_BIT` | `VK_MEMORY_PROPERTY_HOST_COHERENT_BIT`
- `VK_MEMORY_PROPERTY_HOST_VISIBLE_BIT` | `VK_MEMORY_PROPERTY_HOST_CACHED_BIT`
- `VK_MEMORY_PROPERTY_HOST_VISIBLE_BIT` |

`VK_MEMORY_PROPERTY_HOST_CACHED_BIT` | `VK_MEMORY_PROPERTY_HOST_COHERENT_BIT`

- `VK_MEMORY_PROPERTY_DEVICE_LOCAL_BIT`
- `VK_MEMORY_PROPERTY_DEVICE_LOCAL_BIT` | `VK_MEMORY_PROPERTY_HOST_VISIBLE_BIT` | `VK_MEMORY_PROPERTY_HOST_COHERENT_BIT`
- `VK_MEMORY_PROPERTY_DEVICE_LOCAL_BIT` | `VK_MEMORY_PROPERTY_HOST_VISIBLE_BIT` | `VK_MEMORY_PROPERTY_HOST_CACHED_BIT`
- `VK_MEMORY_PROPERTY_DEVICE_LOCAL_BIT` | `VK_MEMORY_PROPERTY_HOST_VISIBLE_BIT` | `VK_MEMORY_PROPERTY_HOST_CACHED_BIT` | `VK_MEMORY_PROPERTY_HOST_COHERENT_BIT`
- `VK_MEMORY_PROPERTY_DEVICE_LOCAL_BIT` | `VK_MEMORY_PROPERTY_LAZILY_ALLOCATED_BIT`
- `VK_MEMORY_PROPERTY_PROTECTED_BIT`
- `VK_MEMORY_PROPERTY_PROTECTED_BIT` | `VK_MEMORY_PROPERTY_DEVICE_LOCAL_BIT`

There **must** be at least one memory type with both the `VK_MEMORY_PROPERTY_HOST_VISIBLE_BIT` and `VK_MEMORY_PROPERTY_HOST_COHERENT_BIT` bits set in its `propertyFlags`. There **must** be at least one memory type with the `VK_MEMORY_PROPERTY_DEVICE_LOCAL_BIT` bit set in its `propertyFlags`.

For each pair of elements **X** and **Y** returned in `memoryTypes`, **X must** be placed at a lower index position than **Y** if:

- the set of bit flags returned in the `propertyFlags` member of **X** is a strict subset of the set of bit flags returned in the `propertyFlags` member of **Y**; or
- the `propertyFlags` members of **X** and **Y** are equal, and **X** belongs to a memory heap with greater performance (as determined in an implementation-specific manner)

NOTE

There is no ordering requirement between **X** and **Y** elements for the case their `propertyFlags` members are not in a subset relation. That potentially allows more than one possible way to order the same set of memory types. Notice that the list of all allowed memory property flag combinations is written in a valid order. But if instead `VK_MEMORY_PROPERTY_DEVICE_LOCAL_BIT` was before `VK_MEMORY_PROPERTY_HOST_VISIBLE_BIT` | `VK_MEMORY_PROPERTY_HOST_COHERENT_BIT`, the list would still be in a valid order.

This ordering requirement enables applications to use a simple search loop to select the desired memory type along the lines of:

```
// Find a memory in `memoryTypeBitsRequirement` that includes all of
`requiredProperties`
int32_t findProperties(const VkPhysicalDeviceMemoryProperties* pMemoryProperties,
                       uint32_t memoryTypeBitsRequirement,
```

```
                        VkMemoryPropertyFlags requiredProperties) {
    const uint32_t memoryCount = pMemoryProperties->memoryTypeCount;
    for (uint32_t memoryIndex = 0; memoryIndex < memoryCount; ++memoryIndex) {
        const uint32_t memoryTypeBits = (1 << memoryIndex);
        const bool isRequiredMemoryType = memoryTypeBitsRequirement & memoryTypeBits;

        const VkMemoryPropertyFlags properties =
            pMemoryProperties->memoryTypes[memoryIndex].propertyFlags;
        const bool hasRequiredProperties =
            (properties & requiredProperties) == requiredProperties;

        if (isRequiredMemoryType && hasRequiredProperties)
            return static_cast<int32_t>(memoryIndex);
    }

    // failed to find memory type
    return -1;
}

// Try to find an optimal memory type, or if it does not exist try fallback memory
type
// `device` is the VkDevice
// `image` is the VkImage that requires memory to be bound
// `memoryProperties` properties as returned by vkGetPhysicalDeviceMemoryProperties
// `requiredProperties` are the property flags that must be present
// `optimalProperties` are the property flags that are preferred by the application
VkMemoryRequirements memoryRequirements;
vkGetImageMemoryRequirements(device, image, &memoryRequirements);
int32_t memoryType =
    findProperties(&memoryProperties, memoryRequirements.memoryTypeBits,
optimalProperties);
if (memoryType == -1) // not found; try fallback properties
    memoryType =
        findProperties(&memoryProperties, memoryRequirements.memoryTypeBits,
requiredProperties);
```

VK_MAX_MEMORY_TYPES is the length of an array of VkMemoryType structures describing memory types, as returned in VkPhysicalDeviceMemoryProperties::memoryTypes.

```
#define VK_MAX_MEMORY_TYPES             32U
```

VK_MAX_MEMORY_HEAPS is the length of an array of VkMemoryHeap structures describing memory heaps, as returned in VkPhysicalDeviceMemoryProperties::memoryHeaps.

```
#define VK_MAX_MEMORY_HEAPS             16U
```

To query memory properties, call:

```
// Provided by VK_VERSION_1_1
void vkGetPhysicalDeviceMemoryProperties2(
    VkPhysicalDevice                            physicalDevice,
    VkPhysicalDeviceMemoryProperties2*          pMemoryProperties);
```

- `physicalDevice` is the handle to the device to query.
- `pMemoryProperties` is a pointer to a VkPhysicalDeviceMemoryProperties2 structure in which the properties are returned.

`vkGetPhysicalDeviceMemoryProperties2` behaves similarly to vkGetPhysicalDeviceMemoryProperties, with the ability to return extended information in a `pNext` chain of output structures.

Valid Usage (Implicit)

- VUID-vkGetPhysicalDeviceMemoryProperties2-physicalDevice-parameter
  `physicalDevice` **must** be a valid VkPhysicalDevice handle
- VUID-vkGetPhysicalDeviceMemoryProperties2-pMemoryProperties-parameter
  `pMemoryProperties` **must** be a valid pointer to a VkPhysicalDeviceMemoryProperties2 structure

The `VkPhysicalDeviceMemoryProperties2` structure is defined as:

```
// Provided by VK_VERSION_1_1
typedef struct VkPhysicalDeviceMemoryProperties2 {
    VkStructureType                     sType;
    void*                               pNext;
    VkPhysicalDeviceMemoryProperties    memoryProperties;
} VkPhysicalDeviceMemoryProperties2;
```

- `sType` is a VkStructureType value identifying this structure.
- `pNext` is `NULL` or a pointer to a structure extending this structure.
- `memoryProperties` is a VkPhysicalDeviceMemoryProperties structure which is populated with the same values as in vkGetPhysicalDeviceMemoryProperties.

Valid Usage (Implicit)

- VUID-VkPhysicalDeviceMemoryProperties2-sType-sType
  `sType` **must** be `VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_MEMORY_PROPERTIES_2`
- VUID-VkPhysicalDeviceMemoryProperties2-pNext-pNext
  `pNext` **must** be `NULL`

The `VkMemoryHeap` structure is defined as:

```
// Provided by VK_VERSION_1_0
typedef struct VkMemoryHeap {
    VkDeviceSize         size;
    VkMemoryHeapFlags    flags;
} VkMemoryHeap;
```

- `size` is the total memory size in bytes in the heap.
- `flags` is a bitmask of VkMemoryHeapFlagBits specifying attribute flags for the heap.

Bits which **may** be set in VkMemoryHeap::`flags`, indicating attribute flags for the heap, are:

```
// Provided by VK_VERSION_1_0
typedef enum VkMemoryHeapFlagBits {
    VK_MEMORY_HEAP_DEVICE_LOCAL_BIT = 0x00000001,
  // Provided by VK_VERSION_1_1
    VK_MEMORY_HEAP_MULTI_INSTANCE_BIT = 0x00000002,
} VkMemoryHeapFlagBits;
```

- `VK_MEMORY_HEAP_DEVICE_LOCAL_BIT` specifies that the heap corresponds to device-local memory. Device-local memory **may** have different performance characteristics than host-local memory, and **may** support different memory property flags.
- `VK_MEMORY_HEAP_MULTI_INSTANCE_BIT` specifies that in a logical device representing more than one physical device, there is a per-physical device instance of the heap memory. By default, an allocation from such a heap will be replicated to each physical device's instance of the heap.

```
// Provided by VK_VERSION_1_0
typedef VkFlags VkMemoryHeapFlags;
```

`VkMemoryHeapFlags` is a bitmask type for setting a mask of zero or more VkMemoryHeapFlagBits.

The `VkMemoryType` structure is defined as:

```
// Provided by VK_VERSION_1_0
typedef struct VkMemoryType {
    VkMemoryPropertyFlags    propertyFlags;
    uint32_t                 heapIndex;
} VkMemoryType;
```

- `heapIndex` describes which memory heap this memory type corresponds to, and **must** be less than `memoryHeapCount` from the VkPhysicalDeviceMemoryProperties structure.
- `propertyFlags` is a bitmask of VkMemoryPropertyFlagBits of properties for this memory type.

Bits which **may** be set in VkMemoryType::`propertyFlags`, indicating properties of a memory type, are:

```
// Provided by VK_VERSION_1_0
typedef enum VkMemoryPropertyFlagBits {
    VK_MEMORY_PROPERTY_DEVICE_LOCAL_BIT = 0x00000001,
    VK_MEMORY_PROPERTY_HOST_VISIBLE_BIT = 0x00000002,
    VK_MEMORY_PROPERTY_HOST_COHERENT_BIT = 0x00000004,
    VK_MEMORY_PROPERTY_HOST_CACHED_BIT = 0x00000008,
    VK_MEMORY_PROPERTY_LAZILY_ALLOCATED_BIT = 0x00000010,
  // Provided by VK_VERSION_1_1
    VK_MEMORY_PROPERTY_PROTECTED_BIT = 0x00000020,
} VkMemoryPropertyFlagBits;
```

- VK_MEMORY_PROPERTY_DEVICE_LOCAL_BIT bit specifies that memory allocated with this type is the most efficient for device access. This property will be set if and only if the memory type belongs to a heap with the VK_MEMORY_HEAP_DEVICE_LOCAL_BIT set.
- VK_MEMORY_PROPERTY_HOST_VISIBLE_BIT bit specifies that memory allocated with this type **can** be mapped for host access using vkMapMemory.
- VK_MEMORY_PROPERTY_HOST_COHERENT_BIT bit specifies that the host cache management commands vkFlushMappedMemoryRanges and vkInvalidateMappedMemoryRanges are not needed to manage availability and visibility on the host.
- VK_MEMORY_PROPERTY_HOST_CACHED_BIT bit specifies that memory allocated with this type is cached on the host. Host memory accesses to uncached memory are slower than to cached memory, however uncached memory is always host coherent.
- VK_MEMORY_PROPERTY_LAZILY_ALLOCATED_BIT bit specifies that the memory type only allows device access to the memory. Memory types **must** not have both VK_MEMORY_PROPERTY_LAZILY_ALLOCATED_BIT and VK_MEMORY_PROPERTY_HOST_VISIBLE_BIT set. Additionally, the object's backing memory **may** be provided by the implementation lazily as specified in Lazily Allocated Memory.
- VK_MEMORY_PROPERTY_PROTECTED_BIT bit specifies that the memory type only allows device access to the memory, and allows protected queue operations to access the memory. Memory types **must** not have VK_MEMORY_PROPERTY_PROTECTED_BIT set and any of VK_MEMORY_PROPERTY_HOST_VISIBLE_BIT set, or VK_MEMORY_PROPERTY_HOST_COHERENT_BIT set, or VK_MEMORY_PROPERTY_HOST_CACHED_BIT set.

```
// Provided by VK_VERSION_1_0
typedef VkFlags VkMemoryPropertyFlags;
```

VkMemoryPropertyFlags is a bitmask type for setting a mask of zero or more VkMemoryPropertyFlagBits.

11.2.2. Device Memory Objects

A Vulkan device operates on data in device memory via memory objects that are represented in the API by a VkDeviceMemory handle:

```
// Provided by VK_VERSION_1_0
VK_DEFINE_NON_DISPATCHABLE_HANDLE(VkDeviceMemory)
```

11.2.3. Device Memory Allocation

To allocate memory objects, call:

```
// Provided by VK_VERSION_1_0
VkResult vkAllocateMemory(
    VkDevice                                    device,
    const VkMemoryAllocateInfo*                 pAllocateInfo,
    const VkAllocationCallbacks*                pAllocator,
    VkDeviceMemory*                             pMemory);
```

- `device` is the logical device that owns the memory.
- `pAllocateInfo` is a pointer to a VkMemoryAllocateInfo structure describing parameters of the allocation. A successfully returned allocation **must** use the requested parameters — no substitution is permitted by the implementation.
- `pAllocator` controls host memory allocation as described in the Memory Allocation chapter.
- `pMemory` is a pointer to a VkDeviceMemory handle in which information about the allocated memory is returned.

Allocations returned by `vkAllocateMemory` are guaranteed to meet any alignment requirement of the implementation. For example, if an implementation requires 128 byte alignment for images and 64 byte alignment for buffers, the device memory returned through this mechanism would be 128-byte aligned. This ensures that applications **can** correctly suballocate objects of different types (with potentially different alignment requirements) in the same memory object.

When memory is allocated, its contents are undefined with the following constraint:

- The contents of unprotected memory **must** not be a function of the contents of data protected memory objects, even if those memory objects were previously freed.

NOTE The contents of memory allocated by one application **should** not be a function of data from protected memory objects of another application, even if those memory objects were previously freed.

The maximum number of valid memory allocations that **can** exist simultaneously within a VkDevice **may** be restricted by implementation- or platform-dependent limits. The `maxMemoryAllocationCount` feature describes the number of allocations that **can** exist simultaneously before encountering these internal limits.

NOTE For historical reasons, if `maxMemoryAllocationCount` is exceeded, some implementations may return `VK_ERROR_TOO_MANY_OBJECTS`. Exceeding this limit will result in undefined behavior, and an application should not rely on the use of the

returned error code in order to identify when the limit is reached.

NOTE

Many protected memory implementations involve complex hardware and system software support, and often have additional and much lower limits on the number of simultaneous protected memory allocations (from memory types with the VK_MEMORY_PROPERTY_PROTECTED_BIT property) than for non-protected memory allocations. These limits can be system-wide, and depend on a variety of factors outside of the Vulkan implementation, so they cannot be queried in Vulkan. Applications **should** use as few allocations as possible from such memory types by suballocating aggressively, and be prepared for allocation failure even when there is apparently plenty of capacity remaining in the memory heap. As a guideline, the Vulkan conformance test suite requires that at least 80 minimum-size allocations can exist concurrently when no other uses of protected memory are active in the system.

Some platforms **may** have a limit on the maximum size of a single allocation. For example, certain systems **may** fail to create allocations with a size greater than or equal to 4GB. Such a limit is implementation-dependent, and if such a failure occurs then the error VK_ERROR_OUT_OF_DEVICE_MEMORY **must** be returned.

Valid Usage

- VUID-vkAllocateMemory-pAllocateInfo-01713
  pAllocateInfo->allocationSize **must** be less than or equal to VkPhysicalDeviceMemoryProperties::memoryHeaps[memindex].size where memindex = VkPhysicalDeviceMemoryProperties::memoryTypes[pAllocateInfo->memoryTypeIndex].heapIndex as returned by vkGetPhysicalDeviceMemoryProperties for the VkPhysicalDevice that device was created from
- VUID-vkAllocateMemory-pAllocateInfo-01714
  pAllocateInfo->memoryTypeIndex **must** be less than VkPhysicalDeviceMemoryProperties ::memoryTypeCount as returned by vkGetPhysicalDeviceMemoryProperties for the VkPhysicalDevice that device was created from
- VUID-vkAllocateMemory-maxMemoryAllocationCount-04101
  There **must** be less than VkPhysicalDeviceLimits::maxMemoryAllocationCount device memory allocations currently allocated on the device

Valid Usage (Implicit)

- VUID-vkAllocateMemory-device-parameter
  device **must** be a valid VkDevice handle
- VUID-vkAllocateMemory-pAllocateInfo-parameter
  pAllocateInfo **must** be a valid pointer to a valid VkMemoryAllocateInfo structure
- VUID-vkAllocateMemory-pAllocator-parameter
  If pAllocator is not NULL, pAllocator **must** be a valid pointer to a valid

VkAllocationCallbacks structure

- VUID-vkAllocateMemory-pMemory-parameter
  pMemory **must** be a valid pointer to a VkDeviceMemory handle

Return Codes

Success

- VK_SUCCESS

Failure

- VK_ERROR_OUT_OF_HOST_MEMORY
- VK_ERROR_OUT_OF_DEVICE_MEMORY
- VK_ERROR_INVALID_EXTERNAL_HANDLE

The VkMemoryAllocateInfo structure is defined as:

```
// Provided by VK_VERSION_1_0
typedef struct VkMemoryAllocateInfo {
    VkStructureType    sType;
    const void*        pNext;
    VkDeviceSize       allocationSize;
    uint32_t           memoryTypeIndex;
} VkMemoryAllocateInfo;
```

- sType is a VkStructureType value identifying this structure.
- pNext is NULL or a pointer to a structure extending this structure.
- allocationSize is the size of the allocation in bytes.
- memoryTypeIndex is an index identifying a memory type from the memoryTypes array of the VkPhysicalDeviceMemoryProperties structure.

The internal data of an allocated device memory object **must** include a reference to implementation-specific resources, referred to as the memory object's *payload*.

Valid Usage

- VUID-VkMemoryAllocateInfo-allocationSize-07897
  allocationSize **must** be greater than 0
- VUID-VkMemoryAllocateInfo-memoryTypeIndex-01872
  If the protectedMemory feature is not enabled, the VkMemoryAllocateInfo::memoryTypeIndex **must** not indicate a memory type that reports VK_MEMORY_PROPERTY_PROTECTED_BIT
- VUID-VkMemoryAllocateInfo-opaqueCaptureAddress-03329
  If VkMemoryOpaqueCaptureAddressAllocateInfo::opaqueCaptureAddress is not zero, VkMemoryAllocateFlagsInfo::flags **must** include

VK_MEMORY_ALLOCATE_DEVICE_ADDRESS_CAPTURE_REPLAY_BIT

- VUID-VkMemoryAllocateInfo-flags-03330
  If VkMemoryAllocateFlagsInfo::flags includes VK_MEMORY_ALLOCATE_DEVICE_ADDRESS_CAPTURE_REPLAY_BIT, the bufferDeviceAddressCaptureReplay feature **must** be enabled
- VUID-VkMemoryAllocateInfo-flags-03331
  If VkMemoryAllocateFlagsInfo::flags includes VK_MEMORY_ALLOCATE_DEVICE_ADDRESS_BIT, the bufferDeviceAddress feature **must** be enabled
- VUID-VkMemoryAllocateInfo-opaqueCaptureAddress-03333
  If the parameters define an import operation, VkMemoryOpaqueCaptureAddressAllocateInfo::opaqueCaptureAddress **must** be zero

Valid Usage (Implicit)

- VUID-VkMemoryAllocateInfo-sType-sType
  sType **must** be VK_STRUCTURE_TYPE_MEMORY_ALLOCATE_INFO
- VUID-VkMemoryAllocateInfo-pNext-pNext
  Each pNext member of any structure (including this one) in the pNext chain **must** be either NULL or a pointer to a valid instance of VkExportMemoryAllocateInfo, VkMemoryAllocateFlagsInfo, VkMemoryDedicatedAllocateInfo, or VkMemoryOpaqueCaptureAddressAllocateInfo
- VUID-VkMemoryAllocateInfo-sType-unique
  The sType value of each struct in the pNext chain **must** be unique

If the pNext chain includes a VkMemoryDedicatedAllocateInfo structure, then that structure includes a handle of the sole buffer or image resource that the memory **can** be bound to.

The VkMemoryDedicatedAllocateInfo structure is defined as:

```
// Provided by VK_VERSION_1_1
typedef struct VkMemoryDedicatedAllocateInfo {
    VkStructureType    sType;
    const void*        pNext;
    VkImage            image;
    VkBuffer           buffer;
} VkMemoryDedicatedAllocateInfo;
```

- sType is a VkStructureType value identifying this structure.
- pNext is NULL or a pointer to a structure extending this structure.
- image is VK_NULL_HANDLE or a handle of an image which this memory will be bound to.
- buffer is VK_NULL_HANDLE or a handle of a buffer which this memory will be bound to.

Valid Usage

- VUID-VkMemoryDedicatedAllocateInfo-image-01432
  At least one of `image` and `buffer` **must** be VK_NULL_HANDLE
- VUID-VkMemoryDedicatedAllocateInfo-image-02964
  If `image` is not VK_NULL_HANDLE , `VkMemoryAllocateInfo`::`allocationSize` **must** equal the `VkMemoryRequirements`::`size` of the image
- VUID-VkMemoryDedicatedAllocateInfo-image-01434
  If `image` is not VK_NULL_HANDLE, `image` **must** have been created without `VK_IMAGE_CREATE_SPARSE_BINDING_BIT` set in VkImageCreateInfo::`flags`
- VUID-VkMemoryDedicatedAllocateInfo-buffer-02965
  If `buffer` is not VK_NULL_HANDLE , `VkMemoryAllocateInfo`::`allocationSize` **must** equal the `VkMemoryRequirements`::`size` of the buffer
- VUID-VkMemoryDedicatedAllocateInfo-buffer-01436
  If `buffer` is not VK_NULL_HANDLE, `buffer` **must** have been created without `VK_BUFFER_CREATE_SPARSE_BINDING_BIT` set in VkBufferCreateInfo::`flags`

Valid Usage (Implicit)

- VUID-VkMemoryDedicatedAllocateInfo-sType-sType
  `sType` **must** be `VK_STRUCTURE_TYPE_MEMORY_DEDICATED_ALLOCATE_INFO`
- VUID-VkMemoryDedicatedAllocateInfo-image-parameter
  If `image` is not VK_NULL_HANDLE, `image` **must** be a valid VkImage handle
- VUID-VkMemoryDedicatedAllocateInfo-buffer-parameter
  If `buffer` is not VK_NULL_HANDLE, `buffer` **must** be a valid VkBuffer handle
- VUID-VkMemoryDedicatedAllocateInfo-commonparent
  Both of `buffer`, and `image` that are valid handles of non-ignored parameters **must** have been created, allocated, or retrieved from the same VkDevice

When allocating memory whose payload **may** be exported to another process or Vulkan instance, add a VkExportMemoryAllocateInfo structure to the `pNext` chain of the VkMemoryAllocateInfo structure, specifying the handle types that **may** be exported.

The VkExportMemoryAllocateInfo structure is defined as:

```
// Provided by VK_VERSION_1_1
typedef struct VkExportMemoryAllocateInfo {
    VkStructureType                    sType;
    const void*                        pNext;
    VkExternalMemoryHandleTypeFlags    handleTypes;
} VkExportMemoryAllocateInfo;
```

- `sType` is a VkStructureType value identifying this structure.
- `pNext` is `NULL` or a pointer to a structure extending this structure.
- `handleTypes` is zero or a bitmask of VkExternalMemoryHandleTypeFlagBits specifying one or more memory handle types the application **can** export from the resulting allocation. The application **can** request multiple handle types for the same allocation.

Valid Usage

- VUID-VkExportMemoryAllocateInfo-handleTypes-00656
  The bits in `handleTypes` **must** be supported and compatible, as reported by VkExternalImageFormatProperties or VkExternalBufferProperties

Valid Usage (Implicit)

- VUID-VkExportMemoryAllocateInfo-sType-sType
  `sType` **must** be `VK_STRUCTURE_TYPE_EXPORT_MEMORY_ALLOCATE_INFO`
- VUID-VkExportMemoryAllocateInfo-handleTypes-parameter
  `handleTypes` **must** be a valid combination of VkExternalMemoryHandleTypeFlagBits values

11.2.4. Device Group Memory Allocations

If the `pNext` chain of VkMemoryAllocateInfo includes a `VkMemoryAllocateFlagsInfo` structure, then that structure includes flags and a device mask controlling how many instances of the memory will be allocated.

The `VkMemoryAllocateFlagsInfo` structure is defined as:

```
// Provided by VK_VERSION_1_1
typedef struct VkMemoryAllocateFlagsInfo {
    VkStructureType          sType;
    const void*              pNext;
    VkMemoryAllocateFlags    flags;
    uint32_t                 deviceMask;
} VkMemoryAllocateFlagsInfo;
```

- `sType` is a VkStructureType value identifying this structure.
- `pNext` is `NULL` or a pointer to a structure extending this structure.
- `flags` is a bitmask of VkMemoryAllocateFlagBits controlling the allocation.
- `deviceMask` is a mask of physical devices in the logical device, indicating that memory **must** be allocated on each device in the mask, if `VK_MEMORY_ALLOCATE_DEVICE_MASK_BIT` is set in `flags`.

If `VK_MEMORY_ALLOCATE_DEVICE_MASK_BIT` is not set, the number of instances allocated depends on

whether VK_MEMORY_HEAP_MULTI_INSTANCE_BIT is set in the memory heap. If VK_MEMORY_HEAP_MULTI_INSTANCE_BIT is set, then memory is allocated for every physical device in the logical device (as if deviceMask has bits set for all device indices). If VK_MEMORY_HEAP_MULTI_INSTANCE_BIT is not set, then a single instance of memory is allocated (as if deviceMask is set to one).

On some implementations, allocations from a multi-instance heap **may** consume memory on all physical devices even if the deviceMask excludes some devices. If VkPhysicalDeviceGroupProperties::subsetAllocation is VK_TRUE, then memory is only consumed for the devices in the device mask.

NOTE	In practice, most allocations on a multi-instance heap will be allocated across all physical devices. Unicast allocation support is an optional optimization for a minority of allocations.

Valid Usage

- VUID-VkMemoryAllocateFlagsInfo-deviceMask-00675
  If VK_MEMORY_ALLOCATE_DEVICE_MASK_BIT is set, deviceMask **must** be a valid device mask
- VUID-VkMemoryAllocateFlagsInfo-deviceMask-00676
  If VK_MEMORY_ALLOCATE_DEVICE_MASK_BIT is set, deviceMask **must** not be zero

Valid Usage (Implicit)

- VUID-VkMemoryAllocateFlagsInfo-sType-sType
  sType **must** be VK_STRUCTURE_TYPE_MEMORY_ALLOCATE_FLAGS_INFO
- VUID-VkMemoryAllocateFlagsInfo-flags-parameter
  flags **must** be a valid combination of VkMemoryAllocateFlagBits values

Bits which **can** be set in VkMemoryAllocateFlagsInfo::flags, controlling device memory allocation, are:

```
// Provided by VK_VERSION_1_1
typedef enum VkMemoryAllocateFlagBits {
    VK_MEMORY_ALLOCATE_DEVICE_MASK_BIT = 0x00000001,
  // Provided by VK_VERSION_1_2
    VK_MEMORY_ALLOCATE_DEVICE_ADDRESS_BIT = 0x00000002,
  // Provided by VK_VERSION_1_2
    VK_MEMORY_ALLOCATE_DEVICE_ADDRESS_CAPTURE_REPLAY_BIT = 0x00000004,
} VkMemoryAllocateFlagBits;
```

- VK_MEMORY_ALLOCATE_DEVICE_MASK_BIT specifies that memory will be allocated for the devices in VkMemoryAllocateFlagsInfo::deviceMask.
- VK_MEMORY_ALLOCATE_DEVICE_ADDRESS_BIT specifies that the memory **can** be attached to a buffer

object created with the VK_BUFFER_USAGE_SHADER_DEVICE_ADDRESS_BIT bit set in usage, and that the memory handle **can** be used to retrieve an opaque address via vkGetDeviceMemoryOpaqueCaptureAddress.

- VK_MEMORY_ALLOCATE_DEVICE_ADDRESS_CAPTURE_REPLAY_BIT specifies that the memory's address **can** be saved and reused on a subsequent run (e.g. for trace capture and replay), see VkBufferOpaqueCaptureAddressCreateInfo for more detail.

```
// Provided by VK_VERSION_1_1
typedef VkFlags VkMemoryAllocateFlags;
```

VkMemoryAllocateFlags is a bitmask type for setting a mask of zero or more VkMemoryAllocateFlagBits.

11.2.5. Opaque Capture Address Allocation

To request a specific device address for a memory allocation, add a VkMemoryOpaqueCaptureAddressAllocateInfo structure to the pNext chain of the VkMemoryAllocateInfo structure. The VkMemoryOpaqueCaptureAddressAllocateInfo structure is defined as:

```
// Provided by VK_VERSION_1_2
typedef struct VkMemoryOpaqueCaptureAddressAllocateInfo {
    VkStructureType    sType;
    const void*        pNext;
    uint64_t           opaqueCaptureAddress;
} VkMemoryOpaqueCaptureAddressAllocateInfo;
```

- sType is a VkStructureType value identifying this structure.
- pNext is NULL or a pointer to a structure extending this structure.
- opaqueCaptureAddress is the opaque capture address requested for the memory allocation.

If opaqueCaptureAddress is zero, no specific address is requested.

If opaqueCaptureAddress is not zero, it **should** be an address retrieved from vkGetDeviceMemoryOpaqueCaptureAddress on an identically created memory allocation on the same implementation.

NOTE

In most cases, it is expected that a non-zero opaqueAddress is an address retrieved from vkGetDeviceMemoryOpaqueCaptureAddress on an identically created memory allocation. If this is not the case, it is likely that VK_ERROR_INVALID_OPAQUE_CAPTURE_ADDRESS errors will occur.

This is, however, not a strict requirement because trace capture/replay tools may need to adjust memory allocation parameters for imported memory.

If this structure is not present, it is as if opaqueCaptureAddress is zero.

Valid Usage (Implicit)

- VUID-VkMemoryOpaqueCaptureAddressAllocateInfo-sType-sType
  `sType` **must** be `VK_STRUCTURE_TYPE_MEMORY_OPAQUE_CAPTURE_ADDRESS_ALLOCATE_INFO`

11.2.6. Freeing Device Memory

To free a memory object, call:

```
// Provided by VK_VERSION_1_0
void vkFreeMemory(
    VkDevice                                    device,
    VkDeviceMemory                              memory,
    const VkAllocationCallbacks*                pAllocator);
```

- `device` is the logical device that owns the memory.
- `memory` is the VkDeviceMemory object to be freed.
- `pAllocator` controls host memory allocation as described in the Memory Allocation chapter.

Before freeing a memory object, an application **must** ensure the memory object is no longer in use by the device — for example by command buffers in the *pending state*. Memory **can** be freed whilst still bound to resources, but those resources **must** not be used afterwards. Freeing a memory object releases the reference it held, if any, to its payload. If there are still any bound images or buffers, the memory object's payload **may** not be immediately released by the implementation, but **must** be released by the time all bound images and buffers have been destroyed. Once all references to a payload are released, it is returned to the heap from which it was allocated.

How memory objects are bound to Images and Buffers is described in detail in the Resource Memory Association section.

If a memory object is mapped at the time it is freed, it is implicitly unmapped.

NOTE As described below, host writes are not implicitly flushed when the memory object is unmapped, but the implementation **must** guarantee that writes that have not been flushed do not affect any other memory.

Valid Usage

- VUID-vkFreeMemory-memory-00677
  All submitted commands that refer to `memory` (via images or buffers) **must** have completed execution

Valid Usage (Implicit)

- VUID-vkFreeMemory-device-parameter
  `device` **must** be a valid VkDevice handle
- VUID-vkFreeMemory-memory-parameter
  If `memory` is not VK_NULL_HANDLE, `memory` **must** be a valid VkDeviceMemory handle
- VUID-vkFreeMemory-pAllocator-parameter
  If `pAllocator` is not `NULL`, `pAllocator` **must** be a valid pointer to a valid VkAllocationCallbacks structure
- VUID-vkFreeMemory-memory-parent
  If `memory` is a valid handle, it **must** have been created, allocated, or retrieved from `device`

Host Synchronization

- Host access to `memory` **must** be externally synchronized

11.2.7. Host Access to Device Memory Objects

Memory objects created with vkAllocateMemory are not directly host accessible.

Memory objects created with the memory property `VK_MEMORY_PROPERTY_HOST_VISIBLE_BIT` are considered *mappable*. Memory objects **must** be mappable in order to be successfully mapped on the host.

To retrieve a host virtual address pointer to a region of a mappable memory object, call:

```
// Provided by VK_VERSION_1_0
VkResult vkMapMemory(
    VkDevice                                    device,
    VkDeviceMemory                              memory,
    VkDeviceSize                                offset,
    VkDeviceSize                                size,
    VkMemoryMapFlags                            flags,
    void**                                      ppData);
```

- `device` is the logical device that owns the memory.
- `memory` is the VkDeviceMemory object to be mapped.
- `offset` is a zero-based byte offset from the beginning of the memory object.
- `size` is the size of the memory range to map, or `VK_WHOLE_SIZE` to map from `offset` to the end of the allocation.
- `flags` is reserved for future use.
- `ppData` is a pointer to a `void*` variable in which a host-accessible pointer to the beginning of the

mapped range is returned. The value of the returned pointer minus `offset` **must** be aligned to VkPhysicalDeviceLimits::`minMemoryMapAlignment`.

After a successful call to `vkMapMemory` the memory object `memory` is considered to be currently *host mapped*.

NOTE It is an application error to call `vkMapMemory` on a memory object that is already *host mapped*.

NOTE `vkMapMemory` will fail if the implementation is unable to allocate an appropriately sized contiguous virtual address range, e.g. due to virtual address space fragmentation or platform limits. In such cases, `vkMapMemory` **must** return `VK_ERROR_MEMORY_MAP_FAILED`. The application **can** improve the likelihood of success by reducing the size of the mapped range and/or removing unneeded mappings using vkUnmapMemory.

`vkMapMemory` does not check whether the device memory is currently in use before returning the host-accessible pointer. The application **must** guarantee that any previously submitted command that writes to this range has completed before the host reads from or writes to that range, and that any previously submitted command that reads from that range has completed before the host writes to that region (see here for details on fulfilling such a guarantee). If the device memory was allocated without the `VK_MEMORY_PROPERTY_HOST_COHERENT_BIT` set, these guarantees **must** be made for an extended range: the application **must** round down the start of the range to the nearest multiple of VkPhysicalDeviceLimits::`nonCoherentAtomSize`, and round the end of the range up to the nearest multiple of VkPhysicalDeviceLimits::`nonCoherentAtomSize`.

While a range of device memory is host mapped, the application is responsible for synchronizing both device and host access to that memory range.

NOTE It is important for the application developer to become meticulously familiar with all of the mechanisms described in the chapter on Synchronization and Cache Control as they are crucial to maintaining memory access ordering.

Valid Usage

- VUID-vkMapMemory-memory-00678
  `memory` **must** not be currently host mapped
- VUID-vkMapMemory-offset-00679
  `offset` **must** be less than the size of `memory`
- VUID-vkMapMemory-size-00680
  If `size` is not equal to `VK_WHOLE_SIZE`, `size` **must** be greater than `0`
- VUID-vkMapMemory-size-00681
  If `size` is not equal to `VK_WHOLE_SIZE`, `size` **must** be less than or equal to the size of the `memory` minus `offset`
- VUID-vkMapMemory-memory-00682
  `memory` **must** have been created with a memory type that reports

VK_MEMORY_PROPERTY_HOST_VISIBLE_BIT

Valid Usage (Implicit)

- VUID-vkMapMemory-device-parameter
  device **must** be a valid VkDevice handle
- VUID-vkMapMemory-memory-parameter
  memory **must** be a valid VkDeviceMemory handle
- VUID-vkMapMemory-flags-zerobitmask
  flags **must** be 0
- VUID-vkMapMemory-ppData-parameter
  ppData **must** be a valid pointer to a pointer value
- VUID-vkMapMemory-memory-parent
  memory **must** have been created, allocated, or retrieved from device

Host Synchronization

- Host access to memory **must** be externally synchronized

Return Codes

Success

- VK_SUCCESS

Failure

- VK_ERROR_OUT_OF_HOST_MEMORY
- VK_ERROR_OUT_OF_DEVICE_MEMORY
- VK_ERROR_MEMORY_MAP_FAILED

```
// Provided by VK_VERSION_1_0
typedef VkFlags VkMemoryMapFlags;
```

VkMemoryMapFlags is a bitmask type for setting a mask of zero or more VkMemoryMapFlagBits.

Two commands are provided to enable applications to work with non-coherent memory allocations: vkFlushMappedMemoryRanges and vkInvalidateMappedMemoryRanges.

NOTE

If the memory object was created with the VK_MEMORY_PROPERTY_HOST_COHERENT_BIT set, vkFlushMappedMemoryRanges and vkInvalidateMappedMemoryRanges are unnecessary and **may** have a performance cost. However, availability and visibility operations still need to be managed on the device. See the description of host access types for

more information.

After a successful call to vkMapMemory the memory object memory is considered to be currently *host mapped*.

To flush ranges of non-coherent memory from the host caches, call:

```
// Provided by VK_VERSION_1_0
VkResult vkFlushMappedMemoryRanges(
    VkDevice                                    device,
    uint32_t                                    memoryRangeCount,
    const VkMappedMemoryRange*                  pMemoryRanges);
```

- device is the logical device that owns the memory ranges.
- memoryRangeCount is the length of the pMemoryRanges array.
- pMemoryRanges is a pointer to an array of VkMappedMemoryRange structures describing the memory ranges to flush.

vkFlushMappedMemoryRanges guarantees that host writes to the memory ranges described by pMemoryRanges are made available to the host memory domain, such that they **can** be made available to the device memory domain via memory domain operations using the VK_ACCESS_HOST_WRITE_BIT access type.

The first synchronization scope includes all host operations that happened-before it, as defined by the host memory model.

NOTE

Note

Some systems allow writes that do not directly integrate with the host memory model; these have to be synchronized by the application manually. One example of this is non-temporal store instructions on x86; to ensure these happen-before submission, applications should call _mm_sfence().

The second synchronization scope is empty.

The first access scope includes host writes to the specified memory ranges.

NOTE

Note

When a host write to a memory location is made available in this way, each whole aligned set of nonCoherentAtomSize bytes that the memory location exists in will also be made available as if they were written by the host. For example, with a nonCoherentAtomSize of 128, if an application writes to the first byte of a memory object via a host mapping, the first 128 bytes of the memory object will be made available by this command. While the value of the following 127 bytes will be unchanged, this does count as an access for the purpose of synchronization, so care must be taken to avoid data races.

The second access scope is empty.

Unmapping non-coherent memory does not implicitly flush the host mapped memory, and host writes that have not been flushed **may** not ever be visible to the device. However, implementations **must** ensure that writes that have not been flushed do not become visible to any other memory.

NOTE	The above guarantee avoids a potential memory corruption in scenarios where host writes to a mapped memory object have not been flushed before the memory is unmapped (or freed), and the virtual address range is subsequently reused for a different mapping (or memory allocation).

Valid Usage (Implicit)

- VUID-vkFlushMappedMemoryRanges-device-parameter
  `device` **must** be a valid VkDevice handle
- VUID-vkFlushMappedMemoryRanges-pMemoryRanges-parameter
  `pMemoryRanges` **must** be a valid pointer to an array of `memoryRangeCount` valid VkMappedMemoryRange structures
- VUID-vkFlushMappedMemoryRanges-memoryRangeCount-arraylength
  `memoryRangeCount` **must** be greater than `0`

Return Codes

Success

- `VK_SUCCESS`

Failure

- `VK_ERROR_OUT_OF_HOST_MEMORY`
- `VK_ERROR_OUT_OF_DEVICE_MEMORY`

To invalidate ranges of non-coherent memory from the host caches, call:

```
// Provided by VK_VERSION_1_0
VkResult vkInvalidateMappedMemoryRanges(
    VkDevice                                    device,
    uint32_t                                    memoryRangeCount,
    const VkMappedMemoryRange*                  pMemoryRanges);
```

- `device` is the logical device that owns the memory ranges.
- `memoryRangeCount` is the length of the `pMemoryRanges` array.
- `pMemoryRanges` is a pointer to an array of VkMappedMemoryRange structures describing the memory ranges to invalidate.

`vkInvalidateMappedMemoryRanges` guarantees that device writes to the memory ranges described by `pMemoryRanges`, which have been made available to the host memory domain using the

VK_ACCESS_HOST_WRITE_BIT and VK_ACCESS_HOST_READ_BIT access types, are made visible to the host. If a range of non-coherent memory is written by the host and then invalidated without first being flushed, its contents are undefined.

The first synchronization scope includes all host operations that happened-before it, as defined by the host memory model.

NOTE

Note

This function does not synchronize with device operations directly - other host synchronization operations that depend on device operations such as vkWaitForFences must be executed beforehand. So for any non-coherent device write to be made visible to the host, there has to be a dependency chain along the following lines:

1. Device write
2. Device memory barrier including host reads in its second scope
3. Signal on the device (e.g. a fence signal operation)
4. Wait on the host (e.g. vkWaitForFences)
5. vkInvalidateMappedMemoryRanges

The second synchronization scope includes all host operations that happen-after it, as defined by the host memory model.

The first access scope is empty.

The second access scope includes host reads to the specified memory ranges.

NOTE

Note

When a device write to a memory location is made visible to the host in this way, each whole aligned set of nonCoherentAtomSize bytes that the memory location exists in will also be made visible as if they were written by the device. For example, with a nonCoherentAtomSize of 128, if an application writes to the first byte of a memory object on the device, the first 128 bytes of the memory object will be made visible by this command. While the value of the following 127 bytes will be unchanged, this does count as an access for the purpose of synchronization, so care must be taken to avoid data races.

NOTE Mapping non-coherent memory does not implicitly invalidate that memory.

Valid Usage (Implicit)

- VUID-vkInvalidateMappedMemoryRanges-device-parameter
  device **must** be a valid VkDevice handle
- VUID-vkInvalidateMappedMemoryRanges-pMemoryRanges-parameter
  pMemoryRanges **must** be a valid pointer to an array of memoryRangeCount valid

VkMappedMemoryRange structures

- VUID-vkInvalidateMappedMemoryRanges-memoryRangeCount-arraylength
  `memoryRangeCount` **must** be greater than `0`

Return Codes

Success

- `VK_SUCCESS`

Failure

- `VK_ERROR_OUT_OF_HOST_MEMORY`
- `VK_ERROR_OUT_OF_DEVICE_MEMORY`

The `VkMappedMemoryRange` structure is defined as:

```
// Provided by VK_VERSION_1_0
typedef struct VkMappedMemoryRange {
    VkStructureType    sType;
    const void*        pNext;
    VkDeviceMemory     memory;
    VkDeviceSize       offset;
    VkDeviceSize       size;
} VkMappedMemoryRange;
```

- `sType` is a VkStructureType value identifying this structure.
- `pNext` is `NULL` or a pointer to a structure extending this structure.
- `memory` is the memory object to which this range belongs.
- `offset` is the zero-based byte offset from the beginning of the memory object.
- `size` is either the size of range, or `VK_WHOLE_SIZE` to affect the range from `offset` to the end of the current mapping of the allocation.

Valid Usage

- VUID-VkMappedMemoryRange-memory-00684
  `memory` **must** be currently host mapped
- VUID-VkMappedMemoryRange-size-00685
  If `size` is not equal to `VK_WHOLE_SIZE`, `offset` and `size` **must** specify a range contained within the currently mapped range of `memory`
- VUID-VkMappedMemoryRange-size-00686
  If `size` is equal to `VK_WHOLE_SIZE`, `offset` **must** be within the currently mapped range of `memory`
- VUID-VkMappedMemoryRange-offset-00687

`offset` **must** be a multiple of VkPhysicalDeviceLimits::`nonCoherentAtomSize`

- VUID-VkMappedMemoryRange-size-01389
  If `size` is equal to `VK_WHOLE_SIZE`, the end of the current mapping of `memory` **must** either be a multiple of VkPhysicalDeviceLimits::`nonCoherentAtomSize` bytes from the beginning of the memory object, or be equal to the end of the memory object
- VUID-VkMappedMemoryRange-size-01390
  If `size` is not equal to `VK_WHOLE_SIZE`, `size` **must** either be a multiple of VkPhysicalDeviceLimits::`nonCoherentAtomSize`, or `offset` plus `size` **must** equal the size of `memory`

Valid Usage (Implicit)

- VUID-VkMappedMemoryRange-sType-sType
  `sType` **must** be `VK_STRUCTURE_TYPE_MAPPED_MEMORY_RANGE`
- VUID-VkMappedMemoryRange-pNext-pNext
  `pNext` **must** be `NULL`
- VUID-VkMappedMemoryRange-memory-parameter
  `memory` **must** be a valid VkDeviceMemory handle

To unmap a memory object once host access to it is no longer needed by the application, call:

```
// Provided by VK_VERSION_1_0
void vkUnmapMemory(
    VkDevice                                    device,
    VkDeviceMemory                              memory);
```

- `device` is the logical device that owns the memory.
- `memory` is the memory object to be unmapped.

Valid Usage

- VUID-vkUnmapMemory-memory-00689
  `memory` **must** be currently host mapped

Valid Usage (Implicit)

- VUID-vkUnmapMemory-device-parameter
  `device` **must** be a valid VkDevice handle
- VUID-vkUnmapMemory-memory-parameter
  `memory` **must** be a valid VkDeviceMemory handle
- VUID-vkUnmapMemory-memory-parent

`memory` **must** have been created, allocated, or retrieved from `device`

Host Synchronization

- Host access to `memory` **must** be externally synchronized

11.2.8. Lazily Allocated Memory

If the memory object is allocated from a heap with the `VK_MEMORY_PROPERTY_LAZILY_ALLOCATED_BIT` bit set, that object's backing memory **may** be provided by the implementation lazily. The actual committed size of the memory **may** initially be as small as zero (or as large as the requested size), and monotonically increases as additional memory is needed.

A memory type with this flag set is only allowed to be bound to a `VkImage` whose usage flags include `VK_IMAGE_USAGE_TRANSIENT_ATTACHMENT_BIT`.

NOTE	Using lazily allocated memory objects for framebuffer attachments that are not needed once a render pass instance has completed **may** allow some implementations to never allocate memory for such attachments.

To determine the amount of lazily-allocated memory that is currently committed for a memory object, call:

```
// Provided by VK_VERSION_1_0
void vkGetDeviceMemoryCommitment(
    VkDevice                                    device,
    VkDeviceMemory                              memory,
    VkDeviceSize*                               pCommittedMemoryInBytes);
```

- `device` is the logical device that owns the memory.
- `memory` is the memory object being queried.
- `pCommittedMemoryInBytes` is a pointer to a `VkDeviceSize` value in which the number of bytes currently committed is returned, on success.

The implementation **may** update the commitment at any time, and the value returned by this query **may** be out of date.

The implementation guarantees to allocate any committed memory from the `heapIndex` indicated by the memory type that the memory object was created with.

Valid Usage

- VUID-vkGetDeviceMemoryCommitment-memory-00690
  `memory` **must** have been created with a memory type that reports `VK_MEMORY_PROPERTY_LAZILY_ALLOCATED_BIT`

Valid Usage (Implicit)

- VUID-vkGetDeviceMemoryCommitment-device-parameter
  `device` **must** be a valid VkDevice handle
- VUID-vkGetDeviceMemoryCommitment-memory-parameter
  `memory` **must** be a valid VkDeviceMemory handle
- VUID-vkGetDeviceMemoryCommitment-pCommittedMemoryInBytes-parameter
  `pCommittedMemoryInBytes` **must** be a valid pointer to a VkDeviceSize value
- VUID-vkGetDeviceMemoryCommitment-memory-parent
  `memory` **must** have been created, allocated, or retrieved from `device`

11.2.9. Protected Memory

Protected memory divides device memory into protected device memory and unprotected device memory.

Protected memory adds the following concepts:

- Memory:
  - Unprotected device memory, which **can** be visible to the device and **can** be visible to the host
  - Protected device memory, which **can** be visible to the device but **must** not be visible to the host
- Resources:
  - Unprotected images and unprotected buffers, to which unprotected memory **can** be bound
  - Protected images and protected buffers, to which protected memory **can** be bound
- Command buffers:
  - Unprotected command buffers, which **can** be submitted to a device queue to execute unprotected queue operations
  - Protected command buffers, which **can** be submitted to a protected-capable device queue to execute protected queue operations
- Device queues:
  - Unprotected device queues, to which unprotected command buffers **can** be submitted
  - Protected-capable device queues, to which unprotected command buffers or protected command buffers **can** be submitted
- Queue submissions
  - Unprotected queue submissions, through which unprotected command buffers **can** be submitted
  - Protected queue submissions, through which protected command buffers **can** be submitted
- Queue operations

- Unprotected queue operations
- Protected queue operations

Protected Memory Access Rules

If VkPhysicalDeviceProtectedMemoryProperties::`protectedNoFault` is `VK_FALSE`, applications **must** not perform any of the following operations:

- Write to unprotected memory within protected queue operations.
- Access protected memory within protected queue operations other than in framebuffer-space pipeline stages, the compute shader stage, or the transfer stage.
- Perform a query within protected queue operations.

If VkPhysicalDeviceProtectedMemoryProperties::`protectedNoFault` is `VK_TRUE`, these operations are valid, but reads will return undefined values, and writes will either be dropped or store undefined values.

Additionally, indirect operations **must** not be performed within protected queue operations.

Whether these operations are valid or not, or if any other invalid usage is performed, the implementation **must** guarantee that:

- Protected device memory **must** never be visible to the host.
- Values written to unprotected device memory **must** not be a function of values from protected memory.

11.2.10. Peer Memory Features

Peer memory is memory that is allocated for a given physical device and then bound to a resource and accessed by a different physical device, in a logical device that represents multiple physical devices. Some ways of reading and writing peer memory **may** not be supported by a device.

To determine how peer memory **can** be accessed, call:

```
// Provided by VK_VERSION_1_1
void vkGetDeviceGroupPeerMemoryFeatures(
    VkDevice                                    device,
    uint32_t                                    heapIndex,
    uint32_t                                    localDeviceIndex,
    uint32_t                                    remoteDeviceIndex,
    VkPeerMemoryFeatureFlags*                   pPeerMemoryFeatures);
```

- `device` is the logical device that owns the memory.
- `heapIndex` is the index of the memory heap from which the memory is allocated.
- `localDeviceIndex` is the device index of the physical device that performs the memory access.
- `remoteDeviceIndex` is the device index of the physical device that the memory is allocated for.

- pPeerMemoryFeatures is a pointer to a VkPeerMemoryFeatureFlags bitmask indicating which types of memory accesses are supported for the combination of heap, local, and remote devices.

Valid Usage

- VUID-vkGetDeviceGroupPeerMemoryFeatures-heapIndex-00691
  heapIndex **must** be less than memoryHeapCount
- VUID-vkGetDeviceGroupPeerMemoryFeatures-localDeviceIndex-00692
  localDeviceIndex **must** be a valid device index
- VUID-vkGetDeviceGroupPeerMemoryFeatures-remoteDeviceIndex-00693
  remoteDeviceIndex **must** be a valid device index
- VUID-vkGetDeviceGroupPeerMemoryFeatures-localDeviceIndex-00694
  localDeviceIndex **must** not equal remoteDeviceIndex

Valid Usage (Implicit)

- VUID-vkGetDeviceGroupPeerMemoryFeatures-device-parameter
  device **must** be a valid VkDevice handle
- VUID-vkGetDeviceGroupPeerMemoryFeatures-pPeerMemoryFeatures-parameter
  pPeerMemoryFeatures **must** be a valid pointer to a VkPeerMemoryFeatureFlags value

Bits which **may** be set in vkGetDeviceGroupPeerMemoryFeatures::pPeerMemoryFeatures, indicating supported peer memory features, are:

```
// Provided by VK_VERSION_1_1
typedef enum VkPeerMemoryFeatureFlagBits {
    VK_PEER_MEMORY_FEATURE_COPY_SRC_BIT = 0x00000001,
    VK_PEER_MEMORY_FEATURE_COPY_DST_BIT = 0x00000002,
    VK_PEER_MEMORY_FEATURE_GENERIC_SRC_BIT = 0x00000004,
    VK_PEER_MEMORY_FEATURE_GENERIC_DST_BIT = 0x00000008,
} VkPeerMemoryFeatureFlagBits;
```

- VK_PEER_MEMORY_FEATURE_COPY_SRC_BIT specifies that the memory **can** be accessed as the source of any vkCmdCopy* command.
- VK_PEER_MEMORY_FEATURE_COPY_DST_BIT specifies that the memory **can** be accessed as the destination of any vkCmdCopy* command.
- VK_PEER_MEMORY_FEATURE_GENERIC_SRC_BIT specifies that the memory **can** be read as any memory access type.
- VK_PEER_MEMORY_FEATURE_GENERIC_DST_BIT specifies that the memory **can** be written as any memory access type. Shader atomics are considered to be writes.

NOTE The peer memory features of a memory heap also apply to any accesses that **may** be

performed during image layout transitions.

VK_PEER_MEMORY_FEATURE_COPY_DST_BIT **must** be supported for all host local heaps and for at least one device-local memory heap.

If a device does not support a peer memory feature, it is still valid to use a resource that includes both local and peer memory bindings with the corresponding access type as long as only the local bindings are actually accessed. For example, an application doing split-frame rendering would use framebuffer attachments that include both local and peer memory bindings, but would scissor the rendering to only update local memory.

```
// Provided by VK_VERSION_1_1
typedef VkFlags VkPeerMemoryFeatureFlags;
```

VkPeerMemoryFeatureFlags is a bitmask type for setting a mask of zero or more VkPeerMemoryFeatureFlagBits.

11.2.11. Opaque Capture Address Query

To query a 64-bit opaque capture address value from a memory object, call:

```
// Provided by VK_VERSION_1_2
uint64_t vkGetDeviceMemoryOpaqueCaptureAddress(
    VkDevice                                    device,
    const VkDeviceMemoryOpaqueCaptureAddressInfo* pInfo);
```

- device is the logical device that the memory object was allocated on.
- pInfo is a pointer to a VkDeviceMemoryOpaqueCaptureAddressInfo structure specifying the memory object to retrieve an address for.

The 64-bit return value is an opaque address representing the start of pInfo->memory.

If the memory object was allocated with a non-zero value of VkMemoryOpaqueCaptureAddressAllocateInfo::opaqueCaptureAddress, the return value **must** be the same address.

NOTE The expected usage for these opaque addresses is only for trace capture/replay tools to store these addresses in a trace and subsequently specify them during replay.

Valid Usage

- VUID-vkGetDeviceMemoryOpaqueCaptureAddress-None-03334
  The bufferDeviceAddress feature **must** be enabled
- VUID-vkGetDeviceMemoryOpaqueCaptureAddress-device-03335
  If device was created with multiple physical devices, then the bufferDeviceAddressMultiDevice feature **must** be enabled

Valid Usage (Implicit)

- VUID-vkGetDeviceMemoryOpaqueCaptureAddress-device-parameter
  `device` **must** be a valid VkDevice handle
- VUID-vkGetDeviceMemoryOpaqueCaptureAddress-pInfo-parameter
  `pInfo` **must** be a valid pointer to a valid VkDeviceMemoryOpaqueCaptureAddressInfo structure

The `VkDeviceMemoryOpaqueCaptureAddressInfo` structure is defined as:

```
// Provided by VK_VERSION_1_2
typedef struct VkDeviceMemoryOpaqueCaptureAddressInfo {
    VkStructureType    sType;
    const void*        pNext;
    VkDeviceMemory     memory;
} VkDeviceMemoryOpaqueCaptureAddressInfo;
```

- `sType` is a VkStructureType value identifying this structure.
- `pNext` is `NULL` or a pointer to a structure extending this structure.
- `memory` specifies the memory whose address is being queried.

Valid Usage

- VUID-VkDeviceMemoryOpaqueCaptureAddressInfo-memory-03336
  `memory` **must** have been allocated with `VK_MEMORY_ALLOCATE_DEVICE_ADDRESS_BIT`

Valid Usage (Implicit)

- VUID-VkDeviceMemoryOpaqueCaptureAddressInfo-sType-sType
  `sType` **must** be `VK_STRUCTURE_TYPE_DEVICE_MEMORY_OPAQUE_CAPTURE_ADDRESS_INFO`
- VUID-VkDeviceMemoryOpaqueCaptureAddressInfo-pNext-pNext
  `pNext` **must** be `NULL`
- VUID-VkDeviceMemoryOpaqueCaptureAddressInfo-memory-parameter
  `memory` **must** be a valid VkDeviceMemory handle

Chapter 12. Resource Creation

Vulkan supports two primary resource types: *buffers* and *images*. Resources are views of memory with associated formatting and dimensionality. Buffers provide access to raw arrays of bytes, whereas images **can** be multidimensional and **may** have associated metadata.

12.1. Buffers

Buffers represent linear arrays of data which are used for various purposes by binding them to a graphics or compute pipeline via descriptor sets or certain commands, or by directly specifying them as parameters to certain commands.

Buffers are represented by `VkBuffer` handles:

```
// Provided by VK_VERSION_1_0
VK_DEFINE_NON_DISPATCHABLE_HANDLE(VkBuffer)
```

To create buffers, call:

```
// Provided by VK_VERSION_1_0
VkResult vkCreateBuffer(
    VkDevice                                    device,
    const VkBufferCreateInfo*                   pCreateInfo,
    const VkAllocationCallbacks*                pAllocator,
    VkBuffer*                                   pBuffer);
```

- `device` is the logical device that creates the buffer object.
- `pCreateInfo` is a pointer to a VkBufferCreateInfo structure containing parameters affecting creation of the buffer.
- `pAllocator` controls host memory allocation as described in the Memory Allocation chapter.
- `pBuffer` is a pointer to a VkBuffer handle in which the resulting buffer object is returned.

Valid Usage

- VUID-vkCreateBuffer-device-09664
  `device` **must** support at least one queue family with one of the `VK_QUEUE_SPARSE_BINDING_BIT`, `VK_QUEUE_TRANSFER_BIT`, `VK_QUEUE_COMPUTE_BIT`, or `VK_QUEUE_GRAPHICS_BIT` capabilities
- VUID-vkCreateBuffer-flags-00911
  If the `flags` member of `pCreateInfo` includes `VK_BUFFER_CREATE_SPARSE_BINDING_BIT`, creating this `VkBuffer` **must** not cause the total required sparse memory for all currently valid sparse resources on the device to exceed `VkPhysicalDeviceLimits ::sparseAddressSpaceSize`

Valid Usage (Implicit)

- VUID-vkCreateBuffer-device-parameter
  `device` **must** be a valid VkDevice handle
- VUID-vkCreateBuffer-pCreateInfo-parameter
  `pCreateInfo` **must** be a valid pointer to a valid VkBufferCreateInfo structure
- VUID-vkCreateBuffer-pAllocator-parameter
  If `pAllocator` is not `NULL`, `pAllocator` **must** be a valid pointer to a valid VkAllocationCallbacks structure
- VUID-vkCreateBuffer-pBuffer-parameter
  `pBuffer` **must** be a valid pointer to a VkBuffer handle

Return Codes

Success

- `VK_SUCCESS`

Failure

- `VK_ERROR_OUT_OF_HOST_MEMORY`
- `VK_ERROR_OUT_OF_DEVICE_MEMORY`

The `VkBufferCreateInfo` structure is defined as:

```
// Provided by VK_VERSION_1_0
typedef struct VkBufferCreateInfo {
    VkStructureType        sType;
    const void*            pNext;
    VkBufferCreateFlags    flags;
    VkDeviceSize           size;
    VkBufferUsageFlags     usage;
    VkSharingMode          sharingMode;
    uint32_t               queueFamilyIndexCount;
    const uint32_t*        pQueueFamilyIndices;
} VkBufferCreateInfo;
```

- `sType` is a VkStructureType value identifying this structure.
- `pNext` is `NULL` or a pointer to a structure extending this structure.
- `flags` is a bitmask of VkBufferCreateFlagBits specifying additional parameters of the buffer.
- `size` is the size in bytes of the buffer to be created.
- `usage` is a bitmask of VkBufferUsageFlagBits specifying allowed usages of the buffer.
- `sharingMode` is a VkSharingMode value specifying the sharing mode of the buffer when it will be accessed by multiple queue families.

- `queueFamilyIndexCount` is the number of entries in the `pQueueFamilyIndices` array.
- `pQueueFamilyIndices` is a pointer to an array of queue families that will access this buffer. It is ignored if `sharingMode` is not `VK_SHARING_MODE_CONCURRENT`.

Valid Usage

- VUID-VkBufferCreateInfo-None-09499
  `usage` **must** be a valid combination of VkBufferUsageFlagBits values
- VUID-VkBufferCreateInfo-None-09500
  `usage` **must** not be 0
- VUID-VkBufferCreateInfo-size-00912
  `size` **must** be greater than `0`
- VUID-VkBufferCreateInfo-sharingMode-00913
  If `sharingMode` is `VK_SHARING_MODE_CONCURRENT`, `pQueueFamilyIndices` **must** be a valid pointer to an array of `queueFamilyIndexCount` `uint32_t` values
- VUID-VkBufferCreateInfo-sharingMode-00914
  If `sharingMode` is `VK_SHARING_MODE_CONCURRENT`, `queueFamilyIndexCount` **must** be greater than `1`
- VUID-VkBufferCreateInfo-sharingMode-01419
  If `sharingMode` is `VK_SHARING_MODE_CONCURRENT`, each element of `pQueueFamilyIndices` **must** be unique and **must** be less than `pQueueFamilyPropertyCount` returned by either vkGetPhysicalDeviceQueueFamilyProperties2 or vkGetPhysicalDeviceQueueFamilyProperties for the `physicalDevice` that was used to create `device`
- VUID-VkBufferCreateInfo-flags-00915
  If the `sparseBinding` feature is not enabled, `flags` **must** not contain `VK_BUFFER_CREATE_SPARSE_BINDING_BIT`
- VUID-VkBufferCreateInfo-flags-00916
  If the `sparseResidencyBuffer` feature is not enabled, `flags` **must** not contain `VK_BUFFER_CREATE_SPARSE_RESIDENCY_BIT`
- VUID-VkBufferCreateInfo-flags-00917
  If the `sparseResidencyAliased` feature is not enabled, `flags` **must** not contain `VK_BUFFER_CREATE_SPARSE_ALIASED_BIT`
- VUID-VkBufferCreateInfo-flags-00918
  If `flags` contains `VK_BUFFER_CREATE_SPARSE_RESIDENCY_BIT` or `VK_BUFFER_CREATE_SPARSE_ALIASED_BIT`, it **must** also contain `VK_BUFFER_CREATE_SPARSE_BINDING_BIT`
- VUID-VkBufferCreateInfo-pNext-00920
  If the `pNext` chain includes a VkExternalMemoryBufferCreateInfo structure, its `handleTypes` member **must** only contain bits that are also in VkExternalBufferProperties ::`externalMemoryProperties.compatibleHandleTypes`, as returned by vkGetPhysicalDeviceExternalBufferProperties with `pExternalBufferInfo->handleType` equal to any one of the handle types specified in VkExternalMemoryBufferCreateInfo

::handleTypes

- VUID-VkBufferCreateInfo-flags-01887
  If the protectedMemory feature is not enabled, flags **must** not contain VK_BUFFER_CREATE_PROTECTED_BIT
- VUID-VkBufferCreateInfo-None-01888
  If any of the bits VK_BUFFER_CREATE_SPARSE_BINDING_BIT, VK_BUFFER_CREATE_SPARSE_RESIDENCY_BIT, or VK_BUFFER_CREATE_SPARSE_ALIASED_BIT are set, VK_BUFFER_CREATE_PROTECTED_BIT **must** not also be set
- VUID-VkBufferCreateInfo-opaqueCaptureAddress-03337
  If VkBufferOpaqueCaptureAddressCreateInfo::opaqueCaptureAddress is not zero, flags **must** include VK_BUFFER_CREATE_DEVICE_ADDRESS_CAPTURE_REPLAY_BIT
- VUID-VkBufferCreateInfo-flags-03338
  If flags includes VK_BUFFER_CREATE_DEVICE_ADDRESS_CAPTURE_REPLAY_BIT, the bufferDeviceAddressCaptureReplay feature **must** be enabled
- VUID-VkBufferCreateInfo-size-06409
  size **must** be less than or equal to VkPhysicalDeviceMaintenance4Properties::maxBufferSize
- VUID-VkBufferCreateInfo-flags-09641
  If flags includes VK_BUFFER_CREATE_PROTECTED_BIT, then usage **must** not contain any of the following bits

Valid Usage (Implicit)

- VUID-VkBufferCreateInfo-sType-sType
  sType **must** be VK_STRUCTURE_TYPE_BUFFER_CREATE_INFO
- VUID-VkBufferCreateInfo-pNext-pNext
  Each pNext member of any structure (including this one) in the pNext chain **must** be either NULL or a pointer to a valid instance of VkBufferOpaqueCaptureAddressCreateInfo or VkExternalMemoryBufferCreateInfo
- VUID-VkBufferCreateInfo-sType-unique
  The sType value of each struct in the pNext chain **must** be unique
- VUID-VkBufferCreateInfo-flags-parameter
  flags **must** be a valid combination of VkBufferCreateFlagBits values
- VUID-VkBufferCreateInfo-sharingMode-parameter
  sharingMode **must** be a valid VkSharingMode value

Bits which **can** be set in VkBufferCreateInfo::usage, specifying usage behavior of a buffer, are:

```
// Provided by VK_VERSION_1_0
typedef enum VkBufferUsageFlagBits {
    VK_BUFFER_USAGE_TRANSFER_SRC_BIT = 0x00000001,
    VK_BUFFER_USAGE_TRANSFER_DST_BIT = 0x00000002,
    VK_BUFFER_USAGE_UNIFORM_TEXEL_BUFFER_BIT = 0x00000004,
    VK_BUFFER_USAGE_STORAGE_TEXEL_BUFFER_BIT = 0x00000008,
    VK_BUFFER_USAGE_UNIFORM_BUFFER_BIT = 0x00000010,
    VK_BUFFER_USAGE_STORAGE_BUFFER_BIT = 0x00000020,
    VK_BUFFER_USAGE_INDEX_BUFFER_BIT = 0x00000040,
    VK_BUFFER_USAGE_VERTEX_BUFFER_BIT = 0x00000080,
    VK_BUFFER_USAGE_INDIRECT_BUFFER_BIT = 0x00000100,
  // Provided by VK_VERSION_1_2
    VK_BUFFER_USAGE_SHADER_DEVICE_ADDRESS_BIT = 0x00020000,
} VkBufferUsageFlagBits;
```

- VK_BUFFER_USAGE_TRANSFER_SRC_BIT specifies that the buffer **can** be used as the source of a *transfer command* (see the definition of VK_PIPELINE_STAGE_TRANSFER_BIT).
- VK_BUFFER_USAGE_TRANSFER_DST_BIT specifies that the buffer **can** be used as the destination of a transfer command.
- VK_BUFFER_USAGE_UNIFORM_TEXEL_BUFFER_BIT specifies that the buffer **can** be used to create a VkBufferView suitable for occupying a VkDescriptorSet slot of type VK_DESCRIPTOR_TYPE_UNIFORM_TEXEL_BUFFER.
- VK_BUFFER_USAGE_STORAGE_TEXEL_BUFFER_BIT specifies that the buffer **can** be used to create a VkBufferView suitable for occupying a VkDescriptorSet slot of type VK_DESCRIPTOR_TYPE_STORAGE_TEXEL_BUFFER.
- VK_BUFFER_USAGE_UNIFORM_BUFFER_BIT specifies that the buffer **can** be used in a VkDescriptorBufferInfo suitable for occupying a VkDescriptorSet slot either of type VK_DESCRIPTOR_TYPE_UNIFORM_BUFFER or VK_DESCRIPTOR_TYPE_UNIFORM_BUFFER_DYNAMIC.
- VK_BUFFER_USAGE_STORAGE_BUFFER_BIT specifies that the buffer **can** be used in a VkDescriptorBufferInfo suitable for occupying a VkDescriptorSet slot either of type VK_DESCRIPTOR_TYPE_STORAGE_BUFFER or VK_DESCRIPTOR_TYPE_STORAGE_BUFFER_DYNAMIC.
- VK_BUFFER_USAGE_INDEX_BUFFER_BIT specifies that the buffer is suitable for passing as the buffer parameter to vkCmdBindIndexBuffer.
- VK_BUFFER_USAGE_VERTEX_BUFFER_BIT specifies that the buffer is suitable for passing as an element of the pBuffers array to vkCmdBindVertexBuffers.
- VK_BUFFER_USAGE_INDIRECT_BUFFER_BIT specifies that the buffer is suitable for passing as the buffer parameter to vkCmdDrawIndirect, vkCmdDrawIndexedIndirect, or vkCmdDispatchIndirect.
- VK_BUFFER_USAGE_SHADER_DEVICE_ADDRESS_BIT specifies that the buffer **can** be used to retrieve a buffer device address via vkGetBufferDeviceAddress and use that address to access the buffer's memory from a shader.

```
// Provided by VK_VERSION_1_0
typedef VkFlags VkBufferUsageFlags;
```

VkBufferUsageFlags is a bitmask type for setting a mask of zero or more VkBufferUsageFlagBits.

Bits which **can** be set in VkBufferCreateInfo::flags, specifying additional parameters of a buffer, are:

```
// Provided by VK_VERSION_1_0
typedef enum VkBufferCreateFlagBits {
    VK_BUFFER_CREATE_SPARSE_BINDING_BIT = 0x00000001,
    VK_BUFFER_CREATE_SPARSE_RESIDENCY_BIT = 0x00000002,
    VK_BUFFER_CREATE_SPARSE_ALIASED_BIT = 0x00000004,
  // Provided by VK_VERSION_1_1
    VK_BUFFER_CREATE_PROTECTED_BIT = 0x00000008,
  // Provided by VK_VERSION_1_2
    VK_BUFFER_CREATE_DEVICE_ADDRESS_CAPTURE_REPLAY_BIT = 0x00000010,
} VkBufferCreateFlagBits;
```

- VK_BUFFER_CREATE_SPARSE_BINDING_BIT specifies that the buffer will be backed using sparse memory binding.
- VK_BUFFER_CREATE_SPARSE_RESIDENCY_BIT specifies that the buffer **can** be partially backed using sparse memory binding. Buffers created with this flag **must** also be created with the VK_BUFFER_CREATE_SPARSE_BINDING_BIT flag.
- VK_BUFFER_CREATE_SPARSE_ALIASED_BIT specifies that the buffer will be backed using sparse memory binding with memory ranges that might also simultaneously be backing another buffer (or another portion of the same buffer). Buffers created with this flag **must** also be created with the VK_BUFFER_CREATE_SPARSE_BINDING_BIT flag.
- VK_BUFFER_CREATE_PROTECTED_BIT specifies that the buffer is a protected buffer.
- VK_BUFFER_CREATE_DEVICE_ADDRESS_CAPTURE_REPLAY_BIT specifies that the buffer's address **can** be saved and reused on a subsequent run (e.g. for trace capture and replay), see VkBufferOpaqueCaptureAddressCreateInfo for more detail.

See Sparse Resource Features and Physical Device Features for details of the sparse memory features supported on a device.

```
// Provided by VK_VERSION_1_0
typedef VkFlags VkBufferCreateFlags;
```

VkBufferCreateFlags is a bitmask type for setting a mask of zero or more VkBufferCreateFlagBits.

To define a set of external memory handle types that **may** be used as backing store for a buffer, add a VkExternalMemoryBufferCreateInfo structure to the pNext chain of the VkBufferCreateInfo structure. The VkExternalMemoryBufferCreateInfo structure is defined as:

```
// Provided by VK_VERSION_1_1
typedef struct VkExternalMemoryBufferCreateInfo {
    VkStructureType                       sType;
    const void*                           pNext;
    VkExternalMemoryHandleTypeFlags       handleTypes;
} VkExternalMemoryBufferCreateInfo;
```

NOTE A VkExternalMemoryBufferCreateInfo structure with a non-zero handleTypes field must be included in the creation parameters for a buffer that will be bound to memory that is either exported or imported.

- sType is a VkStructureType value identifying this structure.
- pNext is NULL or a pointer to a structure extending this structure.
- handleTypes is zero or a bitmask of VkExternalMemoryHandleTypeFlagBits specifying one or more external memory handle types.

Valid Usage (Implicit)

- VUID-VkExternalMemoryBufferCreateInfo-sType-sType
  sType **must** be VK_STRUCTURE_TYPE_EXTERNAL_MEMORY_BUFFER_CREATE_INFO
- VUID-VkExternalMemoryBufferCreateInfo-handleTypes-parameter
  handleTypes **must** be a valid combination of VkExternalMemoryHandleTypeFlagBits values

To request a specific device address for a buffer, add a VkBufferOpaqueCaptureAddressCreateInfo structure to the pNext chain of the VkBufferCreateInfo structure. The VkBufferOpaqueCaptureAddressCreateInfo structure is defined as:

```
// Provided by VK_VERSION_1_2
typedef struct VkBufferOpaqueCaptureAddressCreateInfo {
    VkStructureType    sType;
    const void*        pNext;
    uint64_t           opaqueCaptureAddress;
} VkBufferOpaqueCaptureAddressCreateInfo;
```

- sType is a VkStructureType value identifying this structure.
- pNext is NULL or a pointer to a structure extending this structure.
- opaqueCaptureAddress is the opaque capture address requested for the buffer.

If opaqueCaptureAddress is zero, no specific address is requested.

If opaqueCaptureAddress is not zero, then it **should** be an address retrieved from vkGetBufferOpaqueCaptureAddress for an identically created buffer on the same implementation.

If this structure is not present, it is as if `opaqueCaptureAddress` is zero.

Apps **should** avoid creating buffers with app-provided addresses and implementation-provided addresses in the same process, to reduce the likelihood of `VK_ERROR_INVALID_OPAQUE_CAPTURE_ADDRESS` errors.

NOTE

The expected usage for this is that a trace capture/replay tool will add the `VK_BUFFER_CREATE_DEVICE_ADDRESS_CAPTURE_REPLAY_BIT` flag to all buffers that use `VK_BUFFER_USAGE_SHADER_DEVICE_ADDRESS_BIT`, and during capture will save the queried opaque device addresses in the trace. During replay, the buffers will be created specifying the original address so any address values stored in the trace data will remain valid.

Implementations are expected to separate such buffers in the GPU address space so normal allocations will avoid using these addresses. Apps/tools should avoid mixing app-provided and implementation-provided addresses for buffers created with `VK_BUFFER_CREATE_DEVICE_ADDRESS_CAPTURE_REPLAY_BIT`, to avoid address space allocation conflicts.

Valid Usage (Implicit)

- VUID-VkBufferOpaqueCaptureAddressCreateInfo-sType-sType
  `sType` **must** be `VK_STRUCTURE_TYPE_BUFFER_OPAQUE_CAPTURE_ADDRESS_CREATE_INFO`

To destroy a buffer, call:

```
// Provided by VK_VERSION_1_0
void vkDestroyBuffer(
    VkDevice                                    device,
    VkBuffer                                    buffer,
    const VkAllocationCallbacks*                pAllocator);
```

- `device` is the logical device that destroys the buffer.
- `buffer` is the buffer to destroy.
- `pAllocator` controls host memory allocation as described in the Memory Allocation chapter.

Valid Usage

- VUID-vkDestroyBuffer-buffer-00922
  All submitted commands that refer to `buffer`, either directly or via a `VkBufferView`, **must** have completed execution
- VUID-vkDestroyBuffer-buffer-00923
  If `VkAllocationCallbacks` were provided when `buffer` was created, a compatible set of callbacks **must** be provided here

- VUID-vkDestroyBuffer-buffer-00924
  If no `VkAllocationCallbacks` were provided when `buffer` was created, `pAllocator` **must** be `NULL`

Valid Usage (Implicit)

- VUID-vkDestroyBuffer-device-parameter
  `device` **must** be a valid VkDevice handle
- VUID-vkDestroyBuffer-buffer-parameter
  If `buffer` is not VK_NULL_HANDLE, `buffer` **must** be a valid VkBuffer handle
- VUID-vkDestroyBuffer-pAllocator-parameter
  If `pAllocator` is not `NULL`, `pAllocator` **must** be a valid pointer to a valid VkAllocationCallbacks structure
- VUID-vkDestroyBuffer-buffer-parent
  If `buffer` is a valid handle, it **must** have been created, allocated, or retrieved from `device`

Host Synchronization

- Host access to `buffer` **must** be externally synchronized

12.2. Buffer Views

A *buffer view* represents a contiguous range of a buffer and a specific format to be used to interpret the data. Buffer views are used to enable shaders to access buffer contents using image operations. In order to create a valid buffer view, the buffer **must** have been created with at least one of the following usage flags:

- `VK_BUFFER_USAGE_UNIFORM_TEXEL_BUFFER_BIT`
- `VK_BUFFER_USAGE_STORAGE_TEXEL_BUFFER_BIT`

Buffer views are represented by `VkBufferView` handles:

```
// Provided by VK_VERSION_1_0
VK_DEFINE_NON_DISPATCHABLE_HANDLE(VkBufferView)
```

To create a buffer view, call:

```
// Provided by VK_VERSION_1_0
VkResult vkCreateBufferView(
    VkDevice                                    device,
    const VkBufferViewCreateInfo*               pCreateInfo,
    const VkAllocationCallbacks*                pAllocator,
    VkBufferView*                               pView);
```

- `device` is the logical device that creates the buffer view.
- `pCreateInfo` is a pointer to a VkBufferViewCreateInfo structure containing parameters to be used to create the buffer view.
- `pAllocator` controls host memory allocation as described in the Memory Allocation chapter.
- `pView` is a pointer to a VkBufferView handle in which the resulting buffer view object is returned.

Valid Usage

- VUID-vkCreateBufferView-device-09665
  `device` **must** support at least one queue family with one of the `VK_QUEUE_COMPUTE_BIT` or `VK_QUEUE_GRAPHICS_BIT` capabilities

Valid Usage (Implicit)

- VUID-vkCreateBufferView-device-parameter
  `device` **must** be a valid VkDevice handle
- VUID-vkCreateBufferView-pCreateInfo-parameter
  `pCreateInfo` **must** be a valid pointer to a valid VkBufferViewCreateInfo structure
- VUID-vkCreateBufferView-pAllocator-parameter
  If `pAllocator` is not `NULL`, `pAllocator` **must** be a valid pointer to a valid VkAllocationCallbacks structure
- VUID-vkCreateBufferView-pView-parameter
  `pView` **must** be a valid pointer to a VkBufferView handle

Return Codes

Success

- `VK_SUCCESS`

Failure

- `VK_ERROR_OUT_OF_HOST_MEMORY`
- `VK_ERROR_OUT_OF_DEVICE_MEMORY`

The VkBufferViewCreateInfo structure is defined as:

```
// Provided by VK_VERSION_1_0
typedef struct VkBufferViewCreateInfo {
    VkStructureType            sType;
    const void*                pNext;
    VkBufferViewCreateFlags    flags;
    VkBuffer                   buffer;
    VkFormat                   format;
    VkDeviceSize               offset;
    VkDeviceSize               range;
} VkBufferViewCreateInfo;
```

- sType is a VkStructureType value identifying this structure.
- pNext is NULL or a pointer to a structure extending this structure.
- flags is reserved for future use.
- buffer is a VkBuffer on which the view will be created.
- format is a VkFormat describing the format of the data elements in the buffer.
- offset is an offset in bytes from the base address of the buffer. Accesses to the buffer view from shaders use addressing that is relative to this starting offset.
- range is a size in bytes of the buffer view. If range is equal to VK_WHOLE_SIZE, the range from offset to the end of the buffer is used. If VK_WHOLE_SIZE is used and the remaining size of the buffer is not a multiple of the texel block size of format, the nearest smaller multiple is used.

The buffer view has a *buffer view usage* identifying which descriptor types can be created from it. This usage is equal to the VkBufferCreateInfo::usage value used to create buffer.

Valid Usage

- VUID-VkBufferViewCreateInfo-offset-00925
  offset **must** be less than the size of buffer
- VUID-VkBufferViewCreateInfo-range-00928
  If range is not equal to VK_WHOLE_SIZE, range **must** be greater than 0
- VUID-VkBufferViewCreateInfo-range-00929
  If range is not equal to VK_WHOLE_SIZE, range **must** be an integer multiple of the texel block size of format
- VUID-VkBufferViewCreateInfo-range-00930
  If range is not equal to VK_WHOLE_SIZE, the number of texel buffer elements given by (⌊range / (texel block size)⌋ × (texels per block)) where texel block size and texels per block are as defined in the Compatible Formats table for format, **must** be less than or equal to VkPhysicalDeviceLimits::maxTexelBufferElements
- VUID-VkBufferViewCreateInfo-offset-00931
  If range is not equal to VK_WHOLE_SIZE, the sum of offset and range **must** be less than or

equal to the size of buffer

- VUID-VkBufferViewCreateInfo-range-04059
  If range is equal to VK_WHOLE_SIZE, the number of texel buffer elements given by (⌊(size - offset) / (texel block size)⌋ × (texels per block)) where size is the size of buffer, and texel block size and texels per block are as defined in the Compatible Formats table for format, **must** be less than or equal to VkPhysicalDeviceLimits::maxTexelBufferElements
- VUID-VkBufferViewCreateInfo-buffer-00932
  buffer **must** have been created with a usage value containing at least one of VK_BUFFER_USAGE_UNIFORM_TEXEL_BUFFER_BIT or VK_BUFFER_USAGE_STORAGE_TEXEL_BUFFER_BIT
- VUID-VkBufferViewCreateInfo-format-08778
  If the buffer view usage contains VK_BUFFER_USAGE_UNIFORM_TEXEL_BUFFER_BIT, then format features of format **must** contain VK_FORMAT_FEATURE_UNIFORM_TEXEL_BUFFER_BIT
- VUID-VkBufferViewCreateInfo-format-08779
  If the buffer view usage contains VK_BUFFER_USAGE_STORAGE_TEXEL_BUFFER_BIT, then format features of format **must** contain VK_FORMAT_FEATURE_STORAGE_TEXEL_BUFFER_BIT
- VUID-VkBufferViewCreateInfo-buffer-00935
  If buffer is non-sparse then it **must** be bound completely and contiguously to a single VkDeviceMemory object
- VUID-VkBufferViewCreateInfo-offset-02749
  If the texelBufferAlignment feature is not enabled, offset **must** be a multiple of VkPhysicalDeviceLimits::minTexelBufferOffsetAlignment
- VUID-VkBufferViewCreateInfo-buffer-02750
  If the texelBufferAlignment feature is enabled and if buffer was created with usage containing VK_BUFFER_USAGE_STORAGE_TEXEL_BUFFER_BIT, offset **must** be a multiple of the lesser of VkPhysicalDeviceTexelBufferAlignmentProperties::storageTexelBufferOffsetAlignmentBytes or, if VkPhysicalDeviceTexelBufferAlignmentProperties::storageTexelBufferOffsetSingleTexelAlignment is VK_TRUE, the size of a texel of the requested format. If the size of a texel is a multiple of three bytes, then the size of a single component of format is used instead
- VUID-VkBufferViewCreateInfo-buffer-02751
  If the texelBufferAlignment feature is enabled and if buffer was created with usage containing VK_BUFFER_USAGE_UNIFORM_TEXEL_BUFFER_BIT, offset **must** be a multiple of the lesser of VkPhysicalDeviceTexelBufferAlignmentProperties::uniformTexelBufferOffsetAlignmentBytes or, if VkPhysicalDeviceTexelBufferAlignmentProperties::uniformTexelBufferOffsetSingleTexelAlignment is VK_TRUE, the size of a texel of the requested format. If the size of a texel is a multiple of three bytes, then the size of a single component of format is used instead

Valid Usage (Implicit)

- VUID-VkBufferViewCreateInfo-sType-sType
  sType **must** be VK_STRUCTURE_TYPE_BUFFER_VIEW_CREATE_INFO
- VUID-VkBufferViewCreateInfo-pNext-pNext

`pNext` **must** be `NULL`

- VUID-VkBufferViewCreateInfo-flags-zerobitmask
  `flags` **must** be `0`
- VUID-VkBufferViewCreateInfo-buffer-parameter
  `buffer` **must** be a valid VkBuffer handle
- VUID-VkBufferViewCreateInfo-format-parameter
  `format` **must** be a valid VkFormat value

```
// Provided by VK_VERSION_1_0
typedef VkFlags VkBufferViewCreateFlags;
```

`VkBufferViewCreateFlags` is a bitmask type for setting a mask, but is currently reserved for future use.

To destroy a buffer view, call:

```
// Provided by VK_VERSION_1_0
void vkDestroyBufferView(
    VkDevice                                    device,
    VkBufferView                                bufferView,
    const VkAllocationCallbacks*                pAllocator);
```

- `device` is the logical device that destroys the buffer view.
- `bufferView` is the buffer view to destroy.
- `pAllocator` controls host memory allocation as described in the Memory Allocation chapter.

Valid Usage

- VUID-vkDestroyBufferView-bufferView-00936
  All submitted commands that refer to `bufferView` **must** have completed execution
- VUID-vkDestroyBufferView-bufferView-00937
  If `VkAllocationCallbacks` were provided when `bufferView` was created, a compatible set of callbacks **must** be provided here
- VUID-vkDestroyBufferView-bufferView-00938
  If no `VkAllocationCallbacks` were provided when `bufferView` was created, `pAllocator` **must** be `NULL`

Valid Usage (Implicit)

- VUID-vkDestroyBufferView-device-parameter
  `device` **must** be a valid VkDevice handle

- VUID-vkDestroyBufferView-bufferView-parameter
  If `bufferView` is not VK_NULL_HANDLE, `bufferView` **must** be a valid VkBufferView handle
- VUID-vkDestroyBufferView-pAllocator-parameter
  If `pAllocator` is not `NULL`, `pAllocator` **must** be a valid pointer to a valid VkAllocationCallbacks structure
- VUID-vkDestroyBufferView-bufferView-parent
  If `bufferView` is a valid handle, it **must** have been created, allocated, or retrieved from `device`

Host Synchronization

- Host access to `bufferView` **must** be externally synchronized

12.2.1. Buffer View Format Features

Valid uses of a VkBufferView **may** depend on the buffer view's *format features*, defined below. Such constraints are documented in the affected valid usage statement.

- If Vulkan 1.3 is supported or the `VK_KHR_format_feature_flags2` extension is supported, then the buffer view's set of *format features* is the value of VkFormatProperties3::`bufferFeatures` found by calling vkGetPhysicalDeviceFormatProperties2 on the same `format` as VkBufferViewCreateInfo::`format`.

12.3. Images

Images represent multidimensional - up to 3 - arrays of data which **can** be used for various purposes (e.g. attachments, textures), by binding them to a graphics or compute pipeline via descriptor sets, or by directly specifying them as parameters to certain commands.

Images are represented by `VkImage` handles:

```
// Provided by VK_VERSION_1_0
VK_DEFINE_NON_DISPATCHABLE_HANDLE(VkImage)
```

To create images, call:

```
// Provided by VK_VERSION_1_0
VkResult vkCreateImage(
    VkDevice                                    device,
    const VkImageCreateInfo*                    pCreateInfo,
    const VkAllocationCallbacks*                pAllocator,
    VkImage*                                    pImage);
```

- `device` is the logical device that creates the image.

- `pCreateInfo` is a pointer to a VkImageCreateInfo structure containing parameters to be used to create the image.
- `pAllocator` controls host memory allocation as described in the Memory Allocation chapter.
- `pImage` is a pointer to a VkImage handle in which the resulting image object is returned.

Valid Usage

- VUID-vkCreateImage-device-09666
  `device` **must** support at least one queue family with one of the `VK_QUEUE_SPARSE_BINDING_BIT`, `VK_QUEUE_TRANSFER_BIT`, `VK_QUEUE_COMPUTE_BIT`, or `VK_QUEUE_GRAPHICS_BIT` capabilities
- VUID-vkCreateImage-flags-00939
  If the `flags` member of `pCreateInfo` includes `VK_IMAGE_CREATE_SPARSE_BINDING_BIT`, creating this `VkImage` **must** not cause the total required sparse memory for all currently valid sparse resources on the device to exceed `VkPhysicalDeviceLimits`::`sparseAddressSpaceSize`

Valid Usage (Implicit)

- VUID-vkCreateImage-device-parameter
  `device` **must** be a valid VkDevice handle
- VUID-vkCreateImage-pCreateInfo-parameter
  `pCreateInfo` **must** be a valid pointer to a valid VkImageCreateInfo structure
- VUID-vkCreateImage-pAllocator-parameter
  If `pAllocator` is not `NULL`, `pAllocator` **must** be a valid pointer to a valid VkAllocationCallbacks structure
- VUID-vkCreateImage-pImage-parameter
  `pImage` **must** be a valid pointer to a VkImage handle

Return Codes

Success

- `VK_SUCCESS`

Failure

- `VK_ERROR_OUT_OF_HOST_MEMORY`
- `VK_ERROR_OUT_OF_DEVICE_MEMORY`

The `VkImageCreateInfo` structure is defined as:

```
// Provided by VK_VERSION_1_0
typedef struct VkImageCreateInfo {
    VkStructureType          sType;
    const void*              pNext;
    VkImageCreateFlags       flags;
    VkImageType              imageType;
    VkFormat                 format;
    VkExtent3D               extent;
    uint32_t                 mipLevels;
    uint32_t                 arrayLayers;
    VkSampleCountFlagBits    samples;
    VkImageTiling            tiling;
    VkImageUsageFlags        usage;
    VkSharingMode            sharingMode;
    uint32_t                 queueFamilyIndexCount;
    const uint32_t*          pQueueFamilyIndices;
    VkImageLayout            initialLayout;
} VkImageCreateInfo;
```

- `sType` is a VkStructureType value identifying this structure.
- `pNext` is `NULL` or a pointer to a structure extending this structure.
- `flags` is a bitmask of VkImageCreateFlagBits describing additional parameters of the image.
- `imageType` is a VkImageType value specifying the basic dimensionality of the image. Layers in array textures do not count as a dimension for the purposes of the image type.
- `format` is a VkFormat describing the format and type of the texel blocks that will be contained in the image.
- `extent` is a VkExtent3D describing the number of data elements in each dimension of the base level.
- `mipLevels` describes the number of levels of detail available for minified sampling of the image.
- `arrayLayers` is the number of layers in the image.
- `samples` is a VkSampleCountFlagBits value specifying the number of samples per texel.
- `tiling` is a VkImageTiling value specifying the tiling arrangement of the texel blocks in memory.
- `usage` is a bitmask of VkImageUsageFlagBits describing the intended usage of the image.
- `sharingMode` is a VkSharingMode value specifying the sharing mode of the image when it will be accessed by multiple queue families.
- `queueFamilyIndexCount` is the number of entries in the `pQueueFamilyIndices` array.
- `pQueueFamilyIndices` is a pointer to an array of queue families that will access this image. It is ignored if `sharingMode` is not `VK_SHARING_MODE_CONCURRENT`.
- `initialLayout` is a VkImageLayout value specifying the initial VkImageLayout of all image subresources of the image. See Image Layouts.

Images created with `tiling` equal to `VK_IMAGE_TILING_LINEAR` have further restrictions on their limits and capabilities compared to images created with `tiling` equal to `VK_IMAGE_TILING_OPTIMAL`. Creation

of images with tiling VK_IMAGE_TILING_LINEAR **may** not be supported unless other parameters meet all of the constraints:

- imageType is VK_IMAGE_TYPE_2D
- format is not a depth/stencil format
- mipLevels is 1
- arrayLayers is 1
- samples is VK_SAMPLE_COUNT_1_BIT
- usage only includes VK_IMAGE_USAGE_TRANSFER_SRC_BIT and/or VK_IMAGE_USAGE_TRANSFER_DST_BIT

Images created with one of the formats that require a sampler $Y'C_BC_R$ conversion, have further restrictions on their limits and capabilities compared to images created with other formats. Creation of images with a format requiring $Y'C_BC_R$ conversion **may** not be supported unless other parameters meet all of the constraints:

- imageType is VK_IMAGE_TYPE_2D
- mipLevels is 1
- arrayLayers is 1, unless otherwise indicated by VkImageFormatProperties::maxArrayLayers, as returned by vkGetPhysicalDeviceImageFormatProperties
- samples is VK_SAMPLE_COUNT_1_BIT

Implementations **may** support additional limits and capabilities beyond those listed above.

To determine the set of valid usage bits for a given format, call vkGetPhysicalDeviceFormatProperties.

If the size of the resultant image would exceed maxResourceSize, then vkCreateImage **must** fail and return VK_ERROR_OUT_OF_DEVICE_MEMORY. This failure **may** occur even when all image creation parameters satisfy their valid usage requirements.

NOTE

For images created without VK_IMAGE_CREATE_EXTENDED_USAGE_BIT a usage bit is valid if it is supported for the format the image is created with.

For images created with VK_IMAGE_CREATE_EXTENDED_USAGE_BIT a usage bit is valid if it is supported for at least one of the formats a VkImageView created from the image **can** have (see Image Views for more detail).

Image Creation Limits

Valid values for some image creation parameters are limited by a numerical upper bound or by inclusion in a bitset. For example, VkImageCreateInfo::arrayLayers is limited by imageCreateMaxArrayLayers, defined below; and VkImageCreateInfo::samples is limited by imageCreateSampleCounts, also defined below.

Several limiting values are defined below, as well as assisting values from which the limiting values are derived. The limiting values are referenced by the relevant valid usage statements

of VkImageCreateInfo.

- Let `VkBool32 imageCreateMaybeLinear` indicate if the resultant image may be linear. (The definition below is trivial because certain extensions are disabled in this build of the specification).
  - If `tiling` is `VK_IMAGE_TILING_LINEAR`, then `imageCreateMaybeLinear` is `VK_TRUE`.
  - If `tiling` is `VK_IMAGE_TILING_OPTIMAL`, then `imageCreateMaybeLinear` is `VK_FALSE`.
- Let `VkFormatFeatureFlags imageCreateFormatFeatures` be the set of valid *format features* available during image creation.
  - If `tiling` is `VK_IMAGE_TILING_LINEAR`, then `imageCreateFormatFeatures` is the value of VkFormatProperties::`linearTilingFeatures` found by calling vkGetPhysicalDeviceFormatProperties with parameter `format` equal to VkImageCreateInfo::`format`.
  - If `tiling` is `VK_IMAGE_TILING_OPTIMAL`, then `imageCreateFormatFeatures` is the value of VkFormatProperties::`optimalTilingFeatures` found by calling vkGetPhysicalDeviceFormatProperties with parameter `format` equal to VkImageCreateInfo::`format`.
- Let `VkImageFormatProperties2 imageCreateImageFormatPropertiesList[]` be the list of structures obtained by calling vkGetPhysicalDeviceImageFormatProperties2, possibly multiple times, as follows:
  - The parameters VkPhysicalDeviceImageFormatInfo2::`format`, `imageType`, `tiling`, `usage`, and `flags` **must** be equal to those in VkImageCreateInfo.
  - If VkImageCreateInfo::`pNext` contains a VkExternalMemoryImageCreateInfo structure whose `handleTypes` is not `0`, then VkPhysicalDeviceImageFormatInfo2::`pNext` **must** contain a VkPhysicalDeviceExternalImageFormatInfo structure whose `handleType` is not `0`; and vkGetPhysicalDeviceImageFormatProperties2 **must** be called for each handle type in VkExternalMemoryImageCreateInfo::`handleTypes`, successively setting VkPhysicalDeviceExternalImageFormatInfo::`handleType` on each call.
  - If VkImageCreateInfo::`pNext` contains no VkExternalMemoryImageCreateInfo structure, or contains a structure whose `handleTypes` is `0`, then VkPhysicalDeviceImageFormatInfo2::`pNext` **must** either contain no VkPhysicalDeviceExternalImageFormatInfo structure, or contain a structure whose `handleType` is `0`.
  - If any call to vkGetPhysicalDeviceImageFormatProperties2 returns an error, then `imageCreateImageFormatPropertiesList` is defined to be the empty list.
- Let `uint32_t imageCreateMaxMipLevels` be the minimum value of VkImageFormatProperties::`maxMipLevels` in `imageCreateImageFormatPropertiesList`. The value is undefined if `imageCreateImageFormatPropertiesList` is empty.
- Let `uint32_t imageCreateMaxArrayLayers` be the minimum value of VkImageFormatProperties::`maxArrayLayers` in `imageCreateImageFormatPropertiesList`. The value is undefined if `imageCreateImageFormatPropertiesList` is empty.
- Let `VkExtent3D imageCreateMaxExtent` be the component-wise minimum over all VkImageFormatProperties::`maxExtent` values in `imageCreateImageFormatPropertiesList`. The

value is undefined if imageCreateImageFormatPropertiesList is empty.

- Let VkSampleCountFlags imageCreateSampleCounts be the intersection of each VkImageFormatProperties::sampleCounts in imageCreateImageFormatPropertiesList. The value is undefined if imageCreateImageFormatPropertiesList is empty.

Valid Usage

- VUID-VkImageCreateInfo-imageCreateMaxMipLevels-02251
  Each of the following values (as described in Image Creation Limits) **must** not be undefined : imageCreateMaxMipLevels, imageCreateMaxArrayLayers, imageCreateMaxExtent, and imageCreateSampleCounts
- VUID-VkImageCreateInfo-sharingMode-00941
  If sharingMode is VK_SHARING_MODE_CONCURRENT, pQueueFamilyIndices **must** be a valid pointer to an array of queueFamilyIndexCount uint32_t values
- VUID-VkImageCreateInfo-sharingMode-00942
  If sharingMode is VK_SHARING_MODE_CONCURRENT, queueFamilyIndexCount **must** be greater than 1
- VUID-VkImageCreateInfo-sharingMode-01420
  If sharingMode is VK_SHARING_MODE_CONCURRENT, each element of pQueueFamilyIndices **must** be unique and **must** be less than pQueueFamilyPropertyCount returned by either vkGetPhysicalDeviceQueueFamilyProperties or vkGetPhysicalDeviceQueueFamilyProperties2 for the physicalDevice that was used to create device
- VUID-VkImageCreateInfo-format-00943
  format **must** not be VK_FORMAT_UNDEFINED
- VUID-VkImageCreateInfo-extent-00944
  extent.width **must** be greater than 0
- VUID-VkImageCreateInfo-extent-00945
  extent.height **must** be greater than 0
- VUID-VkImageCreateInfo-extent-00946
  extent.depth **must** be greater than 0
- VUID-VkImageCreateInfo-mipLevels-00947
  mipLevels **must** be greater than 0
- VUID-VkImageCreateInfo-arrayLayers-00948
  arrayLayers **must** be greater than 0
- VUID-VkImageCreateInfo-flags-00949
  If flags contains VK_IMAGE_CREATE_CUBE_COMPATIBLE_BIT, imageType **must** be VK_IMAGE_TYPE_2D
- VUID-VkImageCreateInfo-flags-08865
  If flags contains VK_IMAGE_CREATE_CUBE_COMPATIBLE_BIT, extent.width and extent.height **must** be equal
- VUID-VkImageCreateInfo-flags-08866

If `flags` contains `VK_IMAGE_CREATE_CUBE_COMPATIBLE_BIT`, `arrayLayers` **must** be greater than or equal to 6

- VUID-VkImageCreateInfo-flags-00950
  If `flags` contains `VK_IMAGE_CREATE_2D_ARRAY_COMPATIBLE_BIT`, `imageType` **must** be `VK_IMAGE_TYPE_3D`
- VUID-VkImageCreateInfo-flags-09403
  If `flags` contains `VK_IMAGE_CREATE_2D_ARRAY_COMPATIBLE_BIT`, `flags` **must** not include `VK_IMAGE_CREATE_SPARSE_ALIASED_BIT`, `VK_IMAGE_CREATE_SPARSE_BINDING_BIT`, or `VK_IMAGE_CREATE_SPARSE_RESIDENCY_BIT`
- VUID-VkImageCreateInfo-extent-02252
  `extent.width` **must** be less than or equal to `imageCreateMaxExtent.width` (as defined in Image Creation Limits)
- VUID-VkImageCreateInfo-extent-02253
  `extent.height` **must** be less than or equal to `imageCreateMaxExtent.height` (as defined in Image Creation Limits)
- VUID-VkImageCreateInfo-extent-02254
  `extent.depth` **must** be less than or equal to `imageCreateMaxExtent.depth` (as defined in Image Creation Limits)
- VUID-VkImageCreateInfo-imageType-00956
  If `imageType` is `VK_IMAGE_TYPE_1D`, both `extent.height` and `extent.depth` **must** be `1`
- VUID-VkImageCreateInfo-imageType-00957
  If `imageType` is `VK_IMAGE_TYPE_2D`, `extent.depth` **must** be `1`
- VUID-VkImageCreateInfo-mipLevels-00958
  `mipLevels` **must** be less than or equal to the number of levels in the complete mipmap chain based on `extent.width`, `extent.height`, and `extent.depth`
- VUID-VkImageCreateInfo-mipLevels-02255
  `mipLevels` **must** be less than or equal to `imageCreateMaxMipLevels` (as defined in Image Creation Limits)
- VUID-VkImageCreateInfo-arrayLayers-02256
  `arrayLayers` **must** be less than or equal to `imageCreateMaxArrayLayers` (as defined in Image Creation Limits)
- VUID-VkImageCreateInfo-imageType-00961
  If `imageType` is `VK_IMAGE_TYPE_3D`, `arrayLayers` **must** be `1`
- VUID-VkImageCreateInfo-samples-02257
  If `samples` is not `VK_SAMPLE_COUNT_1_BIT`, then `imageType` **must** be `VK_IMAGE_TYPE_2D`, `flags` **must** not contain `VK_IMAGE_CREATE_CUBE_COMPATIBLE_BIT`, `mipLevels` **must** be equal to `1`, and `imageCreateMaybeLinear` (as defined in Image Creation Limits) **must** be `VK_FALSE`,
- VUID-VkImageCreateInfo-usage-00963
  If `usage` includes `VK_IMAGE_USAGE_TRANSIENT_ATTACHMENT_BIT`, then bits other than `VK_IMAGE_USAGE_COLOR_ATTACHMENT_BIT`, `VK_IMAGE_USAGE_DEPTH_STENCIL_ATTACHMENT_BIT`, and `VK_IMAGE_USAGE_INPUT_ATTACHMENT_BIT` **must** not be set
- VUID-VkImageCreateInfo-usage-00964

If usage includes VK_IMAGE_USAGE_COLOR_ATTACHMENT_BIT, VK_IMAGE_USAGE_DEPTH_STENCIL_ATTACHMENT_BIT, VK_IMAGE_USAGE_TRANSIENT_ATTACHMENT_BIT, or VK_IMAGE_USAGE_INPUT_ATTACHMENT_BIT, extent.width **must** be less than or equal to VkPhysicalDeviceLimits::maxFramebufferWidth

- VUID-VkImageCreateInfo-usage-00965
  If usage includes VK_IMAGE_USAGE_COLOR_ATTACHMENT_BIT, VK_IMAGE_USAGE_DEPTH_STENCIL_ATTACHMENT_BIT, VK_IMAGE_USAGE_TRANSIENT_ATTACHMENT_BIT, or VK_IMAGE_USAGE_INPUT_ATTACHMENT_BIT, extent.height **must** be less than or equal to VkPhysicalDeviceLimits::maxFramebufferHeight
- VUID-VkImageCreateInfo-usage-00966
  If usage includes VK_IMAGE_USAGE_TRANSIENT_ATTACHMENT_BIT, usage **must** also contain at least one of VK_IMAGE_USAGE_COLOR_ATTACHMENT_BIT, VK_IMAGE_USAGE_DEPTH_STENCIL_ATTACHMENT_BIT, or VK_IMAGE_USAGE_INPUT_ATTACHMENT_BIT
- VUID-VkImageCreateInfo-samples-02258
  samples **must** be a valid VkSampleCountFlagBits value that is set in imageCreateSampleCounts (as defined in Image Creation Limits)
- VUID-VkImageCreateInfo-usage-00968
  If the shaderStorageImageMultisample feature is not enabled, and usage contains VK_IMAGE_USAGE_STORAGE_BIT, samples **must** be VK_SAMPLE_COUNT_1_BIT
- VUID-VkImageCreateInfo-flags-00969
  If the sparseBinding feature is not enabled, flags **must** not contain VK_IMAGE_CREATE_SPARSE_BINDING_BIT
- VUID-VkImageCreateInfo-flags-01924
  If the sparseResidencyAliased feature is not enabled, flags **must** not contain VK_IMAGE_CREATE_SPARSE_ALIASED_BIT
- VUID-VkImageCreateInfo-tiling-04121
  If tiling is VK_IMAGE_TILING_LINEAR, flags **must** not contain VK_IMAGE_CREATE_SPARSE_RESIDENCY_BIT
- VUID-VkImageCreateInfo-imageType-00970
  If imageType is VK_IMAGE_TYPE_1D, flags **must** not contain VK_IMAGE_CREATE_SPARSE_RESIDENCY_BIT
- VUID-VkImageCreateInfo-imageType-00971
  If the sparseResidencyImage2D feature is not enabled, and imageType is VK_IMAGE_TYPE_2D, flags **must** not contain VK_IMAGE_CREATE_SPARSE_RESIDENCY_BIT
- VUID-VkImageCreateInfo-imageType-00972
  If the sparseResidencyImage3D feature is not enabled, and imageType is VK_IMAGE_TYPE_3D, flags **must** not contain VK_IMAGE_CREATE_SPARSE_RESIDENCY_BIT
- VUID-VkImageCreateInfo-imageType-00973
  If the sparseResidency2Samples feature is not enabled, imageType is VK_IMAGE_TYPE_2D, and samples is VK_SAMPLE_COUNT_2_BIT, flags **must** not contain VK_IMAGE_CREATE_SPARSE_RESIDENCY_BIT
- VUID-VkImageCreateInfo-imageType-00974
  If the sparseResidency4Samples feature is not enabled, imageType is VK_IMAGE_TYPE_2D, and

samples is VK_SAMPLE_COUNT_4_BIT, flags **must** not contain VK_IMAGE_CREATE_SPARSE_RESIDENCY_BIT

- VUID-VkImageCreateInfo-imageType-00975
  If the sparseResidency8Samples feature is not enabled, imageType is VK_IMAGE_TYPE_2D, and samples is VK_SAMPLE_COUNT_8_BIT, flags **must** not contain VK_IMAGE_CREATE_SPARSE_RESIDENCY_BIT
- VUID-VkImageCreateInfo-imageType-00976
  If the sparseResidency16Samples feature is not enabled, imageType is VK_IMAGE_TYPE_2D, and samples is VK_SAMPLE_COUNT_16_BIT, flags **must** not contain VK_IMAGE_CREATE_SPARSE_RESIDENCY_BIT
- VUID-VkImageCreateInfo-flags-00987
  If flags contains VK_IMAGE_CREATE_SPARSE_RESIDENCY_BIT or VK_IMAGE_CREATE_SPARSE_ALIASED_BIT, it **must** also contain VK_IMAGE_CREATE_SPARSE_BINDING_BIT
- VUID-VkImageCreateInfo-None-01925
  If any of the bits VK_IMAGE_CREATE_SPARSE_BINDING_BIT, VK_IMAGE_CREATE_SPARSE_RESIDENCY_BIT, or VK_IMAGE_CREATE_SPARSE_ALIASED_BIT are set, VK_IMAGE_USAGE_TRANSIENT_ATTACHMENT_BIT **must** not also be set
- VUID-VkImageCreateInfo-flags-01890
  If the protectedMemory feature is not enabled, flags **must** not contain VK_IMAGE_CREATE_PROTECTED_BIT
- VUID-VkImageCreateInfo-None-01891
  If any of the bits VK_IMAGE_CREATE_SPARSE_BINDING_BIT, VK_IMAGE_CREATE_SPARSE_RESIDENCY_BIT, or VK_IMAGE_CREATE_SPARSE_ALIASED_BIT are set, VK_IMAGE_CREATE_PROTECTED_BIT **must** not also be set
- VUID-VkImageCreateInfo-pNext-00990
  If the pNext chain includes a VkExternalMemoryImageCreateInfo structure, its handleTypes member **must** only contain bits that are also in VkExternalImageFormatProperties::externalMemoryProperties.compatibleHandleTypes, as returned by vkGetPhysicalDeviceImageFormatProperties2 with format, imageType, tiling, usage, and flags equal to those in this structure, and with a VkPhysicalDeviceExternalImageFormatInfo structure included in the pNext chain, with a handleType equal to any one of the handle types specified in VkExternalMemoryImageCreateInfo::handleTypes
- VUID-VkImageCreateInfo-physicalDeviceCount-01421
  If the logical device was created with VkDeviceGroupDeviceCreateInfo::physicalDeviceCount equal to 1, flags **must** not contain VK_IMAGE_CREATE_SPLIT_INSTANCE_BIND_REGIONS_BIT
- VUID-VkImageCreateInfo-flags-02259
  If flags contains VK_IMAGE_CREATE_SPLIT_INSTANCE_BIND_REGIONS_BIT, then mipLevels **must** be one, arrayLayers **must** be one, imageType **must** be VK_IMAGE_TYPE_2D. and imageCreateMaybeLinear (as defined in Image Creation Limits) **must** be VK_FALSE
- VUID-VkImageCreateInfo-flags-01572
  If flags contains VK_IMAGE_CREATE_BLOCK_TEXEL_VIEW_COMPATIBLE_BIT, then format **must** be a

compressed image format

- VUID-VkImageCreateInfo-flags-01573
  If `flags` contains `VK_IMAGE_CREATE_BLOCK_TEXEL_VIEW_COMPATIBLE_BIT`, then `flags` **must** also contain `VK_IMAGE_CREATE_MUTABLE_FORMAT_BIT`
- VUID-VkImageCreateInfo-initialLayout-00993
  `initialLayout` **must** be `VK_IMAGE_LAYOUT_UNDEFINED` or `VK_IMAGE_LAYOUT_PREINITIALIZED`
- VUID-VkImageCreateInfo-pNext-01443
  If the `pNext` chain includes a VkExternalMemoryImageCreateInfo or `VkExternalMemoryImageCreateInfoNV` structure whose `handleTypes` member is not `0`, `initialLayout` **must** be `VK_IMAGE_LAYOUT_UNDEFINED`
- VUID-VkImageCreateInfo-format-06410
  If the image `format` is one of the formats that require a sampler $Y'C_BC_R$ conversion, `mipLevels` **must** be 1
- VUID-VkImageCreateInfo-format-06411
  If the image `format` is one of the formats that require a sampler $Y'C_BC_R$ conversion, `samples` **must** be `VK_SAMPLE_COUNT_1_BIT`
- VUID-VkImageCreateInfo-format-06412
  If the image `format` is one of the formats that require a sampler $Y'C_BC_R$ conversion, `imageType` **must** be `VK_IMAGE_TYPE_2D`
- VUID-VkImageCreateInfo-imageCreateFormatFeatures-02260
  If `format` is a *multi-planar* format, and if `imageCreateFormatFeatures` (as defined in Image Creation Limits) does not contain `VK_FORMAT_FEATURE_DISJOINT_BIT`, then `flags` **must** not contain `VK_IMAGE_CREATE_DISJOINT_BIT`
- VUID-VkImageCreateInfo-format-01577
  If `format` is not a *multi-planar* format, and `flags` does not include `VK_IMAGE_CREATE_ALIAS_BIT`, `flags` **must** not contain `VK_IMAGE_CREATE_DISJOINT_BIT`
- VUID-VkImageCreateInfo-format-04712
  If `format` has a `_422` or `_420` suffix, `extent.width` **must** be a multiple of 2
- VUID-VkImageCreateInfo-format-04713
  If `format` has a `_420` suffix, `extent.height` **must** be a multiple of 2
- VUID-VkImageCreateInfo-format-02795
  If `format` is a depth-stencil format, `usage` includes `VK_IMAGE_USAGE_DEPTH_STENCIL_ATTACHMENT_BIT`, and the `pNext` chain includes a VkImageStencilUsageCreateInfo structure, then its VkImageStencilUsageCreateInfo ::`stencilUsage` member **must** also include `VK_IMAGE_USAGE_DEPTH_STENCIL_ATTACHMENT_BIT`
- VUID-VkImageCreateInfo-format-02796
  If `format` is a depth-stencil format, `usage` does not include `VK_IMAGE_USAGE_DEPTH_STENCIL_ATTACHMENT_BIT`, and the `pNext` chain includes a VkImageStencilUsageCreateInfo structure, then its VkImageStencilUsageCreateInfo ::`stencilUsage` member **must** also not include `VK_IMAGE_USAGE_DEPTH_STENCIL_ATTACHMENT_BIT`
- VUID-VkImageCreateInfo-format-02797
  If `format` is a depth-stencil format, `usage` includes

VK_IMAGE_USAGE_TRANSIENT_ATTACHMENT_BIT, and the pNext chain includes a VkImageStencilUsageCreateInfo structure, then its VkImageStencilUsageCreateInfo ::stencilUsage member **must** also include VK_IMAGE_USAGE_TRANSIENT_ATTACHMENT_BIT

- VUID-VkImageCreateInfo-format-02798
  If format is a depth-stencil format, usage does not include VK_IMAGE_USAGE_TRANSIENT_ATTACHMENT_BIT, and the pNext chain includes a VkImageStencilUsageCreateInfo structure, then its VkImageStencilUsageCreateInfo ::stencilUsage member **must** also not include VK_IMAGE_USAGE_TRANSIENT_ATTACHMENT_BIT
- VUID-VkImageCreateInfo-Format-02536
  If Format is a depth-stencil format and the pNext chain includes a VkImageStencilUsageCreateInfo structure with its stencilUsage member including VK_IMAGE_USAGE_INPUT_ATTACHMENT_BIT, extent.width **must** be less than or equal to VkPhysicalDeviceLimits::maxFramebufferWidth
- VUID-VkImageCreateInfo-format-02537
  If format is a depth-stencil format and the pNext chain includes a VkImageStencilUsageCreateInfo structure with its stencilUsage member including VK_IMAGE_USAGE_INPUT_ATTACHMENT_BIT, extent.height **must** be less than or equal to VkPhysicalDeviceLimits::maxFramebufferHeight
- VUID-VkImageCreateInfo-format-02538
  If the shaderStorageImageMultisample feature is not enabled, format is a depth-stencil format and the pNext chain includes a VkImageStencilUsageCreateInfo structure with its stencilUsage including VK_IMAGE_USAGE_STORAGE_BIT, samples **must** be VK_SAMPLE_COUNT_1_BIT
- VUID-VkImageCreateInfo-pNext-06722
  If a VkImageFormatListCreateInfo structure was included in the pNext chain and format is not a multi-planar format and VkImageFormatListCreateInfo::viewFormatCount is not zero, then each format in VkImageFormatListCreateInfo::pViewFormats **must** either be compatible with the format as described in the compatibility table or, if flags contains VK_IMAGE_CREATE_BLOCK_TEXEL_VIEW_COMPATIBLE_BIT, be an uncompressed format that is size-compatible with format
- VUID-VkImageCreateInfo-pNext-10062
  If a VkImageFormatListCreateInfo structure was included in the pNext chain and format is a multi-planar format and flags contains VK_IMAGE_CREATE_MUTABLE_FORMAT_BIT and VkImageFormatListCreateInfo::viewFormatCount is not zero, then each format in VkImageFormatListCreateInfo::pViewFormats **must** be compatible with the VkFormat for the plane of the image format
- VUID-VkImageCreateInfo-flags-04738
  If flags does not contain VK_IMAGE_CREATE_MUTABLE_FORMAT_BIT and the pNext chain includes a VkImageFormatListCreateInfo structure, then VkImageFormatListCreateInfo ::viewFormatCount **must** be 0 or 1

Valid Usage (Implicit)

- VUID-VkImageCreateInfo-sType-sType

sType **must** be VK_STRUCTURE_TYPE_IMAGE_CREATE_INFO

- VUID-VkImageCreateInfo-pNext-pNext
  Each pNext member of any structure (including this one) in the pNext chain **must** be either NULL or a pointer to a valid instance of VkExternalMemoryImageCreateInfo, VkImageFormatListCreateInfo, or VkImageStencilUsageCreateInfo
- VUID-VkImageCreateInfo-sType-unique
  The sType value of each struct in the pNext chain **must** be unique
- VUID-VkImageCreateInfo-flags-parameter
  flags **must** be a valid combination of VkImageCreateFlagBits values
- VUID-VkImageCreateInfo-imageType-parameter
  imageType **must** be a valid VkImageType value
- VUID-VkImageCreateInfo-format-parameter
  format **must** be a valid VkFormat value
- VUID-VkImageCreateInfo-samples-parameter
  samples **must** be a valid VkSampleCountFlagBits value
- VUID-VkImageCreateInfo-tiling-parameter
  tiling **must** be a valid VkImageTiling value
- VUID-VkImageCreateInfo-usage-parameter
  usage **must** be a valid combination of VkImageUsageFlagBits values
- VUID-VkImageCreateInfo-usage-requiredbitmask
  usage **must** not be 0
- VUID-VkImageCreateInfo-sharingMode-parameter
  sharingMode **must** be a valid VkSharingMode value
- VUID-VkImageCreateInfo-initialLayout-parameter
  initialLayout **must** be a valid VkImageLayout value

The VkImageStencilUsageCreateInfo structure is defined as:

```
// Provided by VK_VERSION_1_2
typedef struct VkImageStencilUsageCreateInfo {
    VkStructureType      sType;
    const void*          pNext;
    VkImageUsageFlags    stencilUsage;
} VkImageStencilUsageCreateInfo;
```

- sType is a VkStructureType value identifying this structure.
- pNext is NULL or a pointer to a structure extending this structure.
- stencilUsage is a bitmask of VkImageUsageFlagBits describing the intended usage of the stencil aspect of the image.

If the pNext chain of VkImageCreateInfo includes a VkImageStencilUsageCreateInfo structure, then that structure includes the usage flags specific to the stencil aspect of the image for an image with a

depth-stencil format.

This structure specifies image usages which only apply to the stencil aspect of a depth/stencil format image. When this structure is included in the pNext chain of VkImageCreateInfo, the stencil aspect of the image **must** only be used as specified by stencilUsage. When this structure is not included in the pNext chain of VkImageCreateInfo, the stencil aspect of an image **must** only be used as specified by VkImageCreateInfo::usage. Use of other aspects of an image are unaffected by this structure.

This structure **can** also be included in the pNext chain of VkPhysicalDeviceImageFormatInfo2 to query additional capabilities specific to image creation parameter combinations including a separate set of usage flags for the stencil aspect of the image using vkGetPhysicalDeviceImageFormatProperties2. When this structure is not included in the pNext chain of VkPhysicalDeviceImageFormatInfo2 then the implicit value of stencilUsage matches that of VkPhysicalDeviceImageFormatInfo2::usage.

Valid Usage

- VUID-VkImageStencilUsageCreateInfo-stencilUsage-02539
  If stencilUsage includes VK_IMAGE_USAGE_TRANSIENT_ATTACHMENT_BIT, it **must** not include bits other than VK_IMAGE_USAGE_DEPTH_STENCIL_ATTACHMENT_BIT or VK_IMAGE_USAGE_INPUT_ATTACHMENT_BIT

Valid Usage (Implicit)

- VUID-VkImageStencilUsageCreateInfo-sType-sType
  sType **must** be VK_STRUCTURE_TYPE_IMAGE_STENCIL_USAGE_CREATE_INFO
- VUID-VkImageStencilUsageCreateInfo-stencilUsage-parameter
  stencilUsage **must** be a valid combination of VkImageUsageFlagBits values
- VUID-VkImageStencilUsageCreateInfo-stencilUsage-requiredbitmask
  stencilUsage **must** not be 0

To define a set of external memory handle types that **may** be used as backing store for an image, add a VkExternalMemoryImageCreateInfo structure to the pNext chain of the VkImageCreateInfo structure. The VkExternalMemoryImageCreateInfo structure is defined as:

```
// Provided by VK_VERSION_1_1
typedef struct VkExternalMemoryImageCreateInfo {
    VkStructureType                       sType;
    const void*                           pNext;
    VkExternalMemoryHandleTypeFlags       handleTypes;
} VkExternalMemoryImageCreateInfo;
```

NOTE A VkExternalMemoryImageCreateInfo structure with a non-zero handleTypes field must be included in the creation parameters for an image that will be bound to memory

> that is either exported or imported.

- `sType` is a VkStructureType value identifying this structure.
- `pNext` is `NULL` or a pointer to a structure extending this structure.
- `handleTypes` is zero or a bitmask of VkExternalMemoryHandleTypeFlagBits specifying one or more external memory handle types.

Valid Usage (Implicit)

- VUID-VkExternalMemoryImageCreateInfo-sType-sType
  `sType` **must** be `VK_STRUCTURE_TYPE_EXTERNAL_MEMORY_IMAGE_CREATE_INFO`
- VUID-VkExternalMemoryImageCreateInfo-handleTypes-parameter
  `handleTypes` **must** be a valid combination of VkExternalMemoryHandleTypeFlagBits values

If the `pNext` chain of VkImageCreateInfo includes a `VkImageFormatListCreateInfo` structure, then that structure contains a list of all formats that **can** be used when creating views of this image.

The `VkImageFormatListCreateInfo` structure is defined as:

```
// Provided by VK_VERSION_1_2
typedef struct VkImageFormatListCreateInfo {
    VkStructureType    sType;
    const void*        pNext;
    uint32_t           viewFormatCount;
    const VkFormat*    pViewFormats;
} VkImageFormatListCreateInfo;
```

- `sType` is a VkStructureType value identifying this structure.
- `pNext` is `NULL` or a pointer to a structure extending this structure.
- `viewFormatCount` is the number of entries in the `pViewFormats` array.
- `pViewFormats` is a pointer to an array of VkFormat values specifying all formats which **can** be used when creating views of this image.

If `viewFormatCount` is zero, `pViewFormats` is ignored and the image is created as if the `VkImageFormatListCreateInfo` structure were not included in the `pNext` chain of VkImageCreateInfo.

Valid Usage

- VUID-VkImageFormatListCreateInfo-viewFormatCount-09540
  If `viewFormatCount` is not 0, each element of `pViewFormats` **must** not be `VK_FORMAT_UNDEFINED`

Valid Usage (Implicit)

- VUID-VkImageFormatListCreateInfo-sType-sType
  `sType` **must** be `VK_STRUCTURE_TYPE_IMAGE_FORMAT_LIST_CREATE_INFO`
- VUID-VkImageFormatListCreateInfo-pViewFormats-parameter
  If `viewFormatCount` is not `0`, `pViewFormats` **must** be a valid pointer to an array of `viewFormatCount` valid VkFormat values

Bits which **can** be set in

- VkImageViewUsageCreateInfo::`usage`
- VkImageStencilUsageCreateInfo::`stencilUsage`
- VkImageCreateInfo::`usage`

specify intended usage of an image, and are:

```
// Provided by VK_VERSION_1_0
typedef enum VkImageUsageFlagBits {
    VK_IMAGE_USAGE_TRANSFER_SRC_BIT = 0x00000001,
    VK_IMAGE_USAGE_TRANSFER_DST_BIT = 0x00000002,
    VK_IMAGE_USAGE_SAMPLED_BIT = 0x00000004,
    VK_IMAGE_USAGE_STORAGE_BIT = 0x00000008,
    VK_IMAGE_USAGE_COLOR_ATTACHMENT_BIT = 0x00000010,
    VK_IMAGE_USAGE_DEPTH_STENCIL_ATTACHMENT_BIT = 0x00000020,
    VK_IMAGE_USAGE_TRANSIENT_ATTACHMENT_BIT = 0x00000040,
    VK_IMAGE_USAGE_INPUT_ATTACHMENT_BIT = 0x00000080,
} VkImageUsageFlagBits;
```

- `VK_IMAGE_USAGE_TRANSFER_SRC_BIT` specifies that the image **can** be used as the source of a transfer command.
- `VK_IMAGE_USAGE_TRANSFER_DST_BIT` specifies that the image **can** be used as the destination of a transfer command.
- `VK_IMAGE_USAGE_SAMPLED_BIT` specifies that the image **can** be used to create a `VkImageView` suitable for occupying a `VkDescriptorSet` slot either of type `VK_DESCRIPTOR_TYPE_SAMPLED_IMAGE` or `VK_DESCRIPTOR_TYPE_COMBINED_IMAGE_SAMPLER`, and be sampled by a shader.
- `VK_IMAGE_USAGE_STORAGE_BIT` specifies that the image **can** be used to create a `VkImageView` suitable for occupying a `VkDescriptorSet` slot of type `VK_DESCRIPTOR_TYPE_STORAGE_IMAGE`.
- `VK_IMAGE_USAGE_COLOR_ATTACHMENT_BIT` specifies that the image **can** be used to create a `VkImageView` suitable for use as a color or resolve attachment in a `VkFramebuffer`.
- `VK_IMAGE_USAGE_DEPTH_STENCIL_ATTACHMENT_BIT` specifies that the image **can** be used to create a `VkImageView` suitable for use as a depth/stencil or depth/stencil resolve attachment in a `VkFramebuffer`.
- `VK_IMAGE_USAGE_TRANSIENT_ATTACHMENT_BIT` specifies that implementations **may** support using

memory allocations with the VK_MEMORY_PROPERTY_LAZILY_ALLOCATED_BIT to back an image with this usage. This bit **can** be set for any image that **can** be used to create a VkImageView suitable for use as a color, resolve, depth/stencil, or input attachment.

- VK_IMAGE_USAGE_INPUT_ATTACHMENT_BIT specifies that the image **can** be used to create a VkImageView suitable for occupying VkDescriptorSet slot of type VK_DESCRIPTOR_TYPE_INPUT_ATTACHMENT; be read from a shader as an input attachment; and be used as an input attachment in a framebuffer.

```
// Provided by VK_VERSION_1_0
typedef VkFlags VkImageUsageFlags;
```

VkImageUsageFlags is a bitmask type for setting a mask of zero or more VkImageUsageFlagBits.

When creating a VkImageView one of the following VkImageUsageFlagBits **must** be set:

- VK_IMAGE_USAGE_SAMPLED_BIT
- VK_IMAGE_USAGE_STORAGE_BIT
- VK_IMAGE_USAGE_COLOR_ATTACHMENT_BIT
- VK_IMAGE_USAGE_DEPTH_STENCIL_ATTACHMENT_BIT
- VK_IMAGE_USAGE_INPUT_ATTACHMENT_BIT
- VK_IMAGE_USAGE_TRANSIENT_ATTACHMENT_BIT

Bits which **can** be set in VkImageCreateInfo::flags, specifying additional parameters of an image, are:

```
// Provided by VK_VERSION_1_0
typedef enum VkImageCreateFlagBits {
    VK_IMAGE_CREATE_SPARSE_BINDING_BIT = 0x00000001,
    VK_IMAGE_CREATE_SPARSE_RESIDENCY_BIT = 0x00000002,
    VK_IMAGE_CREATE_SPARSE_ALIASED_BIT = 0x00000004,
    VK_IMAGE_CREATE_MUTABLE_FORMAT_BIT = 0x00000008,
    VK_IMAGE_CREATE_CUBE_COMPATIBLE_BIT = 0x00000010,
  // Provided by VK_VERSION_1_1
    VK_IMAGE_CREATE_ALIAS_BIT = 0x00000400,
  // Provided by VK_VERSION_1_1
    VK_IMAGE_CREATE_SPLIT_INSTANCE_BIND_REGIONS_BIT = 0x00000040,
  // Provided by VK_VERSION_1_1
    VK_IMAGE_CREATE_2D_ARRAY_COMPATIBLE_BIT = 0x00000020,
  // Provided by VK_VERSION_1_1
    VK_IMAGE_CREATE_BLOCK_TEXEL_VIEW_COMPATIBLE_BIT = 0x00000080,
  // Provided by VK_VERSION_1_1
    VK_IMAGE_CREATE_EXTENDED_USAGE_BIT = 0x00000100,
  // Provided by VK_VERSION_1_1
    VK_IMAGE_CREATE_PROTECTED_BIT = 0x00000800,
  // Provided by VK_VERSION_1_1
    VK_IMAGE_CREATE_DISJOINT_BIT = 0x00000200,
} VkImageCreateFlagBits;
```

- VK_IMAGE_CREATE_SPARSE_BINDING_BIT specifies that the image will be backed using sparse memory binding.
- VK_IMAGE_CREATE_SPARSE_RESIDENCY_BIT specifies that the image **can** be partially backed using sparse memory binding. Images created with this flag **must** also be created with the VK_IMAGE_CREATE_SPARSE_BINDING_BIT flag.
- VK_IMAGE_CREATE_SPARSE_ALIASED_BIT specifies that the image will be backed using sparse memory binding with memory ranges that might also simultaneously be backing another image (or another portion of the same image). Images created with this flag **must** also be created with the VK_IMAGE_CREATE_SPARSE_BINDING_BIT flag.
- VK_IMAGE_CREATE_MUTABLE_FORMAT_BIT specifies that the image **can** be used to create a VkImageView with a different format from the image. For multi-planar formats, VK_IMAGE_CREATE_MUTABLE_FORMAT_BIT specifies that a VkImageView can be created of a *plane* of the image.
- VK_IMAGE_CREATE_CUBE_COMPATIBLE_BIT specifies that the image **can** be used to create a VkImageView of type VK_IMAGE_VIEW_TYPE_CUBE or VK_IMAGE_VIEW_TYPE_CUBE_ARRAY.
- VK_IMAGE_CREATE_2D_ARRAY_COMPATIBLE_BIT specifies that the image **can** be used to create a VkImageView of type VK_IMAGE_VIEW_TYPE_2D or VK_IMAGE_VIEW_TYPE_2D_ARRAY.
- VK_IMAGE_CREATE_PROTECTED_BIT specifies that the image is a protected image.
- VK_IMAGE_CREATE_SPLIT_INSTANCE_BIND_REGIONS_BIT specifies that the image **can** be used with a non-zero value of the splitInstanceBindRegionCount member of a VkBindImageMemoryDeviceGroupInfo structure passed into vkBindImageMemory2. This flag also has the effect of making the image use the standard sparse image block dimensions.

- VK_IMAGE_CREATE_BLOCK_TEXEL_VIEW_COMPATIBLE_BIT specifies that the image having a compressed format **can** be used to create a VkImageView with an uncompressed format where each texel in the image view corresponds to a compressed texel block of the image.
- VK_IMAGE_CREATE_EXTENDED_USAGE_BIT specifies that the image **can** be created with usage flags that are not supported for the format the image is created with but are supported for at least one format a VkImageView created from the image **can** have.
- VK_IMAGE_CREATE_DISJOINT_BIT specifies that an image with a multi-planar format **must** have each plane separately bound to memory, rather than having a single memory binding for the whole image; the presence of this bit distinguishes a *disjoint image* from an image without this bit set.
- VK_IMAGE_CREATE_ALIAS_BIT specifies that two images created with the same creation parameters and aliased to the same memory **can** interpret the contents of the memory consistently with each other, subject to the rules described in the Memory Aliasing section. This flag further specifies that each plane of a *disjoint* image **can** share an in-memory non-linear representation with single-plane images, and that a single-plane image **can** share an in-memory non-linear representation with a plane of a multi-planar disjoint image, according to the rules in Compatible Formats of Planes of Multi-Planar Formats. If the pNext chain includes a VkExternalMemoryImageCreateInfo structure whose handleTypes member is not 0, it is as if VK_IMAGE_CREATE_ALIAS_BIT is set.

See Sparse Resource Features and Sparse Physical Device Features for more details.

```
// Provided by VK_VERSION_1_0
typedef VkFlags VkImageCreateFlags;
```

VkImageCreateFlags is a bitmask type for setting a mask of zero or more VkImageCreateFlagBits.

Possible values of VkImageCreateInfo::imageType, specifying the basic dimensionality of an image, are:

```
// Provided by VK_VERSION_1_0
typedef enum VkImageType {
    VK_IMAGE_TYPE_1D = 0,
    VK_IMAGE_TYPE_2D = 1,
    VK_IMAGE_TYPE_3D = 2,
} VkImageType;
```

- VK_IMAGE_TYPE_1D specifies a one-dimensional image.
- VK_IMAGE_TYPE_2D specifies a two-dimensional image.
- VK_IMAGE_TYPE_3D specifies a three-dimensional image.

Possible values of VkImageCreateInfo::tiling, specifying the tiling arrangement of texel blocks in an image, are:

```
// Provided by VK_VERSION_1_0
typedef enum VkImageTiling {
    VK_IMAGE_TILING_OPTIMAL = 0,
    VK_IMAGE_TILING_LINEAR = 1,
} VkImageTiling;
```

- VK_IMAGE_TILING_OPTIMAL specifies optimal tiling (texels are laid out in an implementation-dependent arrangement, for more efficient memory access).
- VK_IMAGE_TILING_LINEAR specifies linear tiling (texels are laid out in memory in row-major order, possibly with some padding on each row).

To query the memory layout of an image subresource, call:

```
// Provided by VK_VERSION_1_0
void vkGetImageSubresourceLayout(
    VkDevice                                    device,
    VkImage                                     image,
    const VkImageSubresource*                   pSubresource,
    VkSubresourceLayout*                        pLayout);
```

- device is the logical device that owns the image.
- image is the image whose layout is being queried.
- pSubresource is a pointer to a VkImageSubresource structure selecting a specific image subresource from the image.
- pLayout is a pointer to a VkSubresourceLayout structure in which the layout is returned.

The image **must** be linear. The returned layout is valid for host access.

If the image's format is a multi-planar format, then vkGetImageSubresourceLayout describes one plane of the image.

vkGetImageSubresourceLayout is invariant for the lifetime of a single image.

Valid Usage

- VUID-vkGetImageSubresourceLayout-image-07789
  image **must** have been created with tiling equal to VK_IMAGE_TILING_LINEAR
- VUID-vkGetImageSubresourceLayout-aspectMask-00997
  The aspectMask member of pSubresource **must** only have a single bit set
- VUID-vkGetImageSubresourceLayout-mipLevel-01716
  The mipLevel member of pSubresource **must** be less than the mipLevels specified in image
- VUID-vkGetImageSubresourceLayout-arrayLayer-01717
  The arrayLayer member of pSubresource **must** be less than the arrayLayers specified in image

- VUID-vkGetImageSubresourceLayout-format-08886
  If `format` of the `image` is a color format that is not a multi-planar image format, and `tiling` of the `image` is `VK_IMAGE_TILING_LINEAR` or `VK_IMAGE_TILING_OPTIMAL`, the `aspectMask` member of `pSubresource` **must** be `VK_IMAGE_ASPECT_COLOR_BIT`
- VUID-vkGetImageSubresourceLayout-format-04462
  If `format` of the `image` has a depth component, the `aspectMask` member of `pSubresource` **must** contain `VK_IMAGE_ASPECT_DEPTH_BIT`
- VUID-vkGetImageSubresourceLayout-format-04463
  If `format` of the `image` has a stencil component, the `aspectMask` member of `pSubresource` **must** contain `VK_IMAGE_ASPECT_STENCIL_BIT`
- VUID-vkGetImageSubresourceLayout-format-04464
  If `format` of the `image` does not contain a stencil or depth component, the `aspectMask` member of `pSubresource` **must** not contain `VK_IMAGE_ASPECT_DEPTH_BIT` or `VK_IMAGE_ASPECT_STENCIL_BIT`
- VUID-vkGetImageSubresourceLayout-tiling-08717
  If the `tiling` of the `image` is `VK_IMAGE_TILING_LINEAR` and has a multi-planar image format, then the `aspectMask` member of `pSubresource` **must** be a single valid multi-planar aspect mask bit

Valid Usage (Implicit)

- VUID-vkGetImageSubresourceLayout-device-parameter
  `device` **must** be a valid VkDevice handle
- VUID-vkGetImageSubresourceLayout-image-parameter
  `image` **must** be a valid VkImage handle
- VUID-vkGetImageSubresourceLayout-pSubresource-parameter
  `pSubresource` **must** be a valid pointer to a valid VkImageSubresource structure
- VUID-vkGetImageSubresourceLayout-pLayout-parameter
  `pLayout` **must** be a valid pointer to a VkSubresourceLayout structure
- VUID-vkGetImageSubresourceLayout-image-parent
  `image` **must** have been created, allocated, or retrieved from `device`

The `VkImageSubresource` structure is defined as:

```
// Provided by VK_VERSION_1_0
typedef struct VkImageSubresource {
    VkImageAspectFlags    aspectMask;
    uint32_t              mipLevel;
    uint32_t              arrayLayer;
} VkImageSubresource;
```

- `aspectMask` is a VkImageAspectFlags value selecting the image *aspect*.

- `mipLevel` selects the mipmap level.
- `arrayLayer` selects the array layer.

Valid Usage (Implicit)

- VUID-VkImageSubresource-aspectMask-parameter
  `aspectMask` **must** be a valid combination of VkImageAspectFlagBits values
- VUID-VkImageSubresource-aspectMask-requiredbitmask
  `aspectMask` **must** not be `0`

Information about the layout of the image subresource is returned in a `VkSubresourceLayout` structure:

```
// Provided by VK_VERSION_1_0
typedef struct VkSubresourceLayout {
    VkDeviceSize    offset;
    VkDeviceSize    size;
    VkDeviceSize    rowPitch;
    VkDeviceSize    arrayPitch;
    VkDeviceSize    depthPitch;
} VkSubresourceLayout;
```

- `offset` is the byte offset from the start of the image or the plane where the image subresource begins.
- `size` is the size in bytes of the image subresource. `size` includes any extra memory that is required based on `rowPitch`.
- `rowPitch` describes the number of bytes between each row of texels in an image.
- `arrayPitch` describes the number of bytes between each array layer of an image.
- `depthPitch` describes the number of bytes between each slice of 3D image.

If the image is linear, then `rowPitch`, `arrayPitch` and `depthPitch` describe the layout of the image subresource in linear memory. For uncompressed formats, `rowPitch` is the number of bytes between texels with the same x coordinate in adjacent rows (y coordinates differ by one). `arrayPitch` is the number of bytes between texels with the same x and y coordinate in adjacent array layers of the image (array layer values differ by one). `depthPitch` is the number of bytes between texels with the same x and y coordinate in adjacent slices of a 3D image (z coordinates differ by one). Expressed as an addressing formula, the starting byte of a texel in the image subresource has address:

```
// (x,y,z,layer) are in texel coordinates
address(x,y,z,layer) = layer*arrayPitch + z*depthPitch + y*rowPitch + x*elementSize +
offset
```

For compressed formats, the `rowPitch` is the number of bytes between compressed texel blocks in adjacent rows. `arrayPitch` is the number of bytes between compressed texel blocks in adjacent

array layers. `depthPitch` is the number of bytes between compressed texel blocks in adjacent slices of a 3D image.

```
// (x,y,z,layer) are in compressed texel block coordinates
address(x,y,z,layer) = layer*arrayPitch + z*depthPitch + y*rowPitch + x
*compressedTexelBlockByteSize + offset;
```

The value of `arrayPitch` is undefined for images that were not created as arrays. `depthPitch` is defined only for 3D images.

If the image has a *single-plane* color format , then the `aspectMask` member of `VkImageSubresource` **must** be `VK_IMAGE_ASPECT_COLOR_BIT`.

If the image has a depth/stencil format , then `aspectMask` **must** be either `VK_IMAGE_ASPECT_DEPTH_BIT` or `VK_IMAGE_ASPECT_STENCIL_BIT`. On implementations that store depth and stencil aspects separately, querying each of these image subresource layouts will return a different `offset` and `size` representing the region of memory used for that aspect. On implementations that store depth and stencil aspects interleaved, the same `offset` and `size` are returned and represent the interleaved memory allocation.

If the image has a multi-planar format , then the `aspectMask` member of `VkImageSubresource` **must** be `VK_IMAGE_ASPECT_PLANE_0_BIT`, `VK_IMAGE_ASPECT_PLANE_1_BIT`, or (for 3-plane formats only) `VK_IMAGE_ASPECT_PLANE_2_BIT`. Querying each of these image subresource layouts will return a different `offset` and `size` representing the region of memory used for that plane. If the image is *disjoint*, then the `offset` is relative to the base address of the plane. If the image is *non-disjoint*, then the `offset` is relative to the base address of the image.

To destroy an image, call:

```
// Provided by VK_VERSION_1_0
void vkDestroyImage(
    VkDevice                                    device,
    VkImage                                     image,
    const VkAllocationCallbacks*                pAllocator);
```

- `device` is the logical device that destroys the image.
- `image` is the image to destroy.
- `pAllocator` controls host memory allocation as described in the Memory Allocation chapter.

Valid Usage

- VUID-vkDestroyImage-image-01000
  All submitted commands that refer to `image`, either directly or via a `VkImageView`, **must** have completed execution
- VUID-vkDestroyImage-image-01001
  If `VkAllocationCallbacks` were provided when `image` was created, a compatible set of

callbacks **must** be provided here

- VUID-vkDestroyImage-image-01002
  If no `VkAllocationCallbacks` were provided when `image` was created, `pAllocator` **must** be `NULL`

Valid Usage (Implicit)

- VUID-vkDestroyImage-device-parameter
  `device` **must** be a valid VkDevice handle
- VUID-vkDestroyImage-image-parameter
  If `image` is not VK_NULL_HANDLE, `image` **must** be a valid VkImage handle
- VUID-vkDestroyImage-pAllocator-parameter
  If `pAllocator` is not `NULL`, `pAllocator` **must** be a valid pointer to a valid VkAllocationCallbacks structure
- VUID-vkDestroyImage-image-parent
  If `image` is a valid handle, it **must** have been created, allocated, or retrieved from `device`

Host Synchronization

- Host access to `image` **must** be externally synchronized

12.3.1. Image Format Features

Valid uses of a VkImage **may** depend on the image's *format features*, defined below. Such constraints are documented in the affected valid usage statement.

- If the image was created with `VK_IMAGE_TILING_LINEAR`, then its set of *format features* is the value of VkFormatProperties::`linearTilingFeatures` found by calling vkGetPhysicalDeviceFormatProperties on the same `format` as VkImageCreateInfo::`format`.
- If the image was created with `VK_IMAGE_TILING_OPTIMAL`, then its set of *format features* is the value of VkFormatProperties::`optimalTilingFeatures` found by calling vkGetPhysicalDeviceFormatProperties on the same `format` as VkImageCreateInfo::`format`.

12.3.2. Image Mip Level Sizing

A *complete mipmap chain* is the full set of mip levels, from the largest mip level provided, down to the *minimum mip level size*.

Conventional Images

For conventional images, the dimensions of each successive mip level, n+1, are:

$$width_{n+1} = \max(\lfloor width_n/2 \rfloor, 1)$$

$$height_{n+1} = \max(\lfloor height_n / 2 \rfloor, 1)$$

$$depth_{n+1} = \max(\lfloor depth_n / 2 \rfloor, 1)$$

where $width_n$, $height_n$, and $depth_n$ are the dimensions of the next larger mip level, n.

The minimum mip level size is:

- 1 for one-dimensional images,
- 1x1 for two-dimensional images, and
- 1x1x1 for three-dimensional images.

The number of levels in a complete mipmap chain is:

$$\lfloor \log_2(\max(width_0, height_0, depth_0)) \rfloor + 1$$

where $width_0$, $height_0$, and $depth_0$ are the dimensions of the largest (most detailed) mip level, `0`.

12.4. Image Layouts

Images are stored in implementation-dependent opaque layouts in memory. Each layout has limitations on what kinds of operations are supported for image subresources using the layout. At any given time, the data representing an image subresource in memory exists in a particular layout which is determined by the most recent layout transition that was performed on that image subresource. Applications have control over which layout each image subresource uses, and **can** transition an image subresource from one layout to another. Transitions **can** happen with an image memory barrier, included as part of a vkCmdPipelineBarrier or a vkCmdWaitEvents command buffer command (see Image Memory Barriers), or as part of a subpass dependency within a render pass (see `VkSubpassDependency`).

Image layout is per-image subresource. Separate image subresources of the same image **can** be in different layouts at the same time, with the exception that depth and stencil aspects of a given image subresource **can** only be in different layouts if the `separateDepthStencilLayouts` feature is enabled.

NOTE

Each layout **may** offer optimal performance for a specific usage of image memory. For example, an image with a layout of `VK_IMAGE_LAYOUT_COLOR_ATTACHMENT_OPTIMAL` **may** provide optimal performance for use as a color attachment, but be unsupported for use in transfer commands. Applications **can** transition an image subresource from one layout to another in order to achieve optimal performance when the image subresource is used for multiple kinds of operations. After initialization, applications need not use any layout other than the general layout, though this **may** produce suboptimal performance on some implementations.

Upon creation, all image subresources of an image are initially in the same layout, where that

layout is selected by the VkImageCreateInfo::initialLayout member. The initialLayout **must** be either VK_IMAGE_LAYOUT_UNDEFINED or VK_IMAGE_LAYOUT_PREINITIALIZED. If it is VK_IMAGE_LAYOUT_PREINITIALIZED, then the image data **can** be preinitialized by the host while using this layout, and the transition away from this layout will preserve that data. If it is VK_IMAGE_LAYOUT_UNDEFINED, then the contents of the data are considered to be undefined, and the transition away from this layout is not guaranteed to preserve that data. For either of these initial layouts, any image subresources **must** be transitioned to another layout before they are accessed by the device.

Host access to image memory is only well-defined for linear images and for image subresources of those images which are currently in either the VK_IMAGE_LAYOUT_PREINITIALIZED or VK_IMAGE_LAYOUT_GENERAL layout. Calling vkGetImageSubresourceLayout for a linear image returns a subresource layout mapping that is valid for either of those image layouts.

The set of image layouts consists of:

```
// Provided by VK_VERSION_1_0
typedef enum VkImageLayout {
    VK_IMAGE_LAYOUT_UNDEFINED = 0,
    VK_IMAGE_LAYOUT_GENERAL = 1,
    VK_IMAGE_LAYOUT_COLOR_ATTACHMENT_OPTIMAL = 2,
    VK_IMAGE_LAYOUT_DEPTH_STENCIL_ATTACHMENT_OPTIMAL = 3,
    VK_IMAGE_LAYOUT_DEPTH_STENCIL_READ_ONLY_OPTIMAL = 4,
    VK_IMAGE_LAYOUT_SHADER_READ_ONLY_OPTIMAL = 5,
    VK_IMAGE_LAYOUT_TRANSFER_SRC_OPTIMAL = 6,
    VK_IMAGE_LAYOUT_TRANSFER_DST_OPTIMAL = 7,
    VK_IMAGE_LAYOUT_PREINITIALIZED = 8,
  // Provided by VK_VERSION_1_1
    VK_IMAGE_LAYOUT_DEPTH_READ_ONLY_STENCIL_ATTACHMENT_OPTIMAL = 1000117000,
  // Provided by VK_VERSION_1_1
    VK_IMAGE_LAYOUT_DEPTH_ATTACHMENT_STENCIL_READ_ONLY_OPTIMAL = 1000117001,
  // Provided by VK_VERSION_1_2
    VK_IMAGE_LAYOUT_DEPTH_ATTACHMENT_OPTIMAL = 1000241000,
  // Provided by VK_VERSION_1_2
    VK_IMAGE_LAYOUT_DEPTH_READ_ONLY_OPTIMAL = 1000241001,
  // Provided by VK_VERSION_1_2
    VK_IMAGE_LAYOUT_STENCIL_ATTACHMENT_OPTIMAL = 1000241002,
  // Provided by VK_VERSION_1_2
    VK_IMAGE_LAYOUT_STENCIL_READ_ONLY_OPTIMAL = 1000241003,
  // Provided by VK_VERSION_1_3
    VK_IMAGE_LAYOUT_READ_ONLY_OPTIMAL = 1000314000,
  // Provided by VK_VERSION_1_3
    VK_IMAGE_LAYOUT_ATTACHMENT_OPTIMAL = 1000314001,
} VkImageLayout;
```

The type(s) of device access supported by each layout are:

- VK_IMAGE_LAYOUT_UNDEFINED specifies that the layout is unknown. Image memory **cannot** be transitioned into this layout. This layout **can** be used as the initialLayout member of

VkImageCreateInfo. This layout **can** be used in place of the current image layout in a layout transition, but doing so will cause the contents of the image's memory to be undefined.

- VK_IMAGE_LAYOUT_PREINITIALIZED specifies that an image's memory is in a defined layout and **can** be populated by data, but that it has not yet been initialized by the driver. Image memory **cannot** be transitioned into this layout. This layout **can** be used as the initialLayout member of VkImageCreateInfo. This layout is intended to be used as the initial layout for an image whose contents are written by the host, and hence the data **can** be written to memory immediately, without first executing a layout transition. Currently, VK_IMAGE_LAYOUT_PREINITIALIZED is only useful with linear images because there is not a standard layout defined for VK_IMAGE_TILING_OPTIMAL images.
- VK_IMAGE_LAYOUT_GENERAL supports all types of device access.
- VK_IMAGE_LAYOUT_ATTACHMENT_OPTIMAL specifies a layout that **must** only be used with attachment accesses in the graphics pipeline.
- VK_IMAGE_LAYOUT_READ_ONLY_OPTIMAL specifies a layout allowing read only access as an attachment, or in shaders as a sampled image, combined image/sampler, or input attachment.
- VK_IMAGE_LAYOUT_COLOR_ATTACHMENT_OPTIMAL **must** only be used as a color or resolve attachment in a VkFramebuffer. This layout is valid only for image subresources of images created with the VK_IMAGE_USAGE_COLOR_ATTACHMENT_BIT usage bit enabled.
- VK_IMAGE_LAYOUT_DEPTH_STENCIL_ATTACHMENT_OPTIMAL specifies a layout for both the depth and stencil aspects of a depth/stencil format image allowing read and write access as a depth/stencil attachment. It is equivalent to VK_IMAGE_LAYOUT_DEPTH_ATTACHMENT_OPTIMAL and VK_IMAGE_LAYOUT_STENCIL_ATTACHMENT_OPTIMAL.
- VK_IMAGE_LAYOUT_DEPTH_STENCIL_READ_ONLY_OPTIMAL specifies a layout for both the depth and stencil aspects of a depth/stencil format image allowing read only access as a depth/stencil attachment or in shaders as a sampled image, combined image/sampler, or input attachment. It is equivalent to VK_IMAGE_LAYOUT_DEPTH_READ_ONLY_OPTIMAL and VK_IMAGE_LAYOUT_STENCIL_READ_ONLY_OPTIMAL.
- VK_IMAGE_LAYOUT_DEPTH_READ_ONLY_STENCIL_ATTACHMENT_OPTIMAL specifies a layout for depth/stencil format images allowing read and write access to the stencil aspect as a stencil attachment, and read only access to the depth aspect as a depth attachment or in shaders as a sampled image, combined image/sampler, or input attachment. It is equivalent to VK_IMAGE_LAYOUT_DEPTH_READ_ONLY_OPTIMAL and VK_IMAGE_LAYOUT_STENCIL_ATTACHMENT_OPTIMAL.
- VK_IMAGE_LAYOUT_DEPTH_ATTACHMENT_STENCIL_READ_ONLY_OPTIMAL specifies a layout for depth/stencil format images allowing read and write access to the depth aspect as a depth attachment, and read only access to the stencil aspect as a stencil attachment or in shaders as a sampled image, combined image/sampler, or input attachment. It is equivalent to VK_IMAGE_LAYOUT_DEPTH_ATTACHMENT_OPTIMAL and VK_IMAGE_LAYOUT_STENCIL_READ_ONLY_OPTIMAL.
- VK_IMAGE_LAYOUT_DEPTH_ATTACHMENT_OPTIMAL specifies a layout for the depth aspect of a depth/stencil format image allowing read and write access as a depth attachment.
- VK_IMAGE_LAYOUT_DEPTH_READ_ONLY_OPTIMAL specifies a layout for the depth aspect of a depth/stencil format image allowing read-only access as a depth attachment or in shaders as a sampled image, combined image/sampler, or input attachment.
- VK_IMAGE_LAYOUT_STENCIL_ATTACHMENT_OPTIMAL specifies a layout for the stencil aspect of a

depth/stencil format image allowing read and write access as a stencil attachment.

- VK_IMAGE_LAYOUT_STENCIL_READ_ONLY_OPTIMAL specifies a layout for the stencil aspect of a depth/stencil format image allowing read-only access as a stencil attachment or in shaders as a sampled image, combined image/sampler, or input attachment.
- VK_IMAGE_LAYOUT_SHADER_READ_ONLY_OPTIMAL specifies a layout allowing read-only access in a shader as a sampled image, combined image/sampler, or input attachment. This layout is valid only for image subresources of images created with the VK_IMAGE_USAGE_SAMPLED_BIT or VK_IMAGE_USAGE_INPUT_ATTACHMENT_BIT usage bits enabled.
- VK_IMAGE_LAYOUT_TRANSFER_SRC_OPTIMAL **must** only be used as a source image of a transfer command (see the definition of VK_PIPELINE_STAGE_TRANSFER_BIT). This layout is valid only for image subresources of images created with the VK_IMAGE_USAGE_TRANSFER_SRC_BIT usage bit enabled.
- VK_IMAGE_LAYOUT_TRANSFER_DST_OPTIMAL **must** only be used as a destination image of a transfer command. This layout is valid only for image subresources of images created with the VK_IMAGE_USAGE_TRANSFER_DST_BIT usage bit enabled.

The layout of each image subresource is not a state of the image subresource itself, but is rather a property of how the data in memory is organized, and thus for each mechanism of accessing an image in the API the application **must** specify a parameter or structure member that indicates which image layout the image subresource(s) are considered to be in when the image will be accessed. For transfer commands, this is a parameter to the command (see Clear Commands and Copy Commands). For use as a framebuffer attachment, this is a member in the substructures of the VkRenderPassCreateInfo (see Render Pass). For use in a descriptor set, this is a member in the VkDescriptorImageInfo structure (see Descriptor Set Updates).

12.4.1. Image Layout Matching Rules

At the time that any command buffer command accessing an image executes on any queue, the layouts of the image subresources that are accessed **must** all match exactly the layout specified via the API controlling those accesses, except in case of accesses to an image with a depth/stencil format performed through descriptors referring to only a single aspect of the image, where the following relaxed matching rules apply:

- Descriptors referring just to the depth aspect of a depth/stencil image only need to match in the image layout of the depth aspect, thus VK_IMAGE_LAYOUT_DEPTH_STENCIL_READ_ONLY_OPTIMAL and VK_IMAGE_LAYOUT_DEPTH_READ_ONLY_STENCIL_ATTACHMENT_OPTIMAL are considered to match.
- Descriptors referring just to the stencil aspect of a depth/stencil image only need to match in the image layout of the stencil aspect, thus VK_IMAGE_LAYOUT_DEPTH_STENCIL_READ_ONLY_OPTIMAL and VK_IMAGE_LAYOUT_DEPTH_ATTACHMENT_STENCIL_READ_ONLY_OPTIMAL are considered to match.

When performing a layout transition on an image subresource, the old layout value **must** either equal the current layout of the image subresource (at the time the transition executes), or else be VK_IMAGE_LAYOUT_UNDEFINED (implying that the contents of the image subresource need not be preserved). The new layout used in a transition **must** not be VK_IMAGE_LAYOUT_UNDEFINED or VK_IMAGE_LAYOUT_PREINITIALIZED.

12.5. Image Views

Image objects are not directly accessed by pipeline shaders for reading or writing image data. Instead, *image views* representing contiguous ranges of the image subresources and containing additional metadata are used for that purpose. Views **must** be created on images of compatible types, and **must** represent a valid subset of image subresources.

Image views are represented by VkImageView handles:

```
// Provided by VK_VERSION_1_0
VK_DEFINE_NON_DISPATCHABLE_HANDLE(VkImageView)
```

VK_REMAINING_ARRAY_LAYERS is a special constant value used for image views to indicate that all remaining array layers in an image after the base layer should be included in the view.

```
#define VK_REMAINING_ARRAY_LAYERS         (~0U)
```

VK_REMAINING_MIP_LEVELS is a special constant value used for image views to indicate that all remaining mipmap levels in an image after the base level should be included in the view.

```
#define VK_REMAINING_MIP_LEVELS           (~0U)
```

The types of image views that **can** be created are:

```
// Provided by VK_VERSION_1_0
typedef enum VkImageViewType {
    VK_IMAGE_VIEW_TYPE_1D = 0,
    VK_IMAGE_VIEW_TYPE_2D = 1,
    VK_IMAGE_VIEW_TYPE_3D = 2,
    VK_IMAGE_VIEW_TYPE_CUBE = 3,
    VK_IMAGE_VIEW_TYPE_1D_ARRAY = 4,
    VK_IMAGE_VIEW_TYPE_2D_ARRAY = 5,
    VK_IMAGE_VIEW_TYPE_CUBE_ARRAY = 6,
} VkImageViewType;
```

To create an image view, call:

```
// Provided by VK_VERSION_1_0
VkResult vkCreateImageView(
    VkDevice                                    device,
    const VkImageViewCreateInfo*                pCreateInfo,
    const VkAllocationCallbacks*                pAllocator,
    VkImageView*                                pView);
```

- `device` is the logical device that creates the image view.
- `pCreateInfo` is a pointer to a `VkImageViewCreateInfo` structure containing parameters to be used to create the image view.
- `pAllocator` controls host memory allocation as described in the Memory Allocation chapter.
- `pView` is a pointer to a VkImageView handle in which the resulting image view object is returned.

Valid Usage

- VUID-vkCreateImageView-device-09667
  `device` **must** support at least one queue family with one of the `VK_QUEUE_COMPUTE_BIT`, or `VK_QUEUE_GRAPHICS_BIT` capabilities
- VUID-vkCreateImageView-image-09179
  VkImageViewCreateInfo::`image` **must** have been created from `device`

Valid Usage (Implicit)

- VUID-vkCreateImageView-device-parameter
  `device` **must** be a valid VkDevice handle
- VUID-vkCreateImageView-pCreateInfo-parameter
  `pCreateInfo` **must** be a valid pointer to a valid VkImageViewCreateInfo structure
- VUID-vkCreateImageView-pAllocator-parameter
  If `pAllocator` is not `NULL`, `pAllocator` **must** be a valid pointer to a valid VkAllocationCallbacks structure
- VUID-vkCreateImageView-pView-parameter
  `pView` **must** be a valid pointer to a VkImageView handle

Return Codes

Success

- `VK_SUCCESS`

Failure

- `VK_ERROR_OUT_OF_HOST_MEMORY`
- `VK_ERROR_OUT_OF_DEVICE_MEMORY`

The `VkImageViewCreateInfo` structure is defined as:

```
// Provided by VK_VERSION_1_0
typedef struct VkImageViewCreateInfo {
    VkStructureType            sType;
    const void*                pNext;
    VkImageViewCreateFlags     flags;
    VkImage                    image;
    VkImageViewType            viewType;
    VkFormat                   format;
    VkComponentMapping         components;
    VkImageSubresourceRange    subresourceRange;
} VkImageViewCreateInfo;
```

- `sType` is a VkStructureType value identifying this structure.
- `pNext` is `NULL` or a pointer to a structure extending this structure.
- `flags` is a bitmask of VkImageViewCreateFlagBits specifying additional parameters of the image view.
- `image` is a VkImage on which the view will be created.
- `viewType` is a VkImageViewType value specifying the type of the image view.
- `format` is a VkFormat specifying the format and type used to interpret texel blocks of the image.
- `components` is a VkComponentMapping structure specifying a remapping of color components (or of depth or stencil components after they have been converted into color components).
- `subresourceRange` is a VkImageSubresourceRange structure selecting the set of mipmap levels and array layers to be accessible to the view.

Some of the `image` creation parameters are inherited by the view. In particular, image view creation inherits the implicit parameter `usage` specifying the allowed usages of the image view that, by default, takes the value of the corresponding `usage` parameter specified in VkImageCreateInfo at image creation time. The implicit `usage` **can** be overridden by adding a VkImageViewUsageCreateInfo structure to the `pNext` chain, but the view usage **must** be a subset of the image usage. If `image` has a depth-stencil format and was created with a VkImageStencilUsageCreateInfo structure included in the `pNext` chain of VkImageCreateInfo, the usage is calculated based on the `subresource.aspectMask` provided:

- If `aspectMask` includes only `VK_IMAGE_ASPECT_STENCIL_BIT`, the implicit `usage` is equal to VkImageStencilUsageCreateInfo::`stencilUsage`.
- If `aspectMask` includes only `VK_IMAGE_ASPECT_DEPTH_BIT`, the implicit `usage` is equal to VkImageCreateInfo::`usage`.
- If both aspects are included in `aspectMask`, the implicit `usage` is equal to the intersection of VkImageCreateInfo::`usage` and VkImageStencilUsageCreateInfo::`stencilUsage`.

If `image` was created with the `VK_IMAGE_CREATE_MUTABLE_FORMAT_BIT` flag, and if the `format` of the image is not multi-planar, `format` **can** be different from the image's format, but if `image` was created without the `VK_IMAGE_CREATE_BLOCK_TEXEL_VIEW_COMPATIBLE_BIT` flag and they are not equal they **must** be *compatible*. Image format compatibility is defined in the Format Compatibility Classes section.

Views of compatible formats will have the same mapping between texel coordinates and memory locations irrespective of the format, with only the interpretation of the bit pattern changing.

If image was created with a multi-planar format, and the image view's aspectMask is one of VK_IMAGE_ASPECT_PLANE_0_BIT, VK_IMAGE_ASPECT_PLANE_1_BIT or VK_IMAGE_ASPECT_PLANE_2_BIT, the view's aspect mask is considered to be equivalent to VK_IMAGE_ASPECT_COLOR_BIT when used as a framebuffer attachment.

NOTE

Values intended to be used with one view format **may** not be exactly preserved when written or read through a different format. For example, an integer value that happens to have the bit pattern of a floating-point denorm or NaN **may** be flushed or canonicalized when written or read through a view with a floating-point format. Similarly, a value written through a signed normalized format that has a bit pattern exactly equal to -2^b **may** be changed to $-2^b + 1$ as described in Conversion from Normalized Fixed-Point to Floating-Point.

If image was created with the VK_IMAGE_CREATE_BLOCK_TEXEL_VIEW_COMPATIBLE_BIT flag, format **must** be *compatible* with the image's format as described above; or **must** be an uncompressed format, in which case it **must** be *size-compatible* with the image's format. In this case, the resulting image view's texel dimensions equal the dimensions of the selected mip level divided by the compressed texel block size and rounded up.

The VkComponentMapping components member describes a remapping from components of the image to components of the vector returned by shader image instructions. This remapping **must** be the identity swizzle for storage image descriptors, input attachment descriptors, framebuffer attachments, and any VkImageView used with a combined image sampler that enables sampler $Y'C_BC_R$ conversion.

If the image view is to be used with a sampler which supports sampler $Y'C_BC_R$ conversion, an *identically defined object* of type VkSamplerYcbcrConversion to that used to create the sampler **must** be passed to vkCreateImageView in a VkSamplerYcbcrConversionInfo included in the pNext chain of VkImageViewCreateInfo. Conversely, if a VkSamplerYcbcrConversion object is passed to vkCreateImageView, an identically defined VkSamplerYcbcrConversion object **must** be used when sampling the image.

If the image has a multi-planar format, subresourceRange.aspectMask is VK_IMAGE_ASPECT_COLOR_BIT, and usage includes VK_IMAGE_USAGE_SAMPLED_BIT, then the format **must** be identical to the image format and the sampler to be used with the image view **must** enable sampler $Y'C_BC_R$ conversion.

If image was created with the VK_IMAGE_CREATE_MUTABLE_FORMAT_BIT and the image has a multi-planar format, and if subresourceRange.aspectMask is VK_IMAGE_ASPECT_PLANE_0_BIT, VK_IMAGE_ASPECT_PLANE_1_BIT, or VK_IMAGE_ASPECT_PLANE_2_BIT, format **must** be compatible with the corresponding plane of the image, and the sampler to be used with the image view **must** not enable sampler $Y'C_BC_R$ conversion. The width and height of the single-plane image view **must** be derived from the multi-planar image's dimensions in the manner listed for plane compatibility for the plane.

Any view of an image plane will have the same mapping between texel coordinates and memory locations as used by the components of the color aspect, subject to the formulae relating texel

coordinates to lower-resolution planes as described in Chroma Reconstruction. That is, if an R or B plane has a reduced resolution relative to the G plane of the multi-planar image, the image view operates using the (u_{plane}, v_{plane}) unnormalized coordinates of the reduced-resolution plane, and these coordinates access the same memory locations as the (u_{color}, v_{color}) unnormalized coordinates of the color aspect for which chroma reconstruction operations operate on the same (u_{plane}, v_{plane}) or (i_{plane}, j_{plane}) coordinates.

Table 7. Image Type and Image View Type Compatibility Requirements

Image View Type	Compatible Image Types
VK_IMAGE_VIEW_TYPE_1D	VK_IMAGE_TYPE_1D
VK_IMAGE_VIEW_TYPE_1D_ARRAY	VK_IMAGE_TYPE_1D
VK_IMAGE_VIEW_TYPE_2D	VK_IMAGE_TYPE_2D , VK_IMAGE_TYPE_3D
VK_IMAGE_VIEW_TYPE_2D_ARRAY	VK_IMAGE_TYPE_2D , VK_IMAGE_TYPE_3D
VK_IMAGE_VIEW_TYPE_CUBE	VK_IMAGE_TYPE_2D
VK_IMAGE_VIEW_TYPE_CUBE_ARRAY	VK_IMAGE_TYPE_2D
VK_IMAGE_VIEW_TYPE_3D	VK_IMAGE_TYPE_3D

Valid Usage

- VUID-VkImageViewCreateInfo-image-01003
  If image was not created with VK_IMAGE_CREATE_CUBE_COMPATIBLE_BIT then viewType **must** not be VK_IMAGE_VIEW_TYPE_CUBE or VK_IMAGE_VIEW_TYPE_CUBE_ARRAY
- VUID-VkImageViewCreateInfo-viewType-01004
  If the imageCubeArray feature is not enabled, viewType **must** not be VK_IMAGE_VIEW_TYPE_CUBE_ARRAY
- VUID-VkImageViewCreateInfo-image-06723
  If image was created with VK_IMAGE_TYPE_3D but without VK_IMAGE_CREATE_2D_ARRAY_COMPATIBLE_BIT set then viewType **must** not be VK_IMAGE_VIEW_TYPE_2D_ARRAY
- VUID-VkImageViewCreateInfo-image-06727
  If image was created with VK_IMAGE_TYPE_3D but without VK_IMAGE_CREATE_2D_ARRAY_COMPATIBLE_BIT set then viewType **must** not be VK_IMAGE_VIEW_TYPE_2D
- VUID-VkImageViewCreateInfo-image-04970
  If image was created with VK_IMAGE_TYPE_3D and viewType is VK_IMAGE_VIEW_TYPE_2D or VK_IMAGE_VIEW_TYPE_2D_ARRAY then subresourceRange.levelCount **must** be 1
- VUID-VkImageViewCreateInfo-image-04972
  If image was created with a samples value not equal to VK_SAMPLE_COUNT_1_BIT then viewType **must** be either VK_IMAGE_VIEW_TYPE_2D or VK_IMAGE_VIEW_TYPE_2D_ARRAY
- VUID-VkImageViewCreateInfo-image-04441
  image **must** have been created with a usage value containing at least one of the usages defined in the valid image usage list for image views

- VUID-VkImageViewCreateInfo-None-02273
  The format features of the resultant image view **must** contain at least one bit
- VUID-VkImageViewCreateInfo-usage-02274
  If `usage` contains `VK_IMAGE_USAGE_SAMPLED_BIT`, then the format features of the resultant image view **must** contain `VK_FORMAT_FEATURE_SAMPLED_IMAGE_BIT`
- VUID-VkImageViewCreateInfo-usage-02275
  If `usage` contains `VK_IMAGE_USAGE_STORAGE_BIT`, then the image view's format features **must** contain `VK_FORMAT_FEATURE_STORAGE_IMAGE_BIT`
- VUID-VkImageViewCreateInfo-usage-02276
  If `usage` contains `VK_IMAGE_USAGE_COLOR_ATTACHMENT_BIT`, then the image view's format features **must** contain `VK_FORMAT_FEATURE_COLOR_ATTACHMENT_BIT`
- VUID-VkImageViewCreateInfo-usage-02277
  If `usage` contains `VK_IMAGE_USAGE_DEPTH_STENCIL_ATTACHMENT_BIT`, then the image view's format features **must** contain `VK_FORMAT_FEATURE_DEPTH_STENCIL_ATTACHMENT_BIT`
- VUID-VkImageViewCreateInfo-usage-08932
  If `usage` contains `VK_IMAGE_USAGE_INPUT_ATTACHMENT_BIT`,

  then the image view's format features **must** contain at least one of `VK_FORMAT_FEATURE_COLOR_ATTACHMENT_BIT` or `VK_FORMAT_FEATURE_DEPTH_STENCIL_ATTACHMENT_BIT`
- VUID-VkImageViewCreateInfo-subresourceRange-01478
  `subresourceRange.baseMipLevel` **must** be less than the `mipLevels` specified in VkImageCreateInfo when `image` was created
- VUID-VkImageViewCreateInfo-subresourceRange-01718
  If `subresourceRange.levelCount` is not `VK_REMAINING_MIP_LEVELS`, `subresourceRange.baseMipLevel` + `subresourceRange.levelCount` **must** be less than or equal to the `mipLevels` specified in VkImageCreateInfo when `image` was created
- VUID-VkImageViewCreateInfo-image-01482
  If `image` is not a 3D image created with `VK_IMAGE_CREATE_2D_ARRAY_COMPATIBLE_BIT` set, or `viewType` is not `VK_IMAGE_VIEW_TYPE_2D` or `VK_IMAGE_VIEW_TYPE_2D_ARRAY`, `subresourceRange.baseArrayLayer` **must** be less than the `arrayLayers` specified in VkImageCreateInfo when `image` was created
- VUID-VkImageViewCreateInfo-subresourceRange-01483
  If `subresourceRange.layerCount` is not `VK_REMAINING_ARRAY_LAYERS`, `image` is not a 3D image created with `VK_IMAGE_CREATE_2D_ARRAY_COMPATIBLE_BIT` set, or `viewType` is not `VK_IMAGE_VIEW_TYPE_2D` or `VK_IMAGE_VIEW_TYPE_2D_ARRAY`, `subresourceRange.layerCount` **must** be non-zero and `subresourceRange.baseArrayLayer` + `subresourceRange.layerCount` **must** be less than or equal to the `arrayLayers` specified in VkImageCreateInfo when `image` was created
- VUID-VkImageViewCreateInfo-image-02724
  If `image` is a 3D image created with `VK_IMAGE_CREATE_2D_ARRAY_COMPATIBLE_BIT` set, and `viewType` is `VK_IMAGE_VIEW_TYPE_2D` or `VK_IMAGE_VIEW_TYPE_2D_ARRAY`, `subresourceRange.baseArrayLayer` **must** be less than the depth computed from `baseMipLevel` and `extent.depth` specified in VkImageCreateInfo when `image` was created, according to

the formula defined in Image Mip Level Sizing

- VUID-VkImageViewCreateInfo-subresourceRange-02725
  If `subresourceRange.layerCount` is not `VK_REMAINING_ARRAY_LAYERS`, `image` is a 3D image created with `VK_IMAGE_CREATE_2D_ARRAY_COMPATIBLE_BIT` set, and `viewType` is `VK_IMAGE_VIEW_TYPE_2D` or `VK_IMAGE_VIEW_TYPE_2D_ARRAY`, `subresourceRange.layerCount` **must** be non-zero and `subresourceRange.baseArrayLayer` + `subresourceRange.layerCount` **must** be less than or equal to the depth computed from `baseMipLevel` and `extent.depth` specified in VkImageCreateInfo when `image` was created, according to the formula defined in Image Mip Level Sizing
- VUID-VkImageViewCreateInfo-image-01761
  If `image` was created with the `VK_IMAGE_CREATE_MUTABLE_FORMAT_BIT` flag, but without the `VK_IMAGE_CREATE_BLOCK_TEXEL_VIEW_COMPATIBLE_BIT` flag, and if the `format` of the `image` is not a multi-planar format, `format` **must** be compatible with the `format` used to create `image`, as defined in Format Compatibility Classes
- VUID-VkImageViewCreateInfo-image-01583
  If `image` was created with the `VK_IMAGE_CREATE_BLOCK_TEXEL_VIEW_COMPATIBLE_BIT` flag, `format` **must** be compatible with, or **must** be an uncompressed format that is size-compatible with, the `format` used to create `image`
- VUID-VkImageViewCreateInfo-image-07072
  If `image` was created with the `VK_IMAGE_CREATE_BLOCK_TEXEL_VIEW_COMPATIBLE_BIT` flag and `format` is a non-compressed format, the `levelCount` member of `subresourceRange` **must** be `1`
- VUID-VkImageViewCreateInfo-image-09487
  If `image` was created with the `VK_IMAGE_CREATE_BLOCK_TEXEL_VIEW_COMPATIBLE_BIT` flag, and `format` is a non-compressed format, then the `layerCount` member of `subresourceRange` **must** be `1`
- VUID-VkImageViewCreateInfo-pNext-01585
  If a VkImageFormatListCreateInfo structure was included in the `pNext` chain of the VkImageCreateInfo structure used when creating `image` and VkImageFormatListCreateInfo::`viewFormatCount` is not zero then `format` **must** be one of the formats in VkImageFormatListCreateInfo::`pViewFormats`
- VUID-VkImageViewCreateInfo-image-01586
  If `image` was created with the `VK_IMAGE_CREATE_MUTABLE_FORMAT_BIT` flag, if the `format` of the `image` is a multi-planar format, and if `subresourceRange.aspectMask` is one of the multi-planar aspect mask bits, then `format` **must** be compatible with the VkFormat for the plane of the `image` `format` indicated by `subresourceRange.aspectMask`, as defined in Compatible Formats of Planes of Multi-Planar Formats
- VUID-VkImageViewCreateInfo-subresourceRange-07818
  `subresourceRange.aspectMask` **must** only have at most 1 valid multi-planar aspect mask bit
- VUID-VkImageViewCreateInfo-image-01762
  If `image` was not created with the `VK_IMAGE_CREATE_MUTABLE_FORMAT_BIT` flag, or if the `format` of the `image` is a multi-planar format and if `subresourceRange.aspectMask` is `VK_IMAGE_ASPECT_COLOR_BIT`, `format` **must** be identical to the `format` used to create `image`
- VUID-VkImageViewCreateInfo-format-06415
  If the image view requires a sampler $Y'C_BC_R$ conversion and `usage` contains

VK_IMAGE_USAGE_SAMPLED_BIT, then the pNext chain **must** include a VkSamplerYcbcrConversionInfo structure with a conversion value other than VK_NULL_HANDLE

- VUID-VkImageViewCreateInfo-format-04714
  If format has a _422 or _420 suffix then image **must** have been created with a width that is a multiple of 2
- VUID-VkImageViewCreateInfo-format-04715
  If format has a _420 suffix then image **must** have been created with a height that is a multiple of 2
- VUID-VkImageViewCreateInfo-pNext-01970
  If the pNext chain includes a VkSamplerYcbcrConversionInfo structure with a conversion value other than VK_NULL_HANDLE, all members of components **must** have the identity swizzle
- VUID-VkImageViewCreateInfo-pNext-06658
  If the pNext chain includes a VkSamplerYcbcrConversionInfo structure with a conversion value other than VK_NULL_HANDLE, format **must** be the same used in VkSamplerYcbcrConversionCreateInfo::format
- VUID-VkImageViewCreateInfo-image-01020
  If image is non-sparse then it **must** be bound completely and contiguously to a single VkDeviceMemory object
- VUID-VkImageViewCreateInfo-subResourceRange-01021
  viewType **must** be compatible with the type of image as shown in the view type compatibility table
- VUID-VkImageViewCreateInfo-pNext-02662
  If the pNext chain includes a VkImageViewUsageCreateInfo structure, and image was not created with a VkImageStencilUsageCreateInfo structure included in the pNext chain of VkImageCreateInfo, its usage member **must** not include any bits that were not set in the usage member of the VkImageCreateInfo structure used to create image
- VUID-VkImageViewCreateInfo-pNext-02663
  If the pNext chain includes a VkImageViewUsageCreateInfo structure, image was created with a VkImageStencilUsageCreateInfo structure included in the pNext chain of VkImageCreateInfo, and subresourceRange.aspectMask includes VK_IMAGE_ASPECT_STENCIL_BIT, the usage member of the VkImageViewUsageCreateInfo structure **must** not include any bits that were not set in the usage member of the VkImageStencilUsageCreateInfo structure used to create image
- VUID-VkImageViewCreateInfo-pNext-02664
  If the pNext chain includes a VkImageViewUsageCreateInfo structure, image was created with a VkImageStencilUsageCreateInfo structure included in the pNext chain of VkImageCreateInfo, and subresourceRange.aspectMask includes bits other than VK_IMAGE_ASPECT_STENCIL_BIT, the usage member of the VkImageViewUsageCreateInfo structure **must** not include any bits that were not set in the usage member of the VkImageCreateInfo structure used to create image
- VUID-VkImageViewCreateInfo-imageViewType-04973
  If viewType is VK_IMAGE_VIEW_TYPE_1D, VK_IMAGE_VIEW_TYPE_2D, or VK_IMAGE_VIEW_TYPE_3D; and

subresourceRange.layerCount is not VK_REMAINING_ARRAY_LAYERS, then subresourceRange.layerCount **must** be 1

- VUID-VkImageViewCreateInfo-imageViewType-04974
  If viewType is VK_IMAGE_VIEW_TYPE_1D, VK_IMAGE_VIEW_TYPE_2D, or VK_IMAGE_VIEW_TYPE_3D; and subresourceRange.layerCount is VK_REMAINING_ARRAY_LAYERS, then the remaining number of layers **must** be 1
- VUID-VkImageViewCreateInfo-viewType-02960
  If viewType is VK_IMAGE_VIEW_TYPE_CUBE and subresourceRange.layerCount is not VK_REMAINING_ARRAY_LAYERS, subresourceRange.layerCount **must** be 6
- VUID-VkImageViewCreateInfo-viewType-02961
  If viewType is VK_IMAGE_VIEW_TYPE_CUBE_ARRAY and subresourceRange.layerCount is not VK_REMAINING_ARRAY_LAYERS, subresourceRange.layerCount **must** be a multiple of 6
- VUID-VkImageViewCreateInfo-viewType-02962
  If viewType is VK_IMAGE_VIEW_TYPE_CUBE and subresourceRange.layerCount is VK_REMAINING_ARRAY_LAYERS, the remaining number of layers **must** be 6
- VUID-VkImageViewCreateInfo-viewType-02963
  If viewType is VK_IMAGE_VIEW_TYPE_CUBE_ARRAY and subresourceRange.layerCount is VK_REMAINING_ARRAY_LAYERS, the remaining number of layers **must** be a multiple of 6
- VUID-VkImageViewCreateInfo-subresourceRange-09594
  subresourceRange.aspectMask **must** be valid for the format the image was created with

Valid Usage (Implicit)

- VUID-VkImageViewCreateInfo-sType-sType
  sType **must** be VK_STRUCTURE_TYPE_IMAGE_VIEW_CREATE_INFO
- VUID-VkImageViewCreateInfo-pNext-pNext
  Each pNext member of any structure (including this one) in the pNext chain **must** be either NULL or a pointer to a valid instance of VkImageViewUsageCreateInfo or VkSamplerYcbcrConversionInfo
- VUID-VkImageViewCreateInfo-sType-unique
  The sType value of each struct in the pNext chain **must** be unique
- VUID-VkImageViewCreateInfo-flags-zerobitmask
  flags **must** be 0
- VUID-VkImageViewCreateInfo-image-parameter
  image **must** be a valid VkImage handle
- VUID-VkImageViewCreateInfo-viewType-parameter
  viewType **must** be a valid VkImageViewType value
- VUID-VkImageViewCreateInfo-format-parameter
  format **must** be a valid VkFormat value
- VUID-VkImageViewCreateInfo-components-parameter
  components **must** be a valid VkComponentMapping structure

- VUID-VkImageViewCreateInfo-subresourceRange-parameter
  `subresourceRange` **must** be a valid VkImageSubresourceRange structure

Bits which **can** be set in VkImageViewCreateInfo::`flags`, specifying additional parameters of an image view, are:

```
// Provided by VK_VERSION_1_0
typedef enum VkImageViewCreateFlagBits {
} VkImageViewCreateFlagBits;
```

```
// Provided by VK_VERSION_1_0
typedef VkFlags VkImageViewCreateFlags;
```

`VkImageViewCreateFlags` is a bitmask type for setting a mask of zero or more VkImageViewCreateFlagBits.

The set of usages for the created image view **can** be restricted compared to the parent image's `usage` flags by adding a `VkImageViewUsageCreateInfo` structure to the `pNext` chain of VkImageViewCreateInfo.

The `VkImageViewUsageCreateInfo` structure is defined as:

```
// Provided by VK_VERSION_1_1
typedef struct VkImageViewUsageCreateInfo {
    VkStructureType      sType;
    const void*          pNext;
    VkImageUsageFlags    usage;
} VkImageViewUsageCreateInfo;
```

- `sType` is a VkStructureType value identifying this structure.
- `pNext` is `NULL` or a pointer to a structure extending this structure.
- `usage` is a bitmask of VkImageUsageFlagBits specifying allowed usages of the image view.

When this structure is chained to VkImageViewCreateInfo the `usage` field overrides the implicit `usage` parameter inherited from image creation time and its value is used instead for the purposes of determining the valid usage conditions of VkImageViewCreateInfo.

Valid Usage (Implicit)

- VUID-VkImageViewUsageCreateInfo-sType-sType
  `sType` **must** be `VK_STRUCTURE_TYPE_IMAGE_VIEW_USAGE_CREATE_INFO`
- VUID-VkImageViewUsageCreateInfo-usage-parameter
  `usage` **must** be a valid combination of VkImageUsageFlagBits values
- VUID-VkImageViewUsageCreateInfo-usage-requiredbitmask

```
    usage must not be 0
```

The VkImageSubresourceRange structure is defined as:

```
// Provided by VK_VERSION_1_0
typedef struct VkImageSubresourceRange {
    VkImageAspectFlags    aspectMask;
    uint32_t              baseMipLevel;
    uint32_t              levelCount;
    uint32_t              baseArrayLayer;
    uint32_t              layerCount;
} VkImageSubresourceRange;
```

- aspectMask is a bitmask of VkImageAspectFlagBits specifying which aspect(s) of the image are included in the view.
- baseMipLevel is the first mipmap level accessible to the view.
- levelCount is the number of mipmap levels (starting from baseMipLevel) accessible to the view.
- baseArrayLayer is the first array layer accessible to the view.
- layerCount is the number of array layers (starting from baseArrayLayer) accessible to the view.

The number of mipmap levels and array layers **must** be a subset of the image subresources in the image. If an application wants to use all mip levels or layers in an image after the baseMipLevel or baseArrayLayer, it **can** set levelCount and layerCount to the special values VK_REMAINING_MIP_LEVELS and VK_REMAINING_ARRAY_LAYERS without knowing the exact number of mip levels or layers.

For cube and cube array image views, the layers of the image view starting at baseArrayLayer correspond to faces in the order +X, -X, +Y, -Y, +Z, -Z. For cube arrays, each set of six sequential layers is a single cube, so the number of cube maps in a cube map array view is layerCount / *6*, and image array layer (baseArrayLayer + i) is face index (i mod 6) of cube *i* / *6*. If the number of layers in the view, whether set explicitly in layerCount or implied by VK_REMAINING_ARRAY_LAYERS, is not a multiple of 6, the last cube map in the array **must** not be accessed.

aspectMask **must** be only VK_IMAGE_ASPECT_COLOR_BIT, VK_IMAGE_ASPECT_DEPTH_BIT or VK_IMAGE_ASPECT_STENCIL_BIT if format is a color, depth-only or stencil-only format, respectively, except if format is a multi-planar format. If using a depth/stencil format with both depth and stencil components, aspectMask **must** include at least one of VK_IMAGE_ASPECT_DEPTH_BIT and VK_IMAGE_ASPECT_STENCIL_BIT, and **can** include both.

When the VkImageSubresourceRange structure is used to select a subset of the slices of a 3D image's mip level in order to create a 2D or 2D array image view of a 3D image created with VK_IMAGE_CREATE_2D_ARRAY_COMPATIBLE_BIT, baseArrayLayer and layerCount specify the first slice index and the number of slices to include in the created image view. Such an image view **can** be used as a framebuffer attachment that refers only to the specified range of slices of the selected mip level. However, any layout transitions performed on such an attachment view during a render pass instance still apply to the entire subresource referenced which includes all the slices of the selected mip level.

When using an image view of a depth/stencil image to populate a descriptor set (e.g. for sampling in the shader, or for use as an input attachment), the `aspectMask` **must** only include one bit, which selects whether the image view is used for depth reads (i.e. using a floating-point sampler or input attachment in the shader) or stencil reads (i.e. using an unsigned integer sampler or input attachment in the shader). When an image view of a depth/stencil image is used as a depth/stencil framebuffer attachment, the `aspectMask` is ignored and both depth and stencil image subresources are used.

When creating a `VkImageView`, if sampler $Y'C_BC_R$ conversion is enabled in the sampler, the `aspectMask` of a `subresourceRange` used by the `VkImageView` **must** be `VK_IMAGE_ASPECT_COLOR_BIT`.

When creating a `VkImageView`, if sampler $Y'C_BC_R$ conversion is not enabled in the sampler and the image `format` is multi-planar, the image **must** have been created with `VK_IMAGE_CREATE_MUTABLE_FORMAT_BIT`, and the `aspectMask` of the `VkImageView`'s `subresourceRange` **must** be `VK_IMAGE_ASPECT_PLANE_0_BIT`, `VK_IMAGE_ASPECT_PLANE_1_BIT` or `VK_IMAGE_ASPECT_PLANE_2_BIT`.

Valid Usage

- VUID-VkImageSubresourceRange-levelCount-01720
  If `levelCount` is not `VK_REMAINING_MIP_LEVELS`, it **must** be greater than `0`
- VUID-VkImageSubresourceRange-layerCount-01721
  If `layerCount` is not `VK_REMAINING_ARRAY_LAYERS`, it **must** be greater than `0`
- VUID-VkImageSubresourceRange-aspectMask-01670
  If `aspectMask` includes `VK_IMAGE_ASPECT_COLOR_BIT`, then it **must** not include any of `VK_IMAGE_ASPECT_PLANE_0_BIT`, `VK_IMAGE_ASPECT_PLANE_1_BIT`, or `VK_IMAGE_ASPECT_PLANE_2_BIT`

Valid Usage (Implicit)

- VUID-VkImageSubresourceRange-aspectMask-parameter
  `aspectMask` **must** be a valid combination of VkImageAspectFlagBits values
- VUID-VkImageSubresourceRange-aspectMask-requiredbitmask
  `aspectMask` **must** not be `0`

Bits which **can** be set in an aspect mask to specify aspects of an image for purposes such as identifying a subresource, are:

```
// Provided by VK_VERSION_1_0
typedef enum VkImageAspectFlagBits {
    VK_IMAGE_ASPECT_COLOR_BIT = 0x00000001,
    VK_IMAGE_ASPECT_DEPTH_BIT = 0x00000002,
    VK_IMAGE_ASPECT_STENCIL_BIT = 0x00000004,
    VK_IMAGE_ASPECT_METADATA_BIT = 0x00000008,
  // Provided by VK_VERSION_1_1
    VK_IMAGE_ASPECT_PLANE_0_BIT = 0x00000010,
  // Provided by VK_VERSION_1_1
    VK_IMAGE_ASPECT_PLANE_1_BIT = 0x00000020,
  // Provided by VK_VERSION_1_1
    VK_IMAGE_ASPECT_PLANE_2_BIT = 0x00000040,
  // Provided by VK_VERSION_1_3
    VK_IMAGE_ASPECT_NONE = 0,
} VkImageAspectFlagBits;
```

- VK_IMAGE_ASPECT_NONE specifies no image aspect, or the image aspect is not applicable.
- VK_IMAGE_ASPECT_COLOR_BIT specifies the color aspect.
- VK_IMAGE_ASPECT_DEPTH_BIT specifies the depth aspect.
- VK_IMAGE_ASPECT_STENCIL_BIT specifies the stencil aspect.
- VK_IMAGE_ASPECT_METADATA_BIT specifies the metadata aspect used for sparse resource operations.
- VK_IMAGE_ASPECT_PLANE_0_BIT specifies plane 0 of a *multi-planar* image format.
- VK_IMAGE_ASPECT_PLANE_1_BIT specifies plane 1 of a *multi-planar* image format.
- VK_IMAGE_ASPECT_PLANE_2_BIT specifies plane 2 of a *multi-planar* image format.

```
// Provided by VK_VERSION_1_0
typedef VkFlags VkImageAspectFlags;
```

VkImageAspectFlags is a bitmask type for setting a mask of zero or more VkImageAspectFlagBits.

The VkComponentMapping structure is defined as:

```
// Provided by VK_VERSION_1_0
typedef struct VkComponentMapping {
    VkComponentSwizzle    r;
    VkComponentSwizzle    g;
    VkComponentSwizzle    b;
    VkComponentSwizzle    a;
} VkComponentMapping;
```

- r is a VkComponentSwizzle specifying the component value placed in the R component of the output vector.
- g is a VkComponentSwizzle specifying the component value placed in the G component of the

output vector.

- `b` is a VkComponentSwizzle specifying the component value placed in the B component of the output vector.
- `a` is a VkComponentSwizzle specifying the component value placed in the A component of the output vector.

Valid Usage (Implicit)

- VUID-VkComponentMapping-r-parameter
  `r` **must** be a valid VkComponentSwizzle value
- VUID-VkComponentMapping-g-parameter
  `g` **must** be a valid VkComponentSwizzle value
- VUID-VkComponentMapping-b-parameter
  `b` **must** be a valid VkComponentSwizzle value
- VUID-VkComponentMapping-a-parameter
  `a` **must** be a valid VkComponentSwizzle value

Possible values of the members of VkComponentMapping, specifying the component values placed in each component of the output vector, are:

```
// Provided by VK_VERSION_1_0
typedef enum VkComponentSwizzle {
    VK_COMPONENT_SWIZZLE_IDENTITY = 0,
    VK_COMPONENT_SWIZZLE_ZERO = 1,
    VK_COMPONENT_SWIZZLE_ONE = 2,
    VK_COMPONENT_SWIZZLE_R = 3,
    VK_COMPONENT_SWIZZLE_G = 4,
    VK_COMPONENT_SWIZZLE_B = 5,
    VK_COMPONENT_SWIZZLE_A = 6,
} VkComponentSwizzle;
```

- `VK_COMPONENT_SWIZZLE_IDENTITY` specifies that the component is set to the identity swizzle.
- `VK_COMPONENT_SWIZZLE_ZERO` specifies that the component is set to zero.
- `VK_COMPONENT_SWIZZLE_ONE` specifies that the component is set to either 1 or 1.0, depending on whether the type of the image view format is integer or floating-point respectively, as determined by the Format Definition section for each VkFormat.
- `VK_COMPONENT_SWIZZLE_R` specifies that the component is set to the value of the R component of the image.
- `VK_COMPONENT_SWIZZLE_G` specifies that the component is set to the value of the G component of the image.
- `VK_COMPONENT_SWIZZLE_B` specifies that the component is set to the value of the B component of the image.

- VK_COMPONENT_SWIZZLE_A specifies that the component is set to the value of the A component of the image.

Setting the identity swizzle on a component is equivalent to setting the identity mapping on that component. That is:

Table 8. Component Mappings Equivalent To VK_COMPONENT_SWIZZLE_IDENTITY

Component	Identity Mapping
components.r	VK_COMPONENT_SWIZZLE_R
components.g	VK_COMPONENT_SWIZZLE_G
components.b	VK_COMPONENT_SWIZZLE_B
components.a	VK_COMPONENT_SWIZZLE_A

To destroy an image view, call:

```
// Provided by VK_VERSION_1_0
void vkDestroyImageView(
    VkDevice                                    device,
    VkImageView                                 imageView,
    const VkAllocationCallbacks*                pAllocator);
```

- device is the logical device that destroys the image view.
- imageView is the image view to destroy.
- pAllocator controls host memory allocation as described in the Memory Allocation chapter.

Valid Usage

- VUID-vkDestroyImageView-imageView-01026
  All submitted commands that refer to imageView **must** have completed execution
- VUID-vkDestroyImageView-imageView-01027
  If VkAllocationCallbacks were provided when imageView was created, a compatible set of callbacks **must** be provided here
- VUID-vkDestroyImageView-imageView-01028
  If no VkAllocationCallbacks were provided when imageView was created, pAllocator **must** be NULL

Valid Usage (Implicit)

- VUID-vkDestroyImageView-device-parameter
  device **must** be a valid VkDevice handle
- VUID-vkDestroyImageView-imageView-parameter
  If imageView is not VK_NULL_HANDLE, imageView **must** be a valid VkImageView handle
- VUID-vkDestroyImageView-pAllocator-parameter

If `pAllocator` is not `NULL`, `pAllocator` **must** be a valid pointer to a valid VkAllocationCallbacks structure

- VUID-vkDestroyImageView-imageView-parent
  If `imageView` is a valid handle, it **must** have been created, allocated, or retrieved from `device`

Host Synchronization

- Host access to `imageView` **must** be externally synchronized

12.5.1. Image View Format Features

Valid uses of a VkImageView **may** depend on the image view's *format features*, defined below. Such constraints are documented in the affected valid usage statement.

- If Vulkan 1.3 is supported or the `VK_KHR_format_feature_flags2` extension is supported, and VkImageViewCreateInfo::`image` was created with `VK_IMAGE_TILING_LINEAR`, then the image view's set of *format features* is the value of VkFormatProperties3::`linearTilingFeatures` found by calling vkGetPhysicalDeviceFormatProperties2 on the same `format` as VkImageViewCreateInfo::`format`.
- If Vulkan 1.3 is not supported and the `VK_KHR_format_feature_flags2` extension is not supported, and VkImageViewCreateInfo::`image` was created with `VK_IMAGE_TILING_LINEAR`, then the image view's set of *format features* is the union of the value of VkFormatProperties::`linearTilingFeatures` found by calling vkGetPhysicalDeviceFormatProperties on the same `format` as VkImageViewCreateInfo::`format`, with:
  - `VK_FORMAT_FEATURE_2_SAMPLED_IMAGE_DEPTH_COMPARISON_BIT` if the format is a depth/stencil format and the image view features also contain `VK_FORMAT_FEATURE_2_SAMPLED_IMAGE_BIT`.
  - `VK_FORMAT_FEATURE_2_STORAGE_READ_WITHOUT_FORMAT_BIT` if the format is one of the extended storage formats and `shaderStorageImageReadWithoutFormat` is enabled on the device.
  - `VK_FORMAT_FEATURE_2_STORAGE_WRITE_WITHOUT_FORMAT_BIT` if the format is one of the extended storage formats and `shaderStorageImageWriteWithoutFormat` is enabled on the device.
- If Vulkan 1.3 is supported or the `VK_KHR_format_feature_flags2` extension is supported, and VkImageViewCreateInfo::`image` was created with `VK_IMAGE_TILING_OPTIMAL`, then the image view's set of *format features* is the value of VkFormatProperties::`optimalTilingFeatures` or VkFormatProperties3::`optimalTilingFeatures` found by calling vkGetPhysicalDeviceFormatProperties or vkGetPhysicalDeviceImageFormatProperties2 on the same `format` as VkImageViewCreateInfo::`format`.
- If Vulkan 1.3 is not supported and the `VK_KHR_format_feature_flags2` extension is not supported, and VkImageViewCreateInfo::`image` was created with `VK_IMAGE_TILING_OPTIMAL`, then the image view's set of *format features* is the union of the value of VkFormatProperties::`optimalTilingFeatures` found by calling vkGetPhysicalDeviceFormatProperties on the same `format` as VkImageViewCreateInfo::`format`, with:
  - `VK_FORMAT_FEATURE_2_SAMPLED_IMAGE_DEPTH_COMPARISON_BIT` if the format is a depth/stencil

format and the image view features also contain VK_FORMAT_FEATURE_2_SAMPLED_IMAGE_BIT.

- VK_FORMAT_FEATURE_2_STORAGE_READ_WITHOUT_FORMAT_BIT if the format is one of the extended storage formats and shaderStorageImageReadWithoutFormat is enabled on the device.
- VK_FORMAT_FEATURE_2_STORAGE_WRITE_WITHOUT_FORMAT_BIT if the format is one of the extended storage formats and shaderStorageImageWriteWithoutFormat is enabled on the device.

12.6. Resource Memory Association

Resources are initially created as *virtual allocations* with no backing memory. Device memory is allocated separately (see Device Memory) and then associated with the resource. This association is done differently for sparse and non-sparse resources.

Resources created with any of the sparse creation flags are considered sparse resources. Resources created without these flags are non-sparse. The details on resource memory association for sparse resources is described in Sparse Resources.

Non-sparse resources **must** be bound completely and contiguously to a single VkDeviceMemory object before the resource is passed as a parameter to any of the following operations:

- creating image or buffer views
- updating descriptor sets
- recording commands in a command buffer

Once bound, the memory binding is immutable for the lifetime of the resource.

In a logical device representing more than one physical device, buffer and image resources exist on all physical devices but **can** be bound to memory differently on each. Each such replicated resource is an *instance* of the resource. For sparse resources, each instance **can** be bound to memory arbitrarily differently. For non-sparse resources, each instance **can** either be bound to the local or a peer instance of the memory, or for images **can** be bound to rectangular regions from the local and/or peer instances. When a resource is used in a descriptor set, each physical device interprets the descriptor according to its own instance's binding to memory.

NOTE There are no new copy commands to transfer data between physical devices. Instead, an application **can** create a resource with a peer mapping and use it as the source or destination of a transfer command executed by a single physical device to copy the data from one physical device to another.

To determine the memory requirements for a buffer resource, call:

```
// Provided by VK_VERSION_1_0
void vkGetBufferMemoryRequirements(
    VkDevice                                    device,
    VkBuffer                                    buffer,
    VkMemoryRequirements*                       pMemoryRequirements);
```

- `device` is the logical device that owns the buffer.
- `buffer` is the buffer to query.
- `pMemoryRequirements` is a pointer to a VkMemoryRequirements structure in which the memory requirements of the buffer object are returned.

Valid Usage (Implicit)

- VUID-vkGetBufferMemoryRequirements-device-parameter
  `device` **must** be a valid VkDevice handle
- VUID-vkGetBufferMemoryRequirements-buffer-parameter
  `buffer` **must** be a valid VkBuffer handle
- VUID-vkGetBufferMemoryRequirements-pMemoryRequirements-parameter
  `pMemoryRequirements` **must** be a valid pointer to a VkMemoryRequirements structure
- VUID-vkGetBufferMemoryRequirements-buffer-parent
  `buffer` **must** have been created, allocated, or retrieved from `device`

To determine the memory requirements for an image resource which is not created with the `VK_IMAGE_CREATE_DISJOINT_BIT` flag set, call:

```
// Provided by VK_VERSION_1_0
void vkGetImageMemoryRequirements(
    VkDevice                                    device,
    VkImage                                     image,
    VkMemoryRequirements*                       pMemoryRequirements);
```

- `device` is the logical device that owns the image.
- `image` is the image to query.
- `pMemoryRequirements` is a pointer to a VkMemoryRequirements structure in which the memory requirements of the image object are returned.

Valid Usage

- VUID-vkGetImageMemoryRequirements-image-01588
  `image` **must** not have been created with the `VK_IMAGE_CREATE_DISJOINT_BIT` flag set

Valid Usage (Implicit)

- VUID-vkGetImageMemoryRequirements-device-parameter
  `device` **must** be a valid VkDevice handle
- VUID-vkGetImageMemoryRequirements-image-parameter
  `image` **must** be a valid VkImage handle

- VUID-vkGetImageMemoryRequirements-pMemoryRequirements-parameter
  `pMemoryRequirements` **must** be a valid pointer to a VkMemoryRequirements structure
- VUID-vkGetImageMemoryRequirements-image-parent
  `image` **must** have been created, allocated, or retrieved from `device`

The `VkMemoryRequirements` structure is defined as:

```
// Provided by VK_VERSION_1_0
typedef struct VkMemoryRequirements {
    VkDeviceSize    size;
    VkDeviceSize    alignment;
    uint32_t        memoryTypeBits;
} VkMemoryRequirements;
```

- `size` is the size, in bytes, of the memory allocation **required** for the resource.
- `alignment` is the alignment, in bytes, of the offset within the allocation **required** for the resource.
- `memoryTypeBits` is a bitmask and contains one bit set for every supported memory type for the resource. Bit `i` is set if and only if the memory type `i` in the `VkPhysicalDeviceMemoryProperties` structure for the physical device is supported for the resource.

The implementation guarantees certain properties about the memory requirements returned by vkGetDeviceBufferMemoryRequirements, vkGetDeviceImageMemoryRequirements, vkGetBufferMemoryRequirements and vkGetImageMemoryRequirements:

- The `memoryTypeBits` member always contains at least one bit set.
- If `buffer` is a `VkBuffer` not created with the `VK_BUFFER_CREATE_SPARSE_BINDING_BIT` or `VK_BUFFER_CREATE_PROTECTED_BIT` bits set, or if `image` is a linear image that was not created with the `VK_IMAGE_CREATE_PROTECTED_BIT` bit set, then the `memoryTypeBits` member always contains at least one bit set corresponding to a `VkMemoryType` with a `propertyFlags` that has both the `VK_MEMORY_PROPERTY_HOST_VISIBLE_BIT` bit and the `VK_MEMORY_PROPERTY_HOST_COHERENT_BIT` bit set. In other words, mappable coherent memory **can** always be attached to these objects.
- If `buffer` was created with VkExternalMemoryBufferCreateInfo::`handleTypes` set to `0` or `image` was created with VkExternalMemoryImageCreateInfo::`handleTypes` set to `0`, the `memoryTypeBits` member always contains at least one bit set corresponding to a `VkMemoryType` with a `propertyFlags` that has the `VK_MEMORY_PROPERTY_DEVICE_LOCAL_BIT` bit set.
- The `memoryTypeBits` member is identical for all `VkBuffer` objects created with the same value for the `flags` and `usage` members in the VkBufferCreateInfo structure and the `handleTypes` member of the VkExternalMemoryBufferCreateInfo structure passed to vkCreateBuffer. Further, if `usage1` and `usage2` of type VkBufferUsageFlags are such that the bits set in `usage2` are a subset of the bits set in `usage1`, and they have the same `flags` and VkExternalMemoryBufferCreateInfo ::`handleTypes`, then the bits set in `memoryTypeBits` returned for `usage1` **must** be a subset of the bits set in `memoryTypeBits` returned for `usage2`, for all values of `flags`.
- The `alignment` member is a power of two.

- The alignment member is identical for all VkBuffer objects created with the same combination of values for the usage and flags members in the VkBufferCreateInfo structure passed to vkCreateBuffer.
- If the maintenance4 feature is enabled, then the alignment member is identical for all VkImage objects created with the same combination of values for the flags, imageType, format, extent, mipLevels, arrayLayers, samples, tiling and usage members in the VkImageCreateInfo structure passed to vkCreateImage.
- The alignment member satisfies the buffer descriptor offset alignment requirements associated with the VkBuffer's usage:
  - If usage included VK_BUFFER_USAGE_UNIFORM_TEXEL_BUFFER_BIT or VK_BUFFER_USAGE_STORAGE_TEXEL_BUFFER_BIT, alignment **must** be an integer multiple of VkPhysicalDeviceLimits::minTexelBufferOffsetAlignment.
  - If usage included VK_BUFFER_USAGE_UNIFORM_BUFFER_BIT, alignment **must** be an integer multiple of VkPhysicalDeviceLimits::minUniformBufferOffsetAlignment.
  - If usage included VK_BUFFER_USAGE_STORAGE_BUFFER_BIT, alignment **must** be an integer multiple of VkPhysicalDeviceLimits::minStorageBufferOffsetAlignment.
- For images created with a color format, the memoryTypeBits member is identical for all VkImage objects created with the same combination of values for the tiling member, the VK_IMAGE_CREATE_SPARSE_BINDING_BIT bit and VK_IMAGE_CREATE_PROTECTED_BIT bit of the flags member, the VK_IMAGE_CREATE_SPLIT_INSTANCE_BIND_REGIONS_BIT bit of the flags member, handleTypes member of VkExternalMemoryImageCreateInfo, and the VK_IMAGE_USAGE_TRANSIENT_ATTACHMENT_BIT of the usage member in the VkImageCreateInfo structure passed to vkCreateImage.
- For images created with a depth/stencil format, the memoryTypeBits member is identical for all VkImage objects created with the same combination of values for the format member, the tiling member, the VK_IMAGE_CREATE_SPARSE_BINDING_BIT bit and VK_IMAGE_CREATE_PROTECTED_BIT bit of the flags member, the VK_IMAGE_CREATE_SPLIT_INSTANCE_BIND_REGIONS_BIT bit of the flags member, handleTypes member of VkExternalMemoryImageCreateInfo, and the VK_IMAGE_USAGE_TRANSIENT_ATTACHMENT_BIT of the usage member in the VkImageCreateInfo structure passed to vkCreateImage.
- If the memory requirements are for a VkImage, the memoryTypeBits member **must** not refer to a VkMemoryType with a propertyFlags that has the VK_MEMORY_PROPERTY_LAZILY_ALLOCATED_BIT bit set if the image did not have VK_IMAGE_USAGE_TRANSIENT_ATTACHMENT_BIT bit set in the usage member of the VkImageCreateInfo structure passed to vkCreateImage.
- If the memory requirements are for a VkBuffer, the memoryTypeBits member **must** not refer to a VkMemoryType with a propertyFlags that has the VK_MEMORY_PROPERTY_LAZILY_ALLOCATED_BIT bit set.

> **NOTE** The implication of this requirement is that lazily allocated memory is disallowed for buffers in all cases.

- The size member is identical for all VkBuffer objects created with the same combination of creation parameters specified in VkBufferCreateInfo and its pNext chain.
- The size member is identical for all VkImage objects created with the same combination of creation parameters specified in VkImageCreateInfo and its pNext chain.

NOTE	This, however, does not imply that they interpret the contents of the bound memory identically with each other. That additional guarantee, however, **can** be explicitly requested using VK_IMAGE_CREATE_ALIAS_BIT.

- If the maintenance4 feature is enabled, these additional guarantees apply:
  - For a VkBuffer, the size memory requirement is never greater than that of another VkBuffer created with a greater or equal size specified in VkBufferCreateInfo, all other creation parameters being identical.
  - For a VkBuffer, the size memory requirement is never greater than the result of aligning VkBufferCreateInfo::size with the alignment memory requirement.
  - For a VkImage, the size memory requirement is never greater than that of another VkImage created with a greater or equal value in each of extent.width, extent.height, and extent.depth; all other creation parameters being identical.
  - The memory requirements returned by vkGetDeviceBufferMemoryRequirements are identical to those that would be returned by vkGetBufferMemoryRequirements2 if it were called with a VkBuffer created with the same VkBufferCreateInfo values.
  - The memory requirements returned by vkGetDeviceImageMemoryRequirements are identical to those that would be returned by vkGetImageMemoryRequirements2 if it were called with a VkImage created with the same VkImageCreateInfo values.

To determine the memory requirements for a buffer resource, call:

```
// Provided by VK_VERSION_1_1
void vkGetBufferMemoryRequirements2(
    VkDevice                                    device,
    const VkBufferMemoryRequirementsInfo2*      pInfo,
    VkMemoryRequirements2*                      pMemoryRequirements);
```

- device is the logical device that owns the buffer.
- pInfo is a pointer to a VkBufferMemoryRequirementsInfo2 structure containing parameters required for the memory requirements query.
- pMemoryRequirements is a pointer to a VkMemoryRequirements2 structure in which the memory requirements of the buffer object are returned.

Valid Usage (Implicit)

- VUID-vkGetBufferMemoryRequirements2-device-parameter
  device **must** be a valid VkDevice handle
- VUID-vkGetBufferMemoryRequirements2-pInfo-parameter
  pInfo **must** be a valid pointer to a valid VkBufferMemoryRequirementsInfo2 structure
- VUID-vkGetBufferMemoryRequirements2-pMemoryRequirements-parameter
  pMemoryRequirements **must** be a valid pointer to a VkMemoryRequirements2 structure

To determine the memory requirements for a buffer resource without creating an object, call:

```
// Provided by VK_VERSION_1_3
void vkGetDeviceBufferMemoryRequirements(
    VkDevice                                    device,
    const VkDeviceBufferMemoryRequirements*     pInfo,
    VkMemoryRequirements2*                      pMemoryRequirements);
```

- `device` is the logical device intended to own the buffer.
- `pInfo` is a pointer to a VkDeviceBufferMemoryRequirements structure containing parameters required for the memory requirements query.
- `pMemoryRequirements` is a pointer to a VkMemoryRequirements2 structure in which the memory requirements of the buffer object are returned.

Valid Usage (Implicit)

- VUID-vkGetDeviceBufferMemoryRequirements-device-parameter
  `device` **must** be a valid VkDevice handle
- VUID-vkGetDeviceBufferMemoryRequirements-pInfo-parameter
  `pInfo` **must** be a valid pointer to a valid VkDeviceBufferMemoryRequirements structure
- VUID-vkGetDeviceBufferMemoryRequirements-pMemoryRequirements-parameter
  `pMemoryRequirements` **must** be a valid pointer to a VkMemoryRequirements2 structure

The `VkBufferMemoryRequirementsInfo2` structure is defined as:

```
// Provided by VK_VERSION_1_1
typedef struct VkBufferMemoryRequirementsInfo2 {
    VkStructureType    sType;
    const void*        pNext;
    VkBuffer           buffer;
} VkBufferMemoryRequirementsInfo2;
```

- `sType` is a VkStructureType value identifying this structure.
- `pNext` is `NULL` or a pointer to a structure extending this structure.
- `buffer` is the buffer to query.

Valid Usage (Implicit)

- VUID-VkBufferMemoryRequirementsInfo2-sType-sType
  `sType` **must** be `VK_STRUCTURE_TYPE_BUFFER_MEMORY_REQUIREMENTS_INFO_2`
- VUID-VkBufferMemoryRequirementsInfo2-pNext-pNext
  `pNext` **must** be `NULL`

- VUID-VkBufferMemoryRequirementsInfo2-buffer-parameter
  `buffer` **must** be a valid VkBuffer handle

The `VkDeviceBufferMemoryRequirements` structure is defined as:

```
// Provided by VK_VERSION_1_3
typedef struct VkDeviceBufferMemoryRequirements {
    VkStructureType              sType;
    const void*                  pNext;
    const VkBufferCreateInfo*    pCreateInfo;
} VkDeviceBufferMemoryRequirements;
```

- `sType` is a VkStructureType value identifying this structure.
- `pNext` is `NULL` or a pointer to a structure extending this structure.
- `pCreateInfo` is a pointer to a VkBufferCreateInfo structure containing parameters affecting creation of the buffer to query.

Valid Usage (Implicit)

- VUID-VkDeviceBufferMemoryRequirements-sType-sType
  `sType` **must** be `VK_STRUCTURE_TYPE_DEVICE_BUFFER_MEMORY_REQUIREMENTS`
- VUID-VkDeviceBufferMemoryRequirements-pNext-pNext
  `pNext` **must** be `NULL`
- VUID-VkDeviceBufferMemoryRequirements-pCreateInfo-parameter
  `pCreateInfo` **must** be a valid pointer to a valid VkBufferCreateInfo structure

To determine the memory requirements for an image resource, call:

```
// Provided by VK_VERSION_1_1
void vkGetImageMemoryRequirements2(
    VkDevice                                    device,
    const VkImageMemoryRequirementsInfo2*       pInfo,
    VkMemoryRequirements2*                      pMemoryRequirements);
```

- `device` is the logical device that owns the image.
- `pInfo` is a pointer to a VkImageMemoryRequirementsInfo2 structure containing parameters required for the memory requirements query.
- `pMemoryRequirements` is a pointer to a VkMemoryRequirements2 structure in which the memory requirements of the image object are returned.

Valid Usage (Implicit)

- VUID-vkGetImageMemoryRequirements2-device-parameter
  `device` **must** be a valid VkDevice handle
- VUID-vkGetImageMemoryRequirements2-pInfo-parameter
  `pInfo` **must** be a valid pointer to a valid VkImageMemoryRequirementsInfo2 structure
- VUID-vkGetImageMemoryRequirements2-pMemoryRequirements-parameter
  `pMemoryRequirements` **must** be a valid pointer to a VkMemoryRequirements2 structure

To determine the memory requirements for an image resource without creating an object, call:

```
// Provided by VK_VERSION_1_3
void vkGetDeviceImageMemoryRequirements(
    VkDevice                                    device,
    const VkDeviceImageMemoryRequirements*      pInfo,
    VkMemoryRequirements2*                      pMemoryRequirements);
```

- `device` is the logical device intended to own the image.
- `pInfo` is a pointer to a VkDeviceImageMemoryRequirements structure containing parameters required for the memory requirements query.
- `pMemoryRequirements` is a pointer to a VkMemoryRequirements2 structure in which the memory requirements of the image object are returned.

Valid Usage (Implicit)

- VUID-vkGetDeviceImageMemoryRequirements-device-parameter
  `device` **must** be a valid VkDevice handle
- VUID-vkGetDeviceImageMemoryRequirements-pInfo-parameter
  `pInfo` **must** be a valid pointer to a valid VkDeviceImageMemoryRequirements structure
- VUID-vkGetDeviceImageMemoryRequirements-pMemoryRequirements-parameter
  `pMemoryRequirements` **must** be a valid pointer to a VkMemoryRequirements2 structure

The `VkImageMemoryRequirementsInfo2` structure is defined as:

```
// Provided by VK_VERSION_1_1
typedef struct VkImageMemoryRequirementsInfo2 {
    VkStructureType    sType;
    const void*        pNext;
    VkImage            image;
} VkImageMemoryRequirementsInfo2;
```

- `sType` is a VkStructureType value identifying this structure.
- `pNext` is `NULL` or a pointer to a structure extending this structure.
- `image` is the image to query.

Valid Usage

- VUID-VkImageMemoryRequirementsInfo2-image-01589
  If `image` was created with a *multi-planar* format and the `VK_IMAGE_CREATE_DISJOINT_BIT` flag, there **must** be a VkImagePlaneMemoryRequirementsInfo included in the `pNext` chain of the VkImageMemoryRequirementsInfo2 structure
- VUID-VkImageMemoryRequirementsInfo2-image-01590
  If `image` was not created with the `VK_IMAGE_CREATE_DISJOINT_BIT` flag, there **must** not be a VkImagePlaneMemoryRequirementsInfo included in the `pNext` chain of the VkImageMemoryRequirementsInfo2 structure
- VUID-VkImageMemoryRequirementsInfo2-image-01591
  If `image` was created with a single-plane format, there **must** not be a VkImagePlaneMemoryRequirementsInfo included in the `pNext` chain of the VkImageMemoryRequirementsInfo2 structure

Valid Usage (Implicit)

- VUID-VkImageMemoryRequirementsInfo2-sType-sType
  `sType` **must** be `VK_STRUCTURE_TYPE_IMAGE_MEMORY_REQUIREMENTS_INFO_2`
- VUID-VkImageMemoryRequirementsInfo2-pNext-pNext
  `pNext` **must** be `NULL` or a pointer to a valid instance of VkImagePlaneMemoryRequirementsInfo
- VUID-VkImageMemoryRequirementsInfo2-sType-unique
  The `sType` value of each struct in the `pNext` chain **must** be unique
- VUID-VkImageMemoryRequirementsInfo2-image-parameter
  `image` **must** be a valid VkImage handle

The `VkDeviceImageMemoryRequirements` structure is defined as:

```
// Provided by VK_VERSION_1_3
typedef struct VkDeviceImageMemoryRequirements {
    VkStructureType             sType;
    const void*                 pNext;
    const VkImageCreateInfo*    pCreateInfo;
    VkImageAspectFlagBits       planeAspect;
} VkDeviceImageMemoryRequirements;
```

- `sType` is a VkStructureType value identifying this structure.
- `pNext` is `NULL` or a pointer to a structure extending this structure.
- `pCreateInfo` is a pointer to a VkImageCreateInfo structure containing parameters affecting creation of the image to query.
- `planeAspect` is a VkImageAspectFlagBits value specifying the aspect corresponding to the image

plane to query. This parameter is ignored unless `pCreateInfo->flags` has `VK_IMAGE_CREATE_DISJOINT_BIT` set.

Valid Usage

- VUID-VkDeviceImageMemoryRequirements-pCreateInfo-06416
  The `pCreateInfo->pNext` chain **must** not contain a `VkImageSwapchainCreateInfoKHR` structure
- VUID-VkDeviceImageMemoryRequirements-pCreateInfo-06417
  If `pCreateInfo->format` specifies a *multi-planar* format and `pCreateInfo->flags` has `VK_IMAGE_CREATE_DISJOINT_BIT` set then `planeAspect` **must** not be `VK_IMAGE_ASPECT_NONE_KHR`
- VUID-VkDeviceImageMemoryRequirements-pCreateInfo-06419
  If `pCreateInfo->flags` has `VK_IMAGE_CREATE_DISJOINT_BIT` set and if the `pCreateInfo->tiling` is `VK_IMAGE_TILING_LINEAR` or `VK_IMAGE_TILING_OPTIMAL`, then `planeAspect` **must** be a single valid multi-planar aspect mask bit

Valid Usage (Implicit)

- VUID-VkDeviceImageMemoryRequirements-sType-sType
  `sType` **must** be `VK_STRUCTURE_TYPE_DEVICE_IMAGE_MEMORY_REQUIREMENTS`
- VUID-VkDeviceImageMemoryRequirements-pNext-pNext
  `pNext` **must** be `NULL`
- VUID-VkDeviceImageMemoryRequirements-pCreateInfo-parameter
  `pCreateInfo` **must** be a valid pointer to a valid VkImageCreateInfo structure
- VUID-VkDeviceImageMemoryRequirements-planeAspect-parameter
  If `planeAspect` is not `0`, `planeAspect` **must** be a valid VkImageAspectFlagBits value

To determine the memory requirements for a plane of a disjoint image, add a `VkImagePlaneMemoryRequirementsInfo` structure to the `pNext` chain of the `VkImageMemoryRequirementsInfo2` structure.

The `VkImagePlaneMemoryRequirementsInfo` structure is defined as:

```
// Provided by VK_VERSION_1_1
typedef struct VkImagePlaneMemoryRequirementsInfo {
    VkStructureType          sType;
    const void*              pNext;
    VkImageAspectFlagBits    planeAspect;
} VkImagePlaneMemoryRequirementsInfo;
```

- `sType` is a VkStructureType value identifying this structure.
- `pNext` is `NULL` or a pointer to a structure extending this structure.
- `planeAspect` is a VkImageAspectFlagBits value specifying the aspect corresponding to the image plane to query.

Valid Usage

- VUID-VkImagePlaneMemoryRequirementsInfo-planeAspect-02281
  If the image's `tiling` is `VK_IMAGE_TILING_LINEAR` or `VK_IMAGE_TILING_OPTIMAL`, then `planeAspect` **must** be a single valid multi-planar aspect mask bit

Valid Usage (Implicit)

- VUID-VkImagePlaneMemoryRequirementsInfo-sType-sType
  `sType` **must** be `VK_STRUCTURE_TYPE_IMAGE_PLANE_MEMORY_REQUIREMENTS_INFO`
- VUID-VkImagePlaneMemoryRequirementsInfo-planeAspect-parameter
  `planeAspect` **must** be a valid VkImageAspectFlagBits value

The `VkMemoryRequirements2` structure is defined as:

```
// Provided by VK_VERSION_1_1
typedef struct VkMemoryRequirements2 {
    VkStructureType         sType;
    void*                   pNext;
    VkMemoryRequirements    memoryRequirements;
} VkMemoryRequirements2;
```

- `sType` is a VkStructureType value identifying this structure.
- `pNext` is `NULL` or a pointer to a structure extending this structure.
- `memoryRequirements` is a VkMemoryRequirements structure describing the memory requirements of the resource.

Valid Usage (Implicit)

- VUID-VkMemoryRequirements2-sType-sType
  `sType` **must** be `VK_STRUCTURE_TYPE_MEMORY_REQUIREMENTS_2`
- VUID-VkMemoryRequirements2-pNext-pNext
  `pNext` **must** be `NULL` or a pointer to a valid instance of VkMemoryDedicatedRequirements
- VUID-VkMemoryRequirements2-sType-unique
  The `sType` value of each struct in the `pNext` chain **must** be unique

The `VkMemoryDedicatedRequirements` structure is defined as:

```
// Provided by VK_VERSION_1_1
typedef struct VkMemoryDedicatedRequirements {
    VkStructureType    sType;
    void*              pNext;
    VkBool32           prefersDedicatedAllocation;
    VkBool32           requiresDedicatedAllocation;
} VkMemoryDedicatedRequirements;
```

- `sType` is a VkStructureType value identifying this structure.
- `pNext` is `NULL` or a pointer to a structure extending this structure.
- `prefersDedicatedAllocation` specifies that the implementation would prefer a dedicated allocation for this resource. The application is still free to suballocate the resource but it **may** get better performance if a dedicated allocation is used.
- `requiresDedicatedAllocation` specifies that a dedicated allocation is required for this resource.

To determine the dedicated allocation requirements of a buffer or image resource, add a VkMemoryDedicatedRequirements structure to the `pNext` chain of the VkMemoryRequirements2 structure passed as the `pMemoryRequirements` parameter of vkGetBufferMemoryRequirements2 or vkGetImageMemoryRequirements2, respectively.

Constraints on the values returned for buffer resources are:

- `requiresDedicatedAllocation` **may** be `VK_TRUE` if the `pNext` chain of VkBufferCreateInfo for the call to `vkCreateBuffer` used to create the buffer being queried included a VkExternalMemoryBufferCreateInfo structure, and any of the handle types specified in VkExternalMemoryBufferCreateInfo::`handleTypes` requires dedicated allocation, as reported by vkGetPhysicalDeviceExternalBufferProperties in `VkExternalBufferProperties`::`externalMemoryProperties.externalMemoryFeatures`. Otherwise, `requiresDedicatedAllocation` will be `VK_FALSE`.
- When the implementation sets `requiresDedicatedAllocation` to `VK_TRUE`, it **must** also set `prefersDedicatedAllocation` to `VK_TRUE`.
- If `VK_BUFFER_CREATE_SPARSE_BINDING_BIT` was set in VkBufferCreateInfo::`flags` when `buffer` was created, then both `prefersDedicatedAllocation` and `requiresDedicatedAllocation` will be `VK_FALSE`.

Constraints on the values returned for image resources are:

- `requiresDedicatedAllocation` **may** be `VK_TRUE` if the `pNext` chain of VkImageCreateInfo for the call to vkCreateImage used to create the image being queried included a VkExternalMemoryImageCreateInfo structure, and any of the handle types specified in VkExternalMemoryImageCreateInfo::`handleTypes` requires dedicated allocation, as reported by vkGetPhysicalDeviceImageFormatProperties2 in `VkExternalImageFormatProperties`::`externalMemoryProperties.externalMemoryFeatures`.
- `requiresDedicatedAllocation` will otherwise be `VK_FALSE`
- If `VK_IMAGE_CREATE_SPARSE_BINDING_BIT` was set in VkImageCreateInfo::`flags` when `image` was created, then both `prefersDedicatedAllocation` and `requiresDedicatedAllocation` will be `VK_FALSE`.

Valid Usage (Implicit)

- VUID-VkMemoryDedicatedRequirements-sType-sType
  `sType` **must** be `VK_STRUCTURE_TYPE_MEMORY_DEDICATED_REQUIREMENTS`

To attach memory to a buffer object, call:

```
// Provided by VK_VERSION_1_0
VkResult vkBindBufferMemory(
    VkDevice                                    device,
    VkBuffer                                    buffer,
    VkDeviceMemory                              memory,
    VkDeviceSize                                memoryOffset);
```

- `device` is the logical device that owns the buffer and memory.
- `buffer` is the buffer to be attached to memory.
- `memory` is a VkDeviceMemory object describing the device memory to attach.
- `memoryOffset` is the start offset of the region of `memory` which is to be bound to the buffer. The number of bytes returned in the `VkMemoryRequirements`::`size` member in `memory`, starting from `memoryOffset` bytes, will be bound to the specified buffer.

`vkBindBufferMemory` is equivalent to passing the same parameters through VkBindBufferMemoryInfo to vkBindBufferMemory2.

Valid Usage

- VUID-vkBindBufferMemory-buffer-07459
  `buffer` **must** not have been bound to a memory object
- VUID-vkBindBufferMemory-buffer-01030
  `buffer` **must** not have been created with any sparse memory binding flags
- VUID-vkBindBufferMemory-memoryOffset-01031
  `memoryOffset` **must** be less than the size of `memory`
- VUID-vkBindBufferMemory-memory-01035
  `memory` **must** have been allocated using one of the memory types allowed in the `memoryTypeBits` member of the `VkMemoryRequirements` structure returned from a call to `vkGetBufferMemoryRequirements` with `buffer`
- VUID-vkBindBufferMemory-memoryOffset-01036
  `memoryOffset` **must** be an integer multiple of the `alignment` member of the `VkMemoryRequirements` structure returned from a call to `vkGetBufferMemoryRequirements` with `buffer`
- VUID-vkBindBufferMemory-size-01037
  The `size` member of the `VkMemoryRequirements` structure returned from a call to `vkGetBufferMemoryRequirements` with `buffer` **must** be less than or equal to the size of `memory`

minus memoryOffset

- VUID-vkBindBufferMemory-buffer-01444
  If buffer requires a dedicated allocation (as reported by vkGetBufferMemoryRequirements2 in VkMemoryDedicatedRequirements::requiresDedicatedAllocation for buffer), memory **must** have been allocated with VkMemoryDedicatedAllocateInfo::buffer equal to buffer
- VUID-vkBindBufferMemory-memory-01508
  If the VkMemoryAllocateInfo provided when memory was allocated included a VkMemoryDedicatedAllocateInfo structure in its pNext chain, and VkMemoryDedicatedAllocateInfo::buffer was not VK_NULL_HANDLE, then buffer **must** equal VkMemoryDedicatedAllocateInfo::buffer, and memoryOffset **must** be zero
- VUID-vkBindBufferMemory-None-01898
  If buffer was created with the VK_BUFFER_CREATE_PROTECTED_BIT bit set, the buffer **must** be bound to a memory object allocated with a memory type that reports VK_MEMORY_PROPERTY_PROTECTED_BIT
- VUID-vkBindBufferMemory-None-01899
  If buffer was created with the VK_BUFFER_CREATE_PROTECTED_BIT bit not set, the buffer **must** not be bound to a memory object allocated with a memory type that reports VK_MEMORY_PROPERTY_PROTECTED_BIT
- VUID-vkBindBufferMemory-memory-02726
  If the value of VkExportMemoryAllocateInfo::handleTypes used to allocate memory is not 0, it **must** include at least one of the handles set in VkExternalMemoryBufferCreateInfo::handleTypes when buffer was created
- VUID-vkBindBufferMemory-memory-02985
  If memory was allocated by a memory import operation, the external handle type of the imported memory **must** also have been set in VkExternalMemoryBufferCreateInfo::handleTypes when buffer was created
- VUID-vkBindBufferMemory-bufferDeviceAddress-03339
  If the VkPhysicalDeviceBufferDeviceAddressFeatures::bufferDeviceAddress feature is enabled and buffer was created with the VK_BUFFER_USAGE_SHADER_DEVICE_ADDRESS_BIT bit set, memory **must** have been allocated with the VK_MEMORY_ALLOCATE_DEVICE_ADDRESS_BIT bit set
- VUID-vkBindBufferMemory-bufferDeviceAddressCaptureReplay-09200
  If the VkPhysicalDeviceBufferDeviceAddressFeatures::bufferDeviceAddressCaptureReplay feature is enabled and buffer was created with the VK_BUFFER_CREATE_DEVICE_ADDRESS_CAPTURE_REPLAY_BIT bit set, memory **must** have been allocated with the VK_MEMORY_ALLOCATE_DEVICE_ADDRESS_CAPTURE_REPLAY_BIT bit set

Valid Usage (Implicit)

- VUID-vkBindBufferMemory-device-parameter
  device **must** be a valid VkDevice handle
- VUID-vkBindBufferMemory-buffer-parameter

`buffer` **must** be a valid VkBuffer handle

- VUID-vkBindBufferMemory-memory-parameter
  `memory` **must** be a valid VkDeviceMemory handle
- VUID-vkBindBufferMemory-buffer-parent
  `buffer` **must** have been created, allocated, or retrieved from `device`
- VUID-vkBindBufferMemory-memory-parent
  `memory` **must** have been created, allocated, or retrieved from `device`

Host Synchronization

- Host access to `buffer` **must** be externally synchronized

Return Codes

Success

- `VK_SUCCESS`

Failure

- `VK_ERROR_OUT_OF_HOST_MEMORY`
- `VK_ERROR_OUT_OF_DEVICE_MEMORY`

To attach memory to buffer objects for one or more buffers at a time, call:

```
// Provided by VK_VERSION_1_1
VkResult vkBindBufferMemory2(
    VkDevice                                    device,
    uint32_t                                    bindInfoCount,
    const VkBindBufferMemoryInfo*               pBindInfos);
```

- `device` is the logical device that owns the buffers and memory.
- `bindInfoCount` is the number of elements in `pBindInfos`.
- `pBindInfos` is a pointer to an array of `bindInfoCount` VkBindBufferMemoryInfo structures describing buffers and memory to bind.

On some implementations, it **may** be more efficient to batch memory bindings into a single command.

If any of the memory binding operations described by `pBindInfos` fail, the VkResult returned by this command **must** be the return value of any one of the memory binding operations which did not return `VK_SUCCESS`.

NOTE If the `vkBindBufferMemory2` command failed, and `bindInfoCount` was greater than one, then the buffers referenced by `pBindInfos` will be in an indeterminate state, and

must not be used.

Applications should destroy these buffers.

Valid Usage (Implicit)

- VUID-vkBindBufferMemory2-device-parameter
  `device` **must** be a valid VkDevice handle
- VUID-vkBindBufferMemory2-pBindInfos-parameter
  `pBindInfos` **must** be a valid pointer to an array of `bindInfoCount` valid VkBindBufferMemoryInfo structures
- VUID-vkBindBufferMemory2-bindInfoCount-arraylength
  `bindInfoCount` **must** be greater than `0`

Return Codes

Success

- `VK_SUCCESS`

Failure

- `VK_ERROR_OUT_OF_HOST_MEMORY`
- `VK_ERROR_OUT_OF_DEVICE_MEMORY`

`VkBindBufferMemoryInfo` contains members corresponding to the parameters of vkBindBufferMemory.

The `VkBindBufferMemoryInfo` structure is defined as:

```
// Provided by VK_VERSION_1_1
typedef struct VkBindBufferMemoryInfo {
    VkStructureType    sType;
    const void*        pNext;
    VkBuffer           buffer;
    VkDeviceMemory     memory;
    VkDeviceSize       memoryOffset;
} VkBindBufferMemoryInfo;
```

- `sType` is a VkStructureType value identifying this structure.
- `pNext` is `NULL` or a pointer to a structure extending this structure.
- `buffer` is the buffer to be attached to memory.
- `memory` is a VkDeviceMemory object describing the device memory to attach.
- `memoryOffset` is the start offset of the region of `memory` which is to be bound to the buffer. The number of bytes returned in the `VkMemoryRequirements`::`size` member in `memory`, starting from

memoryOffset bytes, will be bound to the specified buffer.

Valid Usage

- VUID-VkBindBufferMemoryInfo-buffer-07459
  buffer **must** not have been bound to a memory object
- VUID-VkBindBufferMemoryInfo-buffer-01030
  buffer **must** not have been created with any sparse memory binding flags
- VUID-VkBindBufferMemoryInfo-memoryOffset-01031
  memoryOffset **must** be less than the size of memory
- VUID-VkBindBufferMemoryInfo-memory-01035
  memory **must** have been allocated using one of the memory types allowed in the memoryTypeBits member of the VkMemoryRequirements structure returned from a call to vkGetBufferMemoryRequirements with buffer
- VUID-VkBindBufferMemoryInfo-memoryOffset-01036
  memoryOffset **must** be an integer multiple of the alignment member of the VkMemoryRequirements structure returned from a call to vkGetBufferMemoryRequirements with buffer
- VUID-VkBindBufferMemoryInfo-size-01037
  The size member of the VkMemoryRequirements structure returned from a call to vkGetBufferMemoryRequirements with buffer **must** be less than or equal to the size of memory minus memoryOffset
- VUID-VkBindBufferMemoryInfo-buffer-01444
  If buffer requires a dedicated allocation (as reported by vkGetBufferMemoryRequirements2 in VkMemoryDedicatedRequirements::requiresDedicatedAllocation for buffer), memory **must** have been allocated with VkMemoryDedicatedAllocateInfo::buffer equal to buffer
- VUID-VkBindBufferMemoryInfo-memory-01508
  If the VkMemoryAllocateInfo provided when memory was allocated included a VkMemoryDedicatedAllocateInfo structure in its pNext chain, and VkMemoryDedicatedAllocateInfo::buffer was not VK_NULL_HANDLE, then buffer **must** equal VkMemoryDedicatedAllocateInfo::buffer, and memoryOffset **must** be zero
- VUID-VkBindBufferMemoryInfo-None-01898
  If buffer was created with the VK_BUFFER_CREATE_PROTECTED_BIT bit set, the buffer **must** be bound to a memory object allocated with a memory type that reports VK_MEMORY_PROPERTY_PROTECTED_BIT
- VUID-VkBindBufferMemoryInfo-None-01899
  If buffer was created with the VK_BUFFER_CREATE_PROTECTED_BIT bit not set, the buffer **must** not be bound to a memory object allocated with a memory type that reports VK_MEMORY_PROPERTY_PROTECTED_BIT
- VUID-VkBindBufferMemoryInfo-memory-02726
  If the value of VkExportMemoryAllocateInfo::handleTypes used to allocate memory is not 0, it **must** include at least one of the handles set in VkExternalMemoryBufferCreateInfo

::handleTypes when buffer was created

- VUID-VkBindBufferMemoryInfo-memory-02985
  If memory was allocated by a memory import operation, the external handle type of the imported memory **must** also have been set in VkExternalMemoryBufferCreateInfo ::handleTypes when buffer was created
- VUID-VkBindBufferMemoryInfo-bufferDeviceAddress-03339
  If the VkPhysicalDeviceBufferDeviceAddressFeatures::bufferDeviceAddress feature is enabled and buffer was created with the VK_BUFFER_USAGE_SHADER_DEVICE_ADDRESS_BIT bit set, memory **must** have been allocated with the VK_MEMORY_ALLOCATE_DEVICE_ADDRESS_BIT bit set
- VUID-VkBindBufferMemoryInfo-bufferDeviceAddressCaptureReplay-09200
  If the VkPhysicalDeviceBufferDeviceAddressFeatures::bufferDeviceAddressCaptureReplay feature is enabled and buffer was created with the VK_BUFFER_CREATE_DEVICE_ADDRESS_CAPTURE_REPLAY_BIT bit set, memory **must** have been allocated with the VK_MEMORY_ALLOCATE_DEVICE_ADDRESS_CAPTURE_REPLAY_BIT bit set
- VUID-VkBindBufferMemoryInfo-pNext-01605
  If the pNext chain includes a VkBindBufferMemoryDeviceGroupInfo structure, all instances of memory specified by VkBindBufferMemoryDeviceGroupInfo::pDeviceIndices **must** have been allocated

Valid Usage (Implicit)

- VUID-VkBindBufferMemoryInfo-sType-sType
  sType **must** be VK_STRUCTURE_TYPE_BIND_BUFFER_MEMORY_INFO
- VUID-VkBindBufferMemoryInfo-pNext-pNext
  pNext **must** be NULL or a pointer to a valid instance of VkBindBufferMemoryDeviceGroupInfo
- VUID-VkBindBufferMemoryInfo-sType-unique
  The sType value of each struct in the pNext chain **must** be unique
- VUID-VkBindBufferMemoryInfo-buffer-parameter
  buffer **must** be a valid VkBuffer handle
- VUID-VkBindBufferMemoryInfo-memory-parameter
  memory **must** be a valid VkDeviceMemory handle
- VUID-VkBindBufferMemoryInfo-commonparent
  Both of buffer, and memory **must** have been created, allocated, or retrieved from the same VkDevice

The VkBindBufferMemoryDeviceGroupInfo structure is defined as:

```
// Provided by VK_VERSION_1_1
typedef struct VkBindBufferMemoryDeviceGroupInfo {
    VkStructureType    sType;
    const void*        pNext;
    uint32_t           deviceIndexCount;
    const uint32_t*    pDeviceIndices;
} VkBindBufferMemoryDeviceGroupInfo;
```

- `sType` is a VkStructureType value identifying this structure.
- `pNext` is `NULL` or a pointer to a structure extending this structure.
- `deviceIndexCount` is the number of elements in `pDeviceIndices`.
- `pDeviceIndices` is a pointer to an array of device indices.

If the `pNext` chain of VkBindBufferMemoryInfo includes a `VkBindBufferMemoryDeviceGroupInfo` structure, then that structure determines how memory is bound to buffers across multiple devices in a device group.

If `deviceIndexCount` is greater than zero, then on device index i the buffer is attached to the instance of `memory` on the physical device with device index `pDeviceIndices`[i].

If `deviceIndexCount` is zero and `memory` comes from a memory heap with the `VK_MEMORY_HEAP_MULTI_INSTANCE_BIT` bit set, then it is as if `pDeviceIndices` contains consecutive indices from zero to the number of physical devices in the logical device, minus one. In other words, by default each physical device attaches to its own instance of `memory`.

If `deviceIndexCount` is zero and `memory` comes from a memory heap without the `VK_MEMORY_HEAP_MULTI_INSTANCE_BIT` bit set, then it is as if `pDeviceIndices` contains an array of zeros. In other words, by default each physical device attaches to instance zero.

Valid Usage

- VUID-VkBindBufferMemoryDeviceGroupInfo-deviceIndexCount-01606
  `deviceIndexCount` **must** either be zero or equal to the number of physical devices in the logical device
- VUID-VkBindBufferMemoryDeviceGroupInfo-pDeviceIndices-01607
  All elements of `pDeviceIndices` **must** be valid device indices

Valid Usage (Implicit)

- VUID-VkBindBufferMemoryDeviceGroupInfo-sType-sType
  `sType` **must** be `VK_STRUCTURE_TYPE_BIND_BUFFER_MEMORY_DEVICE_GROUP_INFO`
- VUID-VkBindBufferMemoryDeviceGroupInfo-pDeviceIndices-parameter
  If `deviceIndexCount` is not `0`, `pDeviceIndices` **must** be a valid pointer to an array of `deviceIndexCount` `uint32_t` values

To attach memory to a VkImage object created without the VK_IMAGE_CREATE_DISJOINT_BIT set, call:

```
// Provided by VK_VERSION_1_0
VkResult vkBindImageMemory(
    VkDevice                                    device,
    VkImage                                     image,
    VkDeviceMemory                              memory,
    VkDeviceSize                                memoryOffset);
```

- device is the logical device that owns the image and memory.
- image is the image.
- memory is the VkDeviceMemory object describing the device memory to attach.
- memoryOffset is the start offset of the region of memory which is to be bound to the image. The number of bytes returned in the VkMemoryRequirements::size member in memory, starting from memoryOffset bytes, will be bound to the specified image.

vkBindImageMemory is equivalent to passing the same parameters through VkBindImageMemoryInfo to vkBindImageMemory2.

Valid Usage

- VUID-vkBindImageMemory-image-07460
  image **must** not have been bound to a memory object
- VUID-vkBindImageMemory-image-01045
  image **must** not have been created with any sparse memory binding flags
- VUID-vkBindImageMemory-memoryOffset-01046
  memoryOffset **must** be less than the size of memory
- VUID-vkBindImageMemory-image-01445
  If image requires a dedicated allocation (as reported by vkGetImageMemoryRequirements2 in VkMemoryDedicatedRequirements::requiresDedicatedAllocation for image), memory **must** have been created with VkMemoryDedicatedAllocateInfo::image equal to image
- VUID-vkBindImageMemory-memory-02628
  If the VkMemoryAllocateInfo provided when memory was allocated included a VkMemoryDedicatedAllocateInfo structure in its pNext chain, and VkMemoryDedicatedAllocateInfo::image was not VK_NULL_HANDLE, then image **must** equal VkMemoryDedicatedAllocateInfo::image and memoryOffset **must** be zero
- VUID-vkBindImageMemory-None-01901
  If image was created with the VK_IMAGE_CREATE_PROTECTED_BIT bit set, the image **must** be bound to a memory object allocated with a memory type that reports VK_MEMORY_PROPERTY_PROTECTED_BIT
- VUID-vkBindImageMemory-None-01902
  If image was created with the VK_IMAGE_CREATE_PROTECTED_BIT bit not set, the image **must** not be bound to a memory object created with a memory type that reports

VK_MEMORY_PROPERTY_PROTECTED_BIT

- VUID-vkBindImageMemory-memory-02728
  If the value of VkExportMemoryAllocateInfo::handleTypes used to allocate memory is not 0, it **must** include at least one of the handles set in VkExternalMemoryImageCreateInfo ::handleTypes when image was created
- VUID-vkBindImageMemory-memory-02989
  If memory was created by a memory import operation, the external handle type of the imported memory **must** also have been set in VkExternalMemoryImageCreateInfo ::handleTypes when image was created
- VUID-vkBindImageMemory-image-01608
  image **must** not have been created with the VK_IMAGE_CREATE_DISJOINT_BIT set
- VUID-vkBindImageMemory-memory-01047
  memory **must** have been allocated using one of the memory types allowed in the memoryTypeBits member of the VkMemoryRequirements structure returned from a call to vkGetImageMemoryRequirements with image
- VUID-vkBindImageMemory-memoryOffset-01048
  memoryOffset **must** be an integer multiple of the alignment member of the VkMemoryRequirements structure returned from a call to vkGetImageMemoryRequirements with image
- VUID-vkBindImageMemory-size-01049
  The difference of the size of memory and memoryOffset **must** be greater than or equal to the size member of the VkMemoryRequirements structure returned from a call to vkGetImageMemoryRequirements with the same image

Valid Usage (Implicit)

- VUID-vkBindImageMemory-device-parameter
  device **must** be a valid VkDevice handle
- VUID-vkBindImageMemory-image-parameter
  image **must** be a valid VkImage handle
- VUID-vkBindImageMemory-memory-parameter
  memory **must** be a valid VkDeviceMemory handle
- VUID-vkBindImageMemory-image-parent
  image **must** have been created, allocated, or retrieved from device
- VUID-vkBindImageMemory-memory-parent
  memory **must** have been created, allocated, or retrieved from device

Host Synchronization

- Host access to image **must** be externally synchronized

Return Codes

Success

- VK_SUCCESS

Failure

- VK_ERROR_OUT_OF_HOST_MEMORY
- VK_ERROR_OUT_OF_DEVICE_MEMORY

To attach memory to image objects for one or more images at a time, call:

```
// Provided by VK_VERSION_1_1
VkResult vkBindImageMemory2(
    VkDevice                                    device,
    uint32_t                                    bindInfoCount,
    const VkBindImageMemoryInfo*                pBindInfos);
```

- device is the logical device that owns the images and memory.
- bindInfoCount is the number of elements in pBindInfos.
- pBindInfos is a pointer to an array of VkBindImageMemoryInfo structures, describing images and memory to bind.

On some implementations, it **may** be more efficient to batch memory bindings into a single command.

If any of the memory binding operations described by pBindInfos fail, the VkResult returned by this command **must** be the return value of any one of the memory binding operations which did not return VK_SUCCESS.

NOTE

If the vkBindImageMemory2 command failed, and bindInfoCount was greater than one, then the images referenced by pBindInfos will be in an indeterminate state, and must not be used.

Applications should destroy these images.

Valid Usage

- VUID-vkBindImageMemory2-pBindInfos-02858
  If any VkBindImageMemoryInfo::image was created with VK_IMAGE_CREATE_DISJOINT_BIT then all planes of VkBindImageMemoryInfo::image **must** be bound individually in separate pBindInfos
- VUID-vkBindImageMemory2-pBindInfos-04006
  pBindInfos **must** not refer to the same image subresource more than once

Valid Usage (Implicit)

- VUID-vkBindImageMemory2-device-parameter
  `device` **must** be a valid VkDevice handle
- VUID-vkBindImageMemory2-pBindInfos-parameter
  `pBindInfos` **must** be a valid pointer to an array of `bindInfoCount` valid VkBindImageMemoryInfo structures
- VUID-vkBindImageMemory2-bindInfoCount-arraylength
  `bindInfoCount` **must** be greater than `0`

Return Codes

Success

- `VK_SUCCESS`

Failure

- `VK_ERROR_OUT_OF_HOST_MEMORY`
- `VK_ERROR_OUT_OF_DEVICE_MEMORY`

`VkBindImageMemoryInfo` contains members corresponding to the parameters of vkBindImageMemory.

The `VkBindImageMemoryInfo` structure is defined as:

```
// Provided by VK_VERSION_1_1
typedef struct VkBindImageMemoryInfo {
    VkStructureType    sType;
    const void*        pNext;
    VkImage            image;
    VkDeviceMemory     memory;
    VkDeviceSize       memoryOffset;
} VkBindImageMemoryInfo;
```

- `sType` is a VkStructureType value identifying this structure.
- `pNext` is `NULL` or a pointer to a structure extending this structure.
- `image` is the image to be attached to memory.
- `memory` is a VkDeviceMemory object describing the device memory to attach.
- `memoryOffset` is the start offset of the region of `memory` which is to be bound to the image. The number of bytes returned in the `VkMemoryRequirements`::`size` member in `memory`, starting from `memoryOffset` bytes, will be bound to the specified image.

Valid Usage

- VUID-VkBindImageMemoryInfo-image-07460
  `image` **must** not have been bound to a memory object
- VUID-VkBindImageMemoryInfo-image-01045
  `image` **must** not have been created with any sparse memory binding flags
- VUID-VkBindImageMemoryInfo-memoryOffset-01046
  `memoryOffset` **must** be less than the size of `memory`
- VUID-VkBindImageMemoryInfo-image-01445
  If `image` requires a dedicated allocation (as reported by vkGetImageMemoryRequirements2 in VkMemoryDedicatedRequirements::`requiresDedicatedAllocation` for `image`), `memory` **must** have been created with VkMemoryDedicatedAllocateInfo::`image` equal to `image`
- VUID-VkBindImageMemoryInfo-memory-02628
  If the `VkMemoryAllocateInfo` provided when `memory` was allocated included a VkMemoryDedicatedAllocateInfo structure in its `pNext` chain, and VkMemoryDedicatedAllocateInfo::`image` was not VK_NULL_HANDLE, then `image` **must** equal VkMemoryDedicatedAllocateInfo::`image` and `memoryOffset` **must** be zero
- VUID-VkBindImageMemoryInfo-None-01901
  If image was created with the `VK_IMAGE_CREATE_PROTECTED_BIT` bit set, the image **must** be bound to a memory object allocated with a memory type that reports `VK_MEMORY_PROPERTY_PROTECTED_BIT`
- VUID-VkBindImageMemoryInfo-None-01902
  If image was created with the `VK_IMAGE_CREATE_PROTECTED_BIT` bit not set, the image **must** not be bound to a memory object created with a memory type that reports `VK_MEMORY_PROPERTY_PROTECTED_BIT`
- VUID-VkBindImageMemoryInfo-memory-02728
  If the value of VkExportMemoryAllocateInfo::`handleTypes` used to allocate `memory` is not `0`, it **must** include at least one of the handles set in VkExternalMemoryImageCreateInfo::`handleTypes` when `image` was created
- VUID-VkBindImageMemoryInfo-memory-02989
  If `memory` was created by a memory import operation, the external handle type of the imported memory **must** also have been set in VkExternalMemoryImageCreateInfo::`handleTypes` when `image` was created
- VUID-VkBindImageMemoryInfo-pNext-01615
  If the `pNext` chain does not include a VkBindImagePlaneMemoryInfo structure, `memory` **must** have been allocated using one of the memory types allowed in the `memoryTypeBits` member of the VkMemoryRequirements structure returned from a call to vkGetImageMemoryRequirements2 with `image`
- VUID-VkBindImageMemoryInfo-pNext-01616
  If the `pNext` chain does not include a VkBindImagePlaneMemoryInfo structure, `memoryOffset` **must** be an integer multiple of the `alignment` member of the VkMemoryRequirements structure returned from a call to

vkGetImageMemoryRequirements2 with image

- VUID-VkBindImageMemoryInfo-pNext-01617
  If the pNext chain does not include a VkBindImagePlaneMemoryInfo structure, the difference of the size of memory and memoryOffset **must** be greater than or equal to the size member of the VkMemoryRequirements structure returned from a call to vkGetImageMemoryRequirements2 with the same image
- VUID-VkBindImageMemoryInfo-pNext-01618
  If the pNext chain includes a VkBindImagePlaneMemoryInfo structure, image **must** have been created with the VK_IMAGE_CREATE_DISJOINT_BIT bit set
- VUID-VkBindImageMemoryInfo-image-07736
  If image was created with the VK_IMAGE_CREATE_DISJOINT_BIT bit set, then the pNext chain **must** include a VkBindImagePlaneMemoryInfo structure
- VUID-VkBindImageMemoryInfo-pNext-01619
  If the pNext chain includes a VkBindImagePlaneMemoryInfo structure, memory **must** have been allocated using one of the memory types allowed in the memoryTypeBits member of the VkMemoryRequirements structure returned from a call to vkGetImageMemoryRequirements2 with image and where VkBindImagePlaneMemoryInfo::planeAspect corresponds to the VkImagePlaneMemoryRequirementsInfo::planeAspect in the VkImageMemoryRequirementsInfo2 structure's pNext chain
- VUID-VkBindImageMemoryInfo-pNext-01620
  If the pNext chain includes a VkBindImagePlaneMemoryInfo structure, memoryOffset **must** be an integer multiple of the alignment member of the VkMemoryRequirements structure returned from a call to vkGetImageMemoryRequirements2 with image and where VkBindImagePlaneMemoryInfo::planeAspect corresponds to the VkImagePlaneMemoryRequirementsInfo::planeAspect in the VkImageMemoryRequirementsInfo2 structure's pNext chain
- VUID-VkBindImageMemoryInfo-pNext-01621
  If the pNext chain includes a VkBindImagePlaneMemoryInfo structure, the difference of the size of memory and memoryOffset **must** be greater than or equal to the size member of the VkMemoryRequirements structure returned from a call to vkGetImageMemoryRequirements2 with the same image and where VkBindImagePlaneMemoryInfo::planeAspect corresponds to the VkImagePlaneMemoryRequirementsInfo::planeAspect in the VkImageMemoryRequirementsInfo2 structure's pNext chain
- VUID-VkBindImageMemoryInfo-memory-01625
  memory **must** be a valid VkDeviceMemory handle
- VUID-VkBindImageMemoryInfo-pNext-01626
  If the pNext chain includes a VkBindImageMemoryDeviceGroupInfo structure, all instances of memory specified by VkBindImageMemoryDeviceGroupInfo::pDeviceIndices **must** have been allocated
- VUID-VkBindImageMemoryInfo-pNext-01627
  If the pNext chain includes a VkBindImageMemoryDeviceGroupInfo structure, and VkBindImageMemoryDeviceGroupInfo::splitInstanceBindRegionCount is not zero, then

image **must** have been created with the VK_IMAGE_CREATE_SPLIT_INSTANCE_BIND_REGIONS_BIT bit set

- VUID-VkBindImageMemoryInfo-pNext-01628
  If the pNext chain includes a VkBindImageMemoryDeviceGroupInfo structure, all elements of VkBindImageMemoryDeviceGroupInfo::pSplitInstanceBindRegions **must** be valid rectangles contained within the dimensions of image
- VUID-VkBindImageMemoryInfo-pNext-01629
  If the pNext chain includes a VkBindImageMemoryDeviceGroupInfo structure, the union of the areas of all elements of VkBindImageMemoryDeviceGroupInfo::pSplitInstanceBindRegions that correspond to the same instance of image **must** cover the entire image

Valid Usage (Implicit)

- VUID-VkBindImageMemoryInfo-sType-sType
  sType **must** be VK_STRUCTURE_TYPE_BIND_IMAGE_MEMORY_INFO
- VUID-VkBindImageMemoryInfo-pNext-pNext
  Each pNext member of any structure (including this one) in the pNext chain **must** be either NULL or a pointer to a valid instance of VkBindImageMemoryDeviceGroupInfo or VkBindImagePlaneMemoryInfo
- VUID-VkBindImageMemoryInfo-sType-unique
  The sType value of each struct in the pNext chain **must** be unique
- VUID-VkBindImageMemoryInfo-image-parameter
  image **must** be a valid VkImage handle
- VUID-VkBindImageMemoryInfo-commonparent
  Both of image, and memory that are valid handles of non-ignored parameters **must** have been created, allocated, or retrieved from the same VkDevice

The VkBindImageMemoryDeviceGroupInfo structure is defined as:

```
// Provided by VK_VERSION_1_1
typedef struct VkBindImageMemoryDeviceGroupInfo {
    VkStructureType    sType;
    const void*        pNext;
    uint32_t           deviceIndexCount;
    const uint32_t*    pDeviceIndices;
    uint32_t           splitInstanceBindRegionCount;
    const VkRect2D*    pSplitInstanceBindRegions;
} VkBindImageMemoryDeviceGroupInfo;
```

- sType is a VkStructureType value identifying this structure.
- pNext is NULL or a pointer to a structure extending this structure.
- deviceIndexCount is the number of elements in pDeviceIndices.

- `pDeviceIndices` is a pointer to an array of device indices.
- `splitInstanceBindRegionCount` is the number of elements in `pSplitInstanceBindRegions`.
- `pSplitInstanceBindRegions` is a pointer to an array of VkRect2D structures describing which regions of the image are attached to each instance of memory.

If the `pNext` chain of VkBindImageMemoryInfo includes a `VkBindImageMemoryDeviceGroupInfo` structure, then that structure determines how memory is bound to images across multiple devices in a device group.

If `deviceIndexCount` is greater than zero, then on device index i `image` is attached to the instance of the memory on the physical device with device index `pDeviceIndices`[i].

Let N be the number of physical devices in the logical device. If `splitInstanceBindRegionCount` is greater than zero, then `pSplitInstanceBindRegions` is a pointer to an array of N^2 rectangles, where the image region specified by the rectangle at element i*N+j in resource instance i is bound to the memory instance j. The blocks of the memory that are bound to each sparse image block region use an offset in memory, relative to `memoryOffset`, computed as if the whole image was being bound to a contiguous range of memory. In other words, horizontally adjacent image blocks use consecutive blocks of memory, vertically adjacent image blocks are separated by the number of bytes per block multiplied by the width in blocks of `image`, and the block at (0,0) corresponds to memory starting at `memoryOffset`.

If `splitInstanceBindRegionCount` and `deviceIndexCount` are zero and the memory comes from a memory heap with the `VK_MEMORY_HEAP_MULTI_INSTANCE_BIT` bit set, then it is as if `pDeviceIndices` contains consecutive indices from zero to the number of physical devices in the logical device, minus one. In other words, by default each physical device attaches to its own instance of the memory.

If `splitInstanceBindRegionCount` and `deviceIndexCount` are zero and the memory comes from a memory heap without the `VK_MEMORY_HEAP_MULTI_INSTANCE_BIT` bit set, then it is as if `pDeviceIndices` contains an array of zeros. In other words, by default each physical device attaches to instance zero.

Valid Usage

- VUID-VkBindImageMemoryDeviceGroupInfo-deviceIndexCount-01633
  At least one of `deviceIndexCount` and `splitInstanceBindRegionCount` **must** be zero
- VUID-VkBindImageMemoryDeviceGroupInfo-deviceIndexCount-01634
  `deviceIndexCount` **must** either be zero or equal to the number of physical devices in the logical device
- VUID-VkBindImageMemoryDeviceGroupInfo-pDeviceIndices-01635
  All elements of `pDeviceIndices` **must** be valid device indices
- VUID-VkBindImageMemoryDeviceGroupInfo-splitInstanceBindRegionCount-01636
  `splitInstanceBindRegionCount` **must** either be zero or equal to the number of physical devices in the logical device squared
- VUID-VkBindImageMemoryDeviceGroupInfo-pSplitInstanceBindRegions-01637
  Elements of `pSplitInstanceBindRegions` that correspond to the same instance of an image

must not overlap

- VUID-VkBindImageMemoryDeviceGroupInfo-offset-01638
  The `offset.x` member of any element of `pSplitInstanceBindRegions` **must** be a multiple of the sparse image block width (`VkSparseImageFormatProperties`::`imageGranularity.width`) of all non-metadata aspects of the image
- VUID-VkBindImageMemoryDeviceGroupInfo-offset-01639
  The `offset.y` member of any element of `pSplitInstanceBindRegions` **must** be a multiple of the sparse image block height (`VkSparseImageFormatProperties`::`imageGranularity.height`) of all non-metadata aspects of the image
- VUID-VkBindImageMemoryDeviceGroupInfo-extent-01640
  The `extent.width` member of any element of `pSplitInstanceBindRegions` **must** either be a multiple of the sparse image block width of all non-metadata aspects of the image, or else `extent.width` + `offset.x` **must** equal the width of the image subresource
- VUID-VkBindImageMemoryDeviceGroupInfo-extent-01641
  The `extent.height` member of any element of `pSplitInstanceBindRegions` **must** either be a multiple of the sparse image block height of all non-metadata aspects of the image, or else `extent.height` + `offset.y` **must** equal the height of the image subresource

Valid Usage (Implicit)

- VUID-VkBindImageMemoryDeviceGroupInfo-sType-sType
  `sType` **must** be `VK_STRUCTURE_TYPE_BIND_IMAGE_MEMORY_DEVICE_GROUP_INFO`
- VUID-VkBindImageMemoryDeviceGroupInfo-pDeviceIndices-parameter
  If `deviceIndexCount` is not `0`, `pDeviceIndices` **must** be a valid pointer to an array of `deviceIndexCount` `uint32_t` values
- VUID-VkBindImageMemoryDeviceGroupInfo-pSplitInstanceBindRegions-parameter
  If `splitInstanceBindRegionCount` is not `0`, `pSplitInstanceBindRegions` **must** be a valid pointer to an array of `splitInstanceBindRegionCount` VkRect2D structures

In order to bind *planes* of a *disjoint image*, add a `VkBindImagePlaneMemoryInfo` structure to the `pNext` chain of VkBindImageMemoryInfo.

The `VkBindImagePlaneMemoryInfo` structure is defined as:

```
// Provided by VK_VERSION_1_1
typedef struct VkBindImagePlaneMemoryInfo {
    VkStructureType          sType;
    const void*              pNext;
    VkImageAspectFlagBits    planeAspect;
} VkBindImagePlaneMemoryInfo;
```

- `sType` is a VkStructureType value identifying this structure.
- `pNext` is `NULL` or a pointer to a structure extending this structure.

- `planeAspect` is a `VkImageAspectFlagBits` value specifying the aspect of the disjoint image plane to bind.

Valid Usage

- VUID-VkBindImagePlaneMemoryInfo-planeAspect-02283
  If the image's `tiling` is `VK_IMAGE_TILING_LINEAR` or `VK_IMAGE_TILING_OPTIMAL`, then `planeAspect` **must** be a single valid multi-planar aspect mask bit

Valid Usage (Implicit)

- VUID-VkBindImagePlaneMemoryInfo-sType-sType
  `sType` **must** be `VK_STRUCTURE_TYPE_BIND_IMAGE_PLANE_MEMORY_INFO`
- VUID-VkBindImagePlaneMemoryInfo-planeAspect-parameter
  `planeAspect` **must** be a valid VkImageAspectFlagBits value

Buffer-Image Granularity

The implementation-dependent limit `bufferImageGranularity` specifies a page-like granularity at which linear and non-linear resources **must** be placed in adjacent memory locations to avoid aliasing. Two resources which do not satisfy this granularity requirement are said to alias. `bufferImageGranularity` is specified in bytes, and **must** be a power of two. Implementations which do not impose a granularity restriction **may** report a `bufferImageGranularity` value of one.

> **NOTE** Despite its name, `bufferImageGranularity` is really a granularity between "linear" and "non-linear" resources.

Given resourceA at the lower memory offset and resourceB at the higher memory offset in the same `VkDeviceMemory` object, where one resource is linear and the other is non-linear (as defined in the Glossary), and the following:

```
resourceA.end       = resourceA.memoryOffset + resourceA.size - 1
resourceA.endPage   = resourceA.end & ~(bufferImageGranularity-1)
resourceB.start     = resourceB.memoryOffset
resourceB.startPage = resourceB.start & ~(bufferImageGranularity-1)
```

The following property **must** hold:

```
resourceA.endPage < resourceB.startPage
```

That is, the end of the first resource (A) and the beginning of the second resource (B) **must** be on separate "pages" of size `bufferImageGranularity`. `bufferImageGranularity` **may** be different than the physical page size of the memory heap. This restriction is only needed when a linear resource and a non-linear resource are adjacent in memory and will be used simultaneously. The memory ranges of adjacent resources **can** be closer than `bufferImageGranularity`, provided they meet the `alignment`

requirement for the objects in question.

Sparse block size in bytes and sparse image and buffer memory alignments **must** all be multiples of the `bufferImageGranularity`. Therefore, memory bound to sparse resources naturally satisfies the `bufferImageGranularity`.

12.7. Resource Sharing Mode

Buffer and image objects are created with a *sharing mode* controlling how they **can** be accessed from queues. The supported sharing modes are:

```
// Provided by VK_VERSION_1_0
typedef enum VkSharingMode {
    VK_SHARING_MODE_EXCLUSIVE = 0,
    VK_SHARING_MODE_CONCURRENT = 1,
} VkSharingMode;
```

- `VK_SHARING_MODE_EXCLUSIVE` specifies that access to any range or image subresource of the object will be exclusive to a single queue family at a time.
- `VK_SHARING_MODE_CONCURRENT` specifies that concurrent access to any range or image subresource of the object from multiple queue families is supported.

NOTE	`VK_SHARING_MODE_CONCURRENT` **may** result in lower performance access to the buffer or image than `VK_SHARING_MODE_EXCLUSIVE`.

Ranges of buffers and image subresources of image objects created using `VK_SHARING_MODE_EXCLUSIVE` **must** only be accessed by queues in the queue family that has *ownership* of the resource. Upon creation, such resources are not owned by any queue family; ownership is implicitly acquired upon first use within a queue. Once a resource using `VK_SHARING_MODE_EXCLUSIVE` is owned by some queue family, the application **must** perform a queue family ownership transfer to make the memory contents of a range or image subresource accessible to a different queue family.

NOTE	Images still require a layout transition from `VK_IMAGE_LAYOUT_UNDEFINED` or `VK_IMAGE_LAYOUT_PREINITIALIZED` before being used on the first queue.

A queue family **can** take ownership of an image subresource or buffer range of a resource created with `VK_SHARING_MODE_EXCLUSIVE`, without an ownership transfer, in the same way as for a resource that was just created; however, taking ownership in this way has the effect that the contents of the image subresource or buffer range are undefined.

Ranges of buffers and image subresources of image objects created using `VK_SHARING_MODE_CONCURRENT` **must** only be accessed by queues from the queue families specified through the `queueFamilyIndexCount` and `pQueueFamilyIndices` members of the corresponding create info structures.

12.7.1. External Resource Sharing

Resources **should** only be accessed in the Vulkan instance that has exclusive ownership of their underlying memory. Only one Vulkan instance has exclusive ownership of a resource's underlying memory at a given time, regardless of whether the resource was created using `VK_SHARING_MODE_EXCLUSIVE` or `VK_SHARING_MODE_CONCURRENT`. Applications can transfer ownership of a resource's underlying memory only if the memory has been imported from or exported to another instance or external API using external memory handles. The semantics for transferring ownership outside of the instance are similar to those used for transferring ownership of `VK_SHARING_MODE_EXCLUSIVE` resources between queues, and is also accomplished using VkBufferMemoryBarrier or VkImageMemoryBarrier operations. To make the contents of the underlying memory accessible in the destination instance or API, applications **must**

1. Release exclusive ownership from the source instance or API.
2. Ensure the release operation has completed using semaphores or fences.
3. Acquire exclusive ownership in the destination instance or API

Unlike queue family ownership transfers, the destination instance or API is not specified explicitly when releasing ownership, nor is the source instance or API specified when acquiring ownership. Instead, the image or memory barrier's `dstQueueFamilyIndex` or `srcQueueFamilyIndex` parameters are set to the reserved queue family index `VK_QUEUE_FAMILY_EXTERNAL` to represent the external destination or source respectively.

Binding a resource to a memory object shared between multiple Vulkan instances or other APIs does not change the ownership of the underlying memory. The first entity to access the resource implicitly acquires ownership. An entity **can** also implicitly take ownership from another entity in the same way without an explicit ownership transfer. However, taking ownership in this way has the effect that the contents of the underlying memory are undefined.

Accessing a resource backed by memory that is owned by a particular instance or API has the same semantics as accessing a `VK_SHARING_MODE_EXCLUSIVE` resource, with one exception: Implementations **must** ensure layout transitions performed on one member of a set of identical subresources of identical images that alias the same range of an underlying memory object affect the layout of all the subresources in the set.

As a corollary, writes to any image subresources in such a set **must** not make the contents of memory used by other subresources in the set undefined. An application **can** define the content of a subresource of one image by performing device writes to an identical subresource of another image provided both images are bound to the same region of external memory. Applications **may** also add resources to such a set after the content of the existing set members has been defined without making the content undefined by creating a new image with the initial layout `VK_IMAGE_LAYOUT_UNDEFINED` and binding it to the same region of external memory as the existing images.

NOTE

Because layout transitions apply to all identical images aliasing the same region of external memory, the actual layout of the memory backing a new image as well as an existing image with defined content will not be undefined. Such an image is not usable until it acquires ownership of its memory from the existing owner.

> Therefore, the layout specified as part of this transition will be the true initial layout of the image. The undefined layout specified when creating it is a placeholder to simplify valid usage requirements.

12.8. Memory Aliasing

A range of a VkDeviceMemory allocation is *aliased* if it is bound to multiple resources simultaneously, as described below, via vkBindImageMemory, vkBindBufferMemory, via sparse memory bindings, or by binding the memory to resources in multiple Vulkan instances or external APIs using external memory handle export and import mechanisms.

Consider two resources, resource_A and resource_B, bound respectively to memory range_A and range_B. Let paddedRange_A and paddedRange_B be, respectively, range_A and range_B aligned to bufferImageGranularity. If the resources are both linear or both non-linear (as defined in the Glossary), then the resources *alias* the memory in the intersection of range_A and range_B. If one resource is linear and the other is non-linear, then the resources *alias* the memory in the intersection of paddedRange_A and paddedRange_B.

Applications **can** alias memory, but use of multiple aliases is subject to several constraints.

> **NOTE** Memory aliasing **can** be useful to reduce the total device memory footprint of an application, if some large resources are used for disjoint periods of time.

When a non-linear, non-VK_IMAGE_CREATE_SPARSE_RESIDENCY_BIT image is bound to an aliased range, all image subresources of the image *overlap* the range. When a linear image is bound to an aliased range, the image subresources that (according to the image's advertised layout) include bytes from the aliased range overlap the range. When a VK_IMAGE_CREATE_SPARSE_RESIDENCY_BIT image has sparse image blocks bound to an aliased range, only image subresources including those sparse image blocks overlap the range, and when the memory bound to the image's mip tail overlaps an aliased range all image subresources in the mip tail overlap the range.

Buffers, and linear image subresources in either the VK_IMAGE_LAYOUT_PREINITIALIZED or VK_IMAGE_LAYOUT_GENERAL layouts, are *host-accessible subresources*. That is, the host has a well-defined addressing scheme to interpret the contents, and thus the layout of the data in memory **can** be consistently interpreted across aliases if each of those aliases is a host-accessible subresource. Non-linear images, and linear image subresources in other layouts, are not host-accessible.

If two aliases are both host-accessible, then they interpret the contents of the memory in consistent ways, and data written to one alias **can** be read by the other alias.

If two aliases are both images that were created with identical creation parameters, both were created with the VK_IMAGE_CREATE_ALIAS_BIT flag set, and both are bound identically to memory except for VkBindImageMemoryDeviceGroupInfo::pDeviceIndices and VkBindImageMemoryDeviceGroupInfo::pSplitInstanceBindRegions, then they interpret the contents of the memory in consistent ways, and data written to one alias **can** be read by the other alias.

Additionally, if an individual plane of a multi-planar image and a single-plane image alias the same memory, then they also interpret the contents of the memory in consistent ways under the same

conditions, but with the following modifications:

- Both **must** have been created with the VK_IMAGE_CREATE_DISJOINT_BIT flag.
- The single-plane image **must** have a VkFormat that is equivalent to that of the multi-planar image's individual plane.
- The single-plane image and the individual plane of the multi-planar image **must** be bound identically to memory except for VkBindImageMemoryDeviceGroupInfo::pDeviceIndices and VkBindImageMemoryDeviceGroupInfo::pSplitInstanceBindRegions.
- The width and height of the single-plane image are derived from the multi-planar image's dimensions in the manner listed for plane compatibility for the aliased plane.
- All other creation parameters **must** be identical

Aliases created by binding the same memory to resources in multiple Vulkan instances or external APIs using external memory handle export and import mechanisms interpret the contents of the memory in consistent ways, and data written to one alias **can** be read by the other alias.

Otherwise, the aliases interpret the contents of the memory differently, and writes via one alias make the contents of memory partially or completely undefined to the other alias. If the first alias is a host-accessible subresource, then the bytes affected are those written by the memory operations according to its addressing scheme. If the first alias is not host-accessible, then the bytes affected are those overlapped by the image subresources that were written. If the second alias is a host-accessible subresource, the affected bytes become undefined. If the second alias is not host-accessible, all sparse image blocks (for sparse partially-resident images) or all image subresources (for non-sparse image and fully resident sparse images) that overlap the affected bytes become undefined.

If any image subresources are made undefined due to writes to an alias, then each of those image subresources **must** have its layout transitioned from VK_IMAGE_LAYOUT_UNDEFINED to a valid layout before it is used, or from VK_IMAGE_LAYOUT_PREINITIALIZED if the memory has been written by the host. If any sparse blocks of a sparse image have been made undefined, then only the image subresources containing them **must** be transitioned.

Use of an overlapping range by two aliases **must** be separated by a memory dependency using the appropriate access types if at least one of those uses performs writes, whether the aliases interpret memory consistently or not. If buffer or image memory barriers are used, the scope of the barrier **must** contain the entire range and/or set of image subresources that overlap.

If two aliasing image views are used in the same framebuffer, then the render pass **must** declare the attachments using the VK_ATTACHMENT_DESCRIPTION_MAY_ALIAS_BIT, and follow the other rules listed in that section.

NOTE	Memory recycled via an application suballocator (i.e. without freeing and reallocating the memory objects) is not substantially different from memory aliasing. However, a suballocator usually waits on a fence before recycling a region of memory, and signaling a fence involves sufficient implicit dependencies to satisfy all the above requirements.

12.8.1. Resource Memory Overlap

Applications **can** safely access resources concurrently via separate device and host operations as long as the accessed memory locations are guaranteed to not overlap, as defined in Memory Location, and the operation, resource, and access are otherwise independently valid.

Some operations have alignment requirements or access ambiguous memory locations, so the semantics of a particular operation **should** be considered when determining the overlap. Such requirements will be described alongside the operation. Operations between host and device when using non-coherent memory are aligned to `nonCoherentAtomSize`, as defined by vkFlushMappedMemoryRanges and vkInvalidateMappedMemoryRanges.

NOTE	The intent is that buffers (or linear images) can be accessed concurrently, even when they share cache lines, but otherwise do not access the same memory range. The concept of a device cache line size is not exposed in the memory model.

Chapter 13. Samplers

VkSampler objects represent the state of an image sampler which is used by the implementation to read image data and apply filtering and other transformations for the shader.

Samplers are represented by VkSampler handles:

```
// Provided by VK_VERSION_1_0
VK_DEFINE_NON_DISPATCHABLE_HANDLE(VkSampler)
```

To create a sampler object, call:

```
// Provided by VK_VERSION_1_0
VkResult vkCreateSampler(
    VkDevice                                    device,
    const VkSamplerCreateInfo*                  pCreateInfo,
    const VkAllocationCallbacks*                pAllocator,
    VkSampler*                                  pSampler);
```

- device is the logical device that creates the sampler.
- pCreateInfo is a pointer to a VkSamplerCreateInfo structure specifying the state of the sampler object.
- pAllocator controls host memory allocation as described in the Memory Allocation chapter.
- pSampler is a pointer to a VkSampler handle in which the resulting sampler object is returned.

Valid Usage

- VUID-vkCreateSampler-device-09668
  device **must** support at least one queue family with one of the VK_QUEUE_COMPUTE_BIT or VK_QUEUE_GRAPHICS_BIT capabilities
- VUID-vkCreateSampler-maxSamplerAllocationCount-04110
  There **must** be less than VkPhysicalDeviceLimits::maxSamplerAllocationCount VkSampler objects currently created on the device

Valid Usage (Implicit)

- VUID-vkCreateSampler-device-parameter
  device **must** be a valid VkDevice handle
- VUID-vkCreateSampler-pCreateInfo-parameter
  pCreateInfo **must** be a valid pointer to a valid VkSamplerCreateInfo structure
- VUID-vkCreateSampler-pAllocator-parameter
  If pAllocator is not NULL, pAllocator **must** be a valid pointer to a valid

VkAllocationCallbacks structure

- VUID-vkCreateSampler-pSampler-parameter
  `pSampler` **must** be a valid pointer to a VkSampler handle

Return Codes

Success

- `VK_SUCCESS`

Failure

- `VK_ERROR_OUT_OF_HOST_MEMORY`
- `VK_ERROR_OUT_OF_DEVICE_MEMORY`

The `VkSamplerCreateInfo` structure is defined as:

```
// Provided by VK_VERSION_1_0
typedef struct VkSamplerCreateInfo {
    VkStructureType         sType;
    const void*             pNext;
    VkSamplerCreateFlags    flags;
    VkFilter                magFilter;
    VkFilter                minFilter;
    VkSamplerMipmapMode     mipmapMode;
    VkSamplerAddressMode    addressModeU;
    VkSamplerAddressMode    addressModeV;
    VkSamplerAddressMode    addressModeW;
    float                   mipLodBias;
    VkBool32                anisotropyEnable;
    float                   maxAnisotropy;
    VkBool32                compareEnable;
    VkCompareOp             compareOp;
    float                   minLod;
    float                   maxLod;
    VkBorderColor           borderColor;
    VkBool32                unnormalizedCoordinates;
} VkSamplerCreateInfo;
```

- `sType` is a VkStructureType value identifying this structure.
- `pNext` is `NULL` or a pointer to a structure extending this structure.
- `flags` is a bitmask of VkSamplerCreateFlagBits describing additional parameters of the sampler.
- `magFilter` is a VkFilter value specifying the magnification filter to apply to lookups.
- `minFilter` is a VkFilter value specifying the minification filter to apply to lookups.
- `mipmapMode` is a VkSamplerMipmapMode value specifying the mipmap filter to apply to lookups.
- `addressModeU` is a VkSamplerAddressMode value specifying the addressing mode for U

coordinates outside [0,1).

- `addressModeV` is a VkSamplerAddressMode value specifying the addressing mode for V coordinates outside [0,1).
- `addressModeW` is a VkSamplerAddressMode value specifying the addressing mode for W coordinates outside [0,1).
- `mipLodBias` is the bias to be added to mipmap LOD calculation and bias provided by image sampling functions in SPIR-V, as described in the LOD Operation section.
- `anisotropyEnable` is `VK_TRUE` to enable anisotropic filtering, as described in the Texel Anisotropic Filtering section, or `VK_FALSE` otherwise.
- `maxAnisotropy` is the anisotropy value clamp used by the sampler when `anisotropyEnable` is `VK_TRUE`. If `anisotropyEnable` is `VK_FALSE`, `maxAnisotropy` is ignored.
- `compareEnable` is `VK_TRUE` to enable comparison against a reference value during lookups, or `VK_FALSE` otherwise.
  - Note: Some implementations will default to shader state if this member does not match.
- `compareOp` is a VkCompareOp value specifying the comparison operator to apply to fetched data before filtering as described in the Depth Compare Operation section.
- `minLod` is used to clamp the minimum of the computed LOD value.
- `maxLod` is used to clamp the maximum of the computed LOD value. To avoid clamping the maximum value, set `maxLod` to the constant `VK_LOD_CLAMP_NONE`.
- `borderColor` is a VkBorderColor value specifying the predefined border color to use.
- `unnormalizedCoordinates` controls whether to use unnormalized or normalized texel coordinates to address texels of the image. When `unnormalizedCoordinates` is `VK_TRUE`, the range of the image coordinates used to lookup the texel is in the range of zero to the image size in each dimension. When `unnormalizedCoordinates` is `VK_FALSE`, the range of image coordinates is zero to one.

  When `unnormalizedCoordinates` is `VK_TRUE`, images the sampler is used with in the shader have the following requirements:

  - The `viewType` **must** be either `VK_IMAGE_VIEW_TYPE_1D` or `VK_IMAGE_VIEW_TYPE_2D`.
  - The image view **must** have a single layer and a single mip level.

  When `unnormalizedCoordinates` is `VK_TRUE`, image built-in functions in the shader that use the sampler have the following requirements:

  - The functions **must** not use projection.
  - The functions **must** not use offsets.

NOTE

Mapping of OpenGL to Vulkan Filter Modes

`magFilter` values of `VK_FILTER_NEAREST` and `VK_FILTER_LINEAR` directly correspond to `GL_NEAREST` and `GL_LINEAR` magnification filters. `minFilter` and `mipmapMode` combine to correspond to the similarly named OpenGL minification filter of `GL_minFilter_MIPMAP_mipmapMode` (e.g. `minFilter` of `VK_FILTER_LINEAR` and `mipmapMode` of `VK_SAMPLER_MIPMAP_MODE_NEAREST` correspond to `GL_LINEAR_MIPMAP_NEAREST`).

There are no Vulkan filter modes that directly correspond to OpenGL minification filters of `GL_LINEAR` or `GL_NEAREST`, but they **can** be emulated using `VK_SAMPLER_MIPMAP_MODE_NEAREST`, `minLod` = 0, and `maxLod` = 0.25, and using `minFilter` = `VK_FILTER_LINEAR` or `minFilter` = `VK_FILTER_NEAREST`, respectively.

Note that using a `maxLod` of zero would cause magnification to always be performed, and the `magFilter` to always be used. This is valid, just not an exact match for OpenGL behavior. Clamping the maximum LOD to 0.25 allows the λ value to be non-zero and minification to be performed, while still always rounding down to the base level. If the `minFilter` and `magFilter` are equal, then using a `maxLod` of zero also works.

The maximum number of sampler objects which **can** be simultaneously created on a device is implementation-dependent and specified by the `maxSamplerAllocationCount` member of the VkPhysicalDeviceLimits structure.

NOTE

For historical reasons, if `maxSamplerAllocationCount` is exceeded, some implementations may return `VK_ERROR_TOO_MANY_OBJECTS`. Exceeding this limit will result in undefined behavior, and an application should not rely on the use of the returned error code in order to identify when the limit is reached.

Since VkSampler is a non-dispatchable handle type, implementations **may** return the same handle for sampler state vectors that are identical. In such cases, all such objects would only count once against the `maxSamplerAllocationCount` limit.

Valid Usage

- VUID-VkSamplerCreateInfo-mipLodBias-01069
  The absolute value of `mipLodBias` **must** be less than or equal to `VkPhysicalDeviceLimits::maxSamplerLodBias`
- VUID-VkSamplerCreateInfo-maxLod-01973
  `maxLod` **must** be greater than or equal to `minLod`
- VUID-VkSamplerCreateInfo-anisotropyEnable-01070
  If the `samplerAnisotropy` feature is not enabled, `anisotropyEnable` **must** be `VK_FALSE`
- VUID-VkSamplerCreateInfo-anisotropyEnable-01071
  If `anisotropyEnable` is `VK_TRUE`, `maxAnisotropy` **must** be between `1.0` and `VkPhysicalDeviceLimits::maxSamplerAnisotropy`, inclusive
- VUID-VkSamplerCreateInfo-minFilter-01645
  If sampler $Y'C_BC_R$ conversion is enabled and the potential format features of the sampler $Y'C_BC_R$ conversion do not support `VK_FORMAT_FEATURE_SAMPLED_IMAGE_YCBCR_CONVERSION_SEPARATE_RECONSTRUCTION_FILTER_BIT`, `minFilter` and `magFilter` **must** be equal to the sampler $Y'C_BC_R$ conversion's `chromaFilter`
- VUID-VkSamplerCreateInfo-unnormalizedCoordinates-01072
  If `unnormalizedCoordinates` is `VK_TRUE`, `minFilter` and `magFilter` **must** be equal
- VUID-VkSamplerCreateInfo-unnormalizedCoordinates-01073

If unnormalizedCoordinates is VK_TRUE, mipmapMode **must** be VK_SAMPLER_MIPMAP_MODE_NEAREST

- VUID-VkSamplerCreateInfo-unnormalizedCoordinates-01074
  If unnormalizedCoordinates is VK_TRUE, minLod and maxLod **must** be zero
- VUID-VkSamplerCreateInfo-unnormalizedCoordinates-01075
  If unnormalizedCoordinates is VK_TRUE, addressModeU and addressModeV **must** each be either VK_SAMPLER_ADDRESS_MODE_CLAMP_TO_EDGE or VK_SAMPLER_ADDRESS_MODE_CLAMP_TO_BORDER
- VUID-VkSamplerCreateInfo-unnormalizedCoordinates-01076
  If unnormalizedCoordinates is VK_TRUE, anisotropyEnable **must** be VK_FALSE
- VUID-VkSamplerCreateInfo-unnormalizedCoordinates-01077
  If unnormalizedCoordinates is VK_TRUE, compareEnable **must** be VK_FALSE
- VUID-VkSamplerCreateInfo-addressModeU-01078
  If any of addressModeU, addressModeV or addressModeW are VK_SAMPLER_ADDRESS_MODE_CLAMP_TO_BORDER, borderColor **must** be a valid VkBorderColor value
- VUID-VkSamplerCreateInfo-addressModeU-01646
  If sampler $Y'C_BC_R$ conversion is enabled, addressModeU, addressModeV, and addressModeW **must** be VK_SAMPLER_ADDRESS_MODE_CLAMP_TO_EDGE, anisotropyEnable **must** be VK_FALSE, and unnormalizedCoordinates **must** be VK_FALSE
- VUID-VkSamplerCreateInfo-None-01647
  If sampler $Y'C_BC_R$ conversion is enabled and the pNext chain includes a VkSamplerReductionModeCreateInfo structure, then the sampler reduction mode **must** be VK_SAMPLER_REDUCTION_MODE_WEIGHTED_AVERAGE
- VUID-VkSamplerCreateInfo-pNext-06726
  If samplerFilterMinmax is not enabled and the pNext chain includes a VkSamplerReductionModeCreateInfo structure, then the sampler reduction mode **must** be VK_SAMPLER_REDUCTION_MODE_WEIGHTED_AVERAGE
- VUID-VkSamplerCreateInfo-addressModeU-01079
  If samplerMirrorClampToEdge is not enabled, and if the VK_KHR_sampler_mirror_clamp_to_edge extension is not enabled, addressModeU, addressModeV and addressModeW **must** not be VK_SAMPLER_ADDRESS_MODE_MIRROR_CLAMP_TO_EDGE
- VUID-VkSamplerCreateInfo-compareEnable-01080
  If compareEnable is VK_TRUE, compareOp **must** be a valid VkCompareOp value
- VUID-VkSamplerCreateInfo-compareEnable-01423
  If compareEnable is VK_TRUE, the reductionMode member of VkSamplerReductionModeCreateInfo **must** be VK_SAMPLER_REDUCTION_MODE_WEIGHTED_AVERAGE

Valid Usage (Implicit)

- VUID-VkSamplerCreateInfo-sType-sType
  sType **must** be VK_STRUCTURE_TYPE_SAMPLER_CREATE_INFO
- VUID-VkSamplerCreateInfo-pNext-pNext

Each pNext member of any structure (including this one) in the pNext chain **must** be either NULL or a pointer to a valid instance of VkSamplerReductionModeCreateInfo or VkSamplerYcbcrConversionInfo

- VUID-VkSamplerCreateInfo-sType-unique
  The sType value of each struct in the pNext chain **must** be unique
- VUID-VkSamplerCreateInfo-flags-zerobitmask
  flags **must** be 0
- VUID-VkSamplerCreateInfo-magFilter-parameter
  magFilter **must** be a valid VkFilter value
- VUID-VkSamplerCreateInfo-minFilter-parameter
  minFilter **must** be a valid VkFilter value
- VUID-VkSamplerCreateInfo-mipmapMode-parameter
  mipmapMode **must** be a valid VkSamplerMipmapMode value
- VUID-VkSamplerCreateInfo-addressModeU-parameter
  addressModeU **must** be a valid VkSamplerAddressMode value
- VUID-VkSamplerCreateInfo-addressModeV-parameter
  addressModeV **must** be a valid VkSamplerAddressMode value
- VUID-VkSamplerCreateInfo-addressModeW-parameter
  addressModeW **must** be a valid VkSamplerAddressMode value

VK_LOD_CLAMP_NONE is a special constant value used for VkSamplerCreateInfo::maxLod to indicate that maximum LOD clamping should not be performed.

```
#define VK_LOD_CLAMP_NONE                 1000.0F
```

Bits which **can** be set in VkSamplerCreateInfo::flags, specifying additional parameters of a sampler, are:

```
// Provided by VK_VERSION_1_0
typedef enum VkSamplerCreateFlagBits {
} VkSamplerCreateFlagBits;
```

```
// Provided by VK_VERSION_1_0
typedef VkFlags VkSamplerCreateFlags;
```

VkSamplerCreateFlags is a bitmask type for setting a mask of zero or more VkSamplerCreateFlagBits.

The VkSamplerReductionModeCreateInfo structure is defined as:

```
// Provided by VK_VERSION_1_2
typedef struct VkSamplerReductionModeCreateInfo {
    VkStructureType           sType;
    const void*               pNext;
    VkSamplerReductionMode    reductionMode;
} VkSamplerReductionModeCreateInfo;
```

- `sType` is a VkStructureType value identifying this structure.
- `pNext` is `NULL` or a pointer to a structure extending this structure.
- `reductionMode` is a VkSamplerReductionMode value controlling how texture filtering combines texel values.

If the `pNext` chain of VkSamplerCreateInfo includes a `VkSamplerReductionModeCreateInfo` structure, then that structure includes a mode controlling how texture filtering combines texel values.

If this structure is not present, `reductionMode` is considered to be `VK_SAMPLER_REDUCTION_MODE_WEIGHTED_AVERAGE`.

Valid Usage (Implicit)

- VUID-VkSamplerReductionModeCreateInfo-sType-sType
  `sType` **must** be `VK_STRUCTURE_TYPE_SAMPLER_REDUCTION_MODE_CREATE_INFO`
- VUID-VkSamplerReductionModeCreateInfo-reductionMode-parameter
  `reductionMode` **must** be a valid VkSamplerReductionMode value

Reduction modes are specified by VkSamplerReductionMode, which takes values:

```
// Provided by VK_VERSION_1_2
typedef enum VkSamplerReductionMode {
    VK_SAMPLER_REDUCTION_MODE_WEIGHTED_AVERAGE = 0,
    VK_SAMPLER_REDUCTION_MODE_MIN = 1,
    VK_SAMPLER_REDUCTION_MODE_MAX = 2,
} VkSamplerReductionMode;
```

- `VK_SAMPLER_REDUCTION_MODE_WEIGHTED_AVERAGE` specifies that texel values are combined by computing a weighted average of values in the footprint, using weights as specified in the image operations chapter.
- `VK_SAMPLER_REDUCTION_MODE_MIN` specifies that texel values are combined by taking the component-wise minimum of values in the footprint with non-zero weights.
- `VK_SAMPLER_REDUCTION_MODE_MAX` specifies that texel values are combined by taking the component-wise maximum of values in the footprint with non-zero weights.

Possible values of the VkSamplerCreateInfo::`magFilter` and `minFilter` parameters, specifying filters used for texture lookups, are:

```
// Provided by VK_VERSION_1_0
typedef enum VkFilter {
    VK_FILTER_NEAREST = 0,
    VK_FILTER_LINEAR = 1,
} VkFilter;
```

- VK_FILTER_NEAREST specifies nearest filtering.
- VK_FILTER_LINEAR specifies linear filtering.

These filters are described in detail in Texel Filtering.

Possible values of the VkSamplerCreateInfo::mipmapMode, specifying the mipmap mode used for texture lookups, are:

```
// Provided by VK_VERSION_1_0
typedef enum VkSamplerMipmapMode {
    VK_SAMPLER_MIPMAP_MODE_NEAREST = 0,
    VK_SAMPLER_MIPMAP_MODE_LINEAR = 1,
} VkSamplerMipmapMode;
```

- VK_SAMPLER_MIPMAP_MODE_NEAREST specifies nearest filtering.
- VK_SAMPLER_MIPMAP_MODE_LINEAR specifies linear filtering.

These modes are described in detail in Texel Filtering.

Possible values of the VkSamplerCreateInfo::addressMode* parameters, specifying the behavior of sampling with coordinates outside the range [0,1] for the respective u, v, or w coordinate as defined in the Wrapping Operation section, are:

```
// Provided by VK_VERSION_1_0
typedef enum VkSamplerAddressMode {
    VK_SAMPLER_ADDRESS_MODE_REPEAT = 0,
    VK_SAMPLER_ADDRESS_MODE_MIRRORED_REPEAT = 1,
    VK_SAMPLER_ADDRESS_MODE_CLAMP_TO_EDGE = 2,
    VK_SAMPLER_ADDRESS_MODE_CLAMP_TO_BORDER = 3,
  // Provided by VK_VERSION_1_2
    VK_SAMPLER_ADDRESS_MODE_MIRROR_CLAMP_TO_EDGE = 4,
} VkSamplerAddressMode;
```

- VK_SAMPLER_ADDRESS_MODE_REPEAT specifies that the repeat wrap mode will be used.
- VK_SAMPLER_ADDRESS_MODE_MIRRORED_REPEAT specifies that the mirrored repeat wrap mode will be used.
- VK_SAMPLER_ADDRESS_MODE_CLAMP_TO_EDGE specifies that the clamp to edge wrap mode will be used.
- VK_SAMPLER_ADDRESS_MODE_CLAMP_TO_BORDER specifies that the clamp to border wrap mode will be used.

- VK_SAMPLER_ADDRESS_MODE_MIRROR_CLAMP_TO_EDGE specifies that the mirror clamp to edge wrap mode will be used. This is only valid if samplerMirrorClampToEdge is enabled, or if the VK_KHR_sampler_mirror_clamp_to_edge extension is enabled.

Comparison operators compare a *reference* and a *test* value, and return a true ("passed") or false ("failed") value depending on the comparison operator chosen. The supported operators are:

```
// Provided by VK_VERSION_1_0
typedef enum VkCompareOp {
    VK_COMPARE_OP_NEVER = 0,
    VK_COMPARE_OP_LESS = 1,
    VK_COMPARE_OP_EQUAL = 2,
    VK_COMPARE_OP_LESS_OR_EQUAL = 3,
    VK_COMPARE_OP_GREATER = 4,
    VK_COMPARE_OP_NOT_EQUAL = 5,
    VK_COMPARE_OP_GREATER_OR_EQUAL = 6,
    VK_COMPARE_OP_ALWAYS = 7,
} VkCompareOp;
```

- VK_COMPARE_OP_NEVER specifies that the comparison always evaluates false.
- VK_COMPARE_OP_LESS specifies that the comparison evaluates *reference* < *test*.
- VK_COMPARE_OP_EQUAL specifies that the comparison evaluates *reference* = *test*.
- VK_COMPARE_OP_LESS_OR_EQUAL specifies that the comparison evaluates *reference* ≤ *test*.
- VK_COMPARE_OP_GREATER specifies that the comparison evaluates *reference* > *test*.
- VK_COMPARE_OP_NOT_EQUAL specifies that the comparison evaluates *reference* ≠ *test*.
- VK_COMPARE_OP_GREATER_OR_EQUAL specifies that the comparison evaluates *reference* ≥ *test*.
- VK_COMPARE_OP_ALWAYS specifies that the comparison always evaluates true.

Comparison operators are used for:

- The Depth Compare Operation operator for a sampler, specified by VkSamplerCreateInfo::compareOp.
- The stencil comparison operator for the stencil test, specified by vkCmdSetStencilOp::compareOp or VkStencilOpState::compareOp.
- The Depth Comparison operator for the depth test, specified by vkCmdSetDepthCompareOp::depthCompareOp or VkPipelineDepthStencilStateCreateInfo::depthCompareOp.

Each such use describes how the *reference* and *test* values for that comparison are determined.

Possible values of VkSamplerCreateInfo::borderColor, specifying the border color used for texture lookups, are:

```
// Provided by VK_VERSION_1_0
typedef enum VkBorderColor {
    VK_BORDER_COLOR_FLOAT_TRANSPARENT_BLACK = 0,
    VK_BORDER_COLOR_INT_TRANSPARENT_BLACK = 1,
    VK_BORDER_COLOR_FLOAT_OPAQUE_BLACK = 2,
    VK_BORDER_COLOR_INT_OPAQUE_BLACK = 3,
    VK_BORDER_COLOR_FLOAT_OPAQUE_WHITE = 4,
    VK_BORDER_COLOR_INT_OPAQUE_WHITE = 5,
} VkBorderColor;
```

- `VK_BORDER_COLOR_FLOAT_TRANSPARENT_BLACK` specifies a transparent, floating-point format, black color.
- `VK_BORDER_COLOR_INT_TRANSPARENT_BLACK` specifies a transparent, integer format, black color.
- `VK_BORDER_COLOR_FLOAT_OPAQUE_BLACK` specifies an opaque, floating-point format, black color.
- `VK_BORDER_COLOR_INT_OPAQUE_BLACK` specifies an opaque, integer format, black color.
- `VK_BORDER_COLOR_FLOAT_OPAQUE_WHITE` specifies an opaque, floating-point format, white color.
- `VK_BORDER_COLOR_INT_OPAQUE_WHITE` specifies an opaque, integer format, white color.

These colors are described in detail in Texel Replacement.

To destroy a sampler, call:

```
// Provided by VK_VERSION_1_0
void vkDestroySampler(
    VkDevice                                    device,
    VkSampler                                   sampler,
    const VkAllocationCallbacks*                pAllocator);
```

- `device` is the logical device that destroys the sampler.
- `sampler` is the sampler to destroy.
- `pAllocator` controls host memory allocation as described in the Memory Allocation chapter.

Valid Usage

- VUID-vkDestroySampler-sampler-01082
  All submitted commands that refer to `sampler` **must** have completed execution
- VUID-vkDestroySampler-sampler-01083
  If `VkAllocationCallbacks` were provided when `sampler` was created, a compatible set of callbacks **must** be provided here
- VUID-vkDestroySampler-sampler-01084
  If no `VkAllocationCallbacks` were provided when `sampler` was created, `pAllocator` **must** be `NULL`

Valid Usage (Implicit)

- VUID-vkDestroySampler-device-parameter
  `device` **must** be a valid VkDevice handle
- VUID-vkDestroySampler-sampler-parameter
  If `sampler` is not VK_NULL_HANDLE, `sampler` **must** be a valid VkSampler handle
- VUID-vkDestroySampler-pAllocator-parameter
  If `pAllocator` is not `NULL`, `pAllocator` **must** be a valid pointer to a valid VkAllocationCallbacks structure
- VUID-vkDestroySampler-sampler-parent
  If `sampler` is a valid handle, it **must** have been created, allocated, or retrieved from `device`

Host Synchronization

- Host access to `sampler` **must** be externally synchronized

13.1. Sampler $Y'C_BC_R$ Conversion

To create a sampler with $Y'C_BC_R$ conversion enabled, add a VkSamplerYcbcrConversionInfo structure to the `pNext` chain of the VkSamplerCreateInfo structure. To create a sampler $Y'C_BC_R$ conversion, the `samplerYcbcrConversion` feature **must** be enabled. Conversion **must** be fixed at pipeline creation time, through use of a combined image sampler with an immutable sampler in `VkDescriptorSetLayoutBinding`.

A VkSamplerYcbcrConversionInfo **must** be provided for samplers to be used with image views that access `VK_IMAGE_ASPECT_COLOR_BIT` if the format is one of the formats that require a sampler $Y'C_BC_R$ conversion .

The `VkSamplerYcbcrConversionInfo` structure is defined as:

```
// Provided by VK_VERSION_1_1
typedef struct VkSamplerYcbcrConversionInfo {
    VkStructureType             sType;
    const void*                 pNext;
    VkSamplerYcbcrConversion    conversion;
} VkSamplerYcbcrConversionInfo;
```

- `sType` is a VkStructureType value identifying this structure.
- `pNext` is `NULL` or a pointer to a structure extending this structure.
- `conversion` is a VkSamplerYcbcrConversion handle created with vkCreateSamplerYcbcrConversion.

Valid Usage (Implicit)

- VUID-VkSamplerYcbcrConversionInfo-sType-sType
  `sType` **must** be `VK_STRUCTURE_TYPE_SAMPLER_YCBCR_CONVERSION_INFO`
- VUID-VkSamplerYcbcrConversionInfo-conversion-parameter
  `conversion` **must** be a valid VkSamplerYcbcrConversion handle

A sampler $Y'C_BC_R$ conversion is an opaque representation of a device-specific sampler $Y'C_BC_R$ conversion description, represented as a `VkSamplerYcbcrConversion` handle:

```
// Provided by VK_VERSION_1_1
VK_DEFINE_NON_DISPATCHABLE_HANDLE(VkSamplerYcbcrConversion)
```

To create a VkSamplerYcbcrConversion, call:

```
// Provided by VK_VERSION_1_1
VkResult vkCreateSamplerYcbcrConversion(
    VkDevice                                    device,
    const VkSamplerYcbcrConversionCreateInfo*   pCreateInfo,
    const VkAllocationCallbacks*                pAllocator,
    VkSamplerYcbcrConversion*                   pYcbcrConversion);
```

- `device` is the logical device that creates the sampler $Y'C_BC_R$ conversion.
- `pCreateInfo` is a pointer to a VkSamplerYcbcrConversionCreateInfo structure specifying the requested sampler $Y'C_BC_R$ conversion.
- `pAllocator` controls host memory allocation as described in the Memory Allocation chapter.
- `pYcbcrConversion` is a pointer to a VkSamplerYcbcrConversion handle in which the resulting sampler $Y'C_BC_R$ conversion is returned.

The interpretation of the configured sampler $Y'C_BC_R$ conversion is described in more detail in the description of sampler $Y'C_BC_R$ conversion in the Image Operations chapter.

Valid Usage

- VUID-vkCreateSamplerYcbcrConversion-None-01648
  The `samplerYcbcrConversion` feature **must** be enabled

Valid Usage (Implicit)

- VUID-vkCreateSamplerYcbcrConversion-device-parameter
  `device` **must** be a valid VkDevice handle
- VUID-vkCreateSamplerYcbcrConversion-pCreateInfo-parameter

pCreateInfo **must** be a valid pointer to a valid VkSamplerYcbcrConversionCreateInfo structure

- VUID-vkCreateSamplerYcbcrConversion-pAllocator-parameter
  If pAllocator is not NULL, pAllocator **must** be a valid pointer to a valid VkAllocationCallbacks structure
- VUID-vkCreateSamplerYcbcrConversion-pYcbcrConversion-parameter
  pYcbcrConversion **must** be a valid pointer to a VkSamplerYcbcrConversion handle

Return Codes

Success

- VK_SUCCESS

Failure

- VK_ERROR_OUT_OF_HOST_MEMORY
- VK_ERROR_OUT_OF_DEVICE_MEMORY

The VkSamplerYcbcrConversionCreateInfo structure is defined as:

```
// Provided by VK_VERSION_1_1
typedef struct VkSamplerYcbcrConversionCreateInfo {
    VkStructureType                 sType;
    const void*                     pNext;
    VkFormat                        format;
    VkSamplerYcbcrModelConversion   ycbcrModel;
    VkSamplerYcbcrRange             ycbcrRange;
    VkComponentMapping              components;
    VkChromaLocation                xChromaOffset;
    VkChromaLocation                yChromaOffset;
    VkFilter                        chromaFilter;
    VkBool32                        forceExplicitReconstruction;
} VkSamplerYcbcrConversionCreateInfo;
```

- sType is a VkStructureType value identifying this structure.
- pNext is NULL or a pointer to a structure extending this structure.
- format is the format of the image from which color information will be retrieved.
- ycbcrModel describes the color matrix for conversion between color models.
- ycbcrRange describes whether the encoded values have headroom and foot room, or whether the encoding uses the full numerical range.
- components applies a *swizzle* based on VkComponentSwizzle enums prior to range expansion and color model conversion.
- xChromaOffset describes the sample location associated with downsampled chroma components in the x dimension. xChromaOffset has no effect for formats in which chroma components are

not downsampled horizontally.

- `yChromaOffset` describes the sample location associated with downsampled chroma components in the y dimension. `yChromaOffset` has no effect for formats in which the chroma components are not downsampled vertically.
- `chromaFilter` is the filter for chroma reconstruction.
- `forceExplicitReconstruction` **can** be used to ensure that reconstruction is done explicitly, if supported.

NOTE

Setting `forceExplicitReconstruction` to `VK_TRUE` **may** have a performance penalty on implementations where explicit reconstruction is not the default mode of operation.

If `format` supports `VK_FORMAT_FEATURE_SAMPLED_IMAGE_YCBCR_CONVERSION_CHROMA_RECONSTRUCTION_EXPLICIT_BIT` the `forceExplicitReconstruction` value behaves as if it were `VK_TRUE`.

Sampler $Y'C_BC_R$ conversion objects do not support *external format conversion* without additional extensions defining *external formats*.

Valid Usage

- VUID-VkSamplerYcbcrConversionCreateInfo-format-04061
  `format` **must** represent unsigned normalized values (i.e. the format **must** be a `UNORM` format)
- VUID-VkSamplerYcbcrConversionCreateInfo-format-01650
  The potential format features of the sampler $Y'C_BC_R$ conversion **must** support `VK_FORMAT_FEATURE_MIDPOINT_CHROMA_SAMPLES_BIT` or `VK_FORMAT_FEATURE_COSITED_CHROMA_SAMPLES_BIT`
- VUID-VkSamplerYcbcrConversionCreateInfo-xChromaOffset-01651
  If the potential format features of the sampler $Y'C_BC_R$ conversion do not support `VK_FORMAT_FEATURE_COSITED_CHROMA_SAMPLES_BIT`, `xChromaOffset` and `yChromaOffset` **must** not be `VK_CHROMA_LOCATION_COSITED_EVEN` if the corresponding components are downsampled
- VUID-VkSamplerYcbcrConversionCreateInfo-xChromaOffset-01652
  If the potential format features of the sampler $Y'C_BC_R$ conversion do not support `VK_FORMAT_FEATURE_MIDPOINT_CHROMA_SAMPLES_BIT`, `xChromaOffset` and `yChromaOffset` **must** not be `VK_CHROMA_LOCATION_MIDPOINT` if the corresponding components are downsampled
- VUID-VkSamplerYcbcrConversionCreateInfo-components-02581
  If the format has a `_422` or `_420` suffix, then `components.g` **must** be the identity swizzle
- VUID-VkSamplerYcbcrConversionCreateInfo-components-02582
  If the format has a `_422` or `_420` suffix, then `components.a` **must** be the identity swizzle, `VK_COMPONENT_SWIZZLE_ONE`, or `VK_COMPONENT_SWIZZLE_ZERO`
- VUID-VkSamplerYcbcrConversionCreateInfo-components-02583
  If the format has a `_422` or `_420` suffix, then `components.r` **must** be the identity swizzle or `VK_COMPONENT_SWIZZLE_B`
- VUID-VkSamplerYcbcrConversionCreateInfo-components-02584

If the format has a `_422` or `_420` suffix, then `components.b` **must** be the identity swizzle or `VK_COMPONENT_SWIZZLE_R`

- VUID-VkSamplerYcbcrConversionCreateInfo-components-02585
  If the format has a `_422` or `_420` suffix, and if either `components.r` or `components.b` is the identity swizzle, both values **must** be the identity swizzle
- VUID-VkSamplerYcbcrConversionCreateInfo-ycbcrModel-01655
  If `ycbcrModel` is not `VK_SAMPLER_YCBCR_MODEL_CONVERSION_RGB_IDENTITY`, then `components.r`, `components.g`, and `components.b` **must** correspond to components of the `format`; that is, `components.r`, `components.g`, and `components.b` **must** not be `VK_COMPONENT_SWIZZLE_ZERO` or `VK_COMPONENT_SWIZZLE_ONE`, and **must** not correspond to a component containing zero or one as a consequence of conversion to RGBA
- VUID-VkSamplerYcbcrConversionCreateInfo-ycbcrRange-02748
  If `ycbcrRange` is `VK_SAMPLER_YCBCR_RANGE_ITU_NARROW` then the R, G and B components obtained by applying the `component` swizzle to `format` **must** each have a bit-depth greater than or equal to 8
- VUID-VkSamplerYcbcrConversionCreateInfo-forceExplicitReconstruction-01656
  If the potential format features of the sampler $Y'C_BC_R$ conversion do not support `VK_FORMAT_FEATURE_SAMPLED_IMAGE_YCBCR_CONVERSION_CHROMA_RECONSTRUCTION_EXPLICIT_FORCEABLE_BIT` `forceExplicitReconstruction` **must** be `VK_FALSE`
- VUID-VkSamplerYcbcrConversionCreateInfo-chromaFilter-01657
  If the potential format features of the sampler $Y'C_BC_R$ conversion do not support `VK_FORMAT_FEATURE_SAMPLED_IMAGE_YCBCR_CONVERSION_LINEAR_FILTER_BIT`, `chromaFilter` **must** not be `VK_FILTER_LINEAR`

Valid Usage (Implicit)

- VUID-VkSamplerYcbcrConversionCreateInfo-sType-sType
  `sType` **must** be `VK_STRUCTURE_TYPE_SAMPLER_YCBCR_CONVERSION_CREATE_INFO`
- VUID-VkSamplerYcbcrConversionCreateInfo-pNext-pNext
  `pNext` **must** be `NULL`
- VUID-VkSamplerYcbcrConversionCreateInfo-format-parameter
  `format` **must** be a valid VkFormat value
- VUID-VkSamplerYcbcrConversionCreateInfo-ycbcrModel-parameter
  `ycbcrModel` **must** be a valid VkSamplerYcbcrModelConversion value
- VUID-VkSamplerYcbcrConversionCreateInfo-ycbcrRange-parameter
  `ycbcrRange` **must** be a valid VkSamplerYcbcrRange value
- VUID-VkSamplerYcbcrConversionCreateInfo-components-parameter
  `components` **must** be a valid VkComponentMapping structure
- VUID-VkSamplerYcbcrConversionCreateInfo-xChromaOffset-parameter
  `xChromaOffset` **must** be a valid VkChromaLocation value
- VUID-VkSamplerYcbcrConversionCreateInfo-yChromaOffset-parameter
  `yChromaOffset` **must** be a valid VkChromaLocation value

- VUID-VkSamplerYcbcrConversionCreateInfo-chromaFilter-parameter
  `chromaFilter` **must** be a valid VkFilter value

If `chromaFilter` is `VK_FILTER_NEAREST`, chroma samples are reconstructed to luma component resolution using nearest-neighbour sampling. Otherwise, chroma samples are reconstructed using interpolation. More details can be found in the description of sampler $Y'C_BC_R$ conversion in the Image Operations chapter.

VkSamplerYcbcrModelConversion defines the conversion from the source color model to the shader color model. Possible values are:

```
// Provided by VK_VERSION_1_1
typedef enum VkSamplerYcbcrModelConversion {
    VK_SAMPLER_YCBCR_MODEL_CONVERSION_RGB_IDENTITY = 0,
    VK_SAMPLER_YCBCR_MODEL_CONVERSION_YCBCR_IDENTITY = 1,
    VK_SAMPLER_YCBCR_MODEL_CONVERSION_YCBCR_709 = 2,
    VK_SAMPLER_YCBCR_MODEL_CONVERSION_YCBCR_601 = 3,
    VK_SAMPLER_YCBCR_MODEL_CONVERSION_YCBCR_2020 = 4,
} VkSamplerYcbcrModelConversion;
```

- `VK_SAMPLER_YCBCR_MODEL_CONVERSION_RGB_IDENTITY` specifies that the input values to the conversion are unmodified.
- `VK_SAMPLER_YCBCR_MODEL_CONVERSION_YCBCR_IDENTITY` specifies no model conversion but the inputs are range expanded as for $Y'C_BC_R$.
- `VK_SAMPLER_YCBCR_MODEL_CONVERSION_YCBCR_709` specifies the color model conversion from $Y'C_BC_R$ to R'G'B' defined in BT.709 and described in the “BT.709 $Y'C_BC_R$ conversion” section of the Khronos Data Format Specification.
- `VK_SAMPLER_YCBCR_MODEL_CONVERSION_YCBCR_601` specifies the color model conversion from $Y'C_BC_R$ to R'G'B' defined in BT.601 and described in the “BT.601 $Y'C_BC_R$ conversion” section of the Khronos Data Format Specification.
- `VK_SAMPLER_YCBCR_MODEL_CONVERSION_YCBCR_2020` specifies the color model conversion from $Y'C_BC_R$ to R'G'B' defined in BT.2020 and described in the “BT.2020 $Y'C_BC_R$ conversion” section of the Khronos Data Format Specification.

In the `VK_SAMPLER_YCBCR_MODEL_CONVERSION_YCBCR_*` color models, for the input to the sampler $Y'C_BC_R$ range expansion and model conversion:

- the Y (Y' luma) component corresponds to the G component of an RGB image.
- the CB (C_B or “U” blue color difference) component corresponds to the B component of an RGB image.
- the CR (C_R or “V” red color difference) component corresponds to the R component of an RGB image.
- the alpha component, if present, is not modified by color model conversion.

These rules reflect the mapping of components after the component swizzle operation (controlled

by VkSamplerYcbcrConversionCreateInfo::components).

NOTE

For example, an "YUVA" 32-bit format comprising four 8-bit components can be implemented as VK_FORMAT_R8G8B8A8_UNORM with a component mapping:

- components.a = VK_COMPONENT_SWIZZLE_IDENTITY
- components.r = VK_COMPONENT_SWIZZLE_B
- components.g = VK_COMPONENT_SWIZZLE_R
- components.b = VK_COMPONENT_SWIZZLE_G

The VkSamplerYcbcrRange enum describes whether color components are encoded using the full range of numerical values or whether values are reserved for headroom and foot room. VkSamplerYcbcrRange is defined as:

```
// Provided by VK_VERSION_1_1
typedef enum VkSamplerYcbcrRange {
    VK_SAMPLER_YCBCR_RANGE_ITU_FULL = 0,
    VK_SAMPLER_YCBCR_RANGE_ITU_NARROW = 1,
} VkSamplerYcbcrRange;
```

- VK_SAMPLER_YCBCR_RANGE_ITU_FULL specifies that the full range of the encoded values are valid and interpreted according to the ITU "full range" quantization rules.
- VK_SAMPLER_YCBCR_RANGE_ITU_NARROW specifies that headroom and foot room are reserved in the numerical range of encoded values, and the remaining values are expanded according to the ITU "narrow range" quantization rules.

The formulae for these conversions is described in the Sampler $Y'C_BC_R$ Range Expansion section of the Image Operations chapter.

No range modification takes place if ycbcrModel is VK_SAMPLER_YCBCR_MODEL_CONVERSION_RGB_IDENTITY; the ycbcrRange field of VkSamplerYcbcrConversionCreateInfo is ignored in this case.

The VkChromaLocation enum defines the location of downsampled chroma component samples relative to the luma samples, and is defined as:

```
// Provided by VK_VERSION_1_1
typedef enum VkChromaLocation {
    VK_CHROMA_LOCATION_COSITED_EVEN = 0,
    VK_CHROMA_LOCATION_MIDPOINT = 1,
} VkChromaLocation;
```

- VK_CHROMA_LOCATION_COSITED_EVEN specifies that downsampled chroma samples are aligned with luma samples with even coordinates.
- VK_CHROMA_LOCATION_MIDPOINT specifies that downsampled chroma samples are located half way between each even luma sample and the nearest higher odd luma sample.

To destroy a sampler $Y'C_BC_R$ conversion, call:

```
// Provided by VK_VERSION_1_1
void vkDestroySamplerYcbcrConversion(
    VkDevice                                    device,
    VkSamplerYcbcrConversion                    ycbcrConversion,
    const VkAllocationCallbacks*                pAllocator);
```

- `device` is the logical device that destroys the $Y'C_BC_R$ conversion.
- `ycbcrConversion` is the conversion to destroy.
- `pAllocator` controls host memory allocation as described in the Memory Allocation chapter.

Valid Usage (Implicit)

- VUID-vkDestroySamplerYcbcrConversion-device-parameter
  `device` **must** be a valid VkDevice handle
- VUID-vkDestroySamplerYcbcrConversion-ycbcrConversion-parameter
  If `ycbcrConversion` is not VK_NULL_HANDLE, `ycbcrConversion` **must** be a valid VkSamplerYcbcrConversion handle
- VUID-vkDestroySamplerYcbcrConversion-pAllocator-parameter
  If `pAllocator` is not `NULL`, `pAllocator` **must** be a valid pointer to a valid VkAllocationCallbacks structure
- VUID-vkDestroySamplerYcbcrConversion-ycbcrConversion-parent
  If `ycbcrConversion` is a valid handle, it **must** have been created, allocated, or retrieved from `device`

Host Synchronization

- Host access to `ycbcrConversion` **must** be externally synchronized

Chapter 14. Resource Descriptors

A *descriptor* is an opaque data structure representing a shader resource such as a buffer, buffer view, image view, sampler, or combined image sampler. Descriptors are organized into *descriptor sets*, which are bound during command recording for use in subsequent drawing commands. The arrangement of content in each descriptor set is determined by a *descriptor set layout*, which determines what descriptors can be stored within it. The sequence of descriptor set layouts that **can** be used by a pipeline is specified in a *pipeline layout*. Each pipeline object **can** use up to `maxBoundDescriptorSets` (see Limits) descriptor sets.

Shaders access resources via variables decorated with a descriptor set and binding number that link them to a descriptor in a descriptor set. The shader interface mapping to bound descriptor sets is described in the Shader Resource Interface section.

Shaders **can** also access buffers without going through descriptors by using Physical Storage Buffer Access to access them through 64-bit addresses.

14.1. Descriptor Types

There are a number of different types of descriptor supported by Vulkan, corresponding to different resources or usage. The following sections describe the API definitions of each descriptor type. The mapping of each type to SPIR-V is listed in the Shader Resource and Descriptor Type Correspondence and Shader Resource and Storage Class Correspondence tables in the Shader Interfaces chapter.

14.1.1. Storage Image

A *storage image* (`VK_DESCRIPTOR_TYPE_STORAGE_IMAGE`) is a descriptor type associated with an image resource via an image view that load, store, and atomic operations **can** be performed on.

Storage image loads are supported in all shader stages for image views whose format features contain `VK_FORMAT_FEATURE_STORAGE_IMAGE_BIT`.

Stores to storage images are supported in compute shaders for image views whose format features contain `VK_FORMAT_FEATURE_STORAGE_IMAGE_BIT`.

Atomic operations on storage images are supported in compute shaders for image views whose format features contain `VK_FORMAT_FEATURE_STORAGE_IMAGE_ATOMIC_BIT`.

When the `fragmentStoresAndAtomics` feature is enabled, stores and atomic operations are also supported for storage images in fragment shaders with the same set of image formats as supported in compute shaders. When the `vertexPipelineStoresAndAtomics` feature is enabled, stores and atomic operations are also supported in vertex, tessellation, and geometry shaders with the same set of image formats as supported in compute shaders.

The image subresources for a storage image **must** be in the `VK_IMAGE_LAYOUT_GENERAL` layout in order to access its data in a shader.

14.1.2. Sampler

A *sampler descriptor* (VK_DESCRIPTOR_TYPE_SAMPLER) is a descriptor type associated with a sampler object, used to control the behavior of sampling operations performed on a sampled image.

14.1.3. Sampled Image

A *sampled image* (VK_DESCRIPTOR_TYPE_SAMPLED_IMAGE) is a descriptor type associated with an image resource via an image view that sampling operations **can** be performed on.

Shaders combine a sampled image variable and a sampler variable to perform sampling operations.

Sampled images are supported in all shader stages for image views whose format features contain VK_FORMAT_FEATURE_SAMPLED_IMAGE_BIT.

An image subresources for a sampled image **must** be in one of the following layouts:

- VK_IMAGE_LAYOUT_DEPTH_STENCIL_READ_ONLY_OPTIMAL
- VK_IMAGE_LAYOUT_SHADER_READ_ONLY_OPTIMAL
- VK_IMAGE_LAYOUT_GENERAL
- VK_IMAGE_LAYOUT_DEPTH_READ_ONLY_STENCIL_ATTACHMENT_OPTIMAL
- VK_IMAGE_LAYOUT_DEPTH_ATTACHMENT_STENCIL_READ_ONLY_OPTIMAL
- VK_IMAGE_LAYOUT_DEPTH_READ_ONLY_OPTIMAL
- VK_IMAGE_LAYOUT_STENCIL_READ_ONLY_OPTIMAL

14.1.4. Combined Image Sampler

A *combined image sampler* (VK_DESCRIPTOR_TYPE_COMBINED_IMAGE_SAMPLER) is a single descriptor type associated with both a sampler and an image resource, combining both a sampler and sampled image descriptor into a single descriptor.

If the descriptor refers to a sampler that performs $Y'C_BC_R$ conversion, the sampler **must** only be used to sample the image in the same descriptor. Otherwise, the sampler and image in this type of descriptor **can** be used freely with any other samplers and images.

An image subresources for a combined image sampler **must** be in one of the following layouts:

- VK_IMAGE_LAYOUT_DEPTH_STENCIL_READ_ONLY_OPTIMAL
- VK_IMAGE_LAYOUT_SHADER_READ_ONLY_OPTIMAL
- VK_IMAGE_LAYOUT_GENERAL
- VK_IMAGE_LAYOUT_DEPTH_READ_ONLY_STENCIL_ATTACHMENT_OPTIMAL
- VK_IMAGE_LAYOUT_DEPTH_ATTACHMENT_STENCIL_READ_ONLY_OPTIMAL
- VK_IMAGE_LAYOUT_DEPTH_READ_ONLY_OPTIMAL
- VK_IMAGE_LAYOUT_STENCIL_READ_ONLY_OPTIMAL

NOTE

On some implementations, it **may** be more efficient to sample from an image using a combination of sampler and sampled image that are stored together in the descriptor set in a combined descriptor.

14.1.5. Uniform Texel Buffer

A *uniform texel buffer* (VK_DESCRIPTOR_TYPE_UNIFORM_TEXEL_BUFFER) is a descriptor type associated with a buffer resource via a buffer view that image sampling operations **can** be performed on.

Uniform texel buffers define a tightly-packed 1-dimensional linear array of texels, with texels going through format conversion when read in a shader in the same way as they are for an image.

Load operations from uniform texel buffers are supported in all shader stages for buffer view formats which report format features support for VK_FORMAT_FEATURE_UNIFORM_TEXEL_BUFFER_BIT

14.1.6. Storage Texel Buffer

A *storage texel buffer* (VK_DESCRIPTOR_TYPE_STORAGE_TEXEL_BUFFER) is a descriptor type associated with a buffer resource via a buffer view that image load, store, and atomic operations **can** be performed on.

Storage texel buffers define a tightly-packed 1-dimensional linear array of texels, with texels going through format conversion when read in a shader in the same way as they are for an image. Unlike uniform texel buffers, these buffers can also be written to in the same way as for storage images.

Storage texel buffer loads are supported in all shader stages for texel buffer view formats which report format features support for VK_FORMAT_FEATURE_STORAGE_TEXEL_BUFFER_BIT

Stores to storage texel buffers are supported in compute shaders for texel buffer formats which report format features support for VK_FORMAT_FEATURE_STORAGE_TEXEL_BUFFER_BIT

Atomic operations on storage texel buffers are supported in compute shaders for texel buffer formats which report format features support for VK_FORMAT_FEATURE_STORAGE_TEXEL_BUFFER_ATOMIC_BIT

When the fragmentStoresAndAtomics feature is enabled, stores and atomic operations are also supported for storage texel buffers in fragment shaders with the same set of texel buffer formats as supported in compute shaders. When the vertexPipelineStoresAndAtomics feature is enabled, stores and atomic operations are also supported in vertex, tessellation, and geometry shaders with the same set of texel buffer formats as supported in compute shaders.

14.1.7. Storage Buffer

A *storage buffer* (VK_DESCRIPTOR_TYPE_STORAGE_BUFFER) is a descriptor type associated with a buffer resource directly, described in a shader as a structure with various members that load, store, and atomic operations **can** be performed on.

NOTE

Atomic operations **can** only be performed on members of certain types as defined in the SPIR-V environment appendix.

14.1.8. Uniform Buffer

A *uniform buffer* (VK_DESCRIPTOR_TYPE_UNIFORM_BUFFER) is a descriptor type associated with a buffer resource directly, described in a shader as a structure with various members that load operations **can** be performed on.

14.1.9. Dynamic Uniform Buffer

A *dynamic uniform buffer* (VK_DESCRIPTOR_TYPE_UNIFORM_BUFFER_DYNAMIC) is almost identical to a uniform buffer, and differs only in how the offset into the buffer is specified. The base offset calculated by the VkDescriptorBufferInfo when initially updating the descriptor set is added to a dynamic offset when binding the descriptor set.

14.1.10. Dynamic Storage Buffer

A *dynamic storage buffer* (VK_DESCRIPTOR_TYPE_STORAGE_BUFFER_DYNAMIC) is almost identical to a storage buffer, and differs only in how the offset into the buffer is specified. The base offset calculated by the VkDescriptorBufferInfo when initially updating the descriptor set is added to a dynamic offset when binding the descriptor set.

14.1.11. Inline Uniform Block

An *inline uniform block* (VK_DESCRIPTOR_TYPE_INLINE_UNIFORM_BLOCK) is almost identical to a uniform buffer, and differs only in taking its storage directly from the encompassing descriptor set instead of being backed by buffer memory. It is typically used to access a small set of constant data that does not require the additional flexibility provided by the indirection enabled when using a uniform buffer where the descriptor and the referenced buffer memory are decoupled. Compared to push constants, they allow reusing the same set of constant data across multiple disjoint sets of drawing and dispatching commands.

Inline uniform block descriptors **cannot** be aggregated into arrays. Instead, the array size specified for an inline uniform block descriptor binding specifies the binding's capacity in bytes.

14.1.12. Input Attachment

An *input attachment* (VK_DESCRIPTOR_TYPE_INPUT_ATTACHMENT) is a descriptor type associated with an image resource via an image view that **can** be used for framebuffer local load operations in fragment shaders.

All image formats that are supported for color attachments (VK_FORMAT_FEATURE_COLOR_ATTACHMENT_BIT) or depth/stencil attachments (VK_FORMAT_FEATURE_DEPTH_STENCIL_ATTACHMENT_BIT) for a given image tiling mode are also supported for input attachments.

An image view used as an input attachment **must** be in one of the following layouts:

- VK_IMAGE_LAYOUT_DEPTH_STENCIL_READ_ONLY_OPTIMAL
- VK_IMAGE_LAYOUT_SHADER_READ_ONLY_OPTIMAL

- VK_IMAGE_LAYOUT_GENERAL
- VK_IMAGE_LAYOUT_DEPTH_READ_ONLY_STENCIL_ATTACHMENT_OPTIMAL
- VK_IMAGE_LAYOUT_DEPTH_ATTACHMENT_STENCIL_READ_ONLY_OPTIMAL

14.2. Descriptor Sets

Descriptors are grouped together into descriptor set objects. A descriptor set object is an opaque object containing storage for a set of descriptors, where the types and number of descriptors is defined by a descriptor set layout. The layout object **may** be used to define the association of each descriptor binding with memory or other implementation resources. The layout is used both for determining the resources that need to be associated with the descriptor set, and determining the interface between shader stages and shader resources.

14.2.1. Descriptor Set Layout

A descriptor set layout object is defined by an array of zero or more descriptor bindings. Each individual descriptor binding is specified by a descriptor type, a count (array size) of the number of descriptors in the binding, a set of shader stages that **can** access the binding, and (if using immutable samplers) an array of sampler descriptors.

Descriptor set layout objects are represented by VkDescriptorSetLayout handles:

```
// Provided by VK_VERSION_1_0
VK_DEFINE_NON_DISPATCHABLE_HANDLE(VkDescriptorSetLayout)
```

To create descriptor set layout objects, call:

```
// Provided by VK_VERSION_1_0
VkResult vkCreateDescriptorSetLayout(
    VkDevice                                    device,
    const VkDescriptorSetLayoutCreateInfo*      pCreateInfo,
    const VkAllocationCallbacks*                pAllocator,
    VkDescriptorSetLayout*                      pSetLayout);
```

- device is the logical device that creates the descriptor set layout.
- pCreateInfo is a pointer to a VkDescriptorSetLayoutCreateInfo structure specifying the state of the descriptor set layout object.
- pAllocator controls host memory allocation as described in the Memory Allocation chapter.
- pSetLayout is a pointer to a VkDescriptorSetLayout handle in which the resulting descriptor set layout object is returned.

Valid Usage

- VUID-vkCreateDescriptorSetLayout-support-09582

If the descriptor layout exceeds the limits reported through the physical device limits, then vkGetDescriptorSetLayoutSupport **must** have returned VkDescriptorSetLayoutSupport with `support` equal to `VK_TRUE` for `pCreateInfo`

Valid Usage (Implicit)

- VUID-vkCreateDescriptorSetLayout-device-parameter
  `device` **must** be a valid VkDevice handle
- VUID-vkCreateDescriptorSetLayout-pCreateInfo-parameter
  `pCreateInfo` **must** be a valid pointer to a valid VkDescriptorSetLayoutCreateInfo structure
- VUID-vkCreateDescriptorSetLayout-pAllocator-parameter
  If `pAllocator` is not `NULL`, `pAllocator` **must** be a valid pointer to a valid VkAllocationCallbacks structure
- VUID-vkCreateDescriptorSetLayout-pSetLayout-parameter
  `pSetLayout` **must** be a valid pointer to a VkDescriptorSetLayout handle

Return Codes

Success

- `VK_SUCCESS`

Failure

- `VK_ERROR_OUT_OF_HOST_MEMORY`
- `VK_ERROR_OUT_OF_DEVICE_MEMORY`

Information about the descriptor set layout is passed in a `VkDescriptorSetLayoutCreateInfo` structure:

```
// Provided by VK_VERSION_1_0
typedef struct VkDescriptorSetLayoutCreateInfo {
    VkStructureType                        sType;
    const void*                            pNext;
    VkDescriptorSetLayoutCreateFlags       flags;
    uint32_t                               bindingCount;
    const VkDescriptorSetLayoutBinding*    pBindings;
} VkDescriptorSetLayoutCreateInfo;
```

- `sType` is a VkStructureType value identifying this structure.
- `pNext` is `NULL` or a pointer to a structure extending this structure.
- `flags` is a bitmask specifying options for descriptor set layout creation.
- `bindingCount` is the number of elements in `pBindings`.
- `pBindings` is a pointer to an array of VkDescriptorSetLayoutBinding structures.

Valid Usage

- VUID-VkDescriptorSetLayoutCreateInfo-binding-00279
  The VkDescriptorSetLayoutBinding::binding members of the elements of the pBindings array **must** each have different values
- VUID-VkDescriptorSetLayoutCreateInfo-flags-03000
  If any binding has the VK_DESCRIPTOR_BINDING_UPDATE_AFTER_BIND_BIT bit set, flags **must** include VK_DESCRIPTOR_SET_LAYOUT_CREATE_UPDATE_AFTER_BIND_POOL_BIT
- VUID-VkDescriptorSetLayoutCreateInfo-descriptorType-03001
  If any binding has the VK_DESCRIPTOR_BINDING_UPDATE_AFTER_BIND_BIT bit set, then all bindings **must** not have descriptorType of VK_DESCRIPTOR_TYPE_UNIFORM_BUFFER_DYNAMIC or VK_DESCRIPTOR_TYPE_STORAGE_BUFFER_DYNAMIC

Valid Usage (Implicit)

- VUID-VkDescriptorSetLayoutCreateInfo-sType-sType
  sType **must** be VK_STRUCTURE_TYPE_DESCRIPTOR_SET_LAYOUT_CREATE_INFO
- VUID-VkDescriptorSetLayoutCreateInfo-pNext-pNext
  pNext **must** be NULL or a pointer to a valid instance of VkDescriptorSetLayoutBindingFlagsCreateInfo
- VUID-VkDescriptorSetLayoutCreateInfo-sType-unique
  The sType value of each struct in the pNext chain **must** be unique
- VUID-VkDescriptorSetLayoutCreateInfo-flags-parameter
  flags **must** be a valid combination of VkDescriptorSetLayoutCreateFlagBits values
- VUID-VkDescriptorSetLayoutCreateInfo-pBindings-parameter
  If bindingCount is not 0, pBindings **must** be a valid pointer to an array of bindingCount valid VkDescriptorSetLayoutBinding structures

Bits which **can** be set in VkDescriptorSetLayoutCreateInfo::flags, specifying options for descriptor set layout, are:

```
// Provided by VK_VERSION_1_0
typedef enum VkDescriptorSetLayoutCreateFlagBits {
  // Provided by VK_VERSION_1_2
    VK_DESCRIPTOR_SET_LAYOUT_CREATE_UPDATE_AFTER_BIND_POOL_BIT = 0x00000002,
} VkDescriptorSetLayoutCreateFlagBits;
```

- VK_DESCRIPTOR_SET_LAYOUT_CREATE_UPDATE_AFTER_BIND_POOL_BIT specifies that descriptor sets using this layout **must** be allocated from a descriptor pool created with the VK_DESCRIPTOR_POOL_CREATE_UPDATE_AFTER_BIND_BIT bit set. Descriptor set layouts created with this bit set have alternate limits for the maximum number of descriptors per-stage and per-pipeline layout. The non-UpdateAfterBind limits only count descriptors in sets created without this flag. The UpdateAfterBind limits count all descriptors, but the limits **may** be higher than the non-

UpdateAfterBind limits.

NOTE All bits for this type are defined by extensions, and none of those extensions are enabled in this build of the specification.

```
// Provided by VK_VERSION_1_0
typedef VkFlags VkDescriptorSetLayoutCreateFlags;
```

VkDescriptorSetLayoutCreateFlags is a bitmask type for setting a mask of zero or more VkDescriptorSetLayoutCreateFlagBits.

The VkDescriptorSetLayoutBinding structure is defined as:

```
// Provided by VK_VERSION_1_0
typedef struct VkDescriptorSetLayoutBinding {
    uint32_t              binding;
    VkDescriptorType      descriptorType;
    uint32_t              descriptorCount;
    VkShaderStageFlags    stageFlags;
    const VkSampler*      pImmutableSamplers;
} VkDescriptorSetLayoutBinding;
```

- binding is the binding number of this entry and corresponds to a resource of the same binding number in the shader stages.
- descriptorType is a VkDescriptorType specifying which type of resource descriptors are used for this binding.
- descriptorCount is the number of descriptors contained in the binding, accessed in a shader as an array, except if descriptorType is VK_DESCRIPTOR_TYPE_INLINE_UNIFORM_BLOCK in which case descriptorCount is the size in bytes of the inline uniform block. If descriptorCount is zero this binding entry is reserved and the resource **must** not be accessed from any stage via this binding within any pipeline using the set layout.
- stageFlags member is a bitmask of VkShaderStageFlagBits specifying which pipeline shader stages **can** access a resource for this binding. VK_SHADER_STAGE_ALL is a shorthand specifying that all defined shader stages, including any additional stages defined by extensions, **can** access the resource.

  If a shader stage is not included in stageFlags, then a resource **must** not be accessed from that stage via this binding within any pipeline using the set layout. Other than input attachments which are limited to the fragment shader, there are no limitations on what combinations of stages **can** use a descriptor binding, and in particular a binding **can** be used by both graphics stages and the compute stage.

- pImmutableSamplers affects initialization of samplers. If descriptorType specifies a VK_DESCRIPTOR_TYPE_SAMPLER or VK_DESCRIPTOR_TYPE_COMBINED_IMAGE_SAMPLER type descriptor, then pImmutableSamplers **can** be used to initialize a set of *immutable samplers*. Immutable samplers are permanently bound into the set layout and **must** not be changed; updating a

VK_DESCRIPTOR_TYPE_SAMPLER descriptor with immutable samplers is not allowed and updates to a VK_DESCRIPTOR_TYPE_COMBINED_IMAGE_SAMPLER descriptor with immutable samplers does not modify the samplers (the image views are updated, but the sampler updates are ignored). If pImmutableSamplers is not NULL, then it is a pointer to an array of sampler handles that will be copied into the set layout and used for the corresponding binding. Only the sampler handles are copied; the sampler objects **must** not be destroyed before the final use of the set layout and any descriptor pools and sets created using it. If pImmutableSamplers is NULL, then the sampler slots are dynamic and sampler handles **must** be bound into descriptor sets using this layout. If descriptorType is not one of these descriptor types, then pImmutableSamplers is ignored.

The above layout definition allows the descriptor bindings to be specified sparsely such that not all binding numbers between 0 and the maximum binding number need to be specified in the pBindings array. Bindings that are not specified have a descriptorCount and stageFlags of zero, and the value of descriptorType is undefined. However, all binding numbers between 0 and the maximum binding number in the VkDescriptorSetLayoutCreateInfo::pBindings array **may** consume memory in the descriptor set layout even if not all descriptor bindings are used, though it **should** not consume additional memory from the descriptor pool.

NOTE	The maximum binding number specified **should** be as compact as possible to avoid wasted memory.

Valid Usage

- VUID-VkDescriptorSetLayoutBinding-descriptorType-00282
  If descriptorType is VK_DESCRIPTOR_TYPE_SAMPLER or VK_DESCRIPTOR_TYPE_COMBINED_IMAGE_SAMPLER, and descriptorCount is not 0 and pImmutableSamplers is not NULL, pImmutableSamplers **must** be a valid pointer to an array of descriptorCount valid VkSampler handles
- VUID-VkDescriptorSetLayoutBinding-descriptorType-04604
  If the inlineUniformBlock feature is not enabled, descriptorType **must** not be VK_DESCRIPTOR_TYPE_INLINE_UNIFORM_BLOCK
- VUID-VkDescriptorSetLayoutBinding-descriptorType-02209
  If descriptorType is VK_DESCRIPTOR_TYPE_INLINE_UNIFORM_BLOCK then descriptorCount **must** be a multiple of 4
- VUID-VkDescriptorSetLayoutBinding-descriptorType-08004
  If descriptorType is VK_DESCRIPTOR_TYPE_INLINE_UNIFORM_BLOCK then descriptorCount **must** be less than or equal to VkPhysicalDeviceInlineUniformBlockProperties::maxInlineUniformBlockSize
- VUID-VkDescriptorSetLayoutBinding-descriptorCount-09465
  If descriptorCount is not 0, stageFlags **must** be VK_SHADER_STAGE_ALL or a valid combination of other VkShaderStageFlagBits values
- VUID-VkDescriptorSetLayoutBinding-descriptorType-01510
  If descriptorType is VK_DESCRIPTOR_TYPE_INPUT_ATTACHMENT and descriptorCount is not 0, then stageFlags **must** be 0 or VK_SHADER_STAGE_FRAGMENT_BIT

Valid Usage (Implicit)

- VUID-VkDescriptorSetLayoutBinding-descriptorType-parameter
  `descriptorType` **must** be a valid VkDescriptorType value

If the `pNext` chain of a VkDescriptorSetLayoutCreateInfo structure includes a VkDescriptorSetLayoutBindingFlagsCreateInfo structure, then that structure includes an array of flags, one for each descriptor set layout binding.

The VkDescriptorSetLayoutBindingFlagsCreateInfo structure is defined as:

```
// Provided by VK_VERSION_1_2
typedef struct VkDescriptorSetLayoutBindingFlagsCreateInfo {
    VkStructureType                    sType;
    const void*                        pNext;
    uint32_t                           bindingCount;
    const VkDescriptorBindingFlags*    pBindingFlags;
} VkDescriptorSetLayoutBindingFlagsCreateInfo;
```

- `sType` is a VkStructureType value identifying this structure.
- `pNext` is `NULL` or a pointer to a structure extending this structure.
- `bindingCount` is zero or the number of elements in `pBindingFlags`.
- `pBindingFlags` is a pointer to an array of VkDescriptorBindingFlags bitfields, one for each descriptor set layout binding.

If `bindingCount` is zero or if this structure is not included in the `pNext` chain, the VkDescriptorBindingFlags for each descriptor set layout binding is considered to be zero. Otherwise, the descriptor set layout binding at VkDescriptorSetLayoutCreateInfo::`pBindings`[i] uses the flags in `pBindingFlags`[i].

Valid Usage

- VUID-VkDescriptorSetLayoutBindingFlagsCreateInfo-bindingCount-03002
  If `bindingCount` is not zero, `bindingCount` **must** equal VkDescriptorSetLayoutCreateInfo::`bindingCount`
- VUID-VkDescriptorSetLayoutBindingFlagsCreateInfo-pBindingFlags-03004
  If an element of `pBindingFlags` includes `VK_DESCRIPTOR_BINDING_VARIABLE_DESCRIPTOR_COUNT_BIT`, then it **must** be the element with the highest `binding` number
- VUID-VkDescriptorSetLayoutBindingFlagsCreateInfo-descriptorBindingUniformBufferUpdateAfterBind-03005
  If VkPhysicalDeviceDescriptorIndexingFeatures::`descriptorBindingUniformBufferUpdateAfterBind` is not enabled, all bindings with descriptor type `VK_DESCRIPTOR_TYPE_UNIFORM_BUFFER` **must** not use

VK_DESCRIPTOR_BINDING_UPDATE_AFTER_BIND_BIT

- VUID-VkDescriptorSetLayoutBindingFlagsCreateInfo-descriptorBindingSampledImageUpdateAfterBind-03006
  If VkPhysicalDeviceDescriptorIndexingFeatures::descriptorBindingSampledImageUpdateAfterBind is not enabled, all bindings with descriptor type VK_DESCRIPTOR_TYPE_SAMPLER, VK_DESCRIPTOR_TYPE_COMBINED_IMAGE_SAMPLER, or VK_DESCRIPTOR_TYPE_SAMPLED_IMAGE **must** not use VK_DESCRIPTOR_BINDING_UPDATE_AFTER_BIND_BIT
- VUID-VkDescriptorSetLayoutBindingFlagsCreateInfo-descriptorBindingStorageImageUpdateAfterBind-03007
  If VkPhysicalDeviceDescriptorIndexingFeatures::descriptorBindingStorageImageUpdateAfterBind is not enabled, all bindings with descriptor type VK_DESCRIPTOR_TYPE_STORAGE_IMAGE **must** not use VK_DESCRIPTOR_BINDING_UPDATE_AFTER_BIND_BIT
- VUID-VkDescriptorSetLayoutBindingFlagsCreateInfo-descriptorBindingStorageBufferUpdateAfterBind-03008
  If VkPhysicalDeviceDescriptorIndexingFeatures::descriptorBindingStorageBufferUpdateAfterBind is not enabled, all bindings with descriptor type VK_DESCRIPTOR_TYPE_STORAGE_BUFFER **must** not use VK_DESCRIPTOR_BINDING_UPDATE_AFTER_BIND_BIT
- VUID-VkDescriptorSetLayoutBindingFlagsCreateInfo-descriptorBindingUniformTexelBufferUpdateAfterBind-03009
  If VkPhysicalDeviceDescriptorIndexingFeatures::descriptorBindingUniformTexelBufferUpdateAfterBind is not enabled, all bindings with descriptor type VK_DESCRIPTOR_TYPE_UNIFORM_TEXEL_BUFFER **must** not use VK_DESCRIPTOR_BINDING_UPDATE_AFTER_BIND_BIT
- VUID-VkDescriptorSetLayoutBindingFlagsCreateInfo-descriptorBindingStorageTexelBufferUpdateAfterBind-03010
  If VkPhysicalDeviceDescriptorIndexingFeatures::descriptorBindingStorageTexelBufferUpdateAfterBind is not enabled, all bindings with descriptor type VK_DESCRIPTOR_TYPE_STORAGE_TEXEL_BUFFER **must** not use VK_DESCRIPTOR_BINDING_UPDATE_AFTER_BIND_BIT
- VUID-VkDescriptorSetLayoutBindingFlagsCreateInfo-descriptorBindingInlineUniformBlockUpdateAfterBind-02211
  If VkPhysicalDeviceInlineUniformBlockFeatures::descriptorBindingInlineUniformBlockUpdateAfterBind is not enabled, all bindings with descriptor type VK_DESCRIPTOR_TYPE_INLINE_UNIFORM_BLOCK **must** not use VK_DESCRIPTOR_BINDING_UPDATE_AFTER_BIND_BIT
- VUID-VkDescriptorSetLayoutBindingFlagsCreateInfo-None-03011
  All bindings with descriptor type VK_DESCRIPTOR_TYPE_INPUT_ATTACHMENT, VK_DESCRIPTOR_TYPE_UNIFORM_BUFFER_DYNAMIC, or VK_DESCRIPTOR_TYPE_STORAGE_BUFFER_DYNAMIC **must** not use VK_DESCRIPTOR_BINDING_UPDATE_AFTER_BIND_BIT
- VUID-VkDescriptorSetLayoutBindingFlagsCreateInfo-descriptorBindingUpdateUnusedWhilePending-03012
  If VkPhysicalDeviceDescriptorIndexingFeatures

::descriptorBindingUpdateUnusedWhilePending is not enabled, all elements of pBindingFlags **must** not include VK_DESCRIPTOR_BINDING_UPDATE_UNUSED_WHILE_PENDING_BIT

- VUID-VkDescriptorSetLayoutBindingFlagsCreateInfo-descriptorBindingPartiallyBound-03013
  If VkPhysicalDeviceDescriptorIndexingFeatures::descriptorBindingPartiallyBound is not enabled, all elements of pBindingFlags **must** not include VK_DESCRIPTOR_BINDING_PARTIALLY_BOUND_BIT
- VUID-VkDescriptorSetLayoutBindingFlagsCreateInfo-descriptorBindingVariableDescriptorCount-03014
  If VkPhysicalDeviceDescriptorIndexingFeatures::descriptorBindingVariableDescriptorCount is not enabled, all elements of pBindingFlags **must** not include VK_DESCRIPTOR_BINDING_VARIABLE_DESCRIPTOR_COUNT_BIT
- VUID-VkDescriptorSetLayoutBindingFlagsCreateInfo-pBindingFlags-03015
  If an element of pBindingFlags includes VK_DESCRIPTOR_BINDING_VARIABLE_DESCRIPTOR_COUNT_BIT, that element's descriptorType **must** not be VK_DESCRIPTOR_TYPE_UNIFORM_BUFFER_DYNAMIC or VK_DESCRIPTOR_TYPE_STORAGE_BUFFER_DYNAMIC

Valid Usage (Implicit)

- VUID-VkDescriptorSetLayoutBindingFlagsCreateInfo-sType-sType
  sType **must** be VK_STRUCTURE_TYPE_DESCRIPTOR_SET_LAYOUT_BINDING_FLAGS_CREATE_INFO
- VUID-VkDescriptorSetLayoutBindingFlagsCreateInfo-pBindingFlags-parameter
  If bindingCount is not 0, pBindingFlags **must** be a valid pointer to an array of bindingCount valid combinations of VkDescriptorBindingFlagBits values

Bits which **can** be set in each element of VkDescriptorSetLayoutBindingFlagsCreateInfo::pBindingFlags, specifying options for the corresponding descriptor set layout binding, are:

```
// Provided by VK_VERSION_1_2
typedef enum VkDescriptorBindingFlagBits {
    VK_DESCRIPTOR_BINDING_UPDATE_AFTER_BIND_BIT = 0x00000001,
    VK_DESCRIPTOR_BINDING_UPDATE_UNUSED_WHILE_PENDING_BIT = 0x00000002,
    VK_DESCRIPTOR_BINDING_PARTIALLY_BOUND_BIT = 0x00000004,
    VK_DESCRIPTOR_BINDING_VARIABLE_DESCRIPTOR_COUNT_BIT = 0x00000008,
} VkDescriptorBindingFlagBits;
```

- VK_DESCRIPTOR_BINDING_UPDATE_AFTER_BIND_BIT indicates that if descriptors in this binding are updated between when the descriptor set is bound in a command buffer and when that command buffer is submitted to a queue, then the submission will use the most recently set descriptors for this binding and the updates do not invalidate the command buffer. Descriptor bindings created with this flag are also partially exempt from the external synchronization requirement in vkUpdateDescriptorSets. Multiple descriptors with this flag set **can** be updated concurrently in different threads, though the same descriptor **must** not be updated

concurrently by two threads. Descriptors with this flag set **can** be updated concurrently with the set being bound to a command buffer in another thread, but not concurrently with the set being reset or freed.

- VK_DESCRIPTOR_BINDING_PARTIALLY_BOUND_BIT indicates that descriptors in this binding that are not *dynamically used* need not contain valid descriptors at the time the descriptors are consumed. A descriptor is dynamically used if any shader invocation executes an instruction that performs any memory access using the descriptor. If a descriptor is not dynamically used, any resource referenced by the descriptor is not considered to be referenced during command execution.
- VK_DESCRIPTOR_BINDING_UPDATE_UNUSED_WHILE_PENDING_BIT indicates that descriptors in this binding **can** be updated after a command buffer has bound this descriptor set, or while a command buffer that uses this descriptor set is pending execution, as long as the descriptors that are updated are not used by those command buffers. Descriptor bindings created with this flag are also partially exempt from the external synchronization requirement in vkUpdateDescriptorSetWithTemplateKHR and vkUpdateDescriptorSets in the same way as for VK_DESCRIPTOR_BINDING_UPDATE_AFTER_BIND_BIT. If VK_DESCRIPTOR_BINDING_PARTIALLY_BOUND_BIT is also set, then descriptors **can** be updated as long as they are not dynamically used by any shader invocations. If VK_DESCRIPTOR_BINDING_PARTIALLY_BOUND_BIT is not set, then descriptors **can** be updated as long as they are not statically used by any shader invocations.
- VK_DESCRIPTOR_BINDING_VARIABLE_DESCRIPTOR_COUNT_BIT indicates that this is a *variable-sized descriptor binding* whose size will be specified when a descriptor set is allocated using this layout. The value of descriptorCount is treated as an upper bound on the size of the binding. This **must** only be used for the last binding in the descriptor set layout (i.e. the binding with the largest value of binding). For the purposes of counting against limits such as maxDescriptorSet* and maxPerStageDescriptor*, the full value of descriptorCount is counted, except for descriptor bindings with a descriptor type of VK_DESCRIPTOR_TYPE_INLINE_UNIFORM_BLOCK. In this case, descriptorCount specifies the upper bound on the byte size of the binding; thus it counts against the maxInlineUniformTotalSize limit instead.

NOTE Note that while VK_DESCRIPTOR_BINDING_UPDATE_AFTER_BIND_BIT and VK_DESCRIPTOR_BINDING_UPDATE_UNUSED_WHILE_PENDING_BIT both involve updates to descriptor sets after they are bound, VK_DESCRIPTOR_BINDING_UPDATE_UNUSED_WHILE_PENDING_BIT is a weaker requirement since it is only about descriptors that are not used, whereas VK_DESCRIPTOR_BINDING_UPDATE_AFTER_BIND_BIT requires the implementation to observe updates to descriptors that are used.

```
// Provided by VK_VERSION_1_2
typedef VkFlags VkDescriptorBindingFlags;
```

VkDescriptorBindingFlags is a bitmask type for setting a mask of zero or more VkDescriptorBindingFlagBits.

To query information about whether a descriptor set layout **can** be created, call:

```
// Provided by VK_VERSION_1_1
void vkGetDescriptorSetLayoutSupport(
    VkDevice                                    device,
    const VkDescriptorSetLayoutCreateInfo*      pCreateInfo,
    VkDescriptorSetLayoutSupport*               pSupport);
```

- `device` is the logical device that would create the descriptor set layout.
- `pCreateInfo` is a pointer to a VkDescriptorSetLayoutCreateInfo structure specifying the state of the descriptor set layout object.
- `pSupport` is a pointer to a VkDescriptorSetLayoutSupport structure, in which information about support for the descriptor set layout object is returned.

Some implementations have limitations on what fits in a descriptor set which are not easily expressible in terms of existing limits like `maxDescriptorSet*`, for example if all descriptor types share a limited space in memory but each descriptor is a different size or alignment. This command returns information about whether a descriptor set satisfies this limit. If the descriptor set layout satisfies the VkPhysicalDeviceMaintenance3Properties::`maxPerSetDescriptors` limit, this command is guaranteed to return `VK_TRUE` in VkDescriptorSetLayoutSupport::`supported`. If the descriptor set layout exceeds the VkPhysicalDeviceMaintenance3Properties::`maxPerSetDescriptors` limit, whether the descriptor set layout is supported is implementation-dependent and **may** depend on whether the descriptor sizes and alignments cause the layout to exceed an internal limit.

This command does not consider other limits such as `maxPerStageDescriptor*`, and so a descriptor set layout that is supported according to this command **must** still satisfy the pipeline layout limits such as `maxPerStageDescriptor*` in order to be used in a pipeline layout.

NOTE This is a `VkDevice` query rather than `VkPhysicalDevice` because the answer **may** depend on enabled features.

Valid Usage (Implicit)

- VUID-vkGetDescriptorSetLayoutSupport-device-parameter
  `device` **must** be a valid VkDevice handle
- VUID-vkGetDescriptorSetLayoutSupport-pCreateInfo-parameter
  `pCreateInfo` **must** be a valid pointer to a valid VkDescriptorSetLayoutCreateInfo structure
- VUID-vkGetDescriptorSetLayoutSupport-pSupport-parameter
  `pSupport` **must** be a valid pointer to a VkDescriptorSetLayoutSupport structure

Information about support for the descriptor set layout is returned in a `VkDescriptorSetLayoutSupport` structure:

```
// Provided by VK_VERSION_1_1
typedef struct VkDescriptorSetLayoutSupport {
    VkStructureType    sType;
    void*              pNext;
    VkBool32           supported;
} VkDescriptorSetLayoutSupport;
```

- `sType` is a VkStructureType value identifying this structure.
- `pNext` is `NULL` or a pointer to a structure extending this structure.
- `supported` specifies whether the descriptor set layout **can** be created.

`supported` will be `VK_TRUE` if the descriptor set **can** be created, or else `VK_FALSE`.

Valid Usage (Implicit)

- VUID-VkDescriptorSetLayoutSupport-sType-sType
  `sType` **must** be `VK_STRUCTURE_TYPE_DESCRIPTOR_SET_LAYOUT_SUPPORT`
- VUID-VkDescriptorSetLayoutSupport-pNext-pNext
  `pNext` **must** be `NULL` or a pointer to a valid instance of VkDescriptorSetVariableDescriptorCountLayoutSupport
- VUID-VkDescriptorSetLayoutSupport-sType-unique
  The `sType` value of each struct in the `pNext` chain **must** be unique

If the `pNext` chain of a VkDescriptorSetLayoutSupport structure includes a `VkDescriptorSetVariableDescriptorCountLayoutSupport` structure, then that structure returns additional information about whether the descriptor set layout is supported.

```
// Provided by VK_VERSION_1_2
typedef struct VkDescriptorSetVariableDescriptorCountLayoutSupport {
    VkStructureType    sType;
    void*              pNext;
    uint32_t           maxVariableDescriptorCount;
} VkDescriptorSetVariableDescriptorCountLayoutSupport;
```

- `sType` is a VkStructureType value identifying this structure.
- `pNext` is `NULL` or a pointer to a structure extending this structure.
- `maxVariableDescriptorCount` indicates the maximum number of descriptors supported in the highest numbered binding of the layout, if that binding is variable-sized. If the highest numbered binding of the layout has a descriptor type of `VK_DESCRIPTOR_TYPE_INLINE_UNIFORM_BLOCK` then `maxVariableDescriptorCount` indicates the maximum byte size supported for the binding, if that binding is variable-sized.

If the VkDescriptorSetLayoutCreateInfo structure specified in vkGetDescriptorSetLayoutSupport ::`pCreateInfo` includes a variable-sized descriptor, then `supported` is determined assuming the

requested size of the variable-sized descriptor, and maxVariableDescriptorCount is the maximum size of that descriptor that **can** be successfully created (which is greater than or equal to the requested size passed in). If the VkDescriptorSetLayoutCreateInfo structure does not include a variable-sized descriptor, or if the VkPhysicalDeviceDescriptorIndexingFeatures ::descriptorBindingVariableDescriptorCount feature is not enabled, then maxVariableDescriptorCount is zero. For the purposes of this command, a variable-sized descriptor binding with a descriptorCount of zero is treated as having a descriptorCount of four if descriptorType is VK_DESCRIPTOR_TYPE_INLINE_UNIFORM_BLOCK, or one otherwise, and thus the binding is not ignored and the maximum descriptor count will be returned. If the layout is not supported, then the value written to maxVariableDescriptorCount is undefined.

Valid Usage (Implicit)

- VUID-VkDescriptorSetVariableDescriptorCountLayoutSupport-sType-sType sType **must** be VK_STRUCTURE_TYPE_DESCRIPTOR_SET_VARIABLE_DESCRIPTOR_COUNT_LAYOUT_SUPPORT

The following examples show a shader snippet using two descriptor sets, and application code that creates corresponding descriptor set layouts.

GLSL Example

```
//
// binding to a single sampled image descriptor in set 0
//
layout (set=0, binding=0) uniform texture2D mySampledImage;

//
// binding to an array of sampled image descriptors in set 0
//
layout (set=0, binding=1) uniform texture2D myArrayOfSampledImages[12];

//
// binding to a single uniform buffer descriptor in set 1
//
layout (set=1, binding=0) uniform myUniformBuffer
{
    vec4 myElement[32];
};
```

SPIR-V Example

```
          ...
     %1 = OpExtInstImport "GLSL.std.450"
          ...
          OpName %9 "mySampledImage"
          OpName %14 "myArrayOfSampledImages"
          OpName %18 "myUniformBuffer"
```

```
               OpMemberName %18 0 "myElement"
               OpName %20 ""
               OpDecorate %9 DescriptorSet 0
               OpDecorate %9 Binding 0
               OpDecorate %14 DescriptorSet 0
               OpDecorate %14 Binding 1
               OpDecorate %17 ArrayStride 16
               OpMemberDecorate %18 0 Offset 0
               OpDecorate %18 Block
               OpDecorate %20 DescriptorSet 1
               OpDecorate %20 Binding 0
        %2 = OpTypeVoid
        %3 = OpTypeFunction %2
        %6 = OpTypeFloat 32
        %7 = OpTypeImage %6 2D 0 0 0 1 Unknown
        %8 = OpTypePointer UniformConstant %7
        %9 = OpVariable %8 UniformConstant
       %10 = OpTypeInt 32 0
       %11 = OpConstant %10 12
       %12 = OpTypeArray %7 %11
       %13 = OpTypePointer UniformConstant %12
       %14 = OpVariable %13 UniformConstant
       %15 = OpTypeVector %6 4
       %16 = OpConstant %10 32
       %17 = OpTypeArray %15 %16
       %18 = OpTypeStruct %17
       %19 = OpTypePointer Uniform %18
       %20 = OpVariable %19 Uniform
             ...
```

API Example

```
VkResult myResult;

const VkDescriptorSetLayoutBinding myDescriptorSetLayoutBinding[] =
{
    // binding to a single image descriptor
    {
        .binding = 0,
        .descriptorType = VK_DESCRIPTOR_TYPE_SAMPLED_IMAGE,
        .descriptorCount = 1,
        .stageFlags = VK_SHADER_STAGE_FRAGMENT_BIT,
        .pImmutableSamplers = NULL
    },

    // binding to an array of image descriptors
    {
        .binding = 1,
        .descriptorType = VK_DESCRIPTOR_TYPE_SAMPLED_IMAGE,
        .descriptorCount = 12,
```

```
        .stageFlags = VK_SHADER_STAGE_FRAGMENT_BIT,
        .pImmutableSamplers = NULL
    },

    // binding to a single uniform buffer descriptor
    {
        .binding = 0,
        .descriptorType = VK_DESCRIPTOR_TYPE_UNIFORM_BUFFER,
        .descriptorCount = 1,
        .stageFlags = VK_SHADER_STAGE_FRAGMENT_BIT,
        .pImmutableSamplers = NULL
    }
};

const VkDescriptorSetLayoutCreateInfo myDescriptorSetLayoutCreateInfo[] =
{
    // Information for first descriptor set with two descriptor bindings
    {
        .sType = VK_STRUCTURE_TYPE_DESCRIPTOR_SET_LAYOUT_CREATE_INFO,
        .pNext = NULL,
        .flags = 0,
        .bindingCount = 2,
        .pBindings = &myDescriptorSetLayoutBinding[0]
    },

    // Information for second descriptor set with one descriptor binding
    {
        .sType = VK_STRUCTURE_TYPE_DESCRIPTOR_SET_LAYOUT_CREATE_INFO,
        .pNext = NULL,
        .flags = 0,
        .bindingCount = 1,
        .pBindings = &myDescriptorSetLayoutBinding[2]
    }
};

VkDescriptorSetLayout myDescriptorSetLayout[2];

//
// Create first descriptor set layout
//
myResult = vkCreateDescriptorSetLayout(
    myDevice,
    &myDescriptorSetLayoutCreateInfo[0],
    NULL,
    &myDescriptorSetLayout[0]);

//
// Create second descriptor set layout
//
myResult = vkCreateDescriptorSetLayout(
    myDevice,
```

```
    &myDescriptorSetLayoutCreateInfo[1],
    NULL,
    &myDescriptorSetLayout[1]);
```

To destroy a descriptor set layout, call:

```
// Provided by VK_VERSION_1_0
void vkDestroyDescriptorSetLayout(
    VkDevice                                    device,
    VkDescriptorSetLayout                       descriptorSetLayout,
    const VkAllocationCallbacks*                pAllocator);
```

- `device` is the logical device that destroys the descriptor set layout.
- `descriptorSetLayout` is the descriptor set layout to destroy.
- `pAllocator` controls host memory allocation as described in the Memory Allocation chapter.

Valid Usage

- VUID-vkDestroyDescriptorSetLayout-descriptorSetLayout-00284
  If `VkAllocationCallbacks` were provided when `descriptorSetLayout` was created, a compatible set of callbacks **must** be provided here
- VUID-vkDestroyDescriptorSetLayout-descriptorSetLayout-00285
  If no `VkAllocationCallbacks` were provided when `descriptorSetLayout` was created, `pAllocator` **must** be `NULL`

Valid Usage (Implicit)

- VUID-vkDestroyDescriptorSetLayout-device-parameter
  `device` **must** be a valid VkDevice handle
- VUID-vkDestroyDescriptorSetLayout-descriptorSetLayout-parameter
  If `descriptorSetLayout` is not VK_NULL_HANDLE, `descriptorSetLayout` **must** be a valid VkDescriptorSetLayout handle
- VUID-vkDestroyDescriptorSetLayout-pAllocator-parameter
  If `pAllocator` is not `NULL`, `pAllocator` **must** be a valid pointer to a valid VkAllocationCallbacks structure
- VUID-vkDestroyDescriptorSetLayout-descriptorSetLayout-parent
  If `descriptorSetLayout` is a valid handle, it **must** have been created, allocated, or retrieved from `device`

Host Synchronization

- Host access to `descriptorSetLayout` **must** be externally synchronized

14.2.2. Pipeline Layouts

Access to descriptor sets from a pipeline is accomplished through a *pipeline layout*. Zero or more descriptor set layouts and zero or more push constant ranges are combined to form a pipeline layout object describing the complete set of resources that **can** be accessed by a pipeline. The pipeline layout represents a sequence of descriptor sets with each having a specific layout. This sequence of layouts is used to determine the interface between shader stages and shader resources. Each pipeline is created using a pipeline layout.

Pipeline layout objects are represented by `VkPipelineLayout` handles:

```
// Provided by VK_VERSION_1_0
VK_DEFINE_NON_DISPATCHABLE_HANDLE(VkPipelineLayout)
```

To create a pipeline layout, call:

```
// Provided by VK_VERSION_1_0
VkResult vkCreatePipelineLayout(
    VkDevice                                    device,
    const VkPipelineLayoutCreateInfo*           pCreateInfo,
    const VkAllocationCallbacks*                pAllocator,
    VkPipelineLayout*                           pPipelineLayout);
```

- `device` is the logical device that creates the pipeline layout.
- `pCreateInfo` is a pointer to a VkPipelineLayoutCreateInfo structure specifying the state of the pipeline layout object.
- `pAllocator` controls host memory allocation as described in the Memory Allocation chapter.
- `pPipelineLayout` is a pointer to a VkPipelineLayout handle in which the resulting pipeline layout object is returned.

Valid Usage (Implicit)

- VUID-vkCreatePipelineLayout-device-parameter
  `device` **must** be a valid VkDevice handle
- VUID-vkCreatePipelineLayout-pCreateInfo-parameter
  `pCreateInfo` **must** be a valid pointer to a valid VkPipelineLayoutCreateInfo structure
- VUID-vkCreatePipelineLayout-pAllocator-parameter
  If `pAllocator` is not `NULL`, `pAllocator` **must** be a valid pointer to a valid VkAllocationCallbacks structure
- VUID-vkCreatePipelineLayout-pPipelineLayout-parameter
  `pPipelineLayout` **must** be a valid pointer to a VkPipelineLayout handle

Return Codes

Success

- VK_SUCCESS

Failure

- VK_ERROR_OUT_OF_HOST_MEMORY
- VK_ERROR_OUT_OF_DEVICE_MEMORY

The VkPipelineLayoutCreateInfo structure is defined as:

```
// Provided by VK_VERSION_1_0
typedef struct VkPipelineLayoutCreateInfo {
    VkStructureType                 sType;
    const void*                     pNext;
    VkPipelineLayoutCreateFlags     flags;
    uint32_t                        setLayoutCount;
    const VkDescriptorSetLayout*    pSetLayouts;
    uint32_t                        pushConstantRangeCount;
    const VkPushConstantRange*      pPushConstantRanges;
} VkPipelineLayoutCreateInfo;
```

- sType is a VkStructureType value identifying this structure.
- pNext is NULL or a pointer to a structure extending this structure.
- flags is a bitmask of VkPipelineLayoutCreateFlagBits specifying options for pipeline layout creation.
- setLayoutCount is the number of descriptor sets included in the pipeline layout.
- pSetLayouts is a pointer to an array of VkDescriptorSetLayout objects.
- pushConstantRangeCount is the number of push constant ranges included in the pipeline layout.
- pPushConstantRanges is a pointer to an array of VkPushConstantRange structures defining a set of push constant ranges for use in a single pipeline layout. In addition to descriptor set layouts, a pipeline layout also describes how many push constants **can** be accessed by each stage of the pipeline.

NOTE	Push constants represent a high speed path to modify constant data in pipelines that is expected to outperform memory-backed resource updates.

Valid Usage

- VUID-VkPipelineLayoutCreateInfo-setLayoutCount-00286
  setLayoutCount **must** be less than or equal to VkPhysicalDeviceLimits ::maxBoundDescriptorSets
- VUID-VkPipelineLayoutCreateInfo-descriptorType-03016

The total number of descriptors in descriptor set layouts created without the VK_DESCRIPTOR_SET_LAYOUT_CREATE_UPDATE_AFTER_BIND_POOL_BIT bit set with a descriptorType of VK_DESCRIPTOR_TYPE_SAMPLER and VK_DESCRIPTOR_TYPE_COMBINED_IMAGE_SAMPLER accessible to any given shader stage across all elements of pSetLayouts **must** be less than or equal to VkPhysicalDeviceLimits::maxPerStageDescriptorSamplers

- VUID-VkPipelineLayoutCreateInfo-descriptorType-03017
  The total number of descriptors in descriptor set layouts created without the VK_DESCRIPTOR_SET_LAYOUT_CREATE_UPDATE_AFTER_BIND_POOL_BIT bit set with a descriptorType of VK_DESCRIPTOR_TYPE_UNIFORM_BUFFER and VK_DESCRIPTOR_TYPE_UNIFORM_BUFFER_DYNAMIC accessible to any given shader stage across all elements of pSetLayouts **must** be less than or equal to VkPhysicalDeviceLimits::maxPerStageDescriptorUniformBuffers
- VUID-VkPipelineLayoutCreateInfo-descriptorType-03018
  The total number of descriptors in descriptor set layouts created without the VK_DESCRIPTOR_SET_LAYOUT_CREATE_UPDATE_AFTER_BIND_POOL_BIT bit set with a descriptorType of VK_DESCRIPTOR_TYPE_STORAGE_BUFFER and VK_DESCRIPTOR_TYPE_STORAGE_BUFFER_DYNAMIC accessible to any given shader stage across all elements of pSetLayouts **must** be less than or equal to VkPhysicalDeviceLimits::maxPerStageDescriptorStorageBuffers
- VUID-VkPipelineLayoutCreateInfo-descriptorType-06939
  The total number of descriptors in descriptor set layouts created without the VK_DESCRIPTOR_SET_LAYOUT_CREATE_UPDATE_AFTER_BIND_POOL_BIT bit set with a descriptorType of VK_DESCRIPTOR_TYPE_COMBINED_IMAGE_SAMPLER, VK_DESCRIPTOR_TYPE_SAMPLED_IMAGE, and VK_DESCRIPTOR_TYPE_UNIFORM_TEXEL_BUFFER, accessible to any given shader stage across all elements of pSetLayouts **must** be less than or equal to VkPhysicalDeviceLimits::maxPerStageDescriptorSampledImages
- VUID-VkPipelineLayoutCreateInfo-descriptorType-03020
  The total number of descriptors in descriptor set layouts created without the VK_DESCRIPTOR_SET_LAYOUT_CREATE_UPDATE_AFTER_BIND_POOL_BIT bit set with a descriptorType of VK_DESCRIPTOR_TYPE_STORAGE_IMAGE, and VK_DESCRIPTOR_TYPE_STORAGE_TEXEL_BUFFER accessible to any given shader stage across all elements of pSetLayouts **must** be less than or equal to VkPhysicalDeviceLimits::maxPerStageDescriptorStorageImages
- VUID-VkPipelineLayoutCreateInfo-descriptorType-03021
  The total number of descriptors in descriptor set layouts created without the VK_DESCRIPTOR_SET_LAYOUT_CREATE_UPDATE_AFTER_BIND_POOL_BIT bit set with a descriptorType of VK_DESCRIPTOR_TYPE_INPUT_ATTACHMENT accessible to any given shader stage across all elements of pSetLayouts **must** be less than or equal to VkPhysicalDeviceLimits::maxPerStageDescriptorInputAttachments
- VUID-VkPipelineLayoutCreateInfo-descriptorType-02214
  The total number of bindings in descriptor set layouts created without the VK_DESCRIPTOR_SET_LAYOUT_CREATE_UPDATE_AFTER_BIND_POOL_BIT bit set and with a descriptorType of VK_DESCRIPTOR_TYPE_INLINE_UNIFORM_BLOCK accessible to any given shader stage across all elements of pSetLayouts, **must** be less than or equal to VkPhysicalDeviceInlineUniformBlockProperties::maxPerStageDescriptorInlineUniformBlocks
- VUID-VkPipelineLayoutCreateInfo-descriptorType-03022
  The total number of descriptors with a descriptorType of VK_DESCRIPTOR_TYPE_SAMPLER and VK_DESCRIPTOR_TYPE_COMBINED_IMAGE_SAMPLER accessible to any given shader stage across all

elements of pSetLayouts **must** be less than or equal to VkPhysicalDeviceDescriptorIndexingProperties::maxPerStageDescriptorUpdateAfterBindSamplers

- VUID-VkPipelineLayoutCreateInfo-descriptorType-03023
  The total number of descriptors with a descriptorType of VK_DESCRIPTOR_TYPE_UNIFORM_BUFFER and VK_DESCRIPTOR_TYPE_UNIFORM_BUFFER_DYNAMIC accessible to any given shader stage across all elements of pSetLayouts **must** be less than or equal to VkPhysicalDeviceDescriptorIndexingProperties::maxPerStageDescriptorUpdateAfterBindUniformBuffers
- VUID-VkPipelineLayoutCreateInfo-descriptorType-03024
  The total number of descriptors with a descriptorType of VK_DESCRIPTOR_TYPE_STORAGE_BUFFER and VK_DESCRIPTOR_TYPE_STORAGE_BUFFER_DYNAMIC accessible to any given shader stage across all elements of pSetLayouts **must** be less than or equal to VkPhysicalDeviceDescriptorIndexingProperties::maxPerStageDescriptorUpdateAfterBindStorageBuffers
- VUID-VkPipelineLayoutCreateInfo-descriptorType-03025
  The total number of descriptors with a descriptorType of VK_DESCRIPTOR_TYPE_COMBINED_IMAGE_SAMPLER, VK_DESCRIPTOR_TYPE_SAMPLED_IMAGE, and VK_DESCRIPTOR_TYPE_UNIFORM_TEXEL_BUFFER accessible to any given shader stage across all elements of pSetLayouts **must** be less than or equal to VkPhysicalDeviceDescriptorIndexingProperties::maxPerStageDescriptorUpdateAfterBindSampledImages
- VUID-VkPipelineLayoutCreateInfo-descriptorType-03026
  The total number of descriptors with a descriptorType of VK_DESCRIPTOR_TYPE_STORAGE_IMAGE, and VK_DESCRIPTOR_TYPE_STORAGE_TEXEL_BUFFER accessible to any given shader stage across all elements of pSetLayouts **must** be less than or equal to VkPhysicalDeviceDescriptorIndexingProperties::maxPerStageDescriptorUpdateAfterBindStorageImages
- VUID-VkPipelineLayoutCreateInfo-descriptorType-03027
  The total number of descriptors with a descriptorType of VK_DESCRIPTOR_TYPE_INPUT_ATTACHMENT accessible to any given shader stage across all elements of pSetLayouts **must** be less than or equal to VkPhysicalDeviceDescriptorIndexingProperties::maxPerStageDescriptorUpdateAfterBindInputAttachments
- VUID-VkPipelineLayoutCreateInfo-descriptorType-02215
  The total number of bindings with a descriptorType of VK_DESCRIPTOR_TYPE_INLINE_UNIFORM_BLOCK accessible to any given shader stage across all elements of pSetLayouts **must** be less than or equal to VkPhysicalDeviceInlineUniformBlockProperties::maxPerStageDescriptorUpdateAfterBindInlineUniformBlocks
- VUID-VkPipelineLayoutCreateInfo-descriptorType-03028
  The total number of descriptors in descriptor set layouts created without the VK_DESCRIPTOR_SET_LAYOUT_CREATE_UPDATE_AFTER_BIND_POOL_BIT bit set with a descriptorType of VK_DESCRIPTOR_TYPE_SAMPLER and VK_DESCRIPTOR_TYPE_COMBINED_IMAGE_SAMPLER accessible across all shader stages and across all elements of pSetLayouts **must** be less than or equal

to VkPhysicalDeviceLimits::maxDescriptorSetSamplers

- VUID-VkPipelineLayoutCreateInfo-descriptorType-03029
  The total number of descriptors in descriptor set layouts created without the VK_DESCRIPTOR_SET_LAYOUT_CREATE_UPDATE_AFTER_BIND_POOL_BIT bit set with a descriptorType of VK_DESCRIPTOR_TYPE_UNIFORM_BUFFER accessible across all shader stages and across all elements of pSetLayouts **must** be less than or equal to VkPhysicalDeviceLimits::maxDescriptorSetUniformBuffers
- VUID-VkPipelineLayoutCreateInfo-descriptorType-03030
  The total number of descriptors in descriptor set layouts created without the VK_DESCRIPTOR_SET_LAYOUT_CREATE_UPDATE_AFTER_BIND_POOL_BIT bit set with a descriptorType of VK_DESCRIPTOR_TYPE_UNIFORM_BUFFER_DYNAMIC accessible across all shader stages and across all elements of pSetLayouts **must** be less than or equal to VkPhysicalDeviceLimits::maxDescriptorSetUniformBuffersDynamic
- VUID-VkPipelineLayoutCreateInfo-descriptorType-03031
  The total number of descriptors in descriptor set layouts created without the VK_DESCRIPTOR_SET_LAYOUT_CREATE_UPDATE_AFTER_BIND_POOL_BIT bit set with a descriptorType of VK_DESCRIPTOR_TYPE_STORAGE_BUFFER accessible across all shader stages and across all elements of pSetLayouts **must** be less than or equal to VkPhysicalDeviceLimits::maxDescriptorSetStorageBuffers
- VUID-VkPipelineLayoutCreateInfo-descriptorType-03032
  The total number of descriptors in descriptor set layouts created without the VK_DESCRIPTOR_SET_LAYOUT_CREATE_UPDATE_AFTER_BIND_POOL_BIT bit set with a descriptorType of VK_DESCRIPTOR_TYPE_STORAGE_BUFFER_DYNAMIC accessible across all shader stages and across all elements of pSetLayouts **must** be less than or equal to VkPhysicalDeviceLimits::maxDescriptorSetStorageBuffersDynamic
- VUID-VkPipelineLayoutCreateInfo-descriptorType-03033
  The total number of descriptors in descriptor set layouts created without the VK_DESCRIPTOR_SET_LAYOUT_CREATE_UPDATE_AFTER_BIND_POOL_BIT bit set with a descriptorType of VK_DESCRIPTOR_TYPE_COMBINED_IMAGE_SAMPLER, VK_DESCRIPTOR_TYPE_SAMPLED_IMAGE, and VK_DESCRIPTOR_TYPE_UNIFORM_TEXEL_BUFFER accessible across all shader stages and across all elements of pSetLayouts **must** be less than or equal to VkPhysicalDeviceLimits::maxDescriptorSetSampledImages
- VUID-VkPipelineLayoutCreateInfo-descriptorType-03034
  The total number of descriptors in descriptor set layouts created without the VK_DESCRIPTOR_SET_LAYOUT_CREATE_UPDATE_AFTER_BIND_POOL_BIT bit set with a descriptorType of VK_DESCRIPTOR_TYPE_STORAGE_IMAGE, and VK_DESCRIPTOR_TYPE_STORAGE_TEXEL_BUFFER accessible across all shader stages and across all elements of pSetLayouts **must** be less than or equal to VkPhysicalDeviceLimits::maxDescriptorSetStorageImages
- VUID-VkPipelineLayoutCreateInfo-descriptorType-03035
  The total number of descriptors in descriptor set layouts created without the VK_DESCRIPTOR_SET_LAYOUT_CREATE_UPDATE_AFTER_BIND_POOL_BIT bit set with a descriptorType of VK_DESCRIPTOR_TYPE_INPUT_ATTACHMENT accessible across all shader stages and across all elements of pSetLayouts **must** be less than or equal to VkPhysicalDeviceLimits::maxDescriptorSetInputAttachments
- VUID-VkPipelineLayoutCreateInfo-descriptorType-02216

The total number of bindings in descriptor set layouts created without the VK_DESCRIPTOR_SET_LAYOUT_CREATE_UPDATE_AFTER_BIND_POOL_BIT bit set with a descriptorType of VK_DESCRIPTOR_TYPE_INLINE_UNIFORM_BLOCK accessible across all shader stages and across all elements of pSetLayouts **must** be less than or equal to VkPhysicalDeviceInlineUniformBlockProperties::maxDescriptorSetInlineUniformBlocks

- VUID-VkPipelineLayoutCreateInfo-pSetLayouts-03036
  The total number of descriptors of the type VK_DESCRIPTOR_TYPE_SAMPLER and VK_DESCRIPTOR_TYPE_COMBINED_IMAGE_SAMPLER accessible across all shader stages and across all elements of pSetLayouts **must** be less than or equal to VkPhysicalDeviceDescriptorIndexingProperties::maxDescriptorSetUpdateAfterBindSamplers
- VUID-VkPipelineLayoutCreateInfo-pSetLayouts-03037
  The total number of descriptors of the type VK_DESCRIPTOR_TYPE_UNIFORM_BUFFER accessible across all shader stages and across all elements of pSetLayouts **must** be less than or equal to VkPhysicalDeviceDescriptorIndexingProperties::maxDescriptorSetUpdateAfterBindUniformBuffers
- VUID-VkPipelineLayoutCreateInfo-pSetLayouts-03038
  The total number of descriptors of the type VK_DESCRIPTOR_TYPE_UNIFORM_BUFFER_DYNAMIC accessible across all shader stages and across all elements of pSetLayouts **must** be less than or equal to VkPhysicalDeviceLimits::maxDescriptorSetUpdateAfterBindUniformBuffersDynamic
- VUID-VkPipelineLayoutCreateInfo-pSetLayouts-03039
  The total number of descriptors of the type VK_DESCRIPTOR_TYPE_STORAGE_BUFFER accessible across all shader stages and across all elements of pSetLayouts **must** be less than or equal to VkPhysicalDeviceDescriptorIndexingProperties::maxDescriptorSetUpdateAfterBindStorageBuffers
- VUID-VkPipelineLayoutCreateInfo-pSetLayouts-03040
  The total number of descriptors of the type VK_DESCRIPTOR_TYPE_STORAGE_BUFFER_DYNAMIC accessible across all shader stages and across all elements of pSetLayouts **must** be less than or equal to VkPhysicalDeviceLimits::maxDescriptorSetUpdateAfterBindStorageBuffersDynamic
- VUID-VkPipelineLayoutCreateInfo-pSetLayouts-03041
  The total number of descriptors of the type VK_DESCRIPTOR_TYPE_COMBINED_IMAGE_SAMPLER, VK_DESCRIPTOR_TYPE_SAMPLED_IMAGE, and VK_DESCRIPTOR_TYPE_UNIFORM_TEXEL_BUFFER accessible across all shader stages and across all elements of pSetLayouts **must** be less than or equal to VkPhysicalDeviceDescriptorIndexingProperties::maxDescriptorSetUpdateAfterBindSampledImages
- VUID-VkPipelineLayoutCreateInfo-pSetLayouts-03042
  The total number of descriptors of the type VK_DESCRIPTOR_TYPE_STORAGE_IMAGE, and VK_DESCRIPTOR_TYPE_STORAGE_TEXEL_BUFFER accessible across all shader stages and across all elements of pSetLayouts **must** be less than or equal to VkPhysicalDeviceDescriptorIndexingProperties::maxDescriptorSetUpdateAfterBindStorageImages
- VUID-VkPipelineLayoutCreateInfo-pSetLayouts-03043
  The total number of descriptors of the type VK_DESCRIPTOR_TYPE_INPUT_ATTACHMENT accessible across all shader stages and across all elements of pSetLayouts **must** be less

than or equal to VkPhysicalDeviceDescriptorIndexingProperties::maxDescriptorSetUpdateAfterBindInputAttachments

- VUID-VkPipelineLayoutCreateInfo-descriptorType-02217
  The total number of bindings with a descriptorType of VK_DESCRIPTOR_TYPE_INLINE_UNIFORM_BLOCK accessible across all shader stages and across all elements of pSetLayouts **must** be less than or equal to VkPhysicalDeviceInlineUniformBlockProperties::maxDescriptorSetUpdateAfterBindInlineUniformBlocks
- VUID-VkPipelineLayoutCreateInfo-descriptorType-06531
  The total number of descriptors with a descriptorType of VK_DESCRIPTOR_TYPE_INLINE_UNIFORM_BLOCK accessible across all shader stages and across all elements of pSetLayouts **must** be less than or equal to VkPhysicalDeviceVulkan13Properties::maxInlineUniformTotalSize
- VUID-VkPipelineLayoutCreateInfo-pPushConstantRanges-00292
  Any two elements of pPushConstantRanges **must** not include the same stage in stageFlags
- VUID-VkPipelineLayoutCreateInfo-graphicsPipelineLibrary-06753
  Elements of pSetLayouts **must** be valid VkDescriptorSetLayout objects

Valid Usage (Implicit)

- VUID-VkPipelineLayoutCreateInfo-sType-sType
  sType **must** be VK_STRUCTURE_TYPE_PIPELINE_LAYOUT_CREATE_INFO
- VUID-VkPipelineLayoutCreateInfo-flags-zerobitmask
  flags **must** be 0
- VUID-VkPipelineLayoutCreateInfo-pSetLayouts-parameter
  If setLayoutCount is not 0, pSetLayouts **must** be a valid pointer to an array of setLayoutCount valid or VK_NULL_HANDLE VkDescriptorSetLayout handles
- VUID-VkPipelineLayoutCreateInfo-pPushConstantRanges-parameter
  If pushConstantRangeCount is not 0, pPushConstantRanges **must** be a valid pointer to an array of pushConstantRangeCount valid VkPushConstantRange structures

```
typedef enum VkPipelineLayoutCreateFlagBits {
} VkPipelineLayoutCreateFlagBits;
```

All values for this enum are defined by extensions.

```
// Provided by VK_VERSION_1_0
typedef VkFlags VkPipelineLayoutCreateFlags;
```

VkPipelineLayoutCreateFlags is a bitmask type for setting a mask of VkPipelineLayoutCreateFlagBits.

The VkPushConstantRange structure is defined as:

```
// Provided by VK_VERSION_1_0
typedef struct VkPushConstantRange {
    VkShaderStageFlags    stageFlags;
    uint32_t              offset;
    uint32_t              size;
} VkPushConstantRange;
```

- `stageFlags` is a set of stage flags describing the shader stages that will access a range of push constants. If a particular stage is not included in the range, then accessing members of that range of push constants from the corresponding shader stage will return undefined values.
- `offset` and `size` are the start offset and size, respectively, consumed by the range. Both `offset` and `size` are in units of bytes and **must** be a multiple of 4. The layout of the push constant variables is specified in the shader.

Valid Usage

- VUID-VkPushConstantRange-offset-00294
  `offset` **must** be less than `VkPhysicalDeviceLimits`::`maxPushConstantsSize`
- VUID-VkPushConstantRange-offset-00295
  `offset` **must** be a multiple of `4`
- VUID-VkPushConstantRange-size-00296
  `size` **must** be greater than `0`
- VUID-VkPushConstantRange-size-00297
  `size` **must** be a multiple of `4`
- VUID-VkPushConstantRange-size-00298
  `size` **must** be less than or equal to `VkPhysicalDeviceLimits`::`maxPushConstantsSize` minus `offset`

Valid Usage (Implicit)

- VUID-VkPushConstantRange-stageFlags-parameter
  `stageFlags` **must** be a valid combination of VkShaderStageFlagBits values
- VUID-VkPushConstantRange-stageFlags-requiredbitmask
  `stageFlags` **must** not be `0`

Once created, pipeline layouts are used as part of pipeline creation (see Pipelines), as part of binding descriptor sets (see Descriptor Set Binding), and as part of setting push constants (see Push Constant Updates). Pipeline creation accepts a pipeline layout as input, and the layout **may** be used to map (set, binding, arrayElement) tuples to implementation resources or memory locations within a descriptor set. The assignment of implementation resources depends only on the bindings defined in the descriptor sets that comprise the pipeline layout, and not on any shader source.

All resource variables statically used in all shaders in a pipeline **must** be declared with a (set,

binding, arrayElement) that exists in the corresponding descriptor set layout and is of an appropriate descriptor type and includes the set of shader stages it is used by in `stageFlags`. The pipeline layout **can** include entries that are not used by a particular pipeline. The pipeline layout allows the application to provide a consistent set of bindings across multiple pipeline compiles, which enables those pipelines to be compiled in a way that the implementation **may** cheaply switch pipelines without reprogramming the bindings.

Similarly, the push constant block declared in each shader (if present) **must** only place variables at offsets that are each included in a push constant range with `stageFlags` including the bit corresponding to the shader stage that uses it. The pipeline layout **can** include ranges or portions of ranges that are not used by a particular pipeline.

There is a limit on the total number of resources of each type that **can** be included in bindings in all descriptor set layouts in a pipeline layout as shown in Pipeline Layout Resource Limits. The "Total Resources Available" column gives the limit on the number of each type of resource that **can** be included in bindings in all descriptor sets in the pipeline layout. Some resource types count against multiple limits. Additionally, there are limits on the total number of each type of resource that **can** be used in any pipeline stage as described in Shader Resource Limits.

Table 9. Pipeline Layout Resource Limits

Total Resources Available	Resource Types
`maxDescriptorSetSamplers` or `maxDescriptorSetUpdateAfterBindSamplers`	sampler
	combined image sampler
`maxDescriptorSetSampledImages` or `maxDescriptorSetUpdateAfterBindSampledImages`	sampled image
	combined image sampler
	uniform texel buffer
`maxDescriptorSetStorageImages` or `maxDescriptorSetUpdateAfterBindStorageImages`	storage image
	storage texel buffer
`maxDescriptorSetUniformBuffers` or `maxDescriptorSetUpdateAfterBindUniformBuffers`	uniform buffer
	uniform buffer dynamic
`maxDescriptorSetUniformBuffersDynamic` or `maxDescriptorSetUpdateAfterBindUniformBuffersDynamic`	uniform buffer dynamic
`maxDescriptorSetStorageBuffers` or `maxDescriptorSetUpdateAfterBindStorageBuffers`	storage buffer
	storage buffer dynamic
`maxDescriptorSetStorageBuffersDynamic` or `maxDescriptorSetUpdateAfterBindStorageBuffersDynamic`	storage buffer dynamic
`maxDescriptorSetInputAttachments` or `maxDescriptorSetUpdateAfterBindInputAttachments`	input attachment
`maxDescriptorSetInlineUniformBlocks` or `maxDescriptorSetUpdateAfterBindInlineUniformBlocks`	inline uniform block

To destroy a pipeline layout, call:

```
// Provided by VK_VERSION_1_0
void vkDestroyPipelineLayout(
    VkDevice                                    device,
    VkPipelineLayout                            pipelineLayout,
    const VkAllocationCallbacks*                pAllocator);
```

- `device` is the logical device that destroys the pipeline layout.
- `pipelineLayout` is the pipeline layout to destroy.
- `pAllocator` controls host memory allocation as described in the Memory Allocation chapter.

Valid Usage

- VUID-vkDestroyPipelineLayout-pipelineLayout-00299
  If `VkAllocationCallbacks` were provided when `pipelineLayout` was created, a compatible set of callbacks **must** be provided here
- VUID-vkDestroyPipelineLayout-pipelineLayout-00300
  If no `VkAllocationCallbacks` were provided when `pipelineLayout` was created, `pAllocator` **must** be `NULL`
- VUID-vkDestroyPipelineLayout-pipelineLayout-02004
  `pipelineLayout` **must** not have been passed to any `vkCmd*` command for any command buffers that are still in the recording state when `vkDestroyPipelineLayout` is called

Valid Usage (Implicit)

- VUID-vkDestroyPipelineLayout-device-parameter
  `device` **must** be a valid VkDevice handle
- VUID-vkDestroyPipelineLayout-pipelineLayout-parameter
  If `pipelineLayout` is not VK_NULL_HANDLE, `pipelineLayout` **must** be a valid VkPipelineLayout handle
- VUID-vkDestroyPipelineLayout-pAllocator-parameter
  If `pAllocator` is not `NULL`, `pAllocator` **must** be a valid pointer to a valid VkAllocationCallbacks structure
- VUID-vkDestroyPipelineLayout-pipelineLayout-parent
  If `pipelineLayout` is a valid handle, it **must** have been created, allocated, or retrieved from `device`

Host Synchronization

- Host access to `pipelineLayout` **must** be externally synchronized

Pipeline Layout Compatibility

Two pipeline layouts are defined to be “compatible for push constants” if they were created with identical push constant ranges. Two pipeline layouts are defined to be “compatible for set N” if they were created with *identically defined* descriptor set layouts for sets zero through N, and if they were created with identical push constant ranges.

When binding a descriptor set (see Descriptor Set Binding) to set number N, a previously bound descriptor set bound with lower index M than N is disturbed if the pipeline layouts for set M and N are not compatible for set M. Otherwise, the bound descriptor set in M is not disturbed.

If, additionally, the previously bound descriptor set for set N was bound using a pipeline layout not compatible for set N, then all bindings in sets numbered greater than N are disturbed.

When binding a pipeline, the pipeline **can** correctly access any previously bound descriptor set N if it was bound with compatible pipeline layout for set N, and it was not disturbed.

Layout compatibility means that descriptor sets **can** be bound to a command buffer for use by any pipeline created with a compatible pipeline layout, and without having bound a particular pipeline first. It also means that descriptor sets **can** remain valid across a pipeline change, and the same resources will be accessible to the newly bound pipeline.

When a descriptor set is disturbed by binding descriptor sets, the disturbed set is considered to contain undefined descriptors bound with the same pipeline layout as the disturbing descriptor set.

Implementor’s Note

A consequence of layout compatibility is that when the implementation compiles a pipeline layout and maps pipeline resources to implementation resources, the mechanism for set N **should** only be a function of sets [0..N].

NOTE	Place the least frequently changing descriptor sets near the start of the pipeline layout, and place the descriptor sets representing the most frequently changing resources near the end. When pipelines are switched, only the descriptor set bindings that have been invalidated will need to be updated and the remainder of the descriptor set bindings will remain in place.

The maximum number of descriptor sets that **can** be bound to a pipeline layout is queried from physical device properties (see `maxBoundDescriptorSets` in Limits).

API Example

```
const VkDescriptorSetLayout layouts[] = { layout1, layout2 };

const VkPushConstantRange ranges[] =
{
    {
        .stageFlags = VK_SHADER_STAGE_VERTEX_BIT,
        .offset = 0,
```

```
        .size = 4
    },
    {
        .stageFlags = VK_SHADER_STAGE_FRAGMENT_BIT,
        .offset = 4,
        .size = 4
    },
};

const VkPipelineLayoutCreateInfo createInfo =
{
    .sType = VK_STRUCTURE_TYPE_PIPELINE_LAYOUT_CREATE_INFO,
    .pNext = NULL,
    .flags = 0,
    .setLayoutCount = 2,
    .pSetLayouts = layouts,
    .pushConstantRangeCount = 2,
    .pPushConstantRanges = ranges
};

VkPipelineLayout myPipelineLayout;
myResult = vkCreatePipelineLayout(
    myDevice,
    &createInfo,
    NULL,
    &myPipelineLayout);
```

14.2.3. Allocation of Descriptor Sets

A *descriptor pool* maintains a pool of descriptors, from which descriptor sets are allocated. Descriptor pools are externally synchronized, meaning that the application **must** not allocate and/or free descriptor sets from the same pool in multiple threads simultaneously.

Descriptor pools are represented by `VkDescriptorPool` handles:

```
// Provided by VK_VERSION_1_0
VK_DEFINE_NON_DISPATCHABLE_HANDLE(VkDescriptorPool)
```

To create a descriptor pool object, call:

```
// Provided by VK_VERSION_1_0
VkResult vkCreateDescriptorPool(
    VkDevice                                    device,
    const VkDescriptorPoolCreateInfo*           pCreateInfo,
    const VkAllocationCallbacks*                pAllocator,
    VkDescriptorPool*                           pDescriptorPool);
```

- `device` is the logical device that creates the descriptor pool.

- `pCreateInfo` is a pointer to a VkDescriptorPoolCreateInfo structure specifying the state of the descriptor pool object.
- `pAllocator` controls host memory allocation as described in the Memory Allocation chapter.
- `pDescriptorPool` is a pointer to a VkDescriptorPool handle in which the resulting descriptor pool object is returned.

The created descriptor pool is returned in `pDescriptorPool`.

Valid Usage (Implicit)

- VUID-vkCreateDescriptorPool-device-parameter
  `device` **must** be a valid VkDevice handle
- VUID-vkCreateDescriptorPool-pCreateInfo-parameter
  `pCreateInfo` **must** be a valid pointer to a valid VkDescriptorPoolCreateInfo structure
- VUID-vkCreateDescriptorPool-pAllocator-parameter
  If `pAllocator` is not `NULL`, `pAllocator` **must** be a valid pointer to a valid VkAllocationCallbacks structure
- VUID-vkCreateDescriptorPool-pDescriptorPool-parameter
  `pDescriptorPool` **must** be a valid pointer to a VkDescriptorPool handle

Return Codes

Success

- `VK_SUCCESS`

Failure

- `VK_ERROR_OUT_OF_HOST_MEMORY`
- `VK_ERROR_OUT_OF_DEVICE_MEMORY`

Additional information about the pool is passed in a `VkDescriptorPoolCreateInfo` structure:

```
// Provided by VK_VERSION_1_0
typedef struct VkDescriptorPoolCreateInfo {
    VkStructureType                sType;
    const void*                    pNext;
    VkDescriptorPoolCreateFlags    flags;
    uint32_t                       maxSets;
    uint32_t                       poolSizeCount;
    const VkDescriptorPoolSize*    pPoolSizes;
} VkDescriptorPoolCreateInfo;
```

- `sType` is a VkStructureType value identifying this structure.
- `pNext` is `NULL` or a pointer to a structure extending this structure.

- `flags` is a bitmask of VkDescriptorPoolCreateFlagBits specifying certain supported operations on the pool.
- `maxSets` is the maximum number of descriptor sets that **can** be allocated from the pool.
- `poolSizeCount` is the number of elements in `pPoolSizes`.
- `pPoolSizes` is a pointer to an array of VkDescriptorPoolSize structures, each containing a descriptor type and number of descriptors of that type to be allocated in the pool.

If multiple `VkDescriptorPoolSize` structures containing the same descriptor type appear in the `pPoolSizes` array then the pool will be created with enough storage for the total number of descriptors of each type.

Fragmentation of a descriptor pool is possible and **may** lead to descriptor set allocation failures. A failure due to fragmentation is defined as failing a descriptor set allocation despite the sum of all outstanding descriptor set allocations from the pool plus the requested allocation requiring no more than the total number of descriptors requested at pool creation. Implementations provide certain guarantees of when fragmentation **must** not cause allocation failure, as described below.

If a descriptor pool has not had any descriptor sets freed since it was created or most recently reset then fragmentation **must** not cause an allocation failure (note that this is always the case for a pool created without the `VK_DESCRIPTOR_POOL_CREATE_FREE_DESCRIPTOR_SET_BIT` bit set). Additionally, if all sets allocated from the pool since it was created or most recently reset use the same number of descriptors (of each type) and the requested allocation also uses that same number of descriptors (of each type), then fragmentation **must** not cause an allocation failure.

If an allocation failure occurs due to fragmentation, an application **can** create an additional descriptor pool to perform further descriptor set allocations.

If `flags` has the `VK_DESCRIPTOR_POOL_CREATE_UPDATE_AFTER_BIND_BIT` bit set, descriptor pool creation **may** fail with the error `VK_ERROR_FRAGMENTATION` if the total number of descriptors across all pools (including this one) created with this bit set exceeds `maxUpdateAfterBindDescriptorsInAllPools`, or if fragmentation of the underlying hardware resources occurs.

Valid Usage

- VUID-VkDescriptorPoolCreateInfo-descriptorPoolOverallocation-09227
  `maxSets` **must** be greater than `0`
- VUID-VkDescriptorPoolCreateInfo-pPoolSizes-09424
  If `pPoolSizes` contains a `descriptorType` of `VK_DESCRIPTOR_TYPE_INLINE_UNIFORM_BLOCK`, the `pNext` chain **must** include a VkDescriptorPoolInlineUniformBlockCreateInfo structure whose `maxInlineUniformBlockBindings` member is not zero

Valid Usage (Implicit)

- VUID-VkDescriptorPoolCreateInfo-sType-sType
  `sType` **must** be `VK_STRUCTURE_TYPE_DESCRIPTOR_POOL_CREATE_INFO`

- VUID-VkDescriptorPoolCreateInfo-pNext-pNext
  `pNext` **must** be `NULL` or a pointer to a valid instance of VkDescriptorPoolInlineUniformBlockCreateInfo
- VUID-VkDescriptorPoolCreateInfo-sType-unique
  The `sType` value of each struct in the `pNext` chain **must** be unique
- VUID-VkDescriptorPoolCreateInfo-flags-parameter
  `flags` **must** be a valid combination of VkDescriptorPoolCreateFlagBits values
- VUID-VkDescriptorPoolCreateInfo-pPoolSizes-parameter
  If `poolSizeCount` is not `0`, `pPoolSizes` **must** be a valid pointer to an array of `poolSizeCount` valid VkDescriptorPoolSize structures

In order to be able to allocate descriptor sets having inline uniform block bindings the descriptor pool **must** be created with specifying the inline uniform block binding capacity of the descriptor pool, in addition to the total inline uniform data capacity in bytes which is specified through a VkDescriptorPoolSize structure with a `descriptorType` value of `VK_DESCRIPTOR_TYPE_INLINE_UNIFORM_BLOCK`. This **can** be done by adding a `VkDescriptorPoolInlineUniformBlockCreateInfo` structure to the `pNext` chain of VkDescriptorPoolCreateInfo.

The `VkDescriptorPoolInlineUniformBlockCreateInfo` structure is defined as:

```
// Provided by VK_VERSION_1_3
typedef struct VkDescriptorPoolInlineUniformBlockCreateInfo {
    VkStructureType    sType;
    const void*        pNext;
    uint32_t           maxInlineUniformBlockBindings;
} VkDescriptorPoolInlineUniformBlockCreateInfo;
```

- `sType` is a VkStructureType value identifying this structure.
- `pNext` is `NULL` or a pointer to a structure extending this structure.
- `maxInlineUniformBlockBindings` is the number of inline uniform block bindings to allocate.

Valid Usage (Implicit)

- VUID-VkDescriptorPoolInlineUniformBlockCreateInfo-sType-sType
  `sType` **must** be `VK_STRUCTURE_TYPE_DESCRIPTOR_POOL_INLINE_UNIFORM_BLOCK_CREATE_INFO`

Bits which **can** be set in VkDescriptorPoolCreateInfo::`flags`, enabling operations on a descriptor pool, are:

```
// Provided by VK_VERSION_1_0
typedef enum VkDescriptorPoolCreateFlagBits {
    VK_DESCRIPTOR_POOL_CREATE_FREE_DESCRIPTOR_SET_BIT = 0x00000001,
  // Provided by VK_VERSION_1_2
    VK_DESCRIPTOR_POOL_CREATE_UPDATE_AFTER_BIND_BIT = 0x00000002,
} VkDescriptorPoolCreateFlagBits;
```

- VK_DESCRIPTOR_POOL_CREATE_FREE_DESCRIPTOR_SET_BIT specifies that descriptor sets **can** return their individual allocations to the pool, i.e. all of vkAllocateDescriptorSets, vkFreeDescriptorSets, and vkResetDescriptorPool are allowed. Otherwise, descriptor sets allocated from the pool **must** not be individually freed back to the pool, i.e. only vkAllocateDescriptorSets and vkResetDescriptorPool are allowed.
- VK_DESCRIPTOR_POOL_CREATE_UPDATE_AFTER_BIND_BIT specifies that descriptor sets allocated from this pool **can** include bindings with the VK_DESCRIPTOR_BINDING_UPDATE_AFTER_BIND_BIT bit set. It is valid to allocate descriptor sets that have bindings that do not set the VK_DESCRIPTOR_BINDING_UPDATE_AFTER_BIND_BIT bit from a pool that has VK_DESCRIPTOR_POOL_CREATE_UPDATE_AFTER_BIND_BIT set.

```
// Provided by VK_VERSION_1_0
typedef VkFlags VkDescriptorPoolCreateFlags;
```

VkDescriptorPoolCreateFlags is a bitmask type for setting a mask of zero or more VkDescriptorPoolCreateFlagBits.

The VkDescriptorPoolSize structure is defined as:

```
// Provided by VK_VERSION_1_0
typedef struct VkDescriptorPoolSize {
    VkDescriptorType    type;
    uint32_t            descriptorCount;
} VkDescriptorPoolSize;
```

- type is the type of descriptor.
- descriptorCount is the number of descriptors of that type to allocate. If type is VK_DESCRIPTOR_TYPE_INLINE_UNIFORM_BLOCK then descriptorCount is the number of bytes to allocate for descriptors of this type.

Valid Usage

- VUID-VkDescriptorPoolSize-descriptorCount-00302
  descriptorCount **must** be greater than 0
- VUID-VkDescriptorPoolSize-type-02218
  If type is VK_DESCRIPTOR_TYPE_INLINE_UNIFORM_BLOCK then descriptorCount **must** be a multiple of 4

Valid Usage (Implicit)

- VUID-VkDescriptorPoolSize-type-parameter
  `type` **must** be a valid VkDescriptorType value

To destroy a descriptor pool, call:

```
// Provided by VK_VERSION_1_0
void vkDestroyDescriptorPool(
    VkDevice                                    device,
    VkDescriptorPool                            descriptorPool,
    const VkAllocationCallbacks*                pAllocator);
```

- `device` is the logical device that destroys the descriptor pool.
- `descriptorPool` is the descriptor pool to destroy.
- `pAllocator` controls host memory allocation as described in the Memory Allocation chapter.

When a pool is destroyed, all descriptor sets allocated from the pool are implicitly freed and become invalid. Descriptor sets allocated from a given pool do not need to be freed before destroying that descriptor pool.

Valid Usage

- VUID-vkDestroyDescriptorPool-descriptorPool-00303
  All submitted commands that refer to `descriptorPool` (via any allocated descriptor sets) **must** have completed execution
- VUID-vkDestroyDescriptorPool-descriptorPool-00304
  If `VkAllocationCallbacks` were provided when `descriptorPool` was created, a compatible set of callbacks **must** be provided here
- VUID-vkDestroyDescriptorPool-descriptorPool-00305
  If no `VkAllocationCallbacks` were provided when `descriptorPool` was created, `pAllocator` **must** be `NULL`

Valid Usage (Implicit)

- VUID-vkDestroyDescriptorPool-device-parameter
  `device` **must** be a valid VkDevice handle
- VUID-vkDestroyDescriptorPool-descriptorPool-parameter
  If `descriptorPool` is not VK_NULL_HANDLE, `descriptorPool` **must** be a valid VkDescriptorPool handle
- VUID-vkDestroyDescriptorPool-pAllocator-parameter
  If `pAllocator` is not `NULL`, `pAllocator` **must** be a valid pointer to a valid

VkAllocationCallbacks structure

- VUID-vkDestroyDescriptorPool-descriptorPool-parent
  If `descriptorPool` is a valid handle, it **must** have been created, allocated, or retrieved from `device`

Host Synchronization

- Host access to `descriptorPool` **must** be externally synchronized

Descriptor sets are allocated from descriptor pool objects, and are represented by `VkDescriptorSet` handles:

```
// Provided by VK_VERSION_1_0
VK_DEFINE_NON_DISPATCHABLE_HANDLE(VkDescriptorSet)
```

To allocate descriptor sets from a descriptor pool, call:

```
// Provided by VK_VERSION_1_0
VkResult vkAllocateDescriptorSets(
    VkDevice                                    device,
    const VkDescriptorSetAllocateInfo*          pAllocateInfo,
    VkDescriptorSet*                            pDescriptorSets);
```

- `device` is the logical device that owns the descriptor pool.
- `pAllocateInfo` is a pointer to a VkDescriptorSetAllocateInfo structure describing parameters of the allocation.
- `pDescriptorSets` is a pointer to an array of VkDescriptorSet handles in which the resulting descriptor set objects are returned.

The allocated descriptor sets are returned in `pDescriptorSets`.

When a descriptor set is allocated, the initial state is largely uninitialized and all descriptors are undefined, with the exception that samplers with a non-null `pImmutableSamplers` are initialized on allocation. Descriptors also become undefined if the underlying resource or view object is destroyed. Descriptor sets containing undefined descriptors **can** still be bound and used, subject to the following conditions:

- For descriptor set bindings created with the `VK_DESCRIPTOR_BINDING_PARTIALLY_BOUND_BIT` bit set, all descriptors in that binding that are dynamically used **must** have been populated before the descriptor set is consumed.
- For descriptor set bindings created without the `VK_DESCRIPTOR_BINDING_PARTIALLY_BOUND_BIT` bit set, all descriptors in that binding that are statically used **must** have been populated before the descriptor set is consumed.

- Descriptor bindings with descriptor type of VK_DESCRIPTOR_TYPE_INLINE_UNIFORM_BLOCK **can** be undefined when the descriptor set is consumed; though values in that block will be undefined.
- Entries that are not used by a pipeline **can** have undefined descriptors.

If a call to vkAllocateDescriptorSets would cause the total number of descriptor sets allocated from the pool to exceed the value of VkDescriptorPoolCreateInfo::maxSets used to create pAllocateInfo->descriptorPool, then the allocation **may** fail due to lack of space in the descriptor pool. Similarly, the allocation **may** fail due to lack of space if the call to vkAllocateDescriptorSets would cause the number of any given descriptor type to exceed the sum of all the descriptorCount members of each element of VkDescriptorPoolCreateInfo::pPoolSizes with a type equal to that type.

Additionally, the allocation **may** also fail if a call to vkAllocateDescriptorSets would cause the total number of inline uniform block bindings allocated from the pool to exceed the value of VkDescriptorPoolInlineUniformBlockCreateInfo::maxInlineUniformBlockBindings used to create the descriptor pool.

If the allocation fails due to no more space in the descriptor pool, and not because of system or device memory exhaustion, then VK_ERROR_OUT_OF_POOL_MEMORY **must** be returned.

vkAllocateDescriptorSets **can** be used to create multiple descriptor sets. If the creation of any of those descriptor sets fails, then the implementation **must** destroy all successfully created descriptor set objects from this command, set all entries of the pDescriptorSets array to VK_NULL_HANDLE and return the error.

Valid Usage (Implicit)

- VUID-vkAllocateDescriptorSets-device-parameter
  device **must** be a valid VkDevice handle
- VUID-vkAllocateDescriptorSets-pAllocateInfo-parameter
  pAllocateInfo **must** be a valid pointer to a valid VkDescriptorSetAllocateInfo structure
- VUID-vkAllocateDescriptorSets-pDescriptorSets-parameter
  pDescriptorSets **must** be a valid pointer to an array of pAllocateInfo->descriptorSetCount VkDescriptorSet handles
- VUID-vkAllocateDescriptorSets-pAllocateInfo::descriptorSetCount-arraylength
  pAllocateInfo->descriptorSetCount **must** be greater than 0

Host Synchronization

- Host access to pAllocateInfo->descriptorPool **must** be externally synchronized

Return Codes

Success

- VK_SUCCESS

Failure

- VK_ERROR_OUT_OF_HOST_MEMORY
- VK_ERROR_OUT_OF_DEVICE_MEMORY
- VK_ERROR_FRAGMENTED_POOL
- VK_ERROR_OUT_OF_POOL_MEMORY

The VkDescriptorSetAllocateInfo structure is defined as:

```
// Provided by VK_VERSION_1_0
typedef struct VkDescriptorSetAllocateInfo {
    VkStructureType                 sType;
    const void*                     pNext;
    VkDescriptorPool                descriptorPool;
    uint32_t                        descriptorSetCount;
    const VkDescriptorSetLayout*    pSetLayouts;
} VkDescriptorSetAllocateInfo;
```

- sType is a VkStructureType value identifying this structure.
- pNext is NULL or a pointer to a structure extending this structure.
- descriptorPool is the pool which the sets will be allocated from.
- descriptorSetCount determines the number of descriptor sets to be allocated from the pool.
- pSetLayouts is a pointer to an array of descriptor set layouts, with each member specifying how the corresponding descriptor set is allocated.

Valid Usage

- VUID-VkDescriptorSetAllocateInfo-apiVersion-07895
  If the VK_KHR_maintenance1 extension is not enabled and VkPhysicalDeviceProperties ::apiVersion is less than Vulkan 1.1, descriptorSetCount **must** not be greater than the number of sets that are currently available for allocation in descriptorPool
- VUID-VkDescriptorSetAllocateInfo-apiVersion-07896
  If the VK_KHR_maintenance1 extension is not enabled and VkPhysicalDeviceProperties ::apiVersion is less than Vulkan 1.1, descriptorPool **must** have enough free descriptor capacity remaining to allocate the descriptor sets of the specified layouts
- VUID-VkDescriptorSetAllocateInfo-pSetLayouts-03044
  If any element of pSetLayouts was created with the VK_DESCRIPTOR_SET_LAYOUT_CREATE_UPDATE_AFTER_BIND_POOL_BIT bit set, descriptorPool **must** have been created with the VK_DESCRIPTOR_POOL_CREATE_UPDATE_AFTER_BIND_BIT flag set
- VUID-VkDescriptorSetAllocateInfo-pSetLayouts-09380
  If pSetLayouts[i] was created with an element of pBindingFlags that includes VK_DESCRIPTOR_BINDING_VARIABLE_DESCRIPTOR_COUNT_BIT, and VkDescriptorSetVariableDescriptorCountAllocateInfo is included in the pNext chain, and

VkDescriptorSetVariableDescriptorCountAllocateInfo::descriptorSetCount is not zero, then VkDescriptorSetVariableDescriptorCountAllocateInfo::pDescriptorCounts[i] **must** be less than or equal to VkDescriptorSetLayoutBinding::descriptorCount for the corresponding binding used to create pSetLayouts[i]

Valid Usage (Implicit)

- VUID-VkDescriptorSetAllocateInfo-sType-sType
  sType **must** be VK_STRUCTURE_TYPE_DESCRIPTOR_SET_ALLOCATE_INFO
- VUID-VkDescriptorSetAllocateInfo-pNext-pNext
  pNext **must** be NULL or a pointer to a valid instance of VkDescriptorSetVariableDescriptorCountAllocateInfo
- VUID-VkDescriptorSetAllocateInfo-sType-unique
  The sType value of each struct in the pNext chain **must** be unique
- VUID-VkDescriptorSetAllocateInfo-descriptorPool-parameter
  descriptorPool **must** be a valid VkDescriptorPool handle
- VUID-VkDescriptorSetAllocateInfo-pSetLayouts-parameter
  pSetLayouts **must** be a valid pointer to an array of descriptorSetCount valid VkDescriptorSetLayout handles
- VUID-VkDescriptorSetAllocateInfo-descriptorSetCount-arraylength
  descriptorSetCount **must** be greater than 0
- VUID-VkDescriptorSetAllocateInfo-commonparent
  Both of descriptorPool, and the elements of pSetLayouts **must** have been created, allocated, or retrieved from the same VkDevice

If the pNext chain of a VkDescriptorSetAllocateInfo structure includes a VkDescriptorSetVariableDescriptorCountAllocateInfo structure, then that structure includes an array of descriptor counts for variable-sized descriptor bindings, one for each descriptor set being allocated.

The VkDescriptorSetVariableDescriptorCountAllocateInfo structure is defined as:

```
// Provided by VK_VERSION_1_2
typedef struct VkDescriptorSetVariableDescriptorCountAllocateInfo {
    VkStructureType    sType;
    const void*        pNext;
    uint32_t           descriptorSetCount;
    const uint32_t*    pDescriptorCounts;
} VkDescriptorSetVariableDescriptorCountAllocateInfo;
```

- sType is a VkStructureType value identifying this structure.
- pNext is NULL or a pointer to a structure extending this structure.
- descriptorSetCount is zero or the number of elements in pDescriptorCounts.

- `pDescriptorCounts` is a pointer to an array of descriptor counts, with each member specifying the number of descriptors in a variable-sized descriptor binding in the corresponding descriptor set being allocated.

If `descriptorSetCount` is zero or this structure is not included in the `pNext` chain, then the variable lengths are considered to be zero. Otherwise, `pDescriptorCounts`[i] is the number of descriptors in the variable-sized descriptor binding in the corresponding descriptor set layout. If the variable-sized descriptor binding in the corresponding descriptor set layout has a descriptor type of `VK_DESCRIPTOR_TYPE_INLINE_UNIFORM_BLOCK` then `pDescriptorCounts`[i] specifies the binding's capacity in bytes. If VkDescriptorSetAllocateInfo::`pSetLayouts`[i] does not include a variable-sized descriptor binding, then `pDescriptorCounts`[i] is ignored.

Valid Usage

- VUID-VkDescriptorSetVariableDescriptorCountAllocateInfo-descriptorSetCount-03045
  If `descriptorSetCount` is not zero, `descriptorSetCount` **must** equal VkDescriptorSetAllocateInfo::`descriptorSetCount`

Valid Usage (Implicit)

- VUID-VkDescriptorSetVariableDescriptorCountAllocateInfo-sType-sType
  `sType` **must** be `VK_STRUCTURE_TYPE_DESCRIPTOR_SET_VARIABLE_DESCRIPTOR_COUNT_ALLOCATE_INFO`
- VUID-VkDescriptorSetVariableDescriptorCountAllocateInfo-pDescriptorCounts-parameter
  If `descriptorSetCount` is not `0`, `pDescriptorCounts` **must** be a valid pointer to an array of `descriptorSetCount` `uint32_t` values

To free allocated descriptor sets, call:

```
// Provided by VK_VERSION_1_0
VkResult vkFreeDescriptorSets(
    VkDevice                                    device,
    VkDescriptorPool                            descriptorPool,
    uint32_t                                    descriptorSetCount,
    const VkDescriptorSet*                      pDescriptorSets);
```

- `device` is the logical device that owns the descriptor pool.
- `descriptorPool` is the descriptor pool from which the descriptor sets were allocated.
- `descriptorSetCount` is the number of elements in the `pDescriptorSets` array.
- `pDescriptorSets` is a pointer to an array of handles to VkDescriptorSet objects.

After calling `vkFreeDescriptorSets`, all descriptor sets in `pDescriptorSets` are invalid.

Valid Usage

- VUID-vkFreeDescriptorSets-pDescriptorSets-00309
  All submitted commands that refer to any element of `pDescriptorSets` **must** have completed execution
- VUID-vkFreeDescriptorSets-pDescriptorSets-00310
  `pDescriptorSets` **must** be a valid pointer to an array of `descriptorSetCount` `VkDescriptorSet` handles, each element of which **must** either be a valid handle or VK_NULL_HANDLE
- VUID-vkFreeDescriptorSets-descriptorPool-00312
  `descriptorPool` **must** have been created with the `VK_DESCRIPTOR_POOL_CREATE_FREE_DESCRIPTOR_SET_BIT` flag

Valid Usage (Implicit)

- VUID-vkFreeDescriptorSets-device-parameter
  `device` **must** be a valid VkDevice handle
- VUID-vkFreeDescriptorSets-descriptorPool-parameter
  `descriptorPool` **must** be a valid VkDescriptorPool handle
- VUID-vkFreeDescriptorSets-descriptorSetCount-arraylength
  `descriptorSetCount` **must** be greater than `0`
- VUID-vkFreeDescriptorSets-descriptorPool-parent
  `descriptorPool` **must** have been created, allocated, or retrieved from `device`
- VUID-vkFreeDescriptorSets-pDescriptorSets-parent
  Each element of `pDescriptorSets` that is a valid handle **must** have been created, allocated, or retrieved from `descriptorPool`

Host Synchronization

- Host access to `descriptorPool` **must** be externally synchronized
- Host access to each member of `pDescriptorSets` **must** be externally synchronized

Return Codes

Success

- `VK_SUCCESS`

Failure

None

To return all descriptor sets allocated from a given pool to the pool, rather than freeing individual descriptor sets, call:

```
// Provided by VK_VERSION_1_0
VkResult vkResetDescriptorPool(
    VkDevice                                    device,
    VkDescriptorPool                            descriptorPool,
    VkDescriptorPoolResetFlags                  flags);
```

- `device` is the logical device that owns the descriptor pool.
- `descriptorPool` is the descriptor pool to be reset.
- `flags` is reserved for future use.

Resetting a descriptor pool recycles all of the resources from all of the descriptor sets allocated from the descriptor pool back to the descriptor pool, and the descriptor sets are implicitly freed.

Valid Usage

- VUID-vkResetDescriptorPool-descriptorPool-00313
  All uses of `descriptorPool` (via any allocated descriptor sets) **must** have completed execution

Valid Usage (Implicit)

- VUID-vkResetDescriptorPool-device-parameter
  `device` **must** be a valid VkDevice handle
- VUID-vkResetDescriptorPool-descriptorPool-parameter
  `descriptorPool` **must** be a valid VkDescriptorPool handle
- VUID-vkResetDescriptorPool-flags-zerobitmask
  `flags` **must** be `0`
- VUID-vkResetDescriptorPool-descriptorPool-parent
  `descriptorPool` **must** have been created, allocated, or retrieved from `device`

Host Synchronization

- Host access to `descriptorPool` **must** be externally synchronized
- Host access to any `VkDescriptorSet` objects allocated from `descriptorPool` **must** be externally synchronized

Return Codes

Success

- `VK_SUCCESS`

Failure

None

```
// Provided by VK_VERSION_1_0
typedef VkFlags VkDescriptorPoolResetFlags;
```

VkDescriptorPoolResetFlags is a bitmask type for setting a mask, but is currently reserved for future use.

14.2.4. Descriptor Set Updates

Once allocated, descriptor sets **can** be updated with a combination of write and copy operations. To update descriptor sets, call:

```
// Provided by VK_VERSION_1_0
void vkUpdateDescriptorSets(
    VkDevice                                    device,
    uint32_t                                    descriptorWriteCount,
    const VkWriteDescriptorSet*                 pDescriptorWrites,
    uint32_t                                    descriptorCopyCount,
    const VkCopyDescriptorSet*                  pDescriptorCopies);
```

- device is the logical device that updates the descriptor sets.
- descriptorWriteCount is the number of elements in the pDescriptorWrites array.
- pDescriptorWrites is a pointer to an array of VkWriteDescriptorSet structures describing the descriptor sets to write to.
- descriptorCopyCount is the number of elements in the pDescriptorCopies array.
- pDescriptorCopies is a pointer to an array of VkCopyDescriptorSet structures describing the descriptor sets to copy between.

The operations described by pDescriptorWrites are performed first, followed by the operations described by pDescriptorCopies. Within each array, the operations are performed in the order they appear in the array.

Each element in the pDescriptorWrites array describes an operation updating the descriptor set using descriptors for resources specified in the structure.

Each element in the pDescriptorCopies array is a VkCopyDescriptorSet structure describing an operation copying descriptors between sets.

If the dstSet member of any element of pDescriptorWrites or pDescriptorCopies is bound, accessed, or modified by any command that was recorded to a command buffer which is currently in the recording or executable state, and any of the descriptor bindings that are updated were not created with the VK_DESCRIPTOR_BINDING_UPDATE_AFTER_BIND_BIT or VK_DESCRIPTOR_BINDING_UPDATE_UNUSED_WHILE_PENDING_BIT bits set, that command buffer becomes

invalid.

Valid Usage

- VUID-vkUpdateDescriptorSets-pDescriptorWrites-06236
  For each element i where pDescriptorWrites[i].descriptorType is VK_DESCRIPTOR_TYPE_UNIFORM_TEXEL_BUFFER or VK_DESCRIPTOR_TYPE_STORAGE_TEXEL_BUFFER, elements of the pTexelBufferView member of pDescriptorWrites[i] **must** have been created on device
- VUID-vkUpdateDescriptorSets-pDescriptorWrites-06237
  For each element i where pDescriptorWrites[i].descriptorType is VK_DESCRIPTOR_TYPE_UNIFORM_BUFFER, VK_DESCRIPTOR_TYPE_STORAGE_BUFFER, VK_DESCRIPTOR_TYPE_UNIFORM_BUFFER_DYNAMIC, or VK_DESCRIPTOR_TYPE_STORAGE_BUFFER_DYNAMIC, the buffer member of any element of the pBufferInfo member of pDescriptorWrites[i] **must** have been created on device
- VUID-vkUpdateDescriptorSets-pDescriptorWrites-06238
  For each element i where pDescriptorWrites[i].descriptorType is VK_DESCRIPTOR_TYPE_SAMPLER or VK_DESCRIPTOR_TYPE_COMBINED_IMAGE_SAMPLER, and dstSet was not allocated with a layout that included immutable samplers for dstBinding with descriptorType, the sampler member of any element of the pImageInfo member of pDescriptorWrites[i] **must** have been created on device
- VUID-vkUpdateDescriptorSets-pDescriptorWrites-06239
  For each element i where pDescriptorWrites[i].descriptorType is VK_DESCRIPTOR_TYPE_SAMPLED_IMAGE, VK_DESCRIPTOR_TYPE_STORAGE_IMAGE, VK_DESCRIPTOR_TYPE_INPUT_ATTACHMENT, or VK_DESCRIPTOR_TYPE_COMBINED_IMAGE_SAMPLER the imageView member of any element of pDescriptorWrites[i] **must** have been created on device
- VUID-vkUpdateDescriptorSets-pDescriptorWrites-06493
  For each element i where pDescriptorWrites[i].descriptorType is VK_DESCRIPTOR_TYPE_SAMPLER, VK_DESCRIPTOR_TYPE_COMBINED_IMAGE_SAMPLER, VK_DESCRIPTOR_TYPE_SAMPLED_IMAGE, VK_DESCRIPTOR_TYPE_STORAGE_IMAGE, or VK_DESCRIPTOR_TYPE_INPUT_ATTACHMENT, pDescriptorWrites[i].pImageInfo **must** be a valid pointer to an array of pDescriptorWrites[i].descriptorCount valid VkDescriptorImageInfo structures
- VUID-vkUpdateDescriptorSets-None-03047
  The dstSet member of each element of pDescriptorWrites or pDescriptorCopies for bindings which were created without the VK_DESCRIPTOR_BINDING_UPDATE_AFTER_BIND_BIT or VK_DESCRIPTOR_BINDING_UPDATE_UNUSED_WHILE_PENDING_BIT bits set **must** not be used by any command that was recorded to a command buffer which is in the pending state
- VUID-vkUpdateDescriptorSets-pDescriptorWrites-06993
  Host access to pDescriptorWrites[i].dstSet and pDescriptorCopies[i].dstSet **must** be externally synchronized unless explicitly denoted otherwise for specific flags

Valid Usage (Implicit)

- VUID-vkUpdateDescriptorSets-device-parameter
  `device` **must** be a valid VkDevice handle
- VUID-vkUpdateDescriptorSets-pDescriptorWrites-parameter
  If `descriptorWriteCount` is not `0`, `pDescriptorWrites` **must** be a valid pointer to an array of `descriptorWriteCount` valid VkWriteDescriptorSet structures
- VUID-vkUpdateDescriptorSets-pDescriptorCopies-parameter
  If `descriptorCopyCount` is not `0`, `pDescriptorCopies` **must** be a valid pointer to an array of `descriptorCopyCount` valid VkCopyDescriptorSet structures

The `VkWriteDescriptorSet` structure is defined as:

```
// Provided by VK_VERSION_1_0
typedef struct VkWriteDescriptorSet {
    VkStructureType                  sType;
    const void*                      pNext;
    VkDescriptorSet                  dstSet;
    uint32_t                         dstBinding;
    uint32_t                         dstArrayElement;
    uint32_t                         descriptorCount;
    VkDescriptorType                 descriptorType;
    const VkDescriptorImageInfo*     pImageInfo;
    const VkDescriptorBufferInfo*    pBufferInfo;
    const VkBufferView*              pTexelBufferView;
} VkWriteDescriptorSet;
```

- `sType` is a VkStructureType value identifying this structure.
- `pNext` is `NULL` or a pointer to a structure extending this structure.
- `dstSet` is the destination descriptor set to update.
- `dstBinding` is the descriptor binding within that set.
- `dstArrayElement` is the starting element in that array. If the descriptor binding identified by `dstSet` and `dstBinding` has a descriptor type of `VK_DESCRIPTOR_TYPE_INLINE_UNIFORM_BLOCK` then `dstArrayElement` specifies the starting byte offset within the binding.
- `descriptorCount` is the number of descriptors to update. If the descriptor binding identified by `dstSet` and `dstBinding` has a descriptor type of `VK_DESCRIPTOR_TYPE_INLINE_UNIFORM_BLOCK`, then `descriptorCount` specifies the number of bytes to update. Otherwise, `descriptorCount` is one of
  - the number of elements in `pImageInfo`
  - the number of elements in `pBufferInfo`
  - the number of elements in `pTexelBufferView`
  - a value matching the `dataSize` member of a VkWriteDescriptorSetInlineUniformBlock structure in the `pNext` chain

- `descriptorType` is a VkDescriptorType specifying the type of each descriptor in `pImageInfo`, `pBufferInfo`, or `pTexelBufferView`, as described below. It **must** be the same type as the `descriptorType` specified in `VkDescriptorSetLayoutBinding` for `dstSet` at `dstBinding`. The type of the descriptor also controls which array the descriptors are taken from.
- `pImageInfo` is a pointer to an array of VkDescriptorImageInfo structures or is ignored, as described below.
- `pBufferInfo` is a pointer to an array of VkDescriptorBufferInfo structures or is ignored, as described below.
- `pTexelBufferView` is a pointer to an array of VkBufferView handles as described in the Buffer Views section or is ignored, as described below.

Only one of `pImageInfo`, `pBufferInfo`, or `pTexelBufferView` members is used according to the descriptor type specified in the `descriptorType` member of the containing `VkWriteDescriptorSet` structure, or none of them in case `descriptorType` is `VK_DESCRIPTOR_TYPE_INLINE_UNIFORM_BLOCK`, in which case the source data for the descriptor writes is taken from the VkWriteDescriptorSetInlineUniformBlock structure included in the `pNext` chain of `VkWriteDescriptorSet`, as specified below.

Consecutive Binding Updates

If the `dstBinding` has fewer than `descriptorCount` array elements remaining starting from `dstArrayElement`, then the remainder will be used to update the subsequent binding - `dstBinding`+1 starting at array element zero. If a binding has a `descriptorCount` of zero, it is skipped. This behavior applies recursively, with the update affecting consecutive bindings as needed to update all `descriptorCount` descriptors. Consecutive bindings **must** have identical VkDescriptorType, VkShaderStageFlags, VkDescriptorBindingFlagBits, and immutable samplers references.

NOTE

The same behavior applies to bindings with a descriptor type of `VK_DESCRIPTOR_TYPE_INLINE_UNIFORM_BLOCK` where `descriptorCount` specifies the number of bytes to update while `dstArrayElement` specifies the starting byte offset, thus in this case if the `dstBinding` has a smaller byte size than the sum of `dstArrayElement` and `descriptorCount`, then the remainder will be used to update the subsequent binding - `dstBinding`+1 starting at offset zero. This falls out as a special case of the above rule.

Valid Usage

- VUID-VkWriteDescriptorSet-dstBinding-00315
  `dstBinding` **must** be less than or equal to the maximum value of `binding` of all VkDescriptorSetLayoutBinding structures specified when `dstSet`'s descriptor set layout was created
- VUID-VkWriteDescriptorSet-dstBinding-00316
  `dstBinding` **must** be a binding with a non-zero `descriptorCount`
- VUID-VkWriteDescriptorSet-dstBinding-10009
  `dstBinding` **must** be a binding with a non-zero VkDescriptorSetLayoutCreateInfo ::`bindingCount`

- VUID-VkWriteDescriptorSet-descriptorCount-00317
  All consecutive bindings updated via a single VkWriteDescriptorSet structure, except those with a descriptorCount of zero, **must** have identical descriptorType and stageFlags
- VUID-VkWriteDescriptorSet-descriptorCount-00318
  All consecutive bindings updated via a single VkWriteDescriptorSet structure, except those with a descriptorCount of zero, **must** all either use immutable samplers or **must** all not use immutable samplers
- VUID-VkWriteDescriptorSet-descriptorType-00319
  descriptorType **must** match the type of dstBinding within dstSet
- VUID-VkWriteDescriptorSet-dstSet-00320
  dstSet **must** be a valid VkDescriptorSet handle
- VUID-VkWriteDescriptorSet-dstArrayElement-00321
  The sum of dstArrayElement and descriptorCount **must** be less than or equal to the number of array elements in the descriptor set binding specified by dstBinding, and all applicable consecutive bindings
- VUID-VkWriteDescriptorSet-descriptorType-02219
  If descriptorType is VK_DESCRIPTOR_TYPE_INLINE_UNIFORM_BLOCK, dstArrayElement **must** be an integer multiple of 4
- VUID-VkWriteDescriptorSet-descriptorType-02220
  If descriptorType is VK_DESCRIPTOR_TYPE_INLINE_UNIFORM_BLOCK, descriptorCount **must** be an integer multiple of 4
- VUID-VkWriteDescriptorSet-descriptorType-02994
  If descriptorType is VK_DESCRIPTOR_TYPE_UNIFORM_TEXEL_BUFFER or VK_DESCRIPTOR_TYPE_STORAGE_TEXEL_BUFFER, each element of pTexelBufferView **must** be either a valid VkBufferView handle or VK_NULL_HANDLE
- VUID-VkWriteDescriptorSet-descriptorType-02995
  If descriptorType is VK_DESCRIPTOR_TYPE_UNIFORM_TEXEL_BUFFER or VK_DESCRIPTOR_TYPE_STORAGE_TEXEL_BUFFER and the nullDescriptor feature is not enabled, each element of pTexelBufferView **must** not be VK_NULL_HANDLE
- VUID-VkWriteDescriptorSet-descriptorType-00324
  If descriptorType is VK_DESCRIPTOR_TYPE_UNIFORM_BUFFER, VK_DESCRIPTOR_TYPE_STORAGE_BUFFER, VK_DESCRIPTOR_TYPE_UNIFORM_BUFFER_DYNAMIC, or VK_DESCRIPTOR_TYPE_STORAGE_BUFFER_DYNAMIC, pBufferInfo **must** be a valid pointer to an array of descriptorCount valid VkDescriptorBufferInfo structures
- VUID-VkWriteDescriptorSet-descriptorType-00325
  If descriptorType is VK_DESCRIPTOR_TYPE_SAMPLER or VK_DESCRIPTOR_TYPE_COMBINED_IMAGE_SAMPLER, and dstSet was not allocated with a layout that included immutable samplers for dstBinding with descriptorType, the sampler member of each element of pImageInfo **must** be a valid VkSampler object
- VUID-VkWriteDescriptorSet-descriptorType-02996
  If descriptorType is VK_DESCRIPTOR_TYPE_COMBINED_IMAGE_SAMPLER, VK_DESCRIPTOR_TYPE_SAMPLED_IMAGE, or VK_DESCRIPTOR_TYPE_STORAGE_IMAGE, the imageView member of each element of pImageInfo **must** be either a valid VkImageView handle or

VK_NULL_HANDLE

- VUID-VkWriteDescriptorSet-descriptorType-02997
  If descriptorType is VK_DESCRIPTOR_TYPE_COMBINED_IMAGE_SAMPLER, VK_DESCRIPTOR_TYPE_SAMPLED_IMAGE, or VK_DESCRIPTOR_TYPE_STORAGE_IMAGE, and the nullDescriptor feature is not enabled, the imageView member of each element of pImageInfo **must** not be VK_NULL_HANDLE
- VUID-VkWriteDescriptorSet-descriptorType-07683
  If descriptorType is VK_DESCRIPTOR_TYPE_INPUT_ATTACHMENT, the imageView member of each element of pImageInfo **must** not be VK_NULL_HANDLE
- VUID-VkWriteDescriptorSet-descriptorType-02221
  If descriptorType is VK_DESCRIPTOR_TYPE_INLINE_UNIFORM_BLOCK, the pNext chain **must** include a VkWriteDescriptorSetInlineUniformBlock structure whose dataSize member equals descriptorCount
- VUID-VkWriteDescriptorSet-descriptorType-00327
  If descriptorType is VK_DESCRIPTOR_TYPE_UNIFORM_BUFFER or VK_DESCRIPTOR_TYPE_UNIFORM_BUFFER_DYNAMIC, the offset member of each element of pBufferInfo **must** be a multiple of VkPhysicalDeviceLimits::minUniformBufferOffsetAlignment
- VUID-VkWriteDescriptorSet-descriptorType-00328
  If descriptorType is VK_DESCRIPTOR_TYPE_STORAGE_BUFFER or VK_DESCRIPTOR_TYPE_STORAGE_BUFFER_DYNAMIC, the offset member of each element of pBufferInfo **must** be a multiple of VkPhysicalDeviceLimits::minStorageBufferOffsetAlignment
- VUID-VkWriteDescriptorSet-descriptorType-00329
  If descriptorType is VK_DESCRIPTOR_TYPE_UNIFORM_BUFFER, VK_DESCRIPTOR_TYPE_UNIFORM_BUFFER_DYNAMIC, VK_DESCRIPTOR_TYPE_STORAGE_BUFFER, or VK_DESCRIPTOR_TYPE_STORAGE_BUFFER_DYNAMIC, and the buffer member of any element of pBufferInfo is the handle of a non-sparse buffer, then that buffer **must** be bound completely and contiguously to a single VkDeviceMemory object
- VUID-VkWriteDescriptorSet-descriptorType-00330
  If descriptorType is VK_DESCRIPTOR_TYPE_UNIFORM_BUFFER or VK_DESCRIPTOR_TYPE_UNIFORM_BUFFER_DYNAMIC, the buffer member of each element of pBufferInfo **must** have been created with VK_BUFFER_USAGE_UNIFORM_BUFFER_BIT set
- VUID-VkWriteDescriptorSet-descriptorType-00331
  If descriptorType is VK_DESCRIPTOR_TYPE_STORAGE_BUFFER or VK_DESCRIPTOR_TYPE_STORAGE_BUFFER_DYNAMIC, the buffer member of each element of pBufferInfo **must** have been created with VK_BUFFER_USAGE_STORAGE_BUFFER_BIT set
- VUID-VkWriteDescriptorSet-descriptorType-00332
  If descriptorType is VK_DESCRIPTOR_TYPE_UNIFORM_BUFFER or VK_DESCRIPTOR_TYPE_UNIFORM_BUFFER_DYNAMIC, the range member of each element of pBufferInfo, or the effective range if range is VK_WHOLE_SIZE, **must** be less than or equal to VkPhysicalDeviceLimits::maxUniformBufferRange
- VUID-VkWriteDescriptorSet-descriptorType-00333
  If descriptorType is VK_DESCRIPTOR_TYPE_STORAGE_BUFFER or

VK_DESCRIPTOR_TYPE_STORAGE_BUFFER_DYNAMIC, the range member of each element of pBufferInfo, or the effective range if range is VK_WHOLE_SIZE, **must** be less than or equal to VkPhysicalDeviceLimits::maxStorageBufferRange

- VUID-VkWriteDescriptorSet-descriptorType-08765
  If descriptorType is VK_DESCRIPTOR_TYPE_UNIFORM_TEXEL_BUFFER, the pTexelBufferView buffer view usage **must** include VK_BUFFER_USAGE_UNIFORM_TEXEL_BUFFER_BIT
- VUID-VkWriteDescriptorSet-descriptorType-08766
  If descriptorType is VK_DESCRIPTOR_TYPE_STORAGE_TEXEL_BUFFER, the pTexelBufferView buffer view usage **must** include VK_BUFFER_USAGE_STORAGE_TEXEL_BUFFER_BIT
- VUID-VkWriteDescriptorSet-descriptorType-00336
  If descriptorType is VK_DESCRIPTOR_TYPE_STORAGE_IMAGE or VK_DESCRIPTOR_TYPE_INPUT_ATTACHMENT, the imageView member of each element of pImageInfo **must** have been created with the identity swizzle
- VUID-VkWriteDescriptorSet-descriptorType-00337
  If descriptorType is VK_DESCRIPTOR_TYPE_SAMPLED_IMAGE or VK_DESCRIPTOR_TYPE_COMBINED_IMAGE_SAMPLER, the imageView member of each element of pImageInfo **must** have been created with VK_IMAGE_USAGE_SAMPLED_BIT set
- VUID-VkWriteDescriptorSet-descriptorType-04149
  If descriptorType is VK_DESCRIPTOR_TYPE_SAMPLED_IMAGE the imageLayout member of each element of pImageInfo **must** be a member of the list given in Sampled Image
- VUID-VkWriteDescriptorSet-descriptorType-04150
  If descriptorType is VK_DESCRIPTOR_TYPE_COMBINED_IMAGE_SAMPLER the imageLayout member of each element of pImageInfo **must** be a member of the list given in Combined Image Sampler
- VUID-VkWriteDescriptorSet-descriptorType-04151
  If descriptorType is VK_DESCRIPTOR_TYPE_INPUT_ATTACHMENT the imageLayout member of each element of pImageInfo **must** be a member of the list given in Input Attachment
- VUID-VkWriteDescriptorSet-descriptorType-04152
  If descriptorType is VK_DESCRIPTOR_TYPE_STORAGE_IMAGE the imageLayout member of each element of pImageInfo **must** be a member of the list given in Storage Image
- VUID-VkWriteDescriptorSet-descriptorType-00338
  If descriptorType is VK_DESCRIPTOR_TYPE_INPUT_ATTACHMENT, the imageView member of each element of pImageInfo **must** have been created with VK_IMAGE_USAGE_INPUT_ATTACHMENT_BIT set
- VUID-VkWriteDescriptorSet-descriptorType-00339
  If descriptorType is VK_DESCRIPTOR_TYPE_STORAGE_IMAGE, the imageView member of each element of pImageInfo **must** have been created with VK_IMAGE_USAGE_STORAGE_BIT set
- VUID-VkWriteDescriptorSet-descriptorType-02752
  If descriptorType is VK_DESCRIPTOR_TYPE_SAMPLER, then dstSet **must** not have been allocated with a layout that included immutable samplers for dstBinding

Valid Usage (Implicit)

- VUID-VkWriteDescriptorSet-sType-sType
  `sType` **must** be `VK_STRUCTURE_TYPE_WRITE_DESCRIPTOR_SET`
- VUID-VkWriteDescriptorSet-pNext-pNext
  `pNext` **must** be `NULL` or a pointer to a valid instance of VkWriteDescriptorSetInlineUniformBlock
- VUID-VkWriteDescriptorSet-sType-unique
  The `sType` value of each struct in the `pNext` chain **must** be unique
- VUID-VkWriteDescriptorSet-descriptorType-parameter
  `descriptorType` **must** be a valid VkDescriptorType value
- VUID-VkWriteDescriptorSet-descriptorCount-arraylength
  `descriptorCount` **must** be greater than `0`
- VUID-VkWriteDescriptorSet-commonparent
  Both of `dstSet`, and the elements of `pTexelBufferView` that are valid handles of non-ignored parameters **must** have been created, allocated, or retrieved from the same VkDevice

The type of descriptors in a descriptor set is specified by VkWriteDescriptorSet::`descriptorType`, which **must** be one of the values:

```
// Provided by VK_VERSION_1_0
typedef enum VkDescriptorType {
    VK_DESCRIPTOR_TYPE_SAMPLER = 0,
    VK_DESCRIPTOR_TYPE_COMBINED_IMAGE_SAMPLER = 1,
    VK_DESCRIPTOR_TYPE_SAMPLED_IMAGE = 2,
    VK_DESCRIPTOR_TYPE_STORAGE_IMAGE = 3,
    VK_DESCRIPTOR_TYPE_UNIFORM_TEXEL_BUFFER = 4,
    VK_DESCRIPTOR_TYPE_STORAGE_TEXEL_BUFFER = 5,
    VK_DESCRIPTOR_TYPE_UNIFORM_BUFFER = 6,
    VK_DESCRIPTOR_TYPE_STORAGE_BUFFER = 7,
    VK_DESCRIPTOR_TYPE_UNIFORM_BUFFER_DYNAMIC = 8,
    VK_DESCRIPTOR_TYPE_STORAGE_BUFFER_DYNAMIC = 9,
    VK_DESCRIPTOR_TYPE_INPUT_ATTACHMENT = 10,
  // Provided by VK_VERSION_1_3
    VK_DESCRIPTOR_TYPE_INLINE_UNIFORM_BLOCK = 1000138000,
} VkDescriptorType;
```

- `VK_DESCRIPTOR_TYPE_SAMPLER` specifies a sampler descriptor.
- `VK_DESCRIPTOR_TYPE_COMBINED_IMAGE_SAMPLER` specifies a combined image sampler descriptor.
- `VK_DESCRIPTOR_TYPE_SAMPLED_IMAGE` specifies a sampled image descriptor.
- `VK_DESCRIPTOR_TYPE_STORAGE_IMAGE` specifies a storage image descriptor.
- `VK_DESCRIPTOR_TYPE_UNIFORM_TEXEL_BUFFER` specifies a uniform texel buffer descriptor.
- `VK_DESCRIPTOR_TYPE_STORAGE_TEXEL_BUFFER` specifies a storage texel buffer descriptor.

- VK_DESCRIPTOR_TYPE_UNIFORM_BUFFER specifies a uniform buffer descriptor.
- VK_DESCRIPTOR_TYPE_STORAGE_BUFFER specifies a storage buffer descriptor.
- VK_DESCRIPTOR_TYPE_UNIFORM_BUFFER_DYNAMIC specifies a dynamic uniform buffer descriptor.
- VK_DESCRIPTOR_TYPE_STORAGE_BUFFER_DYNAMIC specifies a dynamic storage buffer descriptor.
- VK_DESCRIPTOR_TYPE_INPUT_ATTACHMENT specifies an input attachment descriptor.
- VK_DESCRIPTOR_TYPE_INLINE_UNIFORM_BLOCK specifies an inline uniform block.

When a descriptor set is updated via elements of VkWriteDescriptorSet, members of pImageInfo, pBufferInfo and pTexelBufferView are only accessed by the implementation when they correspond to descriptor type being defined - otherwise they are ignored. The members accessed are as follows for each descriptor type:

- For VK_DESCRIPTOR_TYPE_SAMPLER, only the sampler member of each element of VkWriteDescriptorSet::pImageInfo is accessed.
- For VK_DESCRIPTOR_TYPE_SAMPLED_IMAGE, VK_DESCRIPTOR_TYPE_STORAGE_IMAGE, or VK_DESCRIPTOR_TYPE_INPUT_ATTACHMENT, only the imageView and imageLayout members of each element of VkWriteDescriptorSet::pImageInfo are accessed.
- For VK_DESCRIPTOR_TYPE_COMBINED_IMAGE_SAMPLER, all members of each element of VkWriteDescriptorSet::pImageInfo are accessed.
- For VK_DESCRIPTOR_TYPE_UNIFORM_BUFFER, VK_DESCRIPTOR_TYPE_STORAGE_BUFFER, VK_DESCRIPTOR_TYPE_UNIFORM_BUFFER_DYNAMIC, or VK_DESCRIPTOR_TYPE_STORAGE_BUFFER_DYNAMIC, all members of each element of VkWriteDescriptorSet::pBufferInfo are accessed.
- For VK_DESCRIPTOR_TYPE_UNIFORM_TEXEL_BUFFER or VK_DESCRIPTOR_TYPE_STORAGE_TEXEL_BUFFER, each element of VkWriteDescriptorSet::pTexelBufferView is accessed.

When updating descriptors with a descriptorType of VK_DESCRIPTOR_TYPE_INLINE_UNIFORM_BLOCK, none of the pImageInfo, pBufferInfo, or pTexelBufferView members are accessed, instead the source data of the descriptor update operation is taken from the VkWriteDescriptorSetInlineUniformBlock structure in the pNext chain of VkWriteDescriptorSet.

The VkDescriptorBufferInfo structure is defined as:

```
// Provided by VK_VERSION_1_0
typedef struct VkDescriptorBufferInfo {
    VkBuffer        buffer;
    VkDeviceSize    offset;
    VkDeviceSize    range;
} VkDescriptorBufferInfo;
```

- buffer is the buffer resource.
- offset is the offset in bytes from the start of buffer. Access to buffer memory via this descriptor uses addressing that is relative to this starting offset.
- range is the size in bytes that is used for this descriptor update, or VK_WHOLE_SIZE to use the range from offset to the end of the buffer.

NOTE

When setting `range` to `VK_WHOLE_SIZE`, the effective range **must** not be larger than the maximum range for the descriptor type (`maxUniformBufferRange` or `maxStorageBufferRange`). This means that `VK_WHOLE_SIZE` is not typically useful in the common case where uniform buffer descriptors are suballocated from a buffer that is much larger than `maxUniformBufferRange`.

For `VK_DESCRIPTOR_TYPE_UNIFORM_BUFFER_DYNAMIC` and `VK_DESCRIPTOR_TYPE_STORAGE_BUFFER_DYNAMIC` descriptor types, `offset` is the base offset from which the dynamic offset is applied and `range` is the static size used for all dynamic offsets.

When `range` is `VK_WHOLE_SIZE` the effective range is calculated at vkUpdateDescriptorSets is by taking the size of `buffer` minus the `offset`.

Valid Usage

- VUID-VkDescriptorBufferInfo-offset-00340
  `offset` **must** be less than the size of `buffer`
- VUID-VkDescriptorBufferInfo-range-00341
  If `range` is not equal to `VK_WHOLE_SIZE`, `range` **must** be greater than `0`
- VUID-VkDescriptorBufferInfo-range-00342
  If `range` is not equal to `VK_WHOLE_SIZE`, `range` **must** be less than or equal to the size of `buffer` minus `offset`
- VUID-VkDescriptorBufferInfo-buffer-02998
  If the `nullDescriptor` feature is not enabled, `buffer` **must** not be VK_NULL_HANDLE

Valid Usage (Implicit)

- VUID-VkDescriptorBufferInfo-buffer-parameter
  If `buffer` is not VK_NULL_HANDLE, `buffer` **must** be a valid VkBuffer handle

The `VkDescriptorImageInfo` structure is defined as:

```
// Provided by VK_VERSION_1_0
typedef struct VkDescriptorImageInfo {
    VkSampler        sampler;
    VkImageView      imageView;
    VkImageLayout    imageLayout;
} VkDescriptorImageInfo;
```

- `sampler` is a sampler handle, and is used in descriptor updates for types `VK_DESCRIPTOR_TYPE_SAMPLER` and `VK_DESCRIPTOR_TYPE_COMBINED_IMAGE_SAMPLER` if the binding being updated does not use immutable samplers.
- `imageView` is an image view handle, and is used in descriptor updates for types `VK_DESCRIPTOR_TYPE_SAMPLED_IMAGE`, `VK_DESCRIPTOR_TYPE_STORAGE_IMAGE`,

VK_DESCRIPTOR_TYPE_COMBINED_IMAGE_SAMPLER, and VK_DESCRIPTOR_TYPE_INPUT_ATTACHMENT.

- imageLayout is the layout that the image subresources accessible from imageView will be in at the time this descriptor is accessed. imageLayout is used in descriptor updates for types VK_DESCRIPTOR_TYPE_SAMPLED_IMAGE, VK_DESCRIPTOR_TYPE_STORAGE_IMAGE, VK_DESCRIPTOR_TYPE_COMBINED_IMAGE_SAMPLER, and VK_DESCRIPTOR_TYPE_INPUT_ATTACHMENT.

Members of VkDescriptorImageInfo that are not used in an update (as described above) are ignored.

Valid Usage

- VUID-VkDescriptorImageInfo-imageView-06712
  imageView **must** not be a 2D array image view created from a 3D image
- VUID-VkDescriptorImageInfo-descriptorType-06713
  imageView **must** not be a 2D view created from a 3D image
- VUID-VkDescriptorImageInfo-descriptorType-06714
  imageView **must** not be a 2D view created from a 3D image
- VUID-VkDescriptorImageInfo-imageView-01976
  If imageView is created from a depth/stencil image, the aspectMask used to create the imageView **must** include either VK_IMAGE_ASPECT_DEPTH_BIT or VK_IMAGE_ASPECT_STENCIL_BIT but not both
- VUID-VkDescriptorImageInfo-imageLayout-09425
  If imageLayout is VK_IMAGE_LAYOUT_COLOR_ATTACHMENT_OPTIMAL, then the aspectMask used to create imageView **must** not include either VK_IMAGE_ASPECT_DEPTH_BIT or VK_IMAGE_ASPECT_STENCIL_BIT
- VUID-VkDescriptorImageInfo-imageLayout-09426
  If imageLayout is VK_IMAGE_LAYOUT_DEPTH_READ_ONLY_STENCIL_ATTACHMENT_OPTIMAL, VK_IMAGE_LAYOUT_DEPTH_ATTACHMENT_STENCIL_READ_ONLY_OPTIMAL, VK_IMAGE_LAYOUT_DEPTH_READ_ONLY_OPTIMAL, VK_IMAGE_LAYOUT_DEPTH_ATTACHMENT_OPTIMAL, VK_IMAGE_LAYOUT_STENCIL_READ_ONLY_OPTIMAL, VK_IMAGE_LAYOUT_STENCIL_ATTACHMENT_OPTIMAL, VK_IMAGE_LAYOUT_DEPTH_STENCIL_ATTACHMENT_OPTIMAL or VK_IMAGE_LAYOUT_DEPTH_STENCIL_READ_ONLY_OPTIMAL, then the aspectMask used to create imageView **must** not include VK_IMAGE_ASPECT_COLOR_BIT
- VUID-VkDescriptorImageInfo-imageLayout-00344
  imageLayout **must** match the actual VkImageLayout of each subresource accessible from imageView at the time this descriptor is accessed as defined by the image layout matching rules
- VUID-VkDescriptorImageInfo-sampler-01564
  If sampler is used and the VkFormat of the image is a multi-planar format, the image **must** have been created with VK_IMAGE_CREATE_MUTABLE_FORMAT_BIT, and the aspectMask of the imageView **must** be a valid multi-planar aspect mask bit

Valid Usage (Implicit)

- VUID-VkDescriptorImageInfo-commonparent
  Both of `imageView`, and `sampler` that are valid handles of non-ignored parameters **must** have been created, allocated, or retrieved from the same VkDevice

If the `descriptorType` member of VkWriteDescriptorSet is `VK_DESCRIPTOR_TYPE_INLINE_UNIFORM_BLOCK` then the data to write to the descriptor set is specified through a `VkWriteDescriptorSetInlineUniformBlock` structure included in the `pNext` chain of `VkWriteDescriptorSet`.

The `VkWriteDescriptorSetInlineUniformBlock` structure is defined as:

```
// Provided by VK_VERSION_1_3
typedef struct VkWriteDescriptorSetInlineUniformBlock {
    VkStructureType    sType;
    const void*        pNext;
    uint32_t           dataSize;
    const void*        pData;
} VkWriteDescriptorSetInlineUniformBlock;
```

- `sType` is a VkStructureType value identifying this structure.
- `pNext` is `NULL` or a pointer to a structure extending this structure.
- `dataSize` is the number of bytes of inline uniform block data pointed to by `pData`.
- `pData` is a pointer to `dataSize` number of bytes of data to write to the inline uniform block.

Valid Usage

- VUID-VkWriteDescriptorSetInlineUniformBlock-dataSize-02222
  `dataSize` **must** be an integer multiple of `4`

Valid Usage (Implicit)

- VUID-VkWriteDescriptorSetInlineUniformBlock-sType-sType
  `sType` **must** be `VK_STRUCTURE_TYPE_WRITE_DESCRIPTOR_SET_INLINE_UNIFORM_BLOCK`
- VUID-VkWriteDescriptorSetInlineUniformBlock-pData-parameter
  `pData` **must** be a valid pointer to an array of `dataSize` bytes
- VUID-VkWriteDescriptorSetInlineUniformBlock-dataSize-arraylength
  `dataSize` **must** be greater than `0`

The `VkCopyDescriptorSet` structure is defined as:

```
// Provided by VK_VERSION_1_0
typedef struct VkCopyDescriptorSet {
    VkStructureType    sType;
    const void*        pNext;
    VkDescriptorSet    srcSet;
    uint32_t           srcBinding;
    uint32_t           srcArrayElement;
    VkDescriptorSet    dstSet;
    uint32_t           dstBinding;
    uint32_t           dstArrayElement;
    uint32_t           descriptorCount;
} VkCopyDescriptorSet;
```

- `sType` is a VkStructureType value identifying this structure.
- `pNext` is `NULL` or a pointer to a structure extending this structure.
- `srcSet`, `srcBinding`, and `srcArrayElement` are the source set, binding, and array element, respectively. If the descriptor binding identified by `srcSet` and `srcBinding` has a descriptor type of `VK_DESCRIPTOR_TYPE_INLINE_UNIFORM_BLOCK` then `srcArrayElement` specifies the starting byte offset within the binding to copy from.
- `dstSet`, `dstBinding`, and `dstArrayElement` are the destination set, binding, and array element, respectively. If the descriptor binding identified by `dstSet` and `dstBinding` has a descriptor type of `VK_DESCRIPTOR_TYPE_INLINE_UNIFORM_BLOCK` then `dstArrayElement` specifies the starting byte offset within the binding to copy to.
- `descriptorCount` is the number of descriptors to copy from the source to destination. If `descriptorCount` is greater than the number of remaining array elements in the source or destination binding, those affect consecutive bindings in a manner similar to VkWriteDescriptorSet above. If the descriptor binding identified by `srcSet` and `srcBinding` has a descriptor type of `VK_DESCRIPTOR_TYPE_INLINE_UNIFORM_BLOCK` then `descriptorCount` specifies the number of bytes to copy and the remaining array elements in the source or destination binding refer to the remaining number of bytes in those.

Valid Usage

- VUID-VkCopyDescriptorSet-srcBinding-00345
  `srcBinding` **must** be a valid binding within `srcSet`
- VUID-VkCopyDescriptorSet-srcArrayElement-00346
  The sum of `srcArrayElement` and `descriptorCount` **must** be less than or equal to the number of array elements in the descriptor set binding specified by `srcBinding`, and all applicable consecutive bindings
- VUID-VkCopyDescriptorSet-dstBinding-00347
  `dstBinding` **must** be a valid binding within `dstSet`
- VUID-VkCopyDescriptorSet-dstArrayElement-00348
  The sum of `dstArrayElement` and `descriptorCount` **must** be less than or equal to the number of array elements in the descriptor set binding specified by `dstBinding`, and all applicable

consecutive bindings

- VUID-VkCopyDescriptorSet-dstBinding-02632
  The type of `dstBinding` within `dstSet` **must** be equal to the type of `srcBinding` within `srcSet`
- VUID-VkCopyDescriptorSet-srcSet-00349
  If `srcSet` is equal to `dstSet`, then the source and destination ranges of descriptors **must** not overlap, where the ranges **may** include array elements from consecutive bindings
- VUID-VkCopyDescriptorSet-srcBinding-02223
  If the descriptor type of the descriptor set binding specified by `srcBinding` is `VK_DESCRIPTOR_TYPE_INLINE_UNIFORM_BLOCK`, `srcArrayElement` **must** be an integer multiple of `4`
- VUID-VkCopyDescriptorSet-dstBinding-02224
  If the descriptor type of the descriptor set binding specified by `dstBinding` is `VK_DESCRIPTOR_TYPE_INLINE_UNIFORM_BLOCK`, `dstArrayElement` **must** be an integer multiple of `4`
- VUID-VkCopyDescriptorSet-srcBinding-02225
  If the descriptor type of the descriptor set binding specified by either `srcBinding` or `dstBinding` is `VK_DESCRIPTOR_TYPE_INLINE_UNIFORM_BLOCK`, `descriptorCount` **must** be an integer multiple of `4`
- VUID-VkCopyDescriptorSet-srcSet-01918
  If `srcSet`'s layout was created with the `VK_DESCRIPTOR_SET_LAYOUT_CREATE_UPDATE_AFTER_BIND_POOL_BIT` flag set, then `dstSet`'s layout **must** also have been created with the `VK_DESCRIPTOR_SET_LAYOUT_CREATE_UPDATE_AFTER_BIND_POOL_BIT` flag set
- VUID-VkCopyDescriptorSet-srcSet-04885
  If `srcSet`'s layout was created without the `VK_DESCRIPTOR_SET_LAYOUT_CREATE_UPDATE_AFTER_BIND_POOL_BIT` flag set, then `dstSet`'s layout **must** have been created without the `VK_DESCRIPTOR_SET_LAYOUT_CREATE_UPDATE_AFTER_BIND_POOL_BIT` flag set
- VUID-VkCopyDescriptorSet-srcSet-01920
  If the descriptor pool from which `srcSet` was allocated was created with the `VK_DESCRIPTOR_POOL_CREATE_UPDATE_AFTER_BIND_BIT` flag set, then the descriptor pool from which `dstSet` was allocated **must** also have been created with the `VK_DESCRIPTOR_POOL_CREATE_UPDATE_AFTER_BIND_BIT` flag set
- VUID-VkCopyDescriptorSet-srcSet-04887
  If the descriptor pool from which `srcSet` was allocated was created without the `VK_DESCRIPTOR_POOL_CREATE_UPDATE_AFTER_BIND_BIT` flag set, then the descriptor pool from which `dstSet` was allocated **must** have been created without the `VK_DESCRIPTOR_POOL_CREATE_UPDATE_AFTER_BIND_BIT` flag set
- VUID-VkCopyDescriptorSet-dstBinding-02753
  If the descriptor type of the descriptor set binding specified by `dstBinding` is `VK_DESCRIPTOR_TYPE_SAMPLER`, then `dstSet` **must** not have been allocated with a layout that included immutable samplers for `dstBinding`

Valid Usage (Implicit)

- VUID-VkCopyDescriptorSet-sType-sType
  `sType` **must** be `VK_STRUCTURE_TYPE_COPY_DESCRIPTOR_SET`
- VUID-VkCopyDescriptorSet-pNext-pNext
  `pNext` **must** be `NULL`
- VUID-VkCopyDescriptorSet-srcSet-parameter
  `srcSet` **must** be a valid VkDescriptorSet handle
- VUID-VkCopyDescriptorSet-dstSet-parameter
  `dstSet` **must** be a valid VkDescriptorSet handle
- VUID-VkCopyDescriptorSet-commonparent
  Both of `dstSet`, and `srcSet` **must** have been created, allocated, or retrieved from the same VkDevice

14.2.5. Descriptor Update Templates

A descriptor update template specifies a mapping from descriptor update information in host memory to descriptors in a descriptor set. It is designed to avoid passing redundant information to the driver when frequently updating the same set of descriptors in descriptor sets.

Descriptor update template objects are represented by `VkDescriptorUpdateTemplate` handles:

```
// Provided by VK_VERSION_1_1
VK_DEFINE_NON_DISPATCHABLE_HANDLE(VkDescriptorUpdateTemplate)
```

14.2.6. Descriptor Set Updates With Templates

Updating a large `VkDescriptorSet` array **can** be an expensive operation since an application **must** specify one VkWriteDescriptorSet structure for each descriptor or descriptor array to update, each of which re-specifies the same state when updating the same descriptor in multiple descriptor sets. For cases when an application wishes to update the same set of descriptors in multiple descriptor sets allocated using the same `VkDescriptorSetLayout`, vkUpdateDescriptorSetWithTemplate **can** be used as a replacement for vkUpdateDescriptorSets.

`VkDescriptorUpdateTemplate` allows implementations to convert a set of descriptor update operations on a single descriptor set to an internal format that, in conjunction with vkUpdateDescriptorSetWithTemplate , **can** be more efficient compared to calling vkUpdateDescriptorSets . The descriptors themselves are not specified in the `VkDescriptorUpdateTemplate`, rather, offsets into an application provided pointer to host memory are specified, which are combined with a pointer passed to vkUpdateDescriptorSetWithTemplate . This allows large batches of updates to be executed without having to convert application data structures into a strictly-defined Vulkan data structure.

To create a descriptor update template, call:

```
// Provided by VK_VERSION_1_1
VkResult vkCreateDescriptorUpdateTemplate(
    VkDevice                                    device,
    const VkDescriptorUpdateTemplateCreateInfo* pCreateInfo,
    const VkAllocationCallbacks*                pAllocator,
    VkDescriptorUpdateTemplate*                 pDescriptorUpdateTemplate);
```

- `device` is the logical device that creates the descriptor update template.
- `pCreateInfo` is a pointer to a VkDescriptorUpdateTemplateCreateInfo structure specifying the set of descriptors to update with a single call to vkUpdateDescriptorSetWithTemplate.
- `pAllocator` controls host memory allocation as described in the Memory Allocation chapter.
- `pDescriptorUpdateTemplate` is a pointer to a `VkDescriptorUpdateTemplate` handle in which the resulting descriptor update template object is returned.

Valid Usage (Implicit)

- VUID-vkCreateDescriptorUpdateTemplate-device-parameter
  `device` **must** be a valid VkDevice handle
- VUID-vkCreateDescriptorUpdateTemplate-pCreateInfo-parameter
  `pCreateInfo` **must** be a valid pointer to a valid VkDescriptorUpdateTemplateCreateInfo structure
- VUID-vkCreateDescriptorUpdateTemplate-pAllocator-parameter
  If `pAllocator` is not `NULL`, `pAllocator` **must** be a valid pointer to a valid VkAllocationCallbacks structure
- VUID-vkCreateDescriptorUpdateTemplate-pDescriptorUpdateTemplate-parameter
  `pDescriptorUpdateTemplate` **must** be a valid pointer to a VkDescriptorUpdateTemplate handle

Return Codes

Success

- `VK_SUCCESS`

Failure

- `VK_ERROR_OUT_OF_HOST_MEMORY`
- `VK_ERROR_OUT_OF_DEVICE_MEMORY`

The VkDescriptorUpdateTemplateCreateInfo structure is defined as:

```
// Provided by VK_VERSION_1_1
typedef struct VkDescriptorUpdateTemplateCreateInfo {
    VkStructureType                           sType;
    const void*                               pNext;
    VkDescriptorUpdateTemplateCreateFlags     flags;
    uint32_t                                  descriptorUpdateEntryCount;
    const VkDescriptorUpdateTemplateEntry*    pDescriptorUpdateEntries;
    VkDescriptorUpdateTemplateType            templateType;
    VkDescriptorSetLayout                     descriptorSetLayout;
    VkPipelineBindPoint                       pipelineBindPoint;
    VkPipelineLayout                          pipelineLayout;
    uint32_t                                  set;
} VkDescriptorUpdateTemplateCreateInfo;
```

- `sType` is a VkStructureType value identifying this structure.
- `pNext` is `NULL` or a pointer to a structure extending this structure.
- `flags` is reserved for future use.
- `descriptorUpdateEntryCount` is the number of elements in the `pDescriptorUpdateEntries` array.
- `pDescriptorUpdateEntries` is a pointer to an array of VkDescriptorUpdateTemplateEntry structures describing the descriptors to be updated by the descriptor update template.
- `templateType` Specifies the type of the descriptor update template. If set to `VK_DESCRIPTOR_UPDATE_TEMPLATE_TYPE_DESCRIPTOR_SET` it **can** only be used to update descriptor sets with a fixed `descriptorSetLayout`.
- `descriptorSetLayout` is the descriptor set layout used to build the descriptor update template. All descriptor sets which are going to be updated through the newly created descriptor update template **must** be created with a layout that matches (is the same as, or defined identically to) this layout. This parameter is ignored if `templateType` is not `VK_DESCRIPTOR_UPDATE_TEMPLATE_TYPE_DESCRIPTOR_SET`.
- `pipelineBindPoint` is reserved for future use and is ignored
- `pipelineLayout` is reserved for future use and is ignored
- `set` is reserved for future use and is ignored

Valid Usage

- VUID-VkDescriptorUpdateTemplateCreateInfo-templateType-00350
  If `templateType` is `VK_DESCRIPTOR_UPDATE_TEMPLATE_TYPE_DESCRIPTOR_SET`, `descriptorSetLayout` **must** be a valid `VkDescriptorSetLayout` handle

Valid Usage (Implicit)

- VUID-VkDescriptorUpdateTemplateCreateInfo-sType-sType
  `sType` **must** be `VK_STRUCTURE_TYPE_DESCRIPTOR_UPDATE_TEMPLATE_CREATE_INFO`

- VUID-VkDescriptorUpdateTemplateCreateInfo-pNext-pNext
  `pNext` **must** be `NULL`
- VUID-VkDescriptorUpdateTemplateCreateInfo-flags-zerobitmask
  `flags` **must** be `0`
- VUID-VkDescriptorUpdateTemplateCreateInfo-pDescriptorUpdateEntries-parameter
  `pDescriptorUpdateEntries` **must** be a valid pointer to an array of `descriptorUpdateEntryCount` valid VkDescriptorUpdateTemplateEntry structures
- VUID-VkDescriptorUpdateTemplateCreateInfo-templateType-parameter
  `templateType` **must** be a valid VkDescriptorUpdateTemplateType value
- VUID-VkDescriptorUpdateTemplateCreateInfo-descriptorUpdateEntryCount-arraylength
  `descriptorUpdateEntryCount` **must** be greater than `0`
- VUID-VkDescriptorUpdateTemplateCreateInfo-commonparent
  Both of `descriptorSetLayout`, and `pipelineLayout` that are valid handles of non-ignored parameters **must** have been created, allocated, or retrieved from the same VkDevice

```
// Provided by VK_VERSION_1_1
typedef VkFlags VkDescriptorUpdateTemplateCreateFlags;
```

`VkDescriptorUpdateTemplateCreateFlags` is a bitmask type for setting a mask, but is currently reserved for future use.

The descriptor update template type is determined by the VkDescriptorUpdateTemplateCreateInfo ::`templateType` property, which takes the following values:

```
// Provided by VK_VERSION_1_1
typedef enum VkDescriptorUpdateTemplateType {
    VK_DESCRIPTOR_UPDATE_TEMPLATE_TYPE_DESCRIPTOR_SET = 0,
} VkDescriptorUpdateTemplateType;
```

- `VK_DESCRIPTOR_UPDATE_TEMPLATE_TYPE_DESCRIPTOR_SET` specifies that the descriptor update template will be used for descriptor set updates only.

The `VkDescriptorUpdateTemplateEntry` structure is defined as:

```
// Provided by VK_VERSION_1_1
typedef struct VkDescriptorUpdateTemplateEntry {
    uint32_t            dstBinding;
    uint32_t            dstArrayElement;
    uint32_t            descriptorCount;
    VkDescriptorType    descriptorType;
    size_t              offset;
    size_t              stride;
} VkDescriptorUpdateTemplateEntry;
```

- `dstBinding` is the descriptor binding to update when using this descriptor update template.
- `dstArrayElement` is the starting element in the array belonging to `dstBinding`. If the descriptor binding identified by `dstBinding` has a descriptor type of `VK_DESCRIPTOR_TYPE_INLINE_UNIFORM_BLOCK` then `dstArrayElement` specifies the starting byte offset to update.
- `descriptorCount` is the number of descriptors to update. If `descriptorCount` is greater than the number of remaining array elements in the destination binding, those affect consecutive bindings in a manner similar to VkWriteDescriptorSet above. If the descriptor binding identified by `dstBinding` has a descriptor type of `VK_DESCRIPTOR_TYPE_INLINE_UNIFORM_BLOCK` then `descriptorCount` specifies the number of bytes to update and the remaining array elements in the destination binding refer to the remaining number of bytes in it.
- `descriptorType` is a VkDescriptorType specifying the type of the descriptor.
- `offset` is the offset in bytes of the first binding in the raw data structure.
- `stride` is the stride in bytes between two consecutive array elements of the descriptor update information in the raw data structure. The actual pointer ptr for each array element j of update entry i is computed using the following formula:

```
    const char *ptr = (const char *)pData + pDescriptorUpdateEntries[i].offset + j
* pDescriptorUpdateEntries[i].stride
```

  The stride is useful in case the bindings are stored in structs along with other data. If `descriptorType` is `VK_DESCRIPTOR_TYPE_INLINE_UNIFORM_BLOCK` then the value of `stride` is ignored and the stride is assumed to be `1`, i.e. the descriptor update information for them is always specified as a contiguous range.

Valid Usage

- VUID-VkDescriptorUpdateTemplateEntry-dstBinding-00354
  `dstBinding` **must** be a valid binding in the descriptor set layout implicitly specified when using a descriptor update template to update descriptors
- VUID-VkDescriptorUpdateTemplateEntry-dstArrayElement-00355
  `dstArrayElement` and `descriptorCount` **must** be less than or equal to the number of array elements in the descriptor set binding implicitly specified when using a descriptor update template to update descriptors, and all applicable consecutive bindings
- VUID-VkDescriptorUpdateTemplateEntry-descriptor-02226
  If `descriptor` type is `VK_DESCRIPTOR_TYPE_INLINE_UNIFORM_BLOCK`, `dstArrayElement` **must** be an integer multiple of `4`
- VUID-VkDescriptorUpdateTemplateEntry-descriptor-02227
  If `descriptor` type is `VK_DESCRIPTOR_TYPE_INLINE_UNIFORM_BLOCK`, `descriptorCount` **must** be an integer multiple of `4`

Valid Usage (Implicit)

- VUID-VkDescriptorUpdateTemplateEntry-descriptorType-parameter
  `descriptorType` **must** be a valid VkDescriptorType value

To destroy a descriptor update template, call:

```
// Provided by VK_VERSION_1_1
void vkDestroyDescriptorUpdateTemplate(
    VkDevice                                    device,
    VkDescriptorUpdateTemplate                  descriptorUpdateTemplate,
    const VkAllocationCallbacks*                pAllocator);
```

- `device` is the logical device that has been used to create the descriptor update template
- `descriptorUpdateTemplate` is the descriptor update template to destroy.
- `pAllocator` controls host memory allocation as described in the Memory Allocation chapter.

Valid Usage

- VUID-vkDestroyDescriptorUpdateTemplate-descriptorSetLayout-00356
  If `VkAllocationCallbacks` were provided when `descriptorUpdateTemplate` was created, a compatible set of callbacks **must** be provided here
- VUID-vkDestroyDescriptorUpdateTemplate-descriptorSetLayout-00357
  If no `VkAllocationCallbacks` were provided when `descriptorUpdateTemplate` was created, `pAllocator` **must** be `NULL`

Valid Usage (Implicit)

- VUID-vkDestroyDescriptorUpdateTemplate-device-parameter
  `device` **must** be a valid VkDevice handle
- VUID-vkDestroyDescriptorUpdateTemplate-descriptorUpdateTemplate-parameter
  If `descriptorUpdateTemplate` is not VK_NULL_HANDLE, `descriptorUpdateTemplate` **must** be a valid VkDescriptorUpdateTemplate handle
- VUID-vkDestroyDescriptorUpdateTemplate-pAllocator-parameter
  If `pAllocator` is not `NULL`, `pAllocator` **must** be a valid pointer to a valid VkAllocationCallbacks structure
- VUID-vkDestroyDescriptorUpdateTemplate-descriptorUpdateTemplate-parent
  If `descriptorUpdateTemplate` is a valid handle, it **must** have been created, allocated, or retrieved from `device`

Host Synchronization

- Host access to `descriptorUpdateTemplate` **must** be externally synchronized

Once a `VkDescriptorUpdateTemplate` has been created, descriptor sets **can** be updated by calling:

```
// Provided by VK_VERSION_1_1
void vkUpdateDescriptorSetWithTemplate(
    VkDevice                                    device,
    VkDescriptorSet                             descriptorSet,
    VkDescriptorUpdateTemplate                  descriptorUpdateTemplate,
    const void*                                 pData);
```

- `device` is the logical device that updates the descriptor set.
- `descriptorSet` is the descriptor set to update
- `descriptorUpdateTemplate` is a VkDescriptorUpdateTemplate object specifying the update mapping between `pData` and the descriptor set to update.
- `pData` is a pointer to memory containing one or more VkDescriptorImageInfo, VkDescriptorBufferInfo, or VkBufferView structures used to write the descriptors.

Valid Usage

- VUID-vkUpdateDescriptorSetWithTemplate-pData-01685
  `pData` **must** be a valid pointer to a memory containing one or more valid instances of VkDescriptorImageInfo, VkDescriptorBufferInfo, or VkBufferView in a layout defined by `descriptorUpdateTemplate` when it was created with vkCreateDescriptorUpdateTemplate
- VUID-vkUpdateDescriptorSetWithTemplate-descriptorSet-06995
  Host access to `descriptorSet` **must** be externally synchronized unless explicitly denoted otherwise for specific flags

Valid Usage (Implicit)

- VUID-vkUpdateDescriptorSetWithTemplate-device-parameter
  `device` **must** be a valid VkDevice handle
- VUID-vkUpdateDescriptorSetWithTemplate-descriptorSet-parameter
  `descriptorSet` **must** be a valid VkDescriptorSet handle
- VUID-vkUpdateDescriptorSetWithTemplate-descriptorUpdateTemplate-parameter
  `descriptorUpdateTemplate` **must** be a valid VkDescriptorUpdateTemplate handle
- VUID-vkUpdateDescriptorSetWithTemplate-descriptorSet-parent
  `descriptorSet` **must** have been created, allocated, or retrieved from `device`
- VUID-vkUpdateDescriptorSetWithTemplate-descriptorUpdateTemplate-parent
  `descriptorUpdateTemplate` **must** have been created, allocated, or retrieved from `device`

API Example

```
struct AppBufferView {
    VkBufferView bufferView;
    uint32_t     applicationRelatedInformation;
};

struct AppDataStructure
{
    VkDescriptorImageInfo  imageInfo;          // a single image info
    VkDescriptorBufferInfo bufferInfoArray[3]; // 3 buffer infos in an array
    AppBufferView          bufferView[2];      // An application-defined structure
containing a bufferView
    // ... some more application-related data
};

const VkDescriptorUpdateTemplateEntry descriptorUpdateTemplateEntries[] =
{
    // binding to a single image descriptor
    {
        .binding = 0,
        .dstArrayElement = 0,
        .descriptorCount = 1,
        .descriptorType = VK_DESCRIPTOR_TYPE_COMBINED_IMAGE_SAMPLER,
        .offset = offsetof(AppDataStructure, imageInfo),
        .stride = 0         // stride not required if descriptorCount is 1
    },

    // binding to an array of buffer descriptors
    {
        .binding = 1,
        .dstArrayElement = 0,
        .descriptorCount = 3,
        .descriptorType = VK_DESCRIPTOR_TYPE_UNIFORM_BUFFER,
        .offset = offsetof(AppDataStructure, bufferInfoArray),
        .stride = sizeof(VkDescriptorBufferInfo)    // descriptor buffer infos are
compact
    },

    // binding to an array of buffer views
    {
        .binding = 2,
        .dstArrayElement = 0,
        .descriptorCount = 2,
        .descriptorType = VK_DESCRIPTOR_TYPE_STORAGE_TEXEL_BUFFER,
        .offset = offsetof(AppDataStructure, bufferView) +
                  offsetof(AppBufferView, bufferView),
        .stride = sizeof(AppBufferView)             // bufferViews do not have to be
compact
    },
};
```

```
// create a descriptor update template for descriptor set updates
const VkDescriptorUpdateTemplateCreateInfo createInfo =
{
    .sType = VK_STRUCTURE_TYPE_DESCRIPTOR_UPDATE_TEMPLATE_CREATE_INFO,
    .pNext = NULL,
    .flags = 0,
    .descriptorUpdateEntryCount = 3,
    .pDescriptorUpdateEntries = descriptorUpdateTemplateEntries,
    .templateType = VK_DESCRIPTOR_UPDATE_TEMPLATE_TYPE_DESCRIPTOR_SET,
    .descriptorSetLayout = myLayout,
    .pipelineBindPoint = 0,     // ignored by given templateType
    .pipelineLayout = 0,        // ignored by given templateType
    .set = 0,                   // ignored by given templateType
};

VkDescriptorUpdateTemplate myDescriptorUpdateTemplate;
myResult = vkCreateDescriptorUpdateTemplate(
    myDevice,
    &createInfo,
    NULL,
    &myDescriptorUpdateTemplate);

AppDataStructure appData;

// fill appData here or cache it in your engine
vkUpdateDescriptorSetWithTemplate(myDevice, myDescriptorSet,
myDescriptorUpdateTemplate, &appData);
```

14.2.7. Descriptor Set Binding

To bind one or more descriptor sets to a command buffer, call:

```
// Provided by VK_VERSION_1_0
void vkCmdBindDescriptorSets(
    VkCommandBuffer                             commandBuffer,
    VkPipelineBindPoint                         pipelineBindPoint,
    VkPipelineLayout                            layout,
    uint32_t                                    firstSet,
    uint32_t                                    descriptorSetCount,
    const VkDescriptorSet*                      pDescriptorSets,
    uint32_t                                    dynamicOffsetCount,
    const uint32_t*                             pDynamicOffsets);
```

- `commandBuffer` is the command buffer that the descriptor sets will be bound to.
- `pipelineBindPoint` is a VkPipelineBindPoint indicating the type of the pipeline that will use the descriptors. There is a separate set of bind points for each pipeline type, so binding one does not disturb the others.

- `layout` is a VkPipelineLayout object used to program the bindings.
- `firstSet` is the set number of the first descriptor set to be bound.
- `descriptorSetCount` is the number of elements in the `pDescriptorSets` array.
- `pDescriptorSets` is a pointer to an array of handles to VkDescriptorSet objects describing the descriptor sets to bind to.
- `dynamicOffsetCount` is the number of dynamic offsets in the `pDynamicOffsets` array.
- `pDynamicOffsets` is a pointer to an array of `uint32_t` values specifying dynamic offsets.

`vkCmdBindDescriptorSets` binds descriptor sets `pDescriptorSets`[0..`descriptorSetCount`-1] to set numbers [`firstSet`..`firstSet`+`descriptorSetCount`-1] for subsequent bound pipeline commands set by `pipelineBindPoint`. Any bindings that were previously applied via these sets are no longer valid.

Once bound, a descriptor set affects rendering of subsequent commands that interact with the given pipeline type in the command buffer until either a different set is bound to the same set number, or the set is disturbed as described in Pipeline Layout Compatibility.

A compatible descriptor set **must** be bound for all set numbers that any shaders in a pipeline access, at the time that a drawing or dispatching command is recorded to execute using that pipeline. However, if none of the shaders in a pipeline statically use any bindings with a particular set number, then no descriptor set need be bound for that set number, even if the pipeline layout includes a non-trivial descriptor set layout for that set number.

When consuming a descriptor, a descriptor is considered valid if the descriptor is not undefined as described by descriptor set allocation. A descriptor that was disturbed by Pipeline Layout Compatibility, or was never bound by `vkCmdBindDescriptorSets` is not considered valid. If a pipeline accesses a descriptor either statically or dynamically depending on the VkDescriptorBindingFlagBits, the consuming descriptor type in the pipeline **must** match the VkDescriptorType in VkDescriptorSetLayoutCreateInfo for the descriptor to be considered valid.

NOTE	Further validation may be carried out beyond validation for descriptor types, e.g. Texel Input Validation.

If any of the sets being bound include dynamic uniform or storage buffers, then `pDynamicOffsets` includes one element for each array element in each dynamic descriptor type binding in each set. Values are taken from `pDynamicOffsets` in an order such that all entries for set N come before set N+1; within a set, entries are ordered by the binding numbers in the descriptor set layouts; and within a binding array, elements are in order. `dynamicOffsetCount` **must** equal the total number of dynamic descriptors in the sets being bound.

The effective offset used for dynamic uniform and storage buffer bindings is the sum of the relative offset taken from `pDynamicOffsets`, and the base address of the buffer plus base offset in the descriptor set. The range of the dynamic uniform and storage buffer bindings is the buffer range as specified in the descriptor set.

Each of the `pDescriptorSets` **must** be compatible with the pipeline layout specified by `layout`. The layout used to program the bindings **must** also be compatible with the pipeline used in subsequent bound pipeline commands with that pipeline type, as defined in the Pipeline Layout Compatibility

section.

The descriptor set contents bound by a call to vkCmdBindDescriptorSets **may** be consumed at the following times:

- For descriptor bindings created with the VK_DESCRIPTOR_BINDING_UPDATE_AFTER_BIND_BIT bit set, the contents **may** be consumed when the command buffer is submitted to a queue, or during shader execution of the resulting draws and dispatches, or any time in between. Otherwise,
- during host execution of the command, or during shader execution of the resulting draws and dispatches, or any time in between.

Thus, the contents of a descriptor set binding **must** not be altered (overwritten by an update command, or freed) between the first point in time that it **may** be consumed, and when the command completes executing on the queue.

The contents of pDynamicOffsets are consumed immediately during execution of vkCmdBindDescriptorSets. Once all pending uses have completed, it is legal to update and reuse a descriptor set.

Valid Usage

- VUID-vkCmdBindDescriptorSets-pDescriptorSets-00358
  Each element of pDescriptorSets **must** have been allocated with a VkDescriptorSetLayout that matches (is the same as, or identically defined as) the VkDescriptorSetLayout at set *n* in layout, where *n* is the sum of firstSet and the index into pDescriptorSets
- VUID-vkCmdBindDescriptorSets-dynamicOffsetCount-00359
  dynamicOffsetCount **must** be equal to the total number of dynamic descriptors in pDescriptorSets
- VUID-vkCmdBindDescriptorSets-firstSet-00360
  The sum of firstSet and descriptorSetCount **must** be less than or equal to VkPipelineLayoutCreateInfo::setLayoutCount provided when layout was created
- VUID-vkCmdBindDescriptorSets-pDynamicOffsets-01971
  Each element of pDynamicOffsets which corresponds to a descriptor binding with type VK_DESCRIPTOR_TYPE_UNIFORM_BUFFER_DYNAMIC **must** be a multiple of VkPhysicalDeviceLimits::minUniformBufferOffsetAlignment
- VUID-vkCmdBindDescriptorSets-pDynamicOffsets-01972
  Each element of pDynamicOffsets which corresponds to a descriptor binding with type VK_DESCRIPTOR_TYPE_STORAGE_BUFFER_DYNAMIC **must** be a multiple of VkPhysicalDeviceLimits::minStorageBufferOffsetAlignment
- VUID-vkCmdBindDescriptorSets-pDescriptorSets-01979
  For each dynamic uniform or storage buffer binding in pDescriptorSets, the sum of the effective offset and the range of the binding **must** be less than or equal to the size of the buffer
- VUID-vkCmdBindDescriptorSets-pDescriptorSets-06715
  For each dynamic uniform or storage buffer binding in pDescriptorSets, if the range was set with VK_WHOLE_SIZE then pDynamicOffsets which corresponds to the descriptor binding

must be 0

- VUID-vkCmdBindDescriptorSets-pDescriptorSets-06563
  Each element of `pDescriptorSets` **must** be a valid VkDescriptorSet
- VUID-vkCmdBindDescriptorSets-pipelineBindPoint-00361
  `pipelineBindPoint` **must** be supported by the `commandBuffer`'s parent `VkCommandPool`'s queue family

Valid Usage (Implicit)

- VUID-vkCmdBindDescriptorSets-commandBuffer-parameter
  `commandBuffer` **must** be a valid VkCommandBuffer handle
- VUID-vkCmdBindDescriptorSets-pipelineBindPoint-parameter
  `pipelineBindPoint` **must** be a valid VkPipelineBindPoint value
- VUID-vkCmdBindDescriptorSets-layout-parameter
  `layout` **must** be a valid VkPipelineLayout handle
- VUID-vkCmdBindDescriptorSets-pDescriptorSets-parameter
  `pDescriptorSets` **must** be a valid pointer to an array of `descriptorSetCount` valid or VK_NULL_HANDLE VkDescriptorSet handles
- VUID-vkCmdBindDescriptorSets-pDynamicOffsets-parameter
  If `dynamicOffsetCount` is not `0`, `pDynamicOffsets` **must** be a valid pointer to an array of `dynamicOffsetCount` `uint32_t` values
- VUID-vkCmdBindDescriptorSets-commandBuffer-recording
  `commandBuffer` **must** be in the recording state
- VUID-vkCmdBindDescriptorSets-commandBuffer-cmdpool
  The `VkCommandPool` that `commandBuffer` was allocated from **must** support graphics, or compute operations
- VUID-vkCmdBindDescriptorSets-descriptorSetCount-arraylength
  `descriptorSetCount` **must** be greater than `0`
- VUID-vkCmdBindDescriptorSets-commonparent
  Each of `commandBuffer`, `layout`, and the elements of `pDescriptorSets` that are valid handles of non-ignored parameters **must** have been created, allocated, or retrieved from the same VkDevice

Host Synchronization

- Host access to `commandBuffer` **must** be externally synchronized
- Host access to the `VkCommandPool` that `commandBuffer` was allocated from **must** be externally synchronized

Command Properties

Command Buffer Levels	Render Pass Scope	Supported Queue Types	Command Type
Primary Secondary	Both	Graphics Compute	State

14.2.8. Push Constant Updates

As described above in section Pipeline Layouts, the pipeline layout defines shader push constants which are updated via Vulkan commands rather than via writes to memory or copy commands.

NOTE Push constants represent a high speed path to modify constant data in pipelines that is expected to outperform memory-backed resource updates.

To update push constants, call:

```
// Provided by VK_VERSION_1_0
void vkCmdPushConstants(
    VkCommandBuffer                             commandBuffer,
    VkPipelineLayout                            layout,
    VkShaderStageFlags                          stageFlags,
    uint32_t                                    offset,
    uint32_t                                    size,
    const void*                                 pValues);
```

- `commandBuffer` is the command buffer in which the push constant update will be recorded.
- `layout` is the pipeline layout used to program the push constant updates.
- `stageFlags` is a bitmask of VkShaderStageFlagBits specifying the shader stages that will use the push constants in the updated range.
- `offset` is the start offset of the push constant range to update, in units of bytes.
- `size` is the size of the push constant range to update, in units of bytes.
- `pValues` is a pointer to an array of `size` bytes containing the new push constant values.

When a command buffer begins recording, all push constant values are undefined. Reads of undefined push constant values by the executing shader return undefined values.

Push constant values **can** be updated incrementally, causing shader stages in `stageFlags` to read the new data from `pValues` for push constants modified by this command, while still reading the previous data for push constants not modified by this command. When a bound pipeline command is issued, the bound pipeline's layout **must** be compatible with the layouts used to set the values of all push constants in the pipeline layout's push constant ranges, as described in Pipeline Layout Compatibility. Binding a pipeline with a layout that is not compatible with the push constant layout does not disturb the push constant values.

NOTE As `stageFlags` needs to include all flags the relevant push constant ranges were created with, any flags that are not supported by the queue family that the VkCommandPool used to allocate `commandBuffer` was created on are ignored.

Valid Usage

- VUID-vkCmdPushConstants-offset-01795
  For each byte in the range specified by `offset` and `size` and for each shader stage in `stageFlags`, there **must** be a push constant range in `layout` that includes that byte and that stage
- VUID-vkCmdPushConstants-offset-01796
  For each byte in the range specified by `offset` and `size` and for each push constant range that overlaps that byte, `stageFlags` **must** include all stages in that push constant range's VkPushConstantRange::`stageFlags`
- VUID-vkCmdPushConstants-offset-00368
  `offset` **must** be a multiple of `4`
- VUID-vkCmdPushConstants-size-00369
  `size` **must** be a multiple of `4`
- VUID-vkCmdPushConstants-offset-00370
  `offset` **must** be less than `VkPhysicalDeviceLimits`::`maxPushConstantsSize`
- VUID-vkCmdPushConstants-size-00371
  `size` **must** be less than or equal to `VkPhysicalDeviceLimits`::`maxPushConstantsSize` minus `offset`

Valid Usage (Implicit)

- VUID-vkCmdPushConstants-commandBuffer-parameter
  `commandBuffer` **must** be a valid VkCommandBuffer handle
- VUID-vkCmdPushConstants-layout-parameter
  `layout` **must** be a valid VkPipelineLayout handle
- VUID-vkCmdPushConstants-stageFlags-parameter
  `stageFlags` **must** be a valid combination of VkShaderStageFlagBits values
- VUID-vkCmdPushConstants-stageFlags-requiredbitmask
  `stageFlags` **must** not be `0`
- VUID-vkCmdPushConstants-pValues-parameter
  `pValues` **must** be a valid pointer to an array of `size` bytes
- VUID-vkCmdPushConstants-commandBuffer-recording
  `commandBuffer` **must** be in the recording state
- VUID-vkCmdPushConstants-commandBuffer-cmdpool
  The `VkCommandPool` that `commandBuffer` was allocated from **must** support graphics, or compute operations

- VUID-vkCmdPushConstants-size-arraylength
  `size` **must** be greater than `0`
- VUID-vkCmdPushConstants-commonparent
  Both of `commandBuffer`, and `layout` **must** have been created, allocated, or retrieved from the same VkDevice

Host Synchronization

- Host access to `commandBuffer` **must** be externally synchronized
- Host access to the `VkCommandPool` that `commandBuffer` was allocated from **must** be externally synchronized

Command Properties

Command Buffer Levels	Render Pass Scope	Supported Queue Types	Command Type
Primary Secondary	Both	Graphics Compute	State

14.3. Physical Storage Buffer Access

To query a 64-bit buffer device address value through which buffer memory **can** be accessed in a shader, call:

```
// Provided by VK_VERSION_1_2
VkDeviceAddress vkGetBufferDeviceAddress(
    VkDevice                                    device,
    const VkBufferDeviceAddressInfo*            pInfo);
```

- `device` is the logical device that the buffer was created on.
- `pInfo` is a pointer to a VkBufferDeviceAddressInfo structure specifying the buffer to retrieve an address for.

The 64-bit return value is an address of the start of `pInfo->buffer`. The address range starting at this value and whose size is the size of the buffer **can** be used in a shader to access the memory bound to that buffer, using the `SPV_KHR_physical_storage_buffer` extension and the `PhysicalStorageBuffer` storage class. For example, this value **can** be stored in a uniform buffer, and the shader **can** read the value from the uniform buffer and use it to do a dependent read/write to this buffer. A value of zero is reserved as a “null” pointer and **must** not be returned as a valid buffer device address. All loads, stores, and atomics in a shader through `PhysicalStorageBuffer` pointers **must** access addresses in the address range of some buffer.

If the buffer was created with a non-zero value of VkBufferOpaqueCaptureAddressCreateInfo::opaqueCaptureAddress, the return value will be the same address that was returned at capture time.

The returned address **must** satisfy the alignment requirement specified by VkMemoryRequirements::alignment for the buffer in VkBufferDeviceAddressInfo::buffer.

If multiple VkBuffer objects are bound to overlapping ranges of VkDeviceMemory, implementations **may** return address ranges which overlap. In this case, it is ambiguous which VkBuffer is associated with any given device address. For purposes of valid usage, if multiple VkBuffer objects **can** be attributed to a device address, a VkBuffer is selected such that valid usage passes, if it exists.

Valid Usage

- VUID-vkGetBufferDeviceAddress-bufferDeviceAddress-03324
  The bufferDeviceAddress feature **must** be enabled
- VUID-vkGetBufferDeviceAddress-device-03325
  If device was created with multiple physical devices, then the bufferDeviceAddressMultiDevice feature **must** be enabled

Valid Usage (Implicit)

- VUID-vkGetBufferDeviceAddress-device-parameter
  device **must** be a valid VkDevice handle
- VUID-vkGetBufferDeviceAddress-pInfo-parameter
  pInfo **must** be a valid pointer to a valid VkBufferDeviceAddressInfo structure

The VkBufferDeviceAddressInfo structure is defined as:

```
// Provided by VK_VERSION_1_2
typedef struct VkBufferDeviceAddressInfo {
    VkStructureType    sType;
    const void*        pNext;
    VkBuffer           buffer;
} VkBufferDeviceAddressInfo;
```

- sType is a VkStructureType value identifying this structure.
- pNext is NULL or a pointer to a structure extending this structure.
- buffer specifies the buffer whose address is being queried.

Valid Usage

- VUID-VkBufferDeviceAddressInfo-buffer-02600
  If buffer is non-sparse and was not created with the

VK_BUFFER_CREATE_DEVICE_ADDRESS_CAPTURE_REPLAY_BIT flag, then it **must** be bound completely and contiguously to a single VkDeviceMemory object

- VUID-VkBufferDeviceAddressInfo-buffer-02601
  buffer **must** have been created with VK_BUFFER_USAGE_SHADER_DEVICE_ADDRESS_BIT

Valid Usage (Implicit)

- VUID-VkBufferDeviceAddressInfo-sType-sType
  sType **must** be VK_STRUCTURE_TYPE_BUFFER_DEVICE_ADDRESS_INFO
- VUID-VkBufferDeviceAddressInfo-pNext-pNext
  pNext **must** be NULL
- VUID-VkBufferDeviceAddressInfo-buffer-parameter
  buffer **must** be a valid VkBuffer handle

To query a 64-bit buffer opaque capture address, call:

```
// Provided by VK_VERSION_1_2
uint64_t vkGetBufferOpaqueCaptureAddress(
    VkDevice                                    device,
    const VkBufferDeviceAddressInfo*            pInfo);
```

- device is the logical device that the buffer was created on.
- pInfo is a pointer to a VkBufferDeviceAddressInfo structure specifying the buffer to retrieve an address for.

The 64-bit return value is an opaque capture address of the start of pInfo->buffer.

If the buffer was created with a non-zero value of VkBufferOpaqueCaptureAddressCreateInfo ::opaqueCaptureAddress the return value **must** be the same address.

Valid Usage

- VUID-vkGetBufferOpaqueCaptureAddress-None-03326
  The bufferDeviceAddress feature **must** be enabled
- VUID-vkGetBufferOpaqueCaptureAddress-device-03327
  If device was created with multiple physical devices, then the bufferDeviceAddressMultiDevice feature **must** be enabled

Valid Usage (Implicit)

- VUID-vkGetBufferOpaqueCaptureAddress-device-parameter
  device **must** be a valid VkDevice handle

- VUID-vkGetBufferOpaqueCaptureAddress-pInfo-parameter
  `pInfo` **must** be a valid pointer to a valid VkBufferDeviceAddressInfo structure

Chapter 15. Shader Interfaces

When a pipeline is created, the set of shaders specified in the corresponding `VkPipelineCreateInfo` structure are implicitly linked at a number of different interfaces.

- Shader Input and Output Interface
- Vertex Input Interface
- Fragment Output Interface
- Fragment Input Attachment Interface
- Shader Resource Interface

This chapter describes valid uses for a set of SPIR-V decorations. Any other use of one of these decorations is invalid, with the exception that, when using SPIR-V versions 1.4 and earlier: `Block`, `BufferBlock`, `Offset`, `ArrayStride`, and `MatrixStride` can also decorate types and type members used by variables in the `Private` and `Function` storage classes.

NOTE In this chapter, there are references to SPIR-V terms such as the `MeshNV` execution model. These terms will appear even in a build of the specification which does not support any extensions. This is as intended, since these terms appear in the unified SPIR-V specification without such qualifiers.

15.1. Shader Input and Output Interfaces

When multiple stages are present in a pipeline, the outputs of one stage form an interface with the inputs of the next stage. When such an interface involves a shader, shader outputs are matched against the inputs of the next stage, and shader inputs are matched against the outputs of the previous stage.

All the variables forming the shader input and output *interfaces* are listed as operands to the `OpEntryPoint` instruction and are declared with the `Input` or `Output` storage classes, respectively, in the SPIR-V module. These generally form the interfaces between consecutive shader stages, regardless of any non-shader stages between the consecutive shader stages.

There are two classes of variables that **can** be matched between shader stages, built-in variables and user-defined variables. Each class has a different set of matching criteria.

`Output` variables of a shader stage have undefined values until the shader writes to them or uses the `Initializer` operand when declaring the variable.

15.1.1. Built-in Interface Block

Shader built-in variables meeting the following requirements define the *built-in interface block*. They **must**

- be explicitly declared (there are no implicit built-ins),
- be identified with a `BuiltIn` decoration,

- form object types as described in the Built-in Variables section, and
- be declared in a block whose top-level members are the built-ins.

There **must** be no more than one built-in interface block per shader per interface .

Built-ins **must** not have any `Location` or `Component` decorations.

15.1.2. User-defined Variable Interface

The non-built-in variables listed by `OpEntryPoint` with the `Input` or `Output` storage class form the *user-defined variable interface*. These **must** have numeric type or, recursively, composite types of such types. If an implementation supports `storageInputOutput16`, components **can** have a width of 16 bits. These variables **must** be identified with a `Location` decoration and **can** also be identified with a `Component` decoration.

15.1.3. Interface Matching

An output variable, block, or structure member in a given shader stage has an interface match with an input variable, block, or structure member in a subsequent shader stage if they both adhere to the following conditions:

- They have equivalent decorations, other than:
  - one is not decorated with `Component` and the other is declared with a `Component` of `0`
  - Interpolation decorations
  - `RelaxedPrecision` if one is an input variable and the other an output variable
- Their types match as follows:
  - if the input is declared in a tessellation control or geometry shader as an `OpTypeArray` with an `Element Type` equivalent to the `OpType*` declaration of the output, and neither is a structure member; or
  - if the `maintenance4` feature is enabled, they are declared as `OpTypeVector` variables, and the output has a `Component Count` value higher than that of the input but the same `Component Type`; or
  - if in any other case they are declared with an equivalent `OpType*` declaration.
- If both are structures and every member has an interface match.

NOTE	The word “structure” above refers to both variables that have an `OpTypeStruct` type and interface blocks (which are also declared as `OpTypeStruct`).

All input variables and blocks **must** have an interface match in the preceding shader stage, except for built-in variables in fragment shaders. Shaders **can** declare and write to output variables that are not declared or read by the subsequent stage.

The value of an input variable is undefined if the preceding stage does not write to a matching output variable, as described above.

15.1.4. Location Assignment

This section describes Location assignments for user-defined variables and how many Location slots are consumed by a given user-variable type. As mentioned above, some inputs and outputs have an additional level of arrayness relative to other shader inputs and outputs. This outer array level is removed from the type before considering how many Location slots the type consumes.

The Location value specifies an interface slot comprised of a 32-bit four-component vector conveyed between stages. The Component specifies word components within these vector Location slots. Only types with widths of 16, 32 or 64 are supported in shader interfaces.

Inputs and outputs of the following types consume a single interface Location:

- 16-bit scalar and vector types, and
- 32-bit scalar and vector types, and
- 64-bit scalar and 2-component vector types.

64-bit three- and four-component vectors consume two consecutive Location slots.

If a declared input or output is an array of size n and each element takes m Location slots, it will be assigned $m \times n$ consecutive Location slots starting with the specified Location.

If the declared input or output is an $n \times m$ 16-, 32- or 64-bit matrix, it will be assigned multiple Location slots starting with the specified Location. The number of Location slots assigned for each matrix will be the same as for an n-element array of m-component vectors.

An OpVariable with a structure type that is not a block **must** be decorated with a Location.

When an OpVariable with a structure type (either block or non-block) is decorated with a Location, the members in the structure type **must** not be decorated with a Location. The OpVariable's members are assigned consecutive Location slots in declaration order, starting from the first member, which is assigned the Location decoration from the OpVariable.

When a block-type OpVariable is declared without a Location decoration, each member in its structure type **must** be decorated with a Location. Types nested deeper than the top-level members **must** not have Location decorations.

The Location slots consumed by block and structure members are determined by applying the rules above in a depth-first traversal of the instantiated members as though the structure or block member were declared as an input or output variable of the same type.

Any two inputs listed as operands on the same OpEntryPoint **must** not be assigned the same Location slot and Component word, either explicitly or implicitly. Any two outputs listed as operands on the same OpEntryPoint **must** not be assigned the same Location slot and Component word, either explicitly or implicitly.

The number of input and output Location slots available for a shader input or output interface is limited, and dependent on the shader stage as described in Shader Input and Output Locations. All variables in both the built-in interface block and the user-defined variable interface count against these limits. Each effective Location **must** have a value less than the number of Location slots

available for the given interface, as specified in the “Locations Available” column in Shader Input and Output Locations.

Table 10. Shader Input and Output Locations

Shader Interface	Locations Available
vertex input	maxVertexInputAttributes
vertex output	maxVertexOutputComponents / 4
tessellation control input	maxTessellationControlPerVertexInputComponents / 4
tessellation control output	maxTessellationControlPerVertexOutputComponents / 4
tessellation evaluation input	maxTessellationEvaluationInputComponents / 4
tessellation evaluation output	maxTessellationEvaluationOutputComponents / 4
geometry input	maxGeometryInputComponents / 4
geometry output	maxGeometryOutputComponents / 4
fragment input	maxFragmentInputComponents / 4
fragment output	maxFragmentOutputAttachments

15.1.5. Component Assignment

The Component decoration allows the Location to be more finely specified for scalars and vectors, down to the individual Component word within a Location slot that are consumed. The Component word within a Location are 0, 1, 2, and 3. A variable or block member starting at Component N will consume Component words N, N+1, N+2, … up through its size. For 16-, and 32-bit types, it is invalid if this sequence of Component words gets larger than 3. A scalar 64-bit type will consume two of these Component words in sequence, and a two-component 64-bit vector type will consume all four Component words available within a Location. A three- or four-component 64-bit vector type **must** not specify a non-zero Component decoration. A three-component 64-bit vector type will consume all four Component words of the first Location and Component 0 and 1 of the second Location. This leaves Component 2 and 3 available for other component-qualified declarations.

A scalar or two-component 64-bit data type **must** not specify a Component decoration of 1 or 3. A Component decoration **must** not be specified for any type that is not a scalar or vector.

A four-component 64-bit data type will consume all four Component words of the first Location and all four Component words of the second Location.

15.2. Vertex Input Interface

When the vertex stage is present in a pipeline, the vertex shader input variables form an interface with the vertex input attributes. The vertex shader input variables are matched by the Location and Component decorations to the vertex input attributes specified in the pVertexInputState member of the VkGraphicsPipelineCreateInfo structure.

The vertex shader input variables listed by OpEntryPoint with the Input storage class form the *vertex input interface*. These variables **must** be identified with a Location decoration and **can** also be identified with a Component decoration.

For the purposes of interface matching: variables declared without a Component decoration are considered to have a Component decoration of zero. The number of available vertex input Location slots is given by the maxVertexInputAttributes member of the VkPhysicalDeviceLimits structure.

See Attribute Location and Component Assignment for details.

All vertex shader inputs declared as above **must** have a corresponding attribute and binding in the pipeline.

15.3. Fragment Output Interface

When the fragment stage is present in a pipeline, the fragment shader outputs form an interface with the output attachments defined by a render pass instance. The fragment shader output variables are matched by the Location and Component decorations to specified color attachments.

The fragment shader output variables listed by OpEntryPoint with the Output storage class form the *fragment output interface*. These variables **must** be identified with a Location decoration. They **can** also be identified with a Component decoration and/or an Index decoration. For the purposes of interface matching: variables declared without a Component decoration are considered to have a Component decoration of zero, and variables declared without an Index decoration are considered to have an Index decoration of zero.

A fragment shader output variable identified with a Location decoration of *i* is associated with the color attachment indicated by VkRenderingInfo::pColorAttachments[*i*]. When using render pass objects, it is associated with the color attachment indicated by VkSubpassDescription ::pColorAttachments[*i*]. Values are written to those attachments after passing through the blending unit as described in Blending, if enabled. Locations are consumed as described in Location Assignment. The number of available fragment output Location slots is given by the maxFragmentOutputAttachments member of the VkPhysicalDeviceLimits structure.

When an active fragment shader invocation finishes, the values of all fragment shader outputs are copied out and used as blend inputs or color attachments writes. If the invocation does not set a value for them, the input values to those blending or color attachment writes are undefined.

Components of the output variables are assigned as described in Component Assignment. Output Component words identified as 0, 1, 2, and 3 will be directed to the R, G, B, and A inputs to the blending unit, respectively, or to the output attachment if blending is disabled. If two variables are placed within the same Location, they **must** have the same underlying type (floating-point or integer). Component words which do not correspond to any fragment shader output will also result in undefined values for blending or color attachment writes.

Fragment outputs identified with an Index of zero are directed to the first input of the blending unit associated with the corresponding Location. Outputs identified with an Index of one are directed to the second input of the corresponding blending unit.

There **must** be no output variable which has the same `Location`, `Component`, and `Index` as any other, either explicitly declared or implied.

Output values written by a fragment shader **must** be declared with either `OpTypeFloat` or `OpTypeInt`, and a `Width` of 32. If `storageInputOutput16` is supported, output values written by a fragment shader **can** be also declared with either `OpTypeFloat` or `OpTypeInt` and a `Width` of 16. Composites of these types are also permitted. If the color attachment has a signed or unsigned normalized fixed-point format, color values are assumed to be floating-point and are converted to fixed-point as described in Conversion From Floating-Point to Normalized Fixed-Point; If the color attachment has an integer format, color values are assumed to be integers and converted to the bit-depth of the target. Any value that cannot be represented in the attachment's format is undefined. For any other attachment format no conversion is performed. If the type of the values written by the fragment shader do not match the format of the corresponding color attachment, the resulting values are undefined for those components.

15.4. Fragment Input Attachment Interface

When a fragment stage is present in a pipeline, the fragment shader subpass inputs form an interface with the input attachments of the current subpass. The fragment shader subpass input variables are matched by `InputAttachmentIndex` decorations to the input attachments specified in the `pInputAttachments` array of the VkSubpassDescription structure describing the subpass that the fragment shader is executed in.

The fragment shader subpass input variables with the `UniformConstant` storage class and a decoration of `InputAttachmentIndex` that are statically used by `OpEntryPoint` form the *fragment input attachment interface*. These variables **must** be declared with a type of `OpTypeImage`, a `Dim` operand of `SubpassData`, an `Arrayed` operand of 0, and a `Sampled` operand of 2. The `MS` operand of the `OpTypeImage` **must** be 0 if the `samples` field of the corresponding VkAttachmentDescription is `VK_SAMPLE_COUNT_1_BIT` and 1 otherwise.

A subpass input variable identified with an `InputAttachmentIndex` decoration of *i* reads from the input attachment indicated by `pInputAttachments`[*i*] member of `VkSubpassDescription`. If the subpass input variable is declared as an array of size N, it consumes N consecutive input attachments, starting with the index specified. There **must** not be more than one input variable with the same `InputAttachmentIndex` whether explicitly declared or implied by an array declaration per image aspect. A multi-aspect image (e.g. a depth/stencil format) **can** use the same input variable. The number of available input attachment indices is given by the `maxPerStageDescriptorInputAttachments` member of the `VkPhysicalDeviceLimits` structure.

Variables identified with the `InputAttachmentIndex` **must** only be used by a fragment stage. The numeric format of the subpass input **must** match the format of the corresponding input attachment, or the values of subpass loads from these variables are undefined. If the framebuffer attachment contains both depth and stencil aspects, the numeric format of the subpass input determines if depth or stencil aspect is accessed by the shader.

See Input Attachment for more details.

15.4.1. Fragment Input Attachment Compatibility

An input attachment that is statically accessed by a fragment shader **must** be backed by a descriptor that is equivalent to the VkImageView in the VkFramebuffer, except for `subresourceRange.aspectMask`. The `aspectMask` **must** be equal to the aspect accessed by the shader.

15.5. Shader Resource Interface

When a shader stage accesses buffer or image resources, as described in the Resource Descriptors section, the shader resource variables **must** be matched with the pipeline layout that is provided at pipeline creation time.

The set of shader variables that form the *shader resource interface* for a stage are the variables statically used by that stage's `OpEntryPoint` with a storage class of `Uniform`, `UniformConstant`, `StorageBuffer`, or `PushConstant`. For the fragment shader, this includes the fragment input attachment interface.

The shader resource interface consists of two sub-interfaces: the push constant interface and the descriptor set interface.

15.5.1. Push Constant Interface

The shader variables defined with a storage class of `PushConstant` that are statically used by the shader entry points for the pipeline define the *push constant interface*. They **must** be:

- typed as `OpTypeStruct`,
- identified with a `Block` decoration, and
- laid out explicitly using the `Offset`, `ArrayStride`, and `MatrixStride` decorations as specified in Offset and Stride Assignment.

There **must** be no more than one push constant block statically used per shader entry point.

Each statically used member of a push constant block **must** be placed at an `Offset` such that the entire member is entirely contained within the VkPushConstantRange for each `OpEntryPoint` that uses it, and the `stageFlags` for that range **must** specify the appropriate VkShaderStageFlagBits for that stage. The `Offset` decoration for any member of a push constant block **must** not cause the space required for that member to extend outside the range [0, `maxPushConstantsSize`).

Any member of a push constant block that is declared as an array **must** only be accessed with *dynamically uniform* indices.

15.5.2. Descriptor Set Interface

The *descriptor set interface* is comprised of the shader variables with the storage class of `StorageBuffer`, `Uniform` or `UniformConstant` (including the variables in the fragment input attachment interface) that are statically used by the shader entry points for the pipeline.

These variables **must** have `DescriptorSet` and `Binding` decorations specified, which are assigned and matched with the `VkDescriptorSetLayout` objects in the pipeline layout as described in DescriptorSet

and Binding Assignment.

The Image Format of an OpTypeImage declaration **must** not be **Unknown**, for variables which are used for OpImageRead, OpImageSparseRead, or OpImageWrite operations, except under the following conditions:

- For OpImageWrite, if the image format is listed in the storage without format list and if the shaderStorageImageWriteWithoutFormat feature is enabled and the shader module declares the StorageImageWriteWithoutFormat capability.
- For OpImageWrite, if the image format supports VK_FORMAT_FEATURE_2_STORAGE_WRITE_WITHOUT_FORMAT_BIT and the shader module declares the StorageImageWriteWithoutFormat capability.
- For OpImageRead or OpImageSparseRead, if the image format is listed in the storage without format list and if the shaderStorageImageReadWithoutFormat feature is enabled and the shader module declares the StorageImageReadWithoutFormat capability.
- For OpImageRead or OpImageSparseRead, if the image format supports VK_FORMAT_FEATURE_2_STORAGE_READ_WITHOUT_FORMAT_BIT and the shader module declares the StorageImageReadWithoutFormat capability.
- For OpImageRead, if Dim is SubpassData (indicating a read from an input attachment).

The Image Format of an OpTypeImage declaration **must** not be **Unknown**, for variables which are used for OpAtomic* operations.

Variables identified with the Uniform storage class are used to access transparent buffer backed resources. Such variables **must** be:

- typed as OpTypeStruct, or an array of this type,
- identified with a Block or BufferBlock decoration, and
- laid out explicitly using the Offset, ArrayStride, and MatrixStride decorations as specified in Offset and Stride Assignment.

Variables identified with the StorageBuffer storage class are used to access transparent buffer backed resources. Such variables **must** be:

- typed as OpTypeStruct, or an array of this type,
- identified with a Block decoration, and
- laid out explicitly using the Offset, ArrayStride, and MatrixStride decorations as specified in Offset and Stride Assignment.

The Offset decoration for any member of a Block-decorated variable in the Uniform storage class **must** not cause the space required for that variable to extend outside the range [0, maxUniformBufferRange). The Offset decoration for any member of a Block-decorated variable in the StorageBuffer storage class **must** not cause the space required for that variable to extend outside the range [0, maxStorageBufferRange).

Variables identified with the Uniform storage class **can** also be used to access transparent descriptor set backed resources when the variable is assigned to a descriptor set layout binding with a

descriptorType of VK_DESCRIPTOR_TYPE_INLINE_UNIFORM_BLOCK. In this case the variable **must** be typed as OpTypeStruct and **cannot** be aggregated into arrays of that type. Further, the Offset decoration for any member of such a variable **must** not cause the space required for that variable to extend outside the range [0,maxInlineUniformBlockSize).

Variables identified with a storage class of UniformConstant and a decoration of InputAttachmentIndex **must** be declared as described in Fragment Input Attachment Interface.

SPIR-V variables decorated with a descriptor set and binding that identify a combined image sampler descriptor **can** have a type of OpTypeImage, OpTypeSampler (Sampled=1), or OpTypeSampledImage.

When accessing a resource through such a variable, the resource **must** be selected via compile time constant expressions unless features are enabled to allow dynamically uniform or non-uniform expressions, as described below:

- Storage images (except storage texel buffers and input attachments):
  - Dynamically uniform: shaderStorageImageArrayDynamicIndexing and StorageImageArrayDynamicIndexing
  - Non-uniform: shaderStorageImageArrayNonUniformIndexing and StorageImageArrayNonUniformIndexing
- Storage texel buffers:
  - Dynamically uniform: shaderStorageTexelBufferArrayDynamicIndexing and StorageTexelBufferArrayDynamicIndexing
  - Non-uniform: shaderStorageTexelBufferArrayNonUniformIndexing and StorageTexelBufferArrayNonUniformIndexing
- Input attachments:
  - Dynamically uniform: shaderInputAttachmentArrayDynamicIndexing and InputAttachmentArrayDynamicIndexing
  - Non-uniform: shaderInputAttachmentArrayNonUniformIndexing and InputAttachmentArrayNonUniformIndexing
- Sampled images (except uniform texel buffers), samplers and combined image samplers:
  - Dynamically uniform: shaderSampledImageArrayDynamicIndexing and SampledImageArrayDynamicIndexing
  - Non-uniform: shaderSampledImageArrayNonUniformIndexing and SampledImageArrayNonUniformIndexing
- Uniform texel buffers:
  - Dynamically uniform: shaderUniformTexelBufferArrayDynamicIndexing and UniformTexelBufferArrayDynamicIndexing
  - Non-uniform: shaderUniformTexelBufferArrayNonUniformIndexing and UniformTexelBufferArrayNonUniformIndexing
- Uniform buffers:
  - Dynamically uniform: shaderUniformBufferArrayDynamicIndexing and

UniformBufferArrayDynamicIndexing

- Non-uniform: shaderUniformBufferArrayNonUniformIndexing and UniformBufferArrayNonUniformIndexing

- Storage buffers:
  - Dynamically uniform: shaderStorageBufferArrayDynamicIndexing and StorageBufferArrayDynamicIndexing
  - Non-uniform: shaderStorageBufferArrayNonUniformIndexing and StorageBufferArrayNonUniformIndexing

Example 1. Note

> Implementations must take care when implementing this if subgroups are not necessarily a subset of the invocation group for their hardware (e.g. if multiple draw calls are packed together). If such an implementation needs uniformity across the subgroup for any resource access, the implementation is responsible for ensuring that indices that are only dynamically uniform across the invocation group still function as expected if they advertise the respective feature.

A combined image sampler in an array that enables sampler $Y'C_BC_R$ conversion **must** only be indexed by constant integral expressions.

Table 11. Shader Resource and Descriptor Type Correspondence

Resource type	Descriptor Type
sampler	VK_DESCRIPTOR_TYPE_SAMPLER or VK_DESCRIPTOR_TYPE_COMBINED_IMAGE_SAMPLER
sampled image	VK_DESCRIPTOR_TYPE_SAMPLED_IMAGE or VK_DESCRIPTOR_TYPE_COMBINED_IMAGE_SAMPLER
storage image	VK_DESCRIPTOR_TYPE_STORAGE_IMAGE
combined image sampler	VK_DESCRIPTOR_TYPE_COMBINED_IMAGE_SAMPLER
uniform texel buffer	VK_DESCRIPTOR_TYPE_UNIFORM_TEXEL_BUFFER
storage texel buffer	VK_DESCRIPTOR_TYPE_STORAGE_TEXEL_BUFFER
uniform buffer	VK_DESCRIPTOR_TYPE_UNIFORM_BUFFER or VK_DESCRIPTOR_TYPE_UNIFORM_BUFFER_DYNAMIC
storage buffer	VK_DESCRIPTOR_TYPE_STORAGE_BUFFER or VK_DESCRIPTOR_TYPE_STORAGE_BUFFER_DYNAMIC
input attachment	VK_DESCRIPTOR_TYPE_INPUT_ATTACHMENT
inline uniform block	VK_DESCRIPTOR_TYPE_INLINE_UNIFORM_BLOCK

Table 12. Shader Resource and Storage Class Correspondence

Resource type	Storage Class	Type[1]	Decoration(s)[2]
sampler	UniformConstant	OpTypeSampler	

Resource type	Storage Class	Type[1]	Decoration(s)[2]
sampled image	UniformConstant	OpTypeImage (Sampled=1)	
storage image	UniformConstant	OpTypeImage (Sampled=2)	
combined image sampler	UniformConstant	OpTypeSampledImage OpTypeImage (Sampled=1) OpTypeSampler	
uniform texel buffer	UniformConstant	OpTypeImage (Dim=Buffer, Sampled=1)	
storage texel buffer	UniformConstant	OpTypeImage (Dim=Buffer, Sampled=2)	
uniform buffer	Uniform	OpTypeStruct	Block, Offset, (ArrayStride), (MatrixStride)
storage buffer	Uniform	OpTypeStruct	BufferBlock, Offset, (ArrayStride), (MatrixStride)
	StorageBuffer		Block, Offset, (ArrayStride), (MatrixStride)
input attachment	UniformConstant	OpTypeImage (Dim=SubpassData, Sampled=2)	InputAttachmentIndex
inline uniform block	Uniform	OpTypeStruct	Block, Offset, (ArrayStride), (MatrixStride)

1

Where OpTypeImage is referenced, the Dim values Buffer and Subpassdata are only accepted where they are specifically referenced. They do not correspond to resource types where a generic OpTypeImage is specified.

2

In addition to DescriptorSet and Binding.

15.5.3. DescriptorSet and Binding Assignment

A variable decorated with a DescriptorSet decoration of s and a Binding decoration of b indicates that this variable is associated with the VkDescriptorSetLayoutBinding that has a binding equal to b in pSetLayouts[s] that was specified in VkPipelineLayoutCreateInfo.

DescriptorSet decoration values **must** be between zero and maxBoundDescriptorSets minus one, inclusive. Binding decoration values **can** be any 32-bit unsigned integer value, as described in Descriptor Set Layout. Each descriptor set has its own binding name space.

If the Binding decoration is used with an array, the entire array is assigned that binding value. The array **must** be a single-dimensional array and size of the array **must** be no larger than the number of descriptors in the binding. If the array is runtime-sized, then array elements greater than or equal to the size of that binding in the bound descriptor set **must** not be used. If the array is runtime-sized, the runtimeDescriptorArray feature **must** be enabled and the RuntimeDescriptorArray

capability **must** be declared. The index of each element of the array is referred to as the *arrayElement*. For the purposes of interface matching and descriptor set operations, if a resource variable is not an array, it is treated as if it has an arrayElement of zero.

There is a limit on the number of resources of each type that **can** be accessed by a pipeline stage as shown in Shader Resource Limits. The "Resources Per Stage" column gives the limit on the number each type of resource that **can** be statically used for an entry point in any given stage in a pipeline. The "Resource Types" column lists which resource types are counted against the limit. Some resource types count against multiple limits.

The pipeline layout **may** include descriptor sets and bindings which are not referenced by any variables statically used by the entry points for the shader stages in the binding's `stageFlags`.

However, if a variable assigned to a given `DescriptorSet` and `Binding` is statically used by the entry point for a shader stage, the pipeline layout **must** contain a descriptor set layout binding in that descriptor set layout and for that binding number, and that binding's `stageFlags` **must** include the appropriate VkShaderStageFlagBits for that stage. The variable **must** be of a valid resource type determined by its SPIR-V type and storage class, as defined in Shader Resource and Storage Class Correspondence. The descriptor set layout binding **must** be of a corresponding descriptor type, as defined in Shader Resource and Descriptor Type Correspondence.

NOTE

There are no limits on the number of shader variables that can have overlapping set and binding values in a shader; but which resources are statically used has an impact. If any shader variable identifying a resource is statically used in a shader, then the underlying descriptor bound at the declared set and binding **must** support the declared type in the shader when the shader executes.

If multiple shader variables are declared with the same set and binding values, and with the same underlying descriptor type, they can all be statically used within the same shader. However, accesses are not automatically synchronized, and `Aliased` decorations should be used to avoid data hazards (see section 2.18.2 Aliasing in the SPIR-V specification).

If multiple shader variables with the same set and binding values are declared in a single shader, but with different declared types, where any of those are not supported by the relevant bound descriptor, that shader can only be executed if the variables with the unsupported type are not statically used.

A noteworthy example of using multiple statically-used shader variables sharing the same descriptor set and binding values is a descriptor of type `VK_DESCRIPTOR_TYPE_COMBINED_IMAGE_SAMPLER` that has multiple corresponding shader variables in the `UniformConstant` storage class, where some could be `OpTypeImage` (`Sampled`=1), some could be `OpTypeSampler`, and some could be `OpTypeSampledImage`.

Table 13. Shader Resource Limits

Resources per Stage	Resource Types
`maxPerStageDescriptorSamplers` or `maxPerStageDescriptorUpdateAfterBindSamplers`	sampler
	combined image sampler

Resources per Stage	Resource Types
`maxPerStageDescriptorSampledImages` or `maxPerStageDescriptorUpdateAfterBindSampledImages`	sampled image
	combined image sampler
	uniform texel buffer
`maxPerStageDescriptorStorageImages` or `maxPerStageDescriptorUpdateAfterBindStorageImages`	storage image
	storage texel buffer
`maxPerStageDescriptorUniformBuffers` or `maxPerStageDescriptorUpdateAfterBindUniformBuffers`	uniform buffer
	uniform buffer dynamic
`maxPerStageDescriptorStorageBuffers` or `maxPerStageDescriptorUpdateAfterBindStorageBuffers`	storage buffer
	storage buffer dynamic
`maxPerStageDescriptorInputAttachments` or `maxPerStageDescriptorUpdateAfterBindInputAttachments`	input attachment[1]
`maxPerStageDescriptorInlineUniformBlocks` or `maxPerStageDescriptorUpdateAfterBindInlineUniformBlocks`	inline uniform block

1

Input attachments **can** only be used in the fragment shader stage

15.5.4. Offset and Stride Assignment

Certain objects **must** be explicitly laid out using the `Offset`, `ArrayStride`, and `MatrixStride`, as described in SPIR-V explicit layout validation rules. All such layouts also **must** conform to the following requirements.

NOTE	The numeric order of `Offset` decorations does not need to follow member declaration order.

Alignment Requirements

There are different alignment requirements depending on the specific resources and on the features enabled on the device.

Matrix types are defined in terms of arrays as follows:

- A column-major matrix with C columns and R rows is equivalent to a C element array of vectors with R components.
- A row-major matrix with C columns and R rows is equivalent to an R element array of vectors with C components.

The *scalar alignment* of the type of an `OpTypeStruct` member is defined recursively as follows:

- A scalar of size N has a scalar alignment of N.

- A vector type has a scalar alignment equal to that of its component type.
- An array type has a scalar alignment equal to that of its element type.
- A structure has a scalar alignment equal to the largest scalar alignment of any of its members.
- A matrix type inherits *scalar alignment* from the equivalent array declaration.

The *base alignment* of the type of an `OpTypeStruct` member is defined recursively as follows:

- A scalar has a base alignment equal to its scalar alignment.
- A two-component vector has a base alignment equal to twice its scalar alignment.
- A three- or four-component vector has a base alignment equal to four times its scalar alignment.
- An array has a base alignment equal to the base alignment of its element type.
- A structure has a base alignment equal to the largest base alignment of any of its members. An empty structure has a base alignment equal to the size of the smallest scalar type permitted by the capabilities declared in the SPIR-V module. (e.g., for a 1 byte aligned empty struct in the `StorageBuffer` storage class, `StorageBuffer8BitAccess` or `UniformAndStorageBuffer8BitAccess` **must** be declared in the SPIR-V module.)
- A matrix type inherits *base alignment* from the equivalent array declaration.

The *extended alignment* of the type of an `OpTypeStruct` member is similarly defined as follows:

- A scalar or vector type has an extended alignment equal to its base alignment.
- An array or structure type has an extended alignment equal to the largest extended alignment of any of its members, rounded up to a multiple of 16.
- A matrix type inherits extended alignment from the equivalent array declaration.

A member is defined to *improperly straddle* if either of the following are true:

- It is a vector with total size less than or equal to 16 bytes, and has `Offset` decorations placing its first byte at F and its last byte at L, where floor(F / 16) != floor(L / 16).
- It is a vector with total size greater than 16 bytes and has its `Offset` decorations placing its first byte at a non-integer multiple of 16.

Standard Buffer Layout

Every member of an `OpTypeStruct` that is required to be explicitly laid out **must** be aligned according to the first matching rule as follows. If the struct is contained in pointer types of multiple storage classes, it **must** satisfy the requirements for every storage class used to reference it.

1. If the `scalarBlockLayout` feature is enabled on the device and the storage class is `Uniform`, `StorageBuffer`, `PhysicalStorageBuffer`, or `PushConstant` then every member **must** be aligned according to its scalar alignment.
2. All vectors **must** be aligned according to their scalar alignment.
3. If the `uniformBufferStandardLayout` feature is not enabled on the device, then any member of an `OpTypeStruct` with a storage class of `Uniform` and a decoration of `Block` **must** be aligned according to its extended alignment.

4. Every other member **must** be aligned according to its base alignment.

> **NOTE** Even if scalar alignment is supported, it is generally more performant to use the *base alignment*.

The memory layout **must** obey the following rules:

- The `Offset` decoration of any member **must** be a multiple of its alignment.
- Any `ArrayStride` or `MatrixStride` decoration **must** be a multiple of the alignment of the array or matrix as defined above.

If one of the conditions below applies

- The storage class is `Uniform`, `StorageBuffer`, `PhysicalStorageBuffer`, or `PushConstant`, and the `scalarBlockLayout` feature is not enabled on the device.
- The storage class is any other storage class.

the memory layout **must** also obey the following rules:

- Vectors **must** not improperly straddle, as defined above.
- The `Offset` decoration of a member **must** not place it between the end of a structure, an array or a matrix and the next multiple of the alignment of that structure, array or matrix.

> **NOTE** The **std430 layout** in GLSL satisfies these rules for types using the base alignment. The **std140 layout** satisfies the rules for types using the extended alignment.

15.6. Built-In Variables

Built-in variables are accessed in shaders by declaring a variable decorated with a `BuiltIn` SPIR-V decoration. The meaning of each `BuiltIn` decoration is as follows. In the remainder of this section, the name of a built-in is used interchangeably with a term equivalent to a variable decorated with that particular built-in. Built-ins that represent integer values **can** be declared as either signed or unsigned 32-bit integers.

As mentioned above, some inputs and outputs have an additional level of arrayness relative to other shader inputs and outputs. This level of arrayness is not included in the type descriptions below, but **must** be included when declaring the built-in.

Any two `Input` storage class `OpVariable` declarations listed as operands on the same `OpEntryPoint` **must** not have the same `BuiltIn` decoration. Any two `Output` storage class `OpVariable` declarations listed as operands on the same `OpEntryPoint` **must** not have the same `BuiltIn` decoration.

`BaseInstance`

Decorating a variable with the `BaseInstance` built-in will make that variable contain the integer value corresponding to the first instance that was passed to the command that invoked the current vertex shader invocation. `BaseInstance` is the `firstInstance` parameter to a *direct drawing command* or the `firstInstance` member of a structure consumed by an *indirect drawing command*.

Valid Usage

- VUID-BaseInstance-BaseInstance-04181
  The `BaseInstance` decoration **must** be used only within the `Vertex Execution Model`
- VUID-BaseInstance-BaseInstance-04182
  The variable decorated with `BaseInstance` **must** be declared using the `Input Storage Class`
- VUID-BaseInstance-BaseInstance-04183
  The variable decorated with `BaseInstance` **must** be declared as a scalar 32-bit integer value

`BaseVertex`

Decorating a variable with the `BaseVertex` built-in will make that variable contain the integer value corresponding to the first vertex or vertex offset that was passed to the command that invoked the current vertex shader invocation. For *non-indexed drawing commands*, this variable is the `firstVertex` parameter to a *direct drawing command* or the `firstVertex` member of the structure consumed by an *indirect drawing command*. For *indexed drawing commands*, this variable is the `vertexOffset` parameter to a *direct drawing command* or the `vertexOffset` member of the structure consumed by an *indirect drawing command*.

Valid Usage

- VUID-BaseVertex-BaseVertex-04184
  The `BaseVertex` decoration **must** be used only within the `Vertex Execution Model`
- VUID-BaseVertex-BaseVertex-04185
  The variable decorated with `BaseVertex` **must** be declared using the `Input Storage Class`
- VUID-BaseVertex-BaseVertex-04186
  The variable decorated with `BaseVertex` **must** be declared as a scalar 32-bit integer value

`ClipDistance`

Decorating a variable with the `ClipDistance` built-in decoration will make that variable contain the mechanism for controlling user clipping. `ClipDistance` is an array such that the i^{th} element of the array specifies the clip distance for plane i. A clip distance of 0 means the vertex is on the plane, a positive distance means the vertex is inside the clip half-space, and a negative distance means the vertex is outside the clip half-space.

NOTE	The array variable decorated with `ClipDistance` is explicitly sized by the shader.
NOTE	In the last pre-rasterization shader stage, these values will be linearly interpolated across the primitive and the portion of the primitive with interpolated distances less than 0 will be considered outside the clip volume. If `ClipDistance` is then used by a fragment shader, `ClipDistance` contains these linearly interpolated values.

Valid Usage

- VUID-ClipDistance-ClipDistance-04187
  The `ClipDistance` decoration **must** be used only within the `MeshEXT`, `MeshNV`, `Vertex`, `Fragment`, `TessellationControl`, `TessellationEvaluation`, or `Geometry` `Execution Model`
- VUID-ClipDistance-ClipDistance-04188
  The variable decorated with `ClipDistance` within the `MeshEXT`, `MeshNV`, or `Vertex` `Execution Model` **must** be declared using the `Output` `Storage Class`
- VUID-ClipDistance-ClipDistance-04189
  The variable decorated with `ClipDistance` within the `Fragment` `Execution Model` **must** be declared using the `Input` `Storage Class`
- VUID-ClipDistance-ClipDistance-04190
  The variable decorated with `ClipDistance` within the `TessellationControl`, `TessellationEvaluation`, or `Geometry` `Execution Model` **must** not be declared in a `Storage Class` other than `Input` or `Output`
- VUID-ClipDistance-ClipDistance-04191
  The variable decorated with `ClipDistance` **must** be declared as an array of 32-bit floating-point values

`CullDistance`

Decorating a variable with the `CullDistance` built-in decoration will make that variable contain the mechanism for controlling user culling. If any member of this array is assigned a negative value for all vertices belonging to a primitive, then the primitive is discarded before rasterization.

NOTE In fragment shaders, the values of the `CullDistance` array are linearly interpolated across each primitive.

NOTE If `CullDistance` decorates an input variable, that variable will contain the corresponding value from the `CullDistance` decorated output variable from the previous shader stage.

Valid Usage

- VUID-CullDistance-CullDistance-04196
  The `CullDistance` decoration **must** be used only within the `MeshEXT`, `MeshNV`, `Vertex`, `Fragment`, `TessellationControl`, `TessellationEvaluation`, or `Geometry` `Execution Model`
- VUID-CullDistance-CullDistance-04197
  The variable decorated with `CullDistance` within the `MeshEXT`, `MeshNV` or `Vertex` `Execution Model` **must** be declared using the `Output` `Storage Class`
- VUID-CullDistance-CullDistance-04198
  The variable decorated with `CullDistance` within the `Fragment` `Execution Model` **must** be declared using the `Input` `Storage Class`

- VUID-CullDistance-CullDistance-04199
  The variable decorated with `CullDistance` within the `TessellationControl`, `TessellationEvaluation`, or `Geometry` `Execution Model` **must** not be declared using a `Storage Class` other than `Input` or `Output`
- VUID-CullDistance-CullDistance-04200
  The variable decorated with `CullDistance` **must** be declared as an array of 32-bit floating-point values

`DeviceIndex`

The `DeviceIndex` decoration **can** be applied to a shader input which will be filled with the device index of the physical device that is executing the current shader invocation. This value will be in the range $[0, max(1, physicalDeviceCount))$, where physicalDeviceCount is the `physicalDeviceCount` member of VkDeviceGroupDeviceCreateInfo.

Valid Usage

- VUID-DeviceIndex-DeviceIndex-04205
  The variable decorated with `DeviceIndex` **must** be declared using the `Input` `Storage Class`
- VUID-DeviceIndex-DeviceIndex-04206
  The variable decorated with `DeviceIndex` **must** be declared as a scalar 32-bit integer value

`DrawIndex`

Decorating a variable with the `DrawIndex` built-in will make that variable contain the integer value corresponding to the zero-based index of the draw that invoked the current vertex shader invocation. For *indirect drawing commands*, `DrawIndex` begins at zero and increments by one for each draw executed. The number of draws is given by the `drawCount` parameter. For *direct drawing commands*, `DrawIndex` is always zero. `DrawIndex` is dynamically uniform.

Valid Usage

- VUID-DrawIndex-DrawIndex-04207
  The `DrawIndex` decoration **must** be used only within the `Vertex`, `MeshEXT`, `TaskEXT`, `MeshNV`, or `TaskNV` `Execution Model`
- VUID-DrawIndex-DrawIndex-04208
  The variable decorated with `DrawIndex` **must** be declared using the `Input` `Storage Class`
- VUID-DrawIndex-DrawIndex-04209
  The variable decorated with `DrawIndex` **must** be declared as a scalar 32-bit integer value

`FragCoord`

Decorating a variable with the `FragCoord` built-in decoration will make that variable contain the framebuffer coordinate $(x, y, z, \frac{1}{w})$ of the fragment being processed. The (x,y) coordinate (0,0) is the upper left corner of the upper left pixel in the framebuffer.

When Sample Shading is enabled, the x and y components of FragCoord reflect the location of one of the samples corresponding to the shader invocation.

Otherwise, the x and y components of FragCoord reflect the location of the center of the fragment.

The z component of FragCoord is the interpolated depth value of the primitive.

The w component is the interpolated $\frac{1}{w}$.

The Centroid interpolation decoration is ignored, but allowed, on FragCoord.

Valid Usage

- VUID-FragCoord-FragCoord-04210
  The FragCoord decoration **must** be used only within the Fragment Execution Model
- VUID-FragCoord-FragCoord-04211
  The variable decorated with FragCoord **must** be declared using the Input Storage Class
- VUID-FragCoord-FragCoord-04212
  The variable decorated with FragCoord **must** be declared as a four-component vector of 32-bit floating-point values

FragDepth

To have a shader supply a fragment-depth value, the shader **must** declare the DepthReplacing execution mode. Such a shader's fragment-depth value will come from the variable decorated with the FragDepth built-in decoration.

This value will be used for any subsequent depth testing performed by the implementation or writes to the depth attachment. See fragment shader depth replacement for details.

Valid Usage

- VUID-FragDepth-FragDepth-04213
  The FragDepth decoration **must** be used only within the Fragment Execution Model
- VUID-FragDepth-FragDepth-04214
  The variable decorated with FragDepth **must** be declared using the Output Storage Class
- VUID-FragDepth-FragDepth-04215
  The variable decorated with FragDepth **must** be declared as a scalar 32-bit floating-point value
- VUID-FragDepth-FragDepth-04216
  If the shader dynamically writes to the variable decorated with FragDepth, the DepthReplacing Execution Mode **must** be declared

FrontFacing

Decorating a variable with the FrontFacing built-in decoration will make that variable contain

whether the fragment is front or back facing. This variable is non-zero if the current fragment is considered to be part of a front-facing polygon primitive or of a non-polygon primitive and is zero if the fragment is considered to be part of a back-facing polygon primitive.

Valid Usage

- VUID-FrontFacing-FrontFacing-04229
  The `FrontFacing` decoration **must** be used only within the `Fragment` `Execution` `Model`
- VUID-FrontFacing-FrontFacing-04230
  The variable decorated with `FrontFacing` **must** be declared using the `Input` `Storage` `Class`
- VUID-FrontFacing-FrontFacing-04231
  The variable decorated with `FrontFacing` **must** be declared as a boolean value

`GlobalInvocationId`

Decorating a variable with the `GlobalInvocationId` built-in decoration will make that variable contain the location of the current invocation within the global workgroup. Each component is equal to the index of the local workgroup multiplied by the size of the local workgroup plus `LocalInvocationId`.

Valid Usage

- VUID-GlobalInvocationId-GlobalInvocationId-04236
  The `GlobalInvocationId` decoration **must** be used only within the `GLCompute`, `MeshEXT`, `TaskEXT`, `MeshNV`, or `TaskNV` `Execution` `Model`
- VUID-GlobalInvocationId-GlobalInvocationId-04237
  The variable decorated with `GlobalInvocationId` **must** be declared using the `Input` `Storage` `Class`
- VUID-GlobalInvocationId-GlobalInvocationId-04238
  The variable decorated with `GlobalInvocationId` **must** be declared as a three-component vector of 32-bit integer values

`HelperInvocation`

Decorating a variable with the `HelperInvocation` built-in decoration will make that variable contain whether the current invocation is a helper invocation. This variable is non-zero if the current fragment being shaded is a helper invocation and zero otherwise. A helper invocation is an invocation of the shader that is produced to satisfy internal requirements such as the generation of derivatives.

NOTE It is very likely that a helper invocation will have a value of `SampleMask` fragment shader input value that is zero.

Valid Usage

- VUID-HelperInvocation-HelperInvocation-04239
  The `HelperInvocation` decoration **must** be used only within the `Fragment Execution Model`
- VUID-HelperInvocation-HelperInvocation-04240
  The variable decorated with `HelperInvocation` **must** be declared using the `Input Storage Class`
- VUID-HelperInvocation-HelperInvocation-04241
  The variable decorated with `HelperInvocation` **must** be declared as a boolean value

`InvocationId`

Decorating a variable with the `InvocationId` built-in decoration will make that variable contain the index of the current shader invocation in a geometry shader, or the index of the output patch vertex in a tessellation control shader.

In a geometry shader, the index of the current shader invocation ranges from zero to the number of instances declared in the shader minus one. If the instance count of the geometry shader is one or is not specified, then `InvocationId` will be zero.

Valid Usage

- VUID-InvocationId-InvocationId-04257
  The `InvocationId` decoration **must** be used only within the `TessellationControl` or `Geometry Execution Model`
- VUID-InvocationId-InvocationId-04258
  The variable decorated with `InvocationId` **must** be declared using the `Input Storage Class`
- VUID-InvocationId-InvocationId-04259
  The variable decorated with `InvocationId` **must** be declared as a scalar 32-bit integer value

`InstanceIndex`

Decorating a variable in a vertex shader with the `InstanceIndex` built-in decoration will make that variable contain the index of the instance that is being processed by the current vertex shader invocation. `InstanceIndex` begins at the `firstInstance` parameter to vkCmdDraw or vkCmdDrawIndexed or at the `firstInstance` member of a structure consumed by vkCmdDrawIndirect or vkCmdDrawIndexedIndirect.

Valid Usage

- VUID-InstanceIndex-InstanceIndex-04263
  The `InstanceIndex` decoration **must** be used only within the `Vertex Execution Model`
- VUID-InstanceIndex-InstanceIndex-04264
  The variable decorated with `InstanceIndex` **must** be declared using the `Input Storage Class`

- VUID-InstanceIndex-InstanceIndex-04265
  The variable decorated with `InstanceIndex` **must** be declared as a scalar 32-bit integer value

`Layer`

Decorating a variable with the `Layer` built-in decoration will make that variable contain the select layer of a multi-layer framebuffer attachment.

In a vertex, tessellation evaluation, or geometry shader, any variable decorated with `Layer` can be written with the framebuffer layer index to which the primitive produced by that shader will be directed.

The last active pre-rasterization shader stage (in pipeline order) controls the `Layer` that is used. Outputs in previous shader stages are not used, even if the last stage fails to write the `Layer`.

If the last active pre-rasterization shader stage shader entry point's interface does not include a variable decorated with `Layer`, then the first layer is used. If a pre-rasterization shader stage shader entry point's interface includes a variable decorated with `Layer`, it **must** write the same value to `Layer` for all output vertices of a given primitive. If the `Layer` value is less than 0 or greater than or equal to the number of layers in the framebuffer, then primitives **may** still be rasterized, fragment shaders **may** be executed, and the framebuffer values for all layers are undefined.

In a fragment shader, a variable decorated with `Layer` contains the layer index of the primitive that the fragment invocation belongs to.

Valid Usage

- VUID-Layer-Layer-04272
  The `Layer` decoration **must** be used only within the `MeshEXT`, `MeshNV`, `Vertex`, `TessellationEvaluation`, `Geometry`, or `Fragment` `Execution Model`
- VUID-Layer-Layer-04273
  If the `shaderOutputLayer` feature is not enabled then the `Layer` decoration **must** be used only within the `Geometry` or `Fragment` `Execution Model`
- VUID-Layer-Layer-04274
  The variable decorated with `Layer` within the `MeshEXT`, `MeshNV`, `Vertex`, `TessellationEvaluation`, or `Geometry` `Execution Model` **must** be declared using the `Output` `Storage Class`
- VUID-Layer-Layer-04275
  The variable decorated with `Layer` within the `Fragment` `Execution Model` **must** be declared using the `Input` `Storage Class`
- VUID-Layer-Layer-04276
  The variable decorated with `Layer` **must** be declared as a scalar 32-bit integer value
- VUID-Layer-Layer-07039
  The variable decorated with `Layer` within the `MeshEXT` `Execution Model` **must** also be decorated with the `PerPrimitiveEXT` decoration

`LocalInvocationId`

Decorating a variable with the `LocalInvocationId` built-in decoration will make that variable contain the location of the current compute shader invocation within the local workgroup. Each component ranges from zero through to the size of the workgroup in that dimension minus one.

NOTE If the size of the workgroup in a particular dimension is one, then the `LocalInvocationId` in that dimension will be zero. If the workgroup is effectively two-dimensional, then `LocalInvocationId.z` will be zero. If the workgroup is effectively one-dimensional, then both `LocalInvocationId.y` and `LocalInvocationId.z` will be zero.

Valid Usage

- VUID-LocalInvocationId-LocalInvocationId-04281
  The `LocalInvocationId` decoration **must** be used only within the `GLCompute`, `MeshEXT`, `TaskEXT`, `MeshNV`, or `TaskNV` `Execution Model`
- VUID-LocalInvocationId-LocalInvocationId-04282
  The variable decorated with `LocalInvocationId` **must** be declared using the `Input` `Storage Class`
- VUID-LocalInvocationId-LocalInvocationId-04283
  The variable decorated with `LocalInvocationId` **must** be declared as a three-component vector of 32-bit integer values

`LocalInvocationIndex`

Decorating a variable with the `LocalInvocationIndex` built-in decoration will make that variable contain a one-dimensional representation of `LocalInvocationId`. This is computed as:

```
LocalInvocationIndex =
    LocalInvocationId.z * WorkgroupSize.x * WorkgroupSize.y +
    LocalInvocationId.y * WorkgroupSize.x +
    LocalInvocationId.x;
```

Valid Usage

- VUID-LocalInvocationIndex-LocalInvocationIndex-04284
  The `LocalInvocationIndex` decoration **must** be used only within the `GLCompute`, `MeshEXT`, `TaskEXT`, `MeshNV`, or `TaskNV` `Execution Model`
- VUID-LocalInvocationIndex-LocalInvocationIndex-04285
  The variable decorated with `LocalInvocationIndex` **must** be declared using the `Input` `Storage Class`
- VUID-LocalInvocationIndex-LocalInvocationIndex-04286
  The variable decorated with `LocalInvocationIndex` **must** be declared as a scalar 32-bit integer value

`NumSubgroups`

Decorating a variable with the `NumSubgroups` built-in decoration will make that variable contain the number of subgroups in the local workgroup.

Valid Usage

- VUID-NumSubgroups-NumSubgroups-04293
  The `NumSubgroups` decoration **must** be used only within the `GLCompute`, `MeshEXT`, `TaskEXT`, `MeshNV`, or `TaskNV` `Execution Model`
- VUID-NumSubgroups-NumSubgroups-04294
  The variable decorated with `NumSubgroups` **must** be declared using the `Input` `Storage Class`
- VUID-NumSubgroups-NumSubgroups-04295
  The variable decorated with `NumSubgroups` **must** be declared as a scalar 32-bit integer value

`NumWorkgroups`

Decorating a variable with the `NumWorkgroups` built-in decoration will make that variable contain the number of local workgroups that are part of the dispatch that the invocation belongs to. Each component is equal to the values of the workgroup count parameters passed into the dispatching commands.

Valid Usage

- VUID-NumWorkgroups-NumWorkgroups-04296
  The `NumWorkgroups` decoration **must** be used only within the `GLCompute`, `MeshEXT`, or `TaskEXT` `Execution Model`
- VUID-NumWorkgroups-NumWorkgroups-04297
  The variable decorated with `NumWorkgroups` **must** be declared using the `Input` `Storage Class`
- VUID-NumWorkgroups-NumWorkgroups-04298
  The variable decorated with `NumWorkgroups` **must** be declared as a three-component vector of 32-bit integer values

`PatchVertices`

Decorating a variable with the `PatchVertices` built-in decoration will make that variable contain the number of vertices in the input patch being processed by the shader. In a Tessellation Control Shader, this is the same as the name:patchControlPoints member of VkPipelineTessellationStateCreateInfo. In a Tessellation Evaluation Shader, `PatchVertices` is equal to the tessellation control output patch size. When the same shader is used in different pipelines where the patch sizes are configured differently, the value of the `PatchVertices` variable will also differ.

Valid Usage

- VUID-PatchVertices-PatchVertices-04308
  The PatchVertices decoration **must** be used only within the TessellationControl or TessellationEvaluation Execution Model
- VUID-PatchVertices-PatchVertices-04309
  The variable decorated with PatchVertices **must** be declared using the Input Storage Class
- VUID-PatchVertices-PatchVertices-04310
  The variable decorated with PatchVertices **must** be declared as a scalar 32-bit integer value

PointCoord

Decorating a variable with the PointCoord built-in decoration will make that variable contain the coordinate of the current fragment within the point being rasterized, normalized to the size of the point with origin in the upper left corner of the point, as described in Basic Point Rasterization. If the primitive the fragment shader invocation belongs to is not a point, then the variable decorated with PointCoord contains an undefined value.

NOTE Depending on how the point is rasterized, PointCoord **may** never reach (0,0) or (1,1).

Valid Usage

- VUID-PointCoord-PointCoord-04311
  The PointCoord decoration **must** be used only within the Fragment Execution Model
- VUID-PointCoord-PointCoord-04312
  The variable decorated with PointCoord **must** be declared using the Input Storage Class
- VUID-PointCoord-PointCoord-04313
  The variable decorated with PointCoord **must** be declared as a two-component vector of 32-bit floating-point values

PointSize

Decorating a variable with the PointSize built-in decoration will make that variable contain the size of point primitives . The value written to the variable decorated with PointSize by the last pre-rasterization shader stage in the pipeline is used as the framebuffer-space size of points produced by rasterization.

NOTE When PointSize decorates a variable in the Input Storage Class, it contains the data written to the output variable decorated with PointSize from the previous shader stage.

Valid Usage

- VUID-PointSize-PointSize-04314
  The PointSize decoration **must** be used only within the MeshEXT, MeshNV, Vertex, TessellationControl, TessellationEvaluation, or Geometry Execution Model

- VUID-PointSize-PointSize-04315
  The variable decorated with `PointSize` within the `MeshEXT`, `MeshNV`, or `Vertex Execution Model` **must** be declared using the `Output Storage Class`
- VUID-PointSize-PointSize-04316
  The variable decorated with `PointSize` within the `TessellationControl`, `TessellationEvaluation`, or `Geometry Execution Model` **must** not be declared using a `Storage Class` other than `Input` or `Output`
- VUID-PointSize-PointSize-04317
  The variable decorated with `PointSize` **must** be declared as a scalar 32-bit floating-point value

`Position`

Decorating a variable with the `Position` built-in decoration will make that variable contain the position of the current vertex. In the last pre-rasterization shader stage, the value of the variable decorated with `Position` is used in subsequent primitive assembly, clipping, and rasterization operations.

NOTE When `Position` decorates a variable in the `Input Storage Class`, it contains the data written to the output variable decorated with `Position` from the previous shader stage.

Valid Usage

- VUID-Position-Position-04318
  The `Position` decoration **must** be used only within the `MeshEXT`, `MeshNV`, `Vertex`, `TessellationControl`, `TessellationEvaluation`, or `Geometry Execution Model`
- VUID-Position-Position-04319
  The variable decorated with `Position` within the `MeshEXT`, `MeshNV`, or `Vertex Execution Model` **must** be declared using the `Output Storage Class`
- VUID-Position-Position-04320
  The variable decorated with `Position` within the `TessellationControl`, `TessellationEvaluation`, or `Geometry Execution Model` **must** not be declared using a `Storage Class` other than `Input` or `Output`
- VUID-Position-Position-04321
  The variable decorated with `Position` **must** be declared as a four-component vector of 32-bit floating-point values

`PrimitiveId`

Decorating a variable with the `PrimitiveId` built-in decoration will make that variable contain the index of the current primitive.

The index of the first primitive generated by a drawing command is zero, and the index is incremented after every individual point, line, or triangle primitive is processed.

For triangles drawn as points or line segments (see Polygon Mode), the primitive index is incremented only once, even if multiple points or lines are eventually drawn.

Variables decorated with `PrimitiveId` are reset to zero between each instance drawn.

Restarting a primitive topology using primitive restart has no effect on the value of variables decorated with `PrimitiveId`.

In tessellation control and tessellation evaluation shaders, it will contain the index of the patch within the current set of rendering primitives that corresponds to the shader invocation.

In a geometry shader, it will contain the number of primitives presented as input to the shader since the current set of rendering primitives was started.

In a fragment shader, it will contain the primitive index written by the geometry shader if a geometry shader is present, or with the value that would have been presented as input to the geometry shader had it been present.

NOTE

When the `PrimitiveId` decoration is applied to an output variable in the geometry shader, the resulting value is seen through the `PrimitiveId` decorated input variable in the fragment shader.

The fragment shader using `PrimitiveId` will need to declare either the `Geometry` or `Tessellation` capability to satisfy the requirement SPIR-V has to use `PrimitiveId`.

Valid Usage

- VUID-PrimitiveId-PrimitiveId-04330
  The `PrimitiveId` decoration **must** be used only within the `MeshEXT`, `MeshNV`, `IntersectionKHR`, `AnyHitKHR`, `ClosestHitKHR`, `TessellationControl`, `TessellationEvaluation`, `Geometry`, or `Fragment Execution Model`
- VUID-PrimitiveId-Fragment-04331
  If pipeline contains both the `Fragment` and `Geometry Execution Model` and a variable decorated with `PrimitiveId` is read from `Fragment` shader, then the `Geometry` shader **must** write to the output variables decorated with `PrimitiveId` in all execution paths
- VUID-PrimitiveId-Fragment-04332
  If pipeline contains both the `Fragment` and `MeshEXT` or `MeshNV Execution Model` and a variable decorated with `PrimitiveId` is read from `Fragment` shader, then the `MeshEXT` or `MeshNV` shader **must** write to the output variables decorated with `PrimitiveId` in all execution paths
- VUID-PrimitiveId-Fragment-04333
  If `Fragment Execution Model` contains a variable decorated with `PrimitiveId`, then either the `MeshShadingEXT`, `MeshShadingNV`, `Geometry` or `Tessellation` capability **must** also be declared
- VUID-PrimitiveId-PrimitiveId-04334
  The variable decorated with `PrimitiveId` within the `TessellationControl`, `TessellationEvaluation`, `Fragment`, `IntersectionKHR`, `AnyHitKHR`, or `ClosestHitKHR Execution Model` **must** be declared using the `Input Storage Class`

- VUID-PrimitiveId-PrimitiveId-04335
  The variable decorated with `PrimitiveId` within the `Geometry Execution Model` **must** be declared using the `Input` or `Output Storage Class`
- VUID-PrimitiveId-PrimitiveId-04336
  The variable decorated with `PrimitiveId` within the `MeshEXT` or `MeshNV Execution Model` **must** be declared using the `Output Storage Class`
- VUID-PrimitiveId-PrimitiveId-04337
  The variable decorated with `PrimitiveId` **must** be declared as a scalar 32-bit integer value
- VUID-PrimitiveId-PrimitiveId-07040
  The variable decorated with `PrimitiveId` within the `MeshEXT Execution Model` **must** also be decorated with the `PerPrimitiveEXT` decoration

`SampleId`

Decorating a variable with the `SampleId` built-in decoration will make that variable contain the coverage index for the current fragment shader invocation. `SampleId` ranges from zero to the number of samples in the framebuffer minus one. If a fragment shader entry point's interface includes an input variable decorated with `SampleId`, Sample Shading is considered enabled with a `minSampleShading` value of 1.0.

Valid Usage

- VUID-SampleId-SampleId-04354
  The `SampleId` decoration **must** be used only within the `Fragment Execution Model`
- VUID-SampleId-SampleId-04355
  The variable decorated with `SampleId` **must** be declared using the `Input Storage Class`
- VUID-SampleId-SampleId-04356
  The variable decorated with `SampleId` **must** be declared as a scalar 32-bit integer value

`SampleMask`

Decorating a variable with the `SampleMask` built-in decoration will make any variable contain the sample mask for the current fragment shader invocation.

A variable in the `Input` storage class decorated with `SampleMask` will contain a bitmask of the set of samples covered by the primitive generating the fragment during rasterization. It has a sample bit set if and only if the sample is considered covered for this fragment shader invocation. `SampleMask`[] is an array of integers. Bits are mapped to samples in a manner where bit B of mask M (`SampleMask[M]`) corresponds to sample 32 × M + B.

A variable in the `Output` storage class decorated with `SampleMask` is an array of integers forming a bit array in a manner similar to an input variable decorated with `SampleMask`, but where each bit represents coverage as computed by the shader. This computed `SampleMask` is combined with the generated coverage mask in the multisample coverage operation.

Variables decorated with `SampleMask` **must** be either an unsized array, or explicitly sized to be no larger than the implementation-dependent maximum sample-mask (as an array of 32-bit

elements), determined by the maximum number of samples.

If a fragment shader entry point's interface includes an output variable decorated with SampleMask, the sample mask will be undefined for any array elements of any fragment shader invocations that fail to assign a value. If a fragment shader entry point's interface does not include an output variable decorated with SampleMask, the sample mask has no effect on the processing of a fragment.

Valid Usage

- VUID-SampleMask-SampleMask-04357
  The SampleMask decoration **must** be used only within the Fragment Execution Model
- VUID-SampleMask-SampleMask-04358
  The variable decorated with SampleMask **must** be declared using the Input or Output Storage Class
- VUID-SampleMask-SampleMask-04359
  The variable decorated with SampleMask **must** be declared as an array of 32-bit integer values

SamplePosition

Decorating a variable with the SamplePosition built-in decoration will make that variable contain the sub-pixel position of the sample being shaded. The top left of the pixel is considered to be at coordinate (0,0) and the bottom right of the pixel is considered to be at coordinate (1,1).

If a fragment shader entry point's interface includes an input variable decorated with SamplePosition, Sample Shading is considered enabled with a minSampleShading value of 1.0.

Valid Usage

- VUID-SamplePosition-SamplePosition-04360
  The SamplePosition decoration **must** be used only within the Fragment Execution Model
- VUID-SamplePosition-SamplePosition-04361
  The variable decorated with SamplePosition **must** be declared using the Input Storage Class
- VUID-SamplePosition-SamplePosition-04362
  The variable decorated with SamplePosition **must** be declared as a two-component vector of 32-bit floating-point values

SubgroupId

Decorating a variable with the SubgroupId built-in decoration will make that variable contain the index of the subgroup within the local workgroup. This variable is in range [0, NumSubgroups-1].

Valid Usage

- VUID-SubgroupId-SubgroupId-04367
  The `SubgroupId` decoration **must** be used only within the `GLCompute`, `MeshEXT`, `TaskEXT`, `MeshNV`, or `TaskNV` `Execution Model`
- VUID-SubgroupId-SubgroupId-04368
  The variable decorated with `SubgroupId` **must** be declared using the `Input` `Storage Class`
- VUID-SubgroupId-SubgroupId-04369
  The variable decorated with `SubgroupId` **must** be declared as a scalar 32-bit integer value

`SubgroupEqMask`

Decorating a variable with the `SubgroupEqMask` builtin decoration will make that variable contain the *subgroup mask* of the current subgroup invocation. The bit corresponding to the `SubgroupLocalInvocationId` is set in the variable decorated with `SubgroupEqMask`. All other bits are set to zero.

`SubgroupEqMaskKHR` is an alias of `SubgroupEqMask`.

Valid Usage

- VUID-SubgroupEqMask-SubgroupEqMask-04370
  The variable decorated with `SubgroupEqMask` **must** be declared using the `Input` `Storage Class`
- VUID-SubgroupEqMask-SubgroupEqMask-04371
  The variable decorated with `SubgroupEqMask` **must** be declared as a four-component vector of 32-bit integer values

`SubgroupGeMask`

Decorating a variable with the `SubgroupGeMask` builtin decoration will make that variable contain the *subgroup mask* of the current subgroup invocation. The bits corresponding to the invocations greater than or equal to `SubgroupLocalInvocationId` through `SubgroupSize`-1 are set in the variable decorated with `SubgroupGeMask`. All other bits are set to zero.

`SubgroupGeMaskKHR` is an alias of `SubgroupGeMask`.

Valid Usage

- VUID-SubgroupGeMask-SubgroupGeMask-04372
  The variable decorated with `SubgroupGeMask` **must** be declared using the `Input` `Storage Class`
- VUID-SubgroupGeMask-SubgroupGeMask-04373
  The variable decorated with `SubgroupGeMask` **must** be declared as a four-component vector of 32-bit integer values

`SubgroupGtMask`

Decorating a variable with the `SubgroupGtMask` builtin decoration will make that variable contain the *subgroup mask* of the current subgroup invocation. The bits corresponding to the invocations greater than `SubgroupLocalInvocationId` through `SubgroupSize`-1 are set in the variable decorated with `SubgroupGtMask`. All other bits are set to zero.

`SubgroupGtMaskKHR` is an alias of `SubgroupGtMask`.

Valid Usage

- VUID-SubgroupGtMask-SubgroupGtMask-04374
  The variable decorated with `SubgroupGtMask` **must** be declared using the `Input` `Storage Class`
- VUID-SubgroupGtMask-SubgroupGtMask-04375
  The variable decorated with `SubgroupGtMask` **must** be declared as a four-component vector of 32-bit integer values

`SubgroupLeMask`

Decorating a variable with the `SubgroupLeMask` builtin decoration will make that variable contain the *subgroup mask* of the current subgroup invocation. The bits corresponding to the invocations less than or equal to `SubgroupLocalInvocationId` are set in the variable decorated with `SubgroupLeMask`. All other bits are set to zero.

`SubgroupLeMaskKHR` is an alias of `SubgroupLeMask`.

Valid Usage

- VUID-SubgroupLeMask-SubgroupLeMask-04376
  The variable decorated with `SubgroupLeMask` **must** be declared using the `Input` `Storage Class`
- VUID-SubgroupLeMask-SubgroupLeMask-04377
  The variable decorated with `SubgroupLeMask` **must** be declared as a four-component vector of 32-bit integer values

`SubgroupLtMask`

Decorating a variable with the `SubgroupLtMask` builtin decoration will make that variable contain the *subgroup mask* of the current subgroup invocation. The bits corresponding to the invocations less than `SubgroupLocalInvocationId` are set in the variable decorated with `SubgroupLtMask`. All other bits are set to zero.

`SubgroupLtMaskKHR` is an alias of `SubgroupLtMask`.

Valid Usage

- VUID-SubgroupLtMask-SubgroupLtMask-04378

The variable decorated with `SubgroupLtMask` **must** be declared using the `Input` `Storage Class`

- VUID-SubgroupLtMask-SubgroupLtMask-04379
  The variable decorated with `SubgroupLtMask` **must** be declared as a four-component vector of 32-bit integer values

`SubgroupLocalInvocationId`

Decorating a variable with the `SubgroupLocalInvocationId` builtin decoration will make that variable contain the index of the invocation within the subgroup. This variable is in range [0,`SubgroupSize`-1].

If `VK_PIPELINE_SHADER_STAGE_CREATE_REQUIRE_FULL_SUBGROUPS_BIT` is specified, or if `module` declares SPIR-V version 1.6 or higher, and the local workgroup size in the X dimension of the `stage` is a multiple of `SubgroupSize`, full subgroups are enabled for that pipeline stage. When full subgroups are enabled, subgroups **must** be launched with all invocations active, i.e., there is an active invocation with `SubgroupLocalInvocationId` for each value in range [0,`SubgroupSize`-1].

NOTE

There is no direct relationship between `SubgroupLocalInvocationId` and `LocalInvocationId` or `LocalInvocationIndex`. If the pipeline was created with full subgroups applications can compute their own local invocation index to serve the same purpose:

index = `SubgroupLocalInvocationId` + `SubgroupId` × `SubgroupSize`

If full subgroups are not enabled, some subgroups may be dispatched with inactive invocations that do not correspond to a local workgroup invocation, making the value of index unreliable.

NOTE

`VK_PIPELINE_SHADER_STAGE_CREATE_REQUIRE_FULL_SUBGROUPS_BIT` is effectively deprecated when compiling SPIR-V 1.6 shaders, as this behavior is the default for Vulkan with SPIR-V 1.6. This is more aligned with developer expectations, and avoids applications unexpectedly breaking in the future.

Valid Usage

- VUID-SubgroupLocalInvocationId-SubgroupLocalInvocationId-04380
  The variable decorated with `SubgroupLocalInvocationId` **must** be declared using the `Input` `Storage Class`
- VUID-SubgroupLocalInvocationId-SubgroupLocalInvocationId-04381
  The variable decorated with `SubgroupLocalInvocationId` **must** be declared as a scalar 32-bit integer value

`SubgroupSize`

Decorating a variable with the `SubgroupSize` builtin decoration will make that variable contain the implementation-dependent number of invocations in a subgroup. This value **must** be a

power-of-two integer.

If the pipeline was created with the VK_PIPELINE_SHADER_STAGE_CREATE_ALLOW_VARYING_SUBGROUP_SIZE_BIT flag set, or the SPIR-V module is at least version 1.6, the SubgroupSize decorated variable will contain the subgroup size for each subgroup that gets dispatched. This value **must** be between minSubgroupSize and maxSubgroupSize and **must** be uniform with subgroup scope. The value **may** vary across a single draw call, and for fragment shaders **may** vary across a single primitive. In compute dispatches, SubgroupSize **must** be uniform with command scope.

If the pipeline was created with a chained VkPipelineShaderStageRequiredSubgroupSizeCreateInfo structure, the SubgroupSize decorated variable will match requiredSubgroupSize.

If SPIR-V module is less than version 1.6 and the pipeline was not created with the VK_PIPELINE_SHADER_STAGE_CREATE_ALLOW_VARYING_SUBGROUP_SIZE_BIT flag set and no VkPipelineShaderStageRequiredSubgroupSizeCreateInfo structure was chained, the variable decorated with SubgroupSize will match subgroupSize.

The maximum number of invocations that an implementation can support per subgroup is 128.

NOTE The old behavior for SubgroupSize is considered deprecated as certain compute algorithms cannot be easily implemented without the guarantees of VK_PIPELINE_SHADER_STAGE_CREATE_ALLOW_VARYING_SUBGROUP_SIZE_BIT and VK_PIPELINE_SHADER_STAGE_CREATE_REQUIRE_FULL_SUBGROUPS_BIT.

Valid Usage

- VUID-SubgroupSize-SubgroupSize-04382
  The variable decorated with SubgroupSize **must** be declared using the Input Storage Class
- VUID-SubgroupSize-SubgroupSize-04383
  The variable decorated with SubgroupSize **must** be declared as a scalar 32-bit integer value

TessCoord

Decorating a variable with the TessCoord built-in decoration will make that variable contain the three-dimensional (u,v,w) barycentric coordinate of the tessellated vertex within the patch. u, v, and w are in the range [0,1] and vary linearly across the primitive being subdivided. For the tessellation modes of Quads or IsoLines, the third component is always zero.

Valid Usage

- VUID-TessCoord-TessCoord-04387
  The TessCoord decoration **must** be used only within the TessellationEvaluation Execution Model
- VUID-TessCoord-TessCoord-04388

The variable decorated with `TessCoord` **must** be declared using the `Input` `Storage` `Class`

- VUID-TessCoord-TessCoord-04389
  The variable decorated with `TessCoord` **must** be declared as a three-component vector of 32-bit floating-point values

`TessLevelOuter`

Decorating a variable with the `TessLevelOuter` built-in decoration will make that variable contain the outer tessellation levels for the current patch.

In tessellation control shaders, the variable decorated with `TessLevelOuter` **can** be written to, controlling the tessellation factors for the resulting patch. These values are used by the tessellator to control primitive tessellation and **can** be read by tessellation evaluation shaders.

In tessellation evaluation shaders, the variable decorated with `TessLevelOuter` **can** read the values written by the tessellation control shader.

Valid Usage

- VUID-TessLevelOuter-TessLevelOuter-04390
  The `TessLevelOuter` decoration **must** be used only within the `TessellationControl` or `TessellationEvaluation` `Execution` `Model`
- VUID-TessLevelOuter-TessLevelOuter-04391
  The variable decorated with `TessLevelOuter` within the `TessellationControl` `Execution` `Model` **must** be declared using the `Output` `Storage` `Class`
- VUID-TessLevelOuter-TessLevelOuter-04392
  The variable decorated with `TessLevelOuter` within the `TessellationEvaluation` `Execution` `Model` **must** be declared using the `Input` `Storage` `Class`
- VUID-TessLevelOuter-TessLevelOuter-04393
  The variable decorated with `TessLevelOuter` **must** be declared as an array of size four, containing 32-bit floating-point values

`TessLevelInner`

Decorating a variable with the `TessLevelInner` built-in decoration will make that variable contain the inner tessellation levels for the current patch.

In tessellation control shaders, the variable decorated with `TessLevelInner` **can** be written to, controlling the tessellation factors for the resulting patch. These values are used by the tessellator to control primitive tessellation and **can** be read by tessellation evaluation shaders.

In tessellation evaluation shaders, the variable decorated with `TessLevelInner` **can** read the values written by the tessellation control shader.

Valid Usage

- VUID-TessLevelInner-TessLevelInner-04394

The TessLevelInner decoration **must** be used only within the TessellationControl or TessellationEvaluation Execution Model

- VUID-TessLevelInner-TessLevelInner-04395
  The variable decorated with TessLevelInner within the TessellationControl Execution Model **must** be declared using the Output Storage Class
- VUID-TessLevelInner-TessLevelInner-04396
  The variable decorated with TessLevelInner within the TessellationEvaluation Execution Model **must** be declared using the Input Storage Class
- VUID-TessLevelInner-TessLevelInner-04397
  The variable decorated with TessLevelInner **must** be declared as an array of size two, containing 32-bit floating-point values

VertexIndex

Decorating a variable with the VertexIndex built-in decoration will make that variable contain the index of the vertex that is being processed by the current vertex shader invocation. For non-indexed draws, this variable begins at the firstVertex parameter to vkCmdDraw or the firstVertex member of a structure consumed by vkCmdDrawIndirect and increments by one for each vertex in the draw. For indexed draws, its value is the content of the index buffer for the vertex plus the vertexOffset parameter to vkCmdDrawIndexed or the vertexOffset member of the structure consumed by vkCmdDrawIndexedIndirect.

NOTE VertexIndex starts at the same starting value for each instance.

Valid Usage

- VUID-VertexIndex-VertexIndex-04398
  The VertexIndex decoration **must** be used only within the Vertex Execution Model
- VUID-VertexIndex-VertexIndex-04399
  The variable decorated with VertexIndex **must** be declared using the Input Storage Class
- VUID-VertexIndex-VertexIndex-04400
  The variable decorated with VertexIndex **must** be declared as a scalar 32-bit integer value

ViewIndex

The ViewIndex decoration **can** be applied to a shader input which will be filled with the index of the view that is being processed by the current shader invocation.

If multiview is enabled in the render pass, this value will be the index of one of the bits set in the view mask of the subpass the pipeline is compiled against. If multiview is not enabled in the render pass, this value will be zero.

Valid Usage

- VUID-ViewIndex-ViewIndex-04401
  The ViewIndex decoration **must** be used only within the MeshEXT, Vertex, Geometry,

TessellationControl, TessellationEvaluation or Fragment Execution Model

- VUID-ViewIndex-ViewIndex-04402
  The variable decorated with ViewIndex **must** be declared using the Input Storage Class
- VUID-ViewIndex-ViewIndex-04403
  The variable decorated with ViewIndex **must** be declared as a scalar 32-bit integer value

ViewportIndex

Decorating a variable with the ViewportIndex built-in decoration will make that variable contain the index of the viewport.

In a vertex, tessellation evaluation, or geometry shader, the variable decorated with ViewportIndex can be written to with the viewport index to which the primitive produced by that shader will be directed.

The selected viewport index is used to select the viewport transform and scissor rectangle.

The last active *pre-rasterization shader stage* (in pipeline order) controls the ViewportIndex that is used. Outputs in previous shader stages are not used, even if the last stage fails to write the ViewportIndex.

If the last active pre-rasterization shader stage shader entry point's interface does not include a variable decorated with ViewportIndex then the first viewport is used. If a pre-rasterization shader stage shader entry point's interface includes a variable decorated with ViewportIndex, it **must** write the same value to ViewportIndex for all output vertices of a given primitive.

In a fragment shader, the variable decorated with ViewportIndex contains the viewport index of the primitive that the fragment invocation belongs to.

Valid Usage

- VUID-ViewportIndex-ViewportIndex-04404
  The ViewportIndex decoration **must** be used only within the MeshEXT, MeshNV, Vertex, TessellationEvaluation, Geometry, or Fragment Execution Model
- VUID-ViewportIndex-ViewportIndex-04405
  If the shaderOutputViewportIndex feature is not enabled then the ViewportIndex decoration **must** be used only within the Geometry or Fragment Execution Model
- VUID-ViewportIndex-ViewportIndex-04406
  The variable decorated with ViewportIndex within the MeshEXT, MeshNV, Vertex, TessellationEvaluation, or Geometry Execution Model **must** be declared using the Output Storage Class
- VUID-ViewportIndex-ViewportIndex-04407
  The variable decorated with ViewportIndex within the Fragment Execution Model **must** be declared using the Input Storage Class
- VUID-ViewportIndex-ViewportIndex-04408
  The variable decorated with ViewportIndex **must** be declared as a scalar 32-bit integer

value

- VUID-ViewportIndex-ViewportIndex-07060
  The variable decorated with `ViewportIndex` within the `MeshEXT Execution Model` **must** also be decorated with the `PerPrimitiveEXT` decoration

`WorkgroupId`

Decorating a variable with the `WorkgroupId` built-in decoration will make that variable contain the global workgroup that the current invocation is a member of. Each component ranges from a base value to a base + count value, based on the parameters passed into the dispatching commands.

Valid Usage

- VUID-WorkgroupId-WorkgroupId-04422
  The `WorkgroupId` decoration **must** be used only within the `GLCompute`, `MeshEXT`, `TaskEXT`, `MeshNV`, or `TaskNV Execution Model`
- VUID-WorkgroupId-WorkgroupId-04423
  The variable decorated with `WorkgroupId` **must** be declared using the `Input Storage Class`
- VUID-WorkgroupId-WorkgroupId-04424
  The variable decorated with `WorkgroupId` **must** be declared as a three-component vector of 32-bit integer values

`WorkgroupSize`

NOTE	SPIR-V 1.6 deprecated `WorkgroupSize` in favor of using the `LocalSizeId` Execution Mode instead. Support for `LocalSizeId` was added with `VK_KHR_maintenance4` and promoted to core in Version 1.3.

Decorating an object with the `WorkgroupSize` built-in decoration will make that object contain the dimensions of a local workgroup. If an object is decorated with the `WorkgroupSize` decoration, this takes precedence over any `LocalSize` or `LocalSizeId` execution mode.

Valid Usage

- VUID-WorkgroupSize-WorkgroupSize-04425
  The `WorkgroupSize` decoration **must** be used only within the `GLCompute`, `MeshEXT`, `TaskEXT`, `MeshNV`, or `TaskNV Execution Model`
- VUID-WorkgroupSize-WorkgroupSize-04426
  The variable decorated with `WorkgroupSize` **must** be a specialization constant or a constant
- VUID-WorkgroupSize-WorkgroupSize-04427
  The variable decorated with `WorkgroupSize` **must** be declared as a three-component vector of 32-bit integer values

Chapter 16. Image Operations

16.1. Image Operations Overview

Vulkan Image Operations are operations performed by those SPIR-V Image Instructions which take an `OpTypeImage` (representing a `VkImageView`) or `OpTypeSampledImage` (representing a (`VkImageView`, `VkSampler`) pair). Read, write, and atomic operations also take texel coordinates as operands, and return a value based on a neighborhood of texture elements (*texels*) within the image. Query operations return properties of the bound image or of the lookup itself. The "Depth" operand of `OpTypeImage` is ignored.

NOTE	Texel is a term which is a combination of the words texture and element. Early interactive computer graphics supported texture operations on textures, a small subset of the image operations on images described here. The discrete samples remain essentially equivalent, however, so we retain the historical term texel to refer to them.

Image Operations include the functionality of the following SPIR-V Image Instructions:

- `OpImageSample*` and `OpImageSparseSample*` read one or more neighboring texels of the image, and filter the texel values based on the state of the sampler.
  - Instructions with `ImplicitLod` in the name determine the LOD used in the sampling operation based on the coordinates used in neighboring fragments.
  - Instructions with `ExplicitLod` in the name determine the LOD used in the sampling operation based on additional coordinates.
  - Instructions with `Proj` in the name apply homogeneous projection to the coordinates.
- `OpImageFetch` and `OpImageSparseFetch` return a single texel of the image. No sampler is used.
- `OpImage*Gather` and `OpImageSparse*Gather` read neighboring texels and return a single component of each.
- `OpImageRead` (and `OpImageSparseRead`) and `OpImageWrite` read and write, respectively, a texel in the image. No sampler is used.
- `OpImage*Dref*` instructions apply depth comparison on the texel values.
- `OpImageSparse*` instructions additionally return a sparse residency code.
- `OpImageQuerySize`, `OpImageQuerySizeLod`, `OpImageQueryLevels`, and `OpImageQuerySamples` return properties of the image descriptor that would be accessed. The image itself is not accessed.
- `OpImageQueryLod` returns the LOD parameters that would be used in a sample operation. The actual operation is not performed.

16.1.1. Texel Coordinate Systems

Images are addressed by *texel coordinates*. There are three *texel coordinate systems*:

- normalized texel coordinates [0.0, 1.0]

- unnormalized texel coordinates [0.0, width / height / depth)
- integer texel coordinates [0, width / height / depth)

SPIR-V `OpImageFetch`, `OpImageSparseFetch`, `OpImageRead`, `OpImageSparseRead`, and `OpImageWrite` instructions use integer texel coordinates.

Other image instructions **can** use either normalized or unnormalized texel coordinates (selected by the `unnormalizedCoordinates` state of the sampler used in the instruction), but there are limitations on what operations, image state, and sampler state is supported. Normalized coordinates are logically converted to unnormalized as part of image operations, and certain steps are only performed on normalized coordinates. The array layer coordinate is always treated as unnormalized even when other coordinates are normalized.

Normalized texel coordinates are referred to as (s,t,r,q,a), with the coordinates having the following meanings:

- s: Coordinate in the first dimension of an image.
- t: Coordinate in the second dimension of an image.
- r: Coordinate in the third dimension of an image.
  - (s,t,r) are interpreted as a direction vector for Cube images.
- q: Fourth coordinate, for homogeneous (projective) coordinates.
- a: Coordinate for array layer.

The coordinates are extracted from the SPIR-V operand based on the dimensionality of the image variable and type of instruction. For `Proj` instructions, the components are in order (s, [t,] [r,] q), with t and r being conditionally present based on the `Dim` of the image. For non-`Proj` instructions, the coordinates are (s [,t] [,r] [,a]), with t and r being conditionally present based on the `Dim` of the image and a being conditionally present based on the `Arrayed` property of the image. Projective image instructions are not supported on `Arrayed` images.

Unnormalized texel coordinates are referred to as (u,v,w,a), with the coordinates having the following meanings:

- u: Coordinate in the first dimension of an image.
- v: Coordinate in the second dimension of an image.
- w: Coordinate in the third dimension of an image.
- a: Coordinate for array layer.

Only the u and v coordinates are directly extracted from the SPIR-V operand, because only 1D and 2D (non-`Arrayed`) dimensionalities support unnormalized coordinates. The components are in order (u [,v]), with v being conditionally present when the dimensionality is 2D. When normalized coordinates are converted to unnormalized coordinates, all four coordinates are used.

Integer texel coordinates are referred to as (i,j,k,l,n), with the coordinates having the following meanings:

- i: Coordinate in the first dimension of an image.

- j: Coordinate in the second dimension of an image.
- k: Coordinate in the third dimension of an image.
- l: Coordinate for array layer.
- n: Index of the sample within the texel.

They are extracted from the SPIR-V operand in order (i [,j] [,k] [,l] [,n]), with j and k conditionally present based on the `Dim` of the image, and l conditionally present based on the `Arrayed` property of the image. n is conditionally present and is taken from the `Sample` image operand.

For all coordinate types, unused coordinates are assigned a value of zero.

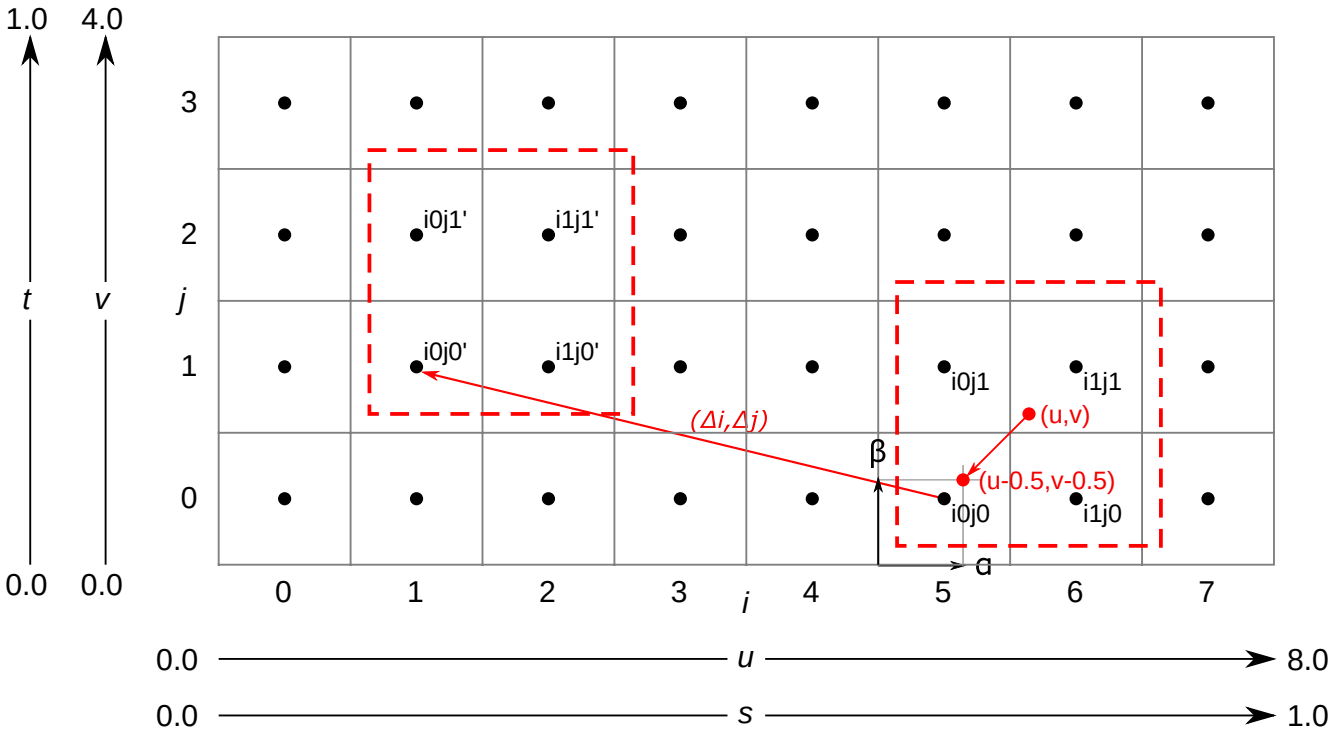

Figure 3. Texel Coordinate Systems, Linear Filtering

The Texel Coordinate Systems - For the example shown of an 8×4 texel two dimensional image.

- Normalized texel coordinates:
  - The s coordinate goes from 0.0 to 1.0.
  - The t coordinate goes from 0.0 to 1.0.
- Unnormalized texel coordinates:
  - The u coordinate within the range 0.0 to 8.0 is within the image, otherwise it is outside the image.
  - The v coordinate within the range 0.0 to 4.0 is within the image, otherwise it is outside the image.
- Integer texel coordinates:
  - The i coordinate within the range 0 to 7 addresses texels within the image, otherwise it is outside the image.
  - The j coordinate within the range 0 to 3 addresses texels within the image, otherwise it is

outside the image.

- Also shown for linear filtering:
  - Given the unnormalized coordinates (u,v), the four texels selected are i_0j_0, i_1j_0, i_0j_1, and i_1j_1.
  - The fractions α and β.
  - Given the offset Δ_i and Δ_j, the four texels selected by the offset are $i_0j'_0$, $i_1j'_0$, $i_0j'_1$, and $i_1j'_1$.

NOTE

For formats with reduced-resolution components, Δ_i and Δ_j are relative to the resolution of the highest-resolution component, and therefore may be divided by two relative to the unnormalized coordinate space of the lower-resolution components.

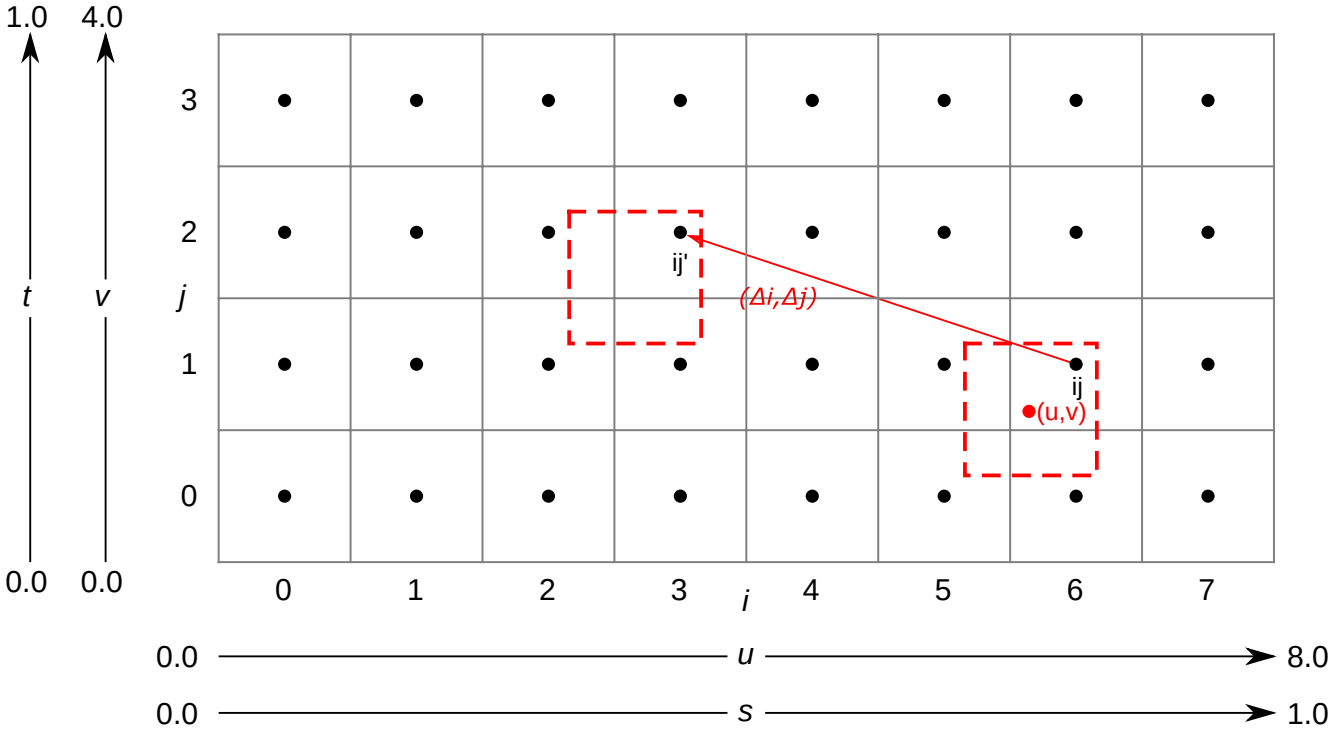

Figure 4. Texel Coordinate Systems, Nearest Filtering

The Texel Coordinate Systems - For the example shown of an 8×4 texel two dimensional image.

- Texel coordinates as above. Also shown for nearest filtering:
  - Given the unnormalized coordinates (u,v), the texel selected is ij.
  - Given the offset Δ_i and Δ_j, the texel selected by the offset is ij'.

16.2. Conversion Formulas

16.2.1. RGB to Shared Exponent Conversion

An RGB color (red, green, blue) is transformed to a shared exponent color (red_{shared}, $green_{shared}$, $blue_{shared}$, exp_{shared}) as follows:

First, the components (red, green, blue) are clamped to ($red_{clamped}$, $green_{clamped}$, $blue_{clamped}$) as:

$red_{clamped} = \max(0, \min(sharedexp_{max}, red))$

$green_{clamped} = \max(0, \min(sharedexp_{max}, green))$

$blue_{clamped} = \max(0, \min(sharedexp_{max}, blue))$

where:

$$N = 9 \quad \text{number of mantissa bits per component}$$
$$B = 15 \quad \text{exponent bias}$$
$$E_{max} = 31 \quad \text{maximum possible biased exponent value}$$
$$sharedexp_{max} = \frac{(2^N - 1)}{2^N} \times 2^{(E_{max} - B)}$$

NOTE NaN, if supported, is handled as in IEEE 754-2008 `minNum()` and `maxNum()`. This results in any NaN being mapped to zero.

The largest clamped component, $max_{clamped}$ is determined:

$max_{clamped} = \max(red_{clamped}, green_{clamped}, blue_{clamped})$

A preliminary shared exponent exp' is computed:

$$exp' = \begin{cases} \lfloor \log_2(max_{clamped}) \rfloor + (B+1) & \text{for } max_{clamped} > 2^{-(B+1)} \\ 0 & \text{for } max_{clamped} \le 2^{-(B+1)} \end{cases}$$

The shared exponent exp_{shared} is computed:

$$max_{shared} = \lfloor \frac{max_{clamped}}{2^{(exp' - B - N)}} + \frac{1}{2} \rfloor$$

$$exp_{shared} = \begin{cases} exp' & \text{for } 0 \le max_{shared} < 2^N \\ exp' + 1 & \text{for } max_{shared} = 2^N \end{cases}$$

Finally, three integer values in the range 0 to 2^N are computed:

$$red_{shared} = \lfloor \frac{red_{clamped}}{2^{(exp_{shared} - B - N)}} + \frac{1}{2} \rfloor$$
$$green_{shared} = \lfloor \frac{green_{clamped}}{2^{(exp_{shared} - B - N)}} + \frac{1}{2} \rfloor$$
$$blue_{shared} = \lfloor \frac{blue_{clamped}}{2^{(exp_{shared} - B - N)}} + \frac{1}{2} \rfloor$$

16.2.2. Shared Exponent to RGB

A shared exponent color (red_{shared}, $green_{shared}$, $blue_{shared}$, exp_{shared}) is transformed to an RGB color (red, green, blue) as follows:

$$red = red_{shared} \times 2^{(exp_{shared} - B - N)}$$

$$green = green_{shared} \times 2^{(exp_{shared} - B - N)}$$

$$blue = blue_{shared} \times 2^{(exp_{shared} - B - N)}$$

where:

N = 9 (number of mantissa bits per component)

B = 15 (exponent bias)

16.3. Texel Input Operations

Texel input instructions are SPIR-V image instructions that read from an image. *Texel input operations* are a set of steps that are performed on state, coordinates, and texel values while processing a texel input instruction, and which are common to some or all texel input instructions. They include the following steps, which are performed in the listed order:

- Validation operations
  - Instruction/Sampler/Image validation
  - Coordinate validation
  - Sparse validation
  - Layout validation
- Format conversion
- Texel replacement
- Depth comparison

- Conversion to RGBA
- Component swizzle
- Chroma reconstruction
- $Y'C_BC_R$ conversion

For texel input instructions involving multiple texels (for sampling or gathering), these steps are applied for each texel that is used in the instruction. Depending on the type of image instruction, other steps are conditionally performed between these steps or involving multiple coordinate or texel values.

If Chroma Reconstruction is implicit, Texel Filtering instead takes place during chroma reconstruction, before sampler $Y'C_BC_R$ conversion occurs.

16.3.1. Texel Input Validation Operations

Texel input validation operations inspect instruction/image/sampler state or coordinates, and in certain circumstances cause the texel value to be replaced or become undefined. There are a series of validations that the texel undergoes.

Instruction/Sampler/Image View Validation

There are a number of cases where a SPIR-V instruction **can** mismatch with the sampler, the image view, or both, and a number of further cases where the sampler **can** mismatch with the image view. In such cases the value of the texel returned is undefined.

These cases include:

- The sampler `borderColor` is an integer type and the image view `format` is not one of the VkFormat integer types or a stencil component of a depth/stencil format.
- The sampler `borderColor` is a float type and the image view `format` is not one of the VkFormat float types or a depth component of a depth/stencil format.
- The sampler `borderColor` is one of the opaque black colors (`VK_BORDER_COLOR_FLOAT_OPAQUE_BLACK` or `VK_BORDER_COLOR_INT_OPAQUE_BLACK`) and the image view VkComponentSwizzle for any of the VkComponentMapping components is not the identity swizzle.
- The VkImageLayout of any subresource in the image view does not match the VkDescriptorImageInfo::`imageLayout` used to write the image descriptor.
- The SPIR-V Image Format is not compatible with the image view's `format`.
- The sampler `unnormalizedCoordinates` is `VK_TRUE` and any of the limitations of unnormalized coordinates are violated.
- The SPIR-V instruction is one of the `OpImage*Dref*` instructions and the sampler `compareEnable` is `VK_FALSE`
- The SPIR-V instruction is not one of the `OpImage*Dref*` instructions and the sampler `compareEnable` is `VK_TRUE`
- The SPIR-V instruction is one of the `OpImage*Dref*` instructions, the image view `format` is one of the depth/stencil formats, and the image view aspect is not `VK_IMAGE_ASPECT_DEPTH_BIT`.

- The SPIR-V instruction's image variable's properties are not compatible with the image view:
  - If the image view's `viewType` is one of `VK_IMAGE_VIEW_TYPE_1D_ARRAY`, `VK_IMAGE_VIEW_TYPE_2D_ARRAY`, or `VK_IMAGE_VIEW_TYPE_CUBE_ARRAY` then the instruction **must** have `Arrayed` = 1. Otherwise the instruction **must** have `Arrayed` = 0.
  - If the image was created with VkImageCreateInfo::`samples` equal to `VK_SAMPLE_COUNT_1_BIT`, the instruction **must** have `MS` = 0.
  - If the image was created with VkImageCreateInfo::`samples` not equal to `VK_SAMPLE_COUNT_1_BIT`, the instruction **must** have `MS` = 1.
  - If the `Sampled Type` of the `OpTypeImage` does not match the SPIR-V Type.
  - If the signedness of any read or sample operation does not match the signedness of the image's format.

Only `OpImageSample*` and `OpImageSparseSample*` **can** be used with a sampler or image view that enables sampler $Y'C_BC_R$ conversion.

`OpImageFetch`, `OpImageSparseFetch`, `OpImage*Gather`, and `OpImageSparse*Gather` **must** not be used with a sampler or image view that enables sampler $Y'C_BC_R$ conversion.

The `ConstOffset` and `Offset` operands **must** not be used with a sampler or image view that enables sampler $Y'C_BC_R$ conversion.

If the underlying `VkImage` format has an X component in its format description, undefined values are read from those bits.

NOTE

If the `VkImage` format and `VkImageView` format are the same, these bits will be unused by format conversion and this will have no effect. However, if the `VkImageView` format is different, then some bits of the result may be undefined. For example, when a `VK_FORMAT_R10X6_UNORM_PACK16 VkImage` is sampled via a `VK_FORMAT_R16_UNORM VkImageView`, the low 6 bits of the value before format conversion are undefined and format conversion may return a range of different values.

NOTE

Some implementations will return undefined values in the case where a sampler uses a VkSamplerAddressMode of `VK_SAMPLER_ADDRESS_MODE_MIRRORED_REPEAT`, the sampler is used with operands `Offset`, `ConstOffset`, or `ConstOffsets`, and the value of the offset is larger than or equal to the corresponding width, height, or depth of any accessed image level.

This behavior was not tested prior to Vulkan conformance test suite version 1.3.8.0. Affected implementations will have a conformance test waiver for this issue.

Integer Texel Coordinate Validation

Integer texel coordinates are validated against the size of the image level, and the number of layers and number of samples in the image. For SPIR-V instructions that use integer texel coordinates, this is performed directly on the integer coordinates. For instructions that use normalized or unnormalized texel coordinates, this is performed on the coordinates that result after conversion to integer texel coordinates.

If the integer texel coordinates do not satisfy all of the conditions

$0 \le i < w_s$

$0 \le j < h_s$

$0 \le k < d_s$

$0 \le l < layers$

$0 \le n < samples$

where:

w_s = width of the image level

h_s = height of the image level

d_s = depth of the image level

layers = number of layers in the image

samples = number of samples per texel in the image

then the texel fails integer texel coordinate validation.

There are four cases to consider:

1. Valid Texel Coordinates
    - If the texel coordinates pass validation (that is, the coordinates lie within the image), then the texel value comes from the value in image memory.
2. Border Texel
    - If the texel coordinates fail validation, and
    - If the read is the result of an image sample instruction or image gather instruction, and
    - If the image is not a cube image,

then the texel is a border texel and texel replacement is performed.

3. Invalid Texel
   - If the texel coordinates fail validation, and
   - If the read is the result of an image fetch instruction, image read instruction, or atomic instruction,

   then the texel is an invalid texel and texel replacement is performed.

4. Cube Map Edge or Corner

   Otherwise the texel coordinates lie beyond the edges or corners of the selected cube map face, and Cube map edge handling is performed.

Cube Map Edge Handling

If the texel coordinates lie beyond the edges or corners of the selected cube map face (as described in the prior section), the following steps are performed. Note that this does not occur when using `VK_FILTER_NEAREST` filtering within a mip level, since `VK_FILTER_NEAREST` is treated as using `VK_SAMPLER_ADDRESS_MODE_CLAMP_TO_EDGE`.

- Cube Map Edge Texel
  - If the texel lies beyond the selected cube map face in either only i or only j, then the coordinates (i,j) and the array layer l are transformed to select the adjacent texel from the appropriate neighboring face.
- Cube Map Corner Texel
  - If the texel lies beyond the selected cube map face in both i and j, then there is no unique neighboring face from which to read that texel. The texel **should** be replaced by the average of the three values of the adjacent texels in each incident face. However, implementations **may** replace the cube map corner texel by other methods. The methods are subject to the constraint that if the three available texels have the same value, the resulting filtered texel **must** have that value.

Sparse Validation

If the texel reads from an unbound region of a sparse image, the texel is a *sparse unbound texel*, and processing continues with texel replacement.

Layout Validation

If all planes of a *disjoint multi-planar* image are not in the same image layout, the image **must** not be sampled with sampler $Y'C_BC_R$ conversion enabled.

16.3.2. Format Conversion

Texels undergo a format conversion from the VkFormat of the image view to a vector of either floating-point or signed or unsigned integer components, with the number of components based on the number of components present in the format.

- Color formats have one, two, three, or four components, according to the format.
- Depth/stencil formats are one component. The depth or stencil component is selected by the `aspectMask` of the image view.

Each component is converted based on its type and size (as defined in the Format Definition section for each VkFormat), using the appropriate equations in 16-Bit Floating-Point Numbers, Unsigned 11-Bit Floating-Point Numbers, Unsigned 10-Bit Floating-Point Numbers, Fixed-Point Data Conversion, and Shared Exponent to RGB. Signed integer components smaller than 32 bits are sign-extended.

If the image view format is sRGB, the color components are first converted as if they are UNORM, and then sRGB to linear conversion is applied to the R, G, and B components as described in the "sRGB EOTF" section of the Khronos Data Format Specification. The A component, if present, is unchanged.

If the image view format is block-compressed, then the texel value is first decoded, then converted based on the type and number of components defined by the compressed format.

16.3.3. Texel Replacement

A texel is replaced if it is one (and only one) of:

- a border texel,
- an invalid texel, or
- a sparse unbound texel.

Border texels are replaced with a value based on the image format and the `borderColor` of the sampler. The border color is:

Table 14. Border Color B

Sampler `borderColor`	**Corresponding Border Color**
`VK_BORDER_COLOR_FLOAT_TRANSPARENT_BLACK`	$[B_r, B_g, B_b, B_a] = [0.0, 0.0, 0.0, 0.0]$
`VK_BORDER_COLOR_FLOAT_OPAQUE_BLACK`	$[B_r, B_g, B_b, B_a] = [0.0, 0.0, 0.0, 1.0]$
`VK_BORDER_COLOR_FLOAT_OPAQUE_WHITE`	$[B_r, B_g, B_b, B_a] = [1.0, 1.0, 1.0, 1.0]$
`VK_BORDER_COLOR_INT_TRANSPARENT_BLACK`	$[B_r, B_g, B_b, B_a] = [0, 0, 0, 0]$
`VK_BORDER_COLOR_INT_OPAQUE_BLACK`	$[B_r, B_g, B_b, B_a] = [0, 0, 0, 1]$
`VK_BORDER_COLOR_INT_OPAQUE_WHITE`	$[B_r, B_g, B_b, B_a] = [1, 1, 1, 1]$

NOTE The names `VK_BORDER_COLOR_*_TRANSPARENT_BLACK`, `VK_BORDER_COLOR_*_OPAQUE_BLACK`, and `VK_BORDER_COLOR_*_OPAQUE_WHITE` are meant to describe which components are zeros and ones in the vocabulary of compositing, and are not meant to imply that the numerical value of `VK_BORDER_COLOR_INT_OPAQUE_WHITE` is a saturating value for integers.

This is substituted for the texel value by replacing the number of components in the image format

Table 15. Border Texel Components After Replacement

Texel Aspect or Format	Component Assignment
Depth aspect	$D = B_r$
Stencil aspect	$S = B_r$
One component color format	$Color_r = B_r$
Two component color format	$[Color_r,Color_g] = [B_r,B_g]$
Three component color format	$[Color_r,Color_g,Color_b] = [B_r,B_g,B_b]$
Four component color format	$[Color_r,Color_g,Color_b,Color_a] = [B_r,B_g,B_b,B_a]$

The value returned by a read of an invalid texel is undefined, unless that read operation is from a buffer resource and the `robustBufferAccess` feature is enabled. In that case, an invalid texel is replaced as described by the `robustBufferAccess` feature. If the access is to an image resource and the x, y, z, or layer coordinate validation fails and the `robustImageAccess` feature is enabled, then zero **must** be returned for the R, G, and B components, if present. Either zero or one **must** be returned for the A component, if present. If only the sample index was invalid, the values returned are undefined.

Additionally, if the `robustImageAccess` feature is enabled, any invalid texels **may** be expanded to four components prior to texel replacement. This means that components not present in the image format may be replaced with 0 or may undergo conversion to RGBA as normal.

If the VkPhysicalDeviceSparseProperties::`residencyNonResidentStrict` property is `VK_TRUE`, a sparse unbound texel is replaced with 0 or 0.0 values for integer and floating-point components of the image format, respectively.

If `residencyNonResidentStrict` is `VK_FALSE`, the value of the sparse unbound texel is undefined.

16.3.4. Depth Compare Operation

If the image view has a depth/stencil format, the depth component is selected by the `aspectMask`, and the operation is an `OpImage*Dref*` instruction, a depth comparison is performed. The result is 1.0 if the comparison evaluates to true, and 0.0 otherwise. This value replaces the depth component D.

The compare operation is selected by the VkCompareOp value set by VkSamplerCreateInfo ::`compareOp`. The reference value from the SPIR-V operand D_{ref} and the texel depth value D_{tex} are used as the *reference* and *test* values, respectively, in that operation.

If the image being sampled has an unsigned normalized fixed-point format, then D_{ref} is clamped to [0,1] before the compare operation.

16.3.5. Conversion to RGBA

The texel is expanded from one, two, or three components to four components based on the image base color:

Table 16. Texel Color After Conversion To RGBA

Texel Aspect or Format	RGBA Color
Depth aspect	[$Color_r$,$Color_g$,$Color_b$, $Color_a$] = [D,0,0,one]
Stencil aspect	[$Color_r$,$Color_g$,$Color_b$, $Color_a$] = [S,0,0,one]
One component color format	[$Color_r$,$Color_g$,$Color_b$, $Color_a$] = [$Color_r$,0,0,one]
Two component color format	[$Color_r$,$Color_g$,$Color_b$, $Color_a$] = [$Color_r$,$Color_g$,0,one]
Three component color format	[$Color_r$,$Color_g$,$Color_b$, $Color_a$] = [$Color_r$,$Color_g$,$Color_b$,one]
Four component color format	[$Color_r$,$Color_g$,$Color_b$, $Color_a$] = [$Color_r$,$Color_g$,$Color_b$,$Color_a$]

where one = 1.0f for floating-point formats and depth aspects, and one = 1 for integer formats and stencil aspects.

16.3.6. Component Swizzle

All texel input instructions apply a *swizzle* based on:

- the VkComponentSwizzle enums in the `components` member of the VkImageViewCreateInfo structure for the image being read if sampler $Y'C_BC_R$ conversion is not enabled, and
- the VkComponentSwizzle enums in the `components` member of the VkSamplerYcbcrConversionCreateInfo structure for the sampler $Y'C_BC_R$ conversion if sampler $Y'C_BC_R$ conversion is enabled.

The swizzle **can** rearrange the components of the texel, or substitute zero or one for any components. It is defined as follows for each color component:

$$Color'_{component} = \begin{cases} Color_r & \text{for RED swizzle} \\ Color_g & \text{for GREEN swizzle} \\ Color_b & \text{for BLUE swizzle} \\ Color_a & \text{for ALPHA swizzle} \\ 0 & \text{for ZERO swizzle} \\ one & \text{for ONE swizzle} \\ identity & \text{for IDENTITY swizzle} \end{cases}$$

where:

$$one = \begin{cases} 1.0f & \text{for floating-point components} \\ 1 & \text{for integer components} \end{cases}$$

$$identity = \begin{cases} Color_r & \text{for } component = r \\ Color_g & \text{for } component = g \\ Color_b & \text{for } component = b \\ Color_a & \text{for } component = a \end{cases}$$

If the border color is one of the `VK_BORDER_COLOR_*_OPAQUE_BLACK` enums and the VkComponentSwizzle is not the identity swizzle for all components, the value of the texel after swizzle is undefined.

If the image view has a depth/stencil format and the VkComponentSwizzle is VK_COMPONENT_SWIZZLE_ONE, the value of the texel after swizzle is undefined.

16.3.7. Sparse Residency

OpImageSparse* instructions return a structure which includes a *residency code* indicating whether any texels accessed by the instruction are sparse unbound texels. This code **can** be interpreted by the OpImageSparseTexelsResident instruction which converts the residency code to a boolean value.

16.3.8. Chroma Reconstruction

In some color models, the color representation is defined in terms of monochromatic light intensity (often called "luma") and color differences relative to this intensity, often called "chroma". It is common for color models other than RGB to represent the chroma components at lower spatial resolution than the luma component. This approach is used to take advantage of the eye's lower spatial sensitivity to color compared with its sensitivity to brightness. Less commonly, the same approach is used with additive color, since the green component dominates the eye's sensitivity to light intensity and the spatial sensitivity to color introduced by red and blue is lower.

Lower-resolution components are "downsampled" by resizing them to a lower spatial resolution than the component representing luminance. This process is also commonly known as "chroma subsampling". There is one luminance sample in each texture texel, but each chrominance sample may be shared among several texels in one or both texture dimensions.

- "_444" formats do not spatially downsample chroma values compared with luma: there are unique chroma samples for each texel.
- "_422" formats have downsampling in the x dimension (corresponding to u or s coordinates): they are sampled at half the resolution of luma in that dimension.
- "_420" formats have downsampling in the x dimension (corresponding to u or s coordinates) and the y dimension (corresponding to v or t coordinates): they are sampled at half the resolution of luma in both dimensions.

The process of reconstructing a full color value for texture access involves accessing both chroma and luma values at the same location. To generate the color accurately, the values of the lower-resolution components at the location of the luma samples are reconstructed from the lower-resolution sample locations, an operation known here as "chroma reconstruction" irrespective of the actual color model.

The location of the chroma samples relative to the luma coordinates is determined by the xChromaOffset and yChromaOffset members of the VkSamplerYcbcrConversionCreateInfo structure used to create the sampler $Y'C_BC_R$ conversion.

The following diagrams show the relationship between unnormalized (u,v) coordinates and (i,j) integer texel positions in the luma component (shown in black, with circles showing integer sample positions) and the texel coordinates of reduced-resolution chroma components, shown as crosses in red.

NOTE If the chroma values are reconstructed at the locations of the luma samples by

means of interpolation, chroma samples from outside the image bounds are needed; these are determined according to Wrapping Operation. These diagrams represent this by showing the bounds of the “chroma texel” extending beyond the image bounds, and including additional chroma sample positions where required for interpolation. The limits of a sample for `NEAREST` sampling is shown as a grid.

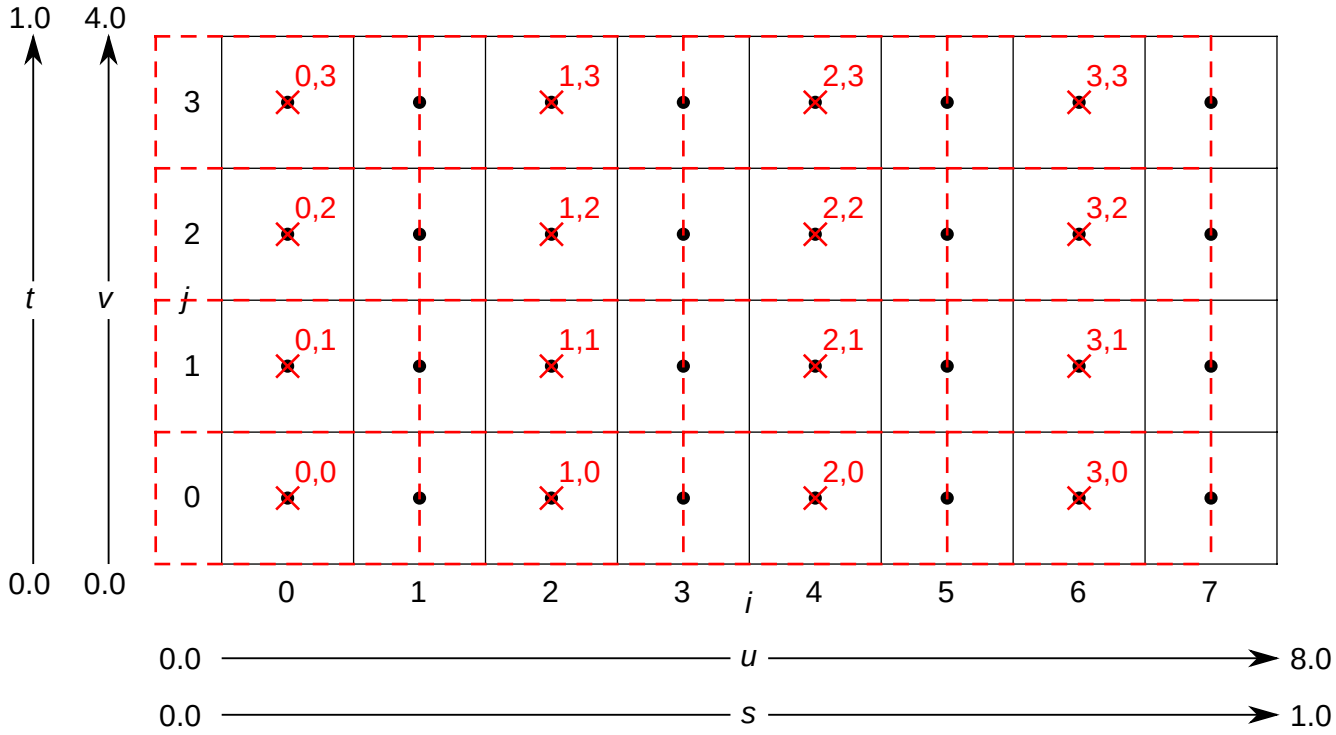

Figure 5. 422 downsampling, xChromaOffset=COSITED_EVEN

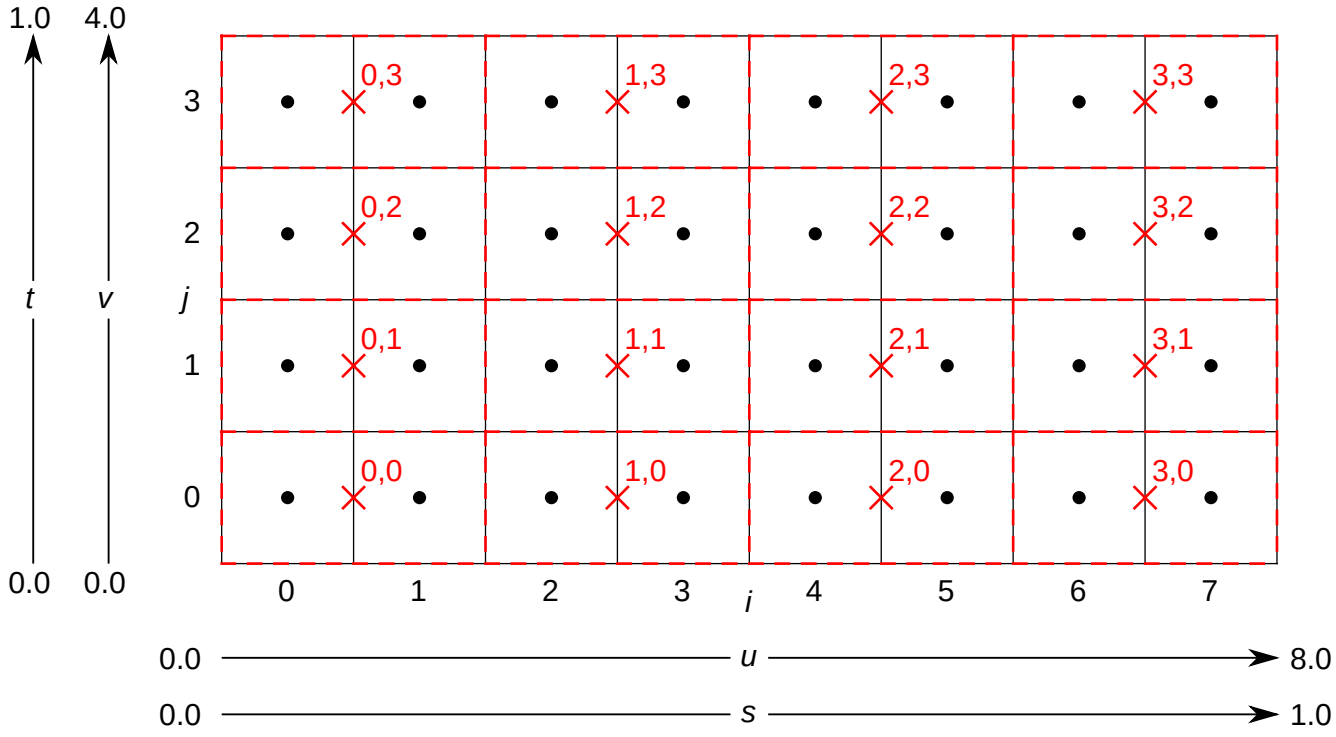

Figure 6. 422 downsampling, xChromaOffset=MIDPOINT

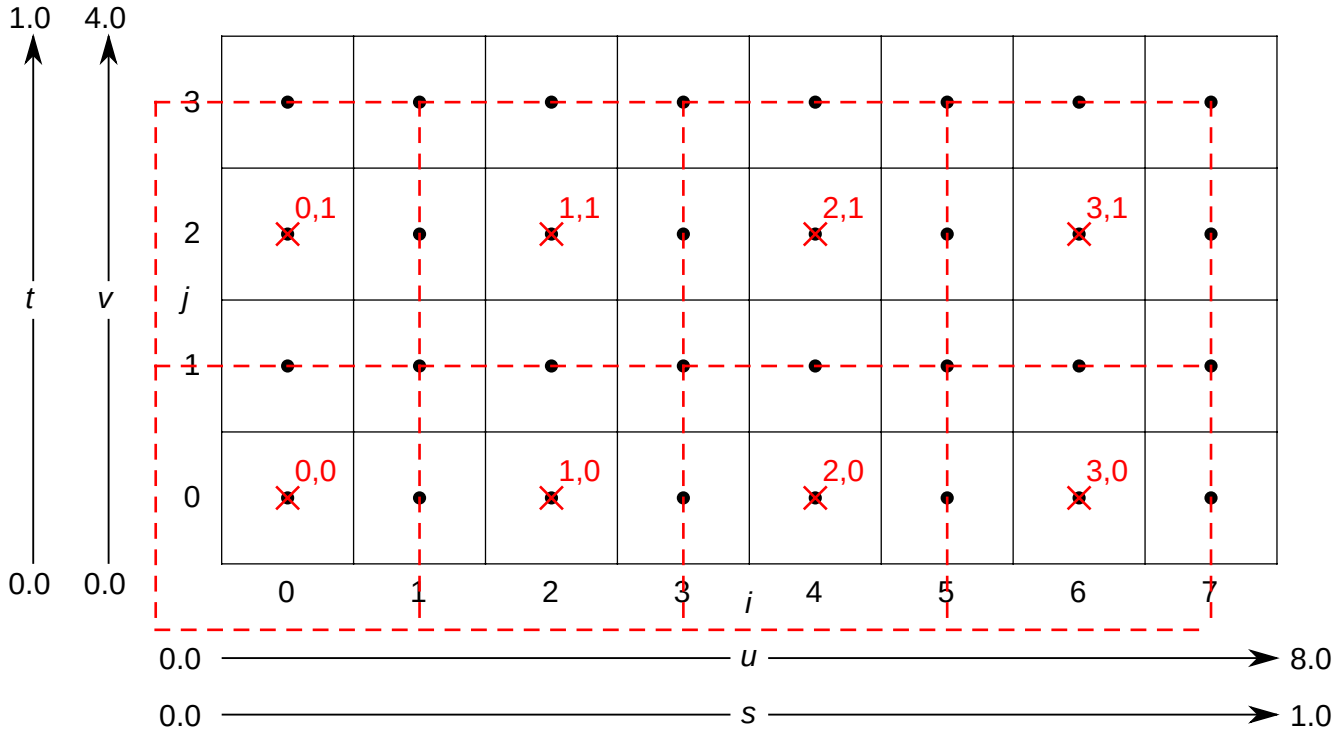

Figure 7. 420 downsampling, xChromaOffset=COSITED_EVEN, yChromaOffset=COSITED_EVEN

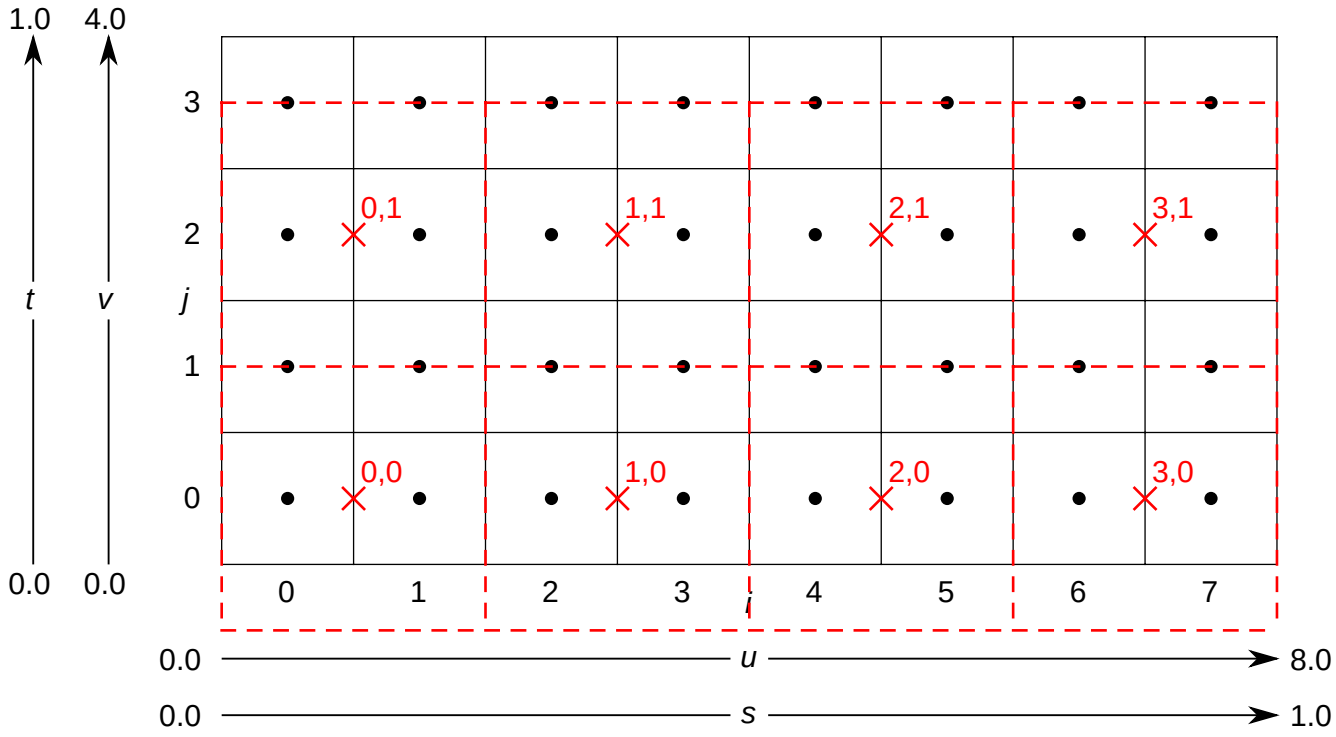

Figure 8. 420 downsampling, xChromaOffset=MIDPOINT, yChromaOffset=COSITED_EVEN

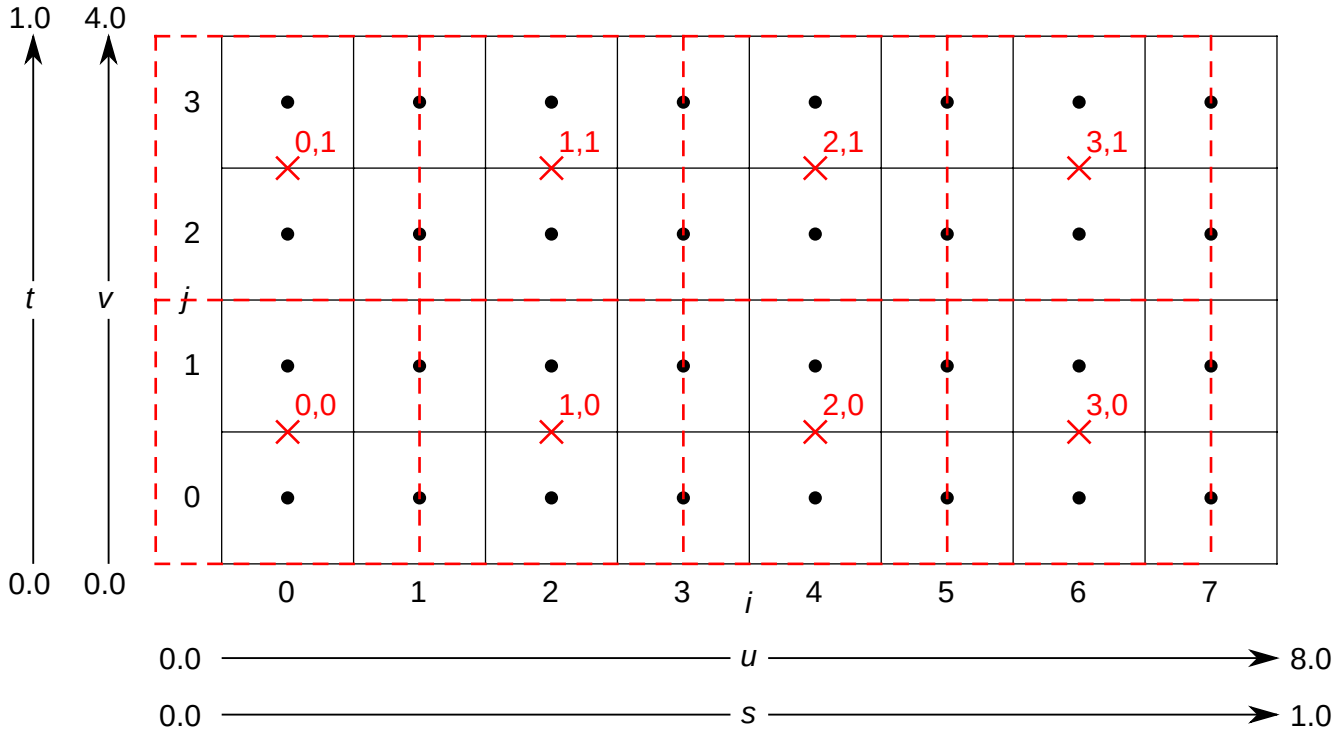

Figure 9. 420 downsampling, xChromaOffset=COSITED_EVEN, yChromaOffset=MIDPOINT

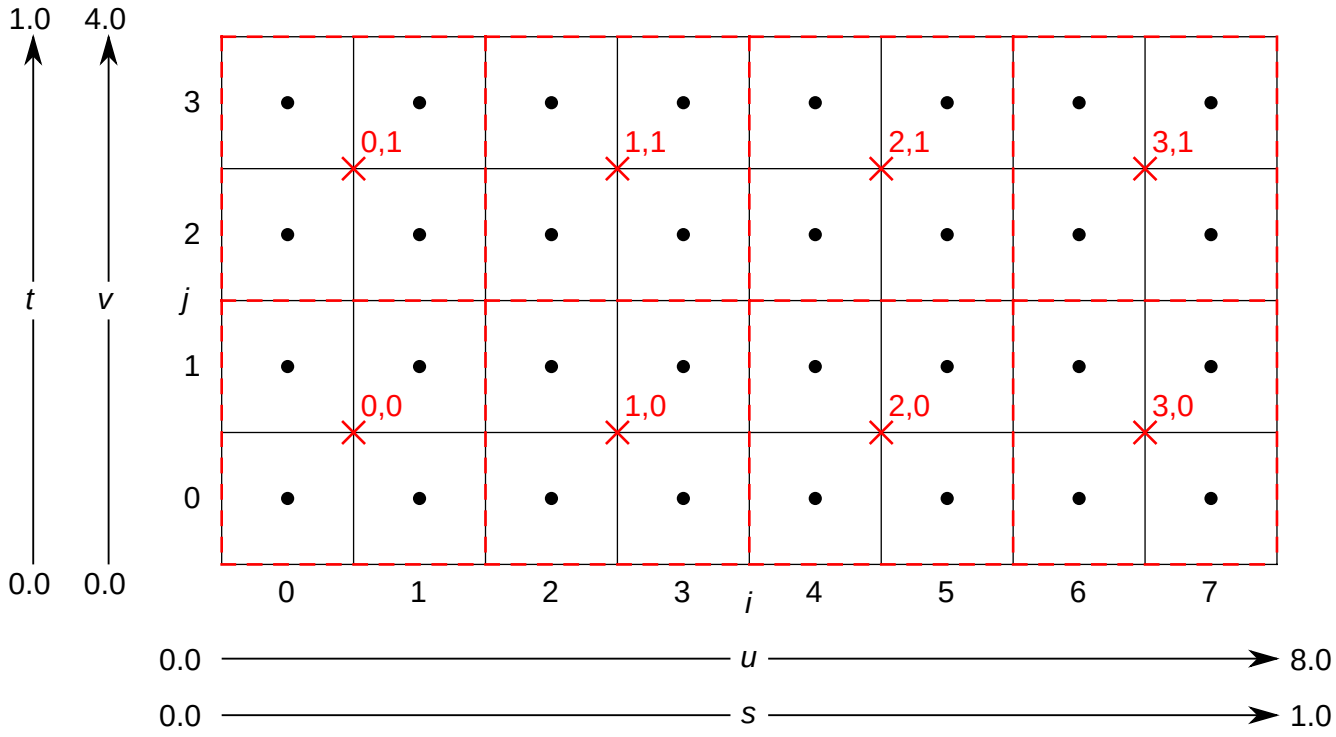

Figure 10. 420 downsampling, xChromaOffset=MIDPOINT, yChromaOffset=MIDPOINT

Reconstruction is implemented in one of two ways:

If the format of the image that is to be sampled sets `VK_FORMAT_FEATURE_SAMPLED_IMAGE_YCBCR_CONVERSION_CHROMA_RECONSTRUCTION_EXPLICIT_BIT`, or the VkSamplerYcbcrConversionCreateInfo's `forceExplicitReconstruction` is `VK_TRUE`, reconstruction is performed as an explicit step independent of filtering, described in the Explicit Reconstruction section.

If the format of the image that is to be sampled does not set `VK_FORMAT_FEATURE_SAMPLED_IMAGE_YCBCR_CONVERSION_CHROMA_RECONSTRUCTION_EXPLICIT_BIT` and if the

VkSamplerYcbcrConversionCreateInfo's forceExplicitReconstruction is VK_FALSE, reconstruction is performed as an implicit part of filtering prior to color model conversion, with no separate post-conversion texel filtering step, as described in the Implicit Reconstruction section.

Explicit Reconstruction

- If the chromaFilter member of the VkSamplerYcbcrConversionCreateInfo structure is VK_FILTER_NEAREST:
  - If the format's R and B components are reduced in resolution in just width by a factor of two relative to the G component (i.e. this is a "_422" format), the $\tau_{ijk}[level]$ values accessed by texel filtering are reconstructed as follows:

$$\tau_R{}'(i,\ j) = \tau_R(\lfloor i \times 0.5 \rfloor,\ j)[level]$$
$$\tau_B{}'(i,\ j) = \tau_B(\lfloor i \times 0.5 \rfloor,\ j)[level]$$

  - If the format's R and B components are reduced in resolution in width and height by a factor of two relative to the G component (i.e. this is a "_420" format), the $\tau_{ijk}[level]$ values accessed by texel filtering are reconstructed as follows:

$$\tau_R{}'(i,\ j) = \tau_R(\lfloor i \times 0.5 \rfloor,\ \lfloor j \times 0.5 \rfloor)[level]$$
$$\tau_B{}'(i,\ j) = \tau_B(\lfloor i \times 0.5 \rfloor,\ \lfloor j \times 0.5 \rfloor)[level]$$

> **NOTE** xChromaOffset and yChromaOffset have no effect if chromaFilter is VK_FILTER_NEAREST for explicit reconstruction.

- If the chromaFilter member of the VkSamplerYcbcrConversionCreateInfo structure is VK_FILTER_LINEAR:
  - If the format's R and B components are reduced in resolution in just width by a factor of two relative to the G component (i.e. this is a "_422" format):
    - If xChromaOffset is VK_CHROMA_LOCATION_COSITED_EVEN:

$$\tau_{RB}{}'(i,\ j) = \begin{cases} \tau_{RB}(\lfloor i \times 0.5 \rfloor,\ j)[level], & 0.5 \times i = \lfloor 0.5 \times i \rfloor \\ 0.5 \times \tau_{RB}(\lfloor i \times 0.5 \rfloor,\ j)[level] + & \\ 0.5 \times \tau_{RB}(\lfloor i \times 0.5 \rfloor + 1,\ j)[level], & 0.5 \times i \neq \lfloor 0.5 \times i \rfloor \end{cases}$$

    - If xChromaOffset is VK_CHROMA_LOCATION_MIDPOINT:

$$\tau_{RB}{}'(i,\ j) = \begin{cases} 0.25 \times \tau_{RB}(\lfloor i \times 0.5 \rfloor - 1,\ j)[level] + & \\ 0.75 \times \tau_{RB}(\lfloor i \times 0.5 \rfloor,\ j)[level], & 0.5 \times i = \lfloor 0.5 \times i \rfloor \\ 0.75 \times \tau_{RB}(\lfloor i \times 0.5 \rfloor,\ j)[level] + & \\ 0.25 \times \tau_{RB}(\lfloor i \times 0.5 \rfloor + 1,\ j)[level], & 0.5 \times i \neq \lfloor 0.5 \times i \rfloor \end{cases}$$

  - If the format's R and B components are reduced in resolution in width and height by a factor of two relative to the G component (i.e. this is a "_420" format), a similar relationship applies. Due to the number of options, these formulae are expressed more concisely as follows:

$$i_{RB} = \begin{cases} 0.5 \times (i) & \text{xChromaOffset=COSITED_EVEN} \\ 0.5 \times (i - 0.5) & \text{xChromaOffset=MIDPOINT} \end{cases}$$

$$j_{RB} = \begin{cases} 0.5 \times (j) & \text{yChromaOffset=COSITED_EVEN} \\ 0.5 \times (j - 0.5) & \text{yChromaOffset=MIDPOINT} \end{cases}$$

$$i_{floor} = \lfloor i_{RB} \rfloor$$
$$j_{floor} = \lfloor j_{RB} \rfloor$$
$$i_{frac} = i_{RB} - i_{floor}$$
$$j_{frac} = j_{RB} - j_{floor}$$

$$\begin{aligned} \tau_{RB}'(i, j) = {} & \tau_{RB}(i_{floor}, j_{floor})[level] && \times (1 - i_{frac}) && \times && (1 - j_{frac}) + \\ & \tau_{RB}(1 + i_{floor}, j_{floor})[level] && \times (i_{frac}) && \times && (1 - j_{frac}) + \\ & \tau_{RB}(i_{floor}, 1 + j_{floor})[level] && \times (1 - i_{frac}) && \times && (j_{frac}) + \\ & \tau_{RB}(1 + i_{floor}, 1 + j_{floor})[level] && \times (i_{frac}) && \times && (j_{frac}) \end{aligned}$$

NOTE In the case where the texture itself is bilinearly interpolated as described in Texel Filtering, thus requiring four full-color samples for the filtering operation, and where the reconstruction of these samples uses bilinear interpolation in the chroma components due to `chromaFilter`=`VK_FILTER_LINEAR`, up to nine chroma samples may be required, depending on the sample location.

Implicit Reconstruction

Implicit reconstruction takes place by the samples being interpolated, as required by the filter settings of the sampler, except that `chromaFilter` takes precedence for the chroma samples.

If `chromaFilter` is `VK_FILTER_NEAREST`, an implementation **may** behave as if `xChromaOffset` and `yChromaOffset` were both `VK_CHROMA_LOCATION_MIDPOINT`, irrespective of the values set.

NOTE This will not have any visible effect if the locations of the luma samples coincide with the location of the samples used for rasterization.

The sample coordinates are adjusted by the downsample factor of the component (such that, for example, the sample coordinates are divided by two if the component has a downsample factor of two relative to the luma component):

$$u_{RB}'(422/420) = \begin{cases} 0.5 \times (u + 0.5), & \text{xChromaOffset=COSITED_EVEN} \\ 0.5 \times u, & \text{xChromaOffset=MIDPOINT} \end{cases}$$

$$v_{RB}'(420) = \begin{cases} 0.5 \times (v + 0.5), & \text{yChromaOffset=COSITED_EVEN} \\ 0.5 \times v, & \text{yChromaOffset=MIDPOINT} \end{cases}$$

16.3.9. Sampler $Y'C_BC_R$ Conversion

Sampler $Y'C_BC_R$ conversion performs the following operations, which an implementation **may** combine into a single mathematical operation:

- Sampler $Y'C_BC_R$ Range Expansion
- Sampler $Y'C_BC_R$ Model Conversion

Sampler $Y'C_BC_R$ Range Expansion

Sampler $Y'C_BC_R$ range expansion is applied to color component values after all texel input operations which are not specific to sampler $Y'C_BC_R$ conversion. For example, the input values to this stage have been converted using the normal format conversion rules.

Sampler $Y'C_BC_R$ range expansion is not applied if `ycbcrModel` is `VK_SAMPLER_YCBCR_MODEL_CONVERSION_RGB_IDENTITY`. That is, the shader receives the vector C'_{rgba} as output by the Component Swizzle stage without further modification.

For other values of `ycbcrModel`, range expansion is applied to the texel component values output by the Component Swizzle defined by the `components` member of VkSamplerYcbcrConversionCreateInfo. Range expansion applies independently to each component of the image. For the purposes of range expansion and $Y'C_BC_R$ model conversion, the R and B components contain color difference (chroma) values and the G component contains luma. The A component is not modified by sampler $Y'C_BC_R$ range expansion.

The range expansion to be applied is defined by the `ycbcrRange` member of the VkSamplerYcbcrConversionCreateInfo structure:

- If `ycbcrRange` is `VK_SAMPLER_YCBCR_RANGE_ITU_FULL`, the following transformations are applied:

$$
\begin{aligned}
Y' &= C'_{rgba}[G] \\
C_B &= C'_{rgba}[B] - \frac{2^{(n-1)}}{(2^n)-1} \\
C_R &= C'_{rgba}[R] - \frac{2^{(n-1)}}{(2^n)-1}
\end{aligned}
$$

> **NOTE**
>
> These formulae correspond to the “full range” encoding in the “Quantization schemes” chapter of the Khronos Data Format Specification.
>
> Should any future amendments be made to the ITU specifications from which these equations are derived, the formulae used by Vulkan **may** also be updated to maintain parity.

- If `ycbcrRange` is `VK_SAMPLER_YCBCR_RANGE_ITU_NARROW`, the following transformations are applied:

$$
\begin{aligned}
Y' &= \frac{C'_{rgba}[G] \times (2^n - 1) - 16 \times 2^{n-8}}{219 \times 2^{n-8}} \\
C_B &= \frac{C'_{rgba}[B] \times (2^n - 1) - 128 \times 2^{n-8}}{224 \times 2^{n-8}} \\
C_R &= \frac{C'_{rgba}[R] \times (2^n - 1) - 128 \times 2^{n-8}}{224 \times 2^{n-8}}
\end{aligned}
$$

NOTE	These formulae correspond to the “narrow range” encoding in the “Quantization schemes” chapter of the Khronos Data Format Specification.

- *n* is the bit-depth of the components in the format.

The precision of the operations performed during range expansion **must** be at least that of the source format.

An implementation **may** clamp the results of these range expansion operations such that Y' falls in the range [0,1], and/or such that C_B and C_R fall in the range [-0.5,0.5].

Sampler $Y'C_BC_R$ Model Conversion

The range-expanded values are converted between color models, according to the color model conversion specified in the `ycbcrModel` member:

`VK_SAMPLER_YCBCR_MODEL_CONVERSION_RGB_IDENTITY`

The color components are not modified by the color model conversion since they are assumed already to represent the desired color model in which the shader is operating; $Y'C_BC_R$ range expansion is also ignored.

`VK_SAMPLER_YCBCR_MODEL_CONVERSION_YCBCR_IDENTITY`

The color components are not modified by the color model conversion and are assumed to be treated as though in $Y'C_BC_R$ form both in memory and in the shader; $Y'C_BC_R$ range expansion is applied to the components as for other $Y'C_BC_R$ models, with the vector (C_R,Y',C_B,A) provided to the shader.

`VK_SAMPLER_YCBCR_MODEL_CONVERSION_YCBCR_709`

The color components are transformed from a $Y'C_BC_R$ representation to an R'G'B' representation as described in the “BT.709 $Y'C_BC_R$ conversion” section of the Khronos Data Format Specification.

`VK_SAMPLER_YCBCR_MODEL_CONVERSION_YCBCR_601`

The color components are transformed from a $Y'C_BC_R$ representation to an R'G'B' representation as described in the “BT.601 $Y'C_BC_R$ conversion” section of the Khronos Data Format Specification.

`VK_SAMPLER_YCBCR_MODEL_CONVERSION_YCBCR_2020`

The color components are transformed from a $Y'C_BC_R$ representation to an R'G'B' representation as described in the “BT.2020 $Y'C_BC_R$ conversion” section of the Khronos Data Format Specification.

In this operation, each output component is dependent on each input component.

An implementation **may** clamp the R'G'B' results of these conversions to the range [0,1].

The precision of the operations performed during model conversion **must** be at least that of the source format.

The alpha component is not modified by these model conversions.

Sampling operations in a non-linear color space can introduce color and intensity shifts at sharp transition boundaries. To avoid this issue, the technically precise color correction sequence described in the “Introduction to Color Conversions” chapter of the Khronos Data Format Specification may be performed as follows:

- Calculate the unnormalized texel coordinates corresponding to the desired sample position.
- For a `minFilter` or `magFilter` of `VK_FILTER_NEAREST`:
  1. Calculate (*i*,*j*) for the sample location as described under the “nearest filtering” formulae in (u,v,w,a) to (i,j,k,l,n) Transformation and Array Layer Selection
  2. Calculate the normalized texel coordinates corresponding to these integer coordinates.
  3. Sample using sampler $Y'C_BC_R$ conversion at this location.
- For a `minFilter` or `magFilter` of `VK_FILTER_LINEAR`:
  1. Calculate ($i_{[0,1]}$,$j_{[0,1]}$) for the sample location as described under the “linear filtering” formulae in (u,v,w,a) to (i,j,k,l,n) Transformation and Array Layer Selection
  2. Calculate the normalized texel coordinates corresponding to these integer coordinates.
  3. Sample using sampler $Y'C_BC_R$ conversion at each of these locations.
  4. Convert the non-linear A'R'G'B' outputs of the $Y'C_BC_R$ conversions to linear ARGB values as described in the “Transfer Functions” chapter of the Khronos Data Format Specification.
  5. Interpolate the linear ARGB values using the α and β values described in the “linear filtering” section of (u,v,w,a) to (i,j,k,l,n) Transformation and Array Layer Selection and the equations in Texel Filtering.

NOTE

The additional calculations and, especially, additional number of sampling operations in the `VK_FILTER_LINEAR` case can be expected to have a performance impact compared with using the outputs directly. Since the variations from “correct” results are subtle for most content, the application author should determine whether a more costly implementation is strictly necessary.

If `chromaFilter`, and `minFilter` or `magFilter` are both `VK_FILTER_NEAREST`, these operations are redundant and sampling using sampler $Y'C_BC_R$ conversion at the desired sample coordinates will produce the “correct” results without further processing.

16.4. Texel Output Operations

Texel output instructions are SPIR-V image instructions that write to an image. *Texel output operations* are a set of steps that are performed on state, coordinates, and texel values while processing a texel output instruction, and which are common to some or all texel output

instructions. They include the following steps, which are performed in the listed order:

- Validation operations
  - Format validation
  - Type validation
  - Coordinate validation
  - Sparse validation
- Texel output format conversion

16.4.1. Texel Output Validation Operations

Texel output validation operations inspect instruction/image state or coordinates, and in certain circumstances cause the write to have no effect. There are a series of validations that the texel undergoes.

Texel Format Validation

If the image format of the `OpTypeImage` is not compatible with the `VkImageView`'s `format`, the write causes the contents of the image's memory to become undefined.

Texel Type Validation

If the `Sampled Type` of the `OpTypeImage` does not match the SPIR-V Type, the write causes the value of the texel to become undefined. For integer types, if the signedness of the access does not match the signedness of the accessed resource, the write causes the value of the texel to become undefined.

16.4.2. Integer Texel Coordinate Validation

The integer texel coordinates are validated according to the same rules as for texel input coordinate validation.

If the texel fails integer texel coordinate validation, then the write has no effect.

16.4.3. Sparse Texel Operation

If the texel attempts to write to an unbound region of a sparse image, the texel is a sparse unbound texel. In such a case, if the VkPhysicalDeviceSparseProperties::`residencyNonResidentStrict` property is `VK_TRUE`, the sparse unbound texel write has no effect. If `residencyNonResidentStrict` is `VK_FALSE`, the write **may** have a side effect that becomes visible to other accesses to unbound texels in any resource, but will not be visible to any device memory allocated by the application.

16.4.4. Texel Output Format Conversion

If the image format is sRGB, a linear to sRGB conversion is applied to the R, G, and B components as described in the "sRGB EOTF" section of the Khronos Data Format Specification. The A component, if present, is unchanged.

Texels then undergo a format conversion from the floating-point, signed, or unsigned integer type

of the texel data to the VkFormat of the image view. If the number of components in the texel data is larger than the number of components in the format, additional components are discarded.

Each component is converted based on its type and size (as defined in the Format Definition section for each VkFormat). Floating-point outputs are converted as described in Floating-Point Format Conversions and Fixed-Point Data Conversion. Integer outputs are converted such that their value is preserved. The converted value of any integer that cannot be represented in the target format is undefined.

If the `VkImageView` format has an X component in its format description, undefined values are written to those bits.

If the underlying `VkImage` format has an X component in its format description, undefined values are also written to those bits, even if result format conversion produces a valid value for those bits because the `VkImageView` format is different.

16.5. Normalized Texel Coordinate Operations

If the image sampler instruction provides normalized texel coordinates, some of the following operations are performed.

16.5.1. Projection Operation

For `Proj` image operations, the normalized texel coordinates (s,t,r,q,a) and (if present) the D_{ref} coordinate are transformed as follows:

$$
\begin{aligned}
s &= \frac{s}{q}, && \text{for 1D, 2D, or 3D image} \\
t &= \frac{t}{q}, && \text{for 2D or 3D image} \\
r &= \frac{r}{q}, && \text{for 3D image} \\
D_{ref} &= \frac{D_{ref}}{q}, && \text{if provided}
\end{aligned}
$$

16.5.2. Derivative Image Operations

Derivatives are used for LOD selection. These derivatives are either implicit (in an `ImplicitLod` image instruction in a fragment shader) or explicit (provided explicitly by shader to the image instruction in any shader).

For implicit derivatives image instructions, the derivatives of texel coordinates are calculated in the same manner as derivative operations. That is:

$$
\begin{aligned}
\partial s / \partial x &= dPdx(s), & \partial s / \partial y &= dPdy(s), && \text{for 1D, 2D, Cube, or 3D image} \\
\partial t / \partial x &= dPdx(t), & \partial t / \partial y &= dPdy(t), && \text{for 2D, Cube, or 3D image} \\
\partial r / \partial x &= dPdx(r), & \partial r / \partial y &= dPdy(r), && \text{for Cube or 3D image}
\end{aligned}
$$

Partial derivatives not defined above for certain image dimensionalities are set to zero.

For explicit LOD image instructions, if the **optional** SPIR-V operand `Grad` is provided, then the operand values are used for the derivatives. The number of components present in each derivative for a given image dimensionality matches the number of partial derivatives computed above.

If the **optional** SPIR-V operand `Lod` is provided, then derivatives are set to zero, the cube map derivative transformation is skipped, and the scale factor operation is skipped. Instead, the floating-point scalar coordinate is directly assigned to λ_{base} as described in LOD Operation.

If the image or sampler object used by an implicit derivative image instruction is not uniform across the quad and `quadDivergentImplicitLod` is not supported, then the derivative and LOD values are undefined. Implicit derivatives are well-defined when the image and sampler and control flow are uniform across the quad, even if they diverge between different quads.

If `quadDivergentImplicitLod` is supported, then derivatives and implicit LOD values are well-defined even if the image or sampler object are not uniform within a quad. The derivatives are computed as specified above, and the implicit LOD calculation proceeds for each shader invocation using its respective image and sampler object.

16.5.3. Cube Map Face Selection and Transformations

For cube map image instructions, the (s,t,r) coordinates are treated as a direction vector (r_x,r_y,r_z). The direction vector is used to select a cube map face. The direction vector is transformed to a per-face texel coordinate system (s_{face},t_{face}), The direction vector is also used to transform the derivatives to per-face derivatives.

16.5.4. Cube Map Face Selection

The direction vector selects one of the cube map's faces based on the largest magnitude coordinate direction (the major axis direction). Since two or more coordinates **can** have identical magnitude, the implementation **must** have rules to disambiguate this situation.

The rules **should** have as the first rule that r_z wins over r_y and r_x, and the second rule that r_y wins over r_x. An implementation **may** choose other rules, but the rules **must** be deterministic and depend only on (r_x,r_y,r_z).

The layer number (corresponding to a cube map face), the coordinate selections for s_c, t_c, r_c, and the selection of derivatives, are determined by the major axis direction as specified in the following two tables.

Table 17. Cube Map Face and Coordinate Selection

Major Axis Direction	Layer Number	Cube Map Face	s_c	t_c	r_c
$+r_x$	0	Positive X	$-r_z$	$-r_y$	r_x
$-r_x$	1	Negative X	$+r_z$	$-r_y$	r_x
$+r_y$	2	Positive Y	$+r_x$	$+r_z$	r_y

Major Axis Direction	Layer Number	Cube Map Face	s_c	t_c	r_c
$-r_y$	3	Negative Y	$+r_x$	$-r_z$	r_y
$+r_z$	4	Positive Z	$+r_x$	$-r_y$	r_z
$-r_z$	5	Negative Z	$-r_x$	$-r_y$	r_z

Table 18. Cube Map Derivative Selection

Major Axis Direction	$\partial s_c / \partial x$	$\partial s_c / \partial y$	$\partial t_c / \partial x$	$\partial t_c / \partial y$	$\partial r_c / \partial x$	$\partial r_c / \partial y$
$+r_x$	$-\partial r_z / \partial x$	$-\partial r_z / \partial y$	$-\partial r_y / \partial x$	$-\partial r_y / \partial y$	$+\partial r_x / \partial x$	$+\partial r_x / \partial y$
$-r_x$	$+\partial r_z / \partial x$	$+\partial r_z / \partial y$	$-\partial r_y / \partial x$	$-\partial r_y / \partial y$	$-\partial r_x / \partial x$	$-\partial r_x / \partial y$
$+r_y$	$+\partial r_x / \partial x$	$+\partial r_x / \partial y$	$+\partial r_z / \partial x$	$+\partial r_z / \partial y$	$+\partial r_y / \partial x$	$+\partial r_y / \partial y$
$-r_y$	$+\partial r_x / \partial x$	$+\partial r_x / \partial y$	$-\partial r_z / \partial x$	$-\partial r_z / \partial y$	$-\partial r_y / \partial x$	$-\partial r_y / \partial y$
$+r_z$	$+\partial r_x / \partial x$	$+\partial r_x / \partial y$	$-\partial r_y / \partial x$	$-\partial r_y / \partial y$	$+\partial r_z / \partial x$	$+\partial r_z / \partial y$
$-r_z$	$-\partial r_x / \partial x$	$-\partial r_x / \partial y$	$-\partial r_y / \partial x$	$-\partial r_y / \partial y$	$-\partial r_z / \partial x$	$-\partial r_z / \partial y$

16.5.5. Cube Map Coordinate Transformation

$$s_{face} = \frac{1}{2} \times \frac{s_c}{|r_c|} + \frac{1}{2}$$
$$t_{face} = \frac{1}{2} \times \frac{t_c}{|r_c|} + \frac{1}{2}$$

16.5.6. Cube Map Derivative Transformation

The partial derivatives of the Cube Map Coordinate Transformations can be computed as:

$$\begin{aligned}\frac{\partial s_{face}}{\partial x} &= \frac{\partial}{\partial x}\left(\frac{1}{2} \times \frac{s_c}{|r_c|} + \frac{1}{2}\right) \\ &= \frac{1}{2} \times \frac{\partial}{\partial x}\left(\frac{s_c}{|r_c|}\right) \\ &= \frac{1}{2} \times \left(\frac{|r_c| \times \partial s_c / \partial x - s_c \times \partial r_c / \partial x}{(r_c)^2}\right)\end{aligned}$$

The other derivatives are simplified similarly, resulting in

$$\frac{\partial s_{face}}{\partial y} = \frac{1}{2} \times \left(\frac{|r_c| \times \partial s_c / \partial y - s_c \times \partial r_c / \partial y}{(r_c)^2} \right)$$
$$\frac{\partial t_{face}}{\partial x} = \frac{1}{2} \times \left(\frac{|r_c| \times \partial t_c / \partial x - t_c \times \partial r_c / \partial x}{(r_c)^2} \right)$$
$$\frac{\partial t_{face}}{\partial y} = \frac{1}{2} \times \left(\frac{|r_c| \times \partial t_c / \partial y - t_c \times \partial r_c / \partial y}{(r_c)^2} \right)$$

16.5.7. Scale Factor Operation, LOD Operation and Image Level(s) Selection

LOD selection **can** be either explicit (provided explicitly by the image instruction) or implicit (determined from a scale factor calculated from the derivatives). The LOD **must** be computed with `mipmapPrecisionBits` of accuracy.

Scale Factor Operation

The magnitude of the derivatives are calculated by:

$m_{ux} = |\partial s/\partial x| \times w_{base}$

$m_{vx} = |\partial t/\partial x| \times h_{base}$

$m_{wx} = |\partial r/\partial x| \times d_{base}$

$m_{uy} = |\partial s/\partial y| \times w_{base}$

$m_{vy} = |\partial t/\partial y| \times h_{base}$

$m_{wy} = |\partial r/\partial y| \times d_{base}$

where:

$\partial t/\partial x = \partial t/\partial y = 0$ (for 1D images)

$\partial r/\partial x = \partial r/\partial y = 0$ (for 1D, 2D or Cube images)

and:

w_{base} = image.w

h_{base} = image.h

d_{base} = image.d

(for the `baseMipLevel`, from the image descriptor).

A point sampled in screen space has an elliptical footprint in texture space. The minimum and maximum scale factors (ρ_{min}, ρ_{max}) **should** be the minor and major axes of this ellipse.

The *scale factors* ρ_x and ρ_y, calculated from the magnitude of the derivatives in x and y, are used to compute the minimum and maximum scale factors.

ρ_x and ρ_y **may** be approximated with functions f_x and f_y, subject to the following constraints:

$$f_x \text{is continuous and monotonically increasing in each of} m_{ux},\ m_{vx},\ \text{and} m_{wx}$$
$$f_y \text{is continuous and monotonically increasing in each of} m_{uy},\ m_{vy},\ \text{and} m_{wy}$$

$$\max(|m_{ux}|,\ |m_{vx}|,\ |m_{wx}|) \leq f_x \leq \sqrt{2}(|m_{ux}| + |m_{vx}| + |m_{wx}|)$$
$$\max(|m_{uy}|,\ |m_{vy}|,\ |m_{wy}|) \leq f_y \leq \sqrt{2}(|m_{uy}| + |m_{vy}| + |m_{wy}|)$$

The minimum and maximum scale factors (ρ_{min},ρ_{max}) are determined by:

$\rho_{max} = \max(\rho_x, \rho_y)$

$\rho_{min} = \min(\rho_x, \rho_y)$

The ratio of anisotropy is determined by:

$\eta = \min(\rho_{max}/\rho_{min}, \max_{Aniso})$

where:

$\text{sampler.max}_{Aniso}$ = `maxAnisotropy` (from sampler descriptor)

$\text{limits.max}_{Aniso}$ = `maxSamplerAnisotropy` (from physical device limits)

$\max_{Aniso} = \min(\text{sampler.max}_{Aniso}, \text{limits.max}_{Aniso})$

If $\rho_{max} = \rho_{min} = 0$, then all the partial derivatives are zero, the fragment's footprint in texel space is a point, and η **should** be treated as 1. If $\rho_{max} \neq 0$ and $\rho_{min} = 0$ then all partial derivatives along one axis are zero, the fragment's footprint in texel space is a line segment, and η **should** be treated as

max_{Aniso}. However, anytime the footprint is small in texel space the implementation **may** use a smaller value of η, even when ρ_{min} is zero or close to zero. If either VkPhysicalDeviceFeatures ::`samplerAnisotropy` or VkSamplerCreateInfo::`anisotropyEnable` are `VK_FALSE`, max_{Aniso} is set to 1.

If η = 1, sampling is isotropic. If η > 1, sampling is anisotropic.

The sampling rate (N) is derived as:

$$N = \lceil \eta \rceil$$

An implementation **may** round N up to the nearest supported sampling rate. An implementation **may** use the value of N as an approximation of η.

LOD Operation

The LOD parameter λ is computed as follows:

$$\lambda_{base}(x, y) = \begin{cases} shaderOp.Lod & \text{(from optional SPIR-V operand)} \\ \log_2\left(\frac{\rho_{max}}{\eta}\right) & \text{otherwise} \end{cases}$$

$$\lambda'(x, y) = \lambda_{base} + \text{clamp}\left(sampler.bias + shaderOp.bias, -maxSamplerLodBias, maxSamplerLodBias\right)$$

$$\lambda = \begin{cases} lod_{max}, & \lambda' > lod_{max} \\ \lambda', & lod_{min} \le \lambda' \le lod_{max} \\ lod_{min}, & \lambda' < lod_{min} \\ undefined, & lod_{min} > lod_{max} \end{cases}$$

where:

$$sampler.bias = mipLodBias \quad \text{(from sampler descriptor)}$$

$$shaderOp.bias = \begin{cases} Bias & \text{(from optional SPIR-V operand)} \\ 0 & \text{otherwise} \end{cases}$$

$$sampler.lod_{min} = minLod \quad \text{(from sampler descriptor)}$$

$$shaderOp.lod_{min} = \begin{cases} MinLod & \text{(from optional SPIR-V operand)} \\ 0 & \text{otherwise} \end{cases}$$

$$lod_{min} = \max(sampler.lod_{min}, shaderOp.lod_{min})$$

$$lod_{max} = maxLod \quad \text{(from sampler descriptor)}$$

and maxSamplerLodBias is the value of the VkPhysicalDeviceLimits feature `maxSamplerLodBias`.

Image Level(s) Selection

The image level(s) d, d_{hi}, and d_{lo} which texels are read from are determined by an image-level parameter d_l, which is computed based on the LOD parameter, as follows:

$$d_l = \begin{cases} nearest(d'), & \text{mipmapMode is VK_SAMPLER_MIPMAP_MODE_NEAREST} \\ d', & \text{otherwise} \end{cases}$$

where:

$$d' = level_{base} + \text{clamp}(\lambda, 0, q)$$

$$nearest(d') = \begin{cases} \lceil d' + 0.5 \rceil - 1, & \text{preferred} \\ \lfloor d' + 0.5 \rfloor, & \text{alternative} \end{cases}$$

and:

$$level_{base} = baseMipLevel$$
$$q = levelCount - 1$$

`baseMipLevel` and `levelCount` are taken from the `subresourceRange` of the image view.

If the sampler's `mipmapMode` is `VK_SAMPLER_MIPMAP_MODE_NEAREST`, then the level selected is $d = d_l$.

If the sampler's `mipmapMode` is `VK_SAMPLER_MIPMAP_MODE_LINEAR`, two neighboring levels are selected:

$$d_{hi} = \lfloor d_l \rfloor$$
$$d_{lo} = min(d_{hi} + 1, level_{base} + q)$$
$$\delta = d_l - d_{hi}$$

δ is the fractional value, quantized to the number of mipmap precision bits, used for linear filtering between levels.

16.5.8. (s,t,r,q,a) to (u,v,w,a) Transformation

The normalized texel coordinates are scaled by the image level dimensions and the array layer is selected.

This transformation is performed once for each level used in filtering (either d, or d_{hi} and d_{lo}).

$$u(x, y) = s(x, y) \times width_{scale} + \Delta_i$$
$$v(x, y) = \begin{cases} 0 & \text{for 1D images} \\ t(x, y) \times height_{scale} + \Delta_j & \text{otherwise} \end{cases}$$
$$w(x, y) = \begin{cases} 0 & \text{for 2D or Cube images} \\ r(x, y) \times depth_{scale} + \Delta_k & \text{otherwise} \end{cases}$$
$$a(x, y) = \begin{cases} a(x, y) & \text{for array images} \\ 0 & \text{otherwise} \end{cases}$$

where:

$width_{scale} = width_{level}$

$height_{scale} = height_{level}$

$depth_{scale} = depth_{level}$

and where (Δ_i, Δ_j, Δ_k) are taken from the image instruction if it includes a `ConstOffset` or `Offset` operand, otherwise they are taken to be zero.

Operations then proceed to Unnormalized Texel Coordinate Operations.

16.6. Unnormalized Texel Coordinate Operations

16.6.1. (u,v,w,a) to (i,j,k,l,n) Transformation and Array Layer Selection

The unnormalized texel coordinates are transformed to integer texel coordinates relative to the selected mipmap level.

The layer index l is computed as:

l = clamp(RNE(a), 0, `layerCount` - 1) + `baseArrayLayer`

where `layerCount` is the number of layers in the image subresource range of the image view, `baseArrayLayer` is the first layer from the subresource range, and where:

$$\mathrm{RNE}(a) = \begin{cases} \mathrm{roundTiesToEven}(a) & \text{preferred, from IEEE Std 754-2008 Floating-Point Arithmetic} \\ \lfloor a + 0.5 \rfloor & \text{alternative} \end{cases}$$

The sample index n is assigned the value 0.

Nearest filtering (`VK_FILTER_NEAREST`) computes the integer texel coordinates that the unnormalized coordinates lie within:

$$\begin{aligned} i &= \lfloor u + shift \rfloor \\ j &= \lfloor v + shift \rfloor \\ k &= \lfloor w + shift \rfloor \end{aligned}$$

where:

shift = 0.0

Linear filtering (`VK_FILTER_LINEAR`) computes a set of neighboring coordinates which bound the unnormalized coordinates. The integer texel coordinates are combinations of i_0 or i_1, j_0 or j_1, k_0 or k_1, as well as weights α, β, and γ.

$$\begin{aligned} i_0 &= \lfloor u - shift \rfloor \\ i_1 &= i_0 + 1 \\ j_0 &= \lfloor v - shift \rfloor \\ j_1 &= j_0 + 1 \\ k_0 &= \lfloor w - shift \rfloor \\ k_1 &= k_0 + 1 \end{aligned}$$

$$\alpha = \text{frac}(u - shift)$$

$$\beta = \text{frac}(v - shift)$$

$$\gamma = \text{frac}(w - shift)$$

where:

shift = 0.5

and where:

$$\text{frac}(x) = x - \lfloor x \rfloor$$

where the number of fraction bits retained is specified by `VkPhysicalDeviceLimits::subTexelPrecisionBits`.

16.7. Integer Texel Coordinate Operations

The `OpImageFetch` and `OpImageFetchSparse` SPIR-V instructions **may** supply a LOD from which texels are to be fetched using the optional SPIR-V operand `Lod`. Other integer-coordinate operations **must** not. If the `Lod` is provided then it **must** be an integer.

The image level selected is:

$$d = level_{base} + \begin{cases} Lod & \text{(from optional SPIR-V operand)} \\ 0 & \text{otherwise} \end{cases}$$

If d does not lie in the range [`baseMipLevel`, `baseMipLevel` + `levelCount`) then any values fetched are undefined, and any writes (if supported) are discarded.

16.8. Image Sample Operations

16.8.1. Wrapping Operation

`Cube` images ignore the wrap modes specified in the sampler. Instead, if `VK_FILTER_NEAREST` is used within a mip level then `VK_SAMPLER_ADDRESS_MODE_CLAMP_TO_EDGE` is used, and if `VK_FILTER_LINEAR` is used within a mip level then sampling at the edges is performed as described earlier in the Cube map edge handling section.

The first integer texel coordinate i is transformed based on the `addressModeU` parameter of the sampler.

$$i = \begin{cases} i \bmod size & \text{for repeat} \\ (size-1) - \text{mirror}\left((i \bmod (2 \times size)) - size\right) & \text{for mirrored repeat} \\ \text{clamp}\left(i,\ 0,\ size-1\right) & \text{for clamp to edge} \\ \text{clamp}\left(i,\ -1,\ size\right) & \text{for clamp to border} \\ \text{clamp}\left(\text{mirror}\left(i\right),\ 0,\ size-1\right) & \text{for mirror clamp to edge} \end{cases}$$

where:

$$\text{mirror}\left(n\right) = \begin{cases} n & \text{for } n \geq 0 \\ -(1+n) & \text{otherwise} \end{cases}$$

j (for 2D and Cube image) and k (for 3D image) are similarly transformed based on the `addressModeV` and `addressModeW` parameters of the sampler, respectively.

16.8.2. Texel Gathering

SPIR-V instructions with `Gather` in the name return a vector derived from 4 texels in the base level of the image view. The rules for the `VK_FILTER_LINEAR` minification filter are applied to identify the four selected texels. Each texel is then converted to an RGBA value according to conversion to RGBA and then swizzled. A four-component vector is then assembled by taking the component indicated by the `Component` value in the instruction from the swizzled color value of the four texels. If the operation does not use the `ConstOffsets` image operand then the four texels form the 2 × 2 rectangle used for texture filtering:

$$\begin{aligned} \tau[R] &= \tau_{i0\,j1}[level_{base}][comp] \\ \tau[G] &= \tau_{i1\,j1}[level_{base}][comp] \\ \tau[B] &= \tau_{i1\,j0}[level_{base}][comp] \\ \tau[A] &= \tau_{i0\,j0}[level_{base}][comp] \end{aligned}$$

If the operation does use the `ConstOffsets` image operand then the offsets allow a custom filter to be defined:

$$\begin{aligned} \tau[R] &= \tau_{i0\,j0\,+\,\Delta_0}[level_{base}][comp] \\ \tau[G] &= \tau_{i0\,j0\,+\,\Delta_1}[level_{base}][comp] \\ \tau[B] &= \tau_{i0\,j0\,+\,\Delta_2}[level_{base}][comp] \\ \tau[A] &= \tau_{i0\,j0\,+\,\Delta_3}[level_{base}][comp] \end{aligned}$$

where:

$$\tau[level_{base}][comp] = \begin{cases} \tau[level_{base}][R], & \text{for } comp = 0 \\ \tau[level_{base}][G], & \text{for } comp = 1 \\ \tau[level_{base}][B], & \text{for } comp = 2 \\ \tau[level_{base}][A], & \text{for } comp = 3 \end{cases}$$

$comp$ from SPIR-V operand Component

`OpImage*Gather` **must** not be used on a sampled image with sampler $Y'C_BC_R$ conversion enabled.

16.8.3. Texel Filtering

Texel filtering is first performed for each level (either d or d_{hi} and d_{lo}).

If λ is less than or equal to zero, the texture is said to be *magnified*, and the filter mode within a mip level is selected by the `magFilter` in the sampler. If λ is greater than zero, the texture is said to be *minified*, and the filter mode within a mip level is selected by the `minFilter` in the sampler.

Texel Nearest Filtering

Within a mip level, `VK_FILTER_NEAREST` filtering selects a single value using the (i, j, k) texel coordinates, with all texels taken from layer l.

$$\tau[level] = \begin{cases} \tau_{ijk}[level], & \text{for 3D image} \\ \tau_{ij}[level], & \text{for 2D or Cube image} \\ \tau_{i}[level], & \text{for 1D image} \end{cases}$$

Texel Linear Filtering

Within a mip level, `VK_FILTER_LINEAR` filtering combines 8 (for 3D), 4 (for 2D or Cube), or 2 (for 1D) texel values, together with their linear weights. The linear weights are derived from the fractions computed earlier:

$$\begin{aligned} w_{i_0} &= (1-\alpha) \\ w_{i_1} &= (\alpha) \\ w_{j_0} &= (1-\beta) \\ w_{j_1} &= (\beta) \\ w_{k_0} &= (1-\gamma) \\ w_{k_1} &= (\gamma) \end{aligned}$$

The values of multiple texels, together with their weights, are combined to produce a filtered value.

The VkSamplerReductionModeCreateInfo::`reductionMode` **can** control the process by which multiple texels, together with their weights, are combined to produce a filtered texture value.

When the `reductionMode` is set (explicitly or implicitly) to `VK_SAMPLER_REDUCTION_MODE_WEIGHTED_AVERAGE`, a weighted average is computed:

$$\tau_{3D} = \sum_{k=k_0}^{k_1} \sum_{j=j_0}^{j_1} \sum_{i=i_0}^{i_1} (w_i)(w_j)(w_k)\tau_{ijk}$$
$$\tau_{2D} = \sum_{j=j_0}^{j_1} \sum_{i=i_0}^{i_1} (w_i)(w_j)\tau_{ij}$$
$$\tau_{1D} = \sum_{i=i_0}^{i_1} (w_i)\tau_i$$

However, if the reduction mode is VK_SAMPLER_REDUCTION_MODE_MIN or VK_SAMPLER_REDUCTION_MODE_MAX, the process operates on the above set of multiple texels, together with their weights, computing a component-wise minimum or maximum, respectively, of the components of the set of texels with non-zero weights.

Texel Mipmap Filtering

VK_SAMPLER_MIPMAP_MODE_NEAREST filtering returns the value of a single mipmap level,

$\tau = \tau[d]$.

VK_SAMPLER_MIPMAP_MODE_LINEAR filtering combines the values of multiple mipmap levels ($\tau[hi]$ and $\tau[lo]$), together with their linear weights.

The linear weights are derived from the fraction computed earlier:

$$w_{hi} = (1 - \delta)$$
$$w_{lo} = (\delta)$$

The values of multiple mipmap levels, together with their weights, are combined to produce a final filtered value.

The VkSamplerReductionModeCreateInfo::reductionMode **can** control the process by which multiple texels, together with their weights, are combined to produce a filtered texture value.

When the reductionMode is set (explicitly or implicitly) to VK_SAMPLER_REDUCTION_MODE_WEIGHTED_AVERAGE, a weighted average is computed:

$$\tau = (w_{hi})\tau[hi] + (w_{lo})\tau[lo]$$

However, if the reduction mode is VK_SAMPLER_REDUCTION_MODE_MIN or VK_SAMPLER_REDUCTION_MODE_MAX, the process operates on the above values, together with their weights, computing a component-wise minimum or maximum, respectively, of the components of the values with non-zero weights.

Texel Anisotropic Filtering

Anisotropic filtering is enabled by the anisotropyEnable in the sampler. When enabled, the image filtering scheme accounts for a degree of anisotropy.

The particular scheme for anisotropic texture filtering is implementation-dependent.

Implementations **should** consider the `magFilter`, `minFilter` and `mipmapMode` of the sampler to control the specifics of the anisotropic filtering scheme used. In addition, implementations **should** consider `minLod` and `maxLod` of the sampler.

For historical reasons, vendor implementations of anisotropic filtering interpret these sampler parameters in different ways, particularly in corner cases such as `magFilter`, `minFilter` of `NEAREST` or `maxAnisotropy` equal to 1.0. Applications should not expect consistent behavior in such cases, and should use anisotropic filtering only with parameters which are expected to give a quality improvement relative to `LINEAR` filtering.

The following describes one particular approach to implementing anisotropic filtering for the 2D Image case; implementations **may** choose other methods:

Given a `magFilter`, `minFilter` of `VK_FILTER_LINEAR` and a `mipmapMode` of `VK_SAMPLER_MIPMAP_MODE_NEAREST`:

NOTE

Instead of a single isotropic sample, N isotropic samples are sampled within the image footprint of the image level d to approximate an anisotropic filter. The sum $\tau_{2Daniso}$ is defined using the single isotropic $\tau_{2D}(u,v)$ at level d.

$$\tau_{2Daniso} = \frac{1}{N}\sum_{i=1}^{N} \tau_{2D}\left(u\left(x-\frac{1}{2}+\frac{i}{N+1}, y\right), v\left(x-\frac{1}{2}+\frac{i}{N+1}, y\right)\right), \quad \text{when } \rho_x > \rho_y$$

$$\tau_{2Daniso} = \frac{1}{N}\sum_{i=1}^{N} \tau_{2D}\left(u\left(x, y-\frac{1}{2}+\frac{i}{N+1}\right), v\left(x, y-\frac{1}{2}+\frac{i}{N+1}\right)\right), \quad \text{when } \rho_y \geq \rho_x$$

When VkSamplerReductionModeCreateInfo::`reductionMode` is `VK_SAMPLER_REDUCTION_MODE_WEIGHTED_AVERAGE`, the above summation is used. However, if the reduction mode is `VK_SAMPLER_REDUCTION_MODE_MIN` or `VK_SAMPLER_REDUCTION_MODE_MAX`, the process operates on the above values, together with their weights, computing a component-wise minimum or maximum, respectively, of the components of the values with non-zero weights.

16.9. Image Operation Steps

Each step described in this chapter is performed by a subset of the image instructions:

- Texel Input Validation Operations, Format Conversion, Texel Replacement, Conversion to RGBA, and Component Swizzle: Performed by all instructions except `OpImageWrite`.
- Depth Comparison: Performed by `OpImage*Dref` instructions.
- All Texel output operations: Performed by `OpImageWrite`.
- Projection: Performed by all `OpImage*Proj` instructions.
- Derivative Image Operations, Cube Map Operations, Scale Factor Operation, LOD Operation and Image Level(s) Selection, and Texel Anisotropic Filtering: Performed by all `OpImageSample*` and `OpImageSparseSample*` instructions.
- (s,t,r,q,a) to (u,v,w,a) Transformation, Wrapping, and (u,v,w,a) to (i,j,k,l,n) Transformation And

Array Layer Selection: Performed by all `OpImageSample`, `OpImageSparseSample`, and `OpImage*Gather` instructions.

- Texel Gathering: Performed by `OpImage*Gather` instructions.
- Texel Filtering: Performed by all `OpImageSample*` and `OpImageSparseSample*` instructions.
- Sparse Residency: Performed by all `OpImageSparse*` instructions.

16.10. Image Query Instructions

16.10.1. Image Property Queries

`OpImageQuerySize`, `OpImageQuerySizeLod`, `OpImageQueryLevels`, and `OpImageQuerySamples` query properties of the image descriptor that would be accessed by a shader image operation.

`OpImageQuerySizeLod` returns the size of the image level identified by the `Level of Detail` operand. If that level does not exist in the image, then the value returned is undefined.

16.10.2. LOD Query

`OpImageQueryLod` returns the Lod parameters that would be used in an image operation with the given image and coordinates. The steps described in this chapter are performed as if for `OpImageSampleImplicitLod`, up to Scale Factor Operation, LOD Operation and Image Level(s) Selection. The return value is the vector (λ', d_l - $level_{base}$). These values **may** be subject to implementation-specific maxima and minima for very large, out-of-range values.

Chapter 17. Queries

Queries provide a mechanism to return information about the processing of a sequence of Vulkan commands. Query operations are asynchronous, and as such, their results are not returned immediately. Instead, their results, and their availability status are stored in a Query Pool. The state of these queries **can** be read back on the host, or copied to a buffer object on the device.

The supported query types are Occlusion Queries, Pipeline Statistics Queries, and Timestamp Queries.

17.1. Query Pools

Queries are managed using *query pool* objects. Each query pool is a collection of a specific number of queries of a particular type.

Query pools are represented by `VkQueryPool` handles:

```
// Provided by VK_VERSION_1_0
VK_DEFINE_NON_DISPATCHABLE_HANDLE(VkQueryPool)
```

To create a query pool, call:

```
// Provided by VK_VERSION_1_0
VkResult vkCreateQueryPool(
    VkDevice                                    device,
    const VkQueryPoolCreateInfo*                pCreateInfo,
    const VkAllocationCallbacks*                pAllocator,
    VkQueryPool*                                pQueryPool);
```

- `device` is the logical device that creates the query pool.
- `pCreateInfo` is a pointer to a VkQueryPoolCreateInfo structure containing the number and type of queries to be managed by the pool.
- `pAllocator` controls host memory allocation as described in the Memory Allocation chapter.
- `pQueryPool` is a pointer to a VkQueryPool handle in which the resulting query pool object is returned.

Valid Usage

- VUID-vkCreateQueryPool-device-09663
  `device` **must** support at least one queue family with one of the `VK_QUEUE_COMPUTE_BIT`, or `VK_QUEUE_GRAPHICS_BIT` capabilities

Valid Usage (Implicit)

- VUID-vkCreateQueryPool-device-parameter
  `device` **must** be a valid VkDevice handle
- VUID-vkCreateQueryPool-pCreateInfo-parameter
  `pCreateInfo` **must** be a valid pointer to a valid VkQueryPoolCreateInfo structure
- VUID-vkCreateQueryPool-pAllocator-parameter
  If `pAllocator` is not `NULL`, `pAllocator` **must** be a valid pointer to a valid VkAllocationCallbacks structure
- VUID-vkCreateQueryPool-pQueryPool-parameter
  `pQueryPool` **must** be a valid pointer to a VkQueryPool handle

Return Codes

Success

- `VK_SUCCESS`

Failure

- `VK_ERROR_OUT_OF_HOST_MEMORY`
- `VK_ERROR_OUT_OF_DEVICE_MEMORY`

The `VkQueryPoolCreateInfo` structure is defined as:

```
// Provided by VK_VERSION_1_0
typedef struct VkQueryPoolCreateInfo {
    VkStructureType                 sType;
    const void*                     pNext;
    VkQueryPoolCreateFlags          flags;
    VkQueryType                     queryType;
    uint32_t                        queryCount;
    VkQueryPipelineStatisticFlags   pipelineStatistics;
} VkQueryPoolCreateInfo;
```

- `sType` is a VkStructureType value identifying this structure.
- `pNext` is `NULL` or a pointer to a structure extending this structure.
- `flags` is reserved for future use.
- `queryType` is a VkQueryType value specifying the type of queries managed by the pool.
- `queryCount` is the number of queries managed by the pool.
- `pipelineStatistics` is a bitmask of VkQueryPipelineStatisticFlagBits specifying which counters will be returned in queries on the new pool, as described below in Pipeline Statistics Queries.

`pipelineStatistics` is ignored if `queryType` is not `VK_QUERY_TYPE_PIPELINE_STATISTICS`.

Valid Usage

- VUID-VkQueryPoolCreateInfo-queryType-00791
  If the `pipelineStatisticsQuery` feature is not enabled, `queryType` **must** not be `VK_QUERY_TYPE_PIPELINE_STATISTICS`
- VUID-VkQueryPoolCreateInfo-queryType-00792
  If `queryType` is `VK_QUERY_TYPE_PIPELINE_STATISTICS`, `pipelineStatistics` **must** be a valid combination of VkQueryPipelineStatisticFlagBits values
- VUID-VkQueryPoolCreateInfo-queryType-09534
  If `queryType` is `VK_QUERY_TYPE_PIPELINE_STATISTICS`, `pipelineStatistics` **must** not be zero
- VUID-VkQueryPoolCreateInfo-queryCount-02763
  `queryCount` **must** be greater than 0

Valid Usage (Implicit)

- VUID-VkQueryPoolCreateInfo-sType-sType
  `sType` **must** be `VK_STRUCTURE_TYPE_QUERY_POOL_CREATE_INFO`
- VUID-VkQueryPoolCreateInfo-pNext-pNext
  `pNext` **must** be `NULL`
- VUID-VkQueryPoolCreateInfo-flags-zerobitmask
  `flags` **must** be `0`
- VUID-VkQueryPoolCreateInfo-queryType-parameter
  `queryType` **must** be a valid VkQueryType value

```
// Provided by VK_VERSION_1_0
typedef VkFlags VkQueryPoolCreateFlags;
```

`VkQueryPoolCreateFlags` is a bitmask type for setting a mask, but is currently reserved for future use.

To destroy a query pool, call:

```
// Provided by VK_VERSION_1_0
void vkDestroyQueryPool(
    VkDevice                                    device,
    VkQueryPool                                 queryPool,
    const VkAllocationCallbacks*                pAllocator);
```

- `device` is the logical device that destroys the query pool.
- `queryPool` is the query pool to destroy.
- `pAllocator` controls host memory allocation as described in the Memory Allocation chapter.

Valid Usage

- VUID-vkDestroyQueryPool-queryPool-00793
  All submitted commands that refer to `queryPool` **must** have completed execution
- VUID-vkDestroyQueryPool-queryPool-00794
  If `VkAllocationCallbacks` were provided when `queryPool` was created, a compatible set of callbacks **must** be provided here
- VUID-vkDestroyQueryPool-queryPool-00795
  If no `VkAllocationCallbacks` were provided when `queryPool` was created, `pAllocator` **must** be `NULL`

NOTE

Applications **can** verify that `queryPool` **can** be destroyed by checking that `vkGetQueryPoolResults`() without the `VK_QUERY_RESULT_PARTIAL_BIT` flag returns `VK_SUCCESS` for all queries that are used in command buffers submitted for execution.

Valid Usage (Implicit)

- VUID-vkDestroyQueryPool-device-parameter
  `device` **must** be a valid VkDevice handle
- VUID-vkDestroyQueryPool-queryPool-parameter
  If `queryPool` is not VK_NULL_HANDLE, `queryPool` **must** be a valid VkQueryPool handle
- VUID-vkDestroyQueryPool-pAllocator-parameter
  If `pAllocator` is not `NULL`, `pAllocator` **must** be a valid pointer to a valid VkAllocationCallbacks structure
- VUID-vkDestroyQueryPool-queryPool-parent
  If `queryPool` is a valid handle, it **must** have been created, allocated, or retrieved from `device`

Host Synchronization

- Host access to `queryPool` **must** be externally synchronized

Possible values of VkQueryPoolCreateInfo::`queryType`, specifying the type of queries managed by the pool, are:

```
// Provided by VK_VERSION_1_0
typedef enum VkQueryType {
    VK_QUERY_TYPE_OCCLUSION = 0,
    VK_QUERY_TYPE_PIPELINE_STATISTICS = 1,
    VK_QUERY_TYPE_TIMESTAMP = 2,
} VkQueryType;
```

- `VK_QUERY_TYPE_OCCLUSION` specifies an occlusion query.
- `VK_QUERY_TYPE_PIPELINE_STATISTICS` specifies a pipeline statistics query.
- `VK_QUERY_TYPE_TIMESTAMP` specifies a timestamp query.

17.2. Query Operation

The operation of queries is controlled by the commands vkCmdBeginQuery, vkCmdEndQuery, vkCmdResetQueryPool, vkCmdCopyQueryPoolResults, vkCmdWriteTimestamp2, and vkCmdWriteTimestamp.

In order for a `VkCommandBuffer` to record query management commands, the queue family for which its `VkCommandPool` was created **must** support the appropriate type of operations (graphics, compute) suitable for the query type of a given query pool.

Each query in a query pool has a status that is either *unavailable* or *available*, and also has state to store the numerical results of a query operation of the type requested when the query pool was created. Resetting a query via vkCmdResetQueryPool or vkResetQueryPool sets the status to unavailable and makes the numerical results undefined. A query is made available by the operation of vkCmdEndQuery, vkCmdWriteTimestamp2, or vkCmdWriteTimestamp. Both the availability status and numerical results **can** be retrieved by calling either vkGetQueryPoolResults or vkCmdCopyQueryPoolResults.

After query pool creation, each query is in an uninitialized state and **must** be reset before it is used. Queries **must** also be reset between uses.

If a logical device includes multiple physical devices, then each command that writes a query **must** execute on a single physical device, and any call to vkCmdBeginQuery **must** execute the corresponding vkCmdEndQuery command on the same physical device.

To reset a range of queries in a query pool on a queue, call:

```
// Provided by VK_VERSION_1_0
void vkCmdResetQueryPool(
    VkCommandBuffer                             commandBuffer,
    VkQueryPool                                 queryPool,
    uint32_t                                    firstQuery,
    uint32_t                                    queryCount);
```

- `commandBuffer` is the command buffer into which this command will be recorded.

- `queryPool` is the handle of the query pool managing the queries being reset.
- `firstQuery` is the initial query index to reset.
- `queryCount` is the number of queries to reset.

When executed on a queue, this command sets the status of query indices [`firstQuery`, `firstQuery` + `queryCount` - 1] to unavailable.

This command defines an execution dependency between other query commands that reference the same query.

The first synchronization scope includes all commands which reference the queries in `queryPool` indicated by `firstQuery` and `queryCount` that occur earlier in submission order.

The second synchronization scope includes all commands which reference the queries in `queryPool` indicated by `firstQuery` and `queryCount` that occur later in submission order.

The operation of this command happens after the first scope and happens before the second scope.

Valid Usage

- VUID-vkCmdResetQueryPool-firstQuery-09436
  `firstQuery` **must** be less than the number of queries in `queryPool`
- VUID-vkCmdResetQueryPool-firstQuery-09437
  The sum of `firstQuery` and `queryCount` **must** be less than or equal to the number of queries in `queryPool`
- VUID-vkCmdResetQueryPool-None-02841
  All queries used by the command **must** not be active

Valid Usage (Implicit)

- VUID-vkCmdResetQueryPool-commandBuffer-parameter
  `commandBuffer` **must** be a valid VkCommandBuffer handle
- VUID-vkCmdResetQueryPool-queryPool-parameter
  `queryPool` **must** be a valid VkQueryPool handle
- VUID-vkCmdResetQueryPool-commandBuffer-recording
  `commandBuffer` **must** be in the recording state
- VUID-vkCmdResetQueryPool-commandBuffer-cmdpool
  The `VkCommandPool` that `commandBuffer` was allocated from **must** support graphics, or compute operations
- VUID-vkCmdResetQueryPool-renderpass
  This command **must** only be called outside of a render pass instance
- VUID-vkCmdResetQueryPool-commonparent
  Both of `commandBuffer`, and `queryPool` **must** have been created, allocated, or retrieved from the same VkDevice

Host Synchronization

- Host access to `commandBuffer` **must** be externally synchronized
- Host access to the `VkCommandPool` that `commandBuffer` was allocated from **must** be externally synchronized

Command Properties

Command Buffer Levels	Render Pass Scope	Supported Queue Types	Command Type
Primary Secondary	Outside	Graphics Compute	Action

To reset a range of queries in a query pool on the host, call:

```
// Provided by VK_VERSION_1_2
void vkResetQueryPool(
    VkDevice                                    device,
    VkQueryPool                                 queryPool,
    uint32_t                                    firstQuery,
    uint32_t                                    queryCount);
```

- `device` is the logical device that owns the query pool.
- `queryPool` is the handle of the query pool managing the queries being reset.
- `firstQuery` is the initial query index to reset.
- `queryCount` is the number of queries to reset.

This command sets the status of query indices [`firstQuery`, `firstQuery` + `queryCount` - 1] to unavailable.

Valid Usage

- VUID-vkResetQueryPool-firstQuery-09436
  `firstQuery` **must** be less than the number of queries in `queryPool`
- VUID-vkResetQueryPool-firstQuery-09437
  The sum of `firstQuery` and `queryCount` **must** be less than or equal to the number of queries in `queryPool`
- VUID-vkResetQueryPool-None-02665
  The `hostQueryReset` feature **must** be enabled
- VUID-vkResetQueryPool-firstQuery-02741
  Submitted commands that refer to the range specified by `firstQuery` and `queryCount` in

`queryPool` **must** have completed execution

- VUID-vkResetQueryPool-firstQuery-02742
  The range of queries specified by `firstQuery` and `queryCount` in `queryPool` **must** not be in use by calls to vkGetQueryPoolResults or `vkResetQueryPool` in other threads

Valid Usage (Implicit)

- VUID-vkResetQueryPool-device-parameter
  `device` **must** be a valid VkDevice handle
- VUID-vkResetQueryPool-queryPool-parameter
  `queryPool` **must** be a valid VkQueryPool handle
- VUID-vkResetQueryPool-queryPool-parent
  `queryPool` **must** have been created, allocated, or retrieved from `device`

Once queries are reset and ready for use, query commands **can** be issued to a command buffer. Occlusion queries and pipeline statistics queries count events - drawn samples and pipeline stage invocations, respectively - resulting from commands that are recorded between a vkCmdBeginQuery command and a vkCmdEndQuery command within a specified command buffer, effectively scoping a set of drawing and/or dispatching commands. Timestamp queries write timestamps to a query pool.

A query **must** begin and end in the same command buffer, although if it is a primary command buffer, and the `inheritedQueries` feature is enabled, it **can** execute secondary command buffers during the query operation. For a secondary command buffer to be executed while a query is active, it **must** set the `occlusionQueryEnable`, `queryFlags`, and/or `pipelineStatistics` members of VkCommandBufferInheritanceInfo to conservative values, as described in the Command Buffer Recording section. A query **must** either begin and end inside the same subpass of a render pass instance, or **must** both begin and end outside of a render pass instance (i.e. contain entire render pass instances).

If queries are used while executing a render pass instance that has multiview enabled, the query uses N consecutive query indices in the query pool (starting at `query`) where N is the number of bits set in the view mask in the subpass the query is used in. How the numerical results of the query are distributed among the queries is implementation-dependent. For example, some implementations **may** write each view's results to a distinct query, while other implementations **may** write the total result to the first query and write zero to the other queries. However, the sum of the results in all the queries **must** accurately reflect the total result of the query summed over all views. Applications **can** sum the results from all the queries to compute the total result.

Queries used with multiview rendering **must** not span subpasses, i.e. they **must** begin and end in the same subpass.

To begin a query, call:

```
// Provided by VK_VERSION_1_0
void vkCmdBeginQuery(
    VkCommandBuffer                             commandBuffer,
    VkQueryPool                                 queryPool,
    uint32_t                                    query,
    VkQueryControlFlags                         flags);
```

- `commandBuffer` is the command buffer into which this command will be recorded.
- `queryPool` is the query pool that will manage the results of the query.
- `query` is the query index within the query pool that will contain the results.
- `flags` is a bitmask of VkQueryControlFlagBits specifying constraints on the types of queries that **can** be performed.

If the `queryType` of the pool is `VK_QUERY_TYPE_OCCLUSION` and `flags` contains `VK_QUERY_CONTROL_PRECISE_BIT`, an implementation **must** return a result that matches the actual number of samples passed. This is described in more detail in Occlusion Queries.

After beginning a query, that query is considered *active* within the command buffer it was called in until that same query is ended. Queries active in a primary command buffer when secondary command buffers are executed are considered active for those secondary command buffers.

This command defines an execution dependency between other query commands that reference the same query.

The first synchronization scope includes all commands which reference the queries in `queryPool` indicated by `query` that occur earlier in submission order.

The second synchronization scope includes all commands which reference the queries in `queryPool` indicated by `query` that occur later in submission order.

The operation of this command happens after the first scope and happens before the second scope.

Valid Usage

- VUID-vkCmdBeginQuery-None-00807
  All queries used by the command **must** be *unavailable*
- VUID-vkCmdBeginQuery-queryType-02804
  The `queryType` used to create `queryPool` **must** not be `VK_QUERY_TYPE_TIMESTAMP`
- VUID-vkCmdBeginQuery-queryType-00800
  If the `occlusionQueryPrecise` feature is not enabled, or the `queryType` used to create `queryPool` was not `VK_QUERY_TYPE_OCCLUSION`, `flags` **must** not contain `VK_QUERY_CONTROL_PRECISE_BIT`
- VUID-vkCmdBeginQuery-query-00802
  `query` **must** be less than the number of queries in `queryPool`
- VUID-vkCmdBeginQuery-queryType-00803

If the queryType used to create queryPool was VK_QUERY_TYPE_OCCLUSION, the VkCommandPool that commandBuffer was allocated from **must** support graphics operations

- VUID-vkCmdBeginQuery-queryType-00804
  If the queryType used to create queryPool was VK_QUERY_TYPE_PIPELINE_STATISTICS and any of the pipelineStatistics indicate graphics operations, the VkCommandPool that commandBuffer was allocated from **must** support graphics operations
- VUID-vkCmdBeginQuery-queryType-00805
  If the queryType used to create queryPool was VK_QUERY_TYPE_PIPELINE_STATISTICS and any of the pipelineStatistics indicate compute operations, the VkCommandPool that commandBuffer was allocated from **must** support compute operations
- VUID-vkCmdBeginQuery-commandBuffer-01885
  commandBuffer **must** not be a protected command buffer
- VUID-vkCmdBeginQuery-query-00808
  If called within a render pass instance, the sum of query and the number of bits set in the current subpass's view mask **must** be less than or equal to the number of queries in queryPool
- VUID-vkCmdBeginQuery-queryPool-01922
  queryPool **must** have been created with a queryType that differs from that of any queries that are active within commandBuffer

Valid Usage (Implicit)

- VUID-vkCmdBeginQuery-commandBuffer-parameter
  commandBuffer **must** be a valid VkCommandBuffer handle
- VUID-vkCmdBeginQuery-queryPool-parameter
  queryPool **must** be a valid VkQueryPool handle
- VUID-vkCmdBeginQuery-flags-parameter
  flags **must** be a valid combination of VkQueryControlFlagBits values
- VUID-vkCmdBeginQuery-commandBuffer-recording
  commandBuffer **must** be in the recording state
- VUID-vkCmdBeginQuery-commandBuffer-cmdpool
  The VkCommandPool that commandBuffer was allocated from **must** support graphics, or compute operations
- VUID-vkCmdBeginQuery-commonparent
  Both of commandBuffer, and queryPool **must** have been created, allocated, or retrieved from the same VkDevice

Host Synchronization

- Host access to commandBuffer **must** be externally synchronized
- Host access to the VkCommandPool that commandBuffer was allocated from **must** be externally

synchronized

Command Properties

Command Buffer Levels	Render Pass Scope	Supported Queue Types	Command Type
Primary Secondary	Both	Graphics Compute	Action State

Bits which **can** be set in vkCmdBeginQuery::`flags`, specifying constraints on the types of queries that **can** be performed, are:

```
// Provided by VK_VERSION_1_0
typedef enum VkQueryControlFlagBits {
    VK_QUERY_CONTROL_PRECISE_BIT = 0x00000001,
} VkQueryControlFlagBits;
```

- `VK_QUERY_CONTROL_PRECISE_BIT` specifies the precision of occlusion queries.

```
// Provided by VK_VERSION_1_0
typedef VkFlags VkQueryControlFlags;
```

`VkQueryControlFlags` is a bitmask type for setting a mask of zero or more VkQueryControlFlagBits.

To end a query after the set of desired drawing or dispatching commands is executed, call:

```
// Provided by VK_VERSION_1_0
void vkCmdEndQuery(
    VkCommandBuffer                             commandBuffer,
    VkQueryPool                                 queryPool,
    uint32_t                                    query);
```

- `commandBuffer` is the command buffer into which this command will be recorded.
- `queryPool` is the query pool that is managing the results of the query.
- `query` is the query index within the query pool where the result is stored.

The command completes the query in `queryPool` identified by `query`, and marks it as available.

This command defines an execution dependency between other query commands that reference the same query.

The first synchronization scope includes all commands which reference the queries in `queryPool` indicated by `query` that occur earlier in submission order.

The second synchronization scope includes only the operation of this command.

Valid Usage

- VUID-vkCmdEndQuery-None-01923
  All queries used by the command **must** be active
- VUID-vkCmdEndQuery-query-00810
  `query` **must** be less than the number of queries in `queryPool`
- VUID-vkCmdEndQuery-commandBuffer-01886
  `commandBuffer` **must** not be a protected command buffer
- VUID-vkCmdEndQuery-query-00812
  If `vkCmdEndQuery` is called within a render pass instance, the sum of `query` and the number of bits set in the current subpass's view mask **must** be less than or equal to the number of queries in `queryPool`
- VUID-vkCmdEndQuery-None-07007
  If called within a subpass of a render pass instance, the corresponding `vkCmdBeginQuery`* command **must** have been called previously within the same subpass

Valid Usage (Implicit)

- VUID-vkCmdEndQuery-commandBuffer-parameter
  `commandBuffer` **must** be a valid VkCommandBuffer handle
- VUID-vkCmdEndQuery-queryPool-parameter
  `queryPool` **must** be a valid VkQueryPool handle
- VUID-vkCmdEndQuery-commandBuffer-recording
  `commandBuffer` **must** be in the recording state
- VUID-vkCmdEndQuery-commandBuffer-cmdpool
  The `VkCommandPool` that `commandBuffer` was allocated from **must** support graphics, or compute operations
- VUID-vkCmdEndQuery-commonparent
  Both of `commandBuffer`, and `queryPool` **must** have been created, allocated, or retrieved from the same VkDevice

Host Synchronization

- Host access to `commandBuffer` **must** be externally synchronized
- Host access to the `VkCommandPool` that `commandBuffer` was allocated from **must** be externally synchronized

Command Properties

Command Buffer Levels	Render Pass Scope	Supported Queue Types	Command Type
Primary Secondary	Both	Graphics Compute	Action State

An application **can** retrieve results either by requesting they be written into application-provided memory, or by requesting they be copied into a `VkBuffer`. In either case, the layout in memory is defined as follows:

- The first query's result is written starting at the first byte requested by the command, and each subsequent query's result begins `stride` bytes later.
- Occlusion queries, pipeline statistics queries, and timestamp queries store results in a tightly packed array of unsigned integers, either 32- or 64-bits as requested by the command, storing the numerical results and, if requested, the availability status.
- If `VK_QUERY_RESULT_WITH_AVAILABILITY_BIT` is used, the final element of each query's result is an integer indicating whether the query's result is available, with any non-zero value indicating that it is available.
- Occlusion queries write one integer value - the number of samples passed. Pipeline statistics queries write one integer value for each bit that is enabled in the `pipelineStatistics` when the pool is created, and the statistics values are written in bit order starting from the least significant bit. Timestamp queries write one integer value.
- If more than one query is retrieved and `stride` is not at least as large as the size of the array of values corresponding to a single query, the values written to memory are undefined.

To retrieve status and results for a set of queries, call:

```
// Provided by VK_VERSION_1_0
VkResult vkGetQueryPoolResults(
    VkDevice                                    device,
    VkQueryPool                                 queryPool,
    uint32_t                                    firstQuery,
    uint32_t                                    queryCount,
    size_t                                      dataSize,
    void*                                       pData,
    VkDeviceSize                                stride,
    VkQueryResultFlags                          flags);
```

- `device` is the logical device that owns the query pool.
- `queryPool` is the query pool managing the queries containing the desired results.
- `firstQuery` is the initial query index.
- `queryCount` is the number of queries to read.

- `dataSize` is the size in bytes of the buffer pointed to by `pData`.
- `pData` is a pointer to an application-allocated buffer where the results will be written
- `stride` is the stride in bytes between results for individual queries within `pData`.
- `flags` is a bitmask of VkQueryResultFlagBits specifying how and when results are returned.

Any results written for a query are written according to a layout dependent on the query type.

If no bits are set in `flags`, and all requested queries are in the available state, results are written as an array of 32-bit unsigned integer values. Behavior when not all queries are available is described below.

If `VK_QUERY_RESULT_WITH_AVAILABILITY_BIT` is set, results for all queries in `queryPool` identified by `firstQuery` and `queryCount` are copied to `pData`, along with an extra availability value written directly after the results of each query and interpreted as an unsigned integer. A value of zero indicates that the results are not yet available, otherwise the query is complete and results are available. The size of the availability values is 64 bits if `VK_QUERY_RESULT_64_BIT` is set in `flags`. Otherwise, it is 32 bits.

NOTE

If `VK_QUERY_RESULT_WITH_AVAILABILITY_BIT` is set, the layout of data in the buffer is a *(result,availability)* pair for each query returned, and `stride` is the stride between each pair.

Results for any available query written by this command are final and represent the final result of the query. If `VK_QUERY_RESULT_PARTIAL_BIT` is set, then for any query that is unavailable, an intermediate result between zero and the final result value is written for that query. Otherwise, any result written by this command is undefined.

If `VK_QUERY_RESULT_64_BIT` is set, results and, if returned, availability values for all queries are written as an array of 64-bit values. Otherwise, results and availability values are written as an array of 32-bit values. If an unsigned integer query's value overflows the result type, the value **may** either wrap or saturate.

If `VK_QUERY_RESULT_WAIT_BIT` is set, this command defines an execution dependency with any earlier commands that writes one of the identified queries. The first synchronization scope includes all instances of vkCmdEndQuery, vkCmdWriteTimestamp2, and vkCmdWriteTimestamp that reference any query in `queryPool` indicated by `firstQuery` and `queryCount`. The second synchronization scope includes the host operations of this command.

If `VK_QUERY_RESULT_WAIT_BIT` is not set, `vkGetQueryPoolResults` **may** return `VK_NOT_READY` if there are queries in the unavailable state.

NOTE

Applications **must** take care to ensure that use of the `VK_QUERY_RESULT_WAIT_BIT` bit has the desired effect.

For example, if a query has been used previously and a command buffer records the commands `vkCmdResetQueryPool`, `vkCmdBeginQuery`, and `vkCmdEndQuery` for that query, then the query will remain in the available state until `vkResetQueryPool` is called or the `vkCmdResetQueryPool` command executes on a queue. Applications **can**

use fences or events to ensure that a query has already been reset before checking for its results or availability status. Otherwise, a stale value could be returned from a previous use of the query.

The above also applies when VK_QUERY_RESULT_WAIT_BIT is used in combination with VK_QUERY_RESULT_WITH_AVAILABILITY_BIT. In this case, the returned availability status **may** reflect the result of a previous use of the query unless vkResetQueryPool is called or the vkCmdResetQueryPool command has been executed since the last use of the query.

NOTE Applications **can** double-buffer query pool usage, with a pool per frame, and reset queries at the end of the frame in which they are read.

Valid Usage

- VUID-vkGetQueryPoolResults-firstQuery-09436
  firstQuery **must** be less than the number of queries in queryPool
- VUID-vkGetQueryPoolResults-firstQuery-09437
  The sum of firstQuery and queryCount **must** be less than or equal to the number of queries in queryPool
- VUID-vkGetQueryPoolResults-queryCount-09438
  If queryCount is greater than 1, stride **must** not be zero
- VUID-vkGetQueryPoolResults-queryType-09439
  If the queryType used to create queryPool was VK_QUERY_TYPE_TIMESTAMP, flags **must** not contain VK_QUERY_RESULT_PARTIAL_BIT
- VUID-vkGetQueryPoolResults-None-09401
  All queries used by the command **must** not be uninitialized
- VUID-vkGetQueryPoolResults-flags-02828
  If VK_QUERY_RESULT_64_BIT is not set in flags then pData and stride **must** be multiples of 4
- VUID-vkGetQueryPoolResults-flags-00815
  If VK_QUERY_RESULT_64_BIT is set in flags then pData and stride **must** be multiples of 8
- VUID-vkGetQueryPoolResults-stride-08993
  If VK_QUERY_RESULT_WITH_AVAILABILITY_BIT is set, stride **must** be large enough to contain the unsigned integer representing availability in addition to the query result
- VUID-vkGetQueryPoolResults-dataSize-00817
  dataSize **must** be large enough to contain the result of each query, as described here

Valid Usage (Implicit)

- VUID-vkGetQueryPoolResults-device-parameter
  device **must** be a valid VkDevice handle
- VUID-vkGetQueryPoolResults-queryPool-parameter

`queryPool` **must** be a valid VkQueryPool handle

- VUID-vkGetQueryPoolResults-pData-parameter
  `pData` **must** be a valid pointer to an array of `dataSize` bytes
- VUID-vkGetQueryPoolResults-flags-parameter
  `flags` **must** be a valid combination of VkQueryResultFlagBits values
- VUID-vkGetQueryPoolResults-dataSize-arraylength
  `dataSize` **must** be greater than `0`
- VUID-vkGetQueryPoolResults-queryPool-parent
  `queryPool` **must** have been created, allocated, or retrieved from `device`

Return Codes

Success

- `VK_SUCCESS`
- `VK_NOT_READY`

Failure

- `VK_ERROR_OUT_OF_HOST_MEMORY`
- `VK_ERROR_OUT_OF_DEVICE_MEMORY`
- `VK_ERROR_DEVICE_LOST`

Bits which **can** be set in vkGetQueryPoolResults::`flags` and vkCmdCopyQueryPoolResults::`flags`, specifying how and when results are returned, are:

```
// Provided by VK_VERSION_1_0
typedef enum VkQueryResultFlagBits {
    VK_QUERY_RESULT_64_BIT = 0x00000001,
    VK_QUERY_RESULT_WAIT_BIT = 0x00000002,
    VK_QUERY_RESULT_WITH_AVAILABILITY_BIT = 0x00000004,
    VK_QUERY_RESULT_PARTIAL_BIT = 0x00000008,
} VkQueryResultFlagBits;
```

- `VK_QUERY_RESULT_64_BIT` specifies the results will be written as an array of 64-bit unsigned integer values. If this bit is not set, the results will be written as an array of 32-bit unsigned integer values.
- `VK_QUERY_RESULT_WAIT_BIT` specifies that Vulkan will wait for each query's status to become available before retrieving its results.
- `VK_QUERY_RESULT_WITH_AVAILABILITY_BIT` specifies that the availability status accompanies the results.
- `VK_QUERY_RESULT_PARTIAL_BIT` specifies that returning partial results is acceptable.

```
// Provided by VK_VERSION_1_0
typedef VkFlags VkQueryResultFlags;
```

VkQueryResultFlags is a bitmask type for setting a mask of zero or more VkQueryResultFlagBits.

To copy query statuses and numerical results directly to buffer memory, call:

```
// Provided by VK_VERSION_1_0
void vkCmdCopyQueryPoolResults(
    VkCommandBuffer                             commandBuffer,
    VkQueryPool                                 queryPool,
    uint32_t                                    firstQuery,
    uint32_t                                    queryCount,
    VkBuffer                                    dstBuffer,
    VkDeviceSize                                dstOffset,
    VkDeviceSize                                stride,
    VkQueryResultFlags                          flags);
```

- commandBuffer is the command buffer into which this command will be recorded.
- queryPool is the query pool managing the queries containing the desired results.
- firstQuery is the initial query index.
- queryCount is the number of queries. firstQuery and queryCount together define a range of queries.
- dstBuffer is a VkBuffer object that will receive the results of the copy command.
- dstOffset is an offset into dstBuffer.
- stride is the stride in bytes between results for individual queries within dstBuffer. The required size of the backing memory for dstBuffer is determined as described above for vkGetQueryPoolResults.
- flags is a bitmask of VkQueryResultFlagBits specifying how and when results are returned.

Any results written for a query are written according to a layout dependent on the query type.

Results for any query in queryPool identified by firstQuery and queryCount that is available are copied to dstBuffer.

If VK_QUERY_RESULT_WITH_AVAILABILITY_BIT is set, results for all queries in queryPool identified by firstQuery and queryCount are copied to dstBuffer, along with an extra availability value written directly after the results of each query and interpreted as an unsigned integer. A value of zero indicates that the results are not yet available, otherwise the query is complete and results are available.

Results for any available query written by this command are final and represent the final result of the query. If VK_QUERY_RESULT_PARTIAL_BIT is set, then for any query that is unavailable, an intermediate result between zero and the final result value is written for that query. Otherwise, any result written by this command is undefined.

If VK_QUERY_RESULT_64_BIT is set, results and availability values for all queries are written as an array of 64-bit values. Otherwise, results and availability values are written as an array of 32-bit values. If an unsigned integer query's value overflows the result type, the value **may** either wrap or saturate.

This command defines an execution dependency between other query commands that reference the same query.

The first synchronization scope includes all commands which reference the queries in queryPool indicated by query that occur earlier in submission order. If flags does not include VK_QUERY_RESULT_WAIT_BIT, vkCmdWriteTimestamp2, vkCmdEndQuery, and vkCmdWriteTimestamp are excluded from this scope.

The second synchronization scope includes all commands which reference the queries in queryPool indicated by query that occur later in submission order.

The operation of this command happens after the first scope and happens before the second scope.

vkCmdCopyQueryPoolResults is considered to be a transfer operation, and its writes to buffer memory **must** be synchronized using VK_PIPELINE_STAGE_TRANSFER_BIT and VK_ACCESS_TRANSFER_WRITE_BIT before using the results.

Valid Usage

- VUID-vkCmdCopyQueryPoolResults-firstQuery-09436
  firstQuery **must** be less than the number of queries in queryPool
- VUID-vkCmdCopyQueryPoolResults-firstQuery-09437
  The sum of firstQuery and queryCount **must** be less than or equal to the number of queries in queryPool
- VUID-vkCmdCopyQueryPoolResults-queryCount-09438
  If queryCount is greater than 1, stride **must** not be zero
- VUID-vkCmdCopyQueryPoolResults-queryType-09439
  If the queryType used to create queryPool was VK_QUERY_TYPE_TIMESTAMP, flags **must** not contain VK_QUERY_RESULT_PARTIAL_BIT
- VUID-vkCmdCopyQueryPoolResults-None-09402
  All queries used by the command **must** not be uninitialized when the command is executed
- VUID-vkCmdCopyQueryPoolResults-dstOffset-00819
  dstOffset **must** be less than the size of dstBuffer
- VUID-vkCmdCopyQueryPoolResults-flags-00822
  If VK_QUERY_RESULT_64_BIT is not set in flags then dstOffset and stride **must** be multiples of 4
- VUID-vkCmdCopyQueryPoolResults-flags-00823
  If VK_QUERY_RESULT_64_BIT is set in flags then dstOffset and stride **must** be multiples of 8
- VUID-vkCmdCopyQueryPoolResults-dstBuffer-00824

`dstBuffer` **must** have enough storage, from `dstOffset`, to contain the result of each query, as described here

- VUID-vkCmdCopyQueryPoolResults-dstBuffer-00825
  `dstBuffer` **must** have been created with `VK_BUFFER_USAGE_TRANSFER_DST_BIT` usage flag
- VUID-vkCmdCopyQueryPoolResults-dstBuffer-00826
  If `dstBuffer` is non-sparse then it **must** be bound completely and contiguously to a single `VkDeviceMemory` object
- VUID-vkCmdCopyQueryPoolResults-None-07429
  All queries used by the command **must** not be active
- VUID-vkCmdCopyQueryPoolResults-None-08752
  All queries used by the command **must** have been made *available* by prior executed commands

Valid Usage (Implicit)

- VUID-vkCmdCopyQueryPoolResults-commandBuffer-parameter
  `commandBuffer` **must** be a valid VkCommandBuffer handle
- VUID-vkCmdCopyQueryPoolResults-queryPool-parameter
  `queryPool` **must** be a valid VkQueryPool handle
- VUID-vkCmdCopyQueryPoolResults-dstBuffer-parameter
  `dstBuffer` **must** be a valid VkBuffer handle
- VUID-vkCmdCopyQueryPoolResults-flags-parameter
  `flags` **must** be a valid combination of VkQueryResultFlagBits values
- VUID-vkCmdCopyQueryPoolResults-commandBuffer-recording
  `commandBuffer` **must** be in the recording state
- VUID-vkCmdCopyQueryPoolResults-commandBuffer-cmdpool
  The `VkCommandPool` that `commandBuffer` was allocated from **must** support graphics, or compute operations
- VUID-vkCmdCopyQueryPoolResults-renderpass
  This command **must** only be called outside of a render pass instance
- VUID-vkCmdCopyQueryPoolResults-commonparent
  Each of `commandBuffer`, `dstBuffer`, and `queryPool` **must** have been created, allocated, or retrieved from the same VkDevice

Host Synchronization

- Host access to `commandBuffer` **must** be externally synchronized
- Host access to the `VkCommandPool` that `commandBuffer` was allocated from **must** be externally synchronized

Command Properties

Command Buffer Levels	Render Pass Scope	Supported Queue Types	Command Type
Primary Secondary	Outside	Graphics Compute	Action

Rendering operations such as clears, MSAA resolves, attachment load/store operations, and blits **may** count towards the results of queries. This behavior is implementation-dependent and **may** vary depending on the path used within an implementation. For example, some implementations have several types of clears, some of which **may** include vertices and some not.

17.3. Occlusion Queries

Occlusion queries track the number of samples that pass the per-fragment tests for a set of drawing commands. As such, occlusion queries are only available on queue families supporting graphics operations. The application **can** then use these results to inform future rendering decisions. An occlusion query is begun and ended by calling `vkCmdBeginQuery` and `vkCmdEndQuery`, respectively. When an occlusion query begins, the count of passing samples always starts at zero. For each drawing command, the count is incremented as described in Sample Counting. If `flags` does not contain `VK_QUERY_CONTROL_PRECISE_BIT` an implementation **may** generate any non-zero result value for the query if the count of passing samples is non-zero.

NOTE

Not setting `VK_QUERY_CONTROL_PRECISE_BIT` mode **may** be more efficient on some implementations, and **should** be used where it is sufficient to know a boolean result on whether any samples passed the per-fragment tests. In this case, some implementations **may** only return zero or one, indifferent to the actual number of samples passing the per-fragment tests.

Setting `VK_QUERY_CONTROL_PRECISE_BIT` does not guarantee that different implementations return the same number of samples in an occlusion query. Some implementations may kill fragments in the pre-rasterization shader stage, and these killed fragments do not contribute to the final result of the query. It is possible that some implementations generate a zero result value for the query, while others generate a non-zero value.

When an occlusion query finishes, the result for that query is marked as available. The application **can** then either copy the result to a buffer (via `vkCmdCopyQueryPoolResults`) or request it be put into host memory (via `vkGetQueryPoolResults`).

NOTE

If occluding geometry is not drawn first, samples **can** pass the depth test, but still not be visible in a final image.

17.4. Pipeline Statistics Queries

Pipeline statistics queries allow the application to sample a specified set of VkPipeline counters. These counters are accumulated by Vulkan for a set of either drawing or dispatching commands while a pipeline statistics query is active. As such, pipeline statistics queries are available on queue families supporting either graphics or compute operations. The availability of pipeline statistics queries is indicated by the pipelineStatisticsQuery member of the VkPhysicalDeviceFeatures object (see vkGetPhysicalDeviceFeatures and vkCreateDevice for detecting and requesting this query type on a VkDevice).

A pipeline statistics query is begun and ended by calling vkCmdBeginQuery and vkCmdEndQuery, respectively. When a pipeline statistics query begins, all statistics counters are set to zero. While the query is active, the pipeline type determines which set of statistics are available, but these **must** be configured on the query pool when it is created. If a statistic counter is issued on a command buffer that does not support the corresponding operation, or the counter corresponds to a shading stage which is missing from any of the pipelines used while the query is active, the value of that counter is undefined after the query has been made available. At least one statistic counter relevant to the operations supported on the recording command buffer **must** be enabled.

Bits which **can** be set in VkQueryPoolCreateInfo::pipelineStatistics for query pools and in VkCommandBufferInheritanceInfo::pipelineStatistics for secondary command buffers, individually enabling pipeline statistics counters, are:

```
// Provided by VK_VERSION_1_0
typedef enum VkQueryPipelineStatisticFlagBits {
    VK_QUERY_PIPELINE_STATISTIC_INPUT_ASSEMBLY_VERTICES_BIT = 0x00000001,
    VK_QUERY_PIPELINE_STATISTIC_INPUT_ASSEMBLY_PRIMITIVES_BIT = 0x00000002,
    VK_QUERY_PIPELINE_STATISTIC_VERTEX_SHADER_INVOCATIONS_BIT = 0x00000004,
    VK_QUERY_PIPELINE_STATISTIC_GEOMETRY_SHADER_INVOCATIONS_BIT = 0x00000008,
    VK_QUERY_PIPELINE_STATISTIC_GEOMETRY_SHADER_PRIMITIVES_BIT = 0x00000010,
    VK_QUERY_PIPELINE_STATISTIC_CLIPPING_INVOCATIONS_BIT = 0x00000020,
    VK_QUERY_PIPELINE_STATISTIC_CLIPPING_PRIMITIVES_BIT = 0x00000040,
    VK_QUERY_PIPELINE_STATISTIC_FRAGMENT_SHADER_INVOCATIONS_BIT = 0x00000080,
    VK_QUERY_PIPELINE_STATISTIC_TESSELLATION_CONTROL_SHADER_PATCHES_BIT = 0x00000100,
    VK_QUERY_PIPELINE_STATISTIC_TESSELLATION_EVALUATION_SHADER_INVOCATIONS_BIT =
0x00000200,
    VK_QUERY_PIPELINE_STATISTIC_COMPUTE_SHADER_INVOCATIONS_BIT = 0x00000400,
} VkQueryPipelineStatisticFlagBits;
```

- VK_QUERY_PIPELINE_STATISTIC_INPUT_ASSEMBLY_VERTICES_BIT specifies that queries managed by the pool will count the number of vertices processed by the input assembly stage. Vertices corresponding to incomplete primitives **may** contribute to the count.
- VK_QUERY_PIPELINE_STATISTIC_INPUT_ASSEMBLY_PRIMITIVES_BIT specifies that queries managed by the pool will count the number of primitives processed by the input assembly stage. If primitive restart is enabled, restarting the primitive topology has no effect on the count. Incomplete primitives **may** be counted.
- VK_QUERY_PIPELINE_STATISTIC_VERTEX_SHADER_INVOCATIONS_BIT specifies that queries managed by

the pool will count the number of vertex shader invocations. This counter's value is incremented each time a vertex shader is invoked.

- VK_QUERY_PIPELINE_STATISTIC_GEOMETRY_SHADER_INVOCATIONS_BIT specifies that queries managed by the pool will count the number of geometry shader invocations. This counter's value is incremented each time a geometry shader is invoked. In the case of instanced geometry shaders, the geometry shader invocations count is incremented for each separate instanced invocation.
- VK_QUERY_PIPELINE_STATISTIC_GEOMETRY_SHADER_PRIMITIVES_BIT specifies that queries managed by the pool will count the number of primitives generated by geometry shader invocations. The counter's value is incremented each time the geometry shader emits a primitive. Restarting primitive topology using the SPIR-V instructions OpEndPrimitive or OpEndStreamPrimitive has no effect on the geometry shader output primitives count.
- VK_QUERY_PIPELINE_STATISTIC_CLIPPING_INVOCATIONS_BIT specifies that queries managed by the pool will count the number of primitives processed by the Primitive Clipping stage of the pipeline. The counter's value is incremented each time a primitive reaches the primitive clipping stage.
- VK_QUERY_PIPELINE_STATISTIC_CLIPPING_PRIMITIVES_BIT specifies that queries managed by the pool will count the number of primitives output by the Primitive Clipping stage of the pipeline. The counter's value is incremented each time a primitive passes the primitive clipping stage. The actual number of primitives output by the primitive clipping stage for a particular input primitive is implementation-dependent but **must** satisfy the following conditions:
  - If at least one vertex of the input primitive lies inside the clipping volume, the counter is incremented by one or more.
  - Otherwise, the counter is incremented by zero or more.
- VK_QUERY_PIPELINE_STATISTIC_FRAGMENT_SHADER_INVOCATIONS_BIT specifies that queries managed by the pool will count the number of fragment shader invocations. The counter's value is incremented each time the fragment shader is invoked.
- VK_QUERY_PIPELINE_STATISTIC_TESSELLATION_CONTROL_SHADER_PATCHES_BIT specifies that queries managed by the pool will count the number of patches processed by the tessellation control shader. The counter's value is incremented once for each patch for which a tessellation control shader is invoked.
- VK_QUERY_PIPELINE_STATISTIC_TESSELLATION_EVALUATION_SHADER_INVOCATIONS_BIT specifies that queries managed by the pool will count the number of invocations of the tessellation evaluation shader. The counter's value is incremented each time the tessellation evaluation shader is invoked.
- VK_QUERY_PIPELINE_STATISTIC_COMPUTE_SHADER_INVOCATIONS_BIT specifies that queries managed by the pool will count the number of compute shader invocations. The counter's value is incremented every time the compute shader is invoked. Implementations **may** skip the execution of certain compute shader invocations or execute additional compute shader invocations for implementation-dependent reasons as long as the results of rendering otherwise remain unchanged.

These values are intended to measure relative statistics on one implementation. Various device architectures will count these values differently. Any or all counters **may** be affected by the issues

described in Query Operation.

NOTE	For example, tile-based rendering devices **may** need to replay the scene multiple times, affecting some of the counts.

If a pipeline has `rasterizerDiscardEnable` enabled, implementations **may** discard primitives after the final pre-rasterization shader stage. As a result, if `rasterizerDiscardEnable` is enabled, the clipping input and output primitives counters **may** not be incremented.

When a pipeline statistics query finishes, the result for that query is marked as available. The application **can** copy the result to a buffer (via `vkCmdCopyQueryPoolResults`), or request it be put into host memory (via `vkGetQueryPoolResults`).

```
// Provided by VK_VERSION_1_0
typedef VkFlags VkQueryPipelineStatisticFlags;
```

`VkQueryPipelineStatisticFlags` is a bitmask type for setting a mask of zero or more VkQueryPipelineStatisticFlagBits.

17.5. Timestamp Queries

Timestamps provide applications with a mechanism for timing the execution of commands. A timestamp is an integer value generated by the `VkPhysicalDevice`. Unlike other queries, timestamps do not operate over a range, and so do not use vkCmdBeginQuery or vkCmdEndQuery. The mechanism is built around a set of commands that allow the application to tell the `VkPhysicalDevice` to write timestamp values to a query pool and then either read timestamp values on the host (using vkGetQueryPoolResults) or copy timestamp values to a `VkBuffer` (using vkCmdCopyQueryPoolResults). The application **can** then compute differences between timestamps to determine execution time.

The number of valid bits in a timestamp value is determined by the `VkQueueFamilyProperties` ::`timestampValidBits` property of the queue on which the timestamp is written. Timestamps are supported on any queue which reports a non-zero value for `timestampValidBits` via vkGetPhysicalDeviceQueueFamilyProperties. If the `timestampComputeAndGraphics` limit is `VK_TRUE`, timestamps are supported by every queue family that supports either graphics or compute operations (see VkQueueFamilyProperties).

The number of nanoseconds it takes for a timestamp value to be incremented by 1 **can** be obtained from `VkPhysicalDeviceLimits`::`timestampPeriod` after a call to `vkGetPhysicalDeviceProperties`.

To request a timestamp and write the value to memory, call:

```
// Provided by VK_VERSION_1_3
void vkCmdWriteTimestamp2(
    VkCommandBuffer                             commandBuffer,
    VkPipelineStageFlags2                       stage,
    VkQueryPool                                 queryPool,
    uint32_t                                    query);
```

- `commandBuffer` is the command buffer into which the command will be recorded.
- `stage` specifies a stage of the pipeline.
- `queryPool` is the query pool that will manage the timestamp.
- `query` is the query within the query pool that will contain the timestamp.

When `vkCmdWriteTimestamp2` is submitted to a queue, it defines an execution dependency on commands that were submitted before it, and writes a timestamp to a query pool.

The first synchronization scope includes all commands that occur earlier in submission order. The synchronization scope is limited to operations on the pipeline stage specified by `stage`.

The second synchronization scope includes only the timestamp write operation.

NOTE Implementations may write the timestamp at any stage that is logically later than `stage`.

Any timestamp write that happens-after another timestamp write in the same submission **must** not have a lower value unless its value overflows the maximum supported integer bit width of the query. If an overflow occurs, the timestamp value **must** wrap back to zero.

NOTE Comparisons between timestamps should be done between timestamps where they are guaranteed to not decrease. For example, subtracting an older timestamp from a newer one to determine the execution time of a sequence of commands is only a reliable measurement if the two timestamp writes were performed in the same submission.

If `vkCmdWriteTimestamp2` is called while executing a render pass instance that has multiview enabled, the timestamp uses N consecutive query indices in the query pool (starting at `query`) where N is the number of bits set in the view mask of the subpass the command is executed in. The resulting query values are determined by an implementation-dependent choice of one of the following behaviors:

- The first query is a timestamp value and (if more than one bit is set in the view mask) zero is written to the remaining queries. If two timestamps are written in the same subpass, the sum of the execution time of all views between those commands is the difference between the first query written by each command.
- All N queries are timestamp values. If two timestamps are written in the same subpass, the sum of the execution time of all views between those commands is the sum of the difference between corresponding queries written by each command. The difference between corresponding queries **may** be the execution time of a single view.

In either case, the application **can** sum the differences between all N queries to determine the total execution time.

Valid Usage

- VUID-vkCmdWriteTimestamp2-stage-03929
  If the `geometryShader` feature is not enabled, `stage` **must** not contain `VK_PIPELINE_STAGE_2_GEOMETRY_SHADER_BIT`
- VUID-vkCmdWriteTimestamp2-stage-03930
  If the `tessellationShader` feature is not enabled, `stage` **must** not contain `VK_PIPELINE_STAGE_2_TESSELLATION_CONTROL_SHADER_BIT` or `VK_PIPELINE_STAGE_2_TESSELLATION_EVALUATION_SHADER_BIT`
- VUID-vkCmdWriteTimestamp2-synchronization2-03858
  The `synchronization2` feature **must** be enabled
- VUID-vkCmdWriteTimestamp2-stage-03859
  `stage` **must** only include a single pipeline stage
- VUID-vkCmdWriteTimestamp2-stage-03860
  `stage` **must** only include stages valid for the queue family that was used to create the command pool that `commandBuffer` was allocated from
- VUID-vkCmdWriteTimestamp2-queryPool-03861
  `queryPool` **must** have been created with a `queryType` of `VK_QUERY_TYPE_TIMESTAMP`
- VUID-vkCmdWriteTimestamp2-timestampValidBits-03863
  The command pool's queue family **must** support a non-zero `timestampValidBits`
- VUID-vkCmdWriteTimestamp2-query-04903
  `query` **must** be less than the number of queries in `queryPool`
- VUID-vkCmdWriteTimestamp2-None-03864
  All queries used by the command **must** be *unavailable*
- VUID-vkCmdWriteTimestamp2-query-03865
  If `vkCmdWriteTimestamp2` is called within a render pass instance, the sum of `query` and the number of bits set in the current subpass's view mask **must** be less than or equal to the number of queries in `queryPool`

Valid Usage (Implicit)

- VUID-vkCmdWriteTimestamp2-commandBuffer-parameter
  `commandBuffer` **must** be a valid VkCommandBuffer handle
- VUID-vkCmdWriteTimestamp2-stage-parameter
  `stage` **must** be a valid combination of VkPipelineStageFlagBits2 values
- VUID-vkCmdWriteTimestamp2-queryPool-parameter
  `queryPool` **must** be a valid VkQueryPool handle
- VUID-vkCmdWriteTimestamp2-commandBuffer-recording
  `commandBuffer` **must** be in the recording state

- VUID-vkCmdWriteTimestamp2-commandBuffer-cmdpool
  The `VkCommandPool` that `commandBuffer` was allocated from **must** support transfer, graphics, or compute operations
- VUID-vkCmdWriteTimestamp2-commonparent
  Both of `commandBuffer`, and `queryPool` **must** have been created, allocated, or retrieved from the same VkDevice

Host Synchronization

- Host access to `commandBuffer` **must** be externally synchronized
- Host access to the `VkCommandPool` that `commandBuffer` was allocated from **must** be externally synchronized

Command Properties

Command Buffer Levels	Render Pass Scope	Supported Queue Types	Command Type
Primary Secondary	Both	Transfer Graphics Compute	Action

To request a timestamp and write the value to memory, call:

```
// Provided by VK_VERSION_1_0
void vkCmdWriteTimestamp(
    VkCommandBuffer                             commandBuffer,
    VkPipelineStageFlagBits                     pipelineStage,
    VkQueryPool                                 queryPool,
    uint32_t                                    query);
```

- `commandBuffer` is the command buffer into which the command will be recorded.
- `pipelineStage` is a VkPipelineStageFlagBits value, specifying a stage of the pipeline.
- `queryPool` is the query pool that will manage the timestamp.
- `query` is the query within the query pool that will contain the timestamp.

When `vkCmdWriteTimestamp` is submitted to a queue, it defines an execution dependency on commands that were submitted before it, and writes a timestamp to a query pool.

The first synchronization scope includes all commands that occur earlier in submission order. The synchronization scope is limited to operations on the pipeline stage specified by `pipelineStage`.

The second synchronization scope includes only the timestamp write operation.

NOTE Implementations may write the timestamp at any stage that is logically later than `stage`.

Any timestamp write that happens-after another timestamp write in the same submission **must** not have a lower value unless its value overflows the maximum supported integer bit width of the query. If an overflow occurs, the timestamp value **must** wrap back to zero.

NOTE Comparisons between timestamps should be done between timestamps where they are guaranteed to not decrease. For example, subtracting an older timestamp from a newer one to determine the execution time of a sequence of commands is only a reliable measurement if the two timestamp writes were performed in the same submission.

If `vkCmdWriteTimestamp` is called while executing a render pass instance that has multiview enabled, the timestamp uses N consecutive query indices in the query pool (starting at `query`) where N is the number of bits set in the view mask of the subpass the command is executed in. The resulting query values are determined by an implementation-dependent choice of one of the following behaviors:

- The first query is a timestamp value and (if more than one bit is set in the view mask) zero is written to the remaining queries. If two timestamps are written in the same subpass, the sum of the execution time of all views between those commands is the difference between the first query written by each command.
- All N queries are timestamp values. If two timestamps are written in the same subpass, the sum of the execution time of all views between those commands is the sum of the difference between corresponding queries written by each command. The difference between corresponding queries **may** be the execution time of a single view.

In either case, the application **can** sum the differences between all N queries to determine the total execution time.

Valid Usage

- VUID-vkCmdWriteTimestamp-pipelineStage-04074
  `pipelineStage` **must** be a valid stage for the queue family that was used to create the command pool that `commandBuffer` was allocated from
- VUID-vkCmdWriteTimestamp-pipelineStage-04075
  If the `geometryShader` feature is not enabled, `pipelineStage` **must** not be `VK_PIPELINE_STAGE_GEOMETRY_SHADER_BIT`
- VUID-vkCmdWriteTimestamp-pipelineStage-04076
  If the `tessellationShader` feature is not enabled, `pipelineStage` **must** not be `VK_PIPELINE_STAGE_TESSELLATION_CONTROL_SHADER_BIT` or `VK_PIPELINE_STAGE_TESSELLATION_EVALUATION_SHADER_BIT`
- VUID-vkCmdWriteTimestamp-synchronization2-06489
  If the `synchronization2` feature is not enabled, `pipelineStage` **must** not be `VK_PIPELINE_STAGE_NONE`
- VUID-vkCmdWriteTimestamp-queryPool-01416

queryPool **must** have been created with a queryType of VK_QUERY_TYPE_TIMESTAMP

- VUID-vkCmdWriteTimestamp-timestampValidBits-00829
  The command pool's queue family **must** support a non-zero timestampValidBits
- VUID-vkCmdWriteTimestamp-query-04904
  query **must** be less than the number of queries in queryPool
- VUID-vkCmdWriteTimestamp-None-00830
  All queries used by the command **must** be *unavailable*
- VUID-vkCmdWriteTimestamp-query-00831
  If vkCmdWriteTimestamp is called within a render pass instance, the sum of query and the number of bits set in the current subpass's view mask **must** be less than or equal to the number of queries in queryPool

Valid Usage (Implicit)

- VUID-vkCmdWriteTimestamp-commandBuffer-parameter
  commandBuffer **must** be a valid VkCommandBuffer handle
- VUID-vkCmdWriteTimestamp-pipelineStage-parameter
  pipelineStage **must** be a valid VkPipelineStageFlagBits value
- VUID-vkCmdWriteTimestamp-queryPool-parameter
  queryPool **must** be a valid VkQueryPool handle
- VUID-vkCmdWriteTimestamp-commandBuffer-recording
  commandBuffer **must** be in the recording state
- VUID-vkCmdWriteTimestamp-commandBuffer-cmdpool
  The VkCommandPool that commandBuffer was allocated from **must** support transfer, graphics, or compute operations
- VUID-vkCmdWriteTimestamp-commonparent
  Both of commandBuffer, and queryPool **must** have been created, allocated, or retrieved from the same VkDevice

Host Synchronization

- Host access to commandBuffer **must** be externally synchronized
- Host access to the VkCommandPool that commandBuffer was allocated from **must** be externally synchronized

Command Properties

Command Buffer Levels	Render Pass Scope	Supported Queue Types	Command Type
Primary Secondary	Both	Transfer Graphics Compute	Action

Chapter 18. Clear Commands

18.1. Clearing Images Outside a Render Pass Instance

Color and depth/stencil images **can** be cleared outside a render pass instance using vkCmdClearColorImage or vkCmdClearDepthStencilImage, respectively. These commands are only allowed outside of a render pass instance.

To clear one or more subranges of a color image, call:

```
// Provided by VK_VERSION_1_0
void vkCmdClearColorImage(
    VkCommandBuffer                             commandBuffer,
    VkImage                                     image,
    VkImageLayout                               imageLayout,
    const VkClearColorValue*                    pColor,
    uint32_t                                    rangeCount,
    const VkImageSubresourceRange*              pRanges);
```

- `commandBuffer` is the command buffer into which the command will be recorded.
- `image` is the image to be cleared.
- `imageLayout` specifies the current layout of the image subresource ranges to be cleared, and **must** be `VK_IMAGE_LAYOUT_GENERAL` or `VK_IMAGE_LAYOUT_TRANSFER_DST_OPTIMAL`.
- `pColor` is a pointer to a VkClearColorValue structure containing the values that the image subresource ranges will be cleared to (see Clear Values below).
- `rangeCount` is the number of image subresource range structures in `pRanges`.
- `pRanges` is a pointer to an array of VkImageSubresourceRange structures describing a range of mipmap levels, array layers, and aspects to be cleared, as described in Image Views.

Each specified range in `pRanges` is cleared to the value specified by `pColor`.

Valid Usage

- VUID-vkCmdClearColorImage-image-01993
  The format features of `image` **must** contain `VK_FORMAT_FEATURE_TRANSFER_DST_BIT`
- VUID-vkCmdClearColorImage-image-00002
  `image` **must** have been created with `VK_IMAGE_USAGE_TRANSFER_DST_BIT` usage flag
- VUID-vkCmdClearColorImage-image-01545
  `image` **must** not use any of the formats that require a sampler $Y'C_BC_R$ conversion
- VUID-vkCmdClearColorImage-image-00003
  If `image` is non-sparse then it **must** be bound completely and contiguously to a single `VkDeviceMemory` object
- VUID-vkCmdClearColorImage-imageLayout-00004

`imageLayout` **must** specify the layout of the image subresource ranges of `image` specified in `pRanges` at the time this command is executed on a `VkDevice`

- VUID-vkCmdClearColorImage-imageLayout-01394
  `imageLayout` **must** be `VK_IMAGE_LAYOUT_TRANSFER_DST_OPTIMAL` or `VK_IMAGE_LAYOUT_GENERAL`
- VUID-vkCmdClearColorImage-aspectMask-02498
  The VkImageSubresourceRange::`aspectMask` members of the elements of the `pRanges` array **must** each only include `VK_IMAGE_ASPECT_COLOR_BIT`
- VUID-vkCmdClearColorImage-baseMipLevel-01470
  The VkImageSubresourceRange::`baseMipLevel` members of the elements of the `pRanges` array **must** each be less than the `mipLevels` specified in VkImageCreateInfo when `image` was created
- VUID-vkCmdClearColorImage-pRanges-01692
  For each VkImageSubresourceRange element of `pRanges`, if the `levelCount` member is not `VK_REMAINING_MIP_LEVELS`, then `baseMipLevel` + `levelCount` **must** be less than or equal to the `mipLevels` specified in VkImageCreateInfo when `image` was created
- VUID-vkCmdClearColorImage-baseArrayLayer-01472
  The VkImageSubresourceRange::`baseArrayLayer` members of the elements of the `pRanges` array **must** each be less than the `arrayLayers` specified in VkImageCreateInfo when `image` was created
- VUID-vkCmdClearColorImage-pRanges-01693
  For each VkImageSubresourceRange element of `pRanges`, if the `layerCount` member is not `VK_REMAINING_ARRAY_LAYERS`, then `baseArrayLayer` + `layerCount` **must** be less than or equal to the `arrayLayers` specified in VkImageCreateInfo when `image` was created
- VUID-vkCmdClearColorImage-image-00007
  `image` **must** not have a compressed or depth/stencil format
- VUID-vkCmdClearColorImage-pColor-04961
  `pColor` **must** be a valid pointer to a VkClearColorValue union
- VUID-vkCmdClearColorImage-commandBuffer-01805
  If `commandBuffer` is an unprotected command buffer and `protectedNoFault` is not supported, `image` **must** not be a protected image
- VUID-vkCmdClearColorImage-commandBuffer-01806
  If `commandBuffer` is a protected command buffer and `protectedNoFault` is not supported, **must** not be an unprotected image
- VUID-vkCmdClearColorImage-image-09678
  If `image`'s format has components other than R and G, it **must** not have a 64-bit component width

Valid Usage (Implicit)

- VUID-vkCmdClearColorImage-commandBuffer-parameter
  `commandBuffer` **must** be a valid VkCommandBuffer handle
- VUID-vkCmdClearColorImage-image-parameter

`image` **must** be a valid VkImage handle

- VUID-vkCmdClearColorImage-imageLayout-parameter
  `imageLayout` **must** be a valid VkImageLayout value
- VUID-vkCmdClearColorImage-pRanges-parameter
  `pRanges` **must** be a valid pointer to an array of `rangeCount` valid VkImageSubresourceRange structures
- VUID-vkCmdClearColorImage-commandBuffer-recording
  `commandBuffer` **must** be in the recording state
- VUID-vkCmdClearColorImage-commandBuffer-cmdpool
  The `VkCommandPool` that `commandBuffer` was allocated from **must** support graphics, or compute operations
- VUID-vkCmdClearColorImage-renderpass
  This command **must** only be called outside of a render pass instance
- VUID-vkCmdClearColorImage-rangeCount-arraylength
  `rangeCount` **must** be greater than `0`
- VUID-vkCmdClearColorImage-commonparent
  Both of `commandBuffer`, and `image` **must** have been created, allocated, or retrieved from the same VkDevice

Host Synchronization

- Host access to `commandBuffer` **must** be externally synchronized
- Host access to the `VkCommandPool` that `commandBuffer` was allocated from **must** be externally synchronized

Command Properties

Command Buffer Levels	Render Pass Scope	Supported Queue Types	Command Type
Primary Secondary	Outside	Graphics Compute	Action

To clear one or more subranges of a depth/stencil image, call:

```
// Provided by VK_VERSION_1_0
void vkCmdClearDepthStencilImage(
    VkCommandBuffer                             commandBuffer,
    VkImage                                     image,
    VkImageLayout                               imageLayout,
    const VkClearDepthStencilValue*             pDepthStencil,
    uint32_t                                    rangeCount,
    const VkImageSubresourceRange*              pRanges);
```

- `commandBuffer` is the command buffer into which the command will be recorded.
- `image` is the image to be cleared.
- `imageLayout` specifies the current layout of the image subresource ranges to be cleared, and **must** be `VK_IMAGE_LAYOUT_GENERAL` or `VK_IMAGE_LAYOUT_TRANSFER_DST_OPTIMAL`.
- `pDepthStencil` is a pointer to a VkClearDepthStencilValue structure containing the values that the depth and stencil image subresource ranges will be cleared to (see Clear Values below).
- `rangeCount` is the number of image subresource range structures in `pRanges`.
- `pRanges` is a pointer to an array of VkImageSubresourceRange structures describing a range of mipmap levels, array layers, and aspects to be cleared, as described in Image Views.

Valid Usage

- VUID-vkCmdClearDepthStencilImage-image-01994
  The format features of `image` **must** contain `VK_FORMAT_FEATURE_TRANSFER_DST_BIT`
- VUID-vkCmdClearDepthStencilImage-pRanges-02658
  If the `aspect` member of any element of `pRanges` includes `VK_IMAGE_ASPECT_STENCIL_BIT`, and `image` was created with separate stencil usage, `VK_IMAGE_USAGE_TRANSFER_DST_BIT` **must** have been included in the VkImageStencilUsageCreateInfo::`stencilUsage` used to create `image`
- VUID-vkCmdClearDepthStencilImage-pRanges-02659
  If the `aspect` member of any element of `pRanges` includes `VK_IMAGE_ASPECT_STENCIL_BIT`, and `image` was not created with separate stencil usage, `VK_IMAGE_USAGE_TRANSFER_DST_BIT` **must** have been included in the VkImageCreateInfo::`usage` used to create `image`
- VUID-vkCmdClearDepthStencilImage-pRanges-02660
  If the `aspect` member of any element of `pRanges` includes `VK_IMAGE_ASPECT_DEPTH_BIT`, `VK_IMAGE_USAGE_TRANSFER_DST_BIT` **must** have been included in the VkImageCreateInfo ::`usage` used to create `image`
- VUID-vkCmdClearDepthStencilImage-image-00010
  If `image` is non-sparse then it **must** be bound completely and contiguously to a single `VkDeviceMemory` object
- VUID-vkCmdClearDepthStencilImage-imageLayout-00011
  `imageLayout` **must** specify the layout of the image subresource ranges of `image` specified in `pRanges` at the time this command is executed on a `VkDevice`
- VUID-vkCmdClearDepthStencilImage-imageLayout-00012

imageLayout **must** be either of VK_IMAGE_LAYOUT_TRANSFER_DST_OPTIMAL or VK_IMAGE_LAYOUT_GENERAL

- VUID-vkCmdClearDepthStencilImage-aspectMask-02824
  The VkImageSubresourceRange::aspectMask member of each element of the pRanges array **must** not include bits other than VK_IMAGE_ASPECT_DEPTH_BIT or VK_IMAGE_ASPECT_STENCIL_BIT
- VUID-vkCmdClearDepthStencilImage-image-02825
  If the image's format does not have a stencil component, then the VkImageSubresourceRange::aspectMask member of each element of the pRanges array **must** not include the VK_IMAGE_ASPECT_STENCIL_BIT bit
- VUID-vkCmdClearDepthStencilImage-image-02826
  If the image's format does not have a depth component, then the VkImageSubresourceRange::aspectMask member of each element of the pRanges array **must** not include the VK_IMAGE_ASPECT_DEPTH_BIT bit
- VUID-vkCmdClearDepthStencilImage-baseMipLevel-01474
  The VkImageSubresourceRange::baseMipLevel members of the elements of the pRanges array **must** each be less than the mipLevels specified in VkImageCreateInfo when image was created
- VUID-vkCmdClearDepthStencilImage-pRanges-01694
  For each VkImageSubresourceRange element of pRanges, if the levelCount member is not VK_REMAINING_MIP_LEVELS, then baseMipLevel + levelCount **must** be less than or equal to the mipLevels specified in VkImageCreateInfo when image was created
- VUID-vkCmdClearDepthStencilImage-baseArrayLayer-01476
  The VkImageSubresourceRange::baseArrayLayer members of the elements of the pRanges array **must** each be less than the arrayLayers specified in VkImageCreateInfo when image was created
- VUID-vkCmdClearDepthStencilImage-pRanges-01695
  For each VkImageSubresourceRange element of pRanges, if the layerCount member is not VK_REMAINING_ARRAY_LAYERS, then baseArrayLayer + layerCount **must** be less than or equal to the arrayLayers specified in VkImageCreateInfo when image was created
- VUID-vkCmdClearDepthStencilImage-image-00014
  image **must** have a depth/stencil format
- VUID-vkCmdClearDepthStencilImage-commandBuffer-01807
  If commandBuffer is an unprotected command buffer and protectedNoFault is not supported, image **must** not be a protected image
- VUID-vkCmdClearDepthStencilImage-commandBuffer-01808
  If commandBuffer is a protected command buffer and protectedNoFault is not supported, image **must** not be an unprotected image

Valid Usage (Implicit)

- VUID-vkCmdClearDepthStencilImage-commandBuffer-parameter
  commandBuffer **must** be a valid VkCommandBuffer handle

- VUID-vkCmdClearDepthStencilImage-image-parameter
  `image` **must** be a valid VkImage handle
- VUID-vkCmdClearDepthStencilImage-imageLayout-parameter
  `imageLayout` **must** be a valid VkImageLayout value
- VUID-vkCmdClearDepthStencilImage-pDepthStencil-parameter
  `pDepthStencil` **must** be a valid pointer to a valid VkClearDepthStencilValue structure
- VUID-vkCmdClearDepthStencilImage-pRanges-parameter
  `pRanges` **must** be a valid pointer to an array of `rangeCount` valid VkImageSubresourceRange structures
- VUID-vkCmdClearDepthStencilImage-commandBuffer-recording
  `commandBuffer` **must** be in the recording state
- VUID-vkCmdClearDepthStencilImage-commandBuffer-cmdpool
  The `VkCommandPool` that `commandBuffer` was allocated from **must** support graphics operations
- VUID-vkCmdClearDepthStencilImage-renderpass
  This command **must** only be called outside of a render pass instance
- VUID-vkCmdClearDepthStencilImage-rangeCount-arraylength
  `rangeCount` **must** be greater than `0`
- VUID-vkCmdClearDepthStencilImage-commonparent
  Both of `commandBuffer`, and `image` **must** have been created, allocated, or retrieved from the same VkDevice

Host Synchronization

- Host access to `commandBuffer` **must** be externally synchronized
- Host access to the `VkCommandPool` that `commandBuffer` was allocated from **must** be externally synchronized

Command Properties

Command Buffer Levels	Render Pass Scope	Supported Queue Types	Command Type
Primary Secondary	Outside	Graphics	Action

Clears outside render pass instances are treated as transfer operations for the purposes of memory barriers.

18.2. Clearing Images Inside a Render Pass Instance

To clear one or more regions of color and depth/stencil attachments inside a render pass instance, call:

```
// Provided by VK_VERSION_1_0
void vkCmdClearAttachments(
    VkCommandBuffer                             commandBuffer,
    uint32_t                                    attachmentCount,
    const VkClearAttachment*                    pAttachments,
    uint32_t                                    rectCount,
    const VkClearRect*                          pRects);
```

- `commandBuffer` is the command buffer into which the command will be recorded.
- `attachmentCount` is the number of entries in the `pAttachments` array.
- `pAttachments` is a pointer to an array of VkClearAttachment structures defining the attachments to clear and the clear values to use.
- `rectCount` is the number of entries in the `pRects` array.
- `pRects` is a pointer to an array of VkClearRect structures defining regions within each selected attachment to clear.

Unlike other clear commands, vkCmdClearAttachments is not a transfer command. It performs its operations in rasterization order. For color attachments, the operations are executed as color attachment writes, by the `VK_PIPELINE_STAGE_COLOR_ATTACHMENT_OUTPUT_BIT` stage. For depth/stencil attachments, the operations are executed as depth writes and stencil writes by the `VK_PIPELINE_STAGE_EARLY_FRAGMENT_TESTS_BIT` and `VK_PIPELINE_STAGE_LATE_FRAGMENT_TESTS_BIT` stages.

`vkCmdClearAttachments` is not affected by the bound pipeline state.

NOTE	It is generally preferable to clear attachments by using the `VK_ATTACHMENT_LOAD_OP_CLEAR` load operation at the start of rendering, as it is more efficient on some implementations.

If any attachment's `aspectMask` to be cleared is not backed by an image view, the clear has no effect on that aspect.

If an attachment being cleared refers to an image view created with an `aspectMask` equal to one of `VK_IMAGE_ASPECT_PLANE_0_BIT`, `VK_IMAGE_ASPECT_PLANE_1_BIT` or `VK_IMAGE_ASPECT_PLANE_2_BIT`, it is considered to be `VK_IMAGE_ASPECT_COLOR_BIT` for purposes of this command, and **must** be cleared with the `VK_IMAGE_ASPECT_COLOR_BIT` aspect as specified by image view creation.

Valid Usage

- VUID-vkCmdClearAttachments-aspectMask-07884
  If the current render pass instance does not use dynamic rendering, and the `aspectMask` member of any element of `pAttachments` contains `VK_IMAGE_ASPECT_DEPTH_BIT`, the current

subpass instance's depth-stencil attachment **must** be either `VK_ATTACHMENT_UNUSED` or the attachment `format` **must** contain a depth component

- VUID-vkCmdClearAttachments-aspectMask-07885
  If the current render pass instance does not use dynamic rendering, and the `aspectMask` member of any element of `pAttachments` contains `VK_IMAGE_ASPECT_STENCIL_BIT`, the current subpass instance's depth-stencil attachment **must** be either `VK_ATTACHMENT_UNUSED` or the attachment `format` **must** contain a stencil component
- VUID-vkCmdClearAttachments-aspectMask-07271
  If the `aspectMask` member of any element of `pAttachments` contains `VK_IMAGE_ASPECT_COLOR_BIT`, the `colorAttachment` **must** be a valid color attachment index in the current render pass instance
- VUID-vkCmdClearAttachments-rect-02682
  The `rect` member of each element of `pRects` **must** have an `extent.width` greater than `0`
- VUID-vkCmdClearAttachments-rect-02683
  The `rect` member of each element of `pRects` **must** have an `extent.height` greater than `0`
- VUID-vkCmdClearAttachments-pRects-00016
  The rectangular region specified by each element of `pRects` **must** be contained within the render area of the current render pass instance
- VUID-vkCmdClearAttachments-pRects-06937
  The layers specified by each element of `pRects` **must** be contained within every attachment that `pAttachments` refers to, i.e. for each element of `pRects`, VkClearRect ::`baseArrayLayer` + VkClearRect::`layerCount` **must** be less than or equal to the number of layers rendered to in the current render pass instance
- VUID-vkCmdClearAttachments-layerCount-01934
  The `layerCount` member of each element of `pRects` **must** not be `0`
- VUID-vkCmdClearAttachments-commandBuffer-02504
  If `commandBuffer` is an unprotected command buffer and `protectedNoFault` is not supported, each attachment to be cleared **must** not be a protected image
- VUID-vkCmdClearAttachments-commandBuffer-02505
  If `commandBuffer` is a protected command buffer and `protectedNoFault` is not supported, each attachment to be cleared **must** not be an unprotected image
- VUID-vkCmdClearAttachments-baseArrayLayer-00018
  If the render pass instance this is recorded in uses multiview, then `baseArrayLayer` **must** be zero and `layerCount` **must** be one
- VUID-vkCmdClearAttachments-None-09679
  If the attachment format has components other than R and G, it **must** not have a 64-bit component width

Valid Usage (Implicit)

- VUID-vkCmdClearAttachments-commandBuffer-parameter
  `commandBuffer` **must** be a valid VkCommandBuffer handle

- VUID-vkCmdClearAttachments-pAttachments-parameter
  `pAttachments` **must** be a valid pointer to an array of `attachmentCount` valid VkClearAttachment structures
- VUID-vkCmdClearAttachments-pRects-parameter
  `pRects` **must** be a valid pointer to an array of `rectCount` VkClearRect structures
- VUID-vkCmdClearAttachments-commandBuffer-recording
  `commandBuffer` **must** be in the recording state
- VUID-vkCmdClearAttachments-commandBuffer-cmdpool
  The `VkCommandPool` that `commandBuffer` was allocated from **must** support graphics operations
- VUID-vkCmdClearAttachments-renderpass
  This command **must** only be called inside of a render pass instance
- VUID-vkCmdClearAttachments-attachmentCount-arraylength
  `attachmentCount` **must** be greater than `0`
- VUID-vkCmdClearAttachments-rectCount-arraylength
  `rectCount` **must** be greater than `0`

Host Synchronization

- Host access to `commandBuffer` **must** be externally synchronized
- Host access to the `VkCommandPool` that `commandBuffer` was allocated from **must** be externally synchronized

Command Properties

Command Buffer Levels	Render Pass Scope	Supported Queue Types	Command Type
Primary Secondary	Inside	Graphics	Action

The `VkClearRect` structure is defined as:

```
// Provided by VK_VERSION_1_0
typedef struct VkClearRect {
    VkRect2D    rect;
    uint32_t    baseArrayLayer;
    uint32_t    layerCount;
} VkClearRect;
```

- `rect` is the two-dimensional region to be cleared.
- `baseArrayLayer` is the first layer to be cleared.

- `layerCount` is the number of layers to clear.

The layers [`baseArrayLayer`, `baseArrayLayer` + `layerCount`) counting from the base layer of the attachment image view are cleared.

The `VkClearAttachment` structure is defined as:

```
// Provided by VK_VERSION_1_0
typedef struct VkClearAttachment {
    VkImageAspectFlags    aspectMask;
    uint32_t              colorAttachment;
    VkClearValue          clearValue;
} VkClearAttachment;
```

- `aspectMask` is a mask selecting the color, depth and/or stencil aspects of the attachment to be cleared.
- `colorAttachment` is only meaningful if `VK_IMAGE_ASPECT_COLOR_BIT` is set in `aspectMask`, in which case it is an index into the currently bound color attachments.
- `clearValue` is the color or depth/stencil value to clear the attachment to, as described in Clear Values below.

Valid Usage

- VUID-VkClearAttachment-aspectMask-00019
  If `aspectMask` includes `VK_IMAGE_ASPECT_COLOR_BIT`, it **must** not include `VK_IMAGE_ASPECT_DEPTH_BIT` or `VK_IMAGE_ASPECT_STENCIL_BIT`
- VUID-VkClearAttachment-aspectMask-00020
  `aspectMask` **must** not include `VK_IMAGE_ASPECT_METADATA_BIT`

Valid Usage (Implicit)

- VUID-VkClearAttachment-aspectMask-parameter
  `aspectMask` **must** be a valid combination of VkImageAspectFlagBits values
- VUID-VkClearAttachment-aspectMask-requiredbitmask
  `aspectMask` **must** not be `0`

18.3. Clear Values

The `VkClearColorValue` structure is defined as:

```
// Provided by VK_VERSION_1_0
typedef union VkClearColorValue {
    float       float32[4];
    int32_t     int32[4];
    uint32_t    uint32[4];
} VkClearColorValue;
```

- `float32` are the color clear values when the format of the image or attachment is one of the numeric formats with a numeric type that is floating-point. Floating-point values are automatically converted to the format of the image, with the clear value being treated as linear if the image is sRGB.
- `int32` are the color clear values when the format of the image or attachment has a numeric type that is signed integer (`SINT`). Signed integer values are converted to the format of the image by casting to the smaller type (with negative 32-bit values mapping to negative values in the smaller type). If the integer clear value is not representable in the target type (e.g. would overflow in conversion to that type), the clear value is undefined.
- `uint32` are the color clear values when the format of the image or attachment has a numeric type that is unsigned integer (`UINT`). Unsigned integer values are converted to the format of the image by casting to the integer type with fewer bits.

The four array elements of the clear color map to R, G, B, and A components of image formats, in order.

If the image has more than one sample, the same value is written to all samples for any pixels being cleared.

If the image or attachment format has a 64-bit component width, the first 2 array elements of each of the arrays above are reinterpreted as a single 64-bit element for the R component. The next 2 array elements are used in the same way for the G component. In other words, the union behaves as if it had the following additional members:

```
double float64[2];
int64_t int64[2];
uint64_t uint64[2];
```

The `VkClearDepthStencilValue` structure is defined as:

```
// Provided by VK_VERSION_1_0
typedef struct VkClearDepthStencilValue {
    float       depth;
    uint32_t    stencil;
} VkClearDepthStencilValue;
```

- `depth` is the clear value for the depth aspect of the depth/stencil attachment. It is a floating-point value which is automatically converted to the attachment's format.

- `stencil` is the clear value for the stencil aspect of the depth/stencil attachment. It is a 32-bit integer value which is converted to the attachment's format by taking the appropriate number of LSBs.

Valid Usage

- VUID-VkClearDepthStencilValue-depth-00022
  `depth` **must** be between `0.0` and `1.0`, inclusive

The `VkClearValue` union is defined as:

```
// Provided by VK_VERSION_1_0
typedef union VkClearValue {
    VkClearColorValue           color;
    VkClearDepthStencilValue    depthStencil;
} VkClearValue;
```

- `color` specifies the color image clear values to use when clearing a color image or attachment.
- `depthStencil` specifies the depth and stencil clear values to use when clearing a depth/stencil image or attachment.

This union is used where part of the API requires either color or depth/stencil clear values, depending on the attachment, and defines the initial clear values in the VkRenderPassBeginInfo structure.

18.4. Filling Buffers

To clear buffer data, call:

```
// Provided by VK_VERSION_1_0
void vkCmdFillBuffer(
    VkCommandBuffer                             commandBuffer,
    VkBuffer                                    dstBuffer,
    VkDeviceSize                                dstOffset,
    VkDeviceSize                                size,
    uint32_t                                    data);
```

- `commandBuffer` is the command buffer into which the command will be recorded.
- `dstBuffer` is the buffer to be filled.
- `dstOffset` is the byte offset into the buffer at which to start filling, and **must** be a multiple of 4.
- `size` is the number of bytes to fill, and **must** be either a multiple of 4, or `VK_WHOLE_SIZE` to fill the range from `offset` to the end of the buffer. If `VK_WHOLE_SIZE` is used and the remaining size of the buffer is not a multiple of 4, then the nearest smaller multiple is used.
- `data` is the 4-byte word written repeatedly to the buffer to fill `size` bytes of data. The data word

is written to memory according to the host endianness.

vkCmdFillBuffer is treated as a “transfer” operation for the purposes of synchronization barriers. The VK_BUFFER_USAGE_TRANSFER_DST_BIT **must** be specified in usage of VkBufferCreateInfo in order for the buffer to be compatible with vkCmdFillBuffer.

Valid Usage

- VUID-vkCmdFillBuffer-dstOffset-00024
  dstOffset **must** be less than the size of dstBuffer
- VUID-vkCmdFillBuffer-dstOffset-00025
  dstOffset **must** be a multiple of 4
- VUID-vkCmdFillBuffer-size-00026
  If size is not equal to VK_WHOLE_SIZE, size **must** be greater than 0
- VUID-vkCmdFillBuffer-size-00027
  If size is not equal to VK_WHOLE_SIZE, size **must** be less than or equal to the size of dstBuffer minus dstOffset
- VUID-vkCmdFillBuffer-size-00028
  If size is not equal to VK_WHOLE_SIZE, size **must** be a multiple of 4
- VUID-vkCmdFillBuffer-dstBuffer-00029
  dstBuffer **must** have been created with VK_BUFFER_USAGE_TRANSFER_DST_BIT usage flag
- VUID-vkCmdFillBuffer-apiVersion-07894
  If the VK_KHR_maintenance1 extension is not enabled and VkPhysicalDeviceProperties ::apiVersion is less than Vulkan 1.1, the VkCommandPool that commandBuffer was allocated from **must** support graphics or compute operations
- VUID-vkCmdFillBuffer-dstBuffer-00031
  If dstBuffer is non-sparse then it **must** be bound completely and contiguously to a single VkDeviceMemory object
- VUID-vkCmdFillBuffer-commandBuffer-01811
  If commandBuffer is an unprotected command buffer and protectedNoFault is not supported, dstBuffer **must** not be a protected buffer
- VUID-vkCmdFillBuffer-commandBuffer-01812
  If commandBuffer is a protected command buffer and protectedNoFault is not supported, dstBuffer **must** not be an unprotected buffer

Valid Usage (Implicit)

- VUID-vkCmdFillBuffer-commandBuffer-parameter
  commandBuffer **must** be a valid VkCommandBuffer handle
- VUID-vkCmdFillBuffer-dstBuffer-parameter
  dstBuffer **must** be a valid VkBuffer handle
- VUID-vkCmdFillBuffer-commandBuffer-recording

`commandBuffer` **must** be in the recording state

- VUID-vkCmdFillBuffer-commandBuffer-cmdpool
  The `VkCommandPool` that `commandBuffer` was allocated from **must** support transfer, graphics or compute operations
- VUID-vkCmdFillBuffer-renderpass
  This command **must** only be called outside of a render pass instance
- VUID-vkCmdFillBuffer-commonparent
  Both of `commandBuffer`, and `dstBuffer` **must** have been created, allocated, or retrieved from the same VkDevice

Host Synchronization

- Host access to `commandBuffer` **must** be externally synchronized
- Host access to the `VkCommandPool` that `commandBuffer` was allocated from **must** be externally synchronized

Command Properties

Command Buffer Levels	Render Pass Scope	Supported Queue Types	Command Type
Primary Secondary	Outside	Transfer Graphics Compute	Action

18.5. Updating Buffers

To update buffer data inline in a command buffer, call:

```
// Provided by VK_VERSION_1_0
void vkCmdUpdateBuffer(
    VkCommandBuffer                             commandBuffer,
    VkBuffer                                    dstBuffer,
    VkDeviceSize                                dstOffset,
    VkDeviceSize                                dataSize,
    const void*                                 pData);
```

- `commandBuffer` is the command buffer into which the command will be recorded.
- `dstBuffer` is a handle to the buffer to be updated.
- `dstOffset` is the byte offset into the buffer to start updating, and **must** be a multiple of 4.
- `dataSize` is the number of bytes to update, and **must** be a multiple of 4.

- pData is a pointer to the source data for the buffer update, and **must** be at least dataSize bytes in size.

dataSize **must** be less than or equal to 65536 bytes. For larger updates, applications **can** use buffer to buffer copies.

NOTE

Buffer updates performed with vkCmdUpdateBuffer first copy the data into command buffer memory when the command is recorded (which requires additional storage and may incur an additional allocation), and then copy the data from the command buffer into dstBuffer when the command is executed on a device.

The additional cost of this functionality compared to buffer to buffer copies means it is only recommended for very small amounts of data, and is why it is limited to only 65536 bytes.

Applications **can** work around this by issuing multiple vkCmdUpdateBuffer commands to different ranges of the same buffer, but it is strongly recommended that they **should** not.

The source data is copied from pData to the command buffer when the command is called.

vkCmdUpdateBuffer is only allowed outside of a render pass. This command is treated as a "transfer" operation for the purposes of synchronization barriers. The VK_BUFFER_USAGE_TRANSFER_DST_BIT **must** be specified in usage of VkBufferCreateInfo in order for the buffer to be compatible with vkCmdUpdateBuffer.

Valid Usage

- VUID-vkCmdUpdateBuffer-dstOffset-00032
  dstOffset **must** be less than the size of dstBuffer
- VUID-vkCmdUpdateBuffer-dataSize-00033
  dataSize **must** be less than or equal to the size of dstBuffer minus dstOffset
- VUID-vkCmdUpdateBuffer-dstBuffer-00034
  dstBuffer **must** have been created with VK_BUFFER_USAGE_TRANSFER_DST_BIT usage flag
- VUID-vkCmdUpdateBuffer-dstBuffer-00035
  If dstBuffer is non-sparse then it **must** be bound completely and contiguously to a single VkDeviceMemory object
- VUID-vkCmdUpdateBuffer-dstOffset-00036
  dstOffset **must** be a multiple of 4
- VUID-vkCmdUpdateBuffer-dataSize-00037
  dataSize **must** be less than or equal to 65536
- VUID-vkCmdUpdateBuffer-dataSize-00038
  dataSize **must** be a multiple of 4
- VUID-vkCmdUpdateBuffer-commandBuffer-01813
  If commandBuffer is an unprotected command buffer and protectedNoFault is not supported, dstBuffer **must** not be a protected buffer

- VUID-vkCmdUpdateBuffer-commandBuffer-01814
  If `commandBuffer` is a protected command buffer and `protectedNoFault` is not supported, `dstBuffer` **must** not be an unprotected buffer

Valid Usage (Implicit)

- VUID-vkCmdUpdateBuffer-commandBuffer-parameter
  `commandBuffer` **must** be a valid VkCommandBuffer handle
- VUID-vkCmdUpdateBuffer-dstBuffer-parameter
  `dstBuffer` **must** be a valid VkBuffer handle
- VUID-vkCmdUpdateBuffer-pData-parameter
  `pData` **must** be a valid pointer to an array of `dataSize` bytes
- VUID-vkCmdUpdateBuffer-commandBuffer-recording
  `commandBuffer` **must** be in the recording state
- VUID-vkCmdUpdateBuffer-commandBuffer-cmdpool
  The `VkCommandPool` that `commandBuffer` was allocated from **must** support transfer, graphics, or compute operations
- VUID-vkCmdUpdateBuffer-renderpass
  This command **must** only be called outside of a render pass instance
- VUID-vkCmdUpdateBuffer-dataSize-arraylength
  `dataSize` **must** be greater than `0`
- VUID-vkCmdUpdateBuffer-commonparent
  Both of `commandBuffer`, and `dstBuffer` **must** have been created, allocated, or retrieved from the same VkDevice

Host Synchronization

- Host access to `commandBuffer` **must** be externally synchronized
- Host access to the `VkCommandPool` that `commandBuffer` was allocated from **must** be externally synchronized

Command Properties

Command Buffer Levels	Render Pass Scope	Supported Queue Types	Command Type
Primary Secondary	Outside	Transfer Graphics Compute	Action

NOTE The `pData` parameter was of type `uint32_t*` instead of `void*` prior to version 1.0.19 of

the Specification and VK_HEADER_VERSION 19 of the Vulkan Header Files. This was a historical anomaly, as the source data may be of other types.

Chapter 19. Copy Commands

An application **can** copy buffer and image data using several methods described in this chapter, depending on the type of data transfer.

All copy commands are treated as “transfer” operations for the purposes of synchronization barriers.

All copy commands that have a source format with an X component in its format description read undefined values from those bits.

All copy commands that have a destination format with an X component in its format description write undefined values to those bits.

19.1. Copying Data Between Buffers

To copy data between buffer objects, call:

```
// Provided by VK_VERSION_1_0
void vkCmdCopyBuffer(
    VkCommandBuffer                             commandBuffer,
    VkBuffer                                    srcBuffer,
    VkBuffer                                    dstBuffer,
    uint32_t                                    regionCount,
    const VkBufferCopy*                         pRegions);
```

- `commandBuffer` is the command buffer into which the command will be recorded.
- `srcBuffer` is the source buffer.
- `dstBuffer` is the destination buffer.
- `regionCount` is the number of regions to copy.
- `pRegions` is a pointer to an array of VkBufferCopy structures specifying the regions to copy.

Each source region specified by `pRegions` is copied from the source buffer to the destination region of the destination buffer. If any of the specified regions in `srcBuffer` overlaps in memory with any of the specified regions in `dstBuffer`, values read from those overlapping regions are undefined.

Valid Usage

- VUID-vkCmdCopyBuffer-commandBuffer-01822
  If `commandBuffer` is an unprotected command buffer and `protectedNoFault` is not supported, `srcBuffer` **must** not be a protected buffer
- VUID-vkCmdCopyBuffer-commandBuffer-01823
  If `commandBuffer` is an unprotected command buffer and `protectedNoFault` is not supported, `dstBuffer` **must** not be a protected buffer
- VUID-vkCmdCopyBuffer-commandBuffer-01824

If commandBuffer is a protected command buffer and protectedNoFault is not supported, dstBuffer **must** not be an unprotected buffer

- VUID-vkCmdCopyBuffer-srcOffset-00113
  The srcOffset member of each element of pRegions **must** be less than the size of srcBuffer
- VUID-vkCmdCopyBuffer-dstOffset-00114
  The dstOffset member of each element of pRegions **must** be less than the size of dstBuffer
- VUID-vkCmdCopyBuffer-size-00115
  The size member of each element of pRegions **must** be less than or equal to the size of srcBuffer minus srcOffset
- VUID-vkCmdCopyBuffer-size-00116
  The size member of each element of pRegions **must** be less than or equal to the size of dstBuffer minus dstOffset
- VUID-vkCmdCopyBuffer-pRegions-00117
  The union of the source regions, and the union of the destination regions, specified by the elements of pRegions, **must** not overlap in memory
- VUID-vkCmdCopyBuffer-srcBuffer-00118
  srcBuffer **must** have been created with VK_BUFFER_USAGE_TRANSFER_SRC_BIT usage flag
- VUID-vkCmdCopyBuffer-srcBuffer-00119
  If srcBuffer is non-sparse then it **must** be bound completely and contiguously to a single VkDeviceMemory object
- VUID-vkCmdCopyBuffer-dstBuffer-00120
  dstBuffer **must** have been created with VK_BUFFER_USAGE_TRANSFER_DST_BIT usage flag
- VUID-vkCmdCopyBuffer-dstBuffer-00121
  If dstBuffer is non-sparse then it **must** be bound completely and contiguously to a single VkDeviceMemory object

Valid Usage (Implicit)

- VUID-vkCmdCopyBuffer-commandBuffer-parameter
  commandBuffer **must** be a valid VkCommandBuffer handle
- VUID-vkCmdCopyBuffer-srcBuffer-parameter
  srcBuffer **must** be a valid VkBuffer handle
- VUID-vkCmdCopyBuffer-dstBuffer-parameter
  dstBuffer **must** be a valid VkBuffer handle
- VUID-vkCmdCopyBuffer-pRegions-parameter
  pRegions **must** be a valid pointer to an array of regionCount valid VkBufferCopy structures
- VUID-vkCmdCopyBuffer-commandBuffer-recording
  commandBuffer **must** be in the recording state
- VUID-vkCmdCopyBuffer-commandBuffer-cmdpool
  The VkCommandPool that commandBuffer was allocated from **must** support transfer, graphics, or compute operations

- VUID-vkCmdCopyBuffer-renderpass
  This command **must** only be called outside of a render pass instance
- VUID-vkCmdCopyBuffer-regionCount-arraylength
  `regionCount` **must** be greater than `0`
- VUID-vkCmdCopyBuffer-commonparent
  Each of `commandBuffer`, `dstBuffer`, and `srcBuffer` **must** have been created, allocated, or retrieved from the same VkDevice

Host Synchronization

- Host access to `commandBuffer` **must** be externally synchronized
- Host access to the `VkCommandPool` that `commandBuffer` was allocated from **must** be externally synchronized

Command Properties

Command Buffer Levels	Render Pass Scope	Supported Queue Types	Command Type
Primary Secondary	Outside	Transfer Graphics Compute	Action

The `VkBufferCopy` structure is defined as:

```
// Provided by VK_VERSION_1_0
typedef struct VkBufferCopy {
    VkDeviceSize    srcOffset;
    VkDeviceSize    dstOffset;
    VkDeviceSize    size;
} VkBufferCopy;
```

- `srcOffset` is the starting offset in bytes from the start of `srcBuffer`.
- `dstOffset` is the starting offset in bytes from the start of `dstBuffer`.
- `size` is the number of bytes to copy.

Valid Usage

- VUID-VkBufferCopy-size-01988
  The `size` **must** be greater than `0`

A more extensible version of the copy buffer command is defined below.

To copy data between buffer objects, call:

```
// Provided by VK_VERSION_1_3
void vkCmdCopyBuffer2(
    VkCommandBuffer                             commandBuffer,
    const VkCopyBufferInfo2*                    pCopyBufferInfo);
```

- `commandBuffer` is the command buffer into which the command will be recorded.
- `pCopyBufferInfo` is a pointer to a VkCopyBufferInfo2 structure describing the copy parameters.

Each source region specified by `pCopyBufferInfo->pRegions` is copied from the source buffer to the destination region of the destination buffer. If any of the specified regions in `pCopyBufferInfo->srcBuffer` overlaps in memory with any of the specified regions in `pCopyBufferInfo->dstBuffer`, values read from those overlapping regions are undefined.

Valid Usage

- VUID-vkCmdCopyBuffer2-commandBuffer-01822
  If `commandBuffer` is an unprotected command buffer and `protectedNoFault` is not supported, `srcBuffer` **must** not be a protected buffer
- VUID-vkCmdCopyBuffer2-commandBuffer-01823
  If `commandBuffer` is an unprotected command buffer and `protectedNoFault` is not supported, `dstBuffer` **must** not be a protected buffer
- VUID-vkCmdCopyBuffer2-commandBuffer-01824
  If `commandBuffer` is a protected command buffer and `protectedNoFault` is not supported, `dstBuffer` **must** not be an unprotected buffer

Valid Usage (Implicit)

- VUID-vkCmdCopyBuffer2-commandBuffer-parameter
  `commandBuffer` **must** be a valid VkCommandBuffer handle
- VUID-vkCmdCopyBuffer2-pCopyBufferInfo-parameter
  `pCopyBufferInfo` **must** be a valid pointer to a valid VkCopyBufferInfo2 structure
- VUID-vkCmdCopyBuffer2-commandBuffer-recording
  `commandBuffer` **must** be in the recording state
- VUID-vkCmdCopyBuffer2-commandBuffer-cmdpool
  The `VkCommandPool` that `commandBuffer` was allocated from **must** support transfer, graphics, or compute operations
- VUID-vkCmdCopyBuffer2-renderpass
  This command **must** only be called outside of a render pass instance

Host Synchronization

- Host access to `commandBuffer` **must** be externally synchronized
- Host access to the `VkCommandPool` that `commandBuffer` was allocated from **must** be externally synchronized

Command Properties

Command Buffer Levels	Render Pass Scope	Supported Queue Types	Command Type
Primary Secondary	Outside	Transfer Graphics Compute	Action

The `VkCopyBufferInfo2` structure is defined as:

```
// Provided by VK_VERSION_1_3
typedef struct VkCopyBufferInfo2 {
    VkStructureType         sType;
    const void*             pNext;
    VkBuffer                srcBuffer;
    VkBuffer                dstBuffer;
    uint32_t                regionCount;
    const VkBufferCopy2*    pRegions;
} VkCopyBufferInfo2;
```

- `sType` is a VkStructureType value identifying this structure.
- `pNext` is `NULL` or a pointer to a structure extending this structure.
- `srcBuffer` is the source buffer.
- `dstBuffer` is the destination buffer.
- `regionCount` is the number of regions to copy.
- `pRegions` is a pointer to an array of VkBufferCopy2 structures specifying the regions to copy.

Valid Usage

- VUID-VkCopyBufferInfo2-srcOffset-00113
  The `srcOffset` member of each element of `pRegions` **must** be less than the size of `srcBuffer`
- VUID-VkCopyBufferInfo2-dstOffset-00114
  The `dstOffset` member of each element of `pRegions` **must** be less than the size of `dstBuffer`
- VUID-VkCopyBufferInfo2-size-00115
  The `size` member of each element of `pRegions` **must** be less than or equal to the size of

`srcBuffer` minus `srcOffset`

- VUID-VkCopyBufferInfo2-size-00116
  The `size` member of each element of `pRegions` **must** be less than or equal to the size of `dstBuffer` minus `dstOffset`
- VUID-VkCopyBufferInfo2-pRegions-00117
  The union of the source regions, and the union of the destination regions, specified by the elements of `pRegions`, **must** not overlap in memory
- VUID-VkCopyBufferInfo2-srcBuffer-00118
  `srcBuffer` **must** have been created with `VK_BUFFER_USAGE_TRANSFER_SRC_BIT` usage flag
- VUID-VkCopyBufferInfo2-srcBuffer-00119
  If `srcBuffer` is non-sparse then it **must** be bound completely and contiguously to a single `VkDeviceMemory` object
- VUID-VkCopyBufferInfo2-dstBuffer-00120
  `dstBuffer` **must** have been created with `VK_BUFFER_USAGE_TRANSFER_DST_BIT` usage flag
- VUID-VkCopyBufferInfo2-dstBuffer-00121
  If `dstBuffer` is non-sparse then it **must** be bound completely and contiguously to a single `VkDeviceMemory` object

Valid Usage (Implicit)

- VUID-VkCopyBufferInfo2-sType-sType
  `sType` **must** be `VK_STRUCTURE_TYPE_COPY_BUFFER_INFO_2`
- VUID-VkCopyBufferInfo2-pNext-pNext
  `pNext` **must** be `NULL`
- VUID-VkCopyBufferInfo2-srcBuffer-parameter
  `srcBuffer` **must** be a valid VkBuffer handle
- VUID-VkCopyBufferInfo2-dstBuffer-parameter
  `dstBuffer` **must** be a valid VkBuffer handle
- VUID-VkCopyBufferInfo2-pRegions-parameter
  `pRegions` **must** be a valid pointer to an array of `regionCount` valid VkBufferCopy2 structures
- VUID-VkCopyBufferInfo2-regionCount-arraylength
  `regionCount` **must** be greater than `0`
- VUID-VkCopyBufferInfo2-commonparent
  Both of `dstBuffer`, and `srcBuffer` **must** have been created, allocated, or retrieved from the same VkDevice

The `VkBufferCopy2` structure is defined as:

```
// Provided by VK_VERSION_1_3
typedef struct VkBufferCopy2 {
    VkStructureType    sType;
    const void*        pNext;
    VkDeviceSize       srcOffset;
    VkDeviceSize       dstOffset;
    VkDeviceSize       size;
} VkBufferCopy2;
```

- `sType` is a VkStructureType value identifying this structure.
- `pNext` is `NULL` or a pointer to a structure extending this structure.
- `srcOffset` is the starting offset in bytes from the start of `srcBuffer`.
- `dstOffset` is the starting offset in bytes from the start of `dstBuffer`.
- `size` is the number of bytes to copy.

Valid Usage

- VUID-VkBufferCopy2-size-01988
  The `size` **must** be greater than `0`

Valid Usage (Implicit)

- VUID-VkBufferCopy2-sType-sType
  `sType` **must** be `VK_STRUCTURE_TYPE_BUFFER_COPY_2`
- VUID-VkBufferCopy2-pNext-pNext
  `pNext` **must** be `NULL`

19.2. Copying Data Between Images

To copy data between image objects, call:

```
// Provided by VK_VERSION_1_0
void vkCmdCopyImage(
    VkCommandBuffer                             commandBuffer,
    VkImage                                     srcImage,
    VkImageLayout                               srcImageLayout,
    VkImage                                     dstImage,
    VkImageLayout                               dstImageLayout,
    uint32_t                                    regionCount,
    const VkImageCopy*                          pRegions);
```

- `commandBuffer` is the command buffer into which the command will be recorded.

- `srcImage` is the source image.
- `srcImageLayout` is the current layout of the source image subresource.
- `dstImage` is the destination image.
- `dstImageLayout` is the current layout of the destination image subresource.
- `regionCount` is the number of regions to copy.
- `pRegions` is a pointer to an array of VkImageCopy structures specifying the regions to copy.

Each source region specified by `pRegions` is copied from the source image to the destination region of the destination image. If any of the specified regions in `srcImage` overlaps in memory with any of the specified regions in `dstImage`, values read from those overlapping regions are undefined.

Multi-planar images **can** only be copied on a per-plane basis, and the subresources used in each region when copying to or from such images **must** specify only one plane, though different regions **can** specify different planes. When copying planes of multi-planar images, the format considered is the compatible format for that plane, rather than the format of the multi-planar image.

If the format of the destination image has a different block extent than the source image (e.g. one is a compressed format), the offset and extent for each of the regions specified is scaled according to the block extents of each format to match in size. Copy regions for each image **must** be aligned to a multiple of the texel block extent in each dimension, except at the edges of the image, where region extents **must** match the edge of the image.

Image data **can** be copied between images with different image types. If one image is `VK_IMAGE_TYPE_3D` and the other image is `VK_IMAGE_TYPE_2D` with multiple layers, then each slice is copied to or from a different layer; `depth` slices in the 3D image correspond to `layerCount` layers in the 2D image, with an effective `depth` of `1` used for the 2D image. Other combinations of image types are disallowed.

Valid Usage

- VUID-vkCmdCopyImage-commandBuffer-01825
  If `commandBuffer` is an unprotected command buffer and `protectedNoFault` is not supported, `srcImage` **must** not be a protected image
- VUID-vkCmdCopyImage-commandBuffer-01826
  If `commandBuffer` is an unprotected command buffer and `protectedNoFault` is not supported, `dstImage` **must** not be a protected image
- VUID-vkCmdCopyImage-commandBuffer-01827
  If `commandBuffer` is a protected command buffer and `protectedNoFault` is not supported, `dstImage` **must** not be an unprotected image
- VUID-vkCmdCopyImage-pRegions-00124
  The union of all source regions, and the union of all destination regions, specified by the elements of `pRegions`, **must** not overlap in memory
- VUID-vkCmdCopyImage-srcImage-01995
  The format features of `srcImage` **must** contain `VK_FORMAT_FEATURE_TRANSFER_SRC_BIT`

- VUID-vkCmdCopyImage-srcImageLayout-00128
  `srcImageLayout` **must** specify the layout of the image subresources of `srcImage` specified in `pRegions` at the time this command is executed on a `VkDevice`
- VUID-vkCmdCopyImage-srcImageLayout-01917
  `srcImageLayout` **must** be `VK_IMAGE_LAYOUT_TRANSFER_SRC_OPTIMAL`, or `VK_IMAGE_LAYOUT_GENERAL`
- VUID-vkCmdCopyImage-srcImage-09460
  If `srcImage` and `dstImage` are the same, and any elements of `pRegions` contains the `srcSubresource` and `dstSubresource` with matching `mipLevel` and overlapping array layers, then the `srcImageLayout` and `dstImageLayout` **must** be `VK_IMAGE_LAYOUT_GENERAL`
- VUID-vkCmdCopyImage-dstImage-01996
  The format features of `dstImage` **must** contain `VK_FORMAT_FEATURE_TRANSFER_DST_BIT`
- VUID-vkCmdCopyImage-dstImageLayout-00133
  `dstImageLayout` **must** specify the layout of the image subresources of `dstImage` specified in `pRegions` at the time this command is executed on a `VkDevice`
- VUID-vkCmdCopyImage-dstImageLayout-01395
  `dstImageLayout` **must** be `VK_IMAGE_LAYOUT_TRANSFER_DST_OPTIMAL`, or `VK_IMAGE_LAYOUT_GENERAL`
- VUID-vkCmdCopyImage-srcImage-01548
  If the VkFormat of each of `srcImage` and `dstImage` is not a *multi-planar format*, the VkFormat of each of `srcImage` and `dstImage` **must** be size-compatible
- VUID-vkCmdCopyImage-None-01549
  In a copy to or from a plane of a multi-planar image, the VkFormat of the image and plane **must** be compatible according to the description of compatible planes for the plane being copied
- VUID-vkCmdCopyImage-srcImage-09247
  If the VkFormat of each of `srcImage` and `dstImage` is a compressed image format, the formats **must** have the same texel block extent
- VUID-vkCmdCopyImage-srcImage-00136
  The sample count of `srcImage` and `dstImage` **must** match
- VUID-vkCmdCopyImage-srcOffset-01783
  The `srcOffset` and `extent` members of each element of `pRegions` **must** respect the image transfer granularity requirements of `commandBuffer`'s command pool's queue family, as described in VkQueueFamilyProperties
- VUID-vkCmdCopyImage-dstOffset-01784
  The `dstOffset` and `extent` members of each element of `pRegions` **must** respect the image transfer granularity requirements of `commandBuffer`'s command pool's queue family, as described in VkQueueFamilyProperties
- VUID-vkCmdCopyImage-srcImage-01551
  If neither `srcImage` nor `dstImage` has a multi-planar image format then for each element of `pRegions`, `srcSubresource.aspectMask` and `dstSubresource.aspectMask` **must** match
- VUID-vkCmdCopyImage-srcImage-08713
  If `srcImage` has a multi-planar image format, then for each element of `pRegions`, `srcSubresource.aspectMask` **must** be a single valid multi-planar aspect mask bit

- VUID-vkCmdCopyImage-dstImage-08714
  If `dstImage` has a multi-planar image format, then for each element of `pRegions`, `dstSubresource.aspectMask` **must** be a single valid multi-planar aspect mask bit
- VUID-vkCmdCopyImage-srcImage-01556
  If `srcImage` has a multi-planar image format and the `dstImage` does not have a multi-planar image format, then for each element of `pRegions`, `dstSubresource.aspectMask` **must** be `VK_IMAGE_ASPECT_COLOR_BIT`
- VUID-vkCmdCopyImage-dstImage-01557
  If `dstImage` has a multi-planar image format and the `srcImage` does not have a multi-planar image format, then for each element of `pRegions`, `srcSubresource.aspectMask` **must** be `VK_IMAGE_ASPECT_COLOR_BIT`
- VUID-vkCmdCopyImage-apiVersion-07932
  If or VkPhysicalDeviceProperties::`apiVersion` is less than Vulkan 1.1, and either `srcImage` or `dstImage` is of type `VK_IMAGE_TYPE_3D`, then for each element of `pRegions`, `srcSubresource.baseArrayLayer` and `dstSubresource.baseArrayLayer` **must** both be `0`, and `srcSubresource.layerCount` and `dstSubresource.layerCount` **must** both be `1`
- VUID-vkCmdCopyImage-srcImage-04443
  If `srcImage` is of type `VK_IMAGE_TYPE_3D`, then for each element of `pRegions`, `srcSubresource.baseArrayLayer` **must** be `0` and `srcSubresource.layerCount` **must** be `1`
- VUID-vkCmdCopyImage-dstImage-04444
  If `dstImage` is of type `VK_IMAGE_TYPE_3D`, then for each element of `pRegions`, `dstSubresource.baseArrayLayer` **must** be `0` and `dstSubresource.layerCount` **must** be `1`
- VUID-vkCmdCopyImage-aspectMask-00142
  For each element of `pRegions`, `srcSubresource.aspectMask` **must** specify aspects present in `srcImage`
- VUID-vkCmdCopyImage-aspectMask-00143
  For each element of `pRegions`, `dstSubresource.aspectMask` **must** specify aspects present in `dstImage`
- VUID-vkCmdCopyImage-srcOffset-00144
  For each element of `pRegions`, `srcOffset.x` and (`extent.width` + `srcOffset.x`) **must** both be greater than or equal to `0` and less than or equal to the width of the specified `srcSubresource` of `srcImage`
- VUID-vkCmdCopyImage-srcOffset-00145
  For each element of `pRegions`, `srcOffset.y` and (`extent.height` + `srcOffset.y`) **must** both be greater than or equal to `0` and less than or equal to the height of the specified `srcSubresource` of `srcImage`
- VUID-vkCmdCopyImage-srcImage-00146
  If `srcImage` is of type `VK_IMAGE_TYPE_1D`, then for each element of `pRegions`, `srcOffset.y` **must** be `0` and `extent.height` **must** be `1`
- VUID-vkCmdCopyImage-srcOffset-00147
  If `srcImage` is of type `VK_IMAGE_TYPE_3D`, then for each element of `pRegions`, `srcOffset.z` and (`extent.depth` + `srcOffset.z`) **must** both be greater than or equal to `0` and less than or equal to the depth of the specified `srcSubresource` of `srcImage`

- VUID-vkCmdCopyImage-srcImage-01785
  If `srcImage` is of type `VK_IMAGE_TYPE_1D`, then for each element of `pRegions`, `srcOffset.z` **must** be `0` and `extent.depth` **must** be `1`
- VUID-vkCmdCopyImage-dstImage-01786
  If `dstImage` is of type `VK_IMAGE_TYPE_1D`, then for each element of `pRegions`, `dstOffset.z` **must** be `0` and `extent.depth` **must** be `1`
- VUID-vkCmdCopyImage-srcImage-01787
  If `srcImage` is of type `VK_IMAGE_TYPE_2D`, then for each element of `pRegions`, `srcOffset.z` **must** be `0`
- VUID-vkCmdCopyImage-dstImage-01788
  If `dstImage` is of type `VK_IMAGE_TYPE_2D`, then for each element of `pRegions`, `dstOffset.z` **must** be `0`
- VUID-vkCmdCopyImage-apiVersion-07933
  If and VkPhysicalDeviceProperties::`apiVersion` is less than Vulkan 1.1, `srcImage` and `dstImage` **must** have the same VkImageType
- VUID-vkCmdCopyImage-apiVersion-08969
  If and VkPhysicalDeviceProperties::`apiVersion` is less than Vulkan 1.1, `srcImage` or `dstImage` is of type `VK_IMAGE_TYPE_2D`, then for each element of `pRegions`, `extent.depth` **must** be `1`
- VUID-vkCmdCopyImage-srcImage-07743
  If `srcImage` and `dstImage` have a different VkImageType, one **must** be `VK_IMAGE_TYPE_3D` and the other **must** be `VK_IMAGE_TYPE_2D`
- VUID-vkCmdCopyImage-srcImage-08793
  If `srcImage` and `dstImage` have the same VkImageType, for each element of `pRegions`, the `layerCount` members of `srcSubresource` or `dstSubresource` **must** match
- VUID-vkCmdCopyImage-srcImage-01790
  If `srcImage` and `dstImage` are both of type `VK_IMAGE_TYPE_2D`, then for each element of `pRegions`, `extent.depth` **must** be `1`
- VUID-vkCmdCopyImage-srcImage-01791
  If `srcImage` is of type `VK_IMAGE_TYPE_2D`, and `dstImage` is of type `VK_IMAGE_TYPE_3D`, then for each element of `pRegions`, `extent.depth` **must** equal `srcSubresource.layerCount`
- VUID-vkCmdCopyImage-dstImage-01792
  If `dstImage` is of type `VK_IMAGE_TYPE_2D`, and `srcImage` is of type `VK_IMAGE_TYPE_3D`, then for each element of `pRegions`, `extent.depth` **must** equal `dstSubresource.layerCount`
- VUID-vkCmdCopyImage-dstOffset-00150
  For each element of `pRegions`, `dstOffset.x` and (`extent.width` + `dstOffset.x`) **must** both be greater than or equal to `0` and less than or equal to the width of the specified `dstSubresource` of `dstImage`
- VUID-vkCmdCopyImage-dstOffset-00151
  For each element of `pRegions`, `dstOffset.y` and (`extent.height` + `dstOffset.y`) **must** both be greater than or equal to `0` and less than or equal to the height of the specified `dstSubresource` of `dstImage`
- VUID-vkCmdCopyImage-dstImage-00152
  If `dstImage` is of type `VK_IMAGE_TYPE_1D`, then for each element of `pRegions`, `dstOffset.y`

must be `0` and `extent.height` **must** be `1`

- VUID-vkCmdCopyImage-dstOffset-00153
  If `dstImage` is of type `VK_IMAGE_TYPE_3D`, then for each element of `pRegions`, `dstOffset.z` and (`extent.depth` + `dstOffset.z`) **must** both be greater than or equal to `0` and less than or equal to the depth of the specified `dstSubresource` of `dstImage`
- VUID-vkCmdCopyImage-pRegions-07278
  For each element of `pRegions`, `srcOffset.x` **must** be a multiple of the texel block extent width of the VkFormat of `srcImage`
- VUID-vkCmdCopyImage-pRegions-07279
  For each element of `pRegions`, `srcOffset.y` **must** be a multiple of the texel block extent height of the VkFormat of `srcImage`
- VUID-vkCmdCopyImage-pRegions-07280
  For each element of `pRegions`, `srcOffset.z` **must** be a multiple of the texel block extent depth of the VkFormat of `srcImage`
- VUID-vkCmdCopyImage-pRegions-07281
  For each element of `pRegions`, `dstOffset.x` **must** be a multiple of the texel block extent width of the VkFormat of `dstImage`
- VUID-vkCmdCopyImage-pRegions-07282
  For each element of `pRegions`, `dstOffset.y` **must** be a multiple of the texel block extent height of the VkFormat of `dstImage`
- VUID-vkCmdCopyImage-pRegions-07283
  For each element of `pRegions`, `dstOffset.z` **must** be a multiple of the texel block extent depth of the VkFormat of `dstImage`
- VUID-vkCmdCopyImage-srcImage-01728
  For each element of `pRegions`, if the sum of `srcOffset.x` and `extent.width` does not equal the width of the subresource specified by `srcSubresource`, `extent.width` **must** be a multiple of the texel block extent width of the VkFormat of `srcImage`
- VUID-vkCmdCopyImage-srcImage-01729
  For each element of `pRegions`, if the sum of `srcOffset.y` and `extent.height` does not equal the height of the subresource specified by `srcSubresource`, `extent.height` **must** be a multiple of the texel block extent height of the VkFormat of `srcImage`
- VUID-vkCmdCopyImage-srcImage-01730
  For each element of `pRegions`, if the sum of `srcOffset.z` and `extent.depth` does not equal the depth of the subresource specified by `srcSubresource`, `extent.depth` **must** be a multiple of the texel block extent depth of the VkFormat of `srcImage`
- VUID-vkCmdCopyImage-dstImage-01732
  For each element of `pRegions`, if the sum of `dstOffset.x` and `extent.width` does not equal the width of the subresource specified by `dstSubresource`, `extent.width` **must** be a multiple of the texel block extent width of the VkFormat of `dstImage`
- VUID-vkCmdCopyImage-dstImage-01733
  For each element of `pRegions`, if the sum of `dstOffset.y` and `extent.height` does not equal the height of the subresource specified by `dstSubresource`, `extent.height` **must** be a multiple of the texel block extent height of the VkFormat of `dstImage`

- VUID-vkCmdCopyImage-dstImage-01734
  For each element of pRegions, if the sum of dstOffset.z and extent.depth does not equal the depth of the subresource specified by dstSubresource, extent.depth **must** be a multiple of the texel block extent depth of the VkFormat of dstImage
- VUID-vkCmdCopyImage-aspect-06662
  If the aspect member of any element of pRegions includes any flag other than VK_IMAGE_ASPECT_STENCIL_BIT or srcImage was not created with separate stencil usage, VK_IMAGE_USAGE_TRANSFER_SRC_BIT **must** have been included in the VkImageCreateInfo ::usage used to create srcImage
- VUID-vkCmdCopyImage-aspect-06663
  If the aspect member of any element of pRegions includes any flag other than VK_IMAGE_ASPECT_STENCIL_BIT or dstImage was not created with separate stencil usage, VK_IMAGE_USAGE_TRANSFER_DST_BIT **must** have been included in the VkImageCreateInfo ::usage used to create dstImage
- VUID-vkCmdCopyImage-aspect-06664
  If the aspect member of any element of pRegions includes VK_IMAGE_ASPECT_STENCIL_BIT, and srcImage was created with separate stencil usage, VK_IMAGE_USAGE_TRANSFER_SRC_BIT **must** have been included in the VkImageStencilUsageCreateInfo::stencilUsage used to create srcImage
- VUID-vkCmdCopyImage-aspect-06665
  If the aspect member of any element of pRegions includes VK_IMAGE_ASPECT_STENCIL_BIT, and dstImage was created with separate stencil usage, VK_IMAGE_USAGE_TRANSFER_DST_BIT **must** have been included in the VkImageStencilUsageCreateInfo::stencilUsage used to create dstImage
- VUID-vkCmdCopyImage-srcImage-07966
  If srcImage is non-sparse then the image or the specified *disjoint* plane **must** be bound completely and contiguously to a single VkDeviceMemory object
- VUID-vkCmdCopyImage-srcSubresource-07967
  The srcSubresource.mipLevel member of each element of pRegions **must** be less than the mipLevels specified in VkImageCreateInfo when srcImage was created
- VUID-vkCmdCopyImage-srcSubresource-07968
  srcSubresource.baseArrayLayer + srcSubresource.layerCount of each element of pRegions **must** be less than or equal to the arrayLayers specified in VkImageCreateInfo when srcImage was created
- VUID-vkCmdCopyImage-dstImage-07966
  If dstImage is non-sparse then the image or the specified *disjoint* plane **must** be bound completely and contiguously to a single VkDeviceMemory object
- VUID-vkCmdCopyImage-dstSubresource-07967
  The dstSubresource.mipLevel member of each element of pRegions **must** be less than the mipLevels specified in VkImageCreateInfo when dstImage was created
- VUID-vkCmdCopyImage-dstSubresource-07968
  dstSubresource.baseArrayLayer + dstSubresource.layerCount of each element of pRegions **must** be less than or equal to the arrayLayers specified in VkImageCreateInfo when

`dstImage` was created

Valid Usage (Implicit)

- VUID-vkCmdCopyImage-commandBuffer-parameter
  `commandBuffer` **must** be a valid VkCommandBuffer handle
- VUID-vkCmdCopyImage-srcImage-parameter
  `srcImage` **must** be a valid VkImage handle
- VUID-vkCmdCopyImage-srcImageLayout-parameter
  `srcImageLayout` **must** be a valid VkImageLayout value
- VUID-vkCmdCopyImage-dstImage-parameter
  `dstImage` **must** be a valid VkImage handle
- VUID-vkCmdCopyImage-dstImageLayout-parameter
  `dstImageLayout` **must** be a valid VkImageLayout value
- VUID-vkCmdCopyImage-pRegions-parameter
  `pRegions` **must** be a valid pointer to an array of `regionCount` valid VkImageCopy structures
- VUID-vkCmdCopyImage-commandBuffer-recording
  `commandBuffer` **must** be in the recording state
- VUID-vkCmdCopyImage-commandBuffer-cmdpool
  The `VkCommandPool` that `commandBuffer` was allocated from **must** support transfer, graphics, or compute operations
- VUID-vkCmdCopyImage-renderpass
  This command **must** only be called outside of a render pass instance
- VUID-vkCmdCopyImage-regionCount-arraylength
  `regionCount` **must** be greater than `0`
- VUID-vkCmdCopyImage-commonparent
  Each of `commandBuffer`, `dstImage`, and `srcImage` **must** have been created, allocated, or retrieved from the same VkDevice

Host Synchronization

- Host access to `commandBuffer` **must** be externally synchronized
- Host access to the `VkCommandPool` that `commandBuffer` was allocated from **must** be externally synchronized

Command Properties

Command Buffer Levels	Render Pass Scope	Supported Queue Types	Command Type
Primary Secondary	Outside	Transfer Graphics Compute	Action

The `VkImageCopy` structure is defined as:

```
// Provided by VK_VERSION_1_0
typedef struct VkImageCopy {
    VkImageSubresourceLayers    srcSubresource;
    VkOffset3D                  srcOffset;
    VkImageSubresourceLayers    dstSubresource;
    VkOffset3D                  dstOffset;
    VkExtent3D                  extent;
} VkImageCopy;
```

- `srcSubresource` and `dstSubresource` are VkImageSubresourceLayers structures specifying the image subresources of the images used for the source and destination image data, respectively.
- `srcOffset` and `dstOffset` select the initial `x`, `y`, and `z` offsets in texels of the sub-regions of the source and destination image data.
- `extent` is the size in texels of the image to copy in `width`, `height` and `depth`.

Valid Usage

- VUID-VkImageCopy-apiVersion-07940
  If and VkPhysicalDeviceProperties::`apiVersion` is less than Vulkan 1.1, the `aspectMask` member of `srcSubresource` and `dstSubresource` **must** match
- VUID-VkImageCopy-apiVersion-07941
  If and VkPhysicalDeviceProperties::`apiVersion` is less than Vulkan 1.1, the `layerCount` member of `srcSubresource` and `dstSubresource` **must** match
- VUID-VkImageCopy-extent-06668
  `extent.width` **must** not be 0
- VUID-VkImageCopy-extent-06669
  `extent.height` **must** not be 0
- VUID-VkImageCopy-extent-06670
  `extent.depth` **must** not be 0

Valid Usage (Implicit)

- VUID-VkImageCopy-srcSubresource-parameter
  `srcSubresource` **must** be a valid VkImageSubresourceLayers structure
- VUID-VkImageCopy-dstSubresource-parameter
  `dstSubresource` **must** be a valid VkImageSubresourceLayers structure

The `VkImageSubresourceLayers` structure is defined as:

```
// Provided by VK_VERSION_1_0
typedef struct VkImageSubresourceLayers {
    VkImageAspectFlags    aspectMask;
    uint32_t              mipLevel;
    uint32_t              baseArrayLayer;
    uint32_t              layerCount;
} VkImageSubresourceLayers;
```

- `aspectMask` is a combination of VkImageAspectFlagBits, selecting the color, depth and/or stencil aspects to be copied.
- `mipLevel` is the mipmap level to copy
- `baseArrayLayer` and `layerCount` are the starting layer and number of layers to copy.

Valid Usage

- VUID-VkImageSubresourceLayers-aspectMask-00167
  If `aspectMask` contains `VK_IMAGE_ASPECT_COLOR_BIT`, it **must** not contain either of `VK_IMAGE_ASPECT_DEPTH_BIT` or `VK_IMAGE_ASPECT_STENCIL_BIT`
- VUID-VkImageSubresourceLayers-aspectMask-00168
  `aspectMask` **must** not contain `VK_IMAGE_ASPECT_METADATA_BIT`
- VUID-VkImageSubresourceLayers-layerCount-09243
  `layerCount` **must** not be `VK_REMAINING_ARRAY_LAYERS`
- VUID-VkImageSubresourceLayers-layerCount-01700
  If `layerCount` is not `VK_REMAINING_ARRAY_LAYERS`, it **must** be greater than 0

Valid Usage (Implicit)

- VUID-VkImageSubresourceLayers-aspectMask-parameter
  `aspectMask` **must** be a valid combination of VkImageAspectFlagBits values
- VUID-VkImageSubresourceLayers-aspectMask-requiredbitmask
  `aspectMask` **must** not be `0`

A more extensible version of the copy image command is defined below.

To copy data between image objects, call:

```
// Provided by VK_VERSION_1_3
void vkCmdCopyImage2(
    VkCommandBuffer                             commandBuffer,
    const VkCopyImageInfo2*                     pCopyImageInfo);
```

- `commandBuffer` is the command buffer into which the command will be recorded.
- `pCopyImageInfo` is a pointer to a VkCopyImageInfo2 structure describing the copy parameters.

This command is functionally identical to vkCmdCopyImage, but includes extensible sub-structures that include `sType` and `pNext` parameters, allowing them to be more easily extended.

Valid Usage

- VUID-vkCmdCopyImage2-commandBuffer-01825
  If `commandBuffer` is an unprotected command buffer and `protectedNoFault` is not supported, `srcImage` **must** not be a protected image
- VUID-vkCmdCopyImage2-commandBuffer-01826
  If `commandBuffer` is an unprotected command buffer and `protectedNoFault` is not supported, `dstImage` **must** not be a protected image
- VUID-vkCmdCopyImage2-commandBuffer-01827
  If `commandBuffer` is a protected command buffer and `protectedNoFault` is not supported, `dstImage` **must** not be an unprotected image

Valid Usage (Implicit)

- VUID-vkCmdCopyImage2-commandBuffer-parameter
  `commandBuffer` **must** be a valid VkCommandBuffer handle
- VUID-vkCmdCopyImage2-pCopyImageInfo-parameter
  `pCopyImageInfo` **must** be a valid pointer to a valid VkCopyImageInfo2 structure
- VUID-vkCmdCopyImage2-commandBuffer-recording
  `commandBuffer` **must** be in the recording state
- VUID-vkCmdCopyImage2-commandBuffer-cmdpool
  The `VkCommandPool` that `commandBuffer` was allocated from **must** support transfer, graphics, or compute operations
- VUID-vkCmdCopyImage2-renderpass
  This command **must** only be called outside of a render pass instance

Host Synchronization

- Host access to `commandBuffer` **must** be externally synchronized
- Host access to the `VkCommandPool` that `commandBuffer` was allocated from **must** be externally synchronized

Command Properties

Command Buffer Levels	Render Pass Scope	Supported Queue Types	Command Type
Primary Secondary	Outside	Transfer Graphics Compute	Action

The `VkCopyImageInfo2` structure is defined as:

```
// Provided by VK_VERSION_1_3
typedef struct VkCopyImageInfo2 {
    VkStructureType        sType;
    const void*            pNext;
    VkImage                srcImage;
    VkImageLayout          srcImageLayout;
    VkImage                dstImage;
    VkImageLayout          dstImageLayout;
    uint32_t               regionCount;
    const VkImageCopy2*    pRegions;
} VkCopyImageInfo2;
```

- `sType` is a VkStructureType value identifying this structure.
- `pNext` is `NULL` or a pointer to a structure extending this structure.
- `srcImage` is the source image.
- `srcImageLayout` is the current layout of the source image subresource.
- `dstImage` is the destination image.
- `dstImageLayout` is the current layout of the destination image subresource.
- `regionCount` is the number of regions to copy.
- `pRegions` is a pointer to an array of VkImageCopy2 structures specifying the regions to copy.

Valid Usage

- VUID-VkCopyImageInfo2-pRegions-00124
  The union of all source regions, and the union of all destination regions, specified by the

elements of pRegions, **must** not overlap in memory

- VUID-VkCopyImageInfo2-srcImage-01995
  The format features of srcImage **must** contain VK_FORMAT_FEATURE_TRANSFER_SRC_BIT
- VUID-VkCopyImageInfo2-srcImageLayout-00128
  srcImageLayout **must** specify the layout of the image subresources of srcImage specified in pRegions at the time this command is executed on a VkDevice
- VUID-VkCopyImageInfo2-srcImageLayout-01917
  srcImageLayout **must** be VK_IMAGE_LAYOUT_TRANSFER_SRC_OPTIMAL, or VK_IMAGE_LAYOUT_GENERAL
- VUID-VkCopyImageInfo2-srcImage-09460
  If srcImage and dstImage are the same, and any elements of pRegions contains the srcSubresource and dstSubresource with matching mipLevel and overlapping array layers, then the srcImageLayout and dstImageLayout **must** be VK_IMAGE_LAYOUT_GENERAL
- VUID-VkCopyImageInfo2-dstImage-01996
  The format features of dstImage **must** contain VK_FORMAT_FEATURE_TRANSFER_DST_BIT
- VUID-VkCopyImageInfo2-dstImageLayout-00133
  dstImageLayout **must** specify the layout of the image subresources of dstImage specified in pRegions at the time this command is executed on a VkDevice
- VUID-VkCopyImageInfo2-dstImageLayout-01395
  dstImageLayout **must** be VK_IMAGE_LAYOUT_TRANSFER_DST_OPTIMAL, or VK_IMAGE_LAYOUT_GENERAL
- VUID-VkCopyImageInfo2-srcImage-01548
  If the VkFormat of each of srcImage and dstImage is not a *multi-planar format*, the VkFormat of each of srcImage and dstImage **must** be size-compatible
- VUID-VkCopyImageInfo2-None-01549
  In a copy to or from a plane of a multi-planar image, the VkFormat of the image and plane **must** be compatible according to the description of compatible planes for the plane being copied
- VUID-VkCopyImageInfo2-srcImage-09247
  If the VkFormat of each of srcImage and dstImage is a compressed image format, the formats **must** have the same texel block extent
- VUID-VkCopyImageInfo2-srcImage-00136
  The sample count of srcImage and dstImage **must** match
- VUID-VkCopyImageInfo2-srcOffset-01783
  The srcOffset and extent members of each element of pRegions **must** respect the image transfer granularity requirements of commandBuffer's command pool's queue family, as described in VkQueueFamilyProperties
- VUID-VkCopyImageInfo2-dstOffset-01784
  The dstOffset and extent members of each element of pRegions **must** respect the image transfer granularity requirements of commandBuffer's command pool's queue family, as described in VkQueueFamilyProperties
- VUID-VkCopyImageInfo2-srcImage-01551
  If neither srcImage nor dstImage has a multi-planar image format then for each element of pRegions, srcSubresource.aspectMask and dstSubresource.aspectMask **must** match

- VUID-VkCopyImageInfo2-srcImage-08713
  If `srcImage` has a multi-planar image format, then for each element of `pRegions`, `srcSubresource.aspectMask` **must** be a single valid multi-planar aspect mask bit
- VUID-VkCopyImageInfo2-dstImage-08714
  If `dstImage` has a multi-planar image format, then for each element of `pRegions`, `dstSubresource.aspectMask` **must** be a single valid multi-planar aspect mask bit
- VUID-VkCopyImageInfo2-srcImage-01556
  If `srcImage` has a multi-planar image format and the `dstImage` does not have a multi-planar image format, then for each element of `pRegions`, `dstSubresource.aspectMask` **must** be `VK_IMAGE_ASPECT_COLOR_BIT`
- VUID-VkCopyImageInfo2-dstImage-01557
  If `dstImage` has a multi-planar image format and the `srcImage` does not have a multi-planar image format, then for each element of `pRegions`, `srcSubresource.aspectMask` **must** be `VK_IMAGE_ASPECT_COLOR_BIT`
- VUID-VkCopyImageInfo2-apiVersion-07932
  If or VkPhysicalDeviceProperties::`apiVersion` is less than Vulkan 1.1, and either `srcImage` or `dstImage` is of type `VK_IMAGE_TYPE_3D`, then for each element of `pRegions`, `srcSubresource.baseArrayLayer` and `dstSubresource.baseArrayLayer` **must** both be `0`, and `srcSubresource.layerCount` and `dstSubresource.layerCount` **must** both be `1`
- VUID-VkCopyImageInfo2-srcImage-04443
  If `srcImage` is of type `VK_IMAGE_TYPE_3D`, then for each element of `pRegions`, `srcSubresource.baseArrayLayer` **must** be `0` and `srcSubresource.layerCount` **must** be `1`
- VUID-VkCopyImageInfo2-dstImage-04444
  If `dstImage` is of type `VK_IMAGE_TYPE_3D`, then for each element of `pRegions`, `dstSubresource.baseArrayLayer` **must** be `0` and `dstSubresource.layerCount` **must** be `1`
- VUID-VkCopyImageInfo2-aspectMask-00142
  For each element of `pRegions`, `srcSubresource.aspectMask` **must** specify aspects present in `srcImage`
- VUID-VkCopyImageInfo2-aspectMask-00143
  For each element of `pRegions`, `dstSubresource.aspectMask` **must** specify aspects present in `dstImage`
- VUID-VkCopyImageInfo2-srcOffset-00144
  For each element of `pRegions`, `srcOffset.x` and (`extent.width` + `srcOffset.x`) **must** both be greater than or equal to `0` and less than or equal to the width of the specified `srcSubresource` of `srcImage`
- VUID-VkCopyImageInfo2-srcOffset-00145
  For each element of `pRegions`, `srcOffset.y` and (`extent.height` + `srcOffset.y`) **must** both be greater than or equal to `0` and less than or equal to the height of the specified `srcSubresource` of `srcImage`
- VUID-VkCopyImageInfo2-srcImage-00146
  If `srcImage` is of type `VK_IMAGE_TYPE_1D`, then for each element of `pRegions`, `srcOffset.y` **must** be `0` and `extent.height` **must** be `1`
- VUID-VkCopyImageInfo2-srcOffset-00147

If srcImage is of type VK_IMAGE_TYPE_3D, then for each element of pRegions, srcOffset.z and (extent.depth + srcOffset.z) **must** both be greater than or equal to 0 and less than or equal to the depth of the specified srcSubresource of srcImage

- VUID-VkCopyImageInfo2-srcImage-01785
  If srcImage is of type VK_IMAGE_TYPE_1D, then for each element of pRegions, srcOffset.z **must** be 0 and extent.depth **must** be 1
- VUID-VkCopyImageInfo2-dstImage-01786
  If dstImage is of type VK_IMAGE_TYPE_1D, then for each element of pRegions, dstOffset.z **must** be 0 and extent.depth **must** be 1
- VUID-VkCopyImageInfo2-srcImage-01787
  If srcImage is of type VK_IMAGE_TYPE_2D, then for each element of pRegions, srcOffset.z **must** be 0
- VUID-VkCopyImageInfo2-dstImage-01788
  If dstImage is of type VK_IMAGE_TYPE_2D, then for each element of pRegions, dstOffset.z **must** be 0
- VUID-VkCopyImageInfo2-apiVersion-07933
  If and VkPhysicalDeviceProperties::apiVersion is less than Vulkan 1.1, srcImage and dstImage **must** have the same VkImageType
- VUID-VkCopyImageInfo2-apiVersion-08969
  If and VkPhysicalDeviceProperties::apiVersion is less than Vulkan 1.1, srcImage or dstImage is of type VK_IMAGE_TYPE_2D, then for each element of pRegions, extent.depth **must** be 1
- VUID-VkCopyImageInfo2-srcImage-07743
  If srcImage and dstImage have a different VkImageType, one **must** be VK_IMAGE_TYPE_3D and the other **must** be VK_IMAGE_TYPE_2D
- VUID-VkCopyImageInfo2-srcImage-08793
  If srcImage and dstImage have the same VkImageType, for each element of pRegions, the layerCount members of srcSubresource or dstSubresource **must** match
- VUID-VkCopyImageInfo2-srcImage-01790
  If srcImage and dstImage are both of type VK_IMAGE_TYPE_2D, then for each element of pRegions, extent.depth **must** be 1
- VUID-VkCopyImageInfo2-srcImage-01791
  If srcImage is of type VK_IMAGE_TYPE_2D, and dstImage is of type VK_IMAGE_TYPE_3D, then for each element of pRegions, extent.depth **must** equal srcSubresource.layerCount
- VUID-VkCopyImageInfo2-dstImage-01792
  If dstImage is of type VK_IMAGE_TYPE_2D, and srcImage is of type VK_IMAGE_TYPE_3D, then for each element of pRegions, extent.depth **must** equal dstSubresource.layerCount
- VUID-VkCopyImageInfo2-dstOffset-00150
  For each element of pRegions, dstOffset.x and (extent.width + dstOffset.x) **must** both be greater than or equal to 0 and less than or equal to the width of the specified dstSubresource of dstImage
- VUID-VkCopyImageInfo2-dstOffset-00151
  For each element of pRegions, dstOffset.y and (extent.height + dstOffset.y) **must** both be greater than or equal to 0 and less than or equal to the height of the specified

dstSubresource of dstImage

- VUID-VkCopyImageInfo2-dstImage-00152
  If dstImage is of type VK_IMAGE_TYPE_1D, then for each element of pRegions, dstOffset.y **must** be 0 and extent.height **must** be 1
- VUID-VkCopyImageInfo2-dstOffset-00153
  If dstImage is of type VK_IMAGE_TYPE_3D, then for each element of pRegions, dstOffset.z and (extent.depth + dstOffset.z) **must** both be greater than or equal to 0 and less than or equal to the depth of the specified dstSubresource of dstImage
- VUID-VkCopyImageInfo2-pRegions-07278
  For each element of pRegions, srcOffset.x **must** be a multiple of the texel block extent width of the VkFormat of srcImage
- VUID-VkCopyImageInfo2-pRegions-07279
  For each element of pRegions, srcOffset.y **must** be a multiple of the texel block extent height of the VkFormat of srcImage
- VUID-VkCopyImageInfo2-pRegions-07280
  For each element of pRegions, srcOffset.z **must** be a multiple of the texel block extent depth of the VkFormat of srcImage
- VUID-VkCopyImageInfo2-pRegions-07281
  For each element of pRegions, dstOffset.x **must** be a multiple of the texel block extent width of the VkFormat of dstImage
- VUID-VkCopyImageInfo2-pRegions-07282
  For each element of pRegions, dstOffset.y **must** be a multiple of the texel block extent height of the VkFormat of dstImage
- VUID-VkCopyImageInfo2-pRegions-07283
  For each element of pRegions, dstOffset.z **must** be a multiple of the texel block extent depth of the VkFormat of dstImage
- VUID-VkCopyImageInfo2-srcImage-01728
  For each element of pRegions, if the sum of srcOffset.x and extent.width does not equal the width of the subresource specified by srcSubresource, extent.width **must** be a multiple of the texel block extent width of the VkFormat of srcImage
- VUID-VkCopyImageInfo2-srcImage-01729
  For each element of pRegions, if the sum of srcOffset.y and extent.height does not equal the height of the subresource specified by srcSubresource, extent.height **must** be a multiple of the texel block extent height of the VkFormat of srcImage
- VUID-VkCopyImageInfo2-srcImage-01730
  For each element of pRegions, if the sum of srcOffset.z and extent.depth does not equal the depth of the subresource specified by srcSubresource, extent.depth **must** be a multiple of the texel block extent depth of the VkFormat of srcImage
- VUID-VkCopyImageInfo2-dstImage-01732
  For each element of pRegions, if the sum of dstOffset.x and extent.width does not equal the width of the subresource specified by dstSubresource, extent.width **must** be a multiple of the texel block extent width of the VkFormat of dstImage
- VUID-VkCopyImageInfo2-dstImage-01733

For each element of pRegions, if the sum of dstOffset.y and extent.height does not equal the height of the subresource specified by dstSubresource, extent.height **must** be a multiple of the texel block extent height of the VkFormat of dstImage

- VUID-VkCopyImageInfo2-dstImage-01734
  For each element of pRegions, if the sum of dstOffset.z and extent.depth does not equal the depth of the subresource specified by dstSubresource, extent.depth **must** be a multiple of the texel block extent depth of the VkFormat of dstImage
- VUID-VkCopyImageInfo2-aspect-06662
  If the aspect member of any element of pRegions includes any flag other than VK_IMAGE_ASPECT_STENCIL_BIT or srcImage was not created with separate stencil usage, VK_IMAGE_USAGE_TRANSFER_SRC_BIT **must** have been included in the VkImageCreateInfo ::usage used to create srcImage
- VUID-VkCopyImageInfo2-aspect-06663
  If the aspect member of any element of pRegions includes any flag other than VK_IMAGE_ASPECT_STENCIL_BIT or dstImage was not created with separate stencil usage, VK_IMAGE_USAGE_TRANSFER_DST_BIT **must** have been included in the VkImageCreateInfo ::usage used to create dstImage
- VUID-VkCopyImageInfo2-aspect-06664
  If the aspect member of any element of pRegions includes VK_IMAGE_ASPECT_STENCIL_BIT, and srcImage was created with separate stencil usage, VK_IMAGE_USAGE_TRANSFER_SRC_BIT **must** have been included in the VkImageStencilUsageCreateInfo::stencilUsage used to create srcImage
- VUID-VkCopyImageInfo2-aspect-06665
  If the aspect member of any element of pRegions includes VK_IMAGE_ASPECT_STENCIL_BIT, and dstImage was created with separate stencil usage, VK_IMAGE_USAGE_TRANSFER_DST_BIT **must** have been included in the VkImageStencilUsageCreateInfo::stencilUsage used to create dstImage
- VUID-VkCopyImageInfo2-srcImage-07966
  If srcImage is non-sparse then the image or the specified *disjoint* plane **must** be bound completely and contiguously to a single VkDeviceMemory object
- VUID-VkCopyImageInfo2-srcSubresource-07967
  The srcSubresource.mipLevel member of each element of pRegions **must** be less than the mipLevels specified in VkImageCreateInfo when srcImage was created
- VUID-VkCopyImageInfo2-srcSubresource-07968
  srcSubresource.baseArrayLayer + srcSubresource.layerCount of each element of pRegions **must** be less than or equal to the arrayLayers specified in VkImageCreateInfo when srcImage was created
- VUID-VkCopyImageInfo2-dstImage-07966
  If dstImage is non-sparse then the image or the specified *disjoint* plane **must** be bound completely and contiguously to a single VkDeviceMemory object
- VUID-VkCopyImageInfo2-dstSubresource-07967
  The dstSubresource.mipLevel member of each element of pRegions **must** be less than the mipLevels specified in VkImageCreateInfo when dstImage was created

- VUID-VkCopyImageInfo2-dstSubresource-07968
  `dstSubresource.baseArrayLayer` + `dstSubresource.layerCount` of each element of `pRegions` **must** be less than or equal to the `arrayLayers` specified in VkImageCreateInfo when `dstImage` was created

Valid Usage (Implicit)

- VUID-VkCopyImageInfo2-sType-sType
  `sType` **must** be `VK_STRUCTURE_TYPE_COPY_IMAGE_INFO_2`
- VUID-VkCopyImageInfo2-pNext-pNext
  `pNext` **must** be `NULL`
- VUID-VkCopyImageInfo2-srcImage-parameter
  `srcImage` **must** be a valid VkImage handle
- VUID-VkCopyImageInfo2-srcImageLayout-parameter
  `srcImageLayout` **must** be a valid VkImageLayout value
- VUID-VkCopyImageInfo2-dstImage-parameter
  `dstImage` **must** be a valid VkImage handle
- VUID-VkCopyImageInfo2-dstImageLayout-parameter
  `dstImageLayout` **must** be a valid VkImageLayout value
- VUID-VkCopyImageInfo2-pRegions-parameter
  `pRegions` **must** be a valid pointer to an array of `regionCount` valid VkImageCopy2 structures
- VUID-VkCopyImageInfo2-regionCount-arraylength
  `regionCount` **must** be greater than `0`
- VUID-VkCopyImageInfo2-commonparent
  Both of `dstImage`, and `srcImage` **must** have been created, allocated, or retrieved from the same VkDevice

The `VkImageCopy2` structure is defined as:

```
// Provided by VK_VERSION_1_3
typedef struct VkImageCopy2 {
    VkStructureType             sType;
    const void*                 pNext;
    VkImageSubresourceLayers    srcSubresource;
    VkOffset3D                  srcOffset;
    VkImageSubresourceLayers    dstSubresource;
    VkOffset3D                  dstOffset;
    VkExtent3D                  extent;
} VkImageCopy2;
```

- `sType` is a VkStructureType value identifying this structure.

- `pNext` is `NULL` or a pointer to a structure extending this structure.
- `srcSubresource` and `dstSubresource` are VkImageSubresourceLayers structures specifying the image subresources of the images used for the source and destination image data, respectively.
- `srcOffset` and `dstOffset` select the initial `x`, `y`, and `z` offsets in texels of the sub-regions of the source and destination image data.
- `extent` is the size in texels of the image to copy in `width`, `height` and `depth`.

Valid Usage

- VUID-VkImageCopy2-apiVersion-07940
  If and VkPhysicalDeviceProperties::`apiVersion` is less than Vulkan 1.1, the `aspectMask` member of `srcSubresource` and `dstSubresource` **must** match
- VUID-VkImageCopy2-apiVersion-07941
  If and VkPhysicalDeviceProperties::`apiVersion` is less than Vulkan 1.1, the `layerCount` member of `srcSubresource` and `dstSubresource` **must** match
- VUID-VkImageCopy2-extent-06668
  `extent.width` **must** not be 0
- VUID-VkImageCopy2-extent-06669
  `extent.height` **must** not be 0
- VUID-VkImageCopy2-extent-06670
  `extent.depth` **must** not be 0

Valid Usage (Implicit)

- VUID-VkImageCopy2-sType-sType
  `sType` **must** be `VK_STRUCTURE_TYPE_IMAGE_COPY_2`
- VUID-VkImageCopy2-pNext-pNext
  `pNext` **must** be `NULL`
- VUID-VkImageCopy2-srcSubresource-parameter
  `srcSubresource` **must** be a valid VkImageSubresourceLayers structure
- VUID-VkImageCopy2-dstSubresource-parameter
  `dstSubresource` **must** be a valid VkImageSubresourceLayers structure

19.3. Copying Data Between Buffers and Images

Data **can** be copied between buffers and images, enabling applications to load and store data between images and application-defined offsets in buffer memory.

When copying between a buffer and an image, texels in the image and bytes in the buffer are accessed as follows.

Texels at each coordinate (x,y,z,layer) in the image subresource are accessed, where:

x is in the range [imageOffset.x, imageOffset.x + imageExtent.width),

y is in the range [imageOffset.y, imageOffset.y + imageExtent.height),

z is in the range [imageOffset.z, imageOffset.z + imageExtent.depth),

layer is in the range [eq]#[imageSubresource.baseArrayLayer, imageSubresource.baseArrayLayer + imageSubresource.layerCount)

For each (x,y,z,layer) coordinate in the image, bytes in the buffer are accessed at offsets in the range [texelOffset, texelOffset + blockSize), where:

texelOffset = bufferOffset + (⌊(x - imageOffset.x) / blockWidth⌋ × blockSize) + (⌊(y - imageOffset.y) / blockHeight⌋ × rowExtent) + (⌊(z - imageOffset.z) / blockDepth⌋ × sliceExtent) + ((layer - imageSubresource.baseArrayLayer) × layerExtent)

rowExtent = ⌈ max(bufferRowLength, imageExtent.width) / blockWidth ⌉ × blockSize

sliceExtent = ⌈ max(bufferImageHeight, imageExtent.height) / blockHeight ⌉ × rowExtent

layerExtent = ⌈ imageExtent.depth / blockDepth ⌉ × sliceExtent

and where blockSize, blockWidth, blockHeight, and blockDepth are the texel block size and extents of the image's format.

When copying between a buffer and the depth or stencil aspect of an image, data in the buffer is assumed to be laid out as separate planes rather than interleaved. Addressing calculations are thus performed for a different format than the base image, according to the aspect, as described in the following table:

Table 19. Depth/Stencil Aspect Copy Table

Base Format	Depth Aspect Format	Stencil Aspect Format
VK_FORMAT_D16_UNORM	VK_FORMAT_D16_UNORM	-
VK_FORMAT_X8_D24_UNORM_PACK32	VK_FORMAT_X8_D24_UNORM_PACK32	-
VK_FORMAT_D32_SFLOAT	VK_FORMAT_D32_SFLOAT	-
VK_FORMAT_S8_UINT	-	VK_FORMAT_S8_UINT
VK_FORMAT_D16_UNORM_S8_UINT	VK_FORMAT_D16_UNORM	VK_FORMAT_S8_UINT
VK_FORMAT_D24_UNORM_S8_UINT	VK_FORMAT_X8_D24_UNORM_PACK32	VK_FORMAT_S8_UINT

Base Format	Depth Aspect Format	Stencil Aspect Format
VK_FORMAT_D32_SFLOAT_S8_UINT	VK_FORMAT_D32_SFLOAT	VK_FORMAT_S8_UINT

When copying between a buffer and any plane of a multi-planar image, addressing calculations are performed using the compatible format for that plane, rather than the format of the multi-planar image.

Each texel block is copied from one resource to the other according to the above addressing equations.

To copy data from a buffer object to an image object, call:

```
// Provided by VK_VERSION_1_0
void vkCmdCopyBufferToImage(
    VkCommandBuffer                             commandBuffer,
    VkBuffer                                    srcBuffer,
    VkImage                                     dstImage,
    VkImageLayout                               dstImageLayout,
    uint32_t                                    regionCount,
    const VkBufferImageCopy*                    pRegions);
```

- commandBuffer is the command buffer into which the command will be recorded.
- srcBuffer is the source buffer.
- dstImage is the destination image.
- dstImageLayout is the layout of the destination image subresources for the copy.
- regionCount is the number of regions to copy.
- pRegions is a pointer to an array of VkBufferImageCopy structures specifying the regions to copy.

Each source region specified by pRegions is copied from the source buffer to the destination region of the destination image according to the addressing calculations for each resource. If any of the specified regions in srcBuffer overlaps in memory with any of the specified regions in dstImage, values read from those overlapping regions are undefined. If any region accesses a depth aspect in dstImage values copied from srcBuffer outside of the range [0,1] will be written as undefined values to the destination image.

Copy regions for the image **must** be aligned to a multiple of the texel block extent in each dimension, except at the edges of the image, where region extents **must** match the edge of the image.

Valid Usage

- VUID-vkCmdCopyBufferToImage-dstImage-07966
  If dstImage is non-sparse then the image or the specified *disjoint* plane **must** be bound completely and contiguously to a single VkDeviceMemory object
- VUID-vkCmdCopyBufferToImage-imageSubresource-07967

The `imageSubresource.mipLevel` member of each element of `pRegions` **must** be less than the `mipLevels` specified in VkImageCreateInfo when `dstImage` was created

- VUID-vkCmdCopyBufferToImage-imageSubresource-07968
  `imageSubresource.baseArrayLayer` + `imageSubresource.layerCount` of each element of `pRegions` **must** be less than or equal to the `arrayLayers` specified in VkImageCreateInfo when `dstImage` was created
- VUID-vkCmdCopyBufferToImage-imageSubresource-07970
  The image region specified by each element of `pRegions` **must** be contained within the specified `imageSubresource` of `dstImage`
- VUID-vkCmdCopyBufferToImage-imageSubresource-07971
  For each element of `pRegions`, `imageOffset.x` and (`imageExtent.width` + `imageOffset.x`) **must** both be greater than or equal to `0` and less than or equal to the width of the specified `imageSubresource` of `dstImage`
- VUID-vkCmdCopyBufferToImage-imageSubresource-07972
  For each element of `pRegions`, `imageOffset.y` and (`imageExtent.height` + `imageOffset.y`) **must** both be greater than or equal to `0` and less than or equal to the height of the specified `imageSubresource` of `dstImage`
- VUID-vkCmdCopyBufferToImage-dstImage-07973
  `dstImage` **must** have a sample count equal to `VK_SAMPLE_COUNT_1_BIT`
- VUID-vkCmdCopyBufferToImage-commandBuffer-01828
  If `commandBuffer` is an unprotected command buffer and `protectedNoFault` is not supported, `srcBuffer` **must** not be a protected buffer
- VUID-vkCmdCopyBufferToImage-commandBuffer-01829
  If `commandBuffer` is an unprotected command buffer and `protectedNoFault` is not supported, `dstImage` **must** not be a protected image
- VUID-vkCmdCopyBufferToImage-commandBuffer-01830
  If `commandBuffer` is a protected command buffer and `protectedNoFault` is not supported, `dstImage` **must** not be an unprotected image
- VUID-vkCmdCopyBufferToImage-commandBuffer-07737
  If the queue family used to create the VkCommandPool which `commandBuffer` was allocated from does not support `VK_QUEUE_GRAPHICS_BIT` or `VK_QUEUE_COMPUTE_BIT`, the `bufferOffset` member of any element of `pRegions` **must** be a multiple of `4`
- VUID-vkCmdCopyBufferToImage-imageOffset-07738
  The `imageOffset` and `imageExtent` members of each element of `pRegions` **must** respect the image transfer granularity requirements of `commandBuffer`'s command pool's queue family, as described in VkQueueFamilyProperties
- VUID-vkCmdCopyBufferToImage-commandBuffer-07739
  If the queue family used to create the VkCommandPool which `commandBuffer` was allocated from does not support `VK_QUEUE_GRAPHICS_BIT`, for each element of `pRegions`, the `aspectMask` member of `imageSubresource` **must** not be `VK_IMAGE_ASPECT_DEPTH_BIT` or `VK_IMAGE_ASPECT_STENCIL_BIT`

- VUID-vkCmdCopyBufferToImage-pRegions-00171
  `srcBuffer` **must** be large enough to contain all buffer locations that are accessed according to Buffer and Image Addressing, for each element of `pRegions`
- VUID-vkCmdCopyBufferToImage-pRegions-00173
  The union of all source regions, and the union of all destination regions, specified by the elements of `pRegions`, **must** not overlap in memory
- VUID-vkCmdCopyBufferToImage-srcBuffer-00174
  `srcBuffer` **must** have been created with `VK_BUFFER_USAGE_TRANSFER_SRC_BIT` usage flag
- VUID-vkCmdCopyBufferToImage-dstImage-01997
  The format features of `dstImage` **must** contain `VK_FORMAT_FEATURE_TRANSFER_DST_BIT`
- VUID-vkCmdCopyBufferToImage-srcBuffer-00176
  If `srcBuffer` is non-sparse then it **must** be bound completely and contiguously to a single `VkDeviceMemory` object
- VUID-vkCmdCopyBufferToImage-dstImage-00177
  `dstImage` **must** have been created with `VK_IMAGE_USAGE_TRANSFER_DST_BIT` usage flag
- VUID-vkCmdCopyBufferToImage-dstImageLayout-00180
  `dstImageLayout` **must** specify the layout of the image subresources of `dstImage` specified in `pRegions` at the time this command is executed on a `VkDevice`
- VUID-vkCmdCopyBufferToImage-dstImageLayout-01396
  `dstImageLayout` **must** be `VK_IMAGE_LAYOUT_TRANSFER_DST_OPTIMAL`, or `VK_IMAGE_LAYOUT_GENERAL`
- VUID-vkCmdCopyBufferToImage-pRegions-07931
  For each element of `pRegions` whose `imageSubresource` contains a depth aspect, the data in `srcBuffer` **must** be in the range [0,1]
- VUID-vkCmdCopyBufferToImage-dstImage-07979
  If `dstImage` is of type `VK_IMAGE_TYPE_1D`, then for each element of `pRegions`, `imageOffset.y` **must** be `0` and `imageExtent.height` **must** be `1`
- VUID-vkCmdCopyBufferToImage-imageOffset-09104
  For each element of `pRegions`, `imageOffset.z` and (`imageExtent.depth` + `imageOffset.z`) **must** both be greater than or equal to `0` and less than or equal to the depth of the specified `imageSubresource` of `dstImage`
- VUID-vkCmdCopyBufferToImage-dstImage-07980
  If `dstImage` is of type `VK_IMAGE_TYPE_1D` or `VK_IMAGE_TYPE_2D`, then for each element of `pRegions`, `imageOffset.z` **must** be `0` and `imageExtent.depth` **must** be `1`
- VUID-vkCmdCopyBufferToImage-dstImage-07274
  For each element of `pRegions`, `imageOffset.x` **must** be a multiple of the texel block extent width of the VkFormat of `dstImage`
- VUID-vkCmdCopyBufferToImage-dstImage-07275
  For each element of `pRegions`, `imageOffset.y` **must** be a multiple of the texel block extent height of the VkFormat of `dstImage`
- VUID-vkCmdCopyBufferToImage-dstImage-07276
  For each element of `pRegions`, `imageOffset.z` **must** be a multiple of the texel block extent depth of the VkFormat of `dstImage`

- VUID-vkCmdCopyBufferToImage-dstImage-00207
  For each element of `pRegions`, if the sum of `imageOffset.x` and `extent.width` does not equal the width of the subresource specified by `imageSubresource`, `extent.width` **must** be a multiple of the texel block extent width of the VkFormat of `dstImage`
- VUID-vkCmdCopyBufferToImage-dstImage-00208
  For each element of `pRegions`, if the sum of `imageOffset.y` and `extent.height` does not equal the height of the subresource specified by `imageSubresource`, `extent.height` **must** be a multiple of the texel block extent height of the VkFormat of `dstImage`
- VUID-vkCmdCopyBufferToImage-dstImage-00209
  For each element of `pRegions`, if the sum of `imageOffset.z` and `extent.depth` does not equal the depth of the subresource specified by `srcSubresource`, `extent.depth` **must** be a multiple of the texel block extent depth of the VkFormat of `dstImage`
- VUID-vkCmdCopyBufferToImage-imageSubresource-09105
  For each element of `pRegions`, `imageSubresource.aspectMask` **must** specify aspects present in `dstImage`
- VUID-vkCmdCopyBufferToImage-dstImage-07981
  If `dstImage` has a multi-planar image format, then for each element of `pRegions`, `imageSubresource.aspectMask` **must** be a single valid multi-planar aspect mask bit
- VUID-vkCmdCopyBufferToImage-dstImage-07983
  If `dstImage` is of type `VK_IMAGE_TYPE_3D`, for each element of `pRegions`, `imageSubresource.baseArrayLayer` **must** be `0` and `imageSubresource.layerCount` **must** be `1`
- VUID-vkCmdCopyBufferToImage-bufferRowLength-09106
  For each element of `pRegions`, `bufferRowLength` **must** be a multiple of the texel block extent width of the VkFormat of `dstImage`
- VUID-vkCmdCopyBufferToImage-bufferImageHeight-09107
  For each element of `pRegions`, `bufferImageHeight` **must** be a multiple of the texel block extent height of the VkFormat of `dstImage`
- VUID-vkCmdCopyBufferToImage-bufferRowLength-09108
  For each element of `pRegions`, `bufferRowLength` divided by the texel block extent width and then multiplied by the texel block size of `dstImage` **must** be less than or equal to 2^{31}-1
- VUID-vkCmdCopyBufferToImage-dstImage-07975
  If `dstImage` does not have either a depth/stencil format or a multi-planar format, then for each element of `pRegions`, `bufferOffset` **must** be a multiple of the texel block size
- VUID-vkCmdCopyBufferToImage-dstImage-07976
  If `dstImage` has a multi-planar format, then for each element of `pRegions`, `bufferOffset` **must** be a multiple of the element size of the compatible format for the format and the `aspectMask` of the `imageSubresource` as defined in Compatible Formats of Planes of Multi-Planar Formats
- VUID-vkCmdCopyBufferToImage-dstImage-07978
  If `dstImage` has a depth/stencil format, the `bufferOffset` member of any element of `pRegions` **must** be a multiple of `4`

Valid Usage (Implicit)

- VUID-vkCmdCopyBufferToImage-commandBuffer-parameter
  `commandBuffer` **must** be a valid VkCommandBuffer handle
- VUID-vkCmdCopyBufferToImage-srcBuffer-parameter
  `srcBuffer` **must** be a valid VkBuffer handle
- VUID-vkCmdCopyBufferToImage-dstImage-parameter
  `dstImage` **must** be a valid VkImage handle
- VUID-vkCmdCopyBufferToImage-dstImageLayout-parameter
  `dstImageLayout` **must** be a valid VkImageLayout value
- VUID-vkCmdCopyBufferToImage-pRegions-parameter
  `pRegions` **must** be a valid pointer to an array of `regionCount` valid VkBufferImageCopy structures
- VUID-vkCmdCopyBufferToImage-commandBuffer-recording
  `commandBuffer` **must** be in the recording state
- VUID-vkCmdCopyBufferToImage-commandBuffer-cmdpool
  The `VkCommandPool` that `commandBuffer` was allocated from **must** support transfer, graphics, or compute operations
- VUID-vkCmdCopyBufferToImage-renderpass
  This command **must** only be called outside of a render pass instance
- VUID-vkCmdCopyBufferToImage-regionCount-arraylength
  `regionCount` **must** be greater than `0`
- VUID-vkCmdCopyBufferToImage-commonparent
  Each of `commandBuffer`, `dstImage`, and `srcBuffer` **must** have been created, allocated, or retrieved from the same VkDevice

Host Synchronization

- Host access to `commandBuffer` **must** be externally synchronized
- Host access to the `VkCommandPool` that `commandBuffer` was allocated from **must** be externally synchronized

Command Properties

Command Buffer Levels	Render Pass Scope	Supported Queue Types	Command Type
Primary Secondary	Outside	Transfer Graphics Compute	Action

To copy data from an image object to a buffer object, call:

```
// Provided by VK_VERSION_1_0
void vkCmdCopyImageToBuffer(
    VkCommandBuffer                             commandBuffer,
    VkImage                                     srcImage,
    VkImageLayout                               srcImageLayout,
    VkBuffer                                    dstBuffer,
    uint32_t                                    regionCount,
    const VkBufferImageCopy*                    pRegions);
```

- `commandBuffer` is the command buffer into which the command will be recorded.
- `srcImage` is the source image.
- `srcImageLayout` is the layout of the source image subresources for the copy.
- `dstBuffer` is the destination buffer.
- `regionCount` is the number of regions to copy.
- `pRegions` is a pointer to an array of VkBufferImageCopy structures specifying the regions to copy.

Each source region specified by `pRegions` is copied from the source image to the destination region of the destination buffer according to the addressing calculations for each resource. If any of the specified regions in `srcImage` overlaps in memory with any of the specified regions in `dstBuffer`, values read from those overlapping regions are undefined.

Copy regions for the image **must** be aligned to a multiple of the texel block extent in each dimension, except at the edges of the image, where region extents **must** match the edge of the image.

Valid Usage

- VUID-vkCmdCopyImageToBuffer-srcImage-07966
  If `srcImage` is non-sparse then the image or the specified *disjoint* plane **must** be bound completely and contiguously to a single `VkDeviceMemory` object
- VUID-vkCmdCopyImageToBuffer-imageSubresource-07967
  The `imageSubresource.mipLevel` member of each element of `pRegions` **must** be less than the `mipLevels` specified in VkImageCreateInfo when `srcImage` was created
- VUID-vkCmdCopyImageToBuffer-imageSubresource-07968
  `imageSubresource.baseArrayLayer` + `imageSubresource.layerCount` of each element of `pRegions` **must** be less than or equal to the `arrayLayers` specified in VkImageCreateInfo when `srcImage` was created
- VUID-vkCmdCopyImageToBuffer-imageSubresource-07970
  The image region specified by each element of `pRegions` **must** be contained within the specified `imageSubresource` of `srcImage`
- VUID-vkCmdCopyImageToBuffer-imageSubresource-07971
  For each element of `pRegions`, `imageOffset.x` and (`imageExtent.width` + `imageOffset.x`) **must**

both be greater than or equal to `0` and less than or equal to the width of the specified `imageSubresource` of `srcImage`

- VUID-vkCmdCopyImageToBuffer-imageSubresource-07972
  For each element of `pRegions`, `imageOffset.y` and (`imageExtent.height` + `imageOffset.y`) **must** both be greater than or equal to `0` and less than or equal to the height of the specified `imageSubresource` of `srcImage`
- VUID-vkCmdCopyImageToBuffer-srcImage-07973
  `srcImage` **must** have a sample count equal to `VK_SAMPLE_COUNT_1_BIT`
- VUID-vkCmdCopyImageToBuffer-commandBuffer-01831
  If `commandBuffer` is an unprotected command buffer and `protectedNoFault` is not supported, `srcImage` **must** not be a protected image
- VUID-vkCmdCopyImageToBuffer-commandBuffer-01832
  If `commandBuffer` is an unprotected command buffer and `protectedNoFault` is not supported, `dstBuffer` **must** not be a protected buffer
- VUID-vkCmdCopyImageToBuffer-commandBuffer-01833
  If `commandBuffer` is a protected command buffer and `protectedNoFault` is not supported, `dstBuffer` **must** not be an unprotected buffer
- VUID-vkCmdCopyImageToBuffer-commandBuffer-07746
  If the queue family used to create the VkCommandPool which `commandBuffer` was allocated from does not support `VK_QUEUE_GRAPHICS_BIT` or `VK_QUEUE_COMPUTE_BIT`, the `bufferOffset` member of any element of `pRegions` **must** be a multiple of `4`
- VUID-vkCmdCopyImageToBuffer-imageOffset-07747
  The `imageOffset` and `imageExtent` members of each element of `pRegions` **must** respect the image transfer granularity requirements of `commandBuffer`'s command pool's queue family, as described in VkQueueFamilyProperties
- VUID-vkCmdCopyImageToBuffer-pRegions-00183
  `dstBuffer` **must** be large enough to contain all buffer locations that are accessed according to Buffer and Image Addressing, for each element of `pRegions`
- VUID-vkCmdCopyImageToBuffer-pRegions-00184
  The union of all source regions, and the union of all destination regions, specified by the elements of `pRegions`, **must** not overlap in memory
- VUID-vkCmdCopyImageToBuffer-srcImage-00186
  `srcImage` **must** have been created with `VK_IMAGE_USAGE_TRANSFER_SRC_BIT` usage flag
- VUID-vkCmdCopyImageToBuffer-srcImage-01998
  The format features of `srcImage` **must** contain `VK_FORMAT_FEATURE_TRANSFER_SRC_BIT`
- VUID-vkCmdCopyImageToBuffer-dstBuffer-00191
  `dstBuffer` **must** have been created with `VK_BUFFER_USAGE_TRANSFER_DST_BIT` usage flag
- VUID-vkCmdCopyImageToBuffer-dstBuffer-00192
  If `dstBuffer` is non-sparse then it **must** be bound completely and contiguously to a single `VkDeviceMemory` object
- VUID-vkCmdCopyImageToBuffer-srcImageLayout-00189

srcImageLayout **must** specify the layout of the image subresources of srcImage specified in pRegions at the time this command is executed on a VkDevice

- VUID-vkCmdCopyImageToBuffer-srcImageLayout-01397
  srcImageLayout **must** be VK_IMAGE_LAYOUT_TRANSFER_SRC_OPTIMAL, or VK_IMAGE_LAYOUT_GENERAL
- VUID-vkCmdCopyImageToBuffer-srcImage-07979
  If srcImage is of type VK_IMAGE_TYPE_1D, then for each element of pRegions, imageOffset.y **must** be 0 and imageExtent.height **must** be 1
- VUID-vkCmdCopyImageToBuffer-imageOffset-09104
  For each element of pRegions, imageOffset.z and (imageExtent.depth + imageOffset.z) **must** both be greater than or equal to 0 and less than or equal to the depth of the specified imageSubresource of srcImage
- VUID-vkCmdCopyImageToBuffer-srcImage-07980
  If srcImage is of type VK_IMAGE_TYPE_1D or VK_IMAGE_TYPE_2D, then for each element of pRegions, imageOffset.z **must** be 0 and imageExtent.depth **must** be 1
- VUID-vkCmdCopyImageToBuffer-srcImage-07274
  For each element of pRegions, imageOffset.x **must** be a multiple of the texel block extent width of the VkFormat of srcImage
- VUID-vkCmdCopyImageToBuffer-srcImage-07275
  For each element of pRegions, imageOffset.y **must** be a multiple of the texel block extent height of the VkFormat of srcImage
- VUID-vkCmdCopyImageToBuffer-srcImage-07276
  For each element of pRegions, imageOffset.z **must** be a multiple of the texel block extent depth of the VkFormat of srcImage
- VUID-vkCmdCopyImageToBuffer-srcImage-00207
  For each element of pRegions, if the sum of imageOffset.x and extent.width does not equal the width of the subresource specified by imageSubresource, extent.width **must** be a multiple of the texel block extent width of the VkFormat of srcImage
- VUID-vkCmdCopyImageToBuffer-srcImage-00208
  For each element of pRegions, if the sum of imageOffset.y and extent.height does not equal the height of the subresource specified by imageSubresource, extent.height **must** be a multiple of the texel block extent height of the VkFormat of srcImage
- VUID-vkCmdCopyImageToBuffer-srcImage-00209
  For each element of pRegions, if the sum of imageOffset.z and extent.depth does not equal the depth of the subresource specified by srcSubresource, extent.depth **must** be a multiple of the texel block extent depth of the VkFormat of srcImage
- VUID-vkCmdCopyImageToBuffer-imageSubresource-09105
  For each element of pRegions, imageSubresource.aspectMask **must** specify aspects present in srcImage
- VUID-vkCmdCopyImageToBuffer-srcImage-07981
  If srcImage has a multi-planar image format, then for each element of pRegions, imageSubresource.aspectMask **must** be a single valid multi-planar aspect mask bit
- VUID-vkCmdCopyImageToBuffer-srcImage-07983

If `srcImage` is of type `VK_IMAGE_TYPE_3D`, for each element of `pRegions`, `imageSubresource.baseArrayLayer` **must** be `0` and `imageSubresource.layerCount` **must** be `1`

- VUID-vkCmdCopyImageToBuffer-bufferRowLength-09106
  For each element of `pRegions`, `bufferRowLength` **must** be a multiple of the texel block extent width of the VkFormat of `srcImage`
- VUID-vkCmdCopyImageToBuffer-bufferImageHeight-09107
  For each element of `pRegions`, `bufferImageHeight` **must** be a multiple of the texel block extent height of the VkFormat of `srcImage`
- VUID-vkCmdCopyImageToBuffer-bufferRowLength-09108
  For each element of `pRegions`, `bufferRowLength` divided by the texel block extent width and then multiplied by the texel block size of `srcImage` **must** be less than or equal to 2^{31}-1
- VUID-vkCmdCopyImageToBuffer-srcImage-07975
  If `srcImage` does not have either a depth/stencil format or a multi-planar format, then for each element of `pRegions`, `bufferOffset` **must** be a multiple of the texel block size
- VUID-vkCmdCopyImageToBuffer-srcImage-07976
  If `srcImage` has a multi-planar format, then for each element of `pRegions`, `bufferOffset` **must** be a multiple of the element size of the compatible format for the format and the `aspectMask` of the `imageSubresource` as defined in Compatible Formats of Planes of Multi-Planar Formats
- VUID-vkCmdCopyImageToBuffer-srcImage-07978
  If `srcImage` has a depth/stencil format, the `bufferOffset` member of any element of `pRegions` **must** be a multiple of `4`

Valid Usage (Implicit)

- VUID-vkCmdCopyImageToBuffer-commandBuffer-parameter
  `commandBuffer` **must** be a valid VkCommandBuffer handle
- VUID-vkCmdCopyImageToBuffer-srcImage-parameter
  `srcImage` **must** be a valid VkImage handle
- VUID-vkCmdCopyImageToBuffer-srcImageLayout-parameter
  `srcImageLayout` **must** be a valid VkImageLayout value
- VUID-vkCmdCopyImageToBuffer-dstBuffer-parameter
  `dstBuffer` **must** be a valid VkBuffer handle
- VUID-vkCmdCopyImageToBuffer-pRegions-parameter
  `pRegions` **must** be a valid pointer to an array of `regionCount` valid VkBufferImageCopy structures
- VUID-vkCmdCopyImageToBuffer-commandBuffer-recording
  `commandBuffer` **must** be in the recording state
- VUID-vkCmdCopyImageToBuffer-commandBuffer-cmdpool
  The `VkCommandPool` that `commandBuffer` was allocated from **must** support transfer, graphics, or compute operations

- VUID-vkCmdCopyImageToBuffer-renderpass
  This command **must** only be called outside of a render pass instance
- VUID-vkCmdCopyImageToBuffer-regionCount-arraylength
  `regionCount` **must** be greater than `0`
- VUID-vkCmdCopyImageToBuffer-commonparent
  Each of `commandBuffer`, `dstBuffer`, and `srcImage` **must** have been created, allocated, or retrieved from the same VkDevice

Host Synchronization

- Host access to `commandBuffer` **must** be externally synchronized
- Host access to the `VkCommandPool` that `commandBuffer` was allocated from **must** be externally synchronized

Command Properties

Command Buffer Levels	Render Pass Scope	Supported Queue Types	Command Type
Primary Secondary	Outside	Transfer Graphics Compute	Action

For both vkCmdCopyBufferToImage and vkCmdCopyImageToBuffer, each element of `pRegions` is a structure defined as:

```
// Provided by VK_VERSION_1_0
typedef struct VkBufferImageCopy {
    VkDeviceSize                bufferOffset;
    uint32_t                    bufferRowLength;
    uint32_t                    bufferImageHeight;
    VkImageSubresourceLayers    imageSubresource;
    VkOffset3D                  imageOffset;
    VkExtent3D                  imageExtent;
} VkBufferImageCopy;
```

- `bufferOffset` is the offset in bytes from the start of the buffer object where the image data is copied from or to.
- `bufferRowLength` and `bufferImageHeight` specify in texels a subregion of a larger two- or three-dimensional image in buffer memory, and control the addressing calculations. If either of these values is zero, that aspect of the buffer memory is considered to be tightly packed according to the `imageExtent`.
- `imageSubresource` is a VkImageSubresourceLayers used to specify the specific image

subresources of the image used for the source or destination image data.

- `imageOffset` selects the initial `x`, `y`, `z` offsets in texels of the sub-region of the source or destination image data.
- `imageExtent` is the size in texels of the image to copy in `width`, `height` and `depth`.

Valid Usage

- VUID-VkBufferImageCopy-bufferRowLength-09101
  `bufferRowLength` **must** be `0`, or greater than or equal to the `width` member of `imageExtent`
- VUID-VkBufferImageCopy-bufferImageHeight-09102
  `bufferImageHeight` **must** be `0`, or greater than or equal to the `height` member of `imageExtent`
- VUID-VkBufferImageCopy-aspectMask-09103
  The `aspectMask` member of `imageSubresource` **must** only have a single bit set
- VUID-VkBufferImageCopy-imageExtent-06659
  `imageExtent.width` **must** not be 0
- VUID-VkBufferImageCopy-imageExtent-06660
  `imageExtent.height` **must** not be 0
- VUID-VkBufferImageCopy-imageExtent-06661
  `imageExtent.depth` **must** not be 0

Valid Usage (Implicit)

- VUID-VkBufferImageCopy-imageSubresource-parameter
  `imageSubresource` **must** be a valid VkImageSubresourceLayers structure

More extensible versions of the commands to copy between buffers and images are defined below.

To copy data from a buffer object to an image object, call:

```
// Provided by VK_VERSION_1_3
void vkCmdCopyBufferToImage2(
    VkCommandBuffer                             commandBuffer,
    const VkCopyBufferToImageInfo2*             pCopyBufferToImageInfo);
```

- `commandBuffer` is the command buffer into which the command will be recorded.
- `pCopyBufferToImageInfo` is a pointer to a VkCopyBufferToImageInfo2 structure describing the copy parameters.

This command is functionally identical to vkCmdCopyBufferToImage, but includes extensible sub-structures that include `sType` and `pNext` parameters, allowing them to be more easily extended.

Valid Usage

- VUID-vkCmdCopyBufferToImage2-commandBuffer-01828
  If `commandBuffer` is an unprotected command buffer and `protectedNoFault` is not supported, `srcBuffer` **must** not be a protected buffer
- VUID-vkCmdCopyBufferToImage2-commandBuffer-01829
  If `commandBuffer` is an unprotected command buffer and `protectedNoFault` is not supported, `dstImage` **must** not be a protected image
- VUID-vkCmdCopyBufferToImage2-commandBuffer-01830
  If `commandBuffer` is a protected command buffer and `protectedNoFault` is not supported, `dstImage` **must** not be an unprotected image
- VUID-vkCmdCopyBufferToImage2-commandBuffer-07737
  If the queue family used to create the VkCommandPool which `commandBuffer` was allocated from does not support `VK_QUEUE_GRAPHICS_BIT` or `VK_QUEUE_COMPUTE_BIT`, the `bufferOffset` member of any element of `pCopyBufferToImageInfo->pRegions` **must** be a multiple of `4`
- VUID-vkCmdCopyBufferToImage2-imageOffset-07738
  The `imageOffset` and `imageExtent` members of each element of `pCopyBufferToImageInfo->pRegions` **must** respect the image transfer granularity requirements of `commandBuffer`'s command pool's queue family, as described in VkQueueFamilyProperties
- VUID-vkCmdCopyBufferToImage2-commandBuffer-07739
  If the queue family used to create the VkCommandPool which `commandBuffer` was allocated from does not support `VK_QUEUE_GRAPHICS_BIT`, for each element of `pCopyBufferToImageInfo->pRegions`, the `aspectMask` member of `imageSubresource` **must** not be `VK_IMAGE_ASPECT_DEPTH_BIT` or `VK_IMAGE_ASPECT_STENCIL_BIT`

Valid Usage (Implicit)

- VUID-vkCmdCopyBufferToImage2-commandBuffer-parameter
  `commandBuffer` **must** be a valid VkCommandBuffer handle
- VUID-vkCmdCopyBufferToImage2-pCopyBufferToImageInfo-parameter
  `pCopyBufferToImageInfo` **must** be a valid pointer to a valid VkCopyBufferToImageInfo2 structure
- VUID-vkCmdCopyBufferToImage2-commandBuffer-recording
  `commandBuffer` **must** be in the recording state
- VUID-vkCmdCopyBufferToImage2-commandBuffer-cmdpool
  The `VkCommandPool` that `commandBuffer` was allocated from **must** support transfer, graphics, or compute operations
- VUID-vkCmdCopyBufferToImage2-renderpass
  This command **must** only be called outside of a render pass instance

Host Synchronization

- Host access to `commandBuffer` **must** be externally synchronized
- Host access to the `VkCommandPool` that `commandBuffer` was allocated from **must** be externally synchronized

Command Properties

Command Buffer Levels	Render Pass Scope	Supported Queue Types	Command Type
Primary Secondary	Outside	Transfer Graphics Compute	Action

The `VkCopyBufferToImageInfo2` structure is defined as:

```
// Provided by VK_VERSION_1_3
typedef struct VkCopyBufferToImageInfo2 {
    VkStructureType              sType;
    const void*                  pNext;
    VkBuffer                     srcBuffer;
    VkImage                      dstImage;
    VkImageLayout                dstImageLayout;
    uint32_t                     regionCount;
    const VkBufferImageCopy2*    pRegions;
} VkCopyBufferToImageInfo2;
```

- `sType` is a VkStructureType value identifying this structure.
- `pNext` is `NULL` or a pointer to a structure extending this structure.
- `srcBuffer` is the source buffer.
- `dstImage` is the destination image.
- `dstImageLayout` is the layout of the destination image subresources for the copy.
- `regionCount` is the number of regions to copy.
- `pRegions` is a pointer to an array of VkBufferImageCopy2 structures specifying the regions to copy.

Valid Usage

- VUID-VkCopyBufferToImageInfo2-pRegions-04565
  The image region specified by each element of `pRegions` **must** be contained within the specified `imageSubresource` of `dstImage`

- VUID-VkCopyBufferToImageInfo2-pRegions-00171
  `srcBuffer` **must** be large enough to contain all buffer locations that are accessed according to Buffer and Image Addressing, for each element of `pRegions`
- VUID-VkCopyBufferToImageInfo2-pRegions-00173
  The union of all source regions, and the union of all destination regions, specified by the elements of `pRegions`, **must** not overlap in memory
- VUID-VkCopyBufferToImageInfo2-srcBuffer-00174
  `srcBuffer` **must** have been created with `VK_BUFFER_USAGE_TRANSFER_SRC_BIT` usage flag
- VUID-VkCopyBufferToImageInfo2-dstImage-01997
  The format features of `dstImage` **must** contain `VK_FORMAT_FEATURE_TRANSFER_DST_BIT`
- VUID-VkCopyBufferToImageInfo2-srcBuffer-00176
  If `srcBuffer` is non-sparse then it **must** be bound completely and contiguously to a single `VkDeviceMemory` object
- VUID-VkCopyBufferToImageInfo2-dstImage-00177
  `dstImage` **must** have been created with `VK_IMAGE_USAGE_TRANSFER_DST_BIT` usage flag
- VUID-VkCopyBufferToImageInfo2-dstImageLayout-00180
  `dstImageLayout` **must** specify the layout of the image subresources of `dstImage` specified in `pRegions` at the time this command is executed on a `VkDevice`
- VUID-VkCopyBufferToImageInfo2-dstImageLayout-01396
  `dstImageLayout` **must** be `VK_IMAGE_LAYOUT_TRANSFER_DST_OPTIMAL`, or `VK_IMAGE_LAYOUT_GENERAL`
- VUID-VkCopyBufferToImageInfo2-pRegions-07931
  For each element of `pRegions` whose `imageSubresource` contains a depth aspect, the data in `srcBuffer` **must** be in the range [0,1]
- VUID-VkCopyBufferToImageInfo2-dstImage-07966
  If `dstImage` is non-sparse then the image or the specified *disjoint* plane **must** be bound completely and contiguously to a single `VkDeviceMemory` object
- VUID-VkCopyBufferToImageInfo2-imageSubresource-07967
  The `imageSubresource.mipLevel` member of each element of `pRegions` **must** be less than the `mipLevels` specified in VkImageCreateInfo when `dstImage` was created
- VUID-VkCopyBufferToImageInfo2-imageSubresource-07968
  `imageSubresource.baseArrayLayer` + `imageSubresource.layerCount` of each element of `pRegions` **must** be less than or equal to the `arrayLayers` specified in VkImageCreateInfo when `dstImage` was created
- VUID-VkCopyBufferToImageInfo2-dstImage-07973
  `dstImage` **must** have a sample count equal to `VK_SAMPLE_COUNT_1_BIT`
- VUID-VkCopyBufferToImageInfo2-dstImage-07979
  If `dstImage` is of type `VK_IMAGE_TYPE_1D`, then for each element of `pRegions`, `imageOffset.y` **must** be `0` and `imageExtent.height` **must** be `1`
- VUID-VkCopyBufferToImageInfo2-imageOffset-09104
  For each element of `pRegions`, `imageOffset.z` and (`imageExtent.depth` + `imageOffset.z`) **must** both be greater than or equal to `0` and less than or equal to the depth of the specified

imageSubresource of dstImage

- VUID-VkCopyBufferToImageInfo2-dstImage-07980
  If dstImage is of type VK_IMAGE_TYPE_1D or VK_IMAGE_TYPE_2D, then for each element of pRegions, imageOffset.z **must** be 0 and imageExtent.depth **must** be 1
- VUID-VkCopyBufferToImageInfo2-dstImage-07274
  For each element of pRegions, imageOffset.x **must** be a multiple of the texel block extent width of the VkFormat of dstImage
- VUID-VkCopyBufferToImageInfo2-dstImage-07275
  For each element of pRegions, imageOffset.y **must** be a multiple of the texel block extent height of the VkFormat of dstImage
- VUID-VkCopyBufferToImageInfo2-dstImage-07276
  For each element of pRegions, imageOffset.z **must** be a multiple of the texel block extent depth of the VkFormat of dstImage
- VUID-VkCopyBufferToImageInfo2-dstImage-00207
  For each element of pRegions, if the sum of imageOffset.x and extent.width does not equal the width of the subresource specified by imageSubresource, extent.width **must** be a multiple of the texel block extent width of the VkFormat of dstImage
- VUID-VkCopyBufferToImageInfo2-dstImage-00208
  For each element of pRegions, if the sum of imageOffset.y and extent.height does not equal the height of the subresource specified by imageSubresource, extent.height **must** be a multiple of the texel block extent height of the VkFormat of dstImage
- VUID-VkCopyBufferToImageInfo2-dstImage-00209
  For each element of pRegions, if the sum of imageOffset.z and extent.depth does not equal the depth of the subresource specified by srcSubresource, extent.depth **must** be a multiple of the texel block extent depth of the VkFormat of dstImage
- VUID-VkCopyBufferToImageInfo2-imageSubresource-09105
  For each element of pRegions, imageSubresource.aspectMask **must** specify aspects present in dstImage
- VUID-VkCopyBufferToImageInfo2-dstImage-07981
  If dstImage has a multi-planar image format, then for each element of pRegions, imageSubresource.aspectMask **must** be a single valid multi-planar aspect mask bit
- VUID-VkCopyBufferToImageInfo2-dstImage-07983
  If dstImage is of type VK_IMAGE_TYPE_3D, for each element of pRegions, imageSubresource.baseArrayLayer **must** be 0 and imageSubresource.layerCount **must** be 1
- VUID-VkCopyBufferToImageInfo2-bufferRowLength-09106
  For each element of pRegions, bufferRowLength **must** be a multiple of the texel block extent width of the VkFormat of dstImage
- VUID-VkCopyBufferToImageInfo2-bufferImageHeight-09107
  For each element of pRegions, bufferImageHeight **must** be a multiple of the texel block extent height of the VkFormat of dstImage
- VUID-VkCopyBufferToImageInfo2-bufferRowLength-09108
  For each element of pRegions, bufferRowLength divided by the texel block extent width and

then multiplied by the texel block size of `dstImage` **must** be less than or equal to 2^{31}-1

- VUID-VkCopyBufferToImageInfo2-dstImage-07975
  If `dstImage` does not have either a depth/stencil format or a multi-planar format, then for each element of `pRegions`, `bufferOffset` **must** be a multiple of the texel block size
- VUID-VkCopyBufferToImageInfo2-dstImage-07976
  If `dstImage` has a multi-planar format, then for each element of `pRegions`, `bufferOffset` **must** be a multiple of the element size of the compatible format for the format and the `aspectMask` of the `imageSubresource` as defined in Compatible Formats of Planes of Multi-Planar Formats
- VUID-VkCopyBufferToImageInfo2-dstImage-07978
  If `dstImage` has a depth/stencil format, the `bufferOffset` member of any element of `pRegions` **must** be a multiple of `4`
- VUID-VkCopyBufferToImageInfo2-pRegions-06223
  For each element of `pRegions` not containing `VkCopyCommandTransformInfoQCOM` in its `pNext` chain, `imageOffset.x` and (`imageExtent.width` + `imageOffset.x`) **must** both be greater than or equal to `0` and less than or equal to the width of the specified `imageSubresource` of `dstImage`
- VUID-VkCopyBufferToImageInfo2-pRegions-06224
  For each element of `pRegions` not containing `VkCopyCommandTransformInfoQCOM` in its `pNext` chain, `imageOffset.y` and (`imageExtent.height` + `imageOffset.y`) **must** both be greater than or equal to `0` and less than or equal to the height of the specified `imageSubresource` of `dstImage`

Valid Usage (Implicit)

- VUID-VkCopyBufferToImageInfo2-sType-sType
  `sType` **must** be `VK_STRUCTURE_TYPE_COPY_BUFFER_TO_IMAGE_INFO_2`
- VUID-VkCopyBufferToImageInfo2-pNext-pNext
  `pNext` **must** be `NULL`
- VUID-VkCopyBufferToImageInfo2-srcBuffer-parameter
  `srcBuffer` **must** be a valid VkBuffer handle
- VUID-VkCopyBufferToImageInfo2-dstImage-parameter
  `dstImage` **must** be a valid VkImage handle
- VUID-VkCopyBufferToImageInfo2-dstImageLayout-parameter
  `dstImageLayout` **must** be a valid VkImageLayout value
- VUID-VkCopyBufferToImageInfo2-pRegions-parameter
  `pRegions` **must** be a valid pointer to an array of `regionCount` valid VkBufferImageCopy2 structures
- VUID-VkCopyBufferToImageInfo2-regionCount-arraylength
  `regionCount` **must** be greater than `0`
- VUID-VkCopyBufferToImageInfo2-commonparent
  Both of `dstImage`, and `srcBuffer` **must** have been created, allocated, or retrieved from the same VkDevice

To copy data from an image object to a buffer object, call:

```
// Provided by VK_VERSION_1_3
void vkCmdCopyImageToBuffer2(
    VkCommandBuffer                             commandBuffer,
    const VkCopyImageToBufferInfo2*             pCopyImageToBufferInfo);
```

- `commandBuffer` is the command buffer into which the command will be recorded.
- `pCopyImageToBufferInfo` is a pointer to a VkCopyImageToBufferInfo2 structure describing the copy parameters.

This command is functionally identical to vkCmdCopyImageToBuffer, but includes extensible sub-structures that include `sType` and `pNext` parameters, allowing them to be more easily extended.

Valid Usage

- VUID-vkCmdCopyImageToBuffer2-commandBuffer-01831
  If `commandBuffer` is an unprotected command buffer and `protectedNoFault` is not supported, `srcImage` **must** not be a protected image
- VUID-vkCmdCopyImageToBuffer2-commandBuffer-01832
  If `commandBuffer` is an unprotected command buffer and `protectedNoFault` is not supported, `dstBuffer` **must** not be a protected buffer
- VUID-vkCmdCopyImageToBuffer2-commandBuffer-01833
  If `commandBuffer` is a protected command buffer and `protectedNoFault` is not supported, `dstBuffer` **must** not be an unprotected buffer
- VUID-vkCmdCopyImageToBuffer2-commandBuffer-07746
  If the queue family used to create the VkCommandPool which `commandBuffer` was allocated from does not support `VK_QUEUE_GRAPHICS_BIT` or `VK_QUEUE_COMPUTE_BIT`, the `bufferOffset` member of any element of `pCopyImageToBufferInfo->pRegions` **must** be a multiple of `4`
- VUID-vkCmdCopyImageToBuffer2-imageOffset-07747
  The `imageOffset` and `imageExtent` members of each element of `pCopyImageToBufferInfo->pRegions` **must** respect the image transfer granularity requirements of `commandBuffer`'s command pool's queue family, as described in VkQueueFamilyProperties

Valid Usage (Implicit)

- VUID-vkCmdCopyImageToBuffer2-commandBuffer-parameter
  `commandBuffer` **must** be a valid VkCommandBuffer handle
- VUID-vkCmdCopyImageToBuffer2-pCopyImageToBufferInfo-parameter
  `pCopyImageToBufferInfo` **must** be a valid pointer to a valid VkCopyImageToBufferInfo2 structure
- VUID-vkCmdCopyImageToBuffer2-commandBuffer-recording
  `commandBuffer` **must** be in the recording state

- VUID-vkCmdCopyImageToBuffer2-commandBuffer-cmdpool
  The `VkCommandPool` that `commandBuffer` was allocated from **must** support transfer, graphics, or compute operations
- VUID-vkCmdCopyImageToBuffer2-renderpass
  This command **must** only be called outside of a render pass instance

Host Synchronization

- Host access to `commandBuffer` **must** be externally synchronized
- Host access to the `VkCommandPool` that `commandBuffer` was allocated from **must** be externally synchronized

Command Properties

Command Buffer Levels	Render Pass Scope	Supported Queue Types	Command Type
Primary Secondary	Outside	Transfer Graphics Compute	Action

The `VkCopyImageToBufferInfo2` structure is defined as:

```
// Provided by VK_VERSION_1_3
typedef struct VkCopyImageToBufferInfo2 {
    VkStructureType              sType;
    const void*                  pNext;
    VkImage                      srcImage;
    VkImageLayout                srcImageLayout;
    VkBuffer                     dstBuffer;
    uint32_t                     regionCount;
    const VkBufferImageCopy2*    pRegions;
} VkCopyImageToBufferInfo2;
```

- `sType` is a VkStructureType value identifying this structure.
- `pNext` is `NULL` or a pointer to a structure extending this structure.
- `srcImage` is the source image.
- `srcImageLayout` is the layout of the source image subresources for the copy.
- `dstBuffer` is the destination buffer.
- `regionCount` is the number of regions to copy.
- `pRegions` is a pointer to an array of VkBufferImageCopy2 structures specifying the regions to copy.

Valid Usage

- VUID-VkCopyImageToBufferInfo2-pRegions-04566
  The image region specified by each element of `pRegions` **must** be contained within the specified `imageSubresource` of `srcImage`
- VUID-VkCopyImageToBufferInfo2-pRegions-00183
  `dstBuffer` **must** be large enough to contain all buffer locations that are accessed according to Buffer and Image Addressing, for each element of `pRegions`
- VUID-VkCopyImageToBufferInfo2-pRegions-00184
  The union of all source regions, and the union of all destination regions, specified by the elements of `pRegions`, **must** not overlap in memory
- VUID-VkCopyImageToBufferInfo2-srcImage-00186
  `srcImage` **must** have been created with `VK_IMAGE_USAGE_TRANSFER_SRC_BIT` usage flag
- VUID-VkCopyImageToBufferInfo2-srcImage-01998
  The format features of `srcImage` **must** contain `VK_FORMAT_FEATURE_TRANSFER_SRC_BIT`
- VUID-VkCopyImageToBufferInfo2-dstBuffer-00191
  `dstBuffer` **must** have been created with `VK_BUFFER_USAGE_TRANSFER_DST_BIT` usage flag
- VUID-VkCopyImageToBufferInfo2-dstBuffer-00192
  If `dstBuffer` is non-sparse then it **must** be bound completely and contiguously to a single `VkDeviceMemory` object
- VUID-VkCopyImageToBufferInfo2-srcImageLayout-00189
  `srcImageLayout` **must** specify the layout of the image subresources of `srcImage` specified in `pRegions` at the time this command is executed on a `VkDevice`
- VUID-VkCopyImageToBufferInfo2-srcImageLayout-01397
  `srcImageLayout` **must** be `VK_IMAGE_LAYOUT_TRANSFER_SRC_OPTIMAL`, or `VK_IMAGE_LAYOUT_GENERAL`
- VUID-VkCopyImageToBufferInfo2-srcImage-07966
  If `srcImage` is non-sparse then the image or the specified *disjoint* plane **must** be bound completely and contiguously to a single `VkDeviceMemory` object
- VUID-VkCopyImageToBufferInfo2-imageSubresource-07967
  The `imageSubresource.mipLevel` member of each element of `pRegions` **must** be less than the `mipLevels` specified in VkImageCreateInfo when `srcImage` was created
- VUID-VkCopyImageToBufferInfo2-imageSubresource-07968
  `imageSubresource.baseArrayLayer` + `imageSubresource.layerCount` of each element of `pRegions` **must** be less than or equal to the `arrayLayers` specified in VkImageCreateInfo when `srcImage` was created
- VUID-VkCopyImageToBufferInfo2-srcImage-07973
  `srcImage` **must** have a sample count equal to `VK_SAMPLE_COUNT_1_BIT`
- VUID-VkCopyImageToBufferInfo2-srcImage-07979
  If `srcImage` is of type `VK_IMAGE_TYPE_1D`, then for each element of `pRegions`, `imageOffset.y` **must** be `0` and `imageExtent.height` **must** be `1`

- VUID-VkCopyImageToBufferInfo2-imageOffset-09104
  For each element of `pRegions`, `imageOffset.z` and (`imageExtent.depth` + `imageOffset.z`) **must** both be greater than or equal to `0` and less than or equal to the depth of the specified `imageSubresource` of `srcImage`
- VUID-VkCopyImageToBufferInfo2-srcImage-07980
  If `srcImage` is of type `VK_IMAGE_TYPE_1D` or `VK_IMAGE_TYPE_2D`, then for each element of `pRegions`, `imageOffset.z` **must** be `0` and `imageExtent.depth` **must** be `1`
- VUID-VkCopyImageToBufferInfo2-srcImage-07274
  For each element of `pRegions`, `imageOffset.x` **must** be a multiple of the texel block extent width of the VkFormat of `srcImage`
- VUID-VkCopyImageToBufferInfo2-srcImage-07275
  For each element of `pRegions`, `imageOffset.y` **must** be a multiple of the texel block extent height of the VkFormat of `srcImage`
- VUID-VkCopyImageToBufferInfo2-srcImage-07276
  For each element of `pRegions`, `imageOffset.z` **must** be a multiple of the texel block extent depth of the VkFormat of `srcImage`
- VUID-VkCopyImageToBufferInfo2-srcImage-00207
  For each element of `pRegions`, if the sum of `imageOffset.x` and `extent.width` does not equal the width of the subresource specified by `imageSubresource`, `extent.width` **must** be a multiple of the texel block extent width of the VkFormat of `srcImage`
- VUID-VkCopyImageToBufferInfo2-srcImage-00208
  For each element of `pRegions`, if the sum of `imageOffset.y` and `extent.height` does not equal the height of the subresource specified by `imageSubresource`, `extent.height` **must** be a multiple of the texel block extent height of the VkFormat of `srcImage`
- VUID-VkCopyImageToBufferInfo2-srcImage-00209
  For each element of `pRegions`, if the sum of `imageOffset.z` and `extent.depth` does not equal the depth of the subresource specified by `srcSubresource`, `extent.depth` **must** be a multiple of the texel block extent depth of the VkFormat of `srcImage`
- VUID-VkCopyImageToBufferInfo2-imageSubresource-09105
  For each element of `pRegions`, `imageSubresource.aspectMask` **must** specify aspects present in `srcImage`
- VUID-VkCopyImageToBufferInfo2-srcImage-07981
  If `srcImage` has a multi-planar image format, then for each element of `pRegions`, `imageSubresource.aspectMask` **must** be a single valid multi-planar aspect mask bit
- VUID-VkCopyImageToBufferInfo2-srcImage-07983
  If `srcImage` is of type `VK_IMAGE_TYPE_3D`, for each element of `pRegions`, `imageSubresource.baseArrayLayer` **must** be `0` and `imageSubresource.layerCount` **must** be `1`
- VUID-VkCopyImageToBufferInfo2-bufferRowLength-09106
  For each element of `pRegions`, `bufferRowLength` **must** be a multiple of the texel block extent width of the VkFormat of `srcImage`
- VUID-VkCopyImageToBufferInfo2-bufferImageHeight-09107
  For each element of `pRegions`, `bufferImageHeight` **must** be a multiple of the texel block extent height of the VkFormat of `srcImage`

- VUID-VkCopyImageToBufferInfo2-bufferRowLength-09108
  For each element of pRegions, bufferRowLength divided by the texel block extent width and then multiplied by the texel block size of srcImage **must** be less than or equal to 2^{31}-1
- VUID-VkCopyImageToBufferInfo2-srcImage-07975
  If srcImage does not have either a depth/stencil format or a multi-planar format, then for each element of pRegions, bufferOffset **must** be a multiple of the texel block size
- VUID-VkCopyImageToBufferInfo2-srcImage-07976
  If srcImage has a multi-planar format, then for each element of pRegions, bufferOffset **must** be a multiple of the element size of the compatible format for the format and the aspectMask of the imageSubresource as defined in Compatible Formats of Planes of Multi-Planar Formats
- VUID-VkCopyImageToBufferInfo2-srcImage-07978
  If srcImage has a depth/stencil format, the bufferOffset member of any element of pRegions **must** be a multiple of 4
- VUID-VkCopyImageToBufferInfo2-imageOffset-00197
  For each element of pRegions not containing VkCopyCommandTransformInfoQCOM in its pNext chain, imageOffset.x and (imageExtent.width + imageOffset.x) **must** both be greater than or equal to 0 and less than or equal to the width of the specified imageSubresource of srcImage
- VUID-VkCopyImageToBufferInfo2-imageOffset-00198
  For each element of pRegions not containing VkCopyCommandTransformInfoQCOM in its pNext chain, imageOffset.y and (imageExtent.height + imageOffset.y) **must** both be greater than or equal to 0 and less than or equal to the height of the specified imageSubresource of srcImage

Valid Usage (Implicit)

- VUID-VkCopyImageToBufferInfo2-sType-sType
  sType **must** be VK_STRUCTURE_TYPE_COPY_IMAGE_TO_BUFFER_INFO_2
- VUID-VkCopyImageToBufferInfo2-pNext-pNext
  pNext **must** be NULL
- VUID-VkCopyImageToBufferInfo2-srcImage-parameter
  srcImage **must** be a valid VkImage handle
- VUID-VkCopyImageToBufferInfo2-srcImageLayout-parameter
  srcImageLayout **must** be a valid VkImageLayout value
- VUID-VkCopyImageToBufferInfo2-dstBuffer-parameter
  dstBuffer **must** be a valid VkBuffer handle
- VUID-VkCopyImageToBufferInfo2-pRegions-parameter
  pRegions **must** be a valid pointer to an array of regionCount valid VkBufferImageCopy2 structures
- VUID-VkCopyImageToBufferInfo2-regionCount-arraylength
  regionCount **must** be greater than 0
- VUID-VkCopyImageToBufferInfo2-commonparent

Both of dstBuffer, and srcImage **must** have been created, allocated, or retrieved from the same VkDevice

For both vkCmdCopyBufferToImage2 and vkCmdCopyImageToBuffer2, each element of pRegions is a structure defined as:

```
// Provided by VK_VERSION_1_3
typedef struct VkBufferImageCopy2 {
    VkStructureType             sType;
    const void*                 pNext;
    VkDeviceSize                bufferOffset;
    uint32_t                    bufferRowLength;
    uint32_t                    bufferImageHeight;
    VkImageSubresourceLayers    imageSubresource;
    VkOffset3D                  imageOffset;
    VkExtent3D                  imageExtent;
} VkBufferImageCopy2;
```

- sType is a VkStructureType value identifying this structure.
- pNext is NULL or a pointer to a structure extending this structure.
- bufferOffset is the offset in bytes from the start of the buffer object where the image data is copied from or to.
- bufferRowLength and bufferImageHeight specify in texels a subregion of a larger two- or three-dimensional image in buffer memory, and control the addressing calculations. If either of these values is zero, that aspect of the buffer memory is considered to be tightly packed according to the imageExtent.
- imageSubresource is a VkImageSubresourceLayers used to specify the specific image subresources of the image used for the source or destination image data.
- imageOffset selects the initial x, y, z offsets in texels of the sub-region of the source or destination image data.
- imageExtent is the size in texels of the image to copy in width, height and depth.

This structure is functionally identical to VkBufferImageCopy, but adds sType and pNext parameters, allowing it to be more easily extended.

Valid Usage

- VUID-VkBufferImageCopy2-bufferRowLength-09101
  bufferRowLength **must** be 0, or greater than or equal to the width member of imageExtent
- VUID-VkBufferImageCopy2-bufferImageHeight-09102
  bufferImageHeight **must** be 0, or greater than or equal to the height member of imageExtent
- VUID-VkBufferImageCopy2-aspectMask-09103
  The aspectMask member of imageSubresource **must** only have a single bit set

- VUID-VkBufferImageCopy2-imageExtent-06659
  `imageExtent.width` **must** not be 0
- VUID-VkBufferImageCopy2-imageExtent-06660
  `imageExtent.height` **must** not be 0
- VUID-VkBufferImageCopy2-imageExtent-06661
  `imageExtent.depth` **must** not be 0

Valid Usage (Implicit)

- VUID-VkBufferImageCopy2-sType-sType
  `sType` **must** be `VK_STRUCTURE_TYPE_BUFFER_IMAGE_COPY_2`
- VUID-VkBufferImageCopy2-pNext-pNext
  `pNext` **must** be `NULL`
- VUID-VkBufferImageCopy2-imageSubresource-parameter
  `imageSubresource` **must** be a valid VkImageSubresourceLayers structure

19.4. Image Copies With Scaling

To copy regions of a source image into a destination image, potentially performing format conversion, arbitrary scaling, and filtering, call:

```
// Provided by VK_VERSION_1_0
void vkCmdBlitImage(
    VkCommandBuffer                             commandBuffer,
    VkImage                                     srcImage,
    VkImageLayout                               srcImageLayout,
    VkImage                                     dstImage,
    VkImageLayout                               dstImageLayout,
    uint32_t                                    regionCount,
    const VkImageBlit*                          pRegions,
    VkFilter                                    filter);
```

- `commandBuffer` is the command buffer into which the command will be recorded.
- `srcImage` is the source image.
- `srcImageLayout` is the layout of the source image subresources for the blit.
- `dstImage` is the destination image.
- `dstImageLayout` is the layout of the destination image subresources for the blit.
- `regionCount` is the number of regions to blit.
- `pRegions` is a pointer to an array of VkImageBlit structures specifying the regions to blit.
- `filter` is a VkFilter specifying the filter to apply if the blits require scaling.

vkCmdBlitImage **must** not be used for multisampled source or destination images. Use vkCmdResolveImage for this purpose.

As the sizes of the source and destination extents **can** differ in any dimension, texels in the source extent are scaled and filtered to the destination extent. Scaling occurs via the following operations:

- For each destination texel, the integer coordinate of that texel is converted to an unnormalized texture coordinate, using the effective inverse of the equations described in unnormalized to integer conversion:

$$u_{base} = i + \frac{1}{2}$$

$$v_{base} = j + \frac{1}{2}$$

$$w_{base} = k + \frac{1}{2}$$

- These base coordinates are then offset by the first destination offset:

$$u_{offset} = u_{base} - x_{dst0}$$

$$v_{offset} = v_{base} - y_{dst0}$$

$$w_{offset} = w_{base} - z_{dst0}$$

$$a_{offset} = a - \texttt{baseArrayCount}_{dst}$$

- The scale is determined from the source and destination regions, and applied to the offset coordinates:

$$scale_u = (x_{src1} - x_{src0}) / (x_{dst1} - x_{dst0})$$

$$scale_v = (y_{src1} - y_{src0}) / (y_{dst1} - y_{dst0})$$

$$scale_w = (z_{src1} - z_{src0}) / (z_{dst1} - z_{dst0})$$

$$u_{scaled} = u_{offset} \times scale_u$$

$$v_{scaled} = v_{offset} \times scale_{v}$$

$$w_{scaled} = w_{offset} \times scale_{w}$$

- Finally the source offset is added to the scaled coordinates, to determine the final unnormalized coordinates used to sample from `srcImage`:

$$u = u_{scaled} + x_{src0}$$

$$v = v_{scaled} + y_{src0}$$

$$w = w_{scaled} + z_{src0}$$

$$q = \texttt{mipLevel}$$

$$a = a_{offset} + \texttt{baseArrayCount}_{src}$$

These coordinates are used to sample from the source image, as described in Image Operations chapter, with the filter mode equal to that of `filter`, a mipmap mode of `VK_SAMPLER_MIPMAP_MODE_NEAREST` and an address mode of `VK_SAMPLER_ADDRESS_MODE_CLAMP_TO_EDGE`. Implementations **must** clamp at the edge of the source image, and **may** additionally clamp to the edge of the source region.

> **NOTE** Due to allowable rounding errors in the generation of the source texture coordinates, it is not always possible to guarantee exactly which source texels will be sampled for a given blit. As rounding errors are implementation-dependent, the exact results of a blitting operation are also implementation-dependent.

Blits are done layer by layer starting with the `baseArrayLayer` member of `srcSubresource` for the source and `dstSubresource` for the destination. `layerCount` layers are blitted to the destination image.

When blitting 3D textures, slices in the destination region bounded by `dstOffsets`[0].z and `dstOffsets`[1].z are sampled from slices in the source region bounded by `srcOffsets`[0].z and `srcOffsets`[1].z. If the `filter` parameter is `VK_FILTER_LINEAR` then the value sampled from the source image is taken by doing linear filtering using the interpolated **z** coordinate represented by **w** in the previous equations. If the `filter` parameter is `VK_FILTER_NEAREST` then the value sampled from the source image is taken from the single nearest slice, with an implementation-dependent arithmetic rounding mode.

The following filtering and conversion rules apply:

- Integer formats **can** only be converted to other integer formats with the same signedness.

- No format conversion is supported between depth/stencil images. The formats **must** match.
- Format conversions on unorm, snorm, scaled and packed float formats of the copied aspect of the image are performed by first converting the pixels to float values.
- For sRGB source formats, nonlinear RGB values are converted to linear representation prior to filtering.
- After filtering, the float values are first clamped and then cast to the destination image format. In case of sRGB destination format, linear RGB values are converted to nonlinear representation before writing the pixel to the image.

Signed and unsigned integers are converted by first clamping to the representable range of the destination format, then casting the value.

Valid Usage

- VUID-vkCmdBlitImage-commandBuffer-01834
  If `commandBuffer` is an unprotected command buffer and `protectedNoFault` is not supported, `srcImage` **must** not be a protected image
- VUID-vkCmdBlitImage-commandBuffer-01835
  If `commandBuffer` is an unprotected command buffer and `protectedNoFault` is not supported, `dstImage` **must** not be a protected image
- VUID-vkCmdBlitImage-commandBuffer-01836
  If `commandBuffer` is a protected command buffer and `protectedNoFault` is not supported, `dstImage` **must** not be an unprotected image
- VUID-vkCmdBlitImage-pRegions-00215
  The source region specified by each element of `pRegions` **must** be a region that is contained within `srcImage`
- VUID-vkCmdBlitImage-pRegions-00216
  The destination region specified by each element of `pRegions` **must** be a region that is contained within `dstImage`
- VUID-vkCmdBlitImage-pRegions-00217
  The union of all destination regions, specified by the elements of `pRegions`, **must** not overlap in memory with any texel that **may** be sampled during the blit operation
- VUID-vkCmdBlitImage-srcImage-01999
  The format features of `srcImage` **must** contain `VK_FORMAT_FEATURE_BLIT_SRC_BIT`
- VUID-vkCmdBlitImage-srcImage-06421
  `srcImage` **must** not use a format that requires a sampler $Y'C_BC_R$ conversion
- VUID-vkCmdBlitImage-srcImage-00219
  `srcImage` **must** have been created with `VK_IMAGE_USAGE_TRANSFER_SRC_BIT` usage flag
- VUID-vkCmdBlitImage-srcImage-00220
  If `srcImage` is non-sparse then it **must** be bound completely and contiguously to a single `VkDeviceMemory` object
- VUID-vkCmdBlitImage-srcImageLayout-00221

`srcImageLayout` **must** specify the layout of the image subresources of `srcImage` specified in `pRegions` at the time this command is executed on a `VkDevice`

- VUID-vkCmdBlitImage-srcImageLayout-00222
  `srcImageLayout` **must** be `VK_IMAGE_LAYOUT_TRANSFER_SRC_OPTIMAL` or `VK_IMAGE_LAYOUT_GENERAL`
- VUID-vkCmdBlitImage-srcImage-09459
  If `srcImage` and `dstImage` are the same, and an elements of `pRegions` contains the `srcSubresource` and `dstSubresource` with matching `mipLevel` and overlapping array layers, then the `srcImageLayout` and `dstImageLayout` **must** be `VK_IMAGE_LAYOUT_GENERAL`
- VUID-vkCmdBlitImage-dstImage-02000
  The format features of `dstImage` **must** contain `VK_FORMAT_FEATURE_BLIT_DST_BIT`
- VUID-vkCmdBlitImage-dstImage-06422
  `dstImage` **must** not use a format that requires a sampler $Y'C_BC_R$ conversion
- VUID-vkCmdBlitImage-dstImage-00224
  `dstImage` **must** have been created with `VK_IMAGE_USAGE_TRANSFER_DST_BIT` usage flag
- VUID-vkCmdBlitImage-dstImage-00225
  If `dstImage` is non-sparse then it **must** be bound completely and contiguously to a single `VkDeviceMemory` object
- VUID-vkCmdBlitImage-dstImageLayout-00226
  `dstImageLayout` **must** specify the layout of the image subresources of `dstImage` specified in `pRegions` at the time this command is executed on a `VkDevice`
- VUID-vkCmdBlitImage-dstImageLayout-00227
  `dstImageLayout` **must** be `VK_IMAGE_LAYOUT_TRANSFER_DST_OPTIMAL` or `VK_IMAGE_LAYOUT_GENERAL`
- VUID-vkCmdBlitImage-srcImage-00229
  If either of `srcImage` or `dstImage` was created with a signed integer VkFormat, the other **must** also have been created with a signed integer VkFormat
- VUID-vkCmdBlitImage-srcImage-00230
  If either of `srcImage` or `dstImage` was created with an unsigned integer VkFormat, the other **must** also have been created with an unsigned integer VkFormat
- VUID-vkCmdBlitImage-srcImage-00231
  If either of `srcImage` or `dstImage` was created with a depth/stencil format, the other **must** have exactly the same format
- VUID-vkCmdBlitImage-srcImage-00232
  If `srcImage` was created with a depth/stencil format, `filter` **must** be `VK_FILTER_NEAREST`
- VUID-vkCmdBlitImage-srcImage-00233
  `srcImage` **must** have been created with a `samples` value of `VK_SAMPLE_COUNT_1_BIT`
- VUID-vkCmdBlitImage-dstImage-00234
  `dstImage` **must** have been created with a `samples` value of `VK_SAMPLE_COUNT_1_BIT`
- VUID-vkCmdBlitImage-filter-02001
  If `filter` is `VK_FILTER_LINEAR`, then the format features of `srcImage` **must** contain `VK_FORMAT_FEATURE_SAMPLED_IMAGE_FILTER_LINEAR_BIT`
- VUID-vkCmdBlitImage-srcSubresource-01705

The srcSubresource.mipLevel member of each element of pRegions **must** be less than the mipLevels specified in VkImageCreateInfo when srcImage was created

- VUID-vkCmdBlitImage-dstSubresource-01706
  The dstSubresource.mipLevel member of each element of pRegions **must** be less than the mipLevels specified in VkImageCreateInfo when dstImage was created
- VUID-vkCmdBlitImage-srcSubresource-01707
  srcSubresource.baseArrayLayer + srcSubresource.layerCount of each element of pRegions **must** be less than or equal to the arrayLayers specified in VkImageCreateInfo when srcImage was created
- VUID-vkCmdBlitImage-dstSubresource-01708
  dstSubresource.baseArrayLayer + dstSubresource.layerCount of each element of pRegions **must** be less than or equal to the arrayLayers specified in VkImageCreateInfo when dstImage was created
- VUID-vkCmdBlitImage-srcImage-00240
  If either srcImage or dstImage is of type VK_IMAGE_TYPE_3D, then for each element of pRegions, srcSubresource.baseArrayLayer and dstSubresource.baseArrayLayer **must** each be 0, and srcSubresource.layerCount and dstSubresource.layerCount **must** each be 1
- VUID-vkCmdBlitImage-aspectMask-00241
  For each element of pRegions, srcSubresource.aspectMask **must** specify aspects present in srcImage
- VUID-vkCmdBlitImage-aspectMask-00242
  For each element of pRegions, dstSubresource.aspectMask **must** specify aspects present in dstImage
- VUID-vkCmdBlitImage-srcOffset-00243
  For each element of pRegions, srcOffsets[0].x and srcOffsets[1].x **must** both be greater than or equal to 0 and less than or equal to the width of the specified srcSubresource of srcImage
- VUID-vkCmdBlitImage-srcOffset-00244
  For each element of pRegions, srcOffsets[0].y and srcOffsets[1].y **must** both be greater than or equal to 0 and less than or equal to the height of the specified srcSubresource of srcImage
- VUID-vkCmdBlitImage-srcImage-00245
  If srcImage is of type VK_IMAGE_TYPE_1D, then for each element of pRegions, srcOffsets[0].y **must** be 0 and srcOffsets[1].y **must** be 1
- VUID-vkCmdBlitImage-srcOffset-00246
  For each element of pRegions, srcOffsets[0].z and srcOffsets[1].z **must** both be greater than or equal to 0 and less than or equal to the depth of the specified srcSubresource of srcImage
- VUID-vkCmdBlitImage-srcImage-00247
  If srcImage is of type VK_IMAGE_TYPE_1D or VK_IMAGE_TYPE_2D, then for each element of pRegions, srcOffsets[0].z **must** be 0 and srcOffsets[1].z **must** be 1
- VUID-vkCmdBlitImage-dstOffset-00248
  For each element of pRegions, dstOffsets[0].x and dstOffsets[1].x **must** both be greater

than or equal to `0` and less than or equal to the width of the specified `dstSubresource` of `dstImage`

- VUID-vkCmdBlitImage-dstOffset-00249
  For each element of `pRegions`, `dstOffsets`[0].y and `dstOffsets`[1].y **must** both be greater than or equal to `0` and less than or equal to the height of the specified `dstSubresource` of `dstImage`
- VUID-vkCmdBlitImage-dstImage-00250
  If `dstImage` is of type `VK_IMAGE_TYPE_1D`, then for each element of `pRegions`, `dstOffsets`[0].y **must** be `0` and `dstOffsets`[1].y **must** be `1`
- VUID-vkCmdBlitImage-dstOffset-00251
  For each element of `pRegions`, `dstOffsets`[0].z and `dstOffsets`[1].z **must** both be greater than or equal to `0` and less than or equal to the depth of the specified `dstSubresource` of `dstImage`
- VUID-vkCmdBlitImage-dstImage-00252
  If `dstImage` is of type `VK_IMAGE_TYPE_1D` or `VK_IMAGE_TYPE_2D`, then for each element of `pRegions`, `dstOffsets`[0].z **must** be `0` and `dstOffsets`[1].z **must** be `1`

Valid Usage (Implicit)

- VUID-vkCmdBlitImage-commandBuffer-parameter
  `commandBuffer` **must** be a valid VkCommandBuffer handle
- VUID-vkCmdBlitImage-srcImage-parameter
  `srcImage` **must** be a valid VkImage handle
- VUID-vkCmdBlitImage-srcImageLayout-parameter
  `srcImageLayout` **must** be a valid VkImageLayout value
- VUID-vkCmdBlitImage-dstImage-parameter
  `dstImage` **must** be a valid VkImage handle
- VUID-vkCmdBlitImage-dstImageLayout-parameter
  `dstImageLayout` **must** be a valid VkImageLayout value
- VUID-vkCmdBlitImage-pRegions-parameter
  `pRegions` **must** be a valid pointer to an array of `regionCount` valid VkImageBlit structures
- VUID-vkCmdBlitImage-filter-parameter
  `filter` **must** be a valid VkFilter value
- VUID-vkCmdBlitImage-commandBuffer-recording
  `commandBuffer` **must** be in the recording state
- VUID-vkCmdBlitImage-commandBuffer-cmdpool
  The `VkCommandPool` that `commandBuffer` was allocated from **must** support graphics operations
- VUID-vkCmdBlitImage-renderpass
  This command **must** only be called outside of a render pass instance
- VUID-vkCmdBlitImage-regionCount-arraylength

`regionCount` **must** be greater than `0`

- VUID-vkCmdBlitImage-commonparent
  Each of `commandBuffer`, `dstImage`, and `srcImage` **must** have been created, allocated, or retrieved from the same VkDevice

Host Synchronization

- Host access to `commandBuffer` **must** be externally synchronized
- Host access to the `VkCommandPool` that `commandBuffer` was allocated from **must** be externally synchronized

Command Properties

Command Buffer Levels	Render Pass Scope	Supported Queue Types	Command Type
Primary Secondary	Outside	Graphics	Action

The `VkImageBlit` structure is defined as:

```
// Provided by VK_VERSION_1_0
typedef struct VkImageBlit {
    VkImageSubresourceLayers    srcSubresource;
    VkOffset3D                  srcOffsets[2];
    VkImageSubresourceLayers    dstSubresource;
    VkOffset3D                  dstOffsets[2];
} VkImageBlit;
```

- `srcSubresource` is the subresource to blit from.
- `srcOffsets` is a pointer to an array of two VkOffset3D structures specifying the bounds of the source region within `srcSubresource`.
- `dstSubresource` is the subresource to blit into.
- `dstOffsets` is a pointer to an array of two VkOffset3D structures specifying the bounds of the destination region within `dstSubresource`.

For each element of the `pRegions` array, a blit operation is performed for the specified source and destination regions.

Valid Usage

- VUID-VkImageBlit-aspectMask-00238
  The `aspectMask` member of `srcSubresource` and `dstSubresource` **must** match

- VUID-VkImageBlit-layerCount-08800
  The `layerCount` members of `srcSubresource` or `dstSubresource` **must** match

Valid Usage (Implicit)

- VUID-VkImageBlit-srcSubresource-parameter
  `srcSubresource` **must** be a valid VkImageSubresourceLayers structure
- VUID-VkImageBlit-dstSubresource-parameter
  `dstSubresource` **must** be a valid VkImageSubresourceLayers structure

A more extensible version of the blit image command is defined below.

To copy regions of a source image into a destination image, potentially performing format conversion, arbitrary scaling, and filtering, call:

```
// Provided by VK_VERSION_1_3
void vkCmdBlitImage2(
    VkCommandBuffer                             commandBuffer,
    const VkBlitImageInfo2*                     pBlitImageInfo);
```

- `commandBuffer` is the command buffer into which the command will be recorded.
- `pBlitImageInfo` is a pointer to a VkBlitImageInfo2 structure describing the blit parameters.

This command is functionally identical to vkCmdBlitImage, but includes extensible sub-structures that include `sType` and `pNext` parameters, allowing them to be more easily extended.

Valid Usage

- VUID-vkCmdBlitImage2-commandBuffer-01834
  If `commandBuffer` is an unprotected command buffer and `protectedNoFault` is not supported, `srcImage` **must** not be a protected image
- VUID-vkCmdBlitImage2-commandBuffer-01835
  If `commandBuffer` is an unprotected command buffer and `protectedNoFault` is not supported, `dstImage` **must** not be a protected image
- VUID-vkCmdBlitImage2-commandBuffer-01836
  If `commandBuffer` is a protected command buffer and `protectedNoFault` is not supported, `dstImage` **must** not be an unprotected image

Valid Usage (Implicit)

- VUID-vkCmdBlitImage2-commandBuffer-parameter
  `commandBuffer` **must** be a valid VkCommandBuffer handle

- VUID-vkCmdBlitImage2-pBlitImageInfo-parameter
  `pBlitImageInfo` **must** be a valid pointer to a valid VkBlitImageInfo2 structure
- VUID-vkCmdBlitImage2-commandBuffer-recording
  `commandBuffer` **must** be in the recording state
- VUID-vkCmdBlitImage2-commandBuffer-cmdpool
  The `VkCommandPool` that `commandBuffer` was allocated from **must** support graphics operations
- VUID-vkCmdBlitImage2-renderpass
  This command **must** only be called outside of a render pass instance

Host Synchronization

- Host access to `commandBuffer` **must** be externally synchronized
- Host access to the `VkCommandPool` that `commandBuffer` was allocated from **must** be externally synchronized

Command Properties

Command Buffer Levels	Render Pass Scope	Supported Queue Types	Command Type
Primary Secondary	Outside	Graphics	Action

The `VkBlitImageInfo2` structure is defined as:

```
// Provided by VK_VERSION_1_3
typedef struct VkBlitImageInfo2 {
    VkStructureType        sType;
    const void*            pNext;
    VkImage                srcImage;
    VkImageLayout          srcImageLayout;
    VkImage                dstImage;
    VkImageLayout          dstImageLayout;
    uint32_t               regionCount;
    const VkImageBlit2*    pRegions;
    VkFilter               filter;
} VkBlitImageInfo2;
```

- `sType` is a VkStructureType value identifying this structure.
- `pNext` is `NULL` or a pointer to a structure extending this structure.
- `srcImage` is the source image.

- `srcImageLayout` is the layout of the source image subresources for the blit.
- `dstImage` is the destination image.
- `dstImageLayout` is the layout of the destination image subresources for the blit.
- `regionCount` is the number of regions to blit.
- `pRegions` is a pointer to an array of VkImageBlit2 structures specifying the regions to blit.
- `filter` is a VkFilter specifying the filter to apply if the blits require scaling.

Valid Usage

- VUID-VkBlitImageInfo2-pRegions-00215
  The source region specified by each element of `pRegions` **must** be a region that is contained within `srcImage`
- VUID-VkBlitImageInfo2-pRegions-00216
  The destination region specified by each element of `pRegions` **must** be a region that is contained within `dstImage`
- VUID-VkBlitImageInfo2-pRegions-00217
  The union of all destination regions, specified by the elements of `pRegions`, **must** not overlap in memory with any texel that **may** be sampled during the blit operation
- VUID-VkBlitImageInfo2-srcImage-01999
  The format features of `srcImage` **must** contain `VK_FORMAT_FEATURE_BLIT_SRC_BIT`
- VUID-VkBlitImageInfo2-srcImage-06421
  `srcImage` **must** not use a format that requires a sampler $Y'C_BC_R$ conversion
- VUID-VkBlitImageInfo2-srcImage-00219
  `srcImage` **must** have been created with `VK_IMAGE_USAGE_TRANSFER_SRC_BIT` usage flag
- VUID-VkBlitImageInfo2-srcImage-00220
  If `srcImage` is non-sparse then it **must** be bound completely and contiguously to a single `VkDeviceMemory` object
- VUID-VkBlitImageInfo2-srcImageLayout-00221
  `srcImageLayout` **must** specify the layout of the image subresources of `srcImage` specified in `pRegions` at the time this command is executed on a `VkDevice`
- VUID-VkBlitImageInfo2-srcImageLayout-00222
  `srcImageLayout` **must** be `VK_IMAGE_LAYOUT_TRANSFER_SRC_OPTIMAL` or `VK_IMAGE_LAYOUT_GENERAL`
- VUID-VkBlitImageInfo2-srcImage-09459
  If `srcImage` and `dstImage` are the same, and an elements of `pRegions` contains the `srcSubresource` and `dstSubresource` with matching `mipLevel` and overlapping array layers, then the `srcImageLayout` and `dstImageLayout` **must** be `VK_IMAGE_LAYOUT_GENERAL`
- VUID-VkBlitImageInfo2-dstImage-02000
  The format features of `dstImage` **must** contain `VK_FORMAT_FEATURE_BLIT_DST_BIT`
- VUID-VkBlitImageInfo2-dstImage-06422
  `dstImage` **must** not use a format that requires a sampler $Y'C_BC_R$ conversion
- VUID-VkBlitImageInfo2-dstImage-00224

`dstImage` **must** have been created with `VK_IMAGE_USAGE_TRANSFER_DST_BIT` usage flag

- VUID-VkBlitImageInfo2-dstImage-00225
  If `dstImage` is non-sparse then it **must** be bound completely and contiguously to a single `VkDeviceMemory` object
- VUID-VkBlitImageInfo2-dstImageLayout-00226
  `dstImageLayout` **must** specify the layout of the image subresources of `dstImage` specified in `pRegions` at the time this command is executed on a `VkDevice`
- VUID-VkBlitImageInfo2-dstImageLayout-00227
  `dstImageLayout` **must** be `VK_IMAGE_LAYOUT_TRANSFER_DST_OPTIMAL` or `VK_IMAGE_LAYOUT_GENERAL`
- VUID-VkBlitImageInfo2-srcImage-00229
  If either of `srcImage` or `dstImage` was created with a signed integer VkFormat, the other **must** also have been created with a signed integer VkFormat
- VUID-VkBlitImageInfo2-srcImage-00230
  If either of `srcImage` or `dstImage` was created with an unsigned integer VkFormat, the other **must** also have been created with an unsigned integer VkFormat
- VUID-VkBlitImageInfo2-srcImage-00231
  If either of `srcImage` or `dstImage` was created with a depth/stencil format, the other **must** have exactly the same format
- VUID-VkBlitImageInfo2-srcImage-00232
  If `srcImage` was created with a depth/stencil format, `filter` **must** be `VK_FILTER_NEAREST`
- VUID-VkBlitImageInfo2-srcImage-00233
  `srcImage` **must** have been created with a `samples` value of `VK_SAMPLE_COUNT_1_BIT`
- VUID-VkBlitImageInfo2-dstImage-00234
  `dstImage` **must** have been created with a `samples` value of `VK_SAMPLE_COUNT_1_BIT`
- VUID-VkBlitImageInfo2-filter-02001
  If `filter` is `VK_FILTER_LINEAR`, then the format features of `srcImage` **must** contain `VK_FORMAT_FEATURE_SAMPLED_IMAGE_FILTER_LINEAR_BIT`
- VUID-VkBlitImageInfo2-srcSubresource-01705
  The `srcSubresource.mipLevel` member of each element of `pRegions` **must** be less than the `mipLevels` specified in VkImageCreateInfo when `srcImage` was created
- VUID-VkBlitImageInfo2-dstSubresource-01706
  The `dstSubresource.mipLevel` member of each element of `pRegions` **must** be less than the `mipLevels` specified in VkImageCreateInfo when `dstImage` was created
- VUID-VkBlitImageInfo2-srcSubresource-01707
  `srcSubresource.baseArrayLayer` + `srcSubresource.layerCount` of each element of `pRegions` **must** be less than or equal to the `arrayLayers` specified in VkImageCreateInfo when `srcImage` was created
- VUID-VkBlitImageInfo2-dstSubresource-01708
  `dstSubresource.baseArrayLayer` + `dstSubresource.layerCount` of each element of `pRegions` **must** be less than or equal to the `arrayLayers` specified in VkImageCreateInfo when `dstImage` was created
- VUID-VkBlitImageInfo2-srcImage-00240

If either `srcImage` or `dstImage` is of type `VK_IMAGE_TYPE_3D`, then for each element of `pRegions`, `srcSubresource.baseArrayLayer` and `dstSubresource.baseArrayLayer` **must** each be `0`, and `srcSubresource.layerCount` and `dstSubresource.layerCount` **must** each be `1`

- VUID-VkBlitImageInfo2-aspectMask-00241
  For each element of `pRegions`, `srcSubresource.aspectMask` **must** specify aspects present in `srcImage`
- VUID-VkBlitImageInfo2-aspectMask-00242
  For each element of `pRegions`, `dstSubresource.aspectMask` **must** specify aspects present in `dstImage`
- VUID-VkBlitImageInfo2-srcOffset-00243
  For each element of `pRegions`, `srcOffsets`[0].x and `srcOffsets`[1].x **must** both be greater than or equal to `0` and less than or equal to the width of the specified `srcSubresource` of `srcImage`
- VUID-VkBlitImageInfo2-srcOffset-00244
  For each element of `pRegions`, `srcOffsets`[0].y and `srcOffsets`[1].y **must** both be greater than or equal to `0` and less than or equal to the height of the specified `srcSubresource` of `srcImage`
- VUID-VkBlitImageInfo2-srcImage-00245
  If `srcImage` is of type `VK_IMAGE_TYPE_1D`, then for each element of `pRegions`, `srcOffsets`[0].y **must** be `0` and `srcOffsets`[1].y **must** be `1`
- VUID-VkBlitImageInfo2-srcOffset-00246
  For each element of `pRegions`, `srcOffsets`[0].z and `srcOffsets`[1].z **must** both be greater than or equal to `0` and less than or equal to the depth of the specified `srcSubresource` of `srcImage`
- VUID-VkBlitImageInfo2-srcImage-00247
  If `srcImage` is of type `VK_IMAGE_TYPE_1D` or `VK_IMAGE_TYPE_2D`, then for each element of `pRegions`, `srcOffsets`[0].z **must** be `0` and `srcOffsets`[1].z **must** be `1`
- VUID-VkBlitImageInfo2-dstOffset-00248
  For each element of `pRegions`, `dstOffsets`[0].x and `dstOffsets`[1].x **must** both be greater than or equal to `0` and less than or equal to the width of the specified `dstSubresource` of `dstImage`
- VUID-VkBlitImageInfo2-dstOffset-00249
  For each element of `pRegions`, `dstOffsets`[0].y and `dstOffsets`[1].y **must** both be greater than or equal to `0` and less than or equal to the height of the specified `dstSubresource` of `dstImage`
- VUID-VkBlitImageInfo2-dstImage-00250
  If `dstImage` is of type `VK_IMAGE_TYPE_1D`, then for each element of `pRegions`, `dstOffsets`[0].y **must** be `0` and `dstOffsets`[1].y **must** be `1`
- VUID-VkBlitImageInfo2-dstOffset-00251
  For each element of `pRegions`, `dstOffsets`[0].z and `dstOffsets`[1].z **must** both be greater than or equal to `0` and less than or equal to the depth of the specified `dstSubresource` of `dstImage`
- VUID-VkBlitImageInfo2-dstImage-00252

If dstImage is of type VK_IMAGE_TYPE_1D or VK_IMAGE_TYPE_2D, then for each element of pRegions, dstOffsets[0].z **must** be 0 and dstOffsets[1].z **must** be 1

Valid Usage (Implicit)

- VUID-VkBlitImageInfo2-sType-sType
  sType **must** be VK_STRUCTURE_TYPE_BLIT_IMAGE_INFO_2
- VUID-VkBlitImageInfo2-pNext-pNext
  pNext **must** be NULL
- VUID-VkBlitImageInfo2-srcImage-parameter
  srcImage **must** be a valid VkImage handle
- VUID-VkBlitImageInfo2-srcImageLayout-parameter
  srcImageLayout **must** be a valid VkImageLayout value
- VUID-VkBlitImageInfo2-dstImage-parameter
  dstImage **must** be a valid VkImage handle
- VUID-VkBlitImageInfo2-dstImageLayout-parameter
  dstImageLayout **must** be a valid VkImageLayout value
- VUID-VkBlitImageInfo2-pRegions-parameter
  pRegions **must** be a valid pointer to an array of regionCount valid VkImageBlit2 structures
- VUID-VkBlitImageInfo2-filter-parameter
  filter **must** be a valid VkFilter value
- VUID-VkBlitImageInfo2-regionCount-arraylength
  regionCount **must** be greater than 0
- VUID-VkBlitImageInfo2-commonparent
  Both of dstImage, and srcImage **must** have been created, allocated, or retrieved from the same VkDevice

The VkImageBlit2 structure is defined as:

```
// Provided by VK_VERSION_1_3
typedef struct VkImageBlit2 {
    VkStructureType             sType;
    const void*                 pNext;
    VkImageSubresourceLayers    srcSubresource;
    VkOffset3D                  srcOffsets[2];
    VkImageSubresourceLayers    dstSubresource;
    VkOffset3D                  dstOffsets[2];
} VkImageBlit2;
```

- sType is a VkStructureType value identifying this structure.
- pNext is NULL or a pointer to a structure extending this structure.

- `srcSubresource` is the subresource to blit from.
- `srcOffsets` is a pointer to an array of two VkOffset3D structures specifying the bounds of the source region within `srcSubresource`.
- `dstSubresource` is the subresource to blit into.
- `dstOffsets` is a pointer to an array of two VkOffset3D structures specifying the bounds of the destination region within `dstSubresource`.

For each element of the `pRegions` array, a blit operation is performed for the specified source and destination regions.

Valid Usage

- VUID-VkImageBlit2-aspectMask-00238
  The `aspectMask` member of `srcSubresource` and `dstSubresource` **must** match
- VUID-VkImageBlit2-layerCount-08800
  The `layerCount` members of `srcSubresource` or `dstSubresource` **must** match

Valid Usage (Implicit)

- VUID-VkImageBlit2-sType-sType
  `sType` **must** be `VK_STRUCTURE_TYPE_IMAGE_BLIT_2`
- VUID-VkImageBlit2-pNext-pNext
  `pNext` **must** be `NULL`
- VUID-VkImageBlit2-srcSubresource-parameter
  `srcSubresource` **must** be a valid VkImageSubresourceLayers structure
- VUID-VkImageBlit2-dstSubresource-parameter
  `dstSubresource` **must** be a valid VkImageSubresourceLayers structure

19.5. Resolving Multisample Images

To resolve a multisample color image to a non-multisample color image, call:

```
// Provided by VK_VERSION_1_0
void vkCmdResolveImage(
    VkCommandBuffer                             commandBuffer,
    VkImage                                     srcImage,
    VkImageLayout                               srcImageLayout,
    VkImage                                     dstImage,
    VkImageLayout                               dstImageLayout,
    uint32_t                                    regionCount,
    const VkImageResolve*                       pRegions);
```

- `commandBuffer` is the command buffer into which the command will be recorded.
- `srcImage` is the source image.
- `srcImageLayout` is the layout of the source image subresources for the resolve.
- `dstImage` is the destination image.
- `dstImageLayout` is the layout of the destination image subresources for the resolve.
- `regionCount` is the number of regions to resolve.
- `pRegions` is a pointer to an array of VkImageResolve structures specifying the regions to resolve.

During the resolve the samples corresponding to each pixel location in the source are converted to a single sample before being written to the destination. If the source formats are floating-point or normalized types, the sample values for each pixel are resolved in an implementation-dependent manner. If the source formats are integer types, a single sample's value is selected for each pixel.

`srcOffset` and `dstOffset` select the initial `x`, `y`, and `z` offsets in texels of the sub-regions of the source and destination image data. `extent` is the size in texels of the source image to resolve in `width`, `height` and `depth`. Each element of `pRegions` **must** be a region that is contained within its corresponding image.

Resolves are done layer by layer starting with `baseArrayLayer` member of `srcSubresource` for the source and `dstSubresource` for the destination. `layerCount` layers are resolved to the destination image.

Valid Usage

- VUID-vkCmdResolveImage-commandBuffer-01837
  If `commandBuffer` is an unprotected command buffer and `protectedNoFault` is not supported, `srcImage` **must** not be a protected image
- VUID-vkCmdResolveImage-commandBuffer-01838
  If `commandBuffer` is an unprotected command buffer and `protectedNoFault` is not supported, `dstImage` **must** not be a protected image
- VUID-vkCmdResolveImage-commandBuffer-01839
  If `commandBuffer` is a protected command buffer and `protectedNoFault` is not supported, `dstImage` **must** not be an unprotected image
- VUID-vkCmdResolveImage-pRegions-00255
  The union of all source regions, and the union of all destination regions, specified by the elements of `pRegions`, **must** not overlap in memory
- VUID-vkCmdResolveImage-srcImage-00256
  If `srcImage` is non-sparse then it **must** be bound completely and contiguously to a single `VkDeviceMemory` object
- VUID-vkCmdResolveImage-srcImage-00257
  `srcImage` **must** have a sample count equal to any valid sample count value other than `VK_SAMPLE_COUNT_1_BIT`
- VUID-vkCmdResolveImage-dstImage-00258

If dstImage is non-sparse then it **must** be bound completely and contiguously to a single VkDeviceMemory object

- VUID-vkCmdResolveImage-dstImage-00259
  dstImage **must** have a sample count equal to VK_SAMPLE_COUNT_1_BIT
- VUID-vkCmdResolveImage-srcImageLayout-00260
  srcImageLayout **must** specify the layout of the image subresources of srcImage specified in pRegions at the time this command is executed on a VkDevice
- VUID-vkCmdResolveImage-srcImageLayout-01400
  srcImageLayout **must** be VK_IMAGE_LAYOUT_TRANSFER_SRC_OPTIMAL or VK_IMAGE_LAYOUT_GENERAL
- VUID-vkCmdResolveImage-dstImageLayout-00262
  dstImageLayout **must** specify the layout of the image subresources of dstImage specified in pRegions at the time this command is executed on a VkDevice
- VUID-vkCmdResolveImage-dstImageLayout-01401
  dstImageLayout **must** be VK_IMAGE_LAYOUT_TRANSFER_DST_OPTIMAL or VK_IMAGE_LAYOUT_GENERAL
- VUID-vkCmdResolveImage-dstImage-02003
  The format features of dstImage **must** contain VK_FORMAT_FEATURE_COLOR_ATTACHMENT_BIT
- VUID-vkCmdResolveImage-srcImage-01386
  srcImage and dstImage **must** have been created with the same image format
- VUID-vkCmdResolveImage-srcSubresource-01709
  The srcSubresource.mipLevel member of each element of pRegions **must** be less than the mipLevels specified in VkImageCreateInfo when srcImage was created
- VUID-vkCmdResolveImage-dstSubresource-01710
  The dstSubresource.mipLevel member of each element of pRegions **must** be less than the mipLevels specified in VkImageCreateInfo when dstImage was created
- VUID-vkCmdResolveImage-srcSubresource-01711
  srcSubresource.baseArrayLayer + srcSubresource.layerCount of each element of pRegions **must** be less than or equal to the arrayLayers specified in VkImageCreateInfo when srcImage was created
- VUID-vkCmdResolveImage-dstSubresource-01712
  dstSubresource.baseArrayLayer + dstSubresource.layerCount of each element of pRegions **must** be less than or equal to the arrayLayers specified in VkImageCreateInfo when dstImage was created
- VUID-vkCmdResolveImage-srcImage-04446
  If dstImage is of type VK_IMAGE_TYPE_3D, then for each element of pRegions, srcSubresource.layerCount **must** be 1
- VUID-vkCmdResolveImage-srcImage-04447
  If dstImage is of type VK_IMAGE_TYPE_3D, then for each element of pRegions, dstSubresource.baseArrayLayer **must** be 0 and dstSubresource.layerCount **must** be 1
- VUID-vkCmdResolveImage-srcOffset-00269
  For each element of pRegions, srcOffset.x and (extent.width + srcOffset.x) **must** both be greater than or equal to 0 and less than or equal to the width of the specified srcSubresource of srcImage

- VUID-vkCmdResolveImage-srcOffset-00270
  For each element of `pRegions`, `srcOffset.y` and (`extent.height` + `srcOffset.y`) **must** both be greater than or equal to `0` and less than or equal to the height of the specified `srcSubresource` of `srcImage`
- VUID-vkCmdResolveImage-srcImage-00271
  If `srcImage` is of type `VK_IMAGE_TYPE_1D`, then for each element of `pRegions`, `srcOffset.y` **must** be `0` and `extent.height` **must** be `1`
- VUID-vkCmdResolveImage-srcOffset-00272
  For each element of `pRegions`, `srcOffset.z` and (`extent.depth` + `srcOffset.z`) **must** both be greater than or equal to `0` and less than or equal to the depth of the specified `srcSubresource` of `srcImage`
- VUID-vkCmdResolveImage-srcImage-00273
  If `srcImage` is of type `VK_IMAGE_TYPE_1D` or `VK_IMAGE_TYPE_2D`, then for each element of `pRegions`, `srcOffset.z` **must** be `0` and `extent.depth` **must** be `1`
- VUID-vkCmdResolveImage-dstOffset-00274
  For each element of `pRegions`, `dstOffset.x` and (`extent.width` + `dstOffset.x`) **must** both be greater than or equal to `0` and less than or equal to the width of the specified `dstSubresource` of `dstImage`
- VUID-vkCmdResolveImage-dstOffset-00275
  For each element of `pRegions`, `dstOffset.y` and (`extent.height` + `dstOffset.y`) **must** both be greater than or equal to `0` and less than or equal to the height of the specified `dstSubresource` of `dstImage`
- VUID-vkCmdResolveImage-dstImage-00276
  If `dstImage` is of type `VK_IMAGE_TYPE_1D`, then for each element of `pRegions`, `dstOffset.y` **must** be `0` and `extent.height` **must** be `1`
- VUID-vkCmdResolveImage-dstOffset-00277
  For each element of `pRegions`, `dstOffset.z` and (`extent.depth` + `dstOffset.z`) **must** both be greater than or equal to `0` and less than or equal to the depth of the specified `dstSubresource` of `dstImage`
- VUID-vkCmdResolveImage-dstImage-00278
  If `dstImage` is of type `VK_IMAGE_TYPE_1D` or `VK_IMAGE_TYPE_2D`, then for each element of `pRegions`, `dstOffset.z` **must** be `0` and `extent.depth` **must** be `1`
- VUID-vkCmdResolveImage-srcImage-06762
  `srcImage` **must** have been created with `VK_IMAGE_USAGE_TRANSFER_SRC_BIT` usage flag
- VUID-vkCmdResolveImage-srcImage-06763
  The format features of `srcImage` **must** contain `VK_FORMAT_FEATURE_TRANSFER_SRC_BIT`
- VUID-vkCmdResolveImage-dstImage-06764
  `dstImage` **must** have been created with `VK_IMAGE_USAGE_TRANSFER_DST_BIT` usage flag
- VUID-vkCmdResolveImage-dstImage-06765
  The format features of `dstImage` **must** contain `VK_FORMAT_FEATURE_TRANSFER_DST_BIT`

Valid Usage (Implicit)

- VUID-vkCmdResolveImage-commandBuffer-parameter
  `commandBuffer` **must** be a valid VkCommandBuffer handle
- VUID-vkCmdResolveImage-srcImage-parameter
  `srcImage` **must** be a valid VkImage handle
- VUID-vkCmdResolveImage-srcImageLayout-parameter
  `srcImageLayout` **must** be a valid VkImageLayout value
- VUID-vkCmdResolveImage-dstImage-parameter
  `dstImage` **must** be a valid VkImage handle
- VUID-vkCmdResolveImage-dstImageLayout-parameter
  `dstImageLayout` **must** be a valid VkImageLayout value
- VUID-vkCmdResolveImage-pRegions-parameter
  `pRegions` **must** be a valid pointer to an array of `regionCount` valid VkImageResolve structures
- VUID-vkCmdResolveImage-commandBuffer-recording
  `commandBuffer` **must** be in the recording state
- VUID-vkCmdResolveImage-commandBuffer-cmdpool
  The `VkCommandPool` that `commandBuffer` was allocated from **must** support graphics operations
- VUID-vkCmdResolveImage-renderpass
  This command **must** only be called outside of a render pass instance
- VUID-vkCmdResolveImage-regionCount-arraylength
  `regionCount` **must** be greater than `0`
- VUID-vkCmdResolveImage-commonparent
  Each of `commandBuffer`, `dstImage`, and `srcImage` **must** have been created, allocated, or retrieved from the same VkDevice

Host Synchronization

- Host access to `commandBuffer` **must** be externally synchronized
- Host access to the `VkCommandPool` that `commandBuffer` was allocated from **must** be externally synchronized

Command Properties

Command Buffer Levels	Render Pass Scope	Supported Queue Types	Command Type
Primary Secondary	Outside	Graphics	Action

The VkImageResolve structure is defined as:

```
// Provided by VK_VERSION_1_0
typedef struct VkImageResolve {
    VkImageSubresourceLayers    srcSubresource;
    VkOffset3D                  srcOffset;
    VkImageSubresourceLayers    dstSubresource;
    VkOffset3D                  dstOffset;
    VkExtent3D                  extent;
} VkImageResolve;
```

- srcSubresource and dstSubresource are VkImageSubresourceLayers structures specifying the image subresources of the images used for the source and destination image data, respectively. Resolve of depth/stencil images is not supported.
- srcOffset and dstOffset select the initial x, y, and z offsets in texels of the sub-regions of the source and destination image data.
- extent is the size in texels of the source image to resolve in width, height and depth.

Valid Usage

- VUID-VkImageResolve-aspectMask-00266
  The aspectMask member of srcSubresource and dstSubresource **must** only contain VK_IMAGE_ASPECT_COLOR_BIT
- VUID-VkImageResolve-layerCount-08803
  The layerCount member of srcSubresource and dstSubresource **must** match

Valid Usage (Implicit)

- VUID-VkImageResolve-srcSubresource-parameter
  srcSubresource **must** be a valid VkImageSubresourceLayers structure
- VUID-VkImageResolve-dstSubresource-parameter
  dstSubresource **must** be a valid VkImageSubresourceLayers structure

A more extensible version of the resolve image command is defined below.

To resolve a multisample image to a non-multisample image, call:

```
// Provided by VK_VERSION_1_3
void vkCmdResolveImage2(
    VkCommandBuffer                             commandBuffer,
    const VkResolveImageInfo2*                  pResolveImageInfo);
```

- commandBuffer is the command buffer into which the command will be recorded.

- `pResolveImageInfo` is a pointer to a VkResolveImageInfo2 structure describing the resolve parameters.

This command is functionally identical to vkCmdResolveImage, but includes extensible sub-structures that include `sType` and `pNext` parameters, allowing them to be more easily extended.

Valid Usage

- VUID-vkCmdResolveImage2-commandBuffer-01837
  If `commandBuffer` is an unprotected command buffer and `protectedNoFault` is not supported, `srcImage` **must** not be a protected image
- VUID-vkCmdResolveImage2-commandBuffer-01838
  If `commandBuffer` is an unprotected command buffer and `protectedNoFault` is not supported, `dstImage` **must** not be a protected image
- VUID-vkCmdResolveImage2-commandBuffer-01839
  If `commandBuffer` is a protected command buffer and `protectedNoFault` is not supported, `dstImage` **must** not be an unprotected image

Valid Usage (Implicit)

- VUID-vkCmdResolveImage2-commandBuffer-parameter
  `commandBuffer` **must** be a valid VkCommandBuffer handle
- VUID-vkCmdResolveImage2-pResolveImageInfo-parameter
  `pResolveImageInfo` **must** be a valid pointer to a valid VkResolveImageInfo2 structure
- VUID-vkCmdResolveImage2-commandBuffer-recording
  `commandBuffer` **must** be in the recording state
- VUID-vkCmdResolveImage2-commandBuffer-cmdpool
  The `VkCommandPool` that `commandBuffer` was allocated from **must** support graphics operations
- VUID-vkCmdResolveImage2-renderpass
  This command **must** only be called outside of a render pass instance

Host Synchronization

- Host access to `commandBuffer` **must** be externally synchronized
- Host access to the `VkCommandPool` that `commandBuffer` was allocated from **must** be externally synchronized

Command Properties

Command Buffer Levels	Render Pass Scope	Supported Queue Types	Command Type
Primary Secondary	Outside	Graphics	Action

The `VkResolveImageInfo2` structure is defined as:

```
// Provided by VK_VERSION_1_3
typedef struct VkResolveImageInfo2 {
    VkStructureType           sType;
    const void*               pNext;
    VkImage                   srcImage;
    VkImageLayout             srcImageLayout;
    VkImage                   dstImage;
    VkImageLayout             dstImageLayout;
    uint32_t                  regionCount;
    const VkImageResolve2*    pRegions;
} VkResolveImageInfo2;
```

- `sType` is a VkStructureType value identifying this structure.
- `pNext` is `NULL` or a pointer to a structure extending this structure.
- `srcImage` is the source image.
- `srcImageLayout` is the layout of the source image subresources for the resolve.
- `dstImage` is the destination image.
- `dstImageLayout` is the layout of the destination image subresources for the resolve.
- `regionCount` is the number of regions to resolve.
- `pRegions` is a pointer to an array of VkImageResolve2 structures specifying the regions to resolve.

Valid Usage

- VUID-VkResolveImageInfo2-pRegions-00255
  The union of all source regions, and the union of all destination regions, specified by the elements of `pRegions`, **must** not overlap in memory
- VUID-VkResolveImageInfo2-srcImage-00256
  If `srcImage` is non-sparse then it **must** be bound completely and contiguously to a single `VkDeviceMemory` object
- VUID-VkResolveImageInfo2-srcImage-00257
  `srcImage` **must** have a sample count equal to any valid sample count value other than `VK_SAMPLE_COUNT_1_BIT`

- VUID-VkResolveImageInfo2-dstImage-00258
  If `dstImage` is non-sparse then it **must** be bound completely and contiguously to a single `VkDeviceMemory` object
- VUID-VkResolveImageInfo2-dstImage-00259
  `dstImage` **must** have a sample count equal to `VK_SAMPLE_COUNT_1_BIT`
- VUID-VkResolveImageInfo2-srcImageLayout-00260
  `srcImageLayout` **must** specify the layout of the image subresources of `srcImage` specified in `pRegions` at the time this command is executed on a `VkDevice`
- VUID-VkResolveImageInfo2-srcImageLayout-01400
  `srcImageLayout` **must** be `VK_IMAGE_LAYOUT_TRANSFER_SRC_OPTIMAL` or `VK_IMAGE_LAYOUT_GENERAL`
- VUID-VkResolveImageInfo2-dstImageLayout-00262
  `dstImageLayout` **must** specify the layout of the image subresources of `dstImage` specified in `pRegions` at the time this command is executed on a `VkDevice`
- VUID-VkResolveImageInfo2-dstImageLayout-01401
  `dstImageLayout` **must** be `VK_IMAGE_LAYOUT_TRANSFER_DST_OPTIMAL` or `VK_IMAGE_LAYOUT_GENERAL`
- VUID-VkResolveImageInfo2-dstImage-02003
  The format features of `dstImage` **must** contain `VK_FORMAT_FEATURE_COLOR_ATTACHMENT_BIT`
- VUID-VkResolveImageInfo2-srcImage-01386
  `srcImage` and `dstImage` **must** have been created with the same image format
- VUID-VkResolveImageInfo2-srcSubresource-01709
  The `srcSubresource.mipLevel` member of each element of `pRegions` **must** be less than the `mipLevels` specified in VkImageCreateInfo when `srcImage` was created
- VUID-VkResolveImageInfo2-dstSubresource-01710
  The `dstSubresource.mipLevel` member of each element of `pRegions` **must** be less than the `mipLevels` specified in VkImageCreateInfo when `dstImage` was created
- VUID-VkResolveImageInfo2-srcSubresource-01711
  `srcSubresource.baseArrayLayer` + `srcSubresource.layerCount` of each element of `pRegions` **must** be less than or equal to the `arrayLayers` specified in VkImageCreateInfo when `srcImage` was created
- VUID-VkResolveImageInfo2-dstSubresource-01712
  `dstSubresource.baseArrayLayer` + `dstSubresource.layerCount` of each element of `pRegions` **must** be less than or equal to the `arrayLayers` specified in VkImageCreateInfo when `dstImage` was created
- VUID-VkResolveImageInfo2-srcImage-04446
  If `dstImage` is of type `VK_IMAGE_TYPE_3D`, then for each element of `pRegions`, `srcSubresource.layerCount` **must** be `1`
- VUID-VkResolveImageInfo2-srcImage-04447
  If `dstImage` is of type `VK_IMAGE_TYPE_3D`, then for each element of `pRegions`, `dstSubresource.baseArrayLayer` **must** be `0` and `dstSubresource.layerCount` **must** be `1`
- VUID-VkResolveImageInfo2-srcOffset-00269
  For each element of `pRegions`, `srcOffset.x` and (`extent.width` + `srcOffset.x`) **must** both be greater than or equal to `0` and less than or equal to the width of the specified

srcSubresource of srcImage

- VUID-VkResolveImageInfo2-srcOffset-00270
  For each element of pRegions, srcOffset.y and (extent.height + srcOffset.y) **must** both be greater than or equal to 0 and less than or equal to the height of the specified srcSubresource of srcImage
- VUID-VkResolveImageInfo2-srcImage-00271
  If srcImage is of type VK_IMAGE_TYPE_1D, then for each element of pRegions, srcOffset.y **must** be 0 and extent.height **must** be 1
- VUID-VkResolveImageInfo2-srcOffset-00272
  For each element of pRegions, srcOffset.z and (extent.depth + srcOffset.z) **must** both be greater than or equal to 0 and less than or equal to the depth of the specified srcSubresource of srcImage
- VUID-VkResolveImageInfo2-srcImage-00273
  If srcImage is of type VK_IMAGE_TYPE_1D or VK_IMAGE_TYPE_2D, then for each element of pRegions, srcOffset.z **must** be 0 and extent.depth **must** be 1
- VUID-VkResolveImageInfo2-dstOffset-00274
  For each element of pRegions, dstOffset.x and (extent.width + dstOffset.x) **must** both be greater than or equal to 0 and less than or equal to the width of the specified dstSubresource of dstImage
- VUID-VkResolveImageInfo2-dstOffset-00275
  For each element of pRegions, dstOffset.y and (extent.height + dstOffset.y) **must** both be greater than or equal to 0 and less than or equal to the height of the specified dstSubresource of dstImage
- VUID-VkResolveImageInfo2-dstImage-00276
  If dstImage is of type VK_IMAGE_TYPE_1D, then for each element of pRegions, dstOffset.y **must** be 0 and extent.height **must** be 1
- VUID-VkResolveImageInfo2-dstOffset-00277
  For each element of pRegions, dstOffset.z and (extent.depth + dstOffset.z) **must** both be greater than or equal to 0 and less than or equal to the depth of the specified dstSubresource of dstImage
- VUID-VkResolveImageInfo2-dstImage-00278
  If dstImage is of type VK_IMAGE_TYPE_1D or VK_IMAGE_TYPE_2D, then for each element of pRegions, dstOffset.z **must** be 0 and extent.depth **must** be 1
- VUID-VkResolveImageInfo2-srcImage-06762
  srcImage **must** have been created with VK_IMAGE_USAGE_TRANSFER_SRC_BIT usage flag
- VUID-VkResolveImageInfo2-srcImage-06763
  The format features of srcImage **must** contain VK_FORMAT_FEATURE_TRANSFER_SRC_BIT
- VUID-VkResolveImageInfo2-dstImage-06764
  dstImage **must** have been created with VK_IMAGE_USAGE_TRANSFER_DST_BIT usage flag
- VUID-VkResolveImageInfo2-dstImage-06765
  The format features of dstImage **must** contain VK_FORMAT_FEATURE_TRANSFER_DST_BIT

Valid Usage (Implicit)

- VUID-VkResolveImageInfo2-sType-sType
  `sType` **must** be `VK_STRUCTURE_TYPE_RESOLVE_IMAGE_INFO_2`
- VUID-VkResolveImageInfo2-pNext-pNext
  `pNext` **must** be `NULL`
- VUID-VkResolveImageInfo2-srcImage-parameter
  `srcImage` **must** be a valid VkImage handle
- VUID-VkResolveImageInfo2-srcImageLayout-parameter
  `srcImageLayout` **must** be a valid VkImageLayout value
- VUID-VkResolveImageInfo2-dstImage-parameter
  `dstImage` **must** be a valid VkImage handle
- VUID-VkResolveImageInfo2-dstImageLayout-parameter
  `dstImageLayout` **must** be a valid VkImageLayout value
- VUID-VkResolveImageInfo2-pRegions-parameter
  `pRegions` **must** be a valid pointer to an array of `regionCount` valid VkImageResolve2 structures
- VUID-VkResolveImageInfo2-regionCount-arraylength
  `regionCount` **must** be greater than `0`
- VUID-VkResolveImageInfo2-commonparent
  Both of `dstImage`, and `srcImage` **must** have been created, allocated, or retrieved from the same VkDevice

The `VkImageResolve2` structure is defined as:

```
// Provided by VK_VERSION_1_3
typedef struct VkImageResolve2 {
    VkStructureType             sType;
    const void*                 pNext;
    VkImageSubresourceLayers    srcSubresource;
    VkOffset3D                  srcOffset;
    VkImageSubresourceLayers    dstSubresource;
    VkOffset3D                  dstOffset;
    VkExtent3D                  extent;
} VkImageResolve2;
```

- `sType` is a VkStructureType value identifying this structure.
- `pNext` is `NULL` or a pointer to a structure extending this structure.
- `srcSubresource` and `dstSubresource` are VkImageSubresourceLayers structures specifying the image subresources of the images used for the source and destination image data, respectively. Resolve of depth/stencil images is not supported.
- `srcOffset` and `dstOffset` select the initial `x`, `y`, and `z` offsets in texels of the sub-regions of the

source and destination image data.

- `extent` is the size in texels of the source image to resolve in `width`, `height` and `depth`.

Valid Usage

- VUID-VkImageResolve2-aspectMask-00266
  The `aspectMask` member of `srcSubresource` and `dstSubresource` **must** only contain `VK_IMAGE_ASPECT_COLOR_BIT`
- VUID-VkImageResolve2-layerCount-08803
  The `layerCount` member of `srcSubresource` and `dstSubresource` **must** match

Valid Usage (Implicit)

- VUID-VkImageResolve2-sType-sType
  `sType` **must** be `VK_STRUCTURE_TYPE_IMAGE_RESOLVE_2`
- VUID-VkImageResolve2-pNext-pNext
  `pNext` **must** be `NULL`
- VUID-VkImageResolve2-srcSubresource-parameter
  `srcSubresource` **must** be a valid VkImageSubresourceLayers structure
- VUID-VkImageResolve2-dstSubresource-parameter
  `dstSubresource` **must** be a valid VkImageSubresourceLayers structure

Chapter 20. Drawing Commands

Drawing commands (commands with `Draw` in the name) provoke work in a graphics pipeline. Drawing commands are recorded into a command buffer and when executed by a queue, will produce work which executes according to the bound graphics pipeline. A graphics pipeline **must** be bound to a command buffer before any drawing commands are recorded in that command buffer.

Each draw is made up of zero or more vertices and zero or more instances, which are processed by the device and result in the assembly of primitives. Primitives are assembled according to the `pInputAssemblyState` member of the VkGraphicsPipelineCreateInfo structure, which is of type `VkPipelineInputAssemblyStateCreateInfo`:

```
// Provided by VK_VERSION_1_0
typedef struct VkPipelineInputAssemblyStateCreateInfo {
    VkStructureType                            sType;
    const void*                                pNext;
    VkPipelineInputAssemblyStateCreateFlags    flags;
    VkPrimitiveTopology                        topology;
    VkBool32                                   primitiveRestartEnable;
} VkPipelineInputAssemblyStateCreateInfo;
```

- `sType` is a VkStructureType value identifying this structure.
- `pNext` is `NULL` or a pointer to a structure extending this structure.
- `flags` is reserved for future use.
- `topology` is a VkPrimitiveTopology defining the primitive topology, as described below.
- `primitiveRestartEnable` controls whether a special vertex index value is treated as restarting the assembly of primitives. This enable only applies to indexed draws (vkCmdDrawIndexed, and vkCmdDrawIndexedIndirect), and the special index value is either 0xFFFFFFFF when the `indexType` parameter of `vkCmdBindIndexBuffer` is equal to `VK_INDEX_TYPE_UINT32`, or 0xFFFF when `indexType` is equal to `VK_INDEX_TYPE_UINT16`. Primitive restart is not allowed for "list" topologies.

Restarting the assembly of primitives discards the most recent index values if those elements formed an incomplete primitive, and restarts the primitive assembly using the subsequent indices, but only assembling the immediately following element through the end of the originally specified elements. The primitive restart index value comparison is performed before adding the `vertexOffset` value to the index value.

Valid Usage

- VUID-VkPipelineInputAssemblyStateCreateInfo-topology-06252
  If `topology` is `VK_PRIMITIVE_TOPOLOGY_POINT_LIST`, `VK_PRIMITIVE_TOPOLOGY_LINE_LIST`, `VK_PRIMITIVE_TOPOLOGY_TRIANGLE_LIST`, `VK_PRIMITIVE_TOPOLOGY_LINE_LIST_WITH_ADJACENCY`, or `VK_PRIMITIVE_TOPOLOGY_TRIANGLE_LIST_WITH_ADJACENCY`, `primitiveRestartEnable` **must** be `VK_FALSE`

- VUID-VkPipelineInputAssemblyStateCreateInfo-topology-06253
  If `topology` is `VK_PRIMITIVE_TOPOLOGY_PATCH_LIST`, `primitiveRestartEnable` **must** be `VK_FALSE`
- VUID-VkPipelineInputAssemblyStateCreateInfo-topology-00429
  If the `geometryShader` feature is not enabled, `topology` **must** not be any of `VK_PRIMITIVE_TOPOLOGY_LINE_LIST_WITH_ADJACENCY`, `VK_PRIMITIVE_TOPOLOGY_LINE_STRIP_WITH_ADJACENCY`, `VK_PRIMITIVE_TOPOLOGY_TRIANGLE_LIST_WITH_ADJACENCY` or `VK_PRIMITIVE_TOPOLOGY_TRIANGLE_STRIP_WITH_ADJACENCY`
- VUID-VkPipelineInputAssemblyStateCreateInfo-topology-00430
  If the `tessellationShader` feature is not enabled, `topology` **must** not be `VK_PRIMITIVE_TOPOLOGY_PATCH_LIST`

Valid Usage (Implicit)

- VUID-VkPipelineInputAssemblyStateCreateInfo-sType-sType
  `sType` **must** be `VK_STRUCTURE_TYPE_PIPELINE_INPUT_ASSEMBLY_STATE_CREATE_INFO`
- VUID-VkPipelineInputAssemblyStateCreateInfo-pNext-pNext
  `pNext` **must** be `NULL`
- VUID-VkPipelineInputAssemblyStateCreateInfo-flags-zerobitmask
  `flags` **must** be `0`
- VUID-VkPipelineInputAssemblyStateCreateInfo-topology-parameter
  `topology` **must** be a valid VkPrimitiveTopology value

```
// Provided by VK_VERSION_1_0
typedef VkFlags VkPipelineInputAssemblyStateCreateFlags;
```

`VkPipelineInputAssemblyStateCreateFlags` is a bitmask type for setting a mask, but is currently reserved for future use.

To dynamically control whether a special vertex index value is treated as restarting the assembly of primitives, call:

```
// Provided by VK_VERSION_1_3
void vkCmdSetPrimitiveRestartEnable(
    VkCommandBuffer                             commandBuffer,
    VkBool32                                    primitiveRestartEnable);
```

- `commandBuffer` is the command buffer into which the command will be recorded.
- `primitiveRestartEnable` controls whether a special vertex index value is treated as restarting the assembly of primitives. It behaves in the same way as `VkPipelineInputAssemblyStateCreateInfo` ::`primitiveRestartEnable`

This command sets the primitive restart enable for subsequent drawing commands when the graphics pipeline is created with `VK_DYNAMIC_STATE_PRIMITIVE_RESTART_ENABLE` set in VkPipelineDynamicStateCreateInfo::`pDynamicStates`. Otherwise, this state is specified by the VkPipelineInputAssemblyStateCreateInfo::`primitiveRestartEnable` value used to create the currently active pipeline.

Valid Usage

- VUID-vkCmdSetPrimitiveRestartEnable-None-08970
  At least one of the following **must** be true:
  - the value of VkApplicationInfo::`apiVersion` used to create the VkInstance parent of `commandBuffer` is greater than or equal to Version 1.3

Valid Usage (Implicit)

- VUID-vkCmdSetPrimitiveRestartEnable-commandBuffer-parameter
  `commandBuffer` **must** be a valid VkCommandBuffer handle
- VUID-vkCmdSetPrimitiveRestartEnable-commandBuffer-recording
  `commandBuffer` **must** be in the recording state
- VUID-vkCmdSetPrimitiveRestartEnable-commandBuffer-cmdpool
  The `VkCommandPool` that `commandBuffer` was allocated from **must** support graphics operations

Host Synchronization

- Host access to `commandBuffer` **must** be externally synchronized
- Host access to the `VkCommandPool` that `commandBuffer` was allocated from **must** be externally synchronized

Command Properties

Command Buffer Levels	Render Pass Scope	Supported Queue Types	Command Type
Primary Secondary	Both	Graphics	State

20.1. Primitive Topologies

Primitive topology determines how consecutive vertices are organized into primitives, and determines the type of primitive that is used at the beginning of the graphics pipeline. The effective topology for later stages of the pipeline is altered by tessellation or geometry shading (if either is in

use) and depends on the execution modes of those shaders.

The primitive topologies defined by VkPrimitiveTopology are:

```
// Provided by VK_VERSION_1_0
typedef enum VkPrimitiveTopology {
    VK_PRIMITIVE_TOPOLOGY_POINT_LIST = 0,
    VK_PRIMITIVE_TOPOLOGY_LINE_LIST = 1,
    VK_PRIMITIVE_TOPOLOGY_LINE_STRIP = 2,
    VK_PRIMITIVE_TOPOLOGY_TRIANGLE_LIST = 3,
    VK_PRIMITIVE_TOPOLOGY_TRIANGLE_STRIP = 4,
    VK_PRIMITIVE_TOPOLOGY_TRIANGLE_FAN = 5,
    VK_PRIMITIVE_TOPOLOGY_LINE_LIST_WITH_ADJACENCY = 6,
    VK_PRIMITIVE_TOPOLOGY_LINE_STRIP_WITH_ADJACENCY = 7,
    VK_PRIMITIVE_TOPOLOGY_TRIANGLE_LIST_WITH_ADJACENCY = 8,
    VK_PRIMITIVE_TOPOLOGY_TRIANGLE_STRIP_WITH_ADJACENCY = 9,
    VK_PRIMITIVE_TOPOLOGY_PATCH_LIST = 10,
} VkPrimitiveTopology;
```

- VK_PRIMITIVE_TOPOLOGY_POINT_LIST specifies a series of separate point primitives.
- VK_PRIMITIVE_TOPOLOGY_LINE_LIST specifies a series of separate line primitives.
- VK_PRIMITIVE_TOPOLOGY_LINE_STRIP specifies a series of connected line primitives with consecutive lines sharing a vertex.
- VK_PRIMITIVE_TOPOLOGY_TRIANGLE_LIST specifies a series of separate triangle primitives.
- VK_PRIMITIVE_TOPOLOGY_TRIANGLE_STRIP specifies a series of connected triangle primitives with consecutive triangles sharing an edge.
- VK_PRIMITIVE_TOPOLOGY_TRIANGLE_FAN specifies a series of connected triangle primitives with all triangles sharing a common vertex.
- VK_PRIMITIVE_TOPOLOGY_LINE_LIST_WITH_ADJACENCY specifies a series of separate line primitives with adjacency.
- VK_PRIMITIVE_TOPOLOGY_LINE_STRIP_WITH_ADJACENCY specifies a series of connected line primitives with adjacency, with consecutive primitives sharing three vertices.
- VK_PRIMITIVE_TOPOLOGY_TRIANGLE_LIST_WITH_ADJACENCY specifies a series of separate triangle primitives with adjacency.
- VK_PRIMITIVE_TOPOLOGY_TRIANGLE_STRIP_WITH_ADJACENCY specifies connected triangle primitives with adjacency, with consecutive triangles sharing an edge.
- VK_PRIMITIVE_TOPOLOGY_PATCH_LIST specifies separate patch primitives.

Each primitive topology, and its construction from a list of vertices, is described in detail below with a supporting diagram, according to the following key:

•	Vertex	A point in 3-dimensional space. Positions chosen within the diagrams are arbitrary and for illustration only.
5	Vertex Number	Sequence position of a vertex within the provided vertex data.

	Provoking Vertex	Provoking vertex within the main primitive. The tail is angled towards the relevant primitive. Used in flat shading.
	Primitive Edge	An edge connecting the points of a main primitive.
	Adjacency Edge	Points connected by these lines do not contribute to a main primitive, and are only accessible in a geometry shader.
	Winding Order	The relative order in which vertices are defined within a primitive, used in the facing determination. This ordering has no specific start or end point.

The diagrams are supported with mathematical definitions where the vertices (v) and primitives (p) are numbered starting from 0; v_0 is the first vertex in the provided data and p_0 is the first primitive in the set of primitives defined by the vertices and topology.

To dynamically set primitive topology, call:

```
// Provided by VK_VERSION_1_3
void vkCmdSetPrimitiveTopology(
    VkCommandBuffer                             commandBuffer,
    VkPrimitiveTopology                         primitiveTopology);
```

- `commandBuffer` is the command buffer into which the command will be recorded.
- `primitiveTopology` specifies the primitive topology to use for drawing.

This command sets the primitive topology for subsequent drawing commands when the graphics pipeline is created with `VK_DYNAMIC_STATE_PRIMITIVE_TOPOLOGY` set in VkPipelineDynamicStateCreateInfo::`pDynamicStates`. Otherwise, this state is specified by the VkPipelineInputAssemblyStateCreateInfo::`topology` value used to create the currently active pipeline.

Valid Usage

- VUID-vkCmdSetPrimitiveTopology-None-08971
  At least one of the following **must** be true:
  - the value of VkApplicationInfo::`apiVersion` used to create the VkInstance parent of `commandBuffer` is greater than or equal to Version 1.3

Valid Usage (Implicit)

- VUID-vkCmdSetPrimitiveTopology-commandBuffer-parameter
  `commandBuffer` **must** be a valid VkCommandBuffer handle
- VUID-vkCmdSetPrimitiveTopology-primitiveTopology-parameter
  `primitiveTopology` **must** be a valid VkPrimitiveTopology value
- VUID-vkCmdSetPrimitiveTopology-commandBuffer-recording

commandBuffer **must** be in the recording state

- VUID-vkCmdSetPrimitiveTopology-commandBuffer-cmdpool
  The VkCommandPool that commandBuffer was allocated from **must** support graphics operations

Host Synchronization

- Host access to commandBuffer **must** be externally synchronized
- Host access to the VkCommandPool that commandBuffer was allocated from **must** be externally synchronized

Command Properties

Command Buffer Levels	Render Pass Scope	Supported Queue Types	Command Type
Primary Secondary	Both	Graphics	State

20.1.1. Topology Class

The primitive topologies are grouped into the following topology classes:

Table 20. Topology Classes

Topology Class	Primitive Topology
Point	VK_PRIMITIVE_TOPOLOGY_POINT_LIST
Line	VK_PRIMITIVE_TOPOLOGY_LINE_LIST, VK_PRIMITIVE_TOPOLOGY_LINE_STRIP, VK_PRIMITIVE_TOPOLOGY_LINE_LIST_WITH_ADJACENCY, VK_PRIMITIVE_TOPOLOGY_LINE_STRIP_WITH_ADJACENCY
Triangle	VK_PRIMITIVE_TOPOLOGY_TRIANGLE_LIST, VK_PRIMITIVE_TOPOLOGY_TRIANGLE_STRIP, VK_PRIMITIVE_TOPOLOGY_TRIANGLE_FAN, VK_PRIMITIVE_TOPOLOGY_TRIANGLE_LIST_WITH_ADJACENCY, VK_PRIMITIVE_TOPOLOGY_TRIANGLE_STRIP_WITH_ADJACENCY
Patch	VK_PRIMITIVE_TOPOLOGY_PATCH_LIST

20.1.2. Point Lists

When the topology is VK_PRIMITIVE_TOPOLOGY_POINT_LIST, each consecutive vertex defines a single

point primitive, according to the equation:

$$p_i = \{v_i\}$$

As there is only one vertex, that vertex is the provoking vertex. The number of primitives generated is equal to `vertexCount`.

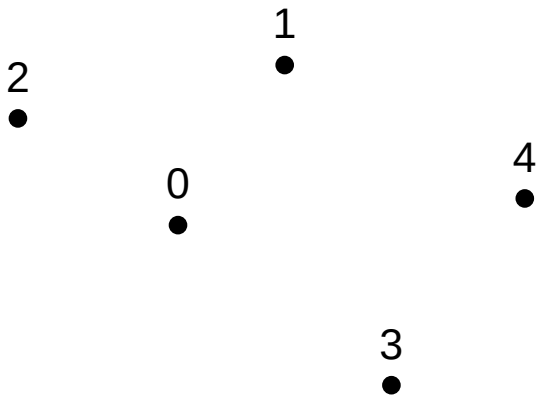

20.1.3. Line Lists

When the primitive topology is `VK_PRIMITIVE_TOPOLOGY_LINE_LIST`, each consecutive pair of vertices defines a single line primitive, according to the equation:

$$p_i = \{v_{2i}, v_{2i+1}\}$$

The number of primitives generated is equal to $\lfloor$`vertexCount`/2$\rfloor$.

The provoking vertex for p_i is v_{2i}.



20.1.4. Line Strips

When the primitive topology is `VK_PRIMITIVE_TOPOLOGY_LINE_STRIP`, one line primitive is defined by each vertex and the following vertex, according to the equation:

$$p_i = \{v_i, v_{i+1}\}$$

The number of primitives generated is equal to max(0,`vertexCount`-1).

The provoking vertex for p_i is v_i.



20.1.5. Triangle Lists

When the primitive topology is `VK_PRIMITIVE_TOPOLOGY_TRIANGLE_LIST`, each consecutive set of three vertices defines a single triangle primitive, according to the equation:

$$p_i = \{v_{3i}, v_{3i+1}, v_{3i+2}\}$$

The number of primitives generated is equal to ⌊`vertexCount`/3⌋.

The provoking vertex for p_i is v_{3i}.

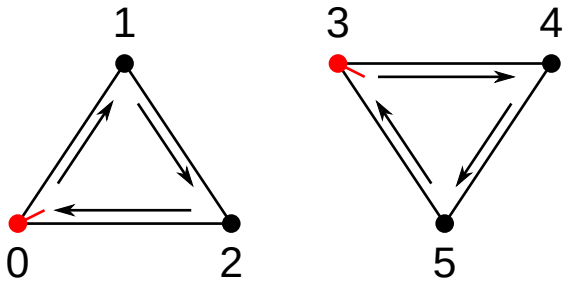

20.1.6. Triangle Strips

When the primitive topology is `VK_PRIMITIVE_TOPOLOGY_TRIANGLE_STRIP`, one triangle primitive is defined by each vertex and the two vertices that follow it, according to the equation:

$$p_i = \{v_i, v_{i+(1+i\%2)}, v_{i+(2-i\%2)}\}$$

The number of primitives generated is equal to max(0,`vertexCount`-2).

The provoking vertex for p_i is v_i.

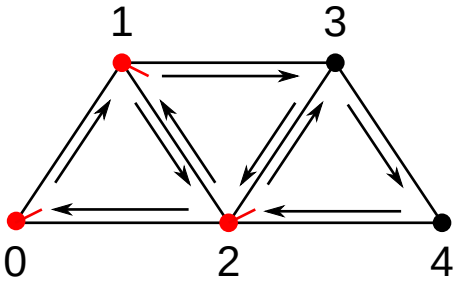

NOTE The ordering of the vertices in each successive triangle is reversed, so that the winding order is consistent throughout the strip.

20.1.7. Triangle Fans

When the primitive topology is `VK_PRIMITIVE_TOPOLOGY_TRIANGLE_FAN`, triangle primitives are defined around a shared common vertex, according to the equation:

$p_i = \{v_{i+1}, v_{i+2}, v_0\}$

The number of primitives generated is equal to max(0,`vertexCount`-2).

The provoking vertex for p_i is v_{i+1}.

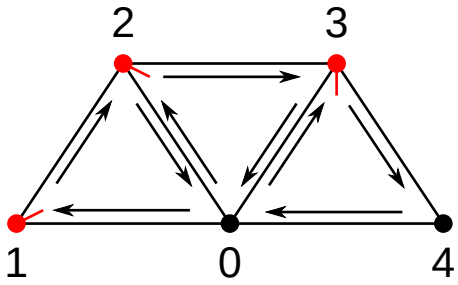

20.1.8. Line Lists With Adjacency

When the primitive topology is `VK_PRIMITIVE_TOPOLOGY_LINE_LIST_WITH_ADJACENCY`, each consecutive set of four vertices defines a single line primitive with adjacency, according to the equation:

$p_i = \{v_{4i}, v_{4i+1}, v_{4i+2}, v_{4i+3}\}$

A line primitive is described by the second and third vertices of the total primitive, with the remaining two vertices only accessible in a geometry shader.

The number of primitives generated is equal to ⌊`vertexCount`/4⌋.

The provoking vertex for p_i is v_{4i+1}.

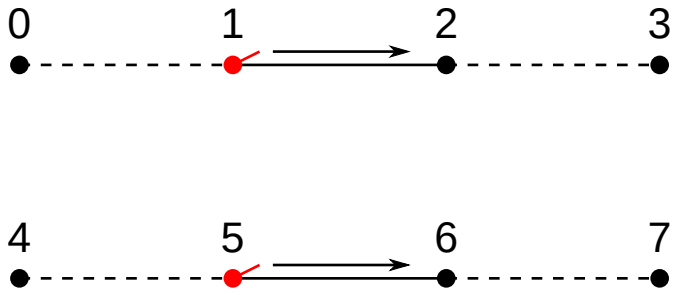

20.1.9. Line Strips With Adjacency

When the primitive topology is `VK_PRIMITIVE_TOPOLOGY_LINE_STRIP_WITH_ADJACENCY`, one line primitive with adjacency is defined by each vertex and the following vertex, according to the equation:

$p_i = \{v_i, v_{i+1}, v_{i+2}, v_{i+3}\}$

A line primitive is described by the second and third vertices of the total primitive, with the remaining two vertices only accessible in a geometry shader.

The number of primitives generated is equal to max(0,`vertexCount`-3).

The provoking vertex for p_i is v_{i+1}.



20.1.10. Triangle Lists With Adjacency

When the primitive topology is `VK_PRIMITIVE_TOPOLOGY_TRIANGLE_LIST_WITH_ADJACENCY`, each consecutive set of six vertices defines a single triangle primitive with adjacency, according to the equations:

$$p_i = \{v_{6i}, v_{6i+1}, v_{6i+2}, v_{6i+3}, v_{6i+4}, v_{6i+5}\}$$

A triangle primitive is described by the first, third, and fifth vertices of the total primitive, with the remaining three vertices only accessible in a geometry shader.

The number of primitives generated is equal to $\lfloor$`vertexCount`/6$\rfloor$.

The provoking vertex for p_i is v_{6i}.

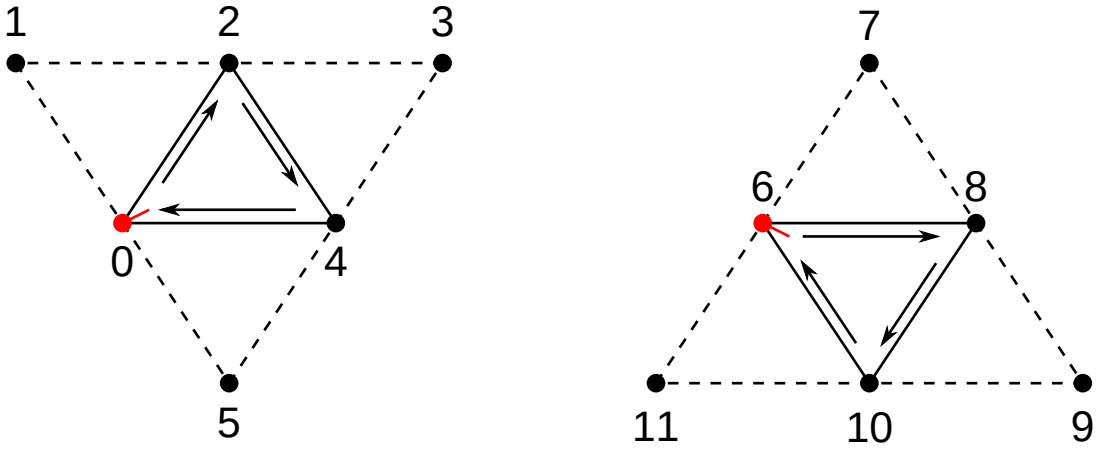

20.1.11. Triangle Strips With Adjacency

When the primitive topology is `VK_PRIMITIVE_TOPOLOGY_TRIANGLE_STRIP_WITH_ADJACENCY`, one triangle primitive with adjacency is defined by each vertex and the following 5 vertices.

The number of primitives generated, n, is equal to $\lfloor$max(0, `vertexCount` - 4)/2$\rfloor$.

If n=1, the primitive is defined as:

$$p = \{v_0, v_1, v_2, v_5, v_4, v_3\}$$

If n>1, the total primitive consists of different vertices according to where it is in the strip:

$$p_i = \{v_{2i}, v_{2i+1}, v_{2i+2}, v_{2i+6}, v_{2i+4}, v_{2i+3}\} \text{ when } i=0$$

$p_i = \{v_{2i}, v_{2i+3}, v_{2i+4}, v_{2i+6}, v_{2i+2}, v_{2i-2}\}$ when i>0, i<n-1, and i%2=1

$p_i = \{v_{2i}, v_{2i-2}, v_{2i+2}, v_{2i+6}, v_{2i+4}, v_{2i+3}\}$ when i>0, i<n-1, and i%2=0

$p_i = \{v_{2i}, v_{2i+3}, v_{2i+4}, v_{2i+5}, v_{2i+2}, v_{2i-2}\}$ when i=n-1 and i%2=1

$p_i = \{v_{2i}, v_{2i-2}, v_{2i+2}, v_{2i+5}, v_{2i+4}, v_{2i+3}\}$ when i=n-1 and i%2=0

A triangle primitive is described by the first, third, and fifth vertices of the total primitive in all cases, with the remaining three vertices only accessible in a geometry shader.

NOTE The ordering of the vertices in each successive triangle is altered so that the winding order is consistent throughout the strip.

The provoking vertex for p_i is always v_{2i}.

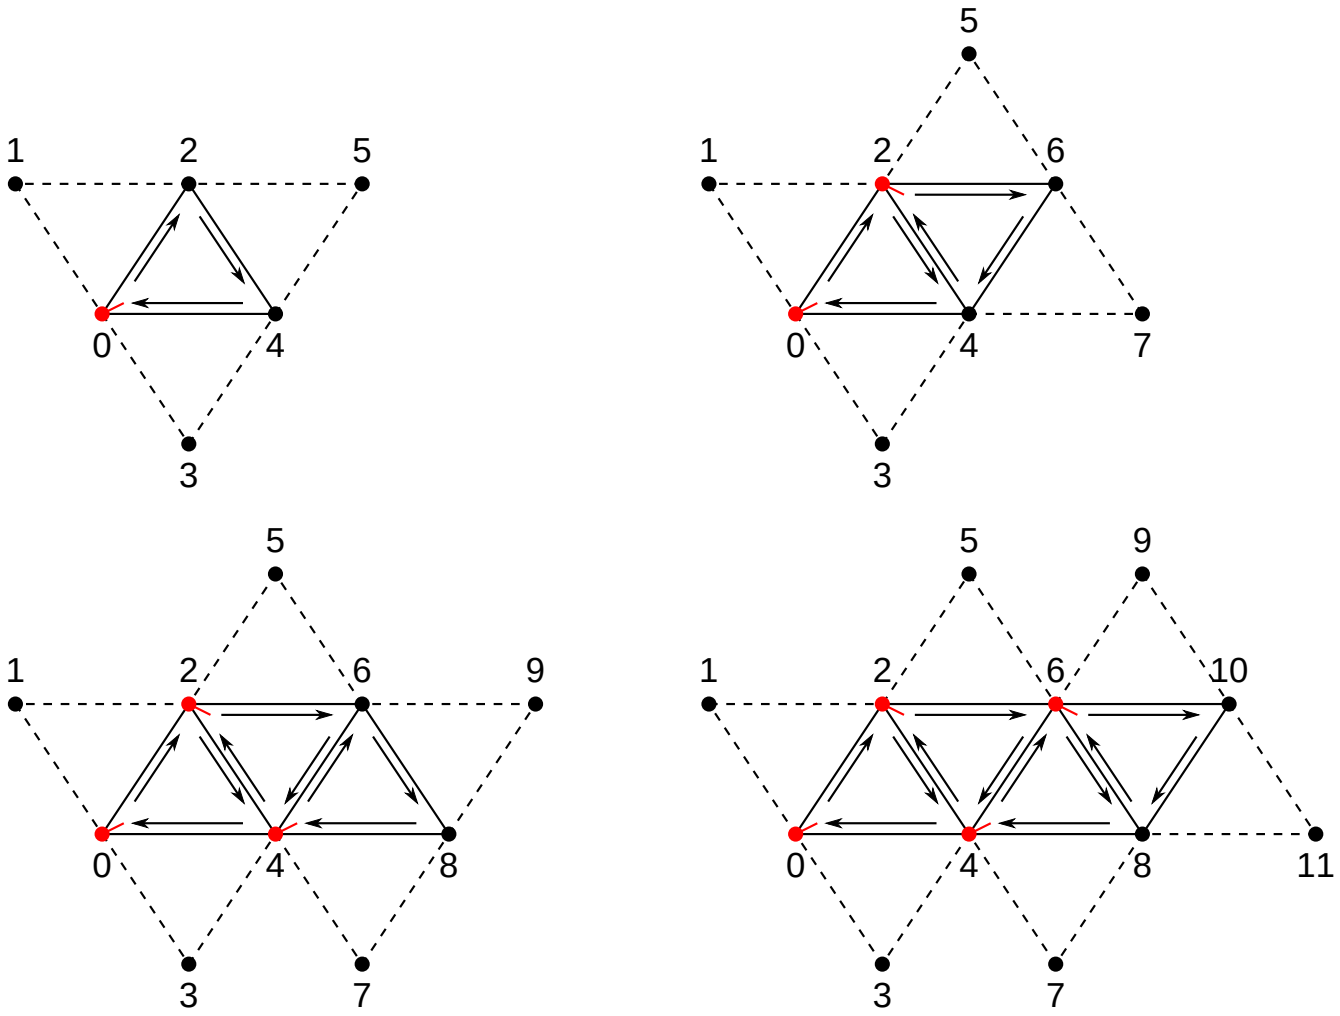

20.1.12. Patch Lists

When the primitive topology is `VK_PRIMITIVE_TOPOLOGY_PATCH_LIST`, each consecutive set of m

vertices defines a single patch primitive, according to the equation:

$$p_i = \{v_{mi}, v_{mi+1}, \ldots, v_{mi+(m-2)}, v_{mi+(m-1)}\}$$

where m is equal to VkPipelineTessellationStateCreateInfo::`patchControlPoints`.

Patch lists are never passed to vertex post-processing, and as such no provoking vertex is defined for patch primitives. The number of primitives generated is equal to ⌊`vertexCount`/m⌋.

The vertices comprising a patch have no implied geometry, and are used as inputs to tessellation shaders and the fixed-function tessellator to generate new point, line, or triangle primitives.

20.2. Primitive Order

Primitives generated by drawing commands progress through the stages of the graphics pipeline in *primitive order*. Primitive order is initially determined in the following way:

1. Submission order determines the initial ordering
2. For indirect drawing commands, the order in which accessed instances of the VkDrawIndirectCommand are stored in `buffer`, from lower indirect buffer addresses to higher addresses.
3. If a drawing command includes multiple instances, the order in which instances are executed, from lower numbered instances to higher.
4. The order in which primitives are specified by a drawing command:
   - For non-indexed draws, from vertices with a lower numbered `vertexIndex` to a higher numbered `vertexIndex`.
   - For indexed draws, vertices sourced from a lower index buffer addresses to higher addresses.

Within this order implementations further sort primitives:

5. If tessellation shading is active, by an implementation-dependent order of new primitives generated by tessellation.
6. If geometry shading is active, by the order new primitives are generated by geometry shading.
7. If the polygon mode is not `VK_POLYGON_MODE_FILL`, by an implementation-dependent ordering of the new primitives generated within the original primitive.

Primitive order is later used to define rasterization order, which determines the order in which fragments output results to a framebuffer.

20.3. Programmable Primitive Shading

Once primitives are assembled, they proceed to the vertex shading stage of the pipeline. If the draw includes multiple instances, then the set of primitives is sent to the vertex shading stage multiple times, once for each instance.

It is implementation-dependent whether vertex shading occurs on vertices that are discarded as part of incomplete primitives, but if it does occur then it operates as if they were vertices in complete primitives and such invocations **can** have side effects.

Vertex shading receives two per-vertex inputs from the primitive assembly stage - the `vertexIndex` and the `instanceIndex`. How these values are generated is defined below, with each command.

Drawing commands fall roughly into two categories:

- Non-indexed drawing commands present a sequential `vertexIndex` to the vertex shader. The sequential index is generated automatically by the device (see Fixed-Function Vertex Processing for details on both specifying the vertex attributes indexed by `vertexIndex`, as well as binding vertex buffers containing those attributes to a command buffer). These commands are:
  - vkCmdDraw
  - vkCmdDrawIndirect
  - vkCmdDrawIndirectCount
- Indexed drawing commands read index values from an *index buffer* and use this to compute the `vertexIndex` value for the vertex shader. These commands are:
  - vkCmdDrawIndexed
  - vkCmdDrawIndexedIndirect
  - vkCmdDrawIndexedIndirectCount

To bind an index buffer to a command buffer, call:

```
// Provided by VK_VERSION_1_0
void vkCmdBindIndexBuffer(
    VkCommandBuffer                             commandBuffer,
    VkBuffer                                    buffer,
    VkDeviceSize                                offset,
    VkIndexType                                 indexType);
```

- `commandBuffer` is the command buffer into which the command is recorded.
- `buffer` is the buffer being bound.
- `offset` is the starting offset in bytes within `buffer` used in index buffer address calculations.
- `indexType` is a VkIndexType value specifying the size of the indices.

Valid Usage

- VUID-vkCmdBindIndexBuffer-offset-08782
  `offset` **must** be less than the size of `buffer`
- VUID-vkCmdBindIndexBuffer-offset-08783
  The sum of `offset` and the base address of the range of `VkDeviceMemory` object that is backing `buffer`, **must** be a multiple of the size of the type indicated by `indexType`

- VUID-vkCmdBindIndexBuffer-buffer-08784
  `buffer` **must** have been created with the `VK_BUFFER_USAGE_INDEX_BUFFER_BIT` flag
- VUID-vkCmdBindIndexBuffer-buffer-08785
  If `buffer` is non-sparse then it **must** be bound completely and contiguously to a single `VkDeviceMemory` object
- VUID-vkCmdBindIndexBuffer-None-09493
  `buffer` **must** not be VK_NULL_HANDLE

Valid Usage (Implicit)

- VUID-vkCmdBindIndexBuffer-commandBuffer-parameter
  `commandBuffer` **must** be a valid VkCommandBuffer handle
- VUID-vkCmdBindIndexBuffer-buffer-parameter
  If `buffer` is not VK_NULL_HANDLE, `buffer` **must** be a valid VkBuffer handle
- VUID-vkCmdBindIndexBuffer-indexType-parameter
  `indexType` **must** be a valid VkIndexType value
- VUID-vkCmdBindIndexBuffer-commandBuffer-recording
  `commandBuffer` **must** be in the recording state
- VUID-vkCmdBindIndexBuffer-commandBuffer-cmdpool
  The `VkCommandPool` that `commandBuffer` was allocated from **must** support graphics operations
- VUID-vkCmdBindIndexBuffer-commonparent
  Both of `buffer`, and `commandBuffer` that are valid handles of non-ignored parameters **must** have been created, allocated, or retrieved from the same VkDevice

Host Synchronization

- Host access to `commandBuffer` **must** be externally synchronized
- Host access to the `VkCommandPool` that `commandBuffer` was allocated from **must** be externally synchronized

Command Properties

Command Buffer Levels	Render Pass Scope	Supported Queue Types	Command Type
Primary Secondary	Both	Graphics	State

Possible values of vkCmdBindIndexBuffer::`indexType`, specifying the size of indices, are:

```
// Provided by VK_VERSION_1_0
typedef enum VkIndexType {
    VK_INDEX_TYPE_UINT16 = 0,
    VK_INDEX_TYPE_UINT32 = 1,
} VkIndexType;
```

- VK_INDEX_TYPE_UINT16 specifies that indices are 16-bit unsigned integer values.
- VK_INDEX_TYPE_UINT32 specifies that indices are 32-bit unsigned integer values.

The parameters for each drawing command are specified directly in the command or read from buffer memory, depending on the command. Drawing commands that source their parameters from buffer memory are known as *indirect* drawing commands.

All drawing commands interact with the robustBufferAccess feature.

To record a non-indexed draw, call:

```
// Provided by VK_VERSION_1_0
void vkCmdDraw(
    VkCommandBuffer                             commandBuffer,
    uint32_t                                    vertexCount,
    uint32_t                                    instanceCount,
    uint32_t                                    firstVertex,
    uint32_t                                    firstInstance);
```

- commandBuffer is the command buffer into which the command is recorded.
- vertexCount is the number of vertices to draw.
- instanceCount is the number of instances to draw.
- firstVertex is the index of the first vertex to draw.
- firstInstance is the instance ID of the first instance to draw.

When the command is executed, primitives are assembled using the current primitive topology and vertexCount consecutive vertex indices with the first vertexIndex value equal to firstVertex. The primitives are drawn instanceCount times with instanceIndex starting with firstInstance and increasing sequentially for each instance. The assembled primitives execute the bound graphics pipeline.

Valid Usage

- VUID-vkCmdDraw-magFilter-04553
  If a VkSampler created with magFilter or minFilter equal to VK_FILTER_LINEAR, reductionMode equal to VK_SAMPLER_REDUCTION_MODE_WEIGHTED_AVERAGE, and compareEnable equal to VK_FALSE is used to sample a VkImageView as a result of this command, then the image view's format features **must** contain VK_FORMAT_FEATURE_SAMPLED_IMAGE_FILTER_LINEAR_BIT

- VUID-vkCmdDraw-magFilter-09598
  If a VkSampler created with `magFilter` or `minFilter` equal to `VK_FILTER_LINEAR` and `reductionMode` equal to either `VK_SAMPLER_REDUCTION_MODE_MIN` or `VK_SAMPLER_REDUCTION_MODE_MAX` is used to sample a VkImageView as a result of this command, then the image view's format features **must** contain `VK_FORMAT_FEATURE_SAMPLED_IMAGE_FILTER_MINMAX_BIT`
- VUID-vkCmdDraw-mipmapMode-04770
  If a VkSampler created with `mipmapMode` equal to `VK_SAMPLER_MIPMAP_MODE_LINEAR`, `reductionMode` equal to `VK_SAMPLER_REDUCTION_MODE_WEIGHTED_AVERAGE`, and `compareEnable` equal to `VK_FALSE` is used to sample a VkImageView as a result of this command, then the image view's format features **must** contain `VK_FORMAT_FEATURE_SAMPLED_IMAGE_FILTER_LINEAR_BIT`
- VUID-vkCmdDraw-mipmapMode-09599
  If a VkSampler created with `mipmapMode` equal to `VK_SAMPLER_MIPMAP_MODE_LINEAR` and `reductionMode` equal to either `VK_SAMPLER_REDUCTION_MODE_MIN` or `VK_SAMPLER_REDUCTION_MODE_MAX` is used to sample a VkImageView as a result of this command, then the image view's format features **must** contain `VK_FORMAT_FEATURE_SAMPLED_IMAGE_FILTER_MINMAX_BIT`
- VUID-vkCmdDraw-unnormalizedCoordinates-09635
  If a VkSampler created with `unnormalizedCoordinates` equal to `VK_TRUE` is used to sample a VkImageView as a result of this command, then the image view's `levelCount` and `layerCount` **must** be 1
- VUID-vkCmdDraw-unnormalizedCoordinates-09636
  If a VkSampler created with `unnormalizedCoordinates` equal to `VK_TRUE` is used to sample a VkImageView as a result of this command, then the image view's `viewType` **must** be `VK_IMAGE_VIEW_TYPE_1D` or `VK_IMAGE_VIEW_TYPE_2D`
- VUID-vkCmdDraw-None-06479
  If a VkImageView is sampled with depth comparison, the image view's format features **must** contain `VK_FORMAT_FEATURE_2_SAMPLED_IMAGE_DEPTH_COMPARISON_BIT`
- VUID-vkCmdDraw-None-02691
  If a VkImageView is accessed using atomic operations as a result of this command, then the image view's format features **must** contain `VK_FORMAT_FEATURE_STORAGE_IMAGE_ATOMIC_BIT`
- VUID-vkCmdDraw-None-07888
  If a `VK_DESCRIPTOR_TYPE_STORAGE_TEXEL_BUFFER` descriptor is accessed using atomic operations as a result of this command, then the storage texel buffer's format features **must** contain `VK_FORMAT_FEATURE_STORAGE_TEXEL_BUFFER_ATOMIC_BIT`
- VUID-vkCmdDraw-OpTypeImage-07027
  For any VkImageView being written as a storage image where the image format field of the `OpTypeImage` is `Unknown`, the view's format features **must** contain `VK_FORMAT_FEATURE_2_STORAGE_WRITE_WITHOUT_FORMAT_BIT`
- VUID-vkCmdDraw-OpTypeImage-07028
  For any VkImageView being read as a storage image where the image format field of the `OpTypeImage` is `Unknown`, the view's format features **must** contain

VK_FORMAT_FEATURE_2_STORAGE_READ_WITHOUT_FORMAT_BIT

- VUID-vkCmdDraw-OpTypeImage-07029
  For any VkBufferView being written as a storage texel buffer where the image format field of the OpTypeImage is Unknown, the view's buffer features **must** contain VK_FORMAT_FEATURE_2_STORAGE_WRITE_WITHOUT_FORMAT_BIT
- VUID-vkCmdDraw-OpTypeImage-07030
  Any VkBufferView being read as a storage texel buffer where the image format field of the OpTypeImage is Unknown then the view's buffer features **must** contain VK_FORMAT_FEATURE_2_STORAGE_READ_WITHOUT_FORMAT_BIT
- VUID-vkCmdDraw-None-08600
  For each set *n* that is statically used by a bound shader, a descriptor set **must** have been bound to *n* at the same pipeline bind point, with a VkPipelineLayout that is compatible for set *n*, with the VkPipelineLayout used to create the current VkPipeline , as described in Pipeline Layout Compatibility
- VUID-vkCmdDraw-None-08601
  For each push constant that is statically used by a bound shader, a push constant value **must** have been set for the same pipeline bind point, with a VkPipelineLayout that is compatible for push constants, with the VkPipelineLayout used to create the current VkPipeline , as described in Pipeline Layout Compatibility
- VUID-vkCmdDraw-None-10068
  For each array of resources that is used by a bound shader, the indices used to access members of the array **must** be less than the descriptor count for the identified binding in the descriptor sets used by this command
- VUID-vkCmdDraw-maintenance4-08602
  If the maintenance4 feature is not enabled, then for each push constant that is statically used by a bound shader, a push constant value **must** have been set for the same pipeline bind point, with a VkPipelineLayout that is compatible for push constants, with the VkPipelineLayout used to create the current VkPipeline , as described in Pipeline Layout Compatibility
- VUID-vkCmdDraw-None-08114
  Descriptors in each bound descriptor set, specified via vkCmdBindDescriptorSets, **must** be valid as described by descriptor validity if they are statically used by a bound shader
- VUID-vkCmdDraw-None-08606
  A valid pipeline **must** be bound to the pipeline bind point used by this command
- VUID-vkCmdDraw-None-08608
  There **must** not have been any calls to dynamic state setting commands for any state specified statically in the VkPipeline object bound to the pipeline bind point used by this command, since that pipeline was bound
- VUID-vkCmdDraw-None-08609
  If the VkPipeline object bound to the pipeline bind point used by this command accesses a VkSampler object that uses unnormalized coordinates, that sampler **must** not be used to sample from any VkImage with a VkImageView of the type VK_IMAGE_VIEW_TYPE_3D, VK_IMAGE_VIEW_TYPE_CUBE, VK_IMAGE_VIEW_TYPE_1D_ARRAY, VK_IMAGE_VIEW_TYPE_2D_ARRAY or VK_IMAGE_VIEW_TYPE_CUBE_ARRAY, in any shader stage

- VUID-vkCmdDraw-None-08610
  If the VkPipeline object bound to the pipeline bind point used by this command accesses a VkSampler object that uses unnormalized coordinates, that sampler **must** not be used with any of the SPIR-V `OpImageSample*` or `OpImageSparseSample*` instructions with `ImplicitLod`, `Dref` or `Proj` in their name, in any shader stage
- VUID-vkCmdDraw-None-08611
  If the VkPipeline object bound to the pipeline bind point used by this command accesses a VkSampler object that uses unnormalized coordinates, that sampler **must** not be used with any of the SPIR-V `OpImageSample*` or `OpImageSparseSample*` instructions that includes a LOD bias or any offset values, in any shader stage
- VUID-vkCmdDraw-uniformBuffers-06935
  If any stage of the VkPipeline object bound to the pipeline bind point used by this command accesses a uniform buffer, and the `robustBufferAccess` feature is not enabled, that stage **must** not access values outside of the range of the buffer as specified in the descriptor set bound to the same pipeline bind point
- VUID-vkCmdDraw-storageBuffers-06936
  If any stage of the VkPipeline object bound to the pipeline bind point used by this command accesses a storage buffer, and the `robustBufferAccess` feature is not enabled, that stage **must** not access values outside of the range of the buffer as specified in the descriptor set bound to the same pipeline bind point
- VUID-vkCmdDraw-commandBuffer-02707
  If `commandBuffer` is an unprotected command buffer and `protectedNoFault` is not supported, any resource accessed by bound shaders **must** not be a protected resource
- VUID-vkCmdDraw-None-06550
  If a bound shader accesses a VkSampler or VkImageView object that enables sampler $Y'C_BC_R$ conversion, that object **must** only be used with `OpImageSample*` or `OpImageSparseSample*` instructions
- VUID-vkCmdDraw-ConstOffset-06551
  If a bound shader accesses a VkSampler or VkImageView object that enables sampler $Y'C_BC_R$ conversion, that object **must** not use the `ConstOffset` and `Offset` operands
- VUID-vkCmdDraw-viewType-07752
  If a VkImageView is accessed as a result of this command, then the image view's `viewType` **must** match the `Dim` operand of the `OpTypeImage` as described in Compatibility Between SPIR-V Image Dimensions and Vulkan ImageView Types
- VUID-vkCmdDraw-format-07753
  If a VkImageView is accessed as a result of this command, then the numeric type of the image view's `format` and the `Sampled Type` operand of the `OpTypeImage` **must** match
- VUID-vkCmdDraw-OpImageWrite-08795
  If a VkImageView is accessed using `OpImageWrite` as a result of this command, then the `Type` of the `Texel` operand of that instruction **must** have at least as many components as the image view's format
- VUID-vkCmdDraw-OpImageWrite-04469
  If a VkBufferView is accessed using `OpImageWrite` as a result of this command, then the `Type` of the `Texel` operand of that instruction **must** have at least as many components as

the buffer view's format

- VUID-vkCmdDraw-None-07288
  Any shader invocation executed by this command **must** terminate
- VUID-vkCmdDraw-None-09600
  If a descriptor with type equal to any of `VK_DESCRIPTOR_TYPE_SAMPLED_IMAGE`, `VK_DESCRIPTOR_TYPE_STORAGE_IMAGE`, or `VK_DESCRIPTOR_TYPE_INPUT_ATTACHMENT` is accessed as a result of this command, the image subresource identified by that descriptor **must** be in the image layout identified when the descriptor was written
- VUID-vkCmdDraw-renderPass-02684
  The current render pass **must** be compatible with the `renderPass` member of the `VkGraphicsPipelineCreateInfo` structure specified when creating the `VkPipeline` bound to `VK_PIPELINE_BIND_POINT_GRAPHICS`
- VUID-vkCmdDraw-subpass-02685
  The subpass index of the current render pass **must** be equal to the `subpass` member of the `VkGraphicsPipelineCreateInfo` structure specified when creating the `VkPipeline` bound to `VK_PIPELINE_BIND_POINT_GRAPHICS`
- VUID-vkCmdDraw-None-07748
  If any shader statically accesses an input attachment, a valid descriptor **must** be bound to the pipeline via a descriptor set
- VUID-vkCmdDraw-OpTypeImage-07468
  If any shader executed by this pipeline accesses an `OpTypeImage` variable with a `Dim` operand of `SubpassData`, it **must** be decorated with an `InputAttachmentIndex` that corresponds to a valid input attachment in the current subpass
- VUID-vkCmdDraw-None-07469
  Input attachment views accessed in a subpass **must** be created with the same VkFormat as the corresponding subpass definition, and be created with a VkImageView that is compatible with the attachment referenced by the subpass' `pInputAttachments` [`InputAttachmentIndex`] in the currently bound VkFramebuffer as specified by Fragment Input Attachment Compatibility
- VUID-vkCmdDraw-None-06537
  Memory backing image subresources used as attachments in the current render pass **must** not be written in any way other than as an attachment by this command
- VUID-vkCmdDraw-None-09000
  If a color attachment is written by any prior command in this subpass or by the load, store, or resolve operations for this subpass,

  it **must** not be accessed in any way other than as an attachment by this command
- VUID-vkCmdDraw-None-09001
  If a depth attachment is written by any prior command in this subpass or by the load, store, or resolve operations for this subpass,

  it **must** not be accessed in any way other than as an attachment by this command
- VUID-vkCmdDraw-None-09002

If a stencil attachment is written by any prior command in this subpass or by the load, store, or resolve operations for this subpass,

it **must** not be accessed in any way other than as an attachment by this command

- VUID-vkCmdDraw-None-06539
  If any previously recorded command in the current subpass accessed an image subresource used as an attachment in this subpass in any way other than as an attachment, this command **must** not write to that image subresource as an attachment
- VUID-vkCmdDraw-None-06886
  If the current render pass instance uses a depth/stencil attachment with a read-only layout for the depth aspect, depth writes **must** be disabled
- VUID-vkCmdDraw-None-06887
  If the current render pass instance uses a depth/stencil attachment with a read-only layout for the stencil aspect, both front and back `writeMask` are not zero, and stencil test is enabled, all stencil ops **must** be `VK_STENCIL_OP_KEEP`
- VUID-vkCmdDraw-None-07831
  If the bound graphics pipeline state was created with the `VK_DYNAMIC_STATE_VIEWPORT` dynamic state enabled then vkCmdSetViewport **must** have been called and not subsequently invalidated in the current command buffer prior to this drawing command
- VUID-vkCmdDraw-None-07832
  If the bound graphics pipeline state was created with the `VK_DYNAMIC_STATE_SCISSOR` dynamic state enabled then vkCmdSetScissor **must** have been called and not subsequently invalidated in the current command buffer prior to this drawing command
- VUID-vkCmdDraw-None-07833
  If the bound graphics pipeline state was created with the `VK_DYNAMIC_STATE_LINE_WIDTH` dynamic state enabled then vkCmdSetLineWidth **must** have been called and not subsequently invalidated in the current command buffer prior to this drawing command
- VUID-vkCmdDraw-None-07834
  If a graphics pipeline is bound which was created with the `VK_DYNAMIC_STATE_DEPTH_BIAS` dynamic state enabled, the current value of `rasterizerDiscardEnable` is `VK_FALSE`, and the current value of `depthBiasEnable` is `VK_TRUE`, then vkCmdSetDepthBounds **must** have been called and not subsequently invalidated in the current command buffer prior to this drawing command
- VUID-vkCmdDraw-None-07835
  If the bound graphics pipeline state was created with the `VK_DYNAMIC_STATE_BLEND_CONSTANTS` dynamic state enabled then vkCmdSetBlendConstants **must** have been called and not subsequently invalidated in the current command buffer prior to this drawing command
- VUID-vkCmdDraw-None-07836
  If a graphics pipeline is bound which was created with the `VK_DYNAMIC_STATE_DEPTH_BOUNDS` dynamic state enabled, the current value of `rasterizerDiscardEnable` is `VK_FALSE`, and the current value of `depthBoundsTestEnable` is `VK_TRUE`, then vkCmdSetDepthBounds **must** have been called and not subsequently invalidated in the current command buffer prior to this drawing command

- VUID-vkCmdDraw-None-07837
  If a graphics pipeline is bound which was created with the VK_DYNAMIC_STATE_STENCIL_COMPARE_MASK dynamic state enabled, the current value of rasterizerDiscardEnable is VK_FALSE, and the current value of stencilTestEnable is VK_TRUE, then vkCmdSetStencilCompareMask **must** have been called and not subsequently invalidated in the current command buffer prior to this drawing command
- VUID-vkCmdDraw-None-07838
  If a graphics pipeline is bound which was created with the VK_DYNAMIC_STATE_STENCIL_WRITE_MASK dynamic state enabled, the current value of rasterizerDiscardEnable is VK_FALSE, and the current value of stencilTestEnable is VK_TRUE, then vkCmdSetStencilWriteMask **must** have been called and not subsequently invalidated in the current command buffer prior to this drawing command
- VUID-vkCmdDraw-None-07839
  If a graphics pipeline is bound which was created with the VK_DYNAMIC_STATE_STENCIL_REFERENCE dynamic state enabled, the current value of and rasterizerDiscardEnable is VK_FALSE, the current value of stencilTestEnable is VK_TRUE, then vkCmdSetStencilReference **must** have been called and not subsequently invalidated in the current command buffer prior to this drawing command
- VUID-vkCmdDraw-maxMultiviewInstanceIndex-02688
  If the draw is recorded in a render pass instance with multiview enabled, the maximum instance index **must** be less than or equal to VkPhysicalDeviceMultiviewProperties ::maxMultiviewInstanceIndex
- VUID-vkCmdDraw-None-07840
  If a graphics pipeline is bound which was created with the VK_DYNAMIC_STATE_CULL_MODE dynamic state enabled, and the current value of rasterizerDiscardEnable is VK_FALSE, then vkCmdSetCullMode **must** have been called and not subsequently invalidated in the current command buffer prior to this drawing command
- VUID-vkCmdDraw-None-07841
  If a graphics pipeline is bound which was created with the VK_DYNAMIC_STATE_FRONT_FACE dynamic state enabled, and the current value of rasterizerDiscardEnable is VK_FALSE, then vkCmdSetFrontFace **must** have been called and not subsequently invalidated in the current command buffer prior to this drawing command
- VUID-vkCmdDraw-None-07843
  If a graphics pipeline is bound which was created with the VK_DYNAMIC_STATE_DEPTH_TEST_ENABLE dynamic state enabled, and the current value of rasterizerDiscardEnable is VK_FALSE, vkCmdSetDepthTestEnable **must** have been called and not subsequently invalidated in the current command buffer prior to this drawing command
- VUID-vkCmdDraw-None-07844
  If a graphics pipeline is bound which was created with the VK_DYNAMIC_STATE_DEPTH_WRITE_ENABLE dynamic state enabled, and the current value of rasterizerDiscardEnable is VK_FALSE, then vkCmdSetDepthWriteEnable **must** have been called and not subsequently invalidated in the current command buffer prior to this drawing command
- VUID-vkCmdDraw-None-07845

If a graphics pipeline is bound which was created with the VK_DYNAMIC_STATE_DEPTH_COMPARE_OP dynamic state enabled, the current value of rasterizerDiscardEnable is VK_FALSE, and the current value of depthTestEnable is VK_TRUE, then vkCmdSetDepthCompareOp **must** have been called and not subsequently invalidated in the current command buffer prior to this drawing command

- VUID-vkCmdDraw-None-07846
  If the depthBounds feature is enabled, a graphics pipeline is bound which was created with the VK_DYNAMIC_STATE_DEPTH_BOUNDS_TEST_ENABLE dynamic state enabled, and the current value of rasterizerDiscardEnable is VK_FALSE, then vkCmdSetDepthBoundsTestEnable **must** have been called and not subsequently invalidated in the current command buffer prior to this drawing command
- VUID-vkCmdDraw-None-07847
  If a graphics pipeline is bound which was created with the VK_DYNAMIC_STATE_STENCIL_TEST_ENABLE dynamic state enabled, and the current value of rasterizerDiscardEnable is VK_FALSE, then vkCmdSetStencilTestEnable **must** have been called and not subsequently invalidated in the current command buffer prior to this drawing command
- VUID-vkCmdDraw-None-07848
  If a graphics pipeline is bound which was created with the VK_DYNAMIC_STATE_STENCIL_OP dynamic state enabled, the current value of rasterizerDiscardEnable is VK_FALSE, the current value of stencilTestEnable is VK_TRUE, then vkCmdSetStencilOp **must** have been called and not subsequently invalidated in the current command buffer prior to this drawing command
- VUID-vkCmdDraw-viewportCount-03417
  If a graphics pipeline is bound which was created with the VK_DYNAMIC_STATE_VIEWPORT_WITH_COUNT dynamic state enabled, then vkCmdSetViewportWithCount **must** have been called and not subsequently invalidated in the current command buffer prior to this drawing command
- VUID-vkCmdDraw-scissorCount-03418
  If a graphics pipeline is bound which was created with the VK_DYNAMIC_STATE_SCISSOR_WITH_COUNT dynamic state enabled, then vkCmdSetScissorWithCount **must** have been called and not subsequently invalidated in the current command buffer prior to this drawing
- VUID-vkCmdDraw-viewportCount-03419
  If a graphics pipeline is bound which was created with both the VK_DYNAMIC_STATE_SCISSOR_WITH_COUNT and VK_DYNAMIC_STATE_VIEWPORT_WITH_COUNT dynamic states enabled, then the viewportCount parameter of vkCmdSetViewportWithCount **must** match the scissorCount parameter of vkCmdSetScissorWithCount
- VUID-vkCmdDraw-None-04876
  If a graphics pipeline is bound which was created with the VK_DYNAMIC_STATE_RASTERIZER_DISCARD_ENABLE dynamic state enabled, then vkCmdSetRasterizerDiscardEnable **must** have been called and not subsequently invalidated in the current command buffer prior to this drawing command
- VUID-vkCmdDraw-None-04877
  If a graphics pipeline is bound which was created with the

VK_DYNAMIC_STATE_DEPTH_BIAS_ENABLE dynamic state enabled, and the current value of rasterizerDiscardEnable is VK_FALSE, then vkCmdSetDepthBiasEnable **must** have been called and not subsequently invalidated in the current command buffer prior to this drawing command

- VUID-vkCmdDraw-blendEnable-04727
  If rasterization is not disabled in the bound graphics pipeline, then for each color attachment in the subpass, if the corresponding image view's format features do not contain VK_FORMAT_FEATURE_COLOR_ATTACHMENT_BLEND_BIT, then the blendEnable member of the corresponding element of the pAttachments member of pColorBlendState **must** be VK_FALSE
- VUID-vkCmdDraw-multisampledRenderToSingleSampled-07284
  If rasterization is not disabled in the bound graphics pipeline,

  then rasterizationSamples for the currently bound graphics pipeline **must** be the same as the current subpass color and/or depth/stencil attachments
- VUID-vkCmdDraw-imageView-06172
  If the current render pass instance was begun with vkCmdBeginRendering, the imageView member of pDepthAttachment is not VK_NULL_HANDLE, and the layout member of pDepthAttachment is VK_IMAGE_LAYOUT_DEPTH_STENCIL_READ_ONLY_OPTIMAL, this command **must** not write any values to the depth attachment
- VUID-vkCmdDraw-imageView-06173
  If the current render pass instance was begun with vkCmdBeginRendering, the imageView member of pStencilAttachment is not VK_NULL_HANDLE, and the layout member of pStencilAttachment is VK_IMAGE_LAYOUT_DEPTH_STENCIL_READ_ONLY_OPTIMAL, this command **must** not write any values to the stencil attachment
- VUID-vkCmdDraw-imageView-06174
  If the current render pass instance was begun with vkCmdBeginRendering, the imageView member of pDepthAttachment is not VK_NULL_HANDLE, and the layout member of pDepthAttachment is VK_IMAGE_LAYOUT_DEPTH_READ_ONLY_STENCIL_ATTACHMENT_OPTIMAL, this command **must** not write any values to the depth attachment
- VUID-vkCmdDraw-imageView-06175
  If the current render pass instance was begun with vkCmdBeginRendering, the imageView member of pStencilAttachment is not VK_NULL_HANDLE, and the layout member of pStencilAttachment is VK_IMAGE_LAYOUT_DEPTH_ATTACHMENT_STENCIL_READ_ONLY_OPTIMAL, this command **must** not write any values to the stencil attachment
- VUID-vkCmdDraw-imageView-06176
  If the current render pass instance was begun with vkCmdBeginRendering, the imageView member of pDepthAttachment is not VK_NULL_HANDLE, and the layout member of pDepthAttachment is VK_IMAGE_LAYOUT_DEPTH_READ_ONLY_OPTIMAL, this command **must** not write any values to the depth attachment
- VUID-vkCmdDraw-imageView-06177
  If the current render pass instance was begun with vkCmdBeginRendering, the imageView member of pStencilAttachment is not VK_NULL_HANDLE, and the layout member of pStencilAttachment is VK_IMAGE_LAYOUT_STENCIL_READ_ONLY_OPTIMAL, this command **must** not

write any values to the stencil attachment

- VUID-vkCmdDraw-viewMask-06178
  If the current render pass instance was begun with vkCmdBeginRendering, the currently bound graphics pipeline **must** have been created with a VkPipelineRenderingCreateInfo ::viewMask equal to VkRenderingInfo::viewMask
- VUID-vkCmdDraw-colorAttachmentCount-06179
  If the current render pass instance was begun with vkCmdBeginRendering, the currently bound graphics pipeline **must** have been created with a VkPipelineRenderingCreateInfo ::colorAttachmentCount equal to VkRenderingInfo::colorAttachmentCount
- VUID-vkCmdDraw-dynamicRenderingUnusedAttachments-08910
  If the current render pass instance was begun with vkCmdBeginRendering and VkRenderingInfo::colorAttachmentCount greater than 0, then each element of the VkRenderingInfo::pColorAttachments array with an imageView not equal to VK_NULL_HANDLE **must** have been created with a VkFormat equal to the corresponding element of VkPipelineRenderingCreateInfo::pColorAttachmentFormats used to create the currently bound graphics pipeline
- VUID-vkCmdDraw-dynamicRenderingUnusedAttachments-08912
  If the current render pass instance was begun with vkCmdBeginRendering and VkRenderingInfo::colorAttachmentCount greater than 0, then each element of the VkRenderingInfo::pColorAttachments array with an imageView equal to VK_NULL_HANDLE **must** have the corresponding element of VkPipelineRenderingCreateInfo ::pColorAttachmentFormats used to create the currently bound pipeline equal to VK_FORMAT_UNDEFINED
- VUID-vkCmdDraw-dynamicRenderingUnusedAttachments-08913
  If the current render pass instance was begun with vkCmdBeginRendering, and VkRenderingInfo::pDepthAttachment->imageView was VK_NULL_HANDLE, the value of VkPipelineRenderingCreateInfo::depthAttachmentFormat used to create the currently bound graphics pipeline **must** be equal to VK_FORMAT_UNDEFINED
- VUID-vkCmdDraw-dynamicRenderingUnusedAttachments-08914
  If current render pass instance was begun with vkCmdBeginRendering, and VkRenderingInfo::pDepthAttachment->imageView was not VK_NULL_HANDLE, the value of VkPipelineRenderingCreateInfo::depthAttachmentFormat used to create the currently bound graphics pipeline **must** be equal to the VkFormat used to create VkRenderingInfo ::pDepthAttachment->imageView
- VUID-vkCmdDraw-dynamicRenderingUnusedAttachments-08916
  If the current render pass instance was begun with vkCmdBeginRendering, and VkRenderingInfo::pStencilAttachment->imageView was VK_NULL_HANDLE, the value of VkPipelineRenderingCreateInfo::stencilAttachmentFormat used to create the currently bound graphics pipeline **must** be equal to VK_FORMAT_UNDEFINED
- VUID-vkCmdDraw-dynamicRenderingUnusedAttachments-08917
  If current render pass instance was begun with vkCmdBeginRendering, and VkRenderingInfo::pStencilAttachment->imageView was not VK_NULL_HANDLE, the value of VkPipelineRenderingCreateInfo::stencilAttachmentFormat used to create the currently bound graphics pipeline **must** be equal to the VkFormat used to create VkRenderingInfo ::pStencilAttachment->imageView

- VUID-vkCmdDraw-multisampledRenderToSingleSampled-07285
  If the current render pass instance was begun with vkCmdBeginRendering with a VkRenderingInfo::colorAttachmentCount parameter greater than 0, then each element of the VkRenderingInfo::pColorAttachments array with a imageView not equal to VK_NULL_HANDLE **must** have been created with a sample count equal to the value of rasterizationSamples for the currently bound graphics pipeline
- VUID-vkCmdDraw-multisampledRenderToSingleSampled-07286
  If VkRenderingInfo::pDepthAttachment->imageView was not VK_NULL_HANDLE, the value of rasterizationSamples for the currently bound graphics pipeline **must** be equal to the sample count used to create VkRenderingInfo::pDepthAttachment->imageView
- VUID-vkCmdDraw-multisampledRenderToSingleSampled-07287
  If VkRenderingInfo::pStencilAttachment->imageView was not VK_NULL_HANDLE, the value of rasterizationSamples for the currently bound graphics pipeline **must** be equal to the sample count used to create VkRenderingInfo::pStencilAttachment->imageView
- VUID-vkCmdDraw-renderPass-06198
  If the current render pass instance was begun with vkCmdBeginRendering, the currently bound pipeline **must** have been created with a VkGraphicsPipelineCreateInfo::renderPass equal to VK_NULL_HANDLE
- VUID-vkCmdDraw-pColorAttachments-08963
  If the current render pass instance was begun with vkCmdBeginRendering, there is a graphics pipeline bound with a fragment shader that statically writes to a color attachment, the color write mask is not zero, color writes are enabled, and the corresponding element of the VkRenderingInfo::pColorAttachments->imageView was not VK_NULL_HANDLE, then the corresponding element of VkPipelineRenderingCreateInfo ::pColorAttachmentFormats used to create the pipeline **must** not be VK_FORMAT_UNDEFINED
- VUID-vkCmdDraw-pDepthAttachment-08964
  If the current render pass instance was begun with vkCmdBeginRendering, there is a graphics pipeline bound, depth test is enabled, depth write is enabled, and the VkRenderingInfo::pDepthAttachment->imageView was not VK_NULL_HANDLE, then the VkPipelineRenderingCreateInfo::depthAttachmentFormat used to create the pipeline **must** not be VK_FORMAT_UNDEFINED
- VUID-vkCmdDraw-pStencilAttachment-08965
  If the current render pass instance was begun with vkCmdBeginRendering, there is a graphics pipeline bound, stencil test is enabled and the VkRenderingInfo ::pStencilAttachment->imageView was not VK_NULL_HANDLE, then the VkPipelineRenderingCreateInfo::stencilAttachmentFormat used to create the pipeline **must** not be VK_FORMAT_UNDEFINED
- VUID-vkCmdDraw-maxFragmentDualSrcAttachments-09239
  If blending is enabled for any attachment where either the source or destination blend factors for that attachment use the secondary color input, the maximum value of Location for any output attachment statically used in the Fragment Execution Model executed by this command **must** be less than maxFragmentDualSrcAttachments
- VUID-vkCmdDraw-commandBuffer-02712
  If commandBuffer is a protected command buffer and protectedNoFault is not supported,

any resource written to by the VkPipeline object bound to the pipeline bind point used by this command **must** not be an unprotected resource

- VUID-vkCmdDraw-commandBuffer-02713
  If commandBuffer is a protected command buffer and protectedNoFault is not supported, pipeline stages other than the framebuffer-space and compute stages in the VkPipeline object bound to the pipeline bind point used by this command **must** not write to any resource

- VUID-vkCmdDraw-None-04007
  All vertex input bindings accessed via vertex input variables declared in the vertex shader entry point's interface **must** have either valid or VK_NULL_HANDLE buffers bound

- VUID-vkCmdDraw-None-04008
  If the nullDescriptor feature is not enabled, all vertex input bindings accessed via vertex input variables declared in the vertex shader entry point's interface **must** not be VK_NULL_HANDLE

- VUID-vkCmdDraw-None-02721
  If robustBufferAccess is not enabled, then for a given vertex buffer binding, any attribute data fetched **must** be entirely contained within the corresponding vertex buffer binding, as described in Vertex Input Description

- VUID-vkCmdDraw-None-07842
  If then vkCmdSetPrimitiveTopology **must** have been called and not subsequently invalidated in the current command buffer prior to this drawing command

- VUID-vkCmdDraw-dynamicPrimitiveTopologyUnrestricted-07500
  If the bound graphics pipeline state was created with the VK_DYNAMIC_STATE_PRIMITIVE_TOPOLOGY dynamic state enabled then the primitiveTopology parameter of vkCmdSetPrimitiveTopology **must** be of the same topology class as the pipeline VkPipelineInputAssemblyStateCreateInfo::topology state

- VUID-vkCmdDraw-pStrides-04913
  If the bound graphics pipeline was created with the VK_DYNAMIC_STATE_VERTEX_INPUT_BINDING_STRIDE dynamic state enabled, then vkCmdBindVertexBuffers2 **must** have been called and not subsequently invalidated in the current command buffer prior to this draw command, and the pStrides parameter of vkCmdBindVertexBuffers2 **must** not be NULL

- VUID-vkCmdDraw-None-04879
  If then vkCmdSetPrimitiveRestartEnable **must** have been called and not subsequently invalidated in the current command buffer prior to this drawing command

- VUID-vkCmdDraw-None-09637
  If the topology is VK_PRIMITIVE_TOPOLOGY_POINT_LIST, VK_PRIMITIVE_TOPOLOGY_LINE_LIST, VK_PRIMITIVE_TOPOLOGY_TRIANGLE_LIST, VK_PRIMITIVE_TOPOLOGY_LINE_LIST_WITH_ADJACENCY, or VK_PRIMITIVE_TOPOLOGY_TRIANGLE_LIST_WITH_ADJACENCY, then vkCmdSetPrimitiveRestartEnable **must** be VK_FALSE

Valid Usage (Implicit)

- VUID-vkCmdDraw-commandBuffer-parameter
  `commandBuffer` **must** be a valid VkCommandBuffer handle
- VUID-vkCmdDraw-commandBuffer-recording
  `commandBuffer` **must** be in the recording state
- VUID-vkCmdDraw-commandBuffer-cmdpool
  The `VkCommandPool` that `commandBuffer` was allocated from **must** support graphics operations
- VUID-vkCmdDraw-renderpass
  This command **must** only be called inside of a render pass instance

Host Synchronization

- Host access to `commandBuffer` **must** be externally synchronized
- Host access to the `VkCommandPool` that `commandBuffer` was allocated from **must** be externally synchronized

Command Properties

Command Buffer Levels	Render Pass Scope	Supported Queue Types	Command Type
Primary Secondary	Inside	Graphics	Action

To record an indexed draw, call:

```
// Provided by VK_VERSION_1_0
void vkCmdDrawIndexed(
    VkCommandBuffer                             commandBuffer,
    uint32_t                                    indexCount,
    uint32_t                                    instanceCount,
    uint32_t                                    firstIndex,
    int32_t                                     vertexOffset,
    uint32_t                                    firstInstance);
```

- `commandBuffer` is the command buffer into which the command is recorded.
- `indexCount` is the number of vertices to draw.
- `instanceCount` is the number of instances to draw.
- `firstIndex` is the base index within the index buffer.

- `vertexOffset` is the value added to the vertex index before indexing into the vertex buffer.
- `firstInstance` is the instance ID of the first instance to draw.

When the command is executed, primitives are assembled using the current primitive topology and `indexCount` vertices whose indices are retrieved from the index buffer. The index buffer is treated as an array of tightly packed unsigned integers of size defined by the vkCmdBindIndexBuffer ::`indexType` parameter with which the buffer was bound.

The first vertex index is at an offset of `firstIndex` × `indexSize` + `offset` within the bound index buffer, where `offset` is the offset specified by `vkCmdBindIndexBuffer` and `indexSize` is the byte size of the type specified by `indexType`. Subsequent index values are retrieved from consecutive locations in the index buffer. Indices are first compared to the primitive restart value, then zero extended to 32 bits (if the `indexType` is `VK_INDEX_TYPE_UINT16`) and have `vertexOffset` added to them, before being supplied as the `vertexIndex` value.

The primitives are drawn `instanceCount` times with `instanceIndex` starting with `firstInstance` and increasing sequentially for each instance. The assembled primitives execute the bound graphics pipeline.

Valid Usage

- VUID-vkCmdDrawIndexed-magFilter-04553
  If a VkSampler created with `magFilter` or `minFilter` equal to `VK_FILTER_LINEAR`, `reductionMode` equal to `VK_SAMPLER_REDUCTION_MODE_WEIGHTED_AVERAGE`, and `compareEnable` equal to `VK_FALSE` is used to sample a VkImageView as a result of this command, then the image view's format features **must** contain `VK_FORMAT_FEATURE_SAMPLED_IMAGE_FILTER_LINEAR_BIT`
- VUID-vkCmdDrawIndexed-magFilter-09598
  If a VkSampler created with `magFilter` or `minFilter` equal to `VK_FILTER_LINEAR` and `reductionMode` equal to either `VK_SAMPLER_REDUCTION_MODE_MIN` or `VK_SAMPLER_REDUCTION_MODE_MAX` is used to sample a VkImageView as a result of this command, then the image view's format features **must** contain `VK_FORMAT_FEATURE_SAMPLED_IMAGE_FILTER_MINMAX_BIT`
- VUID-vkCmdDrawIndexed-mipmapMode-04770
  If a VkSampler created with `mipmapMode` equal to `VK_SAMPLER_MIPMAP_MODE_LINEAR`, `reductionMode` equal to `VK_SAMPLER_REDUCTION_MODE_WEIGHTED_AVERAGE`, and `compareEnable` equal to `VK_FALSE` is used to sample a VkImageView as a result of this command, then the image view's format features **must** contain `VK_FORMAT_FEATURE_SAMPLED_IMAGE_FILTER_LINEAR_BIT`
- VUID-vkCmdDrawIndexed-mipmapMode-09599
  If a VkSampler created with `mipmapMode` equal to `VK_SAMPLER_MIPMAP_MODE_LINEAR` and `reductionMode` equal to either `VK_SAMPLER_REDUCTION_MODE_MIN` or `VK_SAMPLER_REDUCTION_MODE_MAX` is used to sample a VkImageView as a result of this command, then the image view's format features **must** contain `VK_FORMAT_FEATURE_SAMPLED_IMAGE_FILTER_MINMAX_BIT`
- VUID-vkCmdDrawIndexed-unnormalizedCoordinates-09635

If a VkSampler created with unnormalizedCoordinates equal to VK_TRUE is used to sample a VkImageView as a result of this command, then the image view's levelCount and layerCount **must** be 1

- VUID-vkCmdDrawIndexed-unnormalizedCoordinates-09636
  If a VkSampler created with unnormalizedCoordinates equal to VK_TRUE is used to sample a VkImageView as a result of this command, then the image view's viewType **must** be VK_IMAGE_VIEW_TYPE_1D or VK_IMAGE_VIEW_TYPE_2D
- VUID-vkCmdDrawIndexed-None-06479
  If a VkImageView is sampled with depth comparison, the image view's format features **must** contain VK_FORMAT_FEATURE_2_SAMPLED_IMAGE_DEPTH_COMPARISON_BIT
- VUID-vkCmdDrawIndexed-None-02691
  If a VkImageView is accessed using atomic operations as a result of this command, then the image view's format features **must** contain VK_FORMAT_FEATURE_STORAGE_IMAGE_ATOMIC_BIT
- VUID-vkCmdDrawIndexed-None-07888
  If a VK_DESCRIPTOR_TYPE_STORAGE_TEXEL_BUFFER descriptor is accessed using atomic operations as a result of this command, then the storage texel buffer's format features **must** contain VK_FORMAT_FEATURE_STORAGE_TEXEL_BUFFER_ATOMIC_BIT
- VUID-vkCmdDrawIndexed-OpTypeImage-07027
  For any VkImageView being written as a storage image where the image format field of the OpTypeImage is Unknown, the view's format features **must** contain VK_FORMAT_FEATURE_2_STORAGE_WRITE_WITHOUT_FORMAT_BIT
- VUID-vkCmdDrawIndexed-OpTypeImage-07028
  For any VkImageView being read as a storage image where the image format field of the OpTypeImage is Unknown, the view's format features **must** contain VK_FORMAT_FEATURE_2_STORAGE_READ_WITHOUT_FORMAT_BIT
- VUID-vkCmdDrawIndexed-OpTypeImage-07029
  For any VkBufferView being written as a storage texel buffer where the image format field of the OpTypeImage is Unknown, the view's buffer features **must** contain VK_FORMAT_FEATURE_2_STORAGE_WRITE_WITHOUT_FORMAT_BIT
- VUID-vkCmdDrawIndexed-OpTypeImage-07030
  Any VkBufferView being read as a storage texel buffer where the image format field of the OpTypeImage is Unknown then the view's buffer features **must** contain VK_FORMAT_FEATURE_2_STORAGE_READ_WITHOUT_FORMAT_BIT
- VUID-vkCmdDrawIndexed-None-08600
  For each set *n* that is statically used by a bound shader, a descriptor set **must** have been bound to *n* at the same pipeline bind point, with a VkPipelineLayout that is compatible for set *n*, with the VkPipelineLayout used to create the current VkPipeline , as described in Pipeline Layout Compatibility
- VUID-vkCmdDrawIndexed-None-08601
  For each push constant that is statically used by a bound shader, a push constant value **must** have been set for the same pipeline bind point, with a VkPipelineLayout that is compatible for push constants, with the VkPipelineLayout used to create the current VkPipeline , as described in Pipeline Layout Compatibility

- VUID-vkCmdDrawIndexed-None-10068
  For each array of resources that is used by a bound shader, the indices used to access members of the array **must** be less than the descriptor count for the identified binding in the descriptor sets used by this command
- VUID-vkCmdDrawIndexed-maintenance4-08602
  If the `maintenance4` feature is not enabled, then for each push constant that is statically used by a bound shader, a push constant value **must** have been set for the same pipeline bind point, with a VkPipelineLayout that is compatible for push constants, with the VkPipelineLayout used to create the current VkPipeline , as described in Pipeline Layout Compatibility
- VUID-vkCmdDrawIndexed-None-08114
  Descriptors in each bound descriptor set, specified via vkCmdBindDescriptorSets, **must** be valid as described by descriptor validity if they are statically used by a bound shader
- VUID-vkCmdDrawIndexed-None-08606
  A valid pipeline **must** be bound to the pipeline bind point used by this command
- VUID-vkCmdDrawIndexed-None-08608
  There **must** not have been any calls to dynamic state setting commands for any state specified statically in the VkPipeline object bound to the pipeline bind point used by this command, since that pipeline was bound
- VUID-vkCmdDrawIndexed-None-08609
  If the VkPipeline object bound to the pipeline bind point used by this command accesses a VkSampler object that uses unnormalized coordinates, that sampler **must** not be used to sample from any VkImage with a VkImageView of the type `VK_IMAGE_VIEW_TYPE_3D`, `VK_IMAGE_VIEW_TYPE_CUBE`, `VK_IMAGE_VIEW_TYPE_1D_ARRAY`, `VK_IMAGE_VIEW_TYPE_2D_ARRAY` or `VK_IMAGE_VIEW_TYPE_CUBE_ARRAY`, in any shader stage
- VUID-vkCmdDrawIndexed-None-08610
  If the VkPipeline object bound to the pipeline bind point used by this command accesses a VkSampler object that uses unnormalized coordinates, that sampler **must** not be used with any of the SPIR-V `OpImageSample*` or `OpImageSparseSample*` instructions with `ImplicitLod`, `Dref` or `Proj` in their name, in any shader stage
- VUID-vkCmdDrawIndexed-None-08611
  If the VkPipeline object bound to the pipeline bind point used by this command accesses a VkSampler object that uses unnormalized coordinates, that sampler **must** not be used with any of the SPIR-V `OpImageSample*` or `OpImageSparseSample*` instructions that includes a LOD bias or any offset values, in any shader stage
- VUID-vkCmdDrawIndexed-uniformBuffers-06935
  If any stage of the VkPipeline object bound to the pipeline bind point used by this command accesses a uniform buffer, and the `robustBufferAccess` feature is not enabled, that stage **must** not access values outside of the range of the buffer as specified in the descriptor set bound to the same pipeline bind point
- VUID-vkCmdDrawIndexed-storageBuffers-06936
  If any stage of the VkPipeline object bound to the pipeline bind point used by this command accesses a storage buffer, and the `robustBufferAccess` feature is not enabled, that stage **must** not access values outside of the range of the buffer as specified in the

descriptor set bound to the same pipeline bind point

- VUID-vkCmdDrawIndexed-commandBuffer-02707
  If `commandBuffer` is an unprotected command buffer and `protectedNoFault` is not supported, any resource accessed by bound shaders **must** not be a protected resource
- VUID-vkCmdDrawIndexed-None-06550
  If a bound shader accesses a VkSampler or VkImageView object that enables sampler $Y'C_BC_R$ conversion, that object **must** only be used with `OpImageSample*` or `OpImageSparseSample*` instructions
- VUID-vkCmdDrawIndexed-ConstOffset-06551
  If a bound shader accesses a VkSampler or VkImageView object that enables sampler $Y'C_BC_R$ conversion, that object **must** not use the `ConstOffset` and `Offset` operands
- VUID-vkCmdDrawIndexed-viewType-07752
  If a VkImageView is accessed as a result of this command, then the image view's `viewType` **must** match the `Dim` operand of the `OpTypeImage` as described in Compatibility Between SPIR-V Image Dimensions and Vulkan ImageView Types
- VUID-vkCmdDrawIndexed-format-07753
  If a VkImageView is accessed as a result of this command, then the numeric type of the image view's `format` and the `Sampled Type` operand of the `OpTypeImage` **must** match
- VUID-vkCmdDrawIndexed-OpImageWrite-08795
  If a VkImageView is accessed using `OpImageWrite` as a result of this command, then the `Type` of the `Texel` operand of that instruction **must** have at least as many components as the image view's format
- VUID-vkCmdDrawIndexed-OpImageWrite-04469
  If a VkBufferView is accessed using `OpImageWrite` as a result of this command, then the `Type` of the `Texel` operand of that instruction **must** have at least as many components as the buffer view's format
- VUID-vkCmdDrawIndexed-None-07288
  Any shader invocation executed by this command **must** terminate
- VUID-vkCmdDrawIndexed-None-09600
  If a descriptor with type equal to any of `VK_DESCRIPTOR_TYPE_SAMPLED_IMAGE`, `VK_DESCRIPTOR_TYPE_STORAGE_IMAGE`, or `VK_DESCRIPTOR_TYPE_INPUT_ATTACHMENT` is accessed as a result of this command, the image subresource identified by that descriptor **must** be in the image layout identified when the descriptor was written
- VUID-vkCmdDrawIndexed-renderPass-02684
  The current render pass **must** be compatible with the `renderPass` member of the `VkGraphicsPipelineCreateInfo` structure specified when creating the `VkPipeline` bound to `VK_PIPELINE_BIND_POINT_GRAPHICS`
- VUID-vkCmdDrawIndexed-subpass-02685
  The subpass index of the current render pass **must** be equal to the `subpass` member of the `VkGraphicsPipelineCreateInfo` structure specified when creating the `VkPipeline` bound to `VK_PIPELINE_BIND_POINT_GRAPHICS`
- VUID-vkCmdDrawIndexed-None-07748
  If any shader statically accesses an input attachment, a valid descriptor **must** be bound to

the pipeline via a descriptor set

- VUID-vkCmdDrawIndexed-OpTypeImage-07468
  If any shader executed by this pipeline accesses an `OpTypeImage` variable with a `Dim` operand of `SubpassData`, it **must** be decorated with an `InputAttachmentIndex` that corresponds to a valid input attachment in the current subpass
- VUID-vkCmdDrawIndexed-None-07469
  Input attachment views accessed in a subpass **must** be created with the same VkFormat as the corresponding subpass definition, and be created with a VkImageView that is compatible with the attachment referenced by the subpass' `pInputAttachments` [`InputAttachmentIndex`] in the currently bound VkFramebuffer as specified by Fragment Input Attachment Compatibility
- VUID-vkCmdDrawIndexed-None-06537
  Memory backing image subresources used as attachments in the current render pass **must** not be written in any way other than as an attachment by this command
- VUID-vkCmdDrawIndexed-None-09000
  If a color attachment is written by any prior command in this subpass or by the load, store, or resolve operations for this subpass,

  it **must** not be accessed in any way other than as an attachment by this command
- VUID-vkCmdDrawIndexed-None-09001
  If a depth attachment is written by any prior command in this subpass or by the load, store, or resolve operations for this subpass,

  it **must** not be accessed in any way other than as an attachment by this command
- VUID-vkCmdDrawIndexed-None-09002
  If a stencil attachment is written by any prior command in this subpass or by the load, store, or resolve operations for this subpass,

  it **must** not be accessed in any way other than as an attachment by this command
- VUID-vkCmdDrawIndexed-None-06539
  If any previously recorded command in the current subpass accessed an image subresource used as an attachment in this subpass in any way other than as an attachment, this command **must** not write to that image subresource as an attachment
- VUID-vkCmdDrawIndexed-None-06886
  If the current render pass instance uses a depth/stencil attachment with a read-only layout for the depth aspect, depth writes **must** be disabled
- VUID-vkCmdDrawIndexed-None-06887
  If the current render pass instance uses a depth/stencil attachment with a read-only layout for the stencil aspect, both front and back `writeMask` are not zero, and stencil test is enabled, all stencil ops **must** be `VK_STENCIL_OP_KEEP`
- VUID-vkCmdDrawIndexed-None-07831
  If the bound graphics pipeline state was created with the `VK_DYNAMIC_STATE_VIEWPORT` dynamic state enabled then vkCmdSetViewport **must** have been called and not

subsequently invalidated in the current command buffer prior to this drawing command

- VUID-vkCmdDrawIndexed-None-07832
  If the bound graphics pipeline state was created with the VK_DYNAMIC_STATE_SCISSOR dynamic state enabled then vkCmdSetScissor **must** have been called and not subsequently invalidated in the current command buffer prior to this drawing command
- VUID-vkCmdDrawIndexed-None-07833
  If the bound graphics pipeline state was created with the VK_DYNAMIC_STATE_LINE_WIDTH dynamic state enabled then vkCmdSetLineWidth **must** have been called and not subsequently invalidated in the current command buffer prior to this drawing command
- VUID-vkCmdDrawIndexed-None-07834
  If a graphics pipeline is bound which was created with the VK_DYNAMIC_STATE_DEPTH_BIAS dynamic state enabled, the current value of rasterizerDiscardEnable is VK_FALSE, and the current value of depthBiasEnable is VK_TRUE, then vkCmdSetDepthBounds **must** have been called and not subsequently invalidated in the current command buffer prior to this drawing command
- VUID-vkCmdDrawIndexed-None-07835
  If the bound graphics pipeline state was created with the VK_DYNAMIC_STATE_BLEND_CONSTANTS dynamic state enabled then vkCmdSetBlendConstants **must** have been called and not subsequently invalidated in the current command buffer prior to this drawing command
- VUID-vkCmdDrawIndexed-None-07836
  If a graphics pipeline is bound which was created with the VK_DYNAMIC_STATE_DEPTH_BOUNDS dynamic state enabled, the current value of rasterizerDiscardEnable is VK_FALSE, and the current value of depthBoundsTestEnable is VK_TRUE, then vkCmdSetDepthBounds **must** have been called and not subsequently invalidated in the current command buffer prior to this drawing command
- VUID-vkCmdDrawIndexed-None-07837
  If a graphics pipeline is bound which was created with the VK_DYNAMIC_STATE_STENCIL_COMPARE_MASK dynamic state enabled, the current value of rasterizerDiscardEnable is VK_FALSE, and the current value of stencilTestEnable is VK_TRUE, then vkCmdSetStencilCompareMask **must** have been called and not subsequently invalidated in the current command buffer prior to this drawing command
- VUID-vkCmdDrawIndexed-None-07838
  If a graphics pipeline is bound which was created with the VK_DYNAMIC_STATE_STENCIL_WRITE_MASK dynamic state enabled, the current value of rasterizerDiscardEnable is VK_FALSE, and the current value of stencilTestEnable is VK_TRUE, then vkCmdSetStencilWriteMask **must** have been called and not subsequently invalidated in the current command buffer prior to this drawing command
- VUID-vkCmdDrawIndexed-None-07839
  If a graphics pipeline is bound which was created with the VK_DYNAMIC_STATE_STENCIL_REFERENCE dynamic state enabled, the current value of and rasterizerDiscardEnable is VK_FALSE, the current value of stencilTestEnable is VK_TRUE, then vkCmdSetStencilReference **must** have been called and not subsequently invalidated in the current command buffer prior to this drawing command

- VUID-vkCmdDrawIndexed-maxMultiviewInstanceIndex-02688
  If the draw is recorded in a render pass instance with multiview enabled, the maximum instance index **must** be less than or equal to VkPhysicalDeviceMultiviewProperties ::maxMultiviewInstanceIndex
- VUID-vkCmdDrawIndexed-None-07840
  If a graphics pipeline is bound which was created with the VK_DYNAMIC_STATE_CULL_MODE dynamic state enabled, and the current value of rasterizerDiscardEnable is VK_FALSE, then vkCmdSetCullMode **must** have been called and not subsequently invalidated in the current command buffer prior to this drawing command
- VUID-vkCmdDrawIndexed-None-07841
  If a graphics pipeline is bound which was created with the VK_DYNAMIC_STATE_FRONT_FACE dynamic state enabled, and the current value of rasterizerDiscardEnable is VK_FALSE, then vkCmdSetFrontFace **must** have been called and not subsequently invalidated in the current command buffer prior to this drawing command
- VUID-vkCmdDrawIndexed-None-07843
  If a graphics pipeline is bound which was created with the VK_DYNAMIC_STATE_DEPTH_TEST_ENABLE dynamic state enabled, and the current value of rasterizerDiscardEnable is VK_FALSE, vkCmdSetDepthTestEnable **must** have been called and not subsequently invalidated in the current command buffer prior to this drawing command
- VUID-vkCmdDrawIndexed-None-07844
  If a graphics pipeline is bound which was created with the VK_DYNAMIC_STATE_DEPTH_WRITE_ENABLE dynamic state enabled, and the current value of rasterizerDiscardEnable is VK_FALSE, then vkCmdSetDepthWriteEnable **must** have been called and not subsequently invalidated in the current command buffer prior to this drawing command
- VUID-vkCmdDrawIndexed-None-07845
  If a graphics pipeline is bound which was created with the VK_DYNAMIC_STATE_DEPTH_COMPARE_OP dynamic state enabled, the current value of rasterizerDiscardEnable is VK_FALSE, and the current value of depthTestEnable is VK_TRUE, then vkCmdSetDepthCompareOp **must** have been called and not subsequently invalidated in the current command buffer prior to this drawing command
- VUID-vkCmdDrawIndexed-None-07846
  If the depthBounds feature is enabled, a graphics pipeline is bound which was created with the VK_DYNAMIC_STATE_DEPTH_BOUNDS_TEST_ENABLE dynamic state enabled, and the current value of rasterizerDiscardEnable is VK_FALSE, then vkCmdSetDepthBoundsTestEnable **must** have been called and not subsequently invalidated in the current command buffer prior to this drawing command
- VUID-vkCmdDrawIndexed-None-07847
  If a graphics pipeline is bound which was created with the VK_DYNAMIC_STATE_STENCIL_TEST_ENABLE dynamic state enabled, and the current value of rasterizerDiscardEnable is VK_FALSE, then vkCmdSetStencilTestEnable **must** have been called and not subsequently invalidated in the current command buffer prior to this drawing command
- VUID-vkCmdDrawIndexed-None-07848

If a graphics pipeline is bound which was created with the VK_DYNAMIC_STATE_STENCIL_OP dynamic state enabled, the current value of rasterizerDiscardEnable is VK_FALSE, the current value of stencilTestEnable is VK_TRUE, then vkCmdSetStencilOp **must** have been called and not subsequently invalidated in the current command buffer prior to this drawing command

- VUID-vkCmdDrawIndexed-viewportCount-03417
  If a graphics pipeline is bound which was created with the VK_DYNAMIC_STATE_VIEWPORT_WITH_COUNT dynamic state enabled, then vkCmdSetViewportWithCount **must** have been called and not subsequently invalidated in the current command buffer prior to this drawing command
- VUID-vkCmdDrawIndexed-scissorCount-03418
  If a graphics pipeline is bound which was created with the VK_DYNAMIC_STATE_SCISSOR_WITH_COUNT dynamic state enabled, then vkCmdSetScissorWithCount **must** have been called and not subsequently invalidated in the current command buffer prior to this drawing
- VUID-vkCmdDrawIndexed-viewportCount-03419
  If a graphics pipeline is bound which was created with both the VK_DYNAMIC_STATE_SCISSOR_WITH_COUNT and VK_DYNAMIC_STATE_VIEWPORT_WITH_COUNT dynamic states enabled, then the viewportCount parameter of vkCmdSetViewportWithCount **must** match the scissorCount parameter of vkCmdSetScissorWithCount
- VUID-vkCmdDrawIndexed-None-04876
  If a graphics pipeline is bound which was created with the VK_DYNAMIC_STATE_RASTERIZER_DISCARD_ENABLE dynamic state enabled, then vkCmdSetRasterizerDiscardEnable **must** have been called and not subsequently invalidated in the current command buffer prior to this drawing command
- VUID-vkCmdDrawIndexed-None-04877
  If a graphics pipeline is bound which was created with the VK_DYNAMIC_STATE_DEPTH_BIAS_ENABLE dynamic state enabled, and the current value of rasterizerDiscardEnable is VK_FALSE, then vkCmdSetDepthBiasEnable **must** have been called and not subsequently invalidated in the current command buffer prior to this drawing command
- VUID-vkCmdDrawIndexed-blendEnable-04727
  If rasterization is not disabled in the bound graphics pipeline, then for each color attachment in the subpass, if the corresponding image view's format features do not contain VK_FORMAT_FEATURE_COLOR_ATTACHMENT_BLEND_BIT, then the blendEnable member of the corresponding element of the pAttachments member of pColorBlendState **must** be VK_FALSE
- VUID-vkCmdDrawIndexed-multisampledRenderToSingleSampled-07284
  If rasterization is not disabled in the bound graphics pipeline,

  then rasterizationSamples for the currently bound graphics pipeline **must** be the same as the current subpass color and/or depth/stencil attachments
- VUID-vkCmdDrawIndexed-imageView-06172
  If the current render pass instance was begun with vkCmdBeginRendering, the imageView

member of pDepthAttachment is not VK_NULL_HANDLE, and the layout member of pDepthAttachment is VK_IMAGE_LAYOUT_DEPTH_STENCIL_READ_ONLY_OPTIMAL, this command **must** not write any values to the depth attachment

- VUID-vkCmdDrawIndexed-imageView-06173
  If the current render pass instance was begun with vkCmdBeginRendering, the imageView member of pStencilAttachment is not VK_NULL_HANDLE, and the layout member of pStencilAttachment is VK_IMAGE_LAYOUT_DEPTH_STENCIL_READ_ONLY_OPTIMAL, this command **must** not write any values to the stencil attachment
- VUID-vkCmdDrawIndexed-imageView-06174
  If the current render pass instance was begun with vkCmdBeginRendering, the imageView member of pDepthAttachment is not VK_NULL_HANDLE, and the layout member of pDepthAttachment is VK_IMAGE_LAYOUT_DEPTH_READ_ONLY_STENCIL_ATTACHMENT_OPTIMAL, this command **must** not write any values to the depth attachment
- VUID-vkCmdDrawIndexed-imageView-06175
  If the current render pass instance was begun with vkCmdBeginRendering, the imageView member of pStencilAttachment is not VK_NULL_HANDLE, and the layout member of pStencilAttachment is VK_IMAGE_LAYOUT_DEPTH_ATTACHMENT_STENCIL_READ_ONLY_OPTIMAL, this command **must** not write any values to the stencil attachment
- VUID-vkCmdDrawIndexed-imageView-06176
  If the current render pass instance was begun with vkCmdBeginRendering, the imageView member of pDepthAttachment is not VK_NULL_HANDLE, and the layout member of pDepthAttachment is VK_IMAGE_LAYOUT_DEPTH_READ_ONLY_OPTIMAL, this command **must** not write any values to the depth attachment
- VUID-vkCmdDrawIndexed-imageView-06177
  If the current render pass instance was begun with vkCmdBeginRendering, the imageView member of pStencilAttachment is not VK_NULL_HANDLE, and the layout member of pStencilAttachment is VK_IMAGE_LAYOUT_STENCIL_READ_ONLY_OPTIMAL, this command **must** not write any values to the stencil attachment
- VUID-vkCmdDrawIndexed-viewMask-06178
  If the current render pass instance was begun with vkCmdBeginRendering, the currently bound graphics pipeline **must** have been created with a VkPipelineRenderingCreateInfo ::viewMask equal to VkRenderingInfo::viewMask
- VUID-vkCmdDrawIndexed-colorAttachmentCount-06179
  If the current render pass instance was begun with vkCmdBeginRendering, the currently bound graphics pipeline **must** have been created with a VkPipelineRenderingCreateInfo ::colorAttachmentCount equal to VkRenderingInfo::colorAttachmentCount
- VUID-vkCmdDrawIndexed-dynamicRenderingUnusedAttachments-08910
  If the current render pass instance was begun with vkCmdBeginRendering and VkRenderingInfo::colorAttachmentCount greater than 0, then each element of the VkRenderingInfo::pColorAttachments array with an imageView not equal to VK_NULL_HANDLE **must** have been created with a VkFormat equal to the corresponding element of VkPipelineRenderingCreateInfo::pColorAttachmentFormats used to create the currently bound graphics pipeline
- VUID-vkCmdDrawIndexed-dynamicRenderingUnusedAttachments-08912

If the current render pass instance was begun with vkCmdBeginRendering and VkRenderingInfo::colorAttachmentCount greater than 0, then each element of the VkRenderingInfo::pColorAttachments array with an imageView equal to VK_NULL_HANDLE **must** have the corresponding element of VkPipelineRenderingCreateInfo::pColorAttachmentFormats used to create the currently bound pipeline equal to VK_FORMAT_UNDEFINED

- VUID-vkCmdDrawIndexed-dynamicRenderingUnusedAttachments-08913
  If the current render pass instance was begun with vkCmdBeginRendering, and VkRenderingInfo::pDepthAttachment->imageView was VK_NULL_HANDLE, the value of VkPipelineRenderingCreateInfo::depthAttachmentFormat used to create the currently bound graphics pipeline **must** be equal to VK_FORMAT_UNDEFINED
- VUID-vkCmdDrawIndexed-dynamicRenderingUnusedAttachments-08914
  If current render pass instance was begun with vkCmdBeginRendering, and VkRenderingInfo::pDepthAttachment->imageView was not VK_NULL_HANDLE, the value of VkPipelineRenderingCreateInfo::depthAttachmentFormat used to create the currently bound graphics pipeline **must** be equal to the VkFormat used to create VkRenderingInfo::pDepthAttachment->imageView
- VUID-vkCmdDrawIndexed-dynamicRenderingUnusedAttachments-08916
  If the current render pass instance was begun with vkCmdBeginRendering, and VkRenderingInfo::pStencilAttachment->imageView was VK_NULL_HANDLE, the value of VkPipelineRenderingCreateInfo::stencilAttachmentFormat used to create the currently bound graphics pipeline **must** be equal to VK_FORMAT_UNDEFINED
- VUID-vkCmdDrawIndexed-dynamicRenderingUnusedAttachments-08917
  If current render pass instance was begun with vkCmdBeginRendering, and VkRenderingInfo::pStencilAttachment->imageView was not VK_NULL_HANDLE, the value of VkPipelineRenderingCreateInfo::stencilAttachmentFormat used to create the currently bound graphics pipeline **must** be equal to the VkFormat used to create VkRenderingInfo::pStencilAttachment->imageView
- VUID-vkCmdDrawIndexed-multisampledRenderToSingleSampled-07285
  If the current render pass instance was begun with vkCmdBeginRendering with a VkRenderingInfo::colorAttachmentCount parameter greater than 0, then each element of the VkRenderingInfo::pColorAttachments array with a imageView not equal to VK_NULL_HANDLE **must** have been created with a sample count equal to the value of rasterizationSamples for the currently bound graphics pipeline
- VUID-vkCmdDrawIndexed-multisampledRenderToSingleSampled-07286
  If VkRenderingInfo::pDepthAttachment->imageView was not VK_NULL_HANDLE, the value of rasterizationSamples for the currently bound graphics pipeline **must** be equal to the sample count used to create VkRenderingInfo::pDepthAttachment->imageView
- VUID-vkCmdDrawIndexed-multisampledRenderToSingleSampled-07287
  If VkRenderingInfo::pStencilAttachment->imageView was not VK_NULL_HANDLE, the value of rasterizationSamples for the currently bound graphics pipeline **must** be equal to the sample count used to create VkRenderingInfo::pStencilAttachment->imageView
- VUID-vkCmdDrawIndexed-renderPass-06198
  If the current render pass instance was begun with vkCmdBeginRendering, the currently bound pipeline **must** have been created with a VkGraphicsPipelineCreateInfo::renderPass

equal to VK_NULL_HANDLE

- VUID-vkCmdDrawIndexed-pColorAttachments-08963
  If the current render pass instance was begun with vkCmdBeginRendering, there is a graphics pipeline bound with a fragment shader that statically writes to a color attachment, the color write mask is not zero, color writes are enabled, and the corresponding element of the VkRenderingInfo::pColorAttachments->imageView was not VK_NULL_HANDLE, then the corresponding element of VkPipelineRenderingCreateInfo ::pColorAttachmentFormats used to create the pipeline **must** not be VK_FORMAT_UNDEFINED
- VUID-vkCmdDrawIndexed-pDepthAttachment-08964
  If the current render pass instance was begun with vkCmdBeginRendering, there is a graphics pipeline bound, depth test is enabled, depth write is enabled, and the VkRenderingInfo::pDepthAttachment->imageView was not VK_NULL_HANDLE, then the VkPipelineRenderingCreateInfo::depthAttachmentFormat used to create the pipeline **must** not be VK_FORMAT_UNDEFINED
- VUID-vkCmdDrawIndexed-pStencilAttachment-08965
  If the current render pass instance was begun with vkCmdBeginRendering, there is a graphics pipeline bound, stencil test is enabled and the VkRenderingInfo ::pStencilAttachment->imageView was not VK_NULL_HANDLE, then the VkPipelineRenderingCreateInfo::stencilAttachmentFormat used to create the pipeline **must** not be VK_FORMAT_UNDEFINED
- VUID-vkCmdDrawIndexed-maxFragmentDualSrcAttachments-09239
  If blending is enabled for any attachment where either the source or destination blend factors for that attachment use the secondary color input, the maximum value of Location for any output attachment statically used in the Fragment Execution Model executed by this command **must** be less than maxFragmentDualSrcAttachments
- VUID-vkCmdDrawIndexed-commandBuffer-02712
  If commandBuffer is a protected command buffer and protectedNoFault is not supported, any resource written to by the VkPipeline object bound to the pipeline bind point used by this command **must** not be an unprotected resource
- VUID-vkCmdDrawIndexed-commandBuffer-02713
  If commandBuffer is a protected command buffer and protectedNoFault is not supported, pipeline stages other than the framebuffer-space and compute stages in the VkPipeline object bound to the pipeline bind point used by this command **must** not write to any resource
- VUID-vkCmdDrawIndexed-None-04007
  All vertex input bindings accessed via vertex input variables declared in the vertex shader entry point's interface **must** have either valid or VK_NULL_HANDLE buffers bound
- VUID-vkCmdDrawIndexed-None-04008
  If the nullDescriptor feature is not enabled, all vertex input bindings accessed via vertex input variables declared in the vertex shader entry point's interface **must** not be VK_NULL_HANDLE
- VUID-vkCmdDrawIndexed-None-02721

If robustBufferAccess is not enabled, then for a given vertex buffer binding, any attribute data fetched **must** be entirely contained within the corresponding vertex buffer binding, as described in Vertex Input Description

- VUID-vkCmdDrawIndexed-None-07842
  If then vkCmdSetPrimitiveTopology **must** have been called and not subsequently invalidated in the current command buffer prior to this drawing command
- VUID-vkCmdDrawIndexed-dynamicPrimitiveTopologyUnrestricted-07500
  If the bound graphics pipeline state was created with the VK_DYNAMIC_STATE_PRIMITIVE_TOPOLOGY dynamic state enabled then the primitiveTopology parameter of vkCmdSetPrimitiveTopology **must** be of the same topology class as the pipeline VkPipelineInputAssemblyStateCreateInfo::topology state
- VUID-vkCmdDrawIndexed-pStrides-04913
  If the bound graphics pipeline was created with the VK_DYNAMIC_STATE_VERTEX_INPUT_BINDING_STRIDE dynamic state enabled, then vkCmdBindVertexBuffers2 **must** have been called and not subsequently invalidated in the current command buffer prior to this draw command, and the pStrides parameter of vkCmdBindVertexBuffers2 **must** not be NULL
- VUID-vkCmdDrawIndexed-None-04879
  If then vkCmdSetPrimitiveRestartEnable **must** have been called and not subsequently invalidated in the current command buffer prior to this drawing command
- VUID-vkCmdDrawIndexed-None-09637
  If the topology is VK_PRIMITIVE_TOPOLOGY_POINT_LIST, VK_PRIMITIVE_TOPOLOGY_LINE_LIST, VK_PRIMITIVE_TOPOLOGY_TRIANGLE_LIST, VK_PRIMITIVE_TOPOLOGY_LINE_LIST_WITH_ADJACENCY, or VK_PRIMITIVE_TOPOLOGY_TRIANGLE_LIST_WITH_ADJACENCY, then vkCmdSetPrimitiveRestartEnable **must** be VK_FALSE
- VUID-vkCmdDrawIndexed-None-07312
  A valid index buffer **must** be bound
- VUID-vkCmdDrawIndexed-robustBufferAccess2-08798
  If robustBufferAccess2 is not enabled, (indexSize × (firstIndex + indexCount) + offset) **must** be less than or equal to the size of the bound index buffer, with indexSize being based on the type specified by indexType, where the index buffer, indexType, and offset are specified via vkCmdBindIndexBuffer

Valid Usage (Implicit)

- VUID-vkCmdDrawIndexed-commandBuffer-parameter
  commandBuffer **must** be a valid VkCommandBuffer handle
- VUID-vkCmdDrawIndexed-commandBuffer-recording
  commandBuffer **must** be in the recording state
- VUID-vkCmdDrawIndexed-commandBuffer-cmdpool
  The VkCommandPool that commandBuffer was allocated from **must** support graphics operations

- VUID-vkCmdDrawIndexed-renderpass
  This command **must** only be called inside of a render pass instance

Host Synchronization

- Host access to `commandBuffer` **must** be externally synchronized
- Host access to the `VkCommandPool` that `commandBuffer` was allocated from **must** be externally synchronized

Command Properties

Command Buffer Levels	Render Pass Scope	Supported Queue Types	Command Type
Primary Secondary	Inside	Graphics	Action

To record a non-indexed indirect drawing command, call:

```
// Provided by VK_VERSION_1_0
void vkCmdDrawIndirect(
    VkCommandBuffer                             commandBuffer,
    VkBuffer                                    buffer,
    VkDeviceSize                                offset,
    uint32_t                                    drawCount,
    uint32_t                                    stride);
```

- `commandBuffer` is the command buffer into which the command is recorded.
- `buffer` is the buffer containing draw parameters.
- `offset` is the byte offset into `buffer` where parameters begin.
- `drawCount` is the number of draws to execute, and **can** be zero.
- `stride` is the byte stride between successive sets of draw parameters.

`vkCmdDrawIndirect` behaves similarly to vkCmdDraw except that the parameters are read by the device from a buffer during execution. `drawCount` draws are executed by the command, with parameters taken from `buffer` starting at `offset` and increasing by `stride` bytes for each successive draw. The parameters of each draw are encoded in an array of VkDrawIndirectCommand structures. If `drawCount` is less than or equal to one, `stride` is ignored.

Valid Usage

- VUID-vkCmdDrawIndirect-magFilter-04553
  If a VkSampler created with `magFilter` or `minFilter` equal to `VK_FILTER_LINEAR`,

reductionMode equal to VK_SAMPLER_REDUCTION_MODE_WEIGHTED_AVERAGE, and compareEnable equal to VK_FALSE is used to sample a VkImageView as a result of this command, then the image view's format features **must** contain VK_FORMAT_FEATURE_SAMPLED_IMAGE_FILTER_LINEAR_BIT

- VUID-vkCmdDrawIndirect-magFilter-09598
  If a VkSampler created with magFilter or minFilter equal to VK_FILTER_LINEAR and reductionMode equal to either VK_SAMPLER_REDUCTION_MODE_MIN or VK_SAMPLER_REDUCTION_MODE_MAX is used to sample a VkImageView as a result of this command, then the image view's format features **must** contain VK_FORMAT_FEATURE_SAMPLED_IMAGE_FILTER_MINMAX_BIT
- VUID-vkCmdDrawIndirect-mipmapMode-04770
  If a VkSampler created with mipmapMode equal to VK_SAMPLER_MIPMAP_MODE_LINEAR, reductionMode equal to VK_SAMPLER_REDUCTION_MODE_WEIGHTED_AVERAGE, and compareEnable equal to VK_FALSE is used to sample a VkImageView as a result of this command, then the image view's format features **must** contain VK_FORMAT_FEATURE_SAMPLED_IMAGE_FILTER_LINEAR_BIT
- VUID-vkCmdDrawIndirect-mipmapMode-09599
  If a VkSampler created with mipmapMode equal to VK_SAMPLER_MIPMAP_MODE_LINEAR and reductionMode equal to either VK_SAMPLER_REDUCTION_MODE_MIN or VK_SAMPLER_REDUCTION_MODE_MAX is used to sample a VkImageView as a result of this command, then the image view's format features **must** contain VK_FORMAT_FEATURE_SAMPLED_IMAGE_FILTER_MINMAX_BIT
- VUID-vkCmdDrawIndirect-unnormalizedCoordinates-09635
  If a VkSampler created with unnormalizedCoordinates equal to VK_TRUE is used to sample a VkImageView as a result of this command, then the image view's levelCount and layerCount **must** be 1
- VUID-vkCmdDrawIndirect-unnormalizedCoordinates-09636
  If a VkSampler created with unnormalizedCoordinates equal to VK_TRUE is used to sample a VkImageView as a result of this command, then the image view's viewType **must** be VK_IMAGE_VIEW_TYPE_1D or VK_IMAGE_VIEW_TYPE_2D
- VUID-vkCmdDrawIndirect-None-06479
  If a VkImageView is sampled with depth comparison, the image view's format features **must** contain VK_FORMAT_FEATURE_2_SAMPLED_IMAGE_DEPTH_COMPARISON_BIT
- VUID-vkCmdDrawIndirect-None-02691
  If a VkImageView is accessed using atomic operations as a result of this command, then the image view's format features **must** contain VK_FORMAT_FEATURE_STORAGE_IMAGE_ATOMIC_BIT
- VUID-vkCmdDrawIndirect-None-07888
  If a VK_DESCRIPTOR_TYPE_STORAGE_TEXEL_BUFFER descriptor is accessed using atomic operations as a result of this command, then the storage texel buffer's format features **must** contain VK_FORMAT_FEATURE_STORAGE_TEXEL_BUFFER_ATOMIC_BIT
- VUID-vkCmdDrawIndirect-OpTypeImage-07027
  For any VkImageView being written as a storage image where the image format field of the OpTypeImage is Unknown, the view's format features **must** contain

VK_FORMAT_FEATURE_2_STORAGE_WRITE_WITHOUT_FORMAT_BIT

- VUID-vkCmdDrawIndirect-OpTypeImage-07028
  For any VkImageView being read as a storage image where the image format field of the OpTypeImage is Unknown, the view's format features **must** contain VK_FORMAT_FEATURE_2_STORAGE_READ_WITHOUT_FORMAT_BIT
- VUID-vkCmdDrawIndirect-OpTypeImage-07029
  For any VkBufferView being written as a storage texel buffer where the image format field of the OpTypeImage is Unknown, the view's buffer features **must** contain VK_FORMAT_FEATURE_2_STORAGE_WRITE_WITHOUT_FORMAT_BIT
- VUID-vkCmdDrawIndirect-OpTypeImage-07030
  Any VkBufferView being read as a storage texel buffer where the image format field of the OpTypeImage is Unknown then the view's buffer features **must** contain VK_FORMAT_FEATURE_2_STORAGE_READ_WITHOUT_FORMAT_BIT
- VUID-vkCmdDrawIndirect-None-08600
  For each set *n* that is statically used by a bound shader, a descriptor set **must** have been bound to *n* at the same pipeline bind point, with a VkPipelineLayout that is compatible for set *n*, with the VkPipelineLayout used to create the current VkPipeline , as described in Pipeline Layout Compatibility
- VUID-vkCmdDrawIndirect-None-08601
  For each push constant that is statically used by a bound shader, a push constant value **must** have been set for the same pipeline bind point, with a VkPipelineLayout that is compatible for push constants, with the VkPipelineLayout used to create the current VkPipeline , as described in Pipeline Layout Compatibility
- VUID-vkCmdDrawIndirect-None-10068
  For each array of resources that is used by a bound shader, the indices used to access members of the array **must** be less than the descriptor count for the identified binding in the descriptor sets used by this command
- VUID-vkCmdDrawIndirect-maintenance4-08602
  If the maintenance4 feature is not enabled, then for each push constant that is statically used by a bound shader, a push constant value **must** have been set for the same pipeline bind point, with a VkPipelineLayout that is compatible for push constants, with the VkPipelineLayout used to create the current VkPipeline , as described in Pipeline Layout Compatibility
- VUID-vkCmdDrawIndirect-None-08114
  Descriptors in each bound descriptor set, specified via vkCmdBindDescriptorSets, **must** be valid as described by descriptor validity if they are statically used by a bound shader
- VUID-vkCmdDrawIndirect-None-08606
  A valid pipeline **must** be bound to the pipeline bind point used by this command
- VUID-vkCmdDrawIndirect-None-08608
  There **must** not have been any calls to dynamic state setting commands for any state specified statically in the VkPipeline object bound to the pipeline bind point used by this command, since that pipeline was bound
- VUID-vkCmdDrawIndirect-None-08609

If the VkPipeline object bound to the pipeline bind point used by this command accesses a VkSampler object that uses unnormalized coordinates, that sampler **must** not be used to sample from any VkImage with a VkImageView of the type VK_IMAGE_VIEW_TYPE_3D, VK_IMAGE_VIEW_TYPE_CUBE, VK_IMAGE_VIEW_TYPE_1D_ARRAY, VK_IMAGE_VIEW_TYPE_2D_ARRAY or VK_IMAGE_VIEW_TYPE_CUBE_ARRAY, in any shader stage

- VUID-vkCmdDrawIndirect-None-08610
  If the VkPipeline object bound to the pipeline bind point used by this command accesses a VkSampler object that uses unnormalized coordinates, that sampler **must** not be used with any of the SPIR-V OpImageSample* or OpImageSparseSample* instructions with ImplicitLod, Dref or Proj in their name, in any shader stage
- VUID-vkCmdDrawIndirect-None-08611
  If the VkPipeline object bound to the pipeline bind point used by this command accesses a VkSampler object that uses unnormalized coordinates, that sampler **must** not be used with any of the SPIR-V OpImageSample* or OpImageSparseSample* instructions that includes a LOD bias or any offset values, in any shader stage
- VUID-vkCmdDrawIndirect-uniformBuffers-06935
  If any stage of the VkPipeline object bound to the pipeline bind point used by this command accesses a uniform buffer, and the robustBufferAccess feature is not enabled, that stage **must** not access values outside of the range of the buffer as specified in the descriptor set bound to the same pipeline bind point
- VUID-vkCmdDrawIndirect-storageBuffers-06936
  If any stage of the VkPipeline object bound to the pipeline bind point used by this command accesses a storage buffer, and the robustBufferAccess feature is not enabled, that stage **must** not access values outside of the range of the buffer as specified in the descriptor set bound to the same pipeline bind point
- VUID-vkCmdDrawIndirect-commandBuffer-02707
  If commandBuffer is an unprotected command buffer and protectedNoFault is not supported, any resource accessed by bound shaders **must** not be a protected resource
- VUID-vkCmdDrawIndirect-None-06550
  If a bound shader accesses a VkSampler or VkImageView object that enables sampler $Y'C_BC_R$ conversion, that object **must** only be used with OpImageSample* or OpImageSparseSample* instructions
- VUID-vkCmdDrawIndirect-ConstOffset-06551
  If a bound shader accesses a VkSampler or VkImageView object that enables sampler $Y'C_BC_R$ conversion, that object **must** not use the ConstOffset and Offset operands
- VUID-vkCmdDrawIndirect-viewType-07752
  If a VkImageView is accessed as a result of this command, then the image view's viewType **must** match the Dim operand of the OpTypeImage as described in Compatibility Between SPIR-V Image Dimensions and Vulkan ImageView Types
- VUID-vkCmdDrawIndirect-format-07753
  If a VkImageView is accessed as a result of this command, then the numeric type of the image view's format and the Sampled Type operand of the OpTypeImage **must** match
- VUID-vkCmdDrawIndirect-OpImageWrite-08795
  If a VkImageView is accessed using OpImageWrite as a result of this command, then the

Type of the Texel operand of that instruction **must** have at least as many components as the image view's format

- VUID-vkCmdDrawIndirect-OpImageWrite-04469
  If a VkBufferView is accessed using OpImageWrite as a result of this command, then the Type of the Texel operand of that instruction **must** have at least as many components as the buffer view's format
- VUID-vkCmdDrawIndirect-None-07288
  Any shader invocation executed by this command **must** terminate
- VUID-vkCmdDrawIndirect-None-09600
  If a descriptor with type equal to any of VK_DESCRIPTOR_TYPE_SAMPLED_IMAGE, VK_DESCRIPTOR_TYPE_STORAGE_IMAGE, or VK_DESCRIPTOR_TYPE_INPUT_ATTACHMENT is accessed as a result of this command, the image subresource identified by that descriptor **must** be in the image layout identified when the descriptor was written
- VUID-vkCmdDrawIndirect-renderPass-02684
  The current render pass **must** be compatible with the renderPass member of the VkGraphicsPipelineCreateInfo structure specified when creating the VkPipeline bound to VK_PIPELINE_BIND_POINT_GRAPHICS
- VUID-vkCmdDrawIndirect-subpass-02685
  The subpass index of the current render pass **must** be equal to the subpass member of the VkGraphicsPipelineCreateInfo structure specified when creating the VkPipeline bound to VK_PIPELINE_BIND_POINT_GRAPHICS
- VUID-vkCmdDrawIndirect-None-07748
  If any shader statically accesses an input attachment, a valid descriptor **must** be bound to the pipeline via a descriptor set
- VUID-vkCmdDrawIndirect-OpTypeImage-07468
  If any shader executed by this pipeline accesses an OpTypeImage variable with a Dim operand of SubpassData, it **must** be decorated with an InputAttachmentIndex that corresponds to a valid input attachment in the current subpass
- VUID-vkCmdDrawIndirect-None-07469
  Input attachment views accessed in a subpass **must** be created with the same VkFormat as the corresponding subpass definition, and be created with a VkImageView that is compatible with the attachment referenced by the subpass' pInputAttachments [InputAttachmentIndex] in the currently bound VkFramebuffer as specified by Fragment Input Attachment Compatibility
- VUID-vkCmdDrawIndirect-None-06537
  Memory backing image subresources used as attachments in the current render pass **must** not be written in any way other than as an attachment by this command
- VUID-vkCmdDrawIndirect-None-09000
  If a color attachment is written by any prior command in this subpass or by the load, store, or resolve operations for this subpass,

  it **must** not be accessed in any way other than as an attachment by this command
- VUID-vkCmdDrawIndirect-None-09001

If a depth attachment is written by any prior command in this subpass or by the load, store, or resolve operations for this subpass,

it **must** not be accessed in any way other than as an attachment by this command

- VUID-vkCmdDrawIndirect-None-09002
  If a stencil attachment is written by any prior command in this subpass or by the load, store, or resolve operations for this subpass,

  it **must** not be accessed in any way other than as an attachment by this command

- VUID-vkCmdDrawIndirect-None-06539
  If any previously recorded command in the current subpass accessed an image subresource used as an attachment in this subpass in any way other than as an attachment, this command **must** not write to that image subresource as an attachment

- VUID-vkCmdDrawIndirect-None-06886
  If the current render pass instance uses a depth/stencil attachment with a read-only layout for the depth aspect, depth writes **must** be disabled

- VUID-vkCmdDrawIndirect-None-06887
  If the current render pass instance uses a depth/stencil attachment with a read-only layout for the stencil aspect, both front and back `writeMask` are not zero, and stencil test is enabled, all stencil ops **must** be `VK_STENCIL_OP_KEEP`

- VUID-vkCmdDrawIndirect-None-07831
  If the bound graphics pipeline state was created with the `VK_DYNAMIC_STATE_VIEWPORT` dynamic state enabled then vkCmdSetViewport **must** have been called and not subsequently invalidated in the current command buffer prior to this drawing command

- VUID-vkCmdDrawIndirect-None-07832
  If the bound graphics pipeline state was created with the `VK_DYNAMIC_STATE_SCISSOR` dynamic state enabled then vkCmdSetScissor **must** have been called and not subsequently invalidated in the current command buffer prior to this drawing command

- VUID-vkCmdDrawIndirect-None-07833
  If the bound graphics pipeline state was created with the `VK_DYNAMIC_STATE_LINE_WIDTH` dynamic state enabled then vkCmdSetLineWidth **must** have been called and not subsequently invalidated in the current command buffer prior to this drawing command

- VUID-vkCmdDrawIndirect-None-07834
  If a graphics pipeline is bound which was created with the `VK_DYNAMIC_STATE_DEPTH_BIAS` dynamic state enabled, the current value of `rasterizerDiscardEnable` is `VK_FALSE`, and the current value of `depthBiasEnable` is `VK_TRUE`, then vkCmdSetDepthBounds **must** have been called and not subsequently invalidated in the current command buffer prior to this drawing command

- VUID-vkCmdDrawIndirect-None-07835
  If the bound graphics pipeline state was created with the `VK_DYNAMIC_STATE_BLEND_CONSTANTS` dynamic state enabled then vkCmdSetBlendConstants **must** have been called and not subsequently invalidated in the current command buffer prior to this drawing command

- VUID-vkCmdDrawIndirect-None-07836
  If a graphics pipeline is bound which was created with the VK_DYNAMIC_STATE_DEPTH_BOUNDS dynamic state enabled, the current value of rasterizerDiscardEnable is VK_FALSE, and the current value of depthBoundsTestEnable is VK_TRUE, then vkCmdSetDepthBounds **must** have been called and not subsequently invalidated in the current command buffer prior to this drawing command
- VUID-vkCmdDrawIndirect-None-07837
  If a graphics pipeline is bound which was created with the VK_DYNAMIC_STATE_STENCIL_COMPARE_MASK dynamic state enabled, the current value of rasterizerDiscardEnable is VK_FALSE, and the current value of stencilTestEnable is VK_TRUE, then vkCmdSetStencilCompareMask **must** have been called and not subsequently invalidated in the current command buffer prior to this drawing command
- VUID-vkCmdDrawIndirect-None-07838
  If a graphics pipeline is bound which was created with the VK_DYNAMIC_STATE_STENCIL_WRITE_MASK dynamic state enabled, the current value of rasterizerDiscardEnable is VK_FALSE, and the current value of stencilTestEnable is VK_TRUE, then vkCmdSetStencilWriteMask **must** have been called and not subsequently invalidated in the current command buffer prior to this drawing command
- VUID-vkCmdDrawIndirect-None-07839
  If a graphics pipeline is bound which was created with the VK_DYNAMIC_STATE_STENCIL_REFERENCE dynamic state enabled, the current value of and rasterizerDiscardEnable is VK_FALSE, the current value of stencilTestEnable is VK_TRUE, then vkCmdSetStencilReference **must** have been called and not subsequently invalidated in the current command buffer prior to this drawing command
- VUID-vkCmdDrawIndirect-maxMultiviewInstanceIndex-02688
  If the draw is recorded in a render pass instance with multiview enabled, the maximum instance index **must** be less than or equal to VkPhysicalDeviceMultiviewProperties ::maxMultiviewInstanceIndex
- VUID-vkCmdDrawIndirect-None-07840
  If a graphics pipeline is bound which was created with the VK_DYNAMIC_STATE_CULL_MODE dynamic state enabled, and the current value of rasterizerDiscardEnable is VK_FALSE, then vkCmdSetCullMode **must** have been called and not subsequently invalidated in the current command buffer prior to this drawing command
- VUID-vkCmdDrawIndirect-None-07841
  If a graphics pipeline is bound which was created with the VK_DYNAMIC_STATE_FRONT_FACE dynamic state enabled, and the current value of rasterizerDiscardEnable is VK_FALSE, then vkCmdSetFrontFace **must** have been called and not subsequently invalidated in the current command buffer prior to this drawing command
- VUID-vkCmdDrawIndirect-None-07843
  If a graphics pipeline is bound which was created with the VK_DYNAMIC_STATE_DEPTH_TEST_ENABLE dynamic state enabled, and the current value of rasterizerDiscardEnable is VK_FALSE, vkCmdSetDepthTestEnable **must** have been called and not subsequently invalidated in the current command buffer prior to this drawing command
- VUID-vkCmdDrawIndirect-None-07844

If a graphics pipeline is bound which was created with the VK_DYNAMIC_STATE_DEPTH_WRITE_ENABLE dynamic state enabled, and the current value of rasterizerDiscardEnable is VK_FALSE, then vkCmdSetDepthWriteEnable **must** have been called and not subsequently invalidated in the current command buffer prior to this drawing command

- VUID-vkCmdDrawIndirect-None-07845
  If a graphics pipeline is bound which was created with the VK_DYNAMIC_STATE_DEPTH_COMPARE_OP dynamic state enabled, the current value of rasterizerDiscardEnable is VK_FALSE, and the current value of depthTestEnable is VK_TRUE, then vkCmdSetDepthCompareOp **must** have been called and not subsequently invalidated in the current command buffer prior to this drawing command
- VUID-vkCmdDrawIndirect-None-07846
  If the depthBounds feature is enabled, a graphics pipeline is bound which was created with the VK_DYNAMIC_STATE_DEPTH_BOUNDS_TEST_ENABLE dynamic state enabled, and the current value of rasterizerDiscardEnable is VK_FALSE, then vkCmdSetDepthBoundsTestEnable **must** have been called and not subsequently invalidated in the current command buffer prior to this drawing command
- VUID-vkCmdDrawIndirect-None-07847
  If a graphics pipeline is bound which was created with the VK_DYNAMIC_STATE_STENCIL_TEST_ENABLE dynamic state enabled, and the current value of rasterizerDiscardEnable is VK_FALSE, then vkCmdSetStencilTestEnable **must** have been called and not subsequently invalidated in the current command buffer prior to this drawing command
- VUID-vkCmdDrawIndirect-None-07848
  If a graphics pipeline is bound which was created with the VK_DYNAMIC_STATE_STENCIL_OP dynamic state enabled, the current value of rasterizerDiscardEnable is VK_FALSE, the current value of stencilTestEnable is VK_TRUE, then vkCmdSetStencilOp **must** have been called and not subsequently invalidated in the current command buffer prior to this drawing command
- VUID-vkCmdDrawIndirect-viewportCount-03417
  If a graphics pipeline is bound which was created with the VK_DYNAMIC_STATE_VIEWPORT_WITH_COUNT dynamic state enabled, then vkCmdSetViewportWithCount **must** have been called and not subsequently invalidated in the current command buffer prior to this drawing command
- VUID-vkCmdDrawIndirect-scissorCount-03418
  If a graphics pipeline is bound which was created with the VK_DYNAMIC_STATE_SCISSOR_WITH_COUNT dynamic state enabled, then vkCmdSetScissorWithCount **must** have been called and not subsequently invalidated in the current command buffer prior to this drawing
- VUID-vkCmdDrawIndirect-viewportCount-03419
  If a graphics pipeline is bound which was created with both the VK_DYNAMIC_STATE_SCISSOR_WITH_COUNT and VK_DYNAMIC_STATE_VIEWPORT_WITH_COUNT dynamic states enabled, then the viewportCount parameter of vkCmdSetViewportWithCount **must** match the scissorCount parameter of vkCmdSetScissorWithCount
- VUID-vkCmdDrawIndirect-None-04876

If a graphics pipeline is bound which was created with the VK_DYNAMIC_STATE_RASTERIZER_DISCARD_ENABLE dynamic state enabled, then vkCmdSetRasterizerDiscardEnable **must** have been called and not subsequently invalidated in the current command buffer prior to this drawing command

- VUID-vkCmdDrawIndirect-None-04877
  If a graphics pipeline is bound which was created with the VK_DYNAMIC_STATE_DEPTH_BIAS_ENABLE dynamic state enabled, and the current value of rasterizerDiscardEnable is VK_FALSE, then vkCmdSetDepthBiasEnable **must** have been called and not subsequently invalidated in the current command buffer prior to this drawing command
- VUID-vkCmdDrawIndirect-blendEnable-04727
  If rasterization is not disabled in the bound graphics pipeline, then for each color attachment in the subpass, if the corresponding image view's format features do not contain VK_FORMAT_FEATURE_COLOR_ATTACHMENT_BLEND_BIT, then the blendEnable member of the corresponding element of the pAttachments member of pColorBlendState **must** be VK_FALSE
- VUID-vkCmdDrawIndirect-multisampledRenderToSingleSampled-07284
  If rasterization is not disabled in the bound graphics pipeline,

  then rasterizationSamples for the currently bound graphics pipeline **must** be the same as the current subpass color and/or depth/stencil attachments
- VUID-vkCmdDrawIndirect-imageView-06172
  If the current render pass instance was begun with vkCmdBeginRendering, the imageView member of pDepthAttachment is not VK_NULL_HANDLE, and the layout member of pDepthAttachment is VK_IMAGE_LAYOUT_DEPTH_STENCIL_READ_ONLY_OPTIMAL, this command **must** not write any values to the depth attachment
- VUID-vkCmdDrawIndirect-imageView-06173
  If the current render pass instance was begun with vkCmdBeginRendering, the imageView member of pStencilAttachment is not VK_NULL_HANDLE, and the layout member of pStencilAttachment is VK_IMAGE_LAYOUT_DEPTH_STENCIL_READ_ONLY_OPTIMAL, this command **must** not write any values to the stencil attachment
- VUID-vkCmdDrawIndirect-imageView-06174
  If the current render pass instance was begun with vkCmdBeginRendering, the imageView member of pDepthAttachment is not VK_NULL_HANDLE, and the layout member of pDepthAttachment is VK_IMAGE_LAYOUT_DEPTH_READ_ONLY_STENCIL_ATTACHMENT_OPTIMAL, this command **must** not write any values to the depth attachment
- VUID-vkCmdDrawIndirect-imageView-06175
  If the current render pass instance was begun with vkCmdBeginRendering, the imageView member of pStencilAttachment is not VK_NULL_HANDLE, and the layout member of pStencilAttachment is VK_IMAGE_LAYOUT_DEPTH_ATTACHMENT_STENCIL_READ_ONLY_OPTIMAL, this command **must** not write any values to the stencil attachment
- VUID-vkCmdDrawIndirect-imageView-06176
  If the current render pass instance was begun with vkCmdBeginRendering, the imageView member of pDepthAttachment is not VK_NULL_HANDLE, and the layout member of

pDepthAttachment is VK_IMAGE_LAYOUT_DEPTH_READ_ONLY_OPTIMAL, this command **must** not write any values to the depth attachment

- VUID-vkCmdDrawIndirect-imageView-06177
  If the current render pass instance was begun with vkCmdBeginRendering, the imageView member of pStencilAttachment is not VK_NULL_HANDLE, and the layout member of pStencilAttachment is VK_IMAGE_LAYOUT_STENCIL_READ_ONLY_OPTIMAL, this command **must** not write any values to the stencil attachment
- VUID-vkCmdDrawIndirect-viewMask-06178
  If the current render pass instance was begun with vkCmdBeginRendering, the currently bound graphics pipeline **must** have been created with a VkPipelineRenderingCreateInfo ::viewMask equal to VkRenderingInfo::viewMask
- VUID-vkCmdDrawIndirect-colorAttachmentCount-06179
  If the current render pass instance was begun with vkCmdBeginRendering, the currently bound graphics pipeline **must** have been created with a VkPipelineRenderingCreateInfo ::colorAttachmentCount equal to VkRenderingInfo::colorAttachmentCount
- VUID-vkCmdDrawIndirect-dynamicRenderingUnusedAttachments-08910
  If the current render pass instance was begun with vkCmdBeginRendering and VkRenderingInfo::colorAttachmentCount greater than 0, then each element of the VkRenderingInfo::pColorAttachments array with an imageView not equal to VK_NULL_HANDLE **must** have been created with a VkFormat equal to the corresponding element of VkPipelineRenderingCreateInfo::pColorAttachmentFormats used to create the currently bound graphics pipeline
- VUID-vkCmdDrawIndirect-dynamicRenderingUnusedAttachments-08912
  If the current render pass instance was begun with vkCmdBeginRendering and VkRenderingInfo::colorAttachmentCount greater than 0, then each element of the VkRenderingInfo::pColorAttachments array with an imageView equal to VK_NULL_HANDLE **must** have the corresponding element of VkPipelineRenderingCreateInfo ::pColorAttachmentFormats used to create the currently bound pipeline equal to VK_FORMAT_UNDEFINED
- VUID-vkCmdDrawIndirect-dynamicRenderingUnusedAttachments-08913
  If the current render pass instance was begun with vkCmdBeginRendering, and VkRenderingInfo::pDepthAttachment->imageView was VK_NULL_HANDLE, the value of VkPipelineRenderingCreateInfo::depthAttachmentFormat used to create the currently bound graphics pipeline **must** be equal to VK_FORMAT_UNDEFINED
- VUID-vkCmdDrawIndirect-dynamicRenderingUnusedAttachments-08914
  If current render pass instance was begun with vkCmdBeginRendering, and VkRenderingInfo::pDepthAttachment->imageView was not VK_NULL_HANDLE, the value of VkPipelineRenderingCreateInfo::depthAttachmentFormat used to create the currently bound graphics pipeline **must** be equal to the VkFormat used to create VkRenderingInfo ::pDepthAttachment->imageView
- VUID-vkCmdDrawIndirect-dynamicRenderingUnusedAttachments-08916
  If the current render pass instance was begun with vkCmdBeginRendering, and VkRenderingInfo::pStencilAttachment->imageView was VK_NULL_HANDLE, the value of VkPipelineRenderingCreateInfo::stencilAttachmentFormat used to create the currently bound graphics pipeline **must** be equal to VK_FORMAT_UNDEFINED

- VUID-vkCmdDrawIndirect-dynamicRenderingUnusedAttachments-08917
  If current render pass instance was begun with vkCmdBeginRendering, and VkRenderingInfo::pStencilAttachment->imageView was not VK_NULL_HANDLE, the value of VkPipelineRenderingCreateInfo::stencilAttachmentFormat used to create the currently bound graphics pipeline **must** be equal to the VkFormat used to create VkRenderingInfo ::pStencilAttachment->imageView
- VUID-vkCmdDrawIndirect-multisampledRenderToSingleSampled-07285
  If the current render pass instance was begun with vkCmdBeginRendering with a VkRenderingInfo::colorAttachmentCount parameter greater than 0, then each element of the VkRenderingInfo::pColorAttachments array with a imageView not equal to VK_NULL_HANDLE **must** have been created with a sample count equal to the value of rasterizationSamples for the currently bound graphics pipeline
- VUID-vkCmdDrawIndirect-multisampledRenderToSingleSampled-07286
  If VkRenderingInfo::pDepthAttachment->imageView was not VK_NULL_HANDLE, the value of rasterizationSamples for the currently bound graphics pipeline **must** be equal to the sample count used to create VkRenderingInfo::pDepthAttachment->imageView
- VUID-vkCmdDrawIndirect-multisampledRenderToSingleSampled-07287
  If VkRenderingInfo::pStencilAttachment->imageView was not VK_NULL_HANDLE, the value of rasterizationSamples for the currently bound graphics pipeline **must** be equal to the sample count used to create VkRenderingInfo::pStencilAttachment->imageView
- VUID-vkCmdDrawIndirect-renderPass-06198
  If the current render pass instance was begun with vkCmdBeginRendering, the currently bound pipeline **must** have been created with a VkGraphicsPipelineCreateInfo::renderPass equal to VK_NULL_HANDLE
- VUID-vkCmdDrawIndirect-pColorAttachments-08963
  If the current render pass instance was begun with vkCmdBeginRendering, there is a graphics pipeline bound with a fragment shader that statically writes to a color attachment, the color write mask is not zero, color writes are enabled, and the corresponding element of the VkRenderingInfo::pColorAttachments->imageView was not VK_NULL_HANDLE, then the corresponding element of VkPipelineRenderingCreateInfo ::pColorAttachmentFormats used to create the pipeline **must** not be VK_FORMAT_UNDEFINED
- VUID-vkCmdDrawIndirect-pDepthAttachment-08964
  If the current render pass instance was begun with vkCmdBeginRendering, there is a graphics pipeline bound, depth test is enabled, depth write is enabled, and the VkRenderingInfo::pDepthAttachment->imageView was not VK_NULL_HANDLE, then the VkPipelineRenderingCreateInfo::depthAttachmentFormat used to create the pipeline **must** not be VK_FORMAT_UNDEFINED
- VUID-vkCmdDrawIndirect-pStencilAttachment-08965
  If the current render pass instance was begun with vkCmdBeginRendering, there is a graphics pipeline bound, stencil test is enabled and the VkRenderingInfo ::pStencilAttachment->imageView was not VK_NULL_HANDLE, then the VkPipelineRenderingCreateInfo::stencilAttachmentFormat used to create the pipeline **must** not be VK_FORMAT_UNDEFINED
- VUID-vkCmdDrawIndirect-maxFragmentDualSrcAttachments-09239
  If blending is enabled for any attachment where either the source or destination blend

factors for that attachment use the secondary color input, the maximum value of Location for any output attachment statically used in the Fragment Execution Model executed by this command **must** be less than maxFragmentDualSrcAttachments

- VUID-vkCmdDrawIndirect-None-04007
  All vertex input bindings accessed via vertex input variables declared in the vertex shader entry point's interface **must** have either valid or VK_NULL_HANDLE buffers bound
- VUID-vkCmdDrawIndirect-None-04008
  If the nullDescriptor feature is not enabled, all vertex input bindings accessed via vertex input variables declared in the vertex shader entry point's interface **must** not be VK_NULL_HANDLE
- VUID-vkCmdDrawIndirect-None-02721
  If robustBufferAccess is not enabled, then for a given vertex buffer binding, any attribute data fetched **must** be entirely contained within the corresponding vertex buffer binding, as described in Vertex Input Description
- VUID-vkCmdDrawIndirect-None-07842
  If then vkCmdSetPrimitiveTopology **must** have been called and not subsequently invalidated in the current command buffer prior to this drawing command
- VUID-vkCmdDrawIndirect-dynamicPrimitiveTopologyUnrestricted-07500
  If the bound graphics pipeline state was created with the VK_DYNAMIC_STATE_PRIMITIVE_TOPOLOGY dynamic state enabled then the primitiveTopology parameter of vkCmdSetPrimitiveTopology **must** be of the same topology class as the pipeline VkPipelineInputAssemblyStateCreateInfo::topology state
- VUID-vkCmdDrawIndirect-pStrides-04913
  If the bound graphics pipeline was created with the VK_DYNAMIC_STATE_VERTEX_INPUT_BINDING_STRIDE dynamic state enabled, then vkCmdBindVertexBuffers2 **must** have been called and not subsequently invalidated in the current command buffer prior to this draw command, and the pStrides parameter of vkCmdBindVertexBuffers2 **must** not be NULL
- VUID-vkCmdDrawIndirect-None-04879
  If then vkCmdSetPrimitiveRestartEnable **must** have been called and not subsequently invalidated in the current command buffer prior to this drawing command
- VUID-vkCmdDrawIndirect-None-09637
  If the topology is VK_PRIMITIVE_TOPOLOGY_POINT_LIST, VK_PRIMITIVE_TOPOLOGY_LINE_LIST, VK_PRIMITIVE_TOPOLOGY_TRIANGLE_LIST, VK_PRIMITIVE_TOPOLOGY_LINE_LIST_WITH_ADJACENCY, or VK_PRIMITIVE_TOPOLOGY_TRIANGLE_LIST_WITH_ADJACENCY, then vkCmdSetPrimitiveRestartEnable **must** be VK_FALSE
- VUID-vkCmdDrawIndirect-buffer-02708
  If buffer is non-sparse then it **must** be bound completely and contiguously to a single VkDeviceMemory object
- VUID-vkCmdDrawIndirect-buffer-02709
  buffer **must** have been created with the VK_BUFFER_USAGE_INDIRECT_BUFFER_BIT bit set
- VUID-vkCmdDrawIndirect-offset-02710

`offset` **must** be a multiple of `4`

- VUID-vkCmdDrawIndirect-commandBuffer-02711
  `commandBuffer` **must** not be a protected command buffer
- VUID-vkCmdDrawIndirect-drawCount-02718
  If the `multiDrawIndirect` feature is not enabled, `drawCount` **must** be `0` or `1`
- VUID-vkCmdDrawIndirect-drawCount-02719
  `drawCount` **must** be less than or equal to `VkPhysicalDeviceLimits`::`maxDrawIndirectCount`
- VUID-vkCmdDrawIndirect-drawCount-00476
  If `drawCount` is greater than `1`, `stride` **must** be a multiple of `4` and **must** be greater than or equal to `sizeof`(`VkDrawIndirectCommand`)
- VUID-vkCmdDrawIndirect-drawCount-00487
  If `drawCount` is equal to `1`, (`offset` + `sizeof`(VkDrawIndirectCommand)) **must** be less than or equal to the size of `buffer`
- VUID-vkCmdDrawIndirect-drawCount-00488
  If `drawCount` is greater than `1`, (`stride` × (`drawCount` - 1) + `offset` + `sizeof`(VkDrawIndirectCommand)) **must** be less than or equal to the size of `buffer`

Valid Usage (Implicit)

- VUID-vkCmdDrawIndirect-commandBuffer-parameter
  `commandBuffer` **must** be a valid VkCommandBuffer handle
- VUID-vkCmdDrawIndirect-buffer-parameter
  `buffer` **must** be a valid VkBuffer handle
- VUID-vkCmdDrawIndirect-commandBuffer-recording
  `commandBuffer` **must** be in the recording state
- VUID-vkCmdDrawIndirect-commandBuffer-cmdpool
  The `VkCommandPool` that `commandBuffer` was allocated from **must** support graphics operations
- VUID-vkCmdDrawIndirect-renderpass
  This command **must** only be called inside of a render pass instance
- VUID-vkCmdDrawIndirect-commonparent
  Both of `buffer`, and `commandBuffer` **must** have been created, allocated, or retrieved from the same VkDevice

Host Synchronization

- Host access to `commandBuffer` **must** be externally synchronized
- Host access to the `VkCommandPool` that `commandBuffer` was allocated from **must** be externally synchronized

Command Properties

Command Buffer Levels	Render Pass Scope	Supported Queue Types	Command Type
Primary Secondary	Inside	Graphics	Action

The VkDrawIndirectCommand structure is defined as:

```
// Provided by VK_VERSION_1_0
typedef struct VkDrawIndirectCommand {
    uint32_t    vertexCount;
    uint32_t    instanceCount;
    uint32_t    firstVertex;
    uint32_t    firstInstance;
} VkDrawIndirectCommand;
```

- vertexCount is the number of vertices to draw.
- instanceCount is the number of instances to draw.
- firstVertex is the index of the first vertex to draw.
- firstInstance is the instance ID of the first instance to draw.

The members of VkDrawIndirectCommand have the same meaning as the similarly named parameters of vkCmdDraw.

Valid Usage

- VUID-VkDrawIndirectCommand-firstInstance-00501
  If the drawIndirectFirstInstance feature is not enabled, firstInstance **must** be 0

To record a non-indexed draw call with a draw call count sourced from a buffer, call:

```
// Provided by VK_VERSION_1_2
void vkCmdDrawIndirectCount(
    VkCommandBuffer                             commandBuffer,
    VkBuffer                                    buffer,
    VkDeviceSize                                offset,
    VkBuffer                                    countBuffer,
    VkDeviceSize                                countBufferOffset,
    uint32_t                                    maxDrawCount,
    uint32_t                                    stride);
```

- commandBuffer is the command buffer into which the command is recorded.

- `buffer` is the buffer containing draw parameters.
- `offset` is the byte offset into `buffer` where parameters begin.
- `countBuffer` is the buffer containing the draw count.
- `countBufferOffset` is the byte offset into `countBuffer` where the draw count begins.
- `maxDrawCount` specifies the maximum number of draws that will be executed. The actual number of executed draw calls is the minimum of the count specified in `countBuffer` and `maxDrawCount`.
- `stride` is the byte stride between successive sets of draw parameters.

`vkCmdDrawIndirectCount` behaves similarly to vkCmdDrawIndirect except that the draw count is read by the device from a buffer during execution. The command will read an unsigned 32-bit integer from `countBuffer` located at `countBufferOffset` and use this as the draw count.

Valid Usage

- VUID-vkCmdDrawIndirectCount-magFilter-04553
  If a VkSampler created with `magFilter` or `minFilter` equal to `VK_FILTER_LINEAR`, `reductionMode` equal to `VK_SAMPLER_REDUCTION_MODE_WEIGHTED_AVERAGE`, and `compareEnable` equal to `VK_FALSE` is used to sample a VkImageView as a result of this command, then the image view's format features **must** contain `VK_FORMAT_FEATURE_SAMPLED_IMAGE_FILTER_LINEAR_BIT`
- VUID-vkCmdDrawIndirectCount-magFilter-09598
  If a VkSampler created with `magFilter` or `minFilter` equal to `VK_FILTER_LINEAR` and `reductionMode` equal to either `VK_SAMPLER_REDUCTION_MODE_MIN` or `VK_SAMPLER_REDUCTION_MODE_MAX` is used to sample a VkImageView as a result of this command, then the image view's format features **must** contain `VK_FORMAT_FEATURE_SAMPLED_IMAGE_FILTER_MINMAX_BIT`
- VUID-vkCmdDrawIndirectCount-mipmapMode-04770
  If a VkSampler created with `mipmapMode` equal to `VK_SAMPLER_MIPMAP_MODE_LINEAR`, `reductionMode` equal to `VK_SAMPLER_REDUCTION_MODE_WEIGHTED_AVERAGE`, and `compareEnable` equal to `VK_FALSE` is used to sample a VkImageView as a result of this command, then the image view's format features **must** contain `VK_FORMAT_FEATURE_SAMPLED_IMAGE_FILTER_LINEAR_BIT`
- VUID-vkCmdDrawIndirectCount-mipmapMode-09599
  If a VkSampler created with `mipmapMode` equal to `VK_SAMPLER_MIPMAP_MODE_LINEAR` and `reductionMode` equal to either `VK_SAMPLER_REDUCTION_MODE_MIN` or `VK_SAMPLER_REDUCTION_MODE_MAX` is used to sample a VkImageView as a result of this command, then the image view's format features **must** contain `VK_FORMAT_FEATURE_SAMPLED_IMAGE_FILTER_MINMAX_BIT`
- VUID-vkCmdDrawIndirectCount-unnormalizedCoordinates-09635
  If a VkSampler created with `unnormalizedCoordinates` equal to `VK_TRUE` is used to sample a VkImageView as a result of this command, then the image view's `levelCount` and `layerCount` **must** be 1
- VUID-vkCmdDrawIndirectCount-unnormalizedCoordinates-09636
  If a VkSampler created with `unnormalizedCoordinates` equal to `VK_TRUE` is used to sample a

VkImageView as a result of this command, then the image view's viewType **must** be VK_IMAGE_VIEW_TYPE_1D or VK_IMAGE_VIEW_TYPE_2D

- VUID-vkCmdDrawIndirectCount-None-06479
  If a VkImageView is sampled with depth comparison, the image view's format features **must** contain VK_FORMAT_FEATURE_2_SAMPLED_IMAGE_DEPTH_COMPARISON_BIT
- VUID-vkCmdDrawIndirectCount-None-02691
  If a VkImageView is accessed using atomic operations as a result of this command, then the image view's format features **must** contain VK_FORMAT_FEATURE_STORAGE_IMAGE_ATOMIC_BIT
- VUID-vkCmdDrawIndirectCount-None-07888
  If a VK_DESCRIPTOR_TYPE_STORAGE_TEXEL_BUFFER descriptor is accessed using atomic operations as a result of this command, then the storage texel buffer's format features **must** contain VK_FORMAT_FEATURE_STORAGE_TEXEL_BUFFER_ATOMIC_BIT
- VUID-vkCmdDrawIndirectCount-OpTypeImage-07027
  For any VkImageView being written as a storage image where the image format field of the OpTypeImage is Unknown, the view's format features **must** contain VK_FORMAT_FEATURE_2_STORAGE_WRITE_WITHOUT_FORMAT_BIT
- VUID-vkCmdDrawIndirectCount-OpTypeImage-07028
  For any VkImageView being read as a storage image where the image format field of the OpTypeImage is Unknown, the view's format features **must** contain VK_FORMAT_FEATURE_2_STORAGE_READ_WITHOUT_FORMAT_BIT
- VUID-vkCmdDrawIndirectCount-OpTypeImage-07029
  For any VkBufferView being written as a storage texel buffer where the image format field of the OpTypeImage is Unknown, the view's buffer features **must** contain VK_FORMAT_FEATURE_2_STORAGE_WRITE_WITHOUT_FORMAT_BIT
- VUID-vkCmdDrawIndirectCount-OpTypeImage-07030
  Any VkBufferView being read as a storage texel buffer where the image format field of the OpTypeImage is Unknown then the view's buffer features **must** contain VK_FORMAT_FEATURE_2_STORAGE_READ_WITHOUT_FORMAT_BIT
- VUID-vkCmdDrawIndirectCount-None-08600
  For each set *n* that is statically used by a bound shader, a descriptor set **must** have been bound to *n* at the same pipeline bind point, with a VkPipelineLayout that is compatible for set *n*, with the VkPipelineLayout used to create the current VkPipeline , as described in Pipeline Layout Compatibility
- VUID-vkCmdDrawIndirectCount-None-08601
  For each push constant that is statically used by a bound shader, a push constant value **must** have been set for the same pipeline bind point, with a VkPipelineLayout that is compatible for push constants, with the VkPipelineLayout used to create the current VkPipeline , as described in Pipeline Layout Compatibility
- VUID-vkCmdDrawIndirectCount-None-10068
  For each array of resources that is used by a bound shader, the indices used to access members of the array **must** be less than the descriptor count for the identified binding in the descriptor sets used by this command

- VUID-vkCmdDrawIndirectCount-maintenance4-08602
  If the `maintenance4` feature is not enabled, then for each push constant that is statically used by a bound shader, a push constant value **must** have been set for the same pipeline bind point, with a VkPipelineLayout that is compatible for push constants, with the VkPipelineLayout used to create the current VkPipeline , as described in Pipeline Layout Compatibility
- VUID-vkCmdDrawIndirectCount-None-08114
  Descriptors in each bound descriptor set, specified via vkCmdBindDescriptorSets, **must** be valid as described by descriptor validity if they are statically used by a bound shader
- VUID-vkCmdDrawIndirectCount-None-08606
  A valid pipeline **must** be bound to the pipeline bind point used by this command
- VUID-vkCmdDrawIndirectCount-None-08608
  There **must** not have been any calls to dynamic state setting commands for any state specified statically in the VkPipeline object bound to the pipeline bind point used by this command, since that pipeline was bound
- VUID-vkCmdDrawIndirectCount-None-08609
  If the VkPipeline object bound to the pipeline bind point used by this command accesses a VkSampler object that uses unnormalized coordinates, that sampler **must** not be used to sample from any VkImage with a VkImageView of the type `VK_IMAGE_VIEW_TYPE_3D`, `VK_IMAGE_VIEW_TYPE_CUBE`, `VK_IMAGE_VIEW_TYPE_1D_ARRAY`, `VK_IMAGE_VIEW_TYPE_2D_ARRAY` or `VK_IMAGE_VIEW_TYPE_CUBE_ARRAY`, in any shader stage
- VUID-vkCmdDrawIndirectCount-None-08610
  If the VkPipeline object bound to the pipeline bind point used by this command accesses a VkSampler object that uses unnormalized coordinates, that sampler **must** not be used with any of the SPIR-V `OpImageSample*` or `OpImageSparseSample*` instructions with `ImplicitLod`, `Dref` or `Proj` in their name, in any shader stage
- VUID-vkCmdDrawIndirectCount-None-08611
  If the VkPipeline object bound to the pipeline bind point used by this command accesses a VkSampler object that uses unnormalized coordinates, that sampler **must** not be used with any of the SPIR-V `OpImageSample*` or `OpImageSparseSample*` instructions that includes a LOD bias or any offset values, in any shader stage
- VUID-vkCmdDrawIndirectCount-uniformBuffers-06935
  If any stage of the VkPipeline object bound to the pipeline bind point used by this command accesses a uniform buffer, and the `robustBufferAccess` feature is not enabled, that stage **must** not access values outside of the range of the buffer as specified in the descriptor set bound to the same pipeline bind point
- VUID-vkCmdDrawIndirectCount-storageBuffers-06936
  If any stage of the VkPipeline object bound to the pipeline bind point used by this command accesses a storage buffer, and the `robustBufferAccess` feature is not enabled, that stage **must** not access values outside of the range of the buffer as specified in the descriptor set bound to the same pipeline bind point
- VUID-vkCmdDrawIndirectCount-commandBuffer-02707
  If `commandBuffer` is an unprotected command buffer and `protectedNoFault` is not supported, any resource accessed by bound shaders **must** not be a protected resource

- VUID-vkCmdDrawIndirectCount-None-06550
  If a bound shader accesses a VkSampler or VkImageView object that enables sampler Y'C$_B$C$_R$ conversion, that object **must** only be used with `OpImageSample*` or `OpImageSparseSample*` instructions
- VUID-vkCmdDrawIndirectCount-ConstOffset-06551
  If a bound shader accesses a VkSampler or VkImageView object that enables sampler Y'C$_B$C$_R$ conversion, that object **must** not use the `ConstOffset` and `Offset` operands
- VUID-vkCmdDrawIndirectCount-viewType-07752
  If a VkImageView is accessed as a result of this command, then the image view's `viewType` **must** match the `Dim` operand of the `OpTypeImage` as described in Compatibility Between SPIR-V Image Dimensions and Vulkan ImageView Types
- VUID-vkCmdDrawIndirectCount-format-07753
  If a VkImageView is accessed as a result of this command, then the numeric type of the image view's `format` and the `Sampled Type` operand of the `OpTypeImage` **must** match
- VUID-vkCmdDrawIndirectCount-OpImageWrite-08795
  If a VkImageView is accessed using `OpImageWrite` as a result of this command, then the `Type` of the `Texel` operand of that instruction **must** have at least as many components as the image view's format
- VUID-vkCmdDrawIndirectCount-OpImageWrite-04469
  If a VkBufferView is accessed using `OpImageWrite` as a result of this command, then the `Type` of the `Texel` operand of that instruction **must** have at least as many components as the buffer view's format
- VUID-vkCmdDrawIndirectCount-None-07288
  Any shader invocation executed by this command **must** terminate
- VUID-vkCmdDrawIndirectCount-None-09600
  If a descriptor with type equal to any of `VK_DESCRIPTOR_TYPE_SAMPLED_IMAGE`, `VK_DESCRIPTOR_TYPE_STORAGE_IMAGE`, or `VK_DESCRIPTOR_TYPE_INPUT_ATTACHMENT` is accessed as a result of this command, the image subresource identified by that descriptor **must** be in the image layout identified when the descriptor was written
- VUID-vkCmdDrawIndirectCount-renderPass-02684
  The current render pass **must** be compatible with the `renderPass` member of the `VkGraphicsPipelineCreateInfo` structure specified when creating the `VkPipeline` bound to `VK_PIPELINE_BIND_POINT_GRAPHICS`
- VUID-vkCmdDrawIndirectCount-subpass-02685
  The subpass index of the current render pass **must** be equal to the `subpass` member of the `VkGraphicsPipelineCreateInfo` structure specified when creating the `VkPipeline` bound to `VK_PIPELINE_BIND_POINT_GRAPHICS`
- VUID-vkCmdDrawIndirectCount-None-07748
  If any shader statically accesses an input attachment, a valid descriptor **must** be bound to the pipeline via a descriptor set
- VUID-vkCmdDrawIndirectCount-OpTypeImage-07468
  If any shader executed by this pipeline accesses an `OpTypeImage` variable with a `Dim` operand of `SubpassData`, it **must** be decorated with an `InputAttachmentIndex` that

corresponds to a valid input attachment in the current subpass

- VUID-vkCmdDrawIndirectCount-None-07469
  Input attachment views accessed in a subpass **must** be created with the same VkFormat as the corresponding subpass definition, and be created with a VkImageView that is compatible with the attachment referenced by the subpass' `pInputAttachments` [`InputAttachmentIndex`] in the currently bound VkFramebuffer as specified by Fragment Input Attachment Compatibility
- VUID-vkCmdDrawIndirectCount-None-06537
  Memory backing image subresources used as attachments in the current render pass **must** not be written in any way other than as an attachment by this command
- VUID-vkCmdDrawIndirectCount-None-09000
  If a color attachment is written by any prior command in this subpass or by the load, store, or resolve operations for this subpass,

  it **must** not be accessed in any way other than as an attachment by this command
- VUID-vkCmdDrawIndirectCount-None-09001
  If a depth attachment is written by any prior command in this subpass or by the load, store, or resolve operations for this subpass,

  it **must** not be accessed in any way other than as an attachment by this command
- VUID-vkCmdDrawIndirectCount-None-09002
  If a stencil attachment is written by any prior command in this subpass or by the load, store, or resolve operations for this subpass,

  it **must** not be accessed in any way other than as an attachment by this command
- VUID-vkCmdDrawIndirectCount-None-06539
  If any previously recorded command in the current subpass accessed an image subresource used as an attachment in this subpass in any way other than as an attachment, this command **must** not write to that image subresource as an attachment
- VUID-vkCmdDrawIndirectCount-None-06886
  If the current render pass instance uses a depth/stencil attachment with a read-only layout for the depth aspect, depth writes **must** be disabled
- VUID-vkCmdDrawIndirectCount-None-06887
  If the current render pass instance uses a depth/stencil attachment with a read-only layout for the stencil aspect, both front and back `writeMask` are not zero, and stencil test is enabled, all stencil ops **must** be `VK_STENCIL_OP_KEEP`
- VUID-vkCmdDrawIndirectCount-None-07831
  If the bound graphics pipeline state was created with the `VK_DYNAMIC_STATE_VIEWPORT` dynamic state enabled then vkCmdSetViewport **must** have been called and not subsequently invalidated in the current command buffer prior to this drawing command
- VUID-vkCmdDrawIndirectCount-None-07832
  If the bound graphics pipeline state was created with the `VK_DYNAMIC_STATE_SCISSOR` dynamic state enabled then vkCmdSetScissor **must** have been called and not

subsequently invalidated in the current command buffer prior to this drawing command

- VUID-vkCmdDrawIndirectCount-None-07833
  If the bound graphics pipeline state was created with the VK_DYNAMIC_STATE_LINE_WIDTH dynamic state enabled then vkCmdSetLineWidth **must** have been called and not subsequently invalidated in the current command buffer prior to this drawing command
- VUID-vkCmdDrawIndirectCount-None-07834
  If a graphics pipeline is bound which was created with the VK_DYNAMIC_STATE_DEPTH_BIAS dynamic state enabled, the current value of rasterizerDiscardEnable is VK_FALSE, and the current value of depthBiasEnable is VK_TRUE, then vkCmdSetDepthBounds **must** have been called and not subsequently invalidated in the current command buffer prior to this drawing command
- VUID-vkCmdDrawIndirectCount-None-07835
  If the bound graphics pipeline state was created with the VK_DYNAMIC_STATE_BLEND_CONSTANTS dynamic state enabled then vkCmdSetBlendConstants **must** have been called and not subsequently invalidated in the current command buffer prior to this drawing command
- VUID-vkCmdDrawIndirectCount-None-07836
  If a graphics pipeline is bound which was created with the VK_DYNAMIC_STATE_DEPTH_BOUNDS dynamic state enabled, the current value of rasterizerDiscardEnable is VK_FALSE, and the current value of depthBoundsTestEnable is VK_TRUE, then vkCmdSetDepthBounds **must** have been called and not subsequently invalidated in the current command buffer prior to this drawing command
- VUID-vkCmdDrawIndirectCount-None-07837
  If a graphics pipeline is bound which was created with the VK_DYNAMIC_STATE_STENCIL_COMPARE_MASK dynamic state enabled, the current value of rasterizerDiscardEnable is VK_FALSE, and the current value of stencilTestEnable is VK_TRUE, then vkCmdSetStencilCompareMask **must** have been called and not subsequently invalidated in the current command buffer prior to this drawing command
- VUID-vkCmdDrawIndirectCount-None-07838
  If a graphics pipeline is bound which was created with the VK_DYNAMIC_STATE_STENCIL_WRITE_MASK dynamic state enabled, the current value of rasterizerDiscardEnable is VK_FALSE, and the current value of stencilTestEnable is VK_TRUE, then vkCmdSetStencilWriteMask **must** have been called and not subsequently invalidated in the current command buffer prior to this drawing command
- VUID-vkCmdDrawIndirectCount-None-07839
  If a graphics pipeline is bound which was created with the VK_DYNAMIC_STATE_STENCIL_REFERENCE dynamic state enabled, the current value of and rasterizerDiscardEnable is VK_FALSE, the current value of stencilTestEnable is VK_TRUE, then vkCmdSetStencilReference **must** have been called and not subsequently invalidated in the current command buffer prior to this drawing command
- VUID-vkCmdDrawIndirectCount-maxMultiviewInstanceIndex-02688
  If the draw is recorded in a render pass instance with multiview enabled, the maximum instance index **must** be less than or equal to VkPhysicalDeviceMultiviewProperties ::maxMultiviewInstanceIndex

- VUID-vkCmdDrawIndirectCount-None-07840
  If a graphics pipeline is bound which was created with the VK_DYNAMIC_STATE_CULL_MODE dynamic state enabled, and the current value of rasterizerDiscardEnable is VK_FALSE, then vkCmdSetCullMode **must** have been called and not subsequently invalidated in the current command buffer prior to this drawing command
- VUID-vkCmdDrawIndirectCount-None-07841
  If a graphics pipeline is bound which was created with the VK_DYNAMIC_STATE_FRONT_FACE dynamic state enabled, and the current value of rasterizerDiscardEnable is VK_FALSE, then vkCmdSetFrontFace **must** have been called and not subsequently invalidated in the current command buffer prior to this drawing command
- VUID-vkCmdDrawIndirectCount-None-07843
  If a graphics pipeline is bound which was created with the VK_DYNAMIC_STATE_DEPTH_TEST_ENABLE dynamic state enabled, and the current value of rasterizerDiscardEnable is VK_FALSE, vkCmdSetDepthTestEnable **must** have been called and not subsequently invalidated in the current command buffer prior to this drawing command
- VUID-vkCmdDrawIndirectCount-None-07844
  If a graphics pipeline is bound which was created with the VK_DYNAMIC_STATE_DEPTH_WRITE_ENABLE dynamic state enabled, and the current value of rasterizerDiscardEnable is VK_FALSE, then vkCmdSetDepthWriteEnable **must** have been called and not subsequently invalidated in the current command buffer prior to this drawing command
- VUID-vkCmdDrawIndirectCount-None-07845
  If a graphics pipeline is bound which was created with the VK_DYNAMIC_STATE_DEPTH_COMPARE_OP dynamic state enabled, the current value of rasterizerDiscardEnable is VK_FALSE, and the current value of depthTestEnable is VK_TRUE, then vkCmdSetDepthCompareOp **must** have been called and not subsequently invalidated in the current command buffer prior to this drawing command
- VUID-vkCmdDrawIndirectCount-None-07846
  If the depthBounds feature is enabled, a graphics pipeline is bound which was created with the VK_DYNAMIC_STATE_DEPTH_BOUNDS_TEST_ENABLE dynamic state enabled, and the current value of rasterizerDiscardEnable is VK_FALSE, then vkCmdSetDepthBoundsTestEnable **must** have been called and not subsequently invalidated in the current command buffer prior to this drawing command
- VUID-vkCmdDrawIndirectCount-None-07847
  If a graphics pipeline is bound which was created with the VK_DYNAMIC_STATE_STENCIL_TEST_ENABLE dynamic state enabled, and the current value of rasterizerDiscardEnable is VK_FALSE, then vkCmdSetStencilTestEnable **must** have been called and not subsequently invalidated in the current command buffer prior to this drawing command
- VUID-vkCmdDrawIndirectCount-None-07848
  If a graphics pipeline is bound which was created with the VK_DYNAMIC_STATE_STENCIL_OP dynamic state enabled, the current value of rasterizerDiscardEnable is VK_FALSE, the current value of stencilTestEnable is VK_TRUE, then vkCmdSetStencilOp **must** have been called and not subsequently invalidated in the current command buffer prior to this

drawing command

- VUID-vkCmdDrawIndirectCount-viewportCount-03417
  If a graphics pipeline is bound which was created with the VK_DYNAMIC_STATE_VIEWPORT_WITH_COUNT dynamic state enabled, then vkCmdSetViewportWithCount **must** have been called and not subsequently invalidated in the current command buffer prior to this drawing command
- VUID-vkCmdDrawIndirectCount-scissorCount-03418
  If a graphics pipeline is bound which was created with the VK_DYNAMIC_STATE_SCISSOR_WITH_COUNT dynamic state enabled, then vkCmdSetScissorWithCount **must** have been called and not subsequently invalidated in the current command buffer prior to this drawing
- VUID-vkCmdDrawIndirectCount-viewportCount-03419
  If a graphics pipeline is bound which was created with both the VK_DYNAMIC_STATE_SCISSOR_WITH_COUNT and VK_DYNAMIC_STATE_VIEWPORT_WITH_COUNT dynamic states enabled, then the viewportCount parameter of vkCmdSetViewportWithCount **must** match the scissorCount parameter of vkCmdSetScissorWithCount
- VUID-vkCmdDrawIndirectCount-None-04876
  If a graphics pipeline is bound which was created with the VK_DYNAMIC_STATE_RASTERIZER_DISCARD_ENABLE dynamic state enabled, then vkCmdSetRasterizerDiscardEnable **must** have been called and not subsequently invalidated in the current command buffer prior to this drawing command
- VUID-vkCmdDrawIndirectCount-None-04877
  If a graphics pipeline is bound which was created with the VK_DYNAMIC_STATE_DEPTH_BIAS_ENABLE dynamic state enabled, and the current value of rasterizerDiscardEnable is VK_FALSE, then vkCmdSetDepthBiasEnable **must** have been called and not subsequently invalidated in the current command buffer prior to this drawing command
- VUID-vkCmdDrawIndirectCount-blendEnable-04727
  If rasterization is not disabled in the bound graphics pipeline, then for each color attachment in the subpass, if the corresponding image view's format features do not contain VK_FORMAT_FEATURE_COLOR_ATTACHMENT_BLEND_BIT, then the blendEnable member of the corresponding element of the pAttachments member of pColorBlendState **must** be VK_FALSE
- VUID-vkCmdDrawIndirectCount-multisampledRenderToSingleSampled-07284
  If rasterization is not disabled in the bound graphics pipeline,

  then rasterizationSamples for the currently bound graphics pipeline **must** be the same as the current subpass color and/or depth/stencil attachments
- VUID-vkCmdDrawIndirectCount-imageView-06172
  If the current render pass instance was begun with vkCmdBeginRendering, the imageView member of pDepthAttachment is not VK_NULL_HANDLE, and the layout member of pDepthAttachment is VK_IMAGE_LAYOUT_DEPTH_STENCIL_READ_ONLY_OPTIMAL, this command **must** not write any values to the depth attachment
- VUID-vkCmdDrawIndirectCount-imageView-06173

If the current render pass instance was begun with vkCmdBeginRendering, the imageView member of pStencilAttachment is not VK_NULL_HANDLE, and the layout member of pStencilAttachment is VK_IMAGE_LAYOUT_DEPTH_STENCIL_READ_ONLY_OPTIMAL, this command **must** not write any values to the stencil attachment

- VUID-vkCmdDrawIndirectCount-imageView-06174
  If the current render pass instance was begun with vkCmdBeginRendering, the imageView member of pDepthAttachment is not VK_NULL_HANDLE, and the layout member of pDepthAttachment is VK_IMAGE_LAYOUT_DEPTH_READ_ONLY_STENCIL_ATTACHMENT_OPTIMAL, this command **must** not write any values to the depth attachment
- VUID-vkCmdDrawIndirectCount-imageView-06175
  If the current render pass instance was begun with vkCmdBeginRendering, the imageView member of pStencilAttachment is not VK_NULL_HANDLE, and the layout member of pStencilAttachment is VK_IMAGE_LAYOUT_DEPTH_ATTACHMENT_STENCIL_READ_ONLY_OPTIMAL, this command **must** not write any values to the stencil attachment
- VUID-vkCmdDrawIndirectCount-imageView-06176
  If the current render pass instance was begun with vkCmdBeginRendering, the imageView member of pDepthAttachment is not VK_NULL_HANDLE, and the layout member of pDepthAttachment is VK_IMAGE_LAYOUT_DEPTH_READ_ONLY_OPTIMAL, this command **must** not write any values to the depth attachment
- VUID-vkCmdDrawIndirectCount-imageView-06177
  If the current render pass instance was begun with vkCmdBeginRendering, the imageView member of pStencilAttachment is not VK_NULL_HANDLE, and the layout member of pStencilAttachment is VK_IMAGE_LAYOUT_STENCIL_READ_ONLY_OPTIMAL, this command **must** not write any values to the stencil attachment
- VUID-vkCmdDrawIndirectCount-viewMask-06178
  If the current render pass instance was begun with vkCmdBeginRendering, the currently bound graphics pipeline **must** have been created with a VkPipelineRenderingCreateInfo ::viewMask equal to VkRenderingInfo::viewMask
- VUID-vkCmdDrawIndirectCount-colorAttachmentCount-06179
  If the current render pass instance was begun with vkCmdBeginRendering, the currently bound graphics pipeline **must** have been created with a VkPipelineRenderingCreateInfo ::colorAttachmentCount equal to VkRenderingInfo::colorAttachmentCount
- VUID-vkCmdDrawIndirectCount-dynamicRenderingUnusedAttachments-08910
  If the current render pass instance was begun with vkCmdBeginRendering and VkRenderingInfo::colorAttachmentCount greater than 0, then each element of the VkRenderingInfo::pColorAttachments array with an imageView not equal to VK_NULL_HANDLE **must** have been created with a VkFormat equal to the corresponding element of VkPipelineRenderingCreateInfo::pColorAttachmentFormats used to create the currently bound graphics pipeline
- VUID-vkCmdDrawIndirectCount-dynamicRenderingUnusedAttachments-08912
  If the current render pass instance was begun with vkCmdBeginRendering and VkRenderingInfo::colorAttachmentCount greater than 0, then each element of the VkRenderingInfo::pColorAttachments array with an imageView equal to VK_NULL_HANDLE **must** have the corresponding element of VkPipelineRenderingCreateInfo ::pColorAttachmentFormats used to create the currently bound pipeline equal to

VK_FORMAT_UNDEFINED

- VUID-vkCmdDrawIndirectCount-dynamicRenderingUnusedAttachments-08913
  If the current render pass instance was begun with vkCmdBeginRendering, and VkRenderingInfo::pDepthAttachment->imageView was VK_NULL_HANDLE, the value of VkPipelineRenderingCreateInfo::depthAttachmentFormat used to create the currently bound graphics pipeline **must** be equal to VK_FORMAT_UNDEFINED
- VUID-vkCmdDrawIndirectCount-dynamicRenderingUnusedAttachments-08914
  If current render pass instance was begun with vkCmdBeginRendering, and VkRenderingInfo::pDepthAttachment->imageView was not VK_NULL_HANDLE, the value of VkPipelineRenderingCreateInfo::depthAttachmentFormat used to create the currently bound graphics pipeline **must** be equal to the VkFormat used to create VkRenderingInfo ::pDepthAttachment->imageView
- VUID-vkCmdDrawIndirectCount-dynamicRenderingUnusedAttachments-08916
  If the current render pass instance was begun with vkCmdBeginRendering, and VkRenderingInfo::pStencilAttachment->imageView was VK_NULL_HANDLE, the value of VkPipelineRenderingCreateInfo::stencilAttachmentFormat used to create the currently bound graphics pipeline **must** be equal to VK_FORMAT_UNDEFINED
- VUID-vkCmdDrawIndirectCount-dynamicRenderingUnusedAttachments-08917
  If current render pass instance was begun with vkCmdBeginRendering, and VkRenderingInfo::pStencilAttachment->imageView was not VK_NULL_HANDLE, the value of VkPipelineRenderingCreateInfo::stencilAttachmentFormat used to create the currently bound graphics pipeline **must** be equal to the VkFormat used to create VkRenderingInfo ::pStencilAttachment->imageView
- VUID-vkCmdDrawIndirectCount-multisampledRenderToSingleSampled-07285
  If the current render pass instance was begun with vkCmdBeginRendering with a VkRenderingInfo::colorAttachmentCount parameter greater than 0, then each element of the VkRenderingInfo::pColorAttachments array with a imageView not equal to VK_NULL_HANDLE **must** have been created with a sample count equal to the value of rasterizationSamples for the currently bound graphics pipeline
- VUID-vkCmdDrawIndirectCount-multisampledRenderToSingleSampled-07286
  If VkRenderingInfo::pDepthAttachment->imageView was not VK_NULL_HANDLE, the value of rasterizationSamples for the currently bound graphics pipeline **must** be equal to the sample count used to create VkRenderingInfo::pDepthAttachment->imageView
- VUID-vkCmdDrawIndirectCount-multisampledRenderToSingleSampled-07287
  If VkRenderingInfo::pStencilAttachment->imageView was not VK_NULL_HANDLE, the value of rasterizationSamples for the currently bound graphics pipeline **must** be equal to the sample count used to create VkRenderingInfo::pStencilAttachment->imageView
- VUID-vkCmdDrawIndirectCount-renderPass-06198
  If the current render pass instance was begun with vkCmdBeginRendering, the currently bound pipeline **must** have been created with a VkGraphicsPipelineCreateInfo::renderPass equal to VK_NULL_HANDLE
- VUID-vkCmdDrawIndirectCount-pColorAttachments-08963
  If the current render pass instance was begun with vkCmdBeginRendering, there is a graphics pipeline bound with a fragment shader that statically writes to a color

attachment, the color write mask is not zero, color writes are enabled, and the corresponding element of the VkRenderingInfo::pColorAttachments->imageView was not VK_NULL_HANDLE, then the corresponding element of VkPipelineRenderingCreateInfo::pColorAttachmentFormats used to create the pipeline **must** not be VK_FORMAT_UNDEFINED

- VUID-vkCmdDrawIndirectCount-pDepthAttachment-08964
  If the current render pass instance was begun with vkCmdBeginRendering, there is a graphics pipeline bound, depth test is enabled, depth write is enabled, and the VkRenderingInfo::pDepthAttachment->imageView was not VK_NULL_HANDLE, then the VkPipelineRenderingCreateInfo::depthAttachmentFormat used to create the pipeline **must** not be VK_FORMAT_UNDEFINED
- VUID-vkCmdDrawIndirectCount-pStencilAttachment-08965
  If the current render pass instance was begun with vkCmdBeginRendering, there is a graphics pipeline bound, stencil test is enabled and the VkRenderingInfo::pStencilAttachment->imageView was not VK_NULL_HANDLE, then the VkPipelineRenderingCreateInfo::stencilAttachmentFormat used to create the pipeline **must** not be VK_FORMAT_UNDEFINED
- VUID-vkCmdDrawIndirectCount-maxFragmentDualSrcAttachments-09239
  If blending is enabled for any attachment where either the source or destination blend factors for that attachment use the secondary color input, the maximum value of Location for any output attachment statically used in the Fragment Execution Model executed by this command **must** be less than maxFragmentDualSrcAttachments
- VUID-vkCmdDrawIndirectCount-None-04007
  All vertex input bindings accessed via vertex input variables declared in the vertex shader entry point's interface **must** have either valid or VK_NULL_HANDLE buffers bound
- VUID-vkCmdDrawIndirectCount-None-04008
  If the nullDescriptor feature is not enabled, all vertex input bindings accessed via vertex input variables declared in the vertex shader entry point's interface **must** not be VK_NULL_HANDLE
- VUID-vkCmdDrawIndirectCount-None-02721
  If robustBufferAccess is not enabled, then for a given vertex buffer binding, any attribute data fetched **must** be entirely contained within the corresponding vertex buffer binding, as described in Vertex Input Description
- VUID-vkCmdDrawIndirectCount-None-07842
  If then vkCmdSetPrimitiveTopology **must** have been called and not subsequently invalidated in the current command buffer prior to this drawing command
- VUID-vkCmdDrawIndirectCount-dynamicPrimitiveTopologyUnrestricted-07500
  If the bound graphics pipeline state was created with the VK_DYNAMIC_STATE_PRIMITIVE_TOPOLOGY dynamic state enabled then the primitiveTopology parameter of vkCmdSetPrimitiveTopology **must** be of the same topology class as the pipeline VkPipelineInputAssemblyStateCreateInfo::topology state
- VUID-vkCmdDrawIndirectCount-pStrides-04913
  If the bound graphics pipeline was created with the VK_DYNAMIC_STATE_VERTEX_INPUT_BINDING_STRIDE dynamic state enabled, then

vkCmdBindVertexBuffers2 **must** have been called and not subsequently invalidated in the current command buffer prior to this draw command, and the pStrides parameter of vkCmdBindVertexBuffers2 **must** not be NULL

- VUID-vkCmdDrawIndirectCount-None-04879
  If then vkCmdSetPrimitiveRestartEnable **must** have been called and not subsequently invalidated in the current command buffer prior to this drawing command
- VUID-vkCmdDrawIndirectCount-None-09637
  If the topology is VK_PRIMITIVE_TOPOLOGY_POINT_LIST, VK_PRIMITIVE_TOPOLOGY_LINE_LIST, VK_PRIMITIVE_TOPOLOGY_TRIANGLE_LIST, VK_PRIMITIVE_TOPOLOGY_LINE_LIST_WITH_ADJACENCY, or VK_PRIMITIVE_TOPOLOGY_TRIANGLE_LIST_WITH_ADJACENCY, then vkCmdSetPrimitiveRestartEnable **must** be VK_FALSE
- VUID-vkCmdDrawIndirectCount-buffer-02708
  If buffer is non-sparse then it **must** be bound completely and contiguously to a single VkDeviceMemory object
- VUID-vkCmdDrawIndirectCount-buffer-02709
  buffer **must** have been created with the VK_BUFFER_USAGE_INDIRECT_BUFFER_BIT bit set
- VUID-vkCmdDrawIndirectCount-offset-02710
  offset **must** be a multiple of 4
- VUID-vkCmdDrawIndirectCount-commandBuffer-02711
  commandBuffer **must** not be a protected command buffer
- VUID-vkCmdDrawIndirectCount-countBuffer-02714
  If countBuffer is non-sparse then it **must** be bound completely and contiguously to a single VkDeviceMemory object
- VUID-vkCmdDrawIndirectCount-countBuffer-02715
  countBuffer **must** have been created with the VK_BUFFER_USAGE_INDIRECT_BUFFER_BIT bit set
- VUID-vkCmdDrawIndirectCount-countBufferOffset-02716
  countBufferOffset **must** be a multiple of 4
- VUID-vkCmdDrawIndirectCount-countBuffer-02717
  The count stored in countBuffer **must** be less than or equal to VkPhysicalDeviceLimits::maxDrawIndirectCount
- VUID-vkCmdDrawIndirectCount-countBufferOffset-04129
  (countBufferOffset + sizeof(uint32_t)) **must** be less than or equal to the size of countBuffer
- VUID-vkCmdDrawIndirectCount-None-04445
  If drawIndirectCount is not enabled this function **must** not be used
- VUID-vkCmdDrawIndirectCount-stride-03110
  stride **must** be a multiple of 4 and **must** be greater than or equal to sizeof(VkDrawIndirectCommand)
- VUID-vkCmdDrawIndirectCount-maxDrawCount-03111
  If maxDrawCount is greater than or equal to 1, (stride × (maxDrawCount - 1) + offset + sizeof(VkDrawIndirectCommand)) **must** be less than or equal to the size of buffer

Valid Usage (Implicit)

- VUID-vkCmdDrawIndirectCount-commandBuffer-parameter
  `commandBuffer` **must** be a valid VkCommandBuffer handle
- VUID-vkCmdDrawIndirectCount-buffer-parameter
  `buffer` **must** be a valid VkBuffer handle
- VUID-vkCmdDrawIndirectCount-countBuffer-parameter
  `countBuffer` **must** be a valid VkBuffer handle
- VUID-vkCmdDrawIndirectCount-commandBuffer-recording
  `commandBuffer` **must** be in the recording state
- VUID-vkCmdDrawIndirectCount-commandBuffer-cmdpool
  The `VkCommandPool` that `commandBuffer` was allocated from **must** support graphics operations
- VUID-vkCmdDrawIndirectCount-renderpass
  This command **must** only be called inside of a render pass instance
- VUID-vkCmdDrawIndirectCount-commonparent
  Each of `buffer`, `commandBuffer`, and `countBuffer` **must** have been created, allocated, or retrieved from the same VkDevice

Host Synchronization

- Host access to `commandBuffer` **must** be externally synchronized
- Host access to the `VkCommandPool` that `commandBuffer` was allocated from **must** be externally synchronized

Command Properties

Command Buffer Levels	Render Pass Scope	Supported Queue Types	Command Type
Primary Secondary	Inside	Graphics	Action

To record an indexed indirect drawing command, call:

```
// Provided by VK_VERSION_1_0
void vkCmdDrawIndexedIndirect(
    VkCommandBuffer                             commandBuffer,
    VkBuffer                                    buffer,
    VkDeviceSize                                offset,
    uint32_t                                    drawCount,
    uint32_t                                    stride);
```

- `commandBuffer` is the command buffer into which the command is recorded.
- `buffer` is the buffer containing draw parameters.
- `offset` is the byte offset into `buffer` where parameters begin.
- `drawCount` is the number of draws to execute, and **can** be zero.
- `stride` is the byte stride between successive sets of draw parameters.

`vkCmdDrawIndexedIndirect` behaves similarly to vkCmdDrawIndexed except that the parameters are read by the device from a buffer during execution. `drawCount` draws are executed by the command, with parameters taken from `buffer` starting at `offset` and increasing by `stride` bytes for each successive draw. The parameters of each draw are encoded in an array of VkDrawIndexedIndirectCommand structures. If `drawCount` is less than or equal to one, `stride` is ignored.

Valid Usage

- VUID-vkCmdDrawIndexedIndirect-magFilter-04553
  If a VkSampler created with `magFilter` or `minFilter` equal to `VK_FILTER_LINEAR`, `reductionMode` equal to `VK_SAMPLER_REDUCTION_MODE_WEIGHTED_AVERAGE`, and `compareEnable` equal to `VK_FALSE` is used to sample a VkImageView as a result of this command, then the image view's format features **must** contain `VK_FORMAT_FEATURE_SAMPLED_IMAGE_FILTER_LINEAR_BIT`
- VUID-vkCmdDrawIndexedIndirect-magFilter-09598
  If a VkSampler created with `magFilter` or `minFilter` equal to `VK_FILTER_LINEAR` and `reductionMode` equal to either `VK_SAMPLER_REDUCTION_MODE_MIN` or `VK_SAMPLER_REDUCTION_MODE_MAX` is used to sample a VkImageView as a result of this command, then the image view's format features **must** contain `VK_FORMAT_FEATURE_SAMPLED_IMAGE_FILTER_MINMAX_BIT`
- VUID-vkCmdDrawIndexedIndirect-mipmapMode-04770
  If a VkSampler created with `mipmapMode` equal to `VK_SAMPLER_MIPMAP_MODE_LINEAR`, `reductionMode` equal to `VK_SAMPLER_REDUCTION_MODE_WEIGHTED_AVERAGE`, and `compareEnable` equal to `VK_FALSE` is used to sample a VkImageView as a result of this command, then the image view's format features **must** contain `VK_FORMAT_FEATURE_SAMPLED_IMAGE_FILTER_LINEAR_BIT`
- VUID-vkCmdDrawIndexedIndirect-mipmapMode-09599
  If a VkSampler created with `mipmapMode` equal to `VK_SAMPLER_MIPMAP_MODE_LINEAR` and `reductionMode` equal to either `VK_SAMPLER_REDUCTION_MODE_MIN` or

VK_SAMPLER_REDUCTION_MODE_MAX is used to sample a VkImageView as a result of this command, then the image view's format features **must** contain VK_FORMAT_FEATURE_SAMPLED_IMAGE_FILTER_MINMAX_BIT

- VUID-vkCmdDrawIndexedIndirect-unnormalizedCoordinates-09635
  If a VkSampler created with unnormalizedCoordinates equal to VK_TRUE is used to sample a VkImageView as a result of this command, then the image view's levelCount and layerCount **must** be 1
- VUID-vkCmdDrawIndexedIndirect-unnormalizedCoordinates-09636
  If a VkSampler created with unnormalizedCoordinates equal to VK_TRUE is used to sample a VkImageView as a result of this command, then the image view's viewType **must** be VK_IMAGE_VIEW_TYPE_1D or VK_IMAGE_VIEW_TYPE_2D
- VUID-vkCmdDrawIndexedIndirect-None-06479
  If a VkImageView is sampled with depth comparison, the image view's format features **must** contain VK_FORMAT_FEATURE_2_SAMPLED_IMAGE_DEPTH_COMPARISON_BIT
- VUID-vkCmdDrawIndexedIndirect-None-02691
  If a VkImageView is accessed using atomic operations as a result of this command, then the image view's format features **must** contain VK_FORMAT_FEATURE_STORAGE_IMAGE_ATOMIC_BIT
- VUID-vkCmdDrawIndexedIndirect-None-07888
  If a VK_DESCRIPTOR_TYPE_STORAGE_TEXEL_BUFFER descriptor is accessed using atomic operations as a result of this command, then the storage texel buffer's format features **must** contain VK_FORMAT_FEATURE_STORAGE_TEXEL_BUFFER_ATOMIC_BIT
- VUID-vkCmdDrawIndexedIndirect-OpTypeImage-07027
  For any VkImageView being written as a storage image where the image format field of the OpTypeImage is Unknown, the view's format features **must** contain VK_FORMAT_FEATURE_2_STORAGE_WRITE_WITHOUT_FORMAT_BIT
- VUID-vkCmdDrawIndexedIndirect-OpTypeImage-07028
  For any VkImageView being read as a storage image where the image format field of the OpTypeImage is Unknown, the view's format features **must** contain VK_FORMAT_FEATURE_2_STORAGE_READ_WITHOUT_FORMAT_BIT
- VUID-vkCmdDrawIndexedIndirect-OpTypeImage-07029
  For any VkBufferView being written as a storage texel buffer where the image format field of the OpTypeImage is Unknown, the view's buffer features **must** contain VK_FORMAT_FEATURE_2_STORAGE_WRITE_WITHOUT_FORMAT_BIT
- VUID-vkCmdDrawIndexedIndirect-OpTypeImage-07030
  Any VkBufferView being read as a storage texel buffer where the image format field of the OpTypeImage is Unknown then the view's buffer features **must** contain VK_FORMAT_FEATURE_2_STORAGE_READ_WITHOUT_FORMAT_BIT
- VUID-vkCmdDrawIndexedIndirect-None-08600
  For each set *n* that is statically used by a bound shader, a descriptor set **must** have been bound to *n* at the same pipeline bind point, with a VkPipelineLayout that is compatible for set *n*, with the VkPipelineLayout used to create the current VkPipeline , as described in Pipeline Layout Compatibility

- VUID-vkCmdDrawIndexedIndirect-None-08601
  For each push constant that is statically used by a bound shader, a push constant value **must** have been set for the same pipeline bind point, with a VkPipelineLayout that is compatible for push constants, with the VkPipelineLayout used to create the current VkPipeline , as described in Pipeline Layout Compatibility
- VUID-vkCmdDrawIndexedIndirect-None-10068
  For each array of resources that is used by a bound shader, the indices used to access members of the array **must** be less than the descriptor count for the identified binding in the descriptor sets used by this command
- VUID-vkCmdDrawIndexedIndirect-maintenance4-08602
  If the `maintenance4` feature is not enabled, then for each push constant that is statically used by a bound shader, a push constant value **must** have been set for the same pipeline bind point, with a VkPipelineLayout that is compatible for push constants, with the VkPipelineLayout used to create the current VkPipeline , as described in Pipeline Layout Compatibility
- VUID-vkCmdDrawIndexedIndirect-None-08114
  Descriptors in each bound descriptor set, specified via vkCmdBindDescriptorSets, **must** be valid as described by descriptor validity if they are statically used by a bound shader
- VUID-vkCmdDrawIndexedIndirect-None-08606
  A valid pipeline **must** be bound to the pipeline bind point used by this command
- VUID-vkCmdDrawIndexedIndirect-None-08608
  There **must** not have been any calls to dynamic state setting commands for any state specified statically in the VkPipeline object bound to the pipeline bind point used by this command, since that pipeline was bound
- VUID-vkCmdDrawIndexedIndirect-None-08609
  If the VkPipeline object bound to the pipeline bind point used by this command accesses a VkSampler object that uses unnormalized coordinates, that sampler **must** not be used to sample from any VkImage with a VkImageView of the type `VK_IMAGE_VIEW_TYPE_3D`, `VK_IMAGE_VIEW_TYPE_CUBE`, `VK_IMAGE_VIEW_TYPE_1D_ARRAY`, `VK_IMAGE_VIEW_TYPE_2D_ARRAY` or `VK_IMAGE_VIEW_TYPE_CUBE_ARRAY`, in any shader stage
- VUID-vkCmdDrawIndexedIndirect-None-08610
  If the VkPipeline object bound to the pipeline bind point used by this command accesses a VkSampler object that uses unnormalized coordinates, that sampler **must** not be used with any of the SPIR-V `OpImageSample*` or `OpImageSparseSample*` instructions with `ImplicitLod`, `Dref` or `Proj` in their name, in any shader stage
- VUID-vkCmdDrawIndexedIndirect-None-08611
  If the VkPipeline object bound to the pipeline bind point used by this command accesses a VkSampler object that uses unnormalized coordinates, that sampler **must** not be used with any of the SPIR-V `OpImageSample*` or `OpImageSparseSample*` instructions that includes a LOD bias or any offset values, in any shader stage
- VUID-vkCmdDrawIndexedIndirect-uniformBuffers-06935
  If any stage of the VkPipeline object bound to the pipeline bind point used by this command accesses a uniform buffer, and the `robustBufferAccess` feature is not enabled, that stage **must** not access values outside of the range of the buffer as specified in the

descriptor set bound to the same pipeline bind point

- VUID-vkCmdDrawIndexedIndirect-storageBuffers-06936
  If any stage of the VkPipeline object bound to the pipeline bind point used by this command accesses a storage buffer, and the `robustBufferAccess` feature is not enabled, that stage **must** not access values outside of the range of the buffer as specified in the descriptor set bound to the same pipeline bind point
- VUID-vkCmdDrawIndexedIndirect-commandBuffer-02707
  If `commandBuffer` is an unprotected command buffer and `protectedNoFault` is not supported, any resource accessed by bound shaders **must** not be a protected resource
- VUID-vkCmdDrawIndexedIndirect-None-06550
  If a bound shader accesses a VkSampler or VkImageView object that enables sampler $Y'C_BC_R$ conversion, that object **must** only be used with `OpImageSample*` or `OpImageSparseSample*` instructions
- VUID-vkCmdDrawIndexedIndirect-ConstOffset-06551
  If a bound shader accesses a VkSampler or VkImageView object that enables sampler $Y'C_BC_R$ conversion, that object **must** not use the `ConstOffset` and `Offset` operands
- VUID-vkCmdDrawIndexedIndirect-viewType-07752
  If a VkImageView is accessed as a result of this command, then the image view's `viewType` **must** match the `Dim` operand of the `OpTypeImage` as described in Compatibility Between SPIR-V Image Dimensions and Vulkan ImageView Types
- VUID-vkCmdDrawIndexedIndirect-format-07753
  If a VkImageView is accessed as a result of this command, then the numeric type of the image view's `format` and the `Sampled Type` operand of the `OpTypeImage` **must** match
- VUID-vkCmdDrawIndexedIndirect-OpImageWrite-08795
  If a VkImageView is accessed using `OpImageWrite` as a result of this command, then the `Type` of the `Texel` operand of that instruction **must** have at least as many components as the image view's format
- VUID-vkCmdDrawIndexedIndirect-OpImageWrite-04469
  If a VkBufferView is accessed using `OpImageWrite` as a result of this command, then the `Type` of the `Texel` operand of that instruction **must** have at least as many components as the buffer view's format
- VUID-vkCmdDrawIndexedIndirect-None-07288
  Any shader invocation executed by this command **must** terminate
- VUID-vkCmdDrawIndexedIndirect-None-09600
  If a descriptor with type equal to any of `VK_DESCRIPTOR_TYPE_SAMPLED_IMAGE`, `VK_DESCRIPTOR_TYPE_STORAGE_IMAGE`, or `VK_DESCRIPTOR_TYPE_INPUT_ATTACHMENT` is accessed as a result of this command, the image subresource identified by that descriptor **must** be in the image layout identified when the descriptor was written
- VUID-vkCmdDrawIndexedIndirect-renderPass-02684
  The current render pass **must** be compatible with the `renderPass` member of the `VkGraphicsPipelineCreateInfo` structure specified when creating the `VkPipeline` bound to `VK_PIPELINE_BIND_POINT_GRAPHICS`
- VUID-vkCmdDrawIndexedIndirect-subpass-02685

The subpass index of the current render pass **must** be equal to the `subpass` member of the `VkGraphicsPipelineCreateInfo` structure specified when creating the `VkPipeline` bound to `VK_PIPELINE_BIND_POINT_GRAPHICS`

- VUID-vkCmdDrawIndexedIndirect-None-07748
  If any shader statically accesses an input attachment, a valid descriptor **must** be bound to the pipeline via a descriptor set
- VUID-vkCmdDrawIndexedIndirect-OpTypeImage-07468
  If any shader executed by this pipeline accesses an `OpTypeImage` variable with a `Dim` operand of `SubpassData`, it **must** be decorated with an `InputAttachmentIndex` that corresponds to a valid input attachment in the current subpass
- VUID-vkCmdDrawIndexedIndirect-None-07469
  Input attachment views accessed in a subpass **must** be created with the same VkFormat as the corresponding subpass definition, and be created with a VkImageView that is compatible with the attachment referenced by the subpass' `pInputAttachments`[`InputAttachmentIndex`] in the currently bound VkFramebuffer as specified by Fragment Input Attachment Compatibility
- VUID-vkCmdDrawIndexedIndirect-None-06537
  Memory backing image subresources used as attachments in the current render pass **must** not be written in any way other than as an attachment by this command
- VUID-vkCmdDrawIndexedIndirect-None-09000
  If a color attachment is written by any prior command in this subpass or by the load, store, or resolve operations for this subpass,

  it **must** not be accessed in any way other than as an attachment by this command
- VUID-vkCmdDrawIndexedIndirect-None-09001
  If a depth attachment is written by any prior command in this subpass or by the load, store, or resolve operations for this subpass,

  it **must** not be accessed in any way other than as an attachment by this command
- VUID-vkCmdDrawIndexedIndirect-None-09002
  If a stencil attachment is written by any prior command in this subpass or by the load, store, or resolve operations for this subpass,

  it **must** not be accessed in any way other than as an attachment by this command
- VUID-vkCmdDrawIndexedIndirect-None-06539
  If any previously recorded command in the current subpass accessed an image subresource used as an attachment in this subpass in any way other than as an attachment, this command **must** not write to that image subresource as an attachment
- VUID-vkCmdDrawIndexedIndirect-None-06886
  If the current render pass instance uses a depth/stencil attachment with a read-only layout for the depth aspect, depth writes **must** be disabled
- VUID-vkCmdDrawIndexedIndirect-None-06887
  If the current render pass instance uses a depth/stencil attachment with a read-only

layout for the stencil aspect, both front and back writeMask are not zero, and stencil test is enabled, all stencil ops **must** be VK_STENCIL_OP_KEEP

- VUID-vkCmdDrawIndexedIndirect-None-07831
  If the bound graphics pipeline state was created with the VK_DYNAMIC_STATE_VIEWPORT dynamic state enabled then vkCmdSetViewport **must** have been called and not subsequently invalidated in the current command buffer prior to this drawing command
- VUID-vkCmdDrawIndexedIndirect-None-07832
  If the bound graphics pipeline state was created with the VK_DYNAMIC_STATE_SCISSOR dynamic state enabled then vkCmdSetScissor **must** have been called and not subsequently invalidated in the current command buffer prior to this drawing command
- VUID-vkCmdDrawIndexedIndirect-None-07833
  If the bound graphics pipeline state was created with the VK_DYNAMIC_STATE_LINE_WIDTH dynamic state enabled then vkCmdSetLineWidth **must** have been called and not subsequently invalidated in the current command buffer prior to this drawing command
- VUID-vkCmdDrawIndexedIndirect-None-07834
  If a graphics pipeline is bound which was created with the VK_DYNAMIC_STATE_DEPTH_BIAS dynamic state enabled, the current value of rasterizerDiscardEnable is VK_FALSE, and the current value of depthBiasEnable is VK_TRUE, then vkCmdSetDepthBounds **must** have been called and not subsequently invalidated in the current command buffer prior to this drawing command
- VUID-vkCmdDrawIndexedIndirect-None-07835
  If the bound graphics pipeline state was created with the VK_DYNAMIC_STATE_BLEND_CONSTANTS dynamic state enabled then vkCmdSetBlendConstants **must** have been called and not subsequently invalidated in the current command buffer prior to this drawing command
- VUID-vkCmdDrawIndexedIndirect-None-07836
  If a graphics pipeline is bound which was created with the VK_DYNAMIC_STATE_DEPTH_BOUNDS dynamic state enabled, the current value of rasterizerDiscardEnable is VK_FALSE, and the current value of depthBoundsTestEnable is VK_TRUE, then vkCmdSetDepthBounds **must** have been called and not subsequently invalidated in the current command buffer prior to this drawing command
- VUID-vkCmdDrawIndexedIndirect-None-07837
  If a graphics pipeline is bound which was created with the VK_DYNAMIC_STATE_STENCIL_COMPARE_MASK dynamic state enabled, the current value of rasterizerDiscardEnable is VK_FALSE, and the current value of stencilTestEnable is VK_TRUE, then vkCmdSetStencilCompareMask **must** have been called and not subsequently invalidated in the current command buffer prior to this drawing command
- VUID-vkCmdDrawIndexedIndirect-None-07838
  If a graphics pipeline is bound which was created with the VK_DYNAMIC_STATE_STENCIL_WRITE_MASK dynamic state enabled, the current value of rasterizerDiscardEnable is VK_FALSE, and the current value of stencilTestEnable is VK_TRUE, then vkCmdSetStencilWriteMask **must** have been called and not subsequently invalidated in the current command buffer prior to this drawing command
- VUID-vkCmdDrawIndexedIndirect-None-07839

If a graphics pipeline is bound which was created with the VK_DYNAMIC_STATE_STENCIL_REFERENCE dynamic state enabled, the current value of and rasterizerDiscardEnable is VK_FALSE, the current value of stencilTestEnable is VK_TRUE, then vkCmdSetStencilReference **must** have been called and not subsequently invalidated in the current command buffer prior to this drawing command

- VUID-vkCmdDrawIndexedIndirect-maxMultiviewInstanceIndex-02688
  If the draw is recorded in a render pass instance with multiview enabled, the maximum instance index **must** be less than or equal to VkPhysicalDeviceMultiviewProperties ::maxMultiviewInstanceIndex
- VUID-vkCmdDrawIndexedIndirect-None-07840
  If a graphics pipeline is bound which was created with the VK_DYNAMIC_STATE_CULL_MODE dynamic state enabled, and the current value of rasterizerDiscardEnable is VK_FALSE, then vkCmdSetCullMode **must** have been called and not subsequently invalidated in the current command buffer prior to this drawing command
- VUID-vkCmdDrawIndexedIndirect-None-07841
  If a graphics pipeline is bound which was created with the VK_DYNAMIC_STATE_FRONT_FACE dynamic state enabled, and the current value of rasterizerDiscardEnable is VK_FALSE, then vkCmdSetFrontFace **must** have been called and not subsequently invalidated in the current command buffer prior to this drawing command
- VUID-vkCmdDrawIndexedIndirect-None-07843
  If a graphics pipeline is bound which was created with the VK_DYNAMIC_STATE_DEPTH_TEST_ENABLE dynamic state enabled, and the current value of rasterizerDiscardEnable is VK_FALSE, vkCmdSetDepthTestEnable **must** have been called and not subsequently invalidated in the current command buffer prior to this drawing command
- VUID-vkCmdDrawIndexedIndirect-None-07844
  If a graphics pipeline is bound which was created with the VK_DYNAMIC_STATE_DEPTH_WRITE_ENABLE dynamic state enabled, and the current value of rasterizerDiscardEnable is VK_FALSE, then vkCmdSetDepthWriteEnable **must** have been called and not subsequently invalidated in the current command buffer prior to this drawing command
- VUID-vkCmdDrawIndexedIndirect-None-07845
  If a graphics pipeline is bound which was created with the VK_DYNAMIC_STATE_DEPTH_COMPARE_OP dynamic state enabled, the current value of rasterizerDiscardEnable is VK_FALSE, and the current value of depthTestEnable is VK_TRUE, then vkCmdSetDepthCompareOp **must** have been called and not subsequently invalidated in the current command buffer prior to this drawing command
- VUID-vkCmdDrawIndexedIndirect-None-07846
  If the depthBounds feature is enabled, a graphics pipeline is bound which was created with the VK_DYNAMIC_STATE_DEPTH_BOUNDS_TEST_ENABLE dynamic state enabled, and the current value of rasterizerDiscardEnable is VK_FALSE, then vkCmdSetDepthBoundsTestEnable **must** have been called and not subsequently invalidated in the current command buffer prior to this drawing command
- VUID-vkCmdDrawIndexedIndirect-None-07847
  If a graphics pipeline is bound which was created with the

VK_DYNAMIC_STATE_STENCIL_TEST_ENABLE dynamic state enabled, and the current value of rasterizerDiscardEnable is VK_FALSE, then vkCmdSetStencilTestEnable **must** have been called and not subsequently invalidated in the current command buffer prior to this drawing command

- VUID-vkCmdDrawIndexedIndirect-None-07848
  If a graphics pipeline is bound which was created with the VK_DYNAMIC_STATE_STENCIL_OP dynamic state enabled, the current value of rasterizerDiscardEnable is VK_FALSE, the current value of stencilTestEnable is VK_TRUE, then vkCmdSetStencilOp **must** have been called and not subsequently invalidated in the current command buffer prior to this drawing command
- VUID-vkCmdDrawIndexedIndirect-viewportCount-03417
  If a graphics pipeline is bound which was created with the VK_DYNAMIC_STATE_VIEWPORT_WITH_COUNT dynamic state enabled, then vkCmdSetViewportWithCount **must** have been called and not subsequently invalidated in the current command buffer prior to this drawing command
- VUID-vkCmdDrawIndexedIndirect-scissorCount-03418
  If a graphics pipeline is bound which was created with the VK_DYNAMIC_STATE_SCISSOR_WITH_COUNT dynamic state enabled, then vkCmdSetScissorWithCount **must** have been called and not subsequently invalidated in the current command buffer prior to this drawing
- VUID-vkCmdDrawIndexedIndirect-viewportCount-03419
  If a graphics pipeline is bound which was created with both the VK_DYNAMIC_STATE_SCISSOR_WITH_COUNT and VK_DYNAMIC_STATE_VIEWPORT_WITH_COUNT dynamic states enabled, then the viewportCount parameter of vkCmdSetViewportWithCount **must** match the scissorCount parameter of vkCmdSetScissorWithCount
- VUID-vkCmdDrawIndexedIndirect-None-04876
  If a graphics pipeline is bound which was created with the VK_DYNAMIC_STATE_RASTERIZER_DISCARD_ENABLE dynamic state enabled, then vkCmdSetRasterizerDiscardEnable **must** have been called and not subsequently invalidated in the current command buffer prior to this drawing command
- VUID-vkCmdDrawIndexedIndirect-None-04877
  If a graphics pipeline is bound which was created with the VK_DYNAMIC_STATE_DEPTH_BIAS_ENABLE dynamic state enabled, and the current value of rasterizerDiscardEnable is VK_FALSE, then vkCmdSetDepthBiasEnable **must** have been called and not subsequently invalidated in the current command buffer prior to this drawing command
- VUID-vkCmdDrawIndexedIndirect-blendEnable-04727
  If rasterization is not disabled in the bound graphics pipeline, then for each color attachment in the subpass, if the corresponding image view's format features do not contain VK_FORMAT_FEATURE_COLOR_ATTACHMENT_BLEND_BIT, then the blendEnable member of the corresponding element of the pAttachments member of pColorBlendState **must** be VK_FALSE
- VUID-vkCmdDrawIndexedIndirect-multisampledRenderToSingleSampled-07284
  If rasterization is not disabled in the bound graphics pipeline,

then rasterizationSamples for the currently bound graphics pipeline **must** be the same as the current subpass color and/or depth/stencil attachments

- VUID-vkCmdDrawIndexedIndirect-imageView-06172
  If the current render pass instance was begun with vkCmdBeginRendering, the imageView member of pDepthAttachment is not VK_NULL_HANDLE, and the layout member of pDepthAttachment is VK_IMAGE_LAYOUT_DEPTH_STENCIL_READ_ONLY_OPTIMAL, this command **must** not write any values to the depth attachment
- VUID-vkCmdDrawIndexedIndirect-imageView-06173
  If the current render pass instance was begun with vkCmdBeginRendering, the imageView member of pStencilAttachment is not VK_NULL_HANDLE, and the layout member of pStencilAttachment is VK_IMAGE_LAYOUT_DEPTH_STENCIL_READ_ONLY_OPTIMAL, this command **must** not write any values to the stencil attachment
- VUID-vkCmdDrawIndexedIndirect-imageView-06174
  If the current render pass instance was begun with vkCmdBeginRendering, the imageView member of pDepthAttachment is not VK_NULL_HANDLE, and the layout member of pDepthAttachment is VK_IMAGE_LAYOUT_DEPTH_READ_ONLY_STENCIL_ATTACHMENT_OPTIMAL, this command **must** not write any values to the depth attachment
- VUID-vkCmdDrawIndexedIndirect-imageView-06175
  If the current render pass instance was begun with vkCmdBeginRendering, the imageView member of pStencilAttachment is not VK_NULL_HANDLE, and the layout member of pStencilAttachment is VK_IMAGE_LAYOUT_DEPTH_ATTACHMENT_STENCIL_READ_ONLY_OPTIMAL, this command **must** not write any values to the stencil attachment
- VUID-vkCmdDrawIndexedIndirect-imageView-06176
  If the current render pass instance was begun with vkCmdBeginRendering, the imageView member of pDepthAttachment is not VK_NULL_HANDLE, and the layout member of pDepthAttachment is VK_IMAGE_LAYOUT_DEPTH_READ_ONLY_OPTIMAL, this command **must** not write any values to the depth attachment
- VUID-vkCmdDrawIndexedIndirect-imageView-06177
  If the current render pass instance was begun with vkCmdBeginRendering, the imageView member of pStencilAttachment is not VK_NULL_HANDLE, and the layout member of pStencilAttachment is VK_IMAGE_LAYOUT_STENCIL_READ_ONLY_OPTIMAL, this command **must** not write any values to the stencil attachment
- VUID-vkCmdDrawIndexedIndirect-viewMask-06178
  If the current render pass instance was begun with vkCmdBeginRendering, the currently bound graphics pipeline **must** have been created with a VkPipelineRenderingCreateInfo::viewMask equal to VkRenderingInfo::viewMask
- VUID-vkCmdDrawIndexedIndirect-colorAttachmentCount-06179
  If the current render pass instance was begun with vkCmdBeginRendering, the currently bound graphics pipeline **must** have been created with a VkPipelineRenderingCreateInfo::colorAttachmentCount equal to VkRenderingInfo::colorAttachmentCount
- VUID-vkCmdDrawIndexedIndirect-dynamicRenderingUnusedAttachments-08910
  If the current render pass instance was begun with vkCmdBeginRendering and VkRenderingInfo::colorAttachmentCount greater than 0, then each element of the VkRenderingInfo::pColorAttachments array with an imageView not equal to

VK_NULL_HANDLE **must** have been created with a VkFormat equal to the corresponding element of VkPipelineRenderingCreateInfo::pColorAttachmentFormats used to create the currently bound graphics pipeline

- VUID-vkCmdDrawIndexedIndirect-dynamicRenderingUnusedAttachments-08912
  If the current render pass instance was begun with vkCmdBeginRendering and VkRenderingInfo::colorAttachmentCount greater than 0, then each element of the VkRenderingInfo::pColorAttachments array with an imageView equal to VK_NULL_HANDLE **must** have the corresponding element of VkPipelineRenderingCreateInfo ::pColorAttachmentFormats used to create the currently bound pipeline equal to VK_FORMAT_UNDEFINED
- VUID-vkCmdDrawIndexedIndirect-dynamicRenderingUnusedAttachments-08913
  If the current render pass instance was begun with vkCmdBeginRendering, and VkRenderingInfo::pDepthAttachment->imageView was VK_NULL_HANDLE, the value of VkPipelineRenderingCreateInfo::depthAttachmentFormat used to create the currently bound graphics pipeline **must** be equal to VK_FORMAT_UNDEFINED
- VUID-vkCmdDrawIndexedIndirect-dynamicRenderingUnusedAttachments-08914
  If current render pass instance was begun with vkCmdBeginRendering, and VkRenderingInfo::pDepthAttachment->imageView was not VK_NULL_HANDLE, the value of VkPipelineRenderingCreateInfo::depthAttachmentFormat used to create the currently bound graphics pipeline **must** be equal to the VkFormat used to create VkRenderingInfo ::pDepthAttachment->imageView
- VUID-vkCmdDrawIndexedIndirect-dynamicRenderingUnusedAttachments-08916
  If the current render pass instance was begun with vkCmdBeginRendering, and VkRenderingInfo::pStencilAttachment->imageView was VK_NULL_HANDLE, the value of VkPipelineRenderingCreateInfo::stencilAttachmentFormat used to create the currently bound graphics pipeline **must** be equal to VK_FORMAT_UNDEFINED
- VUID-vkCmdDrawIndexedIndirect-dynamicRenderingUnusedAttachments-08917
  If current render pass instance was begun with vkCmdBeginRendering, and VkRenderingInfo::pStencilAttachment->imageView was not VK_NULL_HANDLE, the value of VkPipelineRenderingCreateInfo::stencilAttachmentFormat used to create the currently bound graphics pipeline **must** be equal to the VkFormat used to create VkRenderingInfo ::pStencilAttachment->imageView
- VUID-vkCmdDrawIndexedIndirect-multisampledRenderToSingleSampled-07285
  If the current render pass instance was begun with vkCmdBeginRendering with a VkRenderingInfo::colorAttachmentCount parameter greater than 0, then each element of the VkRenderingInfo::pColorAttachments array with a imageView not equal to VK_NULL_HANDLE **must** have been created with a sample count equal to the value of rasterizationSamples for the currently bound graphics pipeline
- VUID-vkCmdDrawIndexedIndirect-multisampledRenderToSingleSampled-07286
  If VkRenderingInfo::pDepthAttachment->imageView was not VK_NULL_HANDLE, the value of rasterizationSamples for the currently bound graphics pipeline **must** be equal to the sample count used to create VkRenderingInfo::pDepthAttachment->imageView
- VUID-vkCmdDrawIndexedIndirect-multisampledRenderToSingleSampled-07287
  If VkRenderingInfo::pStencilAttachment->imageView was not VK_NULL_HANDLE, the value of rasterizationSamples for the currently bound graphics pipeline **must** be equal to the

sample count used to create VkRenderingInfo::pStencilAttachment->imageView

- VUID-vkCmdDrawIndexedIndirect-renderPass-06198
  If the current render pass instance was begun with vkCmdBeginRendering, the currently bound pipeline **must** have been created with a VkGraphicsPipelineCreateInfo::renderPass equal to VK_NULL_HANDLE
- VUID-vkCmdDrawIndexedIndirect-pColorAttachments-08963
  If the current render pass instance was begun with vkCmdBeginRendering, there is a graphics pipeline bound with a fragment shader that statically writes to a color attachment, the color write mask is not zero, color writes are enabled, and the corresponding element of the VkRenderingInfo::pColorAttachments->imageView was not VK_NULL_HANDLE, then the corresponding element of VkPipelineRenderingCreateInfo ::pColorAttachmentFormats used to create the pipeline **must** not be VK_FORMAT_UNDEFINED
- VUID-vkCmdDrawIndexedIndirect-pDepthAttachment-08964
  If the current render pass instance was begun with vkCmdBeginRendering, there is a graphics pipeline bound, depth test is enabled, depth write is enabled, and the VkRenderingInfo::pDepthAttachment->imageView was not VK_NULL_HANDLE, then the VkPipelineRenderingCreateInfo::depthAttachmentFormat used to create the pipeline **must** not be VK_FORMAT_UNDEFINED
- VUID-vkCmdDrawIndexedIndirect-pStencilAttachment-08965
  If the current render pass instance was begun with vkCmdBeginRendering, there is a graphics pipeline bound, stencil test is enabled and the VkRenderingInfo ::pStencilAttachment->imageView was not VK_NULL_HANDLE, then the VkPipelineRenderingCreateInfo::stencilAttachmentFormat used to create the pipeline **must** not be VK_FORMAT_UNDEFINED
- VUID-vkCmdDrawIndexedIndirect-maxFragmentDualSrcAttachments-09239
  If blending is enabled for any attachment where either the source or destination blend factors for that attachment use the secondary color input, the maximum value of Location for any output attachment statically used in the Fragment Execution Model executed by this command **must** be less than maxFragmentDualSrcAttachments
- VUID-vkCmdDrawIndexedIndirect-None-04007
  All vertex input bindings accessed via vertex input variables declared in the vertex shader entry point's interface **must** have either valid or VK_NULL_HANDLE buffers bound
- VUID-vkCmdDrawIndexedIndirect-None-04008
  If the nullDescriptor feature is not enabled, all vertex input bindings accessed via vertex input variables declared in the vertex shader entry point's interface **must** not be VK_NULL_HANDLE
- VUID-vkCmdDrawIndexedIndirect-None-02721
  If robustBufferAccess is not enabled, then for a given vertex buffer binding, any attribute data fetched **must** be entirely contained within the corresponding vertex buffer binding, as described in Vertex Input Description
- VUID-vkCmdDrawIndexedIndirect-None-07842
  If then vkCmdSetPrimitiveTopology **must** have been called and not subsequently invalidated in the current command buffer prior to this drawing command

- VUID-vkCmdDrawIndexedIndirect-dynamicPrimitiveTopologyUnrestricted-07500
  If the bound graphics pipeline state was created with the VK_DYNAMIC_STATE_PRIMITIVE_TOPOLOGY dynamic state enabled then the primitiveTopology parameter of vkCmdSetPrimitiveTopology **must** be of the same topology class as the pipeline VkPipelineInputAssemblyStateCreateInfo::topology state
- VUID-vkCmdDrawIndexedIndirect-pStrides-04913
  If the bound graphics pipeline was created with the VK_DYNAMIC_STATE_VERTEX_INPUT_BINDING_STRIDE dynamic state enabled, then vkCmdBindVertexBuffers2 **must** have been called and not subsequently invalidated in the current command buffer prior to this draw command, and the pStrides parameter of vkCmdBindVertexBuffers2 **must** not be NULL
- VUID-vkCmdDrawIndexedIndirect-None-04879
  If then vkCmdSetPrimitiveRestartEnable **must** have been called and not subsequently invalidated in the current command buffer prior to this drawing command
- VUID-vkCmdDrawIndexedIndirect-None-09637
  If the topology is VK_PRIMITIVE_TOPOLOGY_POINT_LIST, VK_PRIMITIVE_TOPOLOGY_LINE_LIST, VK_PRIMITIVE_TOPOLOGY_TRIANGLE_LIST, VK_PRIMITIVE_TOPOLOGY_LINE_LIST_WITH_ADJACENCY, or VK_PRIMITIVE_TOPOLOGY_TRIANGLE_LIST_WITH_ADJACENCY, then vkCmdSetPrimitiveRestartEnable **must** be VK_FALSE
- VUID-vkCmdDrawIndexedIndirect-buffer-02708
  If buffer is non-sparse then it **must** be bound completely and contiguously to a single VkDeviceMemory object
- VUID-vkCmdDrawIndexedIndirect-buffer-02709
  buffer **must** have been created with the VK_BUFFER_USAGE_INDIRECT_BUFFER_BIT bit set
- VUID-vkCmdDrawIndexedIndirect-offset-02710
  offset **must** be a multiple of 4
- VUID-vkCmdDrawIndexedIndirect-commandBuffer-02711
  commandBuffer **must** not be a protected command buffer
- VUID-vkCmdDrawIndexedIndirect-drawCount-02718
  If the multiDrawIndirect feature is not enabled, drawCount **must** be 0 or 1
- VUID-vkCmdDrawIndexedIndirect-drawCount-02719
  drawCount **must** be less than or equal to VkPhysicalDeviceLimits::maxDrawIndirectCount
- VUID-vkCmdDrawIndexedIndirect-None-07312
  A valid index buffer **must** be bound
- VUID-vkCmdDrawIndexedIndirect-drawCount-00528
  If drawCount is greater than 1, stride **must** be a multiple of 4 and **must** be greater than or equal to sizeof(VkDrawIndexedIndirectCommand)
- VUID-vkCmdDrawIndexedIndirect-drawCount-00539
  If drawCount is equal to 1, (offset + sizeof(VkDrawIndexedIndirectCommand)) **must** be less than or equal to the size of buffer
- VUID-vkCmdDrawIndexedIndirect-drawCount-00540

If `drawCount` is greater than `1`, (`stride` × (`drawCount` - 1) + `offset` + `sizeof`(`VkDrawIndexedIndirectCommand`)) **must** be less than or equal to the size of `buffer`

Valid Usage (Implicit)

- VUID-vkCmdDrawIndexedIndirect-commandBuffer-parameter
  `commandBuffer` **must** be a valid VkCommandBuffer handle
- VUID-vkCmdDrawIndexedIndirect-buffer-parameter
  `buffer` **must** be a valid VkBuffer handle
- VUID-vkCmdDrawIndexedIndirect-commandBuffer-recording
  `commandBuffer` **must** be in the recording state
- VUID-vkCmdDrawIndexedIndirect-commandBuffer-cmdpool
  The `VkCommandPool` that `commandBuffer` was allocated from **must** support graphics operations
- VUID-vkCmdDrawIndexedIndirect-renderpass
  This command **must** only be called inside of a render pass instance
- VUID-vkCmdDrawIndexedIndirect-commonparent
  Both of `buffer`, and `commandBuffer` **must** have been created, allocated, or retrieved from the same VkDevice

Host Synchronization

- Host access to `commandBuffer` **must** be externally synchronized
- Host access to the `VkCommandPool` that `commandBuffer` was allocated from **must** be externally synchronized

Command Properties

Command Buffer Levels	Render Pass Scope	Supported Queue Types	Command Type
Primary Secondary	Inside	Graphics	Action

The `VkDrawIndexedIndirectCommand` structure is defined as:

```
// Provided by VK_VERSION_1_0
typedef struct VkDrawIndexedIndirectCommand {
    uint32_t    indexCount;
    uint32_t    instanceCount;
    uint32_t    firstIndex;
    int32_t     vertexOffset;
    uint32_t    firstInstance;
} VkDrawIndexedIndirectCommand;
```

- `indexCount` is the number of vertices to draw.
- `instanceCount` is the number of instances to draw.
- `firstIndex` is the base index within the index buffer.
- `vertexOffset` is the value added to the vertex index before indexing into the vertex buffer.
- `firstInstance` is the instance ID of the first instance to draw.

The members of `VkDrawIndexedIndirectCommand` have the same meaning as the similarly named parameters of vkCmdDrawIndexed.

Valid Usage

- VUID-VkDrawIndexedIndirectCommand-robustBufferAccess2-08798
  If `robustBufferAccess2` is not enabled, (`indexSize` × (`firstIndex` + `indexCount`) + `offset`) **must** be less than or equal to the size of the bound index buffer, with `indexSize` being based on the type specified by `indexType`, where the index buffer, `indexType`, and `offset` are specified via `vkCmdBindIndexBuffer`
- VUID-VkDrawIndexedIndirectCommand-firstInstance-00554
  If the `drawIndirectFirstInstance` feature is not enabled, `firstInstance` **must** be `0`

To record an indexed draw call with a draw call count sourced from a buffer, call:

```
// Provided by VK_VERSION_1_2
void vkCmdDrawIndexedIndirectCount(
    VkCommandBuffer                             commandBuffer,
    VkBuffer                                    buffer,
    VkDeviceSize                                offset,
    VkBuffer                                    countBuffer,
    VkDeviceSize                                countBufferOffset,
    uint32_t                                    maxDrawCount,
    uint32_t                                    stride);
```

- `commandBuffer` is the command buffer into which the command is recorded.
- `buffer` is the buffer containing draw parameters.
- `offset` is the byte offset into `buffer` where parameters begin.

- countBuffer is the buffer containing the draw count.
- countBufferOffset is the byte offset into countBuffer where the draw count begins.
- maxDrawCount specifies the maximum number of draws that will be executed. The actual number of executed draw calls is the minimum of the count specified in countBuffer and maxDrawCount.
- stride is the byte stride between successive sets of draw parameters.

vkCmdDrawIndexedIndirectCount behaves similarly to vkCmdDrawIndexedIndirect except that the draw count is read by the device from a buffer during execution. The command will read an unsigned 32-bit integer from countBuffer located at countBufferOffset and use this as the draw count.

Valid Usage

- VUID-vkCmdDrawIndexedIndirectCount-magFilter-04553
  If a VkSampler created with magFilter or minFilter equal to VK_FILTER_LINEAR, reductionMode equal to VK_SAMPLER_REDUCTION_MODE_WEIGHTED_AVERAGE, and compareEnable equal to VK_FALSE is used to sample a VkImageView as a result of this command, then the image view's format features **must** contain VK_FORMAT_FEATURE_SAMPLED_IMAGE_FILTER_LINEAR_BIT
- VUID-vkCmdDrawIndexedIndirectCount-magFilter-09598
  If a VkSampler created with magFilter or minFilter equal to VK_FILTER_LINEAR and reductionMode equal to either VK_SAMPLER_REDUCTION_MODE_MIN or VK_SAMPLER_REDUCTION_MODE_MAX is used to sample a VkImageView as a result of this command, then the image view's format features **must** contain VK_FORMAT_FEATURE_SAMPLED_IMAGE_FILTER_MINMAX_BIT
- VUID-vkCmdDrawIndexedIndirectCount-mipmapMode-04770
  If a VkSampler created with mipmapMode equal to VK_SAMPLER_MIPMAP_MODE_LINEAR, reductionMode equal to VK_SAMPLER_REDUCTION_MODE_WEIGHTED_AVERAGE, and compareEnable equal to VK_FALSE is used to sample a VkImageView as a result of this command, then the image view's format features **must** contain VK_FORMAT_FEATURE_SAMPLED_IMAGE_FILTER_LINEAR_BIT
- VUID-vkCmdDrawIndexedIndirectCount-mipmapMode-09599
  If a VkSampler created with mipmapMode equal to VK_SAMPLER_MIPMAP_MODE_LINEAR and reductionMode equal to either VK_SAMPLER_REDUCTION_MODE_MIN or VK_SAMPLER_REDUCTION_MODE_MAX is used to sample a VkImageView as a result of this command, then the image view's format features **must** contain VK_FORMAT_FEATURE_SAMPLED_IMAGE_FILTER_MINMAX_BIT
- VUID-vkCmdDrawIndexedIndirectCount-unnormalizedCoordinates-09635
  If a VkSampler created with unnormalizedCoordinates equal to VK_TRUE is used to sample a VkImageView as a result of this command, then the image view's levelCount and layerCount **must** be 1
- VUID-vkCmdDrawIndexedIndirectCount-unnormalizedCoordinates-09636
  If a VkSampler created with unnormalizedCoordinates equal to VK_TRUE is used to sample a VkImageView as a result of this command, then the image view's viewType **must** be

VK_IMAGE_VIEW_TYPE_1D or VK_IMAGE_VIEW_TYPE_2D

- VUID-vkCmdDrawIndexedIndirectCount-None-06479
  If a VkImageView is sampled with depth comparison, the image view's format features **must** contain VK_FORMAT_FEATURE_2_SAMPLED_IMAGE_DEPTH_COMPARISON_BIT
- VUID-vkCmdDrawIndexedIndirectCount-None-02691
  If a VkImageView is accessed using atomic operations as a result of this command, then the image view's format features **must** contain VK_FORMAT_FEATURE_STORAGE_IMAGE_ATOMIC_BIT
- VUID-vkCmdDrawIndexedIndirectCount-None-07888
  If a VK_DESCRIPTOR_TYPE_STORAGE_TEXEL_BUFFER descriptor is accessed using atomic operations as a result of this command, then the storage texel buffer's format features **must** contain VK_FORMAT_FEATURE_STORAGE_TEXEL_BUFFER_ATOMIC_BIT
- VUID-vkCmdDrawIndexedIndirectCount-OpTypeImage-07027
  For any VkImageView being written as a storage image where the image format field of the OpTypeImage is Unknown, the view's format features **must** contain VK_FORMAT_FEATURE_2_STORAGE_WRITE_WITHOUT_FORMAT_BIT
- VUID-vkCmdDrawIndexedIndirectCount-OpTypeImage-07028
  For any VkImageView being read as a storage image where the image format field of the OpTypeImage is Unknown, the view's format features **must** contain VK_FORMAT_FEATURE_2_STORAGE_READ_WITHOUT_FORMAT_BIT
- VUID-vkCmdDrawIndexedIndirectCount-OpTypeImage-07029
  For any VkBufferView being written as a storage texel buffer where the image format field of the OpTypeImage is Unknown, the view's buffer features **must** contain VK_FORMAT_FEATURE_2_STORAGE_WRITE_WITHOUT_FORMAT_BIT
- VUID-vkCmdDrawIndexedIndirectCount-OpTypeImage-07030
  Any VkBufferView being read as a storage texel buffer where the image format field of the OpTypeImage is Unknown then the view's buffer features **must** contain VK_FORMAT_FEATURE_2_STORAGE_READ_WITHOUT_FORMAT_BIT
- VUID-vkCmdDrawIndexedIndirectCount-None-08600
  For each set *n* that is statically used by a bound shader, a descriptor set **must** have been bound to *n* at the same pipeline bind point, with a VkPipelineLayout that is compatible for set *n*, with the VkPipelineLayout used to create the current VkPipeline , as described in Pipeline Layout Compatibility
- VUID-vkCmdDrawIndexedIndirectCount-None-08601
  For each push constant that is statically used by a bound shader, a push constant value **must** have been set for the same pipeline bind point, with a VkPipelineLayout that is compatible for push constants, with the VkPipelineLayout used to create the current VkPipeline , as described in Pipeline Layout Compatibility
- VUID-vkCmdDrawIndexedIndirectCount-None-10068
  For each array of resources that is used by a bound shader, the indices used to access members of the array **must** be less than the descriptor count for the identified binding in the descriptor sets used by this command
- VUID-vkCmdDrawIndexedIndirectCount-maintenance4-08602

If the maintenance4 feature is not enabled, then for each push constant that is statically used by a bound shader, a push constant value **must** have been set for the same pipeline bind point, with a VkPipelineLayout that is compatible for push constants, with the VkPipelineLayout used to create the current VkPipeline , as described in Pipeline Layout Compatibility

- VUID-vkCmdDrawIndexedIndirectCount-None-08114
  Descriptors in each bound descriptor set, specified via vkCmdBindDescriptorSets, **must** be valid as described by descriptor validity if they are statically used by a bound shader
- VUID-vkCmdDrawIndexedIndirectCount-None-08606
  A valid pipeline **must** be bound to the pipeline bind point used by this command
- VUID-vkCmdDrawIndexedIndirectCount-None-08608
  There **must** not have been any calls to dynamic state setting commands for any state specified statically in the VkPipeline object bound to the pipeline bind point used by this command, since that pipeline was bound
- VUID-vkCmdDrawIndexedIndirectCount-None-08609
  If the VkPipeline object bound to the pipeline bind point used by this command accesses a VkSampler object that uses unnormalized coordinates, that sampler **must** not be used to sample from any VkImage with a VkImageView of the type VK_IMAGE_VIEW_TYPE_3D, VK_IMAGE_VIEW_TYPE_CUBE, VK_IMAGE_VIEW_TYPE_1D_ARRAY, VK_IMAGE_VIEW_TYPE_2D_ARRAY or VK_IMAGE_VIEW_TYPE_CUBE_ARRAY, in any shader stage
- VUID-vkCmdDrawIndexedIndirectCount-None-08610
  If the VkPipeline object bound to the pipeline bind point used by this command accesses a VkSampler object that uses unnormalized coordinates, that sampler **must** not be used with any of the SPIR-V OpImageSample* or OpImageSparseSample* instructions with ImplicitLod, Dref or Proj in their name, in any shader stage
- VUID-vkCmdDrawIndexedIndirectCount-None-08611
  If the VkPipeline object bound to the pipeline bind point used by this command accesses a VkSampler object that uses unnormalized coordinates, that sampler **must** not be used with any of the SPIR-V OpImageSample* or OpImageSparseSample* instructions that includes a LOD bias or any offset values, in any shader stage
- VUID-vkCmdDrawIndexedIndirectCount-uniformBuffers-06935
  If any stage of the VkPipeline object bound to the pipeline bind point used by this command accesses a uniform buffer, and the robustBufferAccess feature is not enabled, that stage **must** not access values outside of the range of the buffer as specified in the descriptor set bound to the same pipeline bind point
- VUID-vkCmdDrawIndexedIndirectCount-storageBuffers-06936
  If any stage of the VkPipeline object bound to the pipeline bind point used by this command accesses a storage buffer, and the robustBufferAccess feature is not enabled, that stage **must** not access values outside of the range of the buffer as specified in the descriptor set bound to the same pipeline bind point
- VUID-vkCmdDrawIndexedIndirectCount-commandBuffer-02707
  If commandBuffer is an unprotected command buffer and protectedNoFault is not supported, any resource accessed by bound shaders **must** not be a protected resource
- VUID-vkCmdDrawIndexedIndirectCount-None-06550

If a bound shader accesses a VkSampler or VkImageView object that enables sampler $Y'C_BC_R$ conversion, that object **must** only be used with OpImageSample* or OpImageSparseSample* instructions

- VUID-vkCmdDrawIndexedIndirectCount-ConstOffset-06551
  If a bound shader accesses a VkSampler or VkImageView object that enables sampler $Y'C_BC_R$ conversion, that object **must** not use the ConstOffset and Offset operands
- VUID-vkCmdDrawIndexedIndirectCount-viewType-07752
  If a VkImageView is accessed as a result of this command, then the image view's viewType **must** match the Dim operand of the OpTypeImage as described in Compatibility Between SPIR-V Image Dimensions and Vulkan ImageView Types
- VUID-vkCmdDrawIndexedIndirectCount-format-07753
  If a VkImageView is accessed as a result of this command, then the numeric type of the image view's format and the Sampled Type operand of the OpTypeImage **must** match
- VUID-vkCmdDrawIndexedIndirectCount-OpImageWrite-08795
  If a VkImageView is accessed using OpImageWrite as a result of this command, then the Type of the Texel operand of that instruction **must** have at least as many components as the image view's format
- VUID-vkCmdDrawIndexedIndirectCount-OpImageWrite-04469
  If a VkBufferView is accessed using OpImageWrite as a result of this command, then the Type of the Texel operand of that instruction **must** have at least as many components as the buffer view's format
- VUID-vkCmdDrawIndexedIndirectCount-None-07288
  Any shader invocation executed by this command **must** terminate
- VUID-vkCmdDrawIndexedIndirectCount-None-09600
  If a descriptor with type equal to any of VK_DESCRIPTOR_TYPE_SAMPLED_IMAGE, VK_DESCRIPTOR_TYPE_STORAGE_IMAGE, or VK_DESCRIPTOR_TYPE_INPUT_ATTACHMENT is accessed as a result of this command, the image subresource identified by that descriptor **must** be in the image layout identified when the descriptor was written
- VUID-vkCmdDrawIndexedIndirectCount-renderPass-02684
  The current render pass **must** be compatible with the renderPass member of the VkGraphicsPipelineCreateInfo structure specified when creating the VkPipeline bound to VK_PIPELINE_BIND_POINT_GRAPHICS
- VUID-vkCmdDrawIndexedIndirectCount-subpass-02685
  The subpass index of the current render pass **must** be equal to the subpass member of the VkGraphicsPipelineCreateInfo structure specified when creating the VkPipeline bound to VK_PIPELINE_BIND_POINT_GRAPHICS
- VUID-vkCmdDrawIndexedIndirectCount-None-07748
  If any shader statically accesses an input attachment, a valid descriptor **must** be bound to the pipeline via a descriptor set
- VUID-vkCmdDrawIndexedIndirectCount-OpTypeImage-07468
  If any shader executed by this pipeline accesses an OpTypeImage variable with a Dim operand of SubpassData, it **must** be decorated with an InputAttachmentIndex that corresponds to a valid input attachment in the current subpass

- VUID-vkCmdDrawIndexedIndirectCount-None-07469
  Input attachment views accessed in a subpass **must** be created with the same VkFormat as the corresponding subpass definition, and be created with a VkImageView that is compatible with the attachment referenced by the subpass' `pInputAttachments` [`InputAttachmentIndex`] in the currently bound VkFramebuffer as specified by Fragment Input Attachment Compatibility
- VUID-vkCmdDrawIndexedIndirectCount-None-06537
  Memory backing image subresources used as attachments in the current render pass **must** not be written in any way other than as an attachment by this command
- VUID-vkCmdDrawIndexedIndirectCount-None-09000
  If a color attachment is written by any prior command in this subpass or by the load, store, or resolve operations for this subpass,

  it **must** not be accessed in any way other than as an attachment by this command
- VUID-vkCmdDrawIndexedIndirectCount-None-09001
  If a depth attachment is written by any prior command in this subpass or by the load, store, or resolve operations for this subpass,

  it **must** not be accessed in any way other than as an attachment by this command
- VUID-vkCmdDrawIndexedIndirectCount-None-09002
  If a stencil attachment is written by any prior command in this subpass or by the load, store, or resolve operations for this subpass,

  it **must** not be accessed in any way other than as an attachment by this command
- VUID-vkCmdDrawIndexedIndirectCount-None-06539
  If any previously recorded command in the current subpass accessed an image subresource used as an attachment in this subpass in any way other than as an attachment, this command **must** not write to that image subresource as an attachment
- VUID-vkCmdDrawIndexedIndirectCount-None-06886
  If the current render pass instance uses a depth/stencil attachment with a read-only layout for the depth aspect, depth writes **must** be disabled
- VUID-vkCmdDrawIndexedIndirectCount-None-06887
  If the current render pass instance uses a depth/stencil attachment with a read-only layout for the stencil aspect, both front and back `writeMask` are not zero, and stencil test is enabled, all stencil ops **must** be `VK_STENCIL_OP_KEEP`
- VUID-vkCmdDrawIndexedIndirectCount-None-07831
  If the bound graphics pipeline state was created with the `VK_DYNAMIC_STATE_VIEWPORT` dynamic state enabled then vkCmdSetViewport **must** have been called and not subsequently invalidated in the current command buffer prior to this drawing command
- VUID-vkCmdDrawIndexedIndirectCount-None-07832
  If the bound graphics pipeline state was created with the `VK_DYNAMIC_STATE_SCISSOR` dynamic state enabled then vkCmdSetScissor **must** have been called and not subsequently invalidated in the current command buffer prior to this drawing command

- VUID-vkCmdDrawIndexedIndirectCount-None-07833
  If the bound graphics pipeline state was created with the VK_DYNAMIC_STATE_LINE_WIDTH dynamic state enabled then vkCmdSetLineWidth **must** have been called and not subsequently invalidated in the current command buffer prior to this drawing command
- VUID-vkCmdDrawIndexedIndirectCount-None-07834
  If a graphics pipeline is bound which was created with the VK_DYNAMIC_STATE_DEPTH_BIAS dynamic state enabled, the current value of rasterizerDiscardEnable is VK_FALSE, and the current value of depthBiasEnable is VK_TRUE, then vkCmdSetDepthBounds **must** have been called and not subsequently invalidated in the current command buffer prior to this drawing command
- VUID-vkCmdDrawIndexedIndirectCount-None-07835
  If the bound graphics pipeline state was created with the VK_DYNAMIC_STATE_BLEND_CONSTANTS dynamic state enabled then vkCmdSetBlendConstants **must** have been called and not subsequently invalidated in the current command buffer prior to this drawing command
- VUID-vkCmdDrawIndexedIndirectCount-None-07836
  If a graphics pipeline is bound which was created with the VK_DYNAMIC_STATE_DEPTH_BOUNDS dynamic state enabled, the current value of rasterizerDiscardEnable is VK_FALSE, and the current value of depthBoundsTestEnable is VK_TRUE, then vkCmdSetDepthBounds **must** have been called and not subsequently invalidated in the current command buffer prior to this drawing command
- VUID-vkCmdDrawIndexedIndirectCount-None-07837
  If a graphics pipeline is bound which was created with the VK_DYNAMIC_STATE_STENCIL_COMPARE_MASK dynamic state enabled, the current value of rasterizerDiscardEnable is VK_FALSE, and the current value of stencilTestEnable is VK_TRUE, then vkCmdSetStencilCompareMask **must** have been called and not subsequently invalidated in the current command buffer prior to this drawing command
- VUID-vkCmdDrawIndexedIndirectCount-None-07838
  If a graphics pipeline is bound which was created with the VK_DYNAMIC_STATE_STENCIL_WRITE_MASK dynamic state enabled, the current value of rasterizerDiscardEnable is VK_FALSE, and the current value of stencilTestEnable is VK_TRUE, then vkCmdSetStencilWriteMask **must** have been called and not subsequently invalidated in the current command buffer prior to this drawing command
- VUID-vkCmdDrawIndexedIndirectCount-None-07839
  If a graphics pipeline is bound which was created with the VK_DYNAMIC_STATE_STENCIL_REFERENCE dynamic state enabled, the current value of and rasterizerDiscardEnable is VK_FALSE, the current value of stencilTestEnable is VK_TRUE, then vkCmdSetStencilReference **must** have been called and not subsequently invalidated in the current command buffer prior to this drawing command
- VUID-vkCmdDrawIndexedIndirectCount-maxMultiviewInstanceIndex-02688
  If the draw is recorded in a render pass instance with multiview enabled, the maximum instance index **must** be less than or equal to VkPhysicalDeviceMultiviewProperties ::maxMultiviewInstanceIndex
- VUID-vkCmdDrawIndexedIndirectCount-None-07840
  If a graphics pipeline is bound which was created with the VK_DYNAMIC_STATE_CULL_MODE

dynamic state enabled, and the current value of rasterizerDiscardEnable is VK_FALSE, then vkCmdSetCullMode **must** have been called and not subsequently invalidated in the current command buffer prior to this drawing command

- VUID-vkCmdDrawIndexedIndirectCount-None-07841
  If a graphics pipeline is bound which was created with the VK_DYNAMIC_STATE_FRONT_FACE dynamic state enabled, and the current value of rasterizerDiscardEnable is VK_FALSE, then vkCmdSetFrontFace **must** have been called and not subsequently invalidated in the current command buffer prior to this drawing command
- VUID-vkCmdDrawIndexedIndirectCount-None-07843
  If a graphics pipeline is bound which was created with the VK_DYNAMIC_STATE_DEPTH_TEST_ENABLE dynamic state enabled, and the current value of rasterizerDiscardEnable is VK_FALSE, vkCmdSetDepthTestEnable **must** have been called and not subsequently invalidated in the current command buffer prior to this drawing command
- VUID-vkCmdDrawIndexedIndirectCount-None-07844
  If a graphics pipeline is bound which was created with the VK_DYNAMIC_STATE_DEPTH_WRITE_ENABLE dynamic state enabled, and the current value of rasterizerDiscardEnable is VK_FALSE, then vkCmdSetDepthWriteEnable **must** have been called and not subsequently invalidated in the current command buffer prior to this drawing command
- VUID-vkCmdDrawIndexedIndirectCount-None-07845
  If a graphics pipeline is bound which was created with the VK_DYNAMIC_STATE_DEPTH_COMPARE_OP dynamic state enabled, the current value of rasterizerDiscardEnable is VK_FALSE, and the current value of depthTestEnable is VK_TRUE, then vkCmdSetDepthCompareOp **must** have been called and not subsequently invalidated in the current command buffer prior to this drawing command
- VUID-vkCmdDrawIndexedIndirectCount-None-07846
  If the depthBounds feature is enabled, a graphics pipeline is bound which was created with the VK_DYNAMIC_STATE_DEPTH_BOUNDS_TEST_ENABLE dynamic state enabled, and the current value of rasterizerDiscardEnable is VK_FALSE, then vkCmdSetDepthBoundsTestEnable **must** have been called and not subsequently invalidated in the current command buffer prior to this drawing command
- VUID-vkCmdDrawIndexedIndirectCount-None-07847
  If a graphics pipeline is bound which was created with the VK_DYNAMIC_STATE_STENCIL_TEST_ENABLE dynamic state enabled, and the current value of rasterizerDiscardEnable is VK_FALSE, then vkCmdSetStencilTestEnable **must** have been called and not subsequently invalidated in the current command buffer prior to this drawing command
- VUID-vkCmdDrawIndexedIndirectCount-None-07848
  If a graphics pipeline is bound which was created with the VK_DYNAMIC_STATE_STENCIL_OP dynamic state enabled, the current value of rasterizerDiscardEnable is VK_FALSE, the current value of stencilTestEnable is VK_TRUE, then vkCmdSetStencilOp **must** have been called and not subsequently invalidated in the current command buffer prior to this drawing command
- VUID-vkCmdDrawIndexedIndirectCount-viewportCount-03417

If a graphics pipeline is bound which was created with the VK_DYNAMIC_STATE_VIEWPORT_WITH_COUNT dynamic state enabled, then vkCmdSetViewportWithCount **must** have been called and not subsequently invalidated in the current command buffer prior to this drawing command

- VUID-vkCmdDrawIndexedIndirectCount-scissorCount-03418
  If a graphics pipeline is bound which was created with the VK_DYNAMIC_STATE_SCISSOR_WITH_COUNT dynamic state enabled, then vkCmdSetScissorWithCount **must** have been called and not subsequently invalidated in the current command buffer prior to this drawing
- VUID-vkCmdDrawIndexedIndirectCount-viewportCount-03419
  If a graphics pipeline is bound which was created with both the VK_DYNAMIC_STATE_SCISSOR_WITH_COUNT and VK_DYNAMIC_STATE_VIEWPORT_WITH_COUNT dynamic states enabled, then the viewportCount parameter of vkCmdSetViewportWithCount **must** match the scissorCount parameter of vkCmdSetScissorWithCount
- VUID-vkCmdDrawIndexedIndirectCount-None-04876
  If a graphics pipeline is bound which was created with the VK_DYNAMIC_STATE_RASTERIZER_DISCARD_ENABLE dynamic state enabled, then vkCmdSetRasterizerDiscardEnable **must** have been called and not subsequently invalidated in the current command buffer prior to this drawing command
- VUID-vkCmdDrawIndexedIndirectCount-None-04877
  If a graphics pipeline is bound which was created with the VK_DYNAMIC_STATE_DEPTH_BIAS_ENABLE dynamic state enabled, and the current value of rasterizerDiscardEnable is VK_FALSE, then vkCmdSetDepthBiasEnable **must** have been called and not subsequently invalidated in the current command buffer prior to this drawing command
- VUID-vkCmdDrawIndexedIndirectCount-blendEnable-04727
  If rasterization is not disabled in the bound graphics pipeline, then for each color attachment in the subpass, if the corresponding image view's format features do not contain VK_FORMAT_FEATURE_COLOR_ATTACHMENT_BLEND_BIT, then the blendEnable member of the corresponding element of the pAttachments member of pColorBlendState **must** be VK_FALSE
- VUID-vkCmdDrawIndexedIndirectCount-multisampledRenderToSingleSampled-07284
  If rasterization is not disabled in the bound graphics pipeline,

  then rasterizationSamples for the currently bound graphics pipeline **must** be the same as the current subpass color and/or depth/stencil attachments
- VUID-vkCmdDrawIndexedIndirectCount-imageView-06172
  If the current render pass instance was begun with vkCmdBeginRendering, the imageView member of pDepthAttachment is not VK_NULL_HANDLE, and the layout member of pDepthAttachment is VK_IMAGE_LAYOUT_DEPTH_STENCIL_READ_ONLY_OPTIMAL, this command **must** not write any values to the depth attachment
- VUID-vkCmdDrawIndexedIndirectCount-imageView-06173
  If the current render pass instance was begun with vkCmdBeginRendering, the imageView member of pStencilAttachment is not VK_NULL_HANDLE, and the layout member of

pStencilAttachment is VK_IMAGE_LAYOUT_DEPTH_STENCIL_READ_ONLY_OPTIMAL, this command **must** not write any values to the stencil attachment

- VUID-vkCmdDrawIndexedIndirectCount-imageView-06174
  If the current render pass instance was begun with vkCmdBeginRendering, the imageView member of pDepthAttachment is not VK_NULL_HANDLE, and the layout member of pDepthAttachment is VK_IMAGE_LAYOUT_DEPTH_READ_ONLY_STENCIL_ATTACHMENT_OPTIMAL, this command **must** not write any values to the depth attachment
- VUID-vkCmdDrawIndexedIndirectCount-imageView-06175
  If the current render pass instance was begun with vkCmdBeginRendering, the imageView member of pStencilAttachment is not VK_NULL_HANDLE, and the layout member of pStencilAttachment is VK_IMAGE_LAYOUT_DEPTH_ATTACHMENT_STENCIL_READ_ONLY_OPTIMAL, this command **must** not write any values to the stencil attachment
- VUID-vkCmdDrawIndexedIndirectCount-imageView-06176
  If the current render pass instance was begun with vkCmdBeginRendering, the imageView member of pDepthAttachment is not VK_NULL_HANDLE, and the layout member of pDepthAttachment is VK_IMAGE_LAYOUT_DEPTH_READ_ONLY_OPTIMAL, this command **must** not write any values to the depth attachment
- VUID-vkCmdDrawIndexedIndirectCount-imageView-06177
  If the current render pass instance was begun with vkCmdBeginRendering, the imageView member of pStencilAttachment is not VK_NULL_HANDLE, and the layout member of pStencilAttachment is VK_IMAGE_LAYOUT_STENCIL_READ_ONLY_OPTIMAL, this command **must** not write any values to the stencil attachment
- VUID-vkCmdDrawIndexedIndirectCount-viewMask-06178
  If the current render pass instance was begun with vkCmdBeginRendering, the currently bound graphics pipeline **must** have been created with a VkPipelineRenderingCreateInfo ::viewMask equal to VkRenderingInfo::viewMask
- VUID-vkCmdDrawIndexedIndirectCount-colorAttachmentCount-06179
  If the current render pass instance was begun with vkCmdBeginRendering, the currently bound graphics pipeline **must** have been created with a VkPipelineRenderingCreateInfo ::colorAttachmentCount equal to VkRenderingInfo::colorAttachmentCount
- VUID-vkCmdDrawIndexedIndirectCount-dynamicRenderingUnusedAttachments-08910
  If the current render pass instance was begun with vkCmdBeginRendering and VkRenderingInfo::colorAttachmentCount greater than 0, then each element of the VkRenderingInfo::pColorAttachments array with an imageView not equal to VK_NULL_HANDLE **must** have been created with a VkFormat equal to the corresponding element of VkPipelineRenderingCreateInfo::pColorAttachmentFormats used to create the currently bound graphics pipeline
- VUID-vkCmdDrawIndexedIndirectCount-dynamicRenderingUnusedAttachments-08912
  If the current render pass instance was begun with vkCmdBeginRendering and VkRenderingInfo::colorAttachmentCount greater than 0, then each element of the VkRenderingInfo::pColorAttachments array with an imageView equal to VK_NULL_HANDLE **must** have the corresponding element of VkPipelineRenderingCreateInfo ::pColorAttachmentFormats used to create the currently bound pipeline equal to VK_FORMAT_UNDEFINED

- VUID-vkCmdDrawIndexedIndirectCount-dynamicRenderingUnusedAttachments-08913
  If the current render pass instance was begun with vkCmdBeginRendering, and VkRenderingInfo::pDepthAttachment->imageView was VK_NULL_HANDLE, the value of VkPipelineRenderingCreateInfo::depthAttachmentFormat used to create the currently bound graphics pipeline **must** be equal to VK_FORMAT_UNDEFINED
- VUID-vkCmdDrawIndexedIndirectCount-dynamicRenderingUnusedAttachments-08914
  If current render pass instance was begun with vkCmdBeginRendering, and VkRenderingInfo::pDepthAttachment->imageView was not VK_NULL_HANDLE, the value of VkPipelineRenderingCreateInfo::depthAttachmentFormat used to create the currently bound graphics pipeline **must** be equal to the VkFormat used to create VkRenderingInfo ::pDepthAttachment->imageView
- VUID-vkCmdDrawIndexedIndirectCount-dynamicRenderingUnusedAttachments-08916
  If the current render pass instance was begun with vkCmdBeginRendering, and VkRenderingInfo::pStencilAttachment->imageView was VK_NULL_HANDLE, the value of VkPipelineRenderingCreateInfo::stencilAttachmentFormat used to create the currently bound graphics pipeline **must** be equal to VK_FORMAT_UNDEFINED
- VUID-vkCmdDrawIndexedIndirectCount-dynamicRenderingUnusedAttachments-08917
  If current render pass instance was begun with vkCmdBeginRendering, and VkRenderingInfo::pStencilAttachment->imageView was not VK_NULL_HANDLE, the value of VkPipelineRenderingCreateInfo::stencilAttachmentFormat used to create the currently bound graphics pipeline **must** be equal to the VkFormat used to create VkRenderingInfo ::pStencilAttachment->imageView
- VUID-vkCmdDrawIndexedIndirectCount-multisampledRenderToSingleSampled-07285
  If the current render pass instance was begun with vkCmdBeginRendering with a VkRenderingInfo::colorAttachmentCount parameter greater than 0, then each element of the VkRenderingInfo::pColorAttachments array with a imageView not equal to VK_NULL_HANDLE **must** have been created with a sample count equal to the value of rasterizationSamples for the currently bound graphics pipeline
- VUID-vkCmdDrawIndexedIndirectCount-multisampledRenderToSingleSampled-07286
  If VkRenderingInfo::pDepthAttachment->imageView was not VK_NULL_HANDLE, the value of rasterizationSamples for the currently bound graphics pipeline **must** be equal to the sample count used to create VkRenderingInfo::pDepthAttachment->imageView
- VUID-vkCmdDrawIndexedIndirectCount-multisampledRenderToSingleSampled-07287
  If VkRenderingInfo::pStencilAttachment->imageView was not VK_NULL_HANDLE, the value of rasterizationSamples for the currently bound graphics pipeline **must** be equal to the sample count used to create VkRenderingInfo::pStencilAttachment->imageView
- VUID-vkCmdDrawIndexedIndirectCount-renderPass-06198
  If the current render pass instance was begun with vkCmdBeginRendering, the currently bound pipeline **must** have been created with a VkGraphicsPipelineCreateInfo::renderPass equal to VK_NULL_HANDLE
- VUID-vkCmdDrawIndexedIndirectCount-pColorAttachments-08963
  If the current render pass instance was begun with vkCmdBeginRendering, there is a graphics pipeline bound with a fragment shader that statically writes to a color attachment, the color write mask is not zero, color writes are enabled, and the corresponding element of the VkRenderingInfo::pColorAttachments->imageView was not

VK_NULL_HANDLE, then the corresponding element of VkPipelineRenderingCreateInfo ::pColorAttachmentFormats used to create the pipeline **must** not be VK_FORMAT_UNDEFINED

- VUID-vkCmdDrawIndexedIndirectCount-pDepthAttachment-08964
  If the current render pass instance was begun with vkCmdBeginRendering, there is a graphics pipeline bound, depth test is enabled, depth write is enabled, and the VkRenderingInfo::pDepthAttachment->imageView was not VK_NULL_HANDLE, then the VkPipelineRenderingCreateInfo::depthAttachmentFormat used to create the pipeline **must** not be VK_FORMAT_UNDEFINED
- VUID-vkCmdDrawIndexedIndirectCount-pStencilAttachment-08965
  If the current render pass instance was begun with vkCmdBeginRendering, there is a graphics pipeline bound, stencil test is enabled and the VkRenderingInfo ::pStencilAttachment->imageView was not VK_NULL_HANDLE, then the VkPipelineRenderingCreateInfo::stencilAttachmentFormat used to create the pipeline **must** not be VK_FORMAT_UNDEFINED
- VUID-vkCmdDrawIndexedIndirectCount-maxFragmentDualSrcAttachments-09239
  If blending is enabled for any attachment where either the source or destination blend factors for that attachment use the secondary color input, the maximum value of Location for any output attachment statically used in the Fragment Execution Model executed by this command **must** be less than maxFragmentDualSrcAttachments
- VUID-vkCmdDrawIndexedIndirectCount-None-04007
  All vertex input bindings accessed via vertex input variables declared in the vertex shader entry point's interface **must** have either valid or VK_NULL_HANDLE buffers bound
- VUID-vkCmdDrawIndexedIndirectCount-None-04008
  If the nullDescriptor feature is not enabled, all vertex input bindings accessed via vertex input variables declared in the vertex shader entry point's interface **must** not be VK_NULL_HANDLE
- VUID-vkCmdDrawIndexedIndirectCount-None-02721
  If robustBufferAccess is not enabled, then for a given vertex buffer binding, any attribute data fetched **must** be entirely contained within the corresponding vertex buffer binding, as described in Vertex Input Description
- VUID-vkCmdDrawIndexedIndirectCount-None-07842
  If then vkCmdSetPrimitiveTopology **must** have been called and not subsequently invalidated in the current command buffer prior to this drawing command
- VUID-vkCmdDrawIndexedIndirectCount-dynamicPrimitiveTopologyUnrestricted-07500
  If the bound graphics pipeline state was created with the VK_DYNAMIC_STATE_PRIMITIVE_TOPOLOGY dynamic state enabled then the primitiveTopology parameter of vkCmdSetPrimitiveTopology **must** be of the same topology class as the pipeline VkPipelineInputAssemblyStateCreateInfo::topology state
- VUID-vkCmdDrawIndexedIndirectCount-pStrides-04913
  If the bound graphics pipeline was created with the VK_DYNAMIC_STATE_VERTEX_INPUT_BINDING_STRIDE dynamic state enabled, then vkCmdBindVertexBuffers2 **must** have been called and not subsequently invalidated in the current command buffer prior to this draw command, and the pStrides parameter of

vkCmdBindVertexBuffers2 **must** not be NULL

- VUID-vkCmdDrawIndexedIndirectCount-None-04879
  If then vkCmdSetPrimitiveRestartEnable **must** have been called and not subsequently invalidated in the current command buffer prior to this drawing command
- VUID-vkCmdDrawIndexedIndirectCount-None-09637
  If the topology is VK_PRIMITIVE_TOPOLOGY_POINT_LIST, VK_PRIMITIVE_TOPOLOGY_LINE_LIST, VK_PRIMITIVE_TOPOLOGY_TRIANGLE_LIST, VK_PRIMITIVE_TOPOLOGY_LINE_LIST_WITH_ADJACENCY, or VK_PRIMITIVE_TOPOLOGY_TRIANGLE_LIST_WITH_ADJACENCY, then vkCmdSetPrimitiveRestartEnable **must** be VK_FALSE
- VUID-vkCmdDrawIndexedIndirectCount-buffer-02708
  If buffer is non-sparse then it **must** be bound completely and contiguously to a single VkDeviceMemory object
- VUID-vkCmdDrawIndexedIndirectCount-buffer-02709
  buffer **must** have been created with the VK_BUFFER_USAGE_INDIRECT_BUFFER_BIT bit set
- VUID-vkCmdDrawIndexedIndirectCount-offset-02710
  offset **must** be a multiple of 4
- VUID-vkCmdDrawIndexedIndirectCount-commandBuffer-02711
  commandBuffer **must** not be a protected command buffer
- VUID-vkCmdDrawIndexedIndirectCount-countBuffer-02714
  If countBuffer is non-sparse then it **must** be bound completely and contiguously to a single VkDeviceMemory object
- VUID-vkCmdDrawIndexedIndirectCount-countBuffer-02715
  countBuffer **must** have been created with the VK_BUFFER_USAGE_INDIRECT_BUFFER_BIT bit set
- VUID-vkCmdDrawIndexedIndirectCount-countBufferOffset-02716
  countBufferOffset **must** be a multiple of 4
- VUID-vkCmdDrawIndexedIndirectCount-countBuffer-02717
  The count stored in countBuffer **must** be less than or equal to VkPhysicalDeviceLimits ::maxDrawIndirectCount
- VUID-vkCmdDrawIndexedIndirectCount-countBufferOffset-04129
  (countBufferOffset + sizeof(uint32_t)) **must** be less than or equal to the size of countBuffer
- VUID-vkCmdDrawIndexedIndirectCount-None-04445
  If drawIndirectCount is not enabled this function **must** not be used
- VUID-vkCmdDrawIndexedIndirectCount-None-07312
  A valid index buffer **must** be bound
- VUID-vkCmdDrawIndexedIndirectCount-stride-03142
  stride **must** be a multiple of 4 and **must** be greater than or equal to sizeof(VkDrawIndexedIndirectCommand)
- VUID-vkCmdDrawIndexedIndirectCount-maxDrawCount-03143
  If maxDrawCount is greater than or equal to 1, (stride × (maxDrawCount - 1) + offset + sizeof(VkDrawIndexedIndirectCommand)) **must** be less than or equal to the size of buffer

Valid Usage (Implicit)

- VUID-vkCmdDrawIndexedIndirectCount-commandBuffer-parameter
  `commandBuffer` **must** be a valid VkCommandBuffer handle
- VUID-vkCmdDrawIndexedIndirectCount-buffer-parameter
  `buffer` **must** be a valid VkBuffer handle
- VUID-vkCmdDrawIndexedIndirectCount-countBuffer-parameter
  `countBuffer` **must** be a valid VkBuffer handle
- VUID-vkCmdDrawIndexedIndirectCount-commandBuffer-recording
  `commandBuffer` **must** be in the recording state
- VUID-vkCmdDrawIndexedIndirectCount-commandBuffer-cmdpool
  The `VkCommandPool` that `commandBuffer` was allocated from **must** support graphics operations
- VUID-vkCmdDrawIndexedIndirectCount-renderpass
  This command **must** only be called inside of a render pass instance
- VUID-vkCmdDrawIndexedIndirectCount-commonparent
  Each of `buffer`, `commandBuffer`, and `countBuffer` **must** have been created, allocated, or retrieved from the same VkDevice

Host Synchronization

- Host access to `commandBuffer` **must** be externally synchronized
- Host access to the `VkCommandPool` that `commandBuffer` was allocated from **must** be externally synchronized

Command Properties

Command Buffer Levels	Render Pass Scope	Supported Queue Types	Command Type
Primary Secondary	Inside	Graphics	Action

Chapter 21. Fixed-Function Vertex Processing

Vertex fetching is controlled via configurable state, as a logically distinct graphics pipeline stage.

21.1. Vertex Attributes

Vertex shaders **can** define input variables, which receive *vertex attribute* data transferred from one or more VkBuffer(s) by drawing commands. Vertex shader input variables are bound to buffers via an indirect binding where the vertex shader associates a *vertex input attribute* number with each variable, vertex input attributes are associated to *vertex input bindings* on a per-pipeline basis, and vertex input bindings are associated with specific buffers on a per-draw basis via the vkCmdBindVertexBuffers command. Vertex input attribute and vertex input binding descriptions also contain format information controlling how data is extracted from buffer memory and converted to the format expected by the vertex shader.

There are VkPhysicalDeviceLimits::maxVertexInputAttributes number of vertex input attributes and VkPhysicalDeviceLimits::maxVertexInputBindings number of vertex input bindings (each referred to by zero-based indices), where there are at least as many vertex input attributes as there are vertex input bindings. Applications **can** store multiple vertex input attributes interleaved in a single buffer, and use a single vertex input binding to access those attributes.

In GLSL, vertex shaders associate input variables with a vertex input attribute number using the location layout qualifier. The Component layout qualifier associates components of a vertex shader input variable with components of a vertex input attribute.

GLSL Example

```
// Assign location M to variableName
layout (location=M, component=2) in vec2 variableName;

// Assign locations [N,N+L) to the array elements of variableNameArray
layout (location=N) in vec4 variableNameArray[L];
```

In SPIR-V, vertex shaders associate input variables with a vertex input attribute number using the Location decoration. The Component decoration associates components of a vertex shader input variable with components of a vertex input attribute. The Location and Component decorations are specified via the OpDecorate instruction.

SPIR-V Example

```
          ...
     %1 = OpExtInstImport "GLSL.std.450"
          ...
          OpName %9 "variableName"
          OpName %15 "variableNameArray"
          OpDecorate %18 BuiltIn VertexIndex
```

```
               OpDecorate %19 BuiltIn InstanceIndex
               OpDecorate %9 Location M
               OpDecorate %9 Component 2
               OpDecorate %15 Location N
               ...
        %2 = OpTypeVoid
        %3 = OpTypeFunction %2
        %6 = OpTypeFloat 32
        %7 = OpTypeVector %6 2
        %8 = OpTypePointer Input %7
        %9 = OpVariable %8 Input
       %10 = OpTypeVector %6 4
       %11 = OpTypeInt 32 0
       %12 = OpConstant %11 L
       %13 = OpTypeArray %10 %12
       %14 = OpTypePointer Input %13
       %15 = OpVariable %14 Input
               ...
```

21.1.1. Attribute Location and Component Assignment

The `Location` decoration specifies which vertex input attribute is used to read and interpret the data that a variable will consume.

When a vertex shader input variable declared using a 16- or 32-bit scalar or vector data type is assigned a `Location`, its value(s) are taken from the components of the input attribute specified with the corresponding `VkVertexInputAttributeDescription`::`location`. The components used depend on the type of variable and the `Component` decoration specified in the variable declaration, as identified in Input Attribute Components Accessed By 16-Bit and 32-Bit Input Variables. Any 16-bit or 32-bit scalar or vector input will consume a single `Location`. For 16-bit and 32-bit data types, missing components are filled in with default values as described below.

If an implementation supports `storageInputOutput16`, vertex shader input variables **can** have a width of 16 bits.

Table 21. Input Attribute Components Accessed By 16-Bit and 32-Bit Input Variables

16-bit or 32-bit data type	`Component` **decoration**	**Components consumed**
scalar	0 or unspecified	(x, 0, 0, 0)
scalar	1	(0, y, 0, 0)
scalar	2	(0, 0, z, 0)
scalar	3	(0, 0, 0, w)
two-component vector	0 or unspecified	(x, y, 0, 0)
two-component vector	1	(0, y, z, 0)
two-component vector	2	(0, 0, z, w)

16-bit or 32-bit data type	`Component` decoration	Components consumed
three-component vector	0 or unspecified	(x, y, z, o)
three-component vector	1	(o, y, z, w)
four-component vector	0 or unspecified	(x, y, z, w)

Components indicated by “o” are available for use by other input variables which are sourced from the same attribute, and if used, are either filled with the corresponding component from the input format (if present), or the default value.

When a vertex shader input variable declared using a 32-bit floating-point matrix type is assigned a `Location` *i*, its values are taken from consecutive input attributes starting with the corresponding `VkVertexInputAttributeDescription`::`location`. Such matrices are treated as an array of column vectors with values taken from the input attributes identified in Input Attributes Accessed by 32-Bit Input Matrix Variables. The `VkVertexInputAttributeDescription`::`format` **must** be specified with a VkFormat that corresponds to the appropriate type of column vector. The `Component` decoration **must** not be used with matrix types.

Table 22. Input Attributes Accessed by 32-Bit Input Matrix Variables

Data type	Column vector type	Locations consumed	Components consumed
mat2	two-component vector	i, i+1	(x, y, o, o), (x, y, o, o)
mat2x3	three-component vector	i, i+1	(x, y, z, o), (x, y, z, o)
mat2x4	four-component vector	i, i+1	(x, y, z, w), (x, y, z, w)
mat3x2	two-component vector	i, i+1, i+2	(x, y, o, o), (x, y, o, o), (x, y, o, o)
mat3	three-component vector	i, i+1, i+2	(x, y, z, o), (x, y, z, o), (x, y, z, o)
mat3x4	four-component vector	i, i+1, i+2	(x, y, z, w), (x, y, z, w), (x, y, z, w)
mat4x2	two-component vector	i, i+1, i+2, i+3	(x, y, o, o), (x, y, o, o), (x, y, o, o), (x, y, o, o)
mat4x3	three-component vector	i, i+1, i+2, i+3	(x, y, z, o), (x, y, z, o), (x, y, z, o), (x, y, z, o)
mat4	four-component vector	i, i+1, i+2, i+3	(x, y, z, w), (x, y, z, w), (x, y, z, w), (x, y, z, w)

Components indicated by “o” are available for use by other input variables which are sourced from the same attribute, and if used, are either filled with the corresponding component from the input (if present), or the default value.

When a vertex shader input variable declared using a scalar or vector 64-bit data type is assigned a `Location` *i*, its values are taken from consecutive input attributes starting with the corresponding

VkVertexInputAttributeDescription::location. The Location slots and Component words used depend on the type of variable and the Component decoration specified in the variable declaration, as identified in Input Attribute Locations and Components Accessed by 64-Bit Input Variables. For 64-bit data types, no default attribute values are provided. Input variables **must** not use more components than provided by the attribute.

Table 23. Input Attribute Locations and Components Accessed by 64-Bit Input Variables

Input format	Locations consumed	64-bit data type	Location decoration	Component decoration	32-bit components consumed
R64	i	scalar	i	0 or unspecified	(x, y, -, -)
R64G64	i	scalar	i	0 or unspecified	(x, y, o, o)
		scalar	i	2	(o, o, z, w)
		two-component vector	i	0 or unspecified	(x, y, z, w)
R64G64B64	i, i+1	scalar	i	0 or unspecified	(x, y, o, o), (o, o, -, -)
		scalar	i	2	(o, o, z, w), (o, o, -, -)
		scalar	i+1	0 or unspecified	(o, o, o, o), (x, y, -, -)
		two-component vector	i	0 or unspecified	(x, y, z, w), (o, o, -, -)
		three-component vector	i	unspecified	(x, y, z, w), (x, y, -, -)
R64G64B64A64	i, i+1	scalar	i	0 or unspecified	(x, y, o, o), (o, o, o, o)
		scalar	i	2	(o, o, z, w), (o, o, o, o)
		scalar	i+1	0 or unspecified	(o, o, o, o), (x, y, o, o)
		scalar	i+1	2	(o, o, o, o), (o, o, z, w)
		two-component vector	i	0 or unspecified	(x, y, z, w), (o, o, o, o)
		two-component vector	i+1	0 or unspecified	(o, o, o, o), (x, y, z, w)
		three-component vector	i	unspecified	(x, y, z, w), (x, y, o, o)
		four-component vector	i	unspecified	(x, y, z, w), (x, y, z, w)

Components indicated by “o” are available for use by other input variables which are sourced from the same attribute. Components indicated by “-” are not available for input variables as there are no default values provided for 64-bit data types, and there is no data provided by the input format.

When a vertex shader input variable declared using a 64-bit floating-point matrix type is assigned a `Location` *i*, its values are taken from consecutive input attribute locations. Such matrices are treated as an array of column vectors with values taken from the input attributes as shown in Input Attribute Locations and Components Accessed by 64-Bit Input Variables. Each column vector starts at the `Location` immediately following the last `Location` of the previous column vector. The number of attributes and components assigned to each matrix is determined by the matrix dimensions and ranges from two to eight locations.

When a vertex shader input variable declared using an array type is assigned a location, its values are taken from consecutive input attributes starting with the corresponding `VkVertexInputAttributeDescription`::`location`. The number of attributes and components assigned to each element are determined according to the data type of the array elements and `Component` decoration (if any) specified in the declaration of the array, as described above. Each element of the array, in order, is assigned to consecutive locations, but all at the same specified component within each location.

Only input variables declared with the data types and component decorations as specified above are supported. Two variables are allowed to share the same `Location` slot only if their `Component` words do not overlap. If multiple variables share the same `Location` slot, they **must** all have the same SPIR-V floating-point component type or all have the same width scalar type components.

21.2. Vertex Input Description

Applications specify vertex input attribute and vertex input binding descriptions as part of graphics pipeline creation by setting the VkGraphicsPipelineCreateInfo::`pVertexInputState` pointer to a VkPipelineVertexInputStateCreateInfo structure.

The `VkPipelineVertexInputStateCreateInfo` structure is defined as:

```
// Provided by VK_VERSION_1_0
typedef struct VkPipelineVertexInputStateCreateInfo {
    VkStructureType                             sType;
    const void*                                 pNext;
    VkPipelineVertexInputStateCreateFlags       flags;
    uint32_t                                    vertexBindingDescriptionCount;
    const VkVertexInputBindingDescription*      pVertexBindingDescriptions;
    uint32_t                                    vertexAttributeDescriptionCount;
    const VkVertexInputAttributeDescription*    pVertexAttributeDescriptions;
} VkPipelineVertexInputStateCreateInfo;
```

- `sType` is a VkStructureType value identifying this structure.
- `pNext` is `NULL` or a pointer to a structure extending this structure.
- `flags` is reserved for future use.

- `vertexBindingDescriptionCount` is the number of vertex binding descriptions provided in `pVertexBindingDescriptions`.
- `pVertexBindingDescriptions` is a pointer to an array of VkVertexInputBindingDescription structures.
- `vertexAttributeDescriptionCount` is the number of vertex attribute descriptions provided in `pVertexAttributeDescriptions`.
- `pVertexAttributeDescriptions` is a pointer to an array of VkVertexInputAttributeDescription structures.

Valid Usage

- VUID-VkPipelineVertexInputStateCreateInfo-vertexBindingDescriptionCount-00613
  `vertexBindingDescriptionCount` **must** be less than or equal to `VkPhysicalDeviceLimits::maxVertexInputBindings`
- VUID-VkPipelineVertexInputStateCreateInfo-vertexAttributeDescriptionCount-00614
  `vertexAttributeDescriptionCount` **must** be less than or equal to `VkPhysicalDeviceLimits::maxVertexInputAttributes`
- VUID-VkPipelineVertexInputStateCreateInfo-binding-00615
  For every `binding` specified by each element of `pVertexAttributeDescriptions`, a VkVertexInputBindingDescription **must** exist in `pVertexBindingDescriptions` with the same value of `binding`
- VUID-VkPipelineVertexInputStateCreateInfo-pVertexBindingDescriptions-00616
  All elements of `pVertexBindingDescriptions` **must** describe distinct binding numbers
- VUID-VkPipelineVertexInputStateCreateInfo-pVertexAttributeDescriptions-00617
  All elements of `pVertexAttributeDescriptions` **must** describe distinct attribute locations

Valid Usage (Implicit)

- VUID-VkPipelineVertexInputStateCreateInfo-sType-sType
  `sType` **must** be `VK_STRUCTURE_TYPE_PIPELINE_VERTEX_INPUT_STATE_CREATE_INFO`
- VUID-VkPipelineVertexInputStateCreateInfo-pNext-pNext
  `pNext` **must** be `NULL`
- VUID-VkPipelineVertexInputStateCreateInfo-flags-zerobitmask
  `flags` **must** be `0`
- VUID-VkPipelineVertexInputStateCreateInfo-pVertexBindingDescriptions-parameter
  If `vertexBindingDescriptionCount` is not `0`, `pVertexBindingDescriptions` **must** be a valid pointer to an array of `vertexBindingDescriptionCount` valid VkVertexInputBindingDescription structures
- VUID-VkPipelineVertexInputStateCreateInfo-pVertexAttributeDescriptions-parameter
  If `vertexAttributeDescriptionCount` is not `0`, `pVertexAttributeDescriptions` **must** be a valid pointer to an array of `vertexAttributeDescriptionCount` valid VkVertexInputAttributeDescription structures

```
// Provided by VK_VERSION_1_0
typedef VkFlags VkPipelineVertexInputStateCreateFlags;
```

VkPipelineVertexInputStateCreateFlags is a bitmask type for setting a mask, but is currently reserved for future use.

Each vertex input binding is specified by the VkVertexInputBindingDescription structure, defined as:

```
// Provided by VK_VERSION_1_0
typedef struct VkVertexInputBindingDescription {
    uint32_t             binding;
    uint32_t             stride;
    VkVertexInputRate    inputRate;
} VkVertexInputBindingDescription;
```

- binding is the binding number that this structure describes.
- stride is the byte stride between consecutive elements within the buffer.
- inputRate is a VkVertexInputRate value specifying whether vertex attribute addressing is a function of the vertex index or of the instance index.

Valid Usage

- VUID-VkVertexInputBindingDescription-binding-00618
  binding **must** be less than VkPhysicalDeviceLimits::maxVertexInputBindings
- VUID-VkVertexInputBindingDescription-stride-00619
  stride **must** be less than or equal to VkPhysicalDeviceLimits::maxVertexInputBindingStride

Valid Usage (Implicit)

- VUID-VkVertexInputBindingDescription-inputRate-parameter
  inputRate **must** be a valid VkVertexInputRate value

Possible values of VkVertexInputBindingDescription::inputRate, specifying the rate at which vertex attributes are pulled from buffers, are:

```
// Provided by VK_VERSION_1_0
typedef enum VkVertexInputRate {
    VK_VERTEX_INPUT_RATE_VERTEX = 0,
    VK_VERTEX_INPUT_RATE_INSTANCE = 1,
} VkVertexInputRate;
```

- VK_VERTEX_INPUT_RATE_VERTEX specifies that vertex attribute addressing is a function of the vertex index.

- `VK_VERTEX_INPUT_RATE_INSTANCE` specifies that vertex attribute addressing is a function of the instance index.

Each vertex input attribute is specified by the `VkVertexInputAttributeDescription` structure, defined as:

```
// Provided by VK_VERSION_1_0
typedef struct VkVertexInputAttributeDescription {
    uint32_t    location;
    uint32_t    binding;
    VkFormat    format;
    uint32_t    offset;
} VkVertexInputAttributeDescription;
```

- `location` is the shader input location number for this attribute.
- `binding` is the binding number which this attribute takes its data from.
- `format` is the size and type of the vertex attribute data.
- `offset` is a byte offset of this attribute relative to the start of an element in the vertex input binding.

Valid Usage

- VUID-VkVertexInputAttributeDescription-location-00620
  `location` **must** be less than `VkPhysicalDeviceLimits`::`maxVertexInputAttributes`
- VUID-VkVertexInputAttributeDescription-binding-00621
  `binding` **must** be less than `VkPhysicalDeviceLimits`::`maxVertexInputBindings`
- VUID-VkVertexInputAttributeDescription-offset-00622
  `offset` **must** be less than or equal to `VkPhysicalDeviceLimits`::`maxVertexInputAttributeOffset`
- VUID-VkVertexInputAttributeDescription-format-00623
  The format features of `format` **must** contain `VK_FORMAT_FEATURE_VERTEX_BUFFER_BIT`

Valid Usage (Implicit)

- VUID-VkVertexInputAttributeDescription-format-parameter
  `format` **must** be a valid `VkFormat` value

To bind vertex buffers to a command buffer for use in subsequent drawing commands, call:

```
// Provided by VK_VERSION_1_0
void vkCmdBindVertexBuffers(
    VkCommandBuffer                             commandBuffer,
    uint32_t                                    firstBinding,
    uint32_t                                    bindingCount,
    const VkBuffer*                             pBuffers,
    const VkDeviceSize*                         pOffsets);
```

- `commandBuffer` is the command buffer into which the command is recorded.
- `firstBinding` is the index of the first vertex input binding whose state is updated by the command.
- `bindingCount` is the number of vertex input bindings whose state is updated by the command.
- `pBuffers` is a pointer to an array of buffer handles.
- `pOffsets` is a pointer to an array of buffer offsets.

The values taken from elements i of `pBuffers` and `pOffsets` replace the current state for the vertex input binding `firstBinding` + i, for i in [0, `bindingCount`). The vertex input binding is updated to start at the offset indicated by `pOffsets`[i] from the start of the buffer `pBuffers`[i]. All vertex input attributes that use each of these bindings will use these updated addresses in their address calculations for subsequent drawing commands.

Valid Usage

- VUID-vkCmdBindVertexBuffers-firstBinding-00624
  `firstBinding` **must** be less than `VkPhysicalDeviceLimits`::`maxVertexInputBindings`
- VUID-vkCmdBindVertexBuffers-firstBinding-00625
  The sum of `firstBinding` and `bindingCount` **must** be less than or equal to `VkPhysicalDeviceLimits`::`maxVertexInputBindings`
- VUID-vkCmdBindVertexBuffers-pOffsets-00626
  All elements of `pOffsets` **must** be less than the size of the corresponding element in `pBuffers`
- VUID-vkCmdBindVertexBuffers-pBuffers-00627
  All elements of `pBuffers` **must** have been created with the `VK_BUFFER_USAGE_VERTEX_BUFFER_BIT` flag
- VUID-vkCmdBindVertexBuffers-pBuffers-00628
  Each element of `pBuffers` that is non-sparse **must** be bound completely and contiguously to a single `VkDeviceMemory` object
- VUID-vkCmdBindVertexBuffers-pBuffers-04001
  If the `nullDescriptor` feature is not enabled, all elements of `pBuffers` **must** not be VK_NULL_HANDLE

Valid Usage (Implicit)

- VUID-vkCmdBindVertexBuffers-commandBuffer-parameter
  `commandBuffer` **must** be a valid VkCommandBuffer handle
- VUID-vkCmdBindVertexBuffers-pBuffers-parameter
  `pBuffers` **must** be a valid pointer to an array of `bindingCount` valid or VK_NULL_HANDLE VkBuffer handles
- VUID-vkCmdBindVertexBuffers-pOffsets-parameter
  `pOffsets` **must** be a valid pointer to an array of `bindingCount` VkDeviceSize values
- VUID-vkCmdBindVertexBuffers-commandBuffer-recording
  `commandBuffer` **must** be in the recording state
- VUID-vkCmdBindVertexBuffers-commandBuffer-cmdpool
  The `VkCommandPool` that `commandBuffer` was allocated from **must** support graphics operations
- VUID-vkCmdBindVertexBuffers-bindingCount-arraylength
  `bindingCount` **must** be greater than `0`
- VUID-vkCmdBindVertexBuffers-commonparent
  Both of `commandBuffer`, and the elements of `pBuffers` that are valid handles of non-ignored parameters **must** have been created, allocated, or retrieved from the same VkDevice

Host Synchronization

- Host access to `commandBuffer` **must** be externally synchronized
- Host access to the `VkCommandPool` that `commandBuffer` was allocated from **must** be externally synchronized

Command Properties

Command Buffer Levels	Render Pass Scope	Supported Queue Types	Command Type
Primary Secondary	Both	Graphics	State

Alternatively, to bind vertex buffers, along with their sizes and strides, to a command buffer for use in subsequent drawing commands, call:

```
// Provided by VK_VERSION_1_3
void vkCmdBindVertexBuffers2(
    VkCommandBuffer                             commandBuffer,
    uint32_t                                    firstBinding,
    uint32_t                                    bindingCount,
    const VkBuffer*                             pBuffers,
    const VkDeviceSize*                         pOffsets,
    const VkDeviceSize*                         pSizes,
    const VkDeviceSize*                         pStrides);
```

- `commandBuffer` is the command buffer into which the command is recorded.
- `firstBinding` is the index of the first vertex input binding whose state is updated by the command.
- `bindingCount` is the number of vertex input bindings whose state is updated by the command.
- `pBuffers` is a pointer to an array of buffer handles.
- `pOffsets` is a pointer to an array of buffer offsets.
- `pSizes` is `NULL` or a pointer to an array of the size in bytes of vertex data bound from `pBuffers`.
- `pStrides` is `NULL` or a pointer to an array of buffer strides.

The values taken from elements i of `pBuffers` and `pOffsets` replace the current state for the vertex input binding `firstBinding` + i, for i in [0, `bindingCount`). The vertex input binding is updated to start at the offset indicated by `pOffsets`[i] from the start of the buffer `pBuffers`[i]. If `pSizes` is not `NULL` then `pSizes`[i] specifies the bound size of the vertex buffer starting from the corresponding elements of `pBuffers`[i] plus `pOffsets`[i]. All vertex input attributes that use each of these bindings will use these updated addresses in their address calculations for subsequent drawing commands.

This command also dynamically sets the byte strides between consecutive elements within buffer `pBuffers`[i] to the corresponding `pStrides`[i] value when the graphics pipeline is created with `VK_DYNAMIC_STATE_VERTEX_INPUT_BINDING_STRIDE` set in VkPipelineDynamicStateCreateInfo::`pDynamicStates`. Otherwise, strides are specified by the VkVertexInputBindingDescription::`stride` values used to create the currently active pipeline.

NOTE Unlike the static state to set the same, `pStrides` must be between 0 and the maximum extent of the attributes in the binding.

Valid Usage

- VUID-vkCmdBindVertexBuffers2-firstBinding-03355
  `firstBinding` **must** be less than `VkPhysicalDeviceLimits`::`maxVertexInputBindings`
- VUID-vkCmdBindVertexBuffers2-firstBinding-03356
  The sum of `firstBinding` and `bindingCount` **must** be less than or equal to `VkPhysicalDeviceLimits`::`maxVertexInputBindings`
- VUID-vkCmdBindVertexBuffers2-pOffsets-03357
  If `pSizes` is not `NULL`, all elements of `pOffsets` **must** be less than the size of the

corresponding element in pBuffers

- VUID-vkCmdBindVertexBuffers2-pSizes-03358
  If pSizes is not NULL, all elements of pOffsets plus pSizes **must** be less than or equal to the size of the corresponding element in pBuffers
- VUID-vkCmdBindVertexBuffers2-pBuffers-03359
  All elements of pBuffers **must** have been created with the VK_BUFFER_USAGE_VERTEX_BUFFER_BIT flag
- VUID-vkCmdBindVertexBuffers2-pBuffers-03360
  Each element of pBuffers that is non-sparse **must** be bound completely and contiguously to a single VkDeviceMemory object
- VUID-vkCmdBindVertexBuffers2-pBuffers-04111
  If the nullDescriptor feature is not enabled, all elements of pBuffers **must** not be VK_NULL_HANDLE
- VUID-vkCmdBindVertexBuffers2-pStrides-03362
  If pStrides is not NULL each element of pStrides **must** be less than or equal to VkPhysicalDeviceLimits::maxVertexInputBindingStride
- VUID-vkCmdBindVertexBuffers2-pStrides-06209
  If pStrides is not NULL each element of pStrides **must** be either 0 or greater than or equal to the maximum extent of all vertex input attributes fetched from the corresponding binding, where the extent is calculated as the VkVertexInputAttributeDescription::offset plus VkVertexInputAttributeDescription::format size

Valid Usage (Implicit)

- VUID-vkCmdBindVertexBuffers2-commandBuffer-parameter
  commandBuffer **must** be a valid VkCommandBuffer handle
- VUID-vkCmdBindVertexBuffers2-pBuffers-parameter
  pBuffers **must** be a valid pointer to an array of bindingCount valid or VK_NULL_HANDLE VkBuffer handles
- VUID-vkCmdBindVertexBuffers2-pOffsets-parameter
  pOffsets **must** be a valid pointer to an array of bindingCount VkDeviceSize values
- VUID-vkCmdBindVertexBuffers2-pSizes-parameter
  If pSizes is not NULL, pSizes **must** be a valid pointer to an array of bindingCount VkDeviceSize values
- VUID-vkCmdBindVertexBuffers2-pStrides-parameter
  If pStrides is not NULL, pStrides **must** be a valid pointer to an array of bindingCount VkDeviceSize values
- VUID-vkCmdBindVertexBuffers2-commandBuffer-recording
  commandBuffer **must** be in the recording state
- VUID-vkCmdBindVertexBuffers2-commandBuffer-cmdpool
  The VkCommandPool that commandBuffer was allocated from **must** support graphics operations

- VUID-vkCmdBindVertexBuffers2-bindingCount-arraylength
  If any of `pSizes`, or `pStrides` are not `NULL`, `bindingCount` **must** be greater than `0`
- VUID-vkCmdBindVertexBuffers2-commonparent
  Both of `commandBuffer`, and the elements of `pBuffers` that are valid handles of non-ignored parameters **must** have been created, allocated, or retrieved from the same VkDevice

Host Synchronization

- Host access to `commandBuffer` **must** be externally synchronized
- Host access to the `VkCommandPool` that `commandBuffer` was allocated from **must** be externally synchronized

Command Properties

Command Buffer Levels	Render Pass Scope	Supported Queue Types	Command Type
Primary Secondary	Both	Graphics	State

21.3. Vertex Input Address Calculation

The address of each attribute for each `vertexIndex` and `instanceIndex` is calculated as follows:

- Let `attribDesc` be the member of VkPipelineVertexInputStateCreateInfo::`pVertexAttributeDescriptions` with VkVertexInputAttributeDescription::`location` equal to the vertex input attribute number.
- Let `bindingDesc` be the member of VkPipelineVertexInputStateCreateInfo::`pVertexBindingDescriptions` with VkVertexInputAttributeDescription::`binding` equal to `attribDesc.binding`.
- Let `vertexIndex` be the index of the vertex within the draw (a value between `firstVertex` and `firstVertex+vertexCount` for `vkCmdDraw`, or a value taken from the index buffer plus `vertexOffset` for `vkCmdDrawIndexed`), and let `instanceIndex` be the instance number of the draw (a value between `firstInstance` and `firstInstance+instanceCount`).
- Let `offset` be an array of offsets into the currently bound vertex buffers specified during `vkCmdBindVertexBuffers` or `vkCmdBindVertexBuffers2` with `pOffsets`.
- Let `stride` be the member of VkPipelineVertexInputStateCreateInfo::`pVertexBindingDescriptions->stride` unless there is dynamic state causing the value to be ignored. In this case the value is set from the last value from one of the following
  - vkCmdBindVertexBuffers2::`pStride`, if not `NULL`

```
bufferBindingAddress = buffer[binding].baseAddress + offset[binding];
```

```
if (bindingDesc.inputRate == VK_VERTEX_INPUT_RATE_VERTEX)
    effectiveVertexOffset = vertexIndex * stride;
else
    effectiveVertexOffset = instanceIndex * stride;

attribAddress = bufferBindingAddress + effectiveVertexOffset + attribDesc.offset;
```

21.3.1. Vertex Input Extraction

For each attribute, raw data is extracted starting at `attribAddress` and is converted from the VkVertexInputAttributeDescription's `format` to either floating-point, unsigned integer, or signed integer based on the numeric type of `format`. The numeric type of `format` **must** match the numeric type of the input variable in the shader. The input variable in the shader **must** be declared as a 64-bit data type if and only if `format` is a 64-bit data type. If `format` is a packed format, `attribAddress` **must** be a multiple of the size in bytes of the whole attribute data type as described in Packed Formats. Otherwise, `attribAddress` **must** be a multiple of the size in bytes of the component type indicated by `format` (see Formats). For attributes that are not 64-bit data types, each component is converted to the format of the input variable based on its type and size (as defined in the Format Definition section for each VkFormat), using the appropriate equations in 16-Bit Floating-Point Numbers, Unsigned 11-Bit Floating-Point Numbers, Unsigned 10-Bit Floating-Point Numbers, Fixed-Point Data Conversion, and Shared Exponent to RGB. Signed integer components smaller than 32 bits are sign-extended. Attributes that are not 64-bit data types are expanded to four components in the same way as described in conversion to RGBA. The number of components in the vertex shader input variable need not exactly match the number of components in the format. If the vertex shader has fewer components, the extra components are discarded.

Chapter 22. Tessellation

Tessellation involves three pipeline stages. First, a tessellation control shader transforms control points of a patch and **can** produce per-patch data. Second, a fixed-function tessellator generates multiple primitives corresponding to a tessellation of the patch in (u,v) or (u,v,w) parameter space. Third, a tessellation evaluation shader transforms the vertices of the tessellated patch, for example to compute their positions and attributes as part of the tessellated surface. The tessellator is enabled when the pipeline contains both a tessellation control shader and a tessellation evaluation shader.

22.1. Tessellator

If a pipeline includes both tessellation shaders (control and evaluation), the tessellator consumes each input patch (after vertex shading) and produces a new set of independent primitives (points, lines, or triangles). These primitives are logically produced by subdividing a geometric primitive (rectangle or triangle) according to the per-patch outer and inner tessellation levels written by the tessellation control shader. These levels are specified using the built-in variables `TessLevelOuter` and `TessLevelInner`, respectively. This subdivision is performed in an implementation-dependent manner. If no tessellation shaders are present in the pipeline, the tessellator is disabled and incoming primitives are passed through without modification.

The type of subdivision performed by the tessellator is specified by an `OpExecutionMode` instruction using one of the `Triangles`, `Quads`, or `IsoLines` execution modes. This instruction **may** be specified in either the tessellation evaluation or tessellation control shader. Other tessellation-related execution modes **can** also be specified in either the tessellation control or tessellation evaluation shaders.

Any tessellation-related modes specified in both the tessellation control and tessellation evaluation shaders **must** be the same.

Tessellation execution modes include:

- `Triangles`, `Quads`, and `IsoLines`. These control the type of subdivision and topology of the output primitives. One mode **must** be set in at least one of the tessellation shader stages.
- `VertexOrderCw` and `VertexOrderCcw`. These control the orientation of triangles generated by the tessellator. One mode **must** be set in at least one of the tessellation shader stages.
- `PointMode`. Controls generation of points rather than triangles or lines. This functionality defaults to disabled, and is enabled if either shader stage includes the execution mode.
- `SpacingEqual`, `SpacingFractionalEven`, and `SpacingFractionalOdd`. Controls the spacing of segments on the edges of tessellated primitives. One mode **must** be set in at least one of the tessellation shader stages.
- `OutputVertices`. Controls the size of the output patch of the tessellation control shader. One value **must** be set in at least one of the tessellation shader stages.

For triangles, the tessellator subdivides a triangle primitive into smaller triangles. For quads, the tessellator subdivides a rectangle primitive into smaller triangles. For isolines, the tessellator subdivides a rectangle primitive into a collection of line segments arranged in strips stretching

across the rectangle in the u dimension (i.e. the coordinates in `TessCoord` are of the form (0,x) through (1,x) for all tessellation evaluation shader invocations that share a line).

Each vertex produced by the tessellator has an associated (u,v,w) or (u,v) position in a normalized parameter space, with parameter values in the range [0,1], as illustrated in figures Domain parameterization for tessellation primitive modes (upper-left origin) and Domain parameterization for tessellation primitive modes (lower-left origin). The domain space **can** have either an upper-left or lower-left origin, selected by the `domainOrigin` member of VkPipelineTessellationDomainOriginStateCreateInfo.

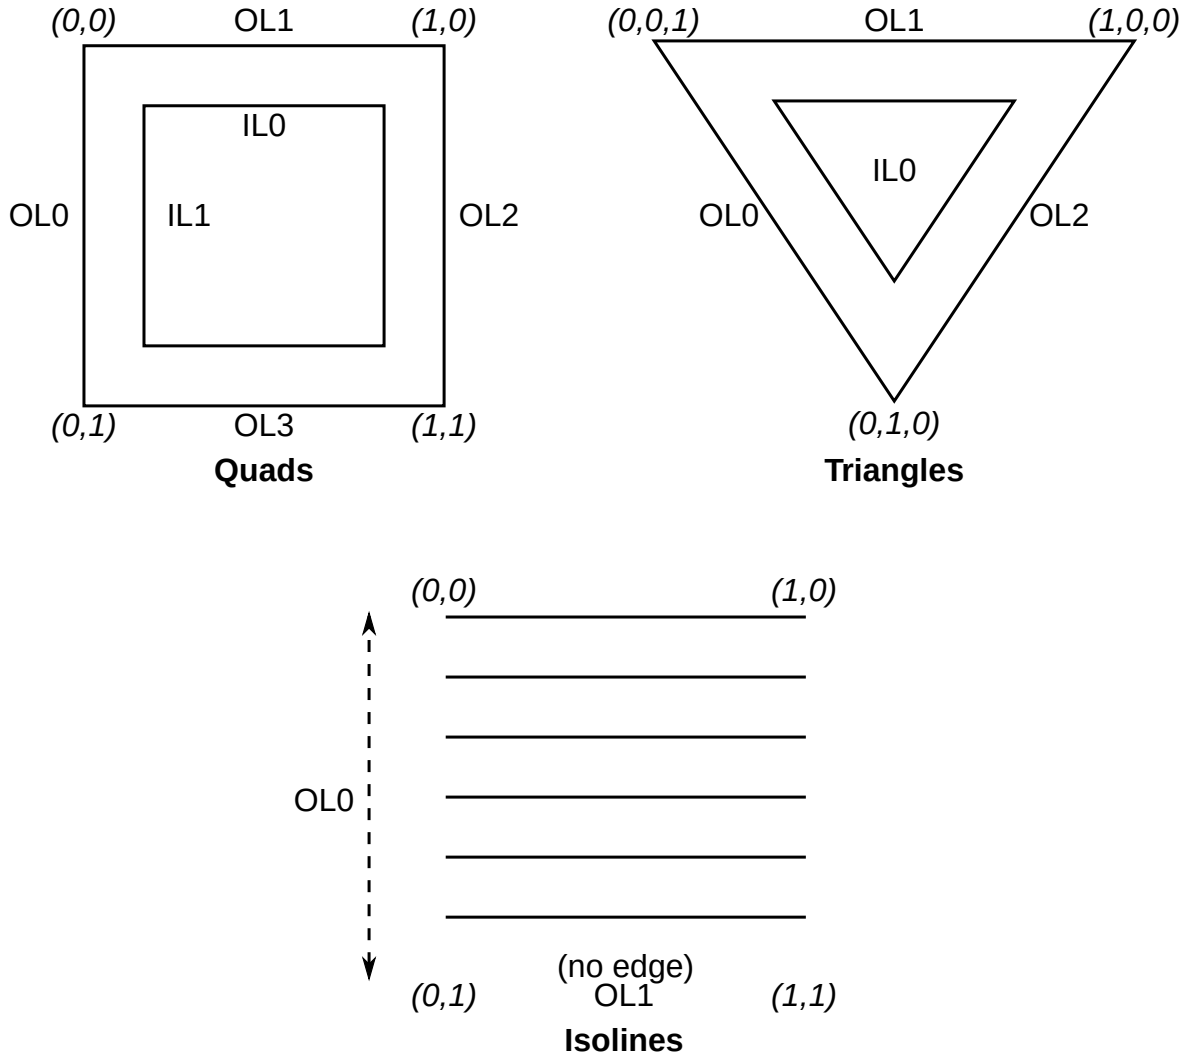

Figure 11. Domain parameterization for tessellation primitive modes (upper-left origin)

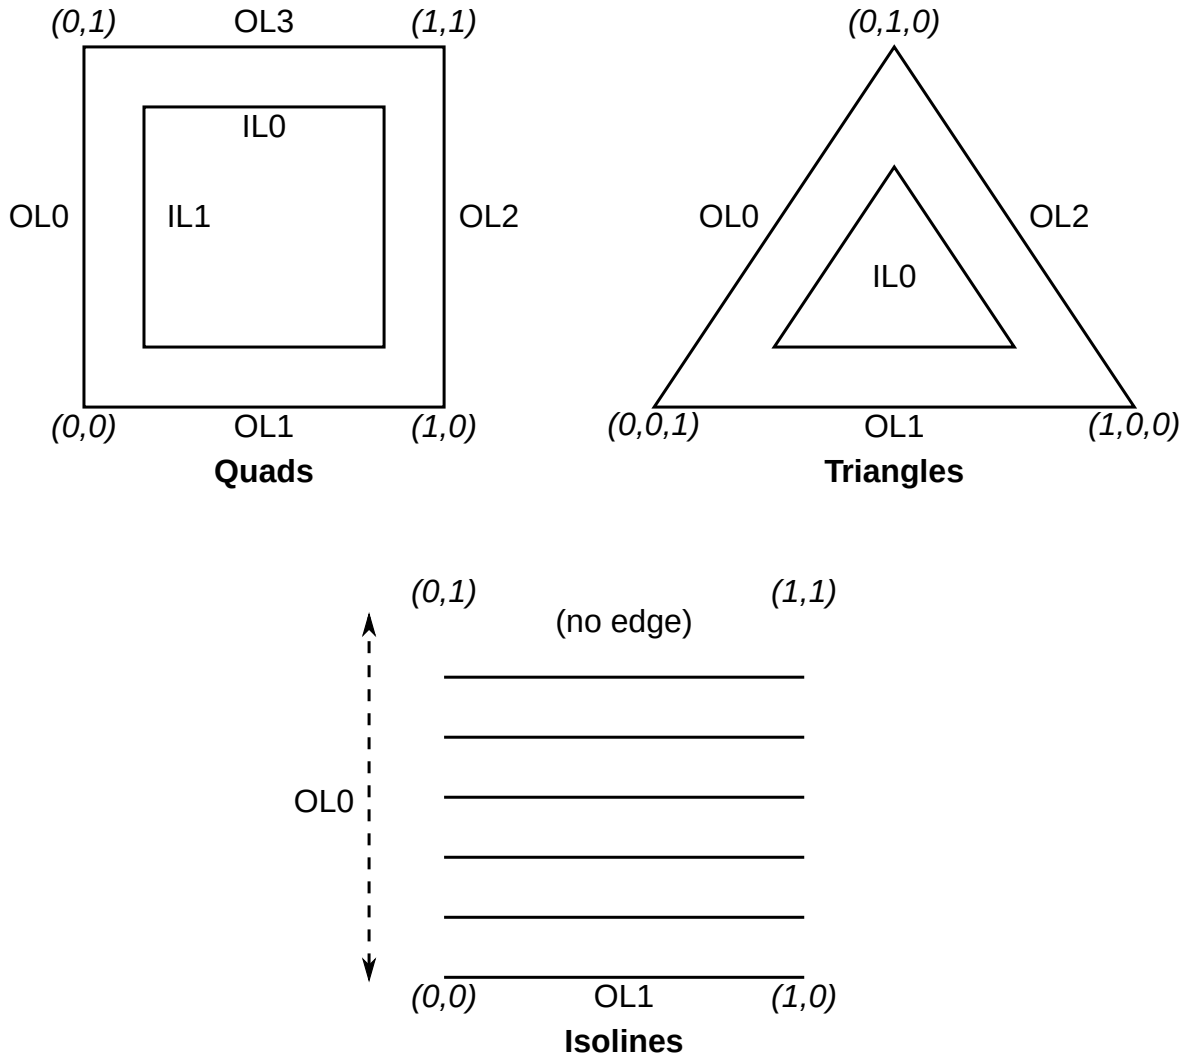

Figure 12. Domain parameterization for tessellation primitive modes (lower-left origin)

Caption

In the domain parameterization diagrams, the coordinates illustrate the value of `TessCoord` at the corners of the domain. The labels on the edges indicate the inner (IL0 and IL1) and outer (OL0 through OL3) tessellation level values used to control the number of subdivisions along each edge of the domain.

For triangles, the vertex's position is a barycentric coordinate (u,v,w), where u + v + w = 1.0, and indicates the relative influence of the three vertices of the triangle on the position of the vertex. For quads and isolines, the position is a (u,v) coordinate indicating the relative horizontal and vertical position of the vertex relative to the subdivided rectangle. The subdivision process is explained in more detail in subsequent sections.

22.2. Tessellator Patch Discard

A patch is discarded by the tessellator if any relevant outer tessellation level is less than or equal to zero.

Patches will also be discarded if any relevant outer tessellation level corresponds to a floating-point

NaN (not a number) in implementations supporting NaN.

No new primitives are generated and the tessellation evaluation shader is not executed for patches that are discarded. For `Quads`, all four outer levels are relevant. For `Triangles` and `IsoLines`, only the first three or two outer levels, respectively, are relevant. Negative inner levels will not cause a patch to be discarded; they will be clamped as described below.

22.3. Tessellator Spacing

Each of the tessellation levels is used to determine the number and spacing of segments used to subdivide a corresponding edge. The method used to derive the number and spacing of segments is specified by an `OpExecutionMode` in the tessellation control or tessellation evaluation shader using one of the identifiers `SpacingEqual`, `SpacingFractionalEven`, or `SpacingFractionalOdd`.

If `SpacingEqual` is used, the floating-point tessellation level is first clamped to [1, `maxLevel`], where `maxLevel` is the implementation-dependent maximum tessellation level (`VkPhysicalDeviceLimits ::maxTessellationGenerationLevel`). The result is rounded up to the nearest integer n, and the corresponding edge is divided into n segments of equal length in (u,v) space.

If `SpacingFractionalEven` is used, the tessellation level is first clamped to [2, `maxLevel`] and then rounded up to the nearest even integer n. If `SpacingFractionalOdd` is used, the tessellation level is clamped to [1, `maxLevel` - 1] and then rounded up to the nearest odd integer n. If n is one, the edge will not be subdivided. Otherwise, the corresponding edge will be divided into n - 2 segments of equal length, and two additional segments of equal length that are typically shorter than the other segments. The length of the two additional segments relative to the others will decrease monotonically with n - f, where f is the clamped floating-point tessellation level. When n - f is zero, the additional segments will have equal length to the other segments. As n - f approaches 2.0, the relative length of the additional segments approaches zero. The two additional segments **must** be placed symmetrically on opposite sides of the subdivided edge. The relative location of these two segments is implementation-dependent, but **must** be identical for any pair of subdivided edges with identical values of f.

When tessellating triangles or quads using point mode with fractional odd spacing, the tessellator **may** produce *interior vertices* that are positioned on the edge of the patch if an inner tessellation level is less than or equal to one. Such vertices are considered distinct from vertices produced by subdividing the outer edge of the patch, even if there are pairs of vertices with identical coordinates.

22.4. Tessellation Primitive Ordering

Few guarantees are provided for the relative ordering of primitives produced by tessellation, as they pertain to primitive order.

- The output primitives generated from each input primitive are passed to subsequent pipeline stages in an implementation-dependent order.
- All output primitives generated from a given input primitive are passed to subsequent pipeline stages before any output primitives generated from subsequent input primitives.

22.5. Tessellator Vertex Winding Order

When the tessellator produces triangles (in the `Triangles` or `Quads` modes), the orientation of all triangles is specified with an `OpExecutionMode` of `VertexOrderCw` or `VertexOrderCcw` in the tessellation control or tessellation evaluation shaders. If the order is `VertexOrderCw`, the vertices of all generated triangles will have clockwise ordering in (u,v) or (u,v,w) space. If the order is `VertexOrderCcw`, the vertices will have counter-clockwise ordering in that space.

If the tessellation domain has an upper-left origin, the vertices of a triangle have counter-clockwise ordering if

$$a = u_0 v_1 - u_1 v_0 + u_1 v_2 - u_2 v_1 + u_2 v_0 - u_0 v_2$$

is negative, and clockwise ordering if a is positive. u_i and v_i are the u and v coordinates in normalized parameter space of the ith vertex of the triangle. If the tessellation domain has a lower-left origin, the vertices of a triangle have counter-clockwise ordering if a is positive, and clockwise ordering if a is negative.

NOTE

The value a is proportional (with a positive factor) to the signed area of the triangle.

In `Triangles` mode, even though the vertex coordinates have a w value, it does not participate directly in the computation of a, being an affine combination of u and v.

22.6. Triangle Tessellation

If the tessellation primitive mode is `Triangles`, an equilateral triangle is subdivided into a collection of triangles covering the area of the original triangle. First, the original triangle is subdivided into a collection of concentric equilateral triangles. The edges of each of these triangles are subdivided, and the area between each triangle pair is filled by triangles produced by joining the vertices on the subdivided edges. The number of concentric triangles and the number of subdivisions along each triangle except the outermost is derived from the first inner tessellation level. The edges of the outermost triangle are subdivided independently, using the first, second, and third outer tessellation levels to control the number of subdivisions of the u = 0 (left), v = 0 (bottom), and w = 0 (right) edges, respectively. The second inner tessellation level and the fourth outer tessellation level have no effect in this mode.

If the first inner tessellation level and all three outer tessellation levels are exactly one after clamping and rounding, only a single triangle with (u,v,w) coordinates of (0,0,1), (1,0,0), and (0,1,0) is generated. If the inner tessellation level is one and any of the outer tessellation levels is greater than one, the inner tessellation level is treated as though it were originally specified as 1 + ε and will result in a two- or three-segment subdivision depending on the tessellation spacing. When used with fractional odd spacing, the three-segment subdivision **may** produce *inner vertices* positioned on the edge of the triangle.

If any tessellation level is greater than one, tessellation begins by producing a set of concentric inner triangles and subdividing their edges. First, the three outer edges are temporarily subdivided using the clamped and rounded first inner tessellation level and the specified tessellation spacing,

generating n segments. For the outermost inner triangle, the inner triangle is degenerate — a single point at the center of the triangle — if n is two. Otherwise, for each corner of the outer triangle, an inner triangle corner is produced at the intersection of two lines extended perpendicular to the corner's two adjacent edges running through the vertex of the subdivided outer edge nearest that corner. If n is three, the edges of the inner triangle are not subdivided and it is the final triangle in the set of concentric triangles. Otherwise, each edge of the inner triangle is divided into n - 2 segments, with the n - 1 vertices of this subdivision produced by intersecting the inner edge with lines perpendicular to the edge running through the n - 1 innermost vertices of the subdivision of the outer edge. Once the outermost inner triangle is subdivided, the previous subdivision process repeats itself, using the generated triangle as an outer triangle. This subdivision process is illustrated in Inner Triangle Tessellation.

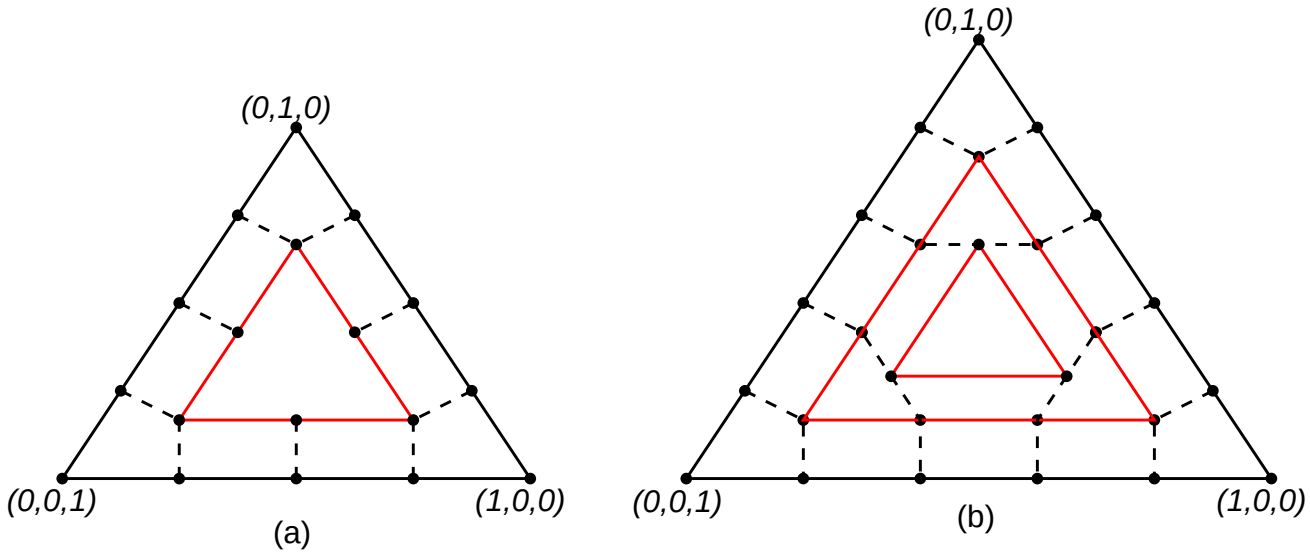

Figure 13. Inner Triangle Tessellation

Caption

In the Inner Triangle Tessellation diagram, inner tessellation levels of (a) four and (b) five are shown (not to scale). Solid black circles depict vertices along the edges of the concentric triangles. The edges of inner triangles are subdivided by intersecting the edge with segments perpendicular to the edge passing through each inner vertex of the subdivided outer edge. Dotted lines depict edges connecting corresponding vertices on the inner and outer triangle edges.

Once all the concentric triangles are produced and their edges are subdivided, the area between each pair of adjacent inner triangles is filled completely with a set of non-overlapping triangles. In this subdivision, two of the three vertices of each triangle are taken from adjacent vertices on a subdivided edge of one triangle; the third is one of the vertices on the corresponding edge of the other triangle. If the innermost triangle is degenerate (i.e., a point), the triangle containing it is subdivided into six triangles by connecting each of the six vertices on that triangle with the center point. If the innermost triangle is not degenerate, that triangle is added to the set of generated triangles as-is.

After the area corresponding to any inner triangles is filled, the tessellator generates triangles to cover the area between the outermost triangle and the outermost inner triangle. To do this, the

temporary subdivision of the outer triangle edge above is discarded. Instead, the u = 0, v = 0, and w = 0 edges are subdivided according to the first, second, and third outer tessellation levels, respectively, and the tessellation spacing. The original subdivision of the first inner triangle is retained. The area between the outer and first inner triangles is completely filled by non-overlapping triangles as described above. If the first (and only) inner triangle is degenerate, a set of triangles is produced by connecting each vertex on the outer triangle edges with the center point.

After all triangles are generated, each vertex in the subdivided triangle is assigned a barycentric (u,v,w) coordinate based on its location relative to the three vertices of the outer triangle.

The algorithm used to subdivide the triangular domain in (u,v,w) space into individual triangles is implementation-dependent. However, the set of triangles produced will completely cover the domain, and no portion of the domain will be covered by multiple triangles.

Output triangles are generated with a topology similar to triangle lists, except that the order in which each triangle is generated, and the order in which the vertices are generated for each triangle, are implementation-dependent. However, the order of vertices in each triangle is consistent across the domain as described in Tessellator Vertex Winding Order.

22.7. Quad Tessellation

If the tessellation primitive mode is `Quads`, a rectangle is subdivided into a collection of triangles covering the area of the original rectangle. First, the original rectangle is subdivided into a regular mesh of rectangles, where the number of rectangles along the u = 0 and u = 1 (vertical) and v = 0 and v = 1 (horizontal) edges are derived from the first and second inner tessellation levels, respectively. All rectangles, except those adjacent to one of the outer rectangle edges, are decomposed into triangle pairs. The outermost rectangle edges are subdivided independently, using the first, second, third, and fourth outer tessellation levels to control the number of subdivisions of the u = 0 (left), v = 0 (bottom), u = 1 (right), and v = 1 (top) edges, respectively. The area between the inner rectangles of the mesh and the outer rectangle edges are filled by triangles produced by joining the vertices on the subdivided outer edges to the vertices on the edge of the inner rectangle mesh.

If both clamped inner tessellation levels and all four clamped outer tessellation levels are exactly one, only a single triangle pair covering the outer rectangle is generated. Otherwise, if either clamped inner tessellation level is one, that tessellation level is treated as though it was originally specified as 1 + ε and will result in a two- or three-segment subdivision depending on the tessellation spacing. When used with fractional odd spacing, the three-segment subdivision **may** produce *inner vertices* positioned on the edge of the rectangle.

If any tessellation level is greater than one, tessellation begins by subdividing the u = 0 and u = 1 edges of the outer rectangle into m segments using the clamped and rounded first inner tessellation level and the tessellation spacing. The v = 0 and v = 1 edges are subdivided into n segments using the second inner tessellation level. Each vertex on the u = 0 and v = 0 edges are joined with the corresponding vertex on the u = 1 and v = 1 edges to produce a set of vertical and horizontal lines that divide the rectangle into a grid of smaller rectangles. The primitive generator emits a pair of non-overlapping triangles covering each such rectangle not adjacent to an edge of the outer rectangle. The boundary of the region covered by these triangles forms an inner rectangle, the

edges of which are subdivided by the grid vertices that lie on the edge. If either m or n is two, the inner rectangle is degenerate, and one or both of the rectangle's *edges* consist of a single point. This subdivision is illustrated in Figure Inner Quad Tessellation.

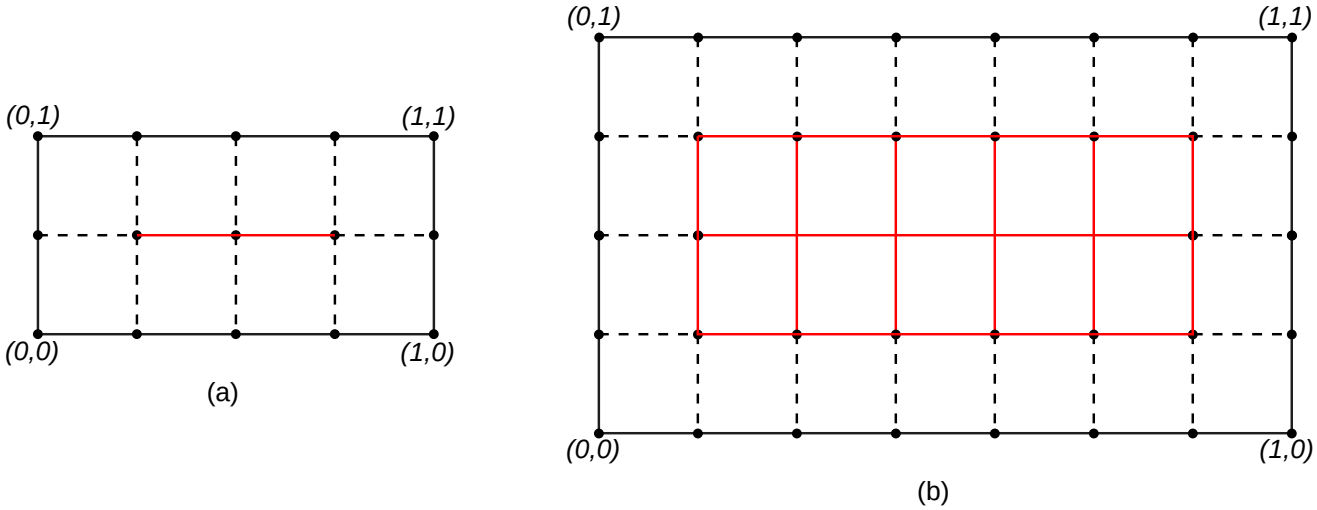

Figure 14. Inner Quad Tessellation

Caption

In the Inner Quad Tessellation diagram, inner quad tessellation levels of (a) (4,2) and (b) (7,4) are shown. The regions highlighted in red in figure (b) depict the 10 inner rectangles, each of which will be subdivided into two triangles. Solid black circles depict vertices on the boundary of the outer and inner rectangles, where the inner rectangle of figure (a) is degenerate (a single line segment). Dotted lines depict the horizontal and vertical edges connecting corresponding vertices on the inner and outer rectangle edges.

After the area corresponding to the inner rectangle is filled, the tessellator **must** produce triangles to cover the area between the inner and outer rectangles. To do this, the subdivision of the outer rectangle edge above is discarded. Instead, the u = 0, v = 0, u = 1, and v = 1 edges are subdivided according to the first, second, third, and fourth outer tessellation levels, respectively, and the tessellation spacing. The original subdivision of the inner rectangle is retained. The area between the outer and inner rectangles is completely filled by non-overlapping triangles. Two of the three vertices of each triangle are adjacent vertices on a subdivided edge of one rectangle; the third is one of the vertices on the corresponding edge of the other rectangle. If either edge of the innermost rectangle is degenerate, the area near the corresponding outer edges is filled by connecting each vertex on the outer edge with the single vertex making up the *inner edge*.

The algorithm used to subdivide the rectangular domain in (u,v) space into individual triangles is implementation-dependent. However, the set of triangles produced will completely cover the domain, and no portion of the domain will be covered by multiple triangles.

Output triangles are generated with a topology similar to triangle lists, except that the order in which each triangle is generated, and the order in which the vertices are generated for each triangle, are implementation-dependent. However, the order of vertices in each triangle is consistent across the domain as described in Tessellator Vertex Winding Order.

22.8. Isoline Tessellation

If the tessellation primitive mode is `IsoLines`, a set of independent horizontal line segments is drawn. The segments are arranged into connected strips called *isolines*, where the vertices of each isoline have a constant v coordinate and u coordinates covering the full range [0,1]. The number of isolines generated is derived from the first outer tessellation level; the number of segments in each isoline is derived from the second outer tessellation level. Both inner tessellation levels and the third and fourth outer tessellation levels have no effect in this mode.

As with quad tessellation above, isoline tessellation begins with a rectangle. The u = 0 and u = 1 edges of the rectangle are subdivided according to the first outer tessellation level. For the purposes of this subdivision, the tessellation spacing mode is ignored and treated as equal_spacing. An isoline is drawn connecting each vertex on the u = 0 rectangle edge to the corresponding vertex on the u = 1 rectangle edge, except that no line is drawn between (0,1) and (1,1). If the number of isolines on the subdivided u = 0 and u = 1 edges is n, this process will result in n equally spaced lines with constant v coordinates of 0, $\frac{1}{n}$, $\frac{2}{n}$, ..., $\frac{n-1}{n}$.

Each of the n isolines is then subdivided according to the second outer tessellation level and the tessellation spacing, resulting in m line segments. Each segment of each line is emitted by the tessellator. These line segments are generated with a topology similar to line lists, except that the order in which each line is generated, and the order in which the vertices are generated for each line segment, are implementation-dependent.

22.9. Tessellation Point Mode

For all primitive modes, the tessellator is capable of generating points instead of lines or triangles. If the tessellation control or tessellation evaluation shader specifies the `OpExecutionMode PointMode`, the primitive generator will generate one point for each distinct vertex produced by tessellation, rather than emitting triangles or lines. Otherwise, the tessellator will produce a collection of line segments or triangles according to the primitive mode. These points are generated with a topology similar to point lists, except the order in which the points are generated for each input primitive is undefined.

22.10. Tessellation Pipeline State

The `pTessellationState` member of `VkGraphicsPipelineCreateInfo` is a pointer to a `VkPipelineTessellationStateCreateInfo` structure.

The `VkPipelineTessellationStateCreateInfo` structure is defined as:

```
// Provided by VK_VERSION_1_0
typedef struct VkPipelineTessellationStateCreateInfo {
    VkStructureType                           sType;
    const void*                               pNext;
    VkPipelineTessellationStateCreateFlags    flags;
    uint32_t                                  patchControlPoints;
} VkPipelineTessellationStateCreateInfo;
```

- `sType` is a VkStructureType value identifying this structure.
- `pNext` is `NULL` or a pointer to a structure extending this structure.
- `flags` is reserved for future use.
- `patchControlPoints` is the number of control points per patch.

Valid Usage

- VUID-VkPipelineTessellationStateCreateInfo-patchControlPoints-01214
  `patchControlPoints` **must** be greater than zero and less than or equal to `VkPhysicalDeviceLimits`::`maxTessellationPatchSize`

Valid Usage (Implicit)

- VUID-VkPipelineTessellationStateCreateInfo-sType-sType
  `sType` **must** be `VK_STRUCTURE_TYPE_PIPELINE_TESSELLATION_STATE_CREATE_INFO`
- VUID-VkPipelineTessellationStateCreateInfo-pNext-pNext
  `pNext` **must** be `NULL` or a pointer to a valid instance of VkPipelineTessellationDomainOriginStateCreateInfo
- VUID-VkPipelineTessellationStateCreateInfo-sType-unique
  The `sType` value of each struct in the `pNext` chain **must** be unique
- VUID-VkPipelineTessellationStateCreateInfo-flags-zerobitmask
  `flags` **must** be `0`

```
// Provided by VK_VERSION_1_0
typedef VkFlags VkPipelineTessellationStateCreateFlags;
```

`VkPipelineTessellationStateCreateFlags` is a bitmask type for setting a mask, but is currently reserved for future use.

The `VkPipelineTessellationDomainOriginStateCreateInfo` structure is defined as:

```
// Provided by VK_VERSION_1_1
typedef struct VkPipelineTessellationDomainOriginStateCreateInfo {
    VkStructureType              sType;
    const void*                  pNext;
    VkTessellationDomainOrigin   domainOrigin;
} VkPipelineTessellationDomainOriginStateCreateInfo;
```

- `sType` is a VkStructureType value identifying this structure.
- `pNext` is `NULL` or a pointer to a structure extending this structure.
- `domainOrigin` is a VkTessellationDomainOrigin value controlling the origin of the tessellation

domain space.

If the VkPipelineTessellationDomainOriginStateCreateInfo structure is included in the pNext chain of VkPipelineTessellationStateCreateInfo, it controls the origin of the tessellation domain. If this structure is not present, it is as if domainOrigin was VK_TESSELLATION_DOMAIN_ORIGIN_UPPER_LEFT.

Valid Usage (Implicit)

- VUID-VkPipelineTessellationDomainOriginStateCreateInfo-sType-sType
  sType **must** be VK_STRUCTURE_TYPE_PIPELINE_TESSELLATION_DOMAIN_ORIGIN_STATE_CREATE_INFO
- VUID-VkPipelineTessellationDomainOriginStateCreateInfo-domainOrigin-parameter
  domainOrigin **must** be a valid VkTessellationDomainOrigin value

The possible tessellation domain origins are specified by the VkTessellationDomainOrigin enumeration:

```
// Provided by VK_VERSION_1_1
typedef enum VkTessellationDomainOrigin {
    VK_TESSELLATION_DOMAIN_ORIGIN_UPPER_LEFT = 0,
    VK_TESSELLATION_DOMAIN_ORIGIN_LOWER_LEFT = 1,
} VkTessellationDomainOrigin;
```

- VK_TESSELLATION_DOMAIN_ORIGIN_UPPER_LEFT specifies that the origin of the domain space is in the upper left corner, as shown in figure Domain parameterization for tessellation primitive modes (upper-left origin).
- VK_TESSELLATION_DOMAIN_ORIGIN_LOWER_LEFT specifies that the origin of the domain space is in the lower left corner, as shown in figure Domain parameterization for tessellation primitive modes (lower-left origin).

This enum affects how the VertexOrderCw and VertexOrderCcw tessellation execution modes are interpreted, since the winding is defined relative to the orientation of the domain.

Chapter 23. Geometry Shading

The geometry shader operates on a group of vertices and their associated data assembled from a single input primitive, and emits zero or more output primitives and the group of vertices and their associated data required for each output primitive. Geometry shading is enabled when a geometry shader is included in the pipeline.

23.1. Geometry Shader Input Primitives

Each geometry shader invocation has access to all vertices in the primitive (and their associated data), which are presented to the shader as an array of inputs.

The input primitive type expected by the geometry shader is specified with an `OpExecutionMode` instruction in the geometry shader, and **must** match the incoming primitive type specified by either the pipeline's primitive topology if tessellation is inactive, or the tessellation mode if tessellation is active, as follows:

- An input primitive type of `InputPoints` **must** only be used with a pipeline topology of `VK_PRIMITIVE_TOPOLOGY_POINT_LIST`, or with a tessellation shader specifying `PointMode`. The input arrays always contain one element, as described by the point list topology or tessellation in point mode.
- An input primitive type of `InputLines` **must** only be used with a pipeline topology of `VK_PRIMITIVE_TOPOLOGY_LINE_LIST` or `VK_PRIMITIVE_TOPOLOGY_LINE_STRIP`, or with a tessellation shader specifying `IsoLines` that does not specify `PointMode`. The input arrays always contain two elements, as described by the line list topology or line strip topology, or by isoline tessellation.
- An input primitive type of `InputLinesAdjacency` **must** only be used when tessellation is inactive, with a pipeline topology of `VK_PRIMITIVE_TOPOLOGY_LINE_LIST_WITH_ADJACENCY` or `VK_PRIMITIVE_TOPOLOGY_LINE_STRIP_WITH_ADJACENCY`. The input arrays always contain four elements, as described by the line list with adjacency topology or line strip with adjacency topology.
- An input primitive type of `Triangles` **must** only be used with a pipeline topology of `VK_PRIMITIVE_TOPOLOGY_TRIANGLE_LIST`, `VK_PRIMITIVE_TOPOLOGY_TRIANGLE_STRIP`, or `VK_PRIMITIVE_TOPOLOGY_TRIANGLE_FAN`; or with a tessellation shader specifying `Quads` or `Triangles` that does not specify `PointMode`. The input arrays always contain three elements, as described by the triangle list topology, triangle strip topology, or triangle fan topology, or by triangle or quad tessellation. Vertices **may** be in a different absolute order than specified by the topology, but **must** adhere to the specified winding order.
- An input primitive type of `InputTrianglesAdjacency` **must** only be used when tessellation is inactive, with a pipeline topology of `VK_PRIMITIVE_TOPOLOGY_TRIANGLE_LIST_WITH_ADJACENCY` or `VK_PRIMITIVE_TOPOLOGY_TRIANGLE_STRIP_WITH_ADJACENCY`. The input arrays always contain six elements, as described by the triangle list with adjacency topology or triangle strip with adjacency topology. Vertices **may** be in a different absolute order than specified by the topology, but **must** adhere to the specified winding order, and the vertices making up the main primitive **must** still occur at the first, third, and fifth index.

23.2. Geometry Shader Output Primitives

A geometry shader generates primitives in one of three output modes: points, line strips, or triangle strips. The primitive mode is specified in the shader using an `OpExecutionMode` instruction with the `OutputPoints`, `OutputLineStrip` or `OutputTriangleStrip` modes, respectively. Each geometry shader **must** include exactly one output primitive mode.

The vertices output by the geometry shader are assembled into points, lines, or triangles based on the output primitive type and the resulting primitives are then further processed as described in Rasterization. If the number of vertices emitted by the geometry shader is not sufficient to produce a single primitive, vertices corresponding to incomplete primitives are not processed by subsequent pipeline stages. The number of vertices output by the geometry shader is limited to a maximum count specified in the shader.

The maximum output vertex count is specified in the shader using an `OpExecutionMode` instruction with the mode set to `OutputVertices` and the maximum number of vertices that will be produced by the geometry shader specified as a literal. Each geometry shader **must** specify a maximum output vertex count.

23.3. Multiple Invocations of Geometry Shaders

Geometry shaders **can** be invoked more than one time for each input primitive. This is known as *geometry shader instancing* and is requested by including an `OpExecutionMode` instruction with `mode` specified as `Invocations` and the number of invocations specified as an integer literal.

In this mode, the geometry shader will execute at least n times for each input primitive, where n is the number of invocations specified in the `OpExecutionMode` instruction. The instance number is available to each invocation as a built-in input using `InvocationId`.

23.4. Geometry Shader Primitive Ordering

Limited guarantees are provided for the relative ordering of primitives produced by a geometry shader, as they pertain to primitive order.

- For instanced geometry shaders, the output primitives generated from each input primitive are passed to subsequent pipeline stages using the invocation number to order the primitives, from least to greatest.
- All output primitives generated from a given input primitive are passed to subsequent pipeline stages before any output primitives generated from subsequent input primitives.

Chapter 24. Fixed-Function Vertex Post-Processing

After pre-rasterization shader stages, the following fixed-function operations are applied to vertices of the resulting primitives:

- Flat shading (see Flat Shading).
- Primitive clipping, including application-defined half-spaces (see Primitive Clipping).
- Shader output attribute clipping (see Clipping Shader Outputs).
- Perspective division on clip coordinates (see Coordinate Transformations).
- Viewport mapping, including depth range scaling (see Controlling the Viewport).
- Front face determination for polygon primitives (see Basic Polygon Rasterization).

Next, rasterization is performed on primitives as described in chapter Rasterization.

24.1. Flat Shading

Flat shading a vertex output attribute means to assign all vertices of the primitive the same value for that output. The output values assigned are those of the *provoking vertex* of the primitive. Flat shading is applied to those vertex attributes that match fragment input attributes which are decorated as `Flat`.

If neither geometry nor tessellation shading is active, the provoking vertex is determined by the primitive topology defined by VkPipelineInputAssemblyStateCreateInfo:`topology` used to execute the drawing command.

If geometry shading is active, the provoking vertex is determined by the primitive topology defined by the `OutputPoints`, `OutputLineStrip`, or `OutputTriangleStrip` execution mode.

If tessellation shading is active but geometry shading is not, the provoking vertex **may** be any of the vertices in each primitive.

24.2. Primitive Clipping

Primitives are culled against the *cull volume* and then clipped to the *clip volume*. In clip coordinates, the *view volume* is defined by:

$$
\begin{aligned}
-w_c \leq x_c \leq w_c \\
-w_c \leq y_c \leq w_c \\
z_m \leq z_c \leq w_c
\end{aligned}
$$

where z_m is equal to zero.

This view volume **can** be further restricted by as many as `VkPhysicalDeviceLimits::maxClipDistances` application-defined half-spaces.

The cull volume is the intersection of up to VkPhysicalDeviceLimits::maxCullDistances application-defined half-spaces (if no application-defined cull half-spaces are enabled, culling against the cull volume is skipped).

A shader **must** write a single cull distance for each enabled cull half-space to elements of the CullDistance array. If the cull distance for any enabled cull half-space is negative for all of the vertices of the primitive under consideration, the primitive is discarded. Otherwise the primitive is clipped against the clip volume as defined below.

The clip volume is the intersection of up to VkPhysicalDeviceLimits::maxClipDistances application-defined half-spaces with the view volume (if no application-defined clip half-spaces are enabled, the clip volume is the view volume).

A shader **must** write a single clip distance for each enabled clip half-space to elements of the ClipDistance array. Clip half-space i is then given by the set of points satisfying the inequality

$$c_i(\mathbf{P}) \geq 0$$

where $c_i(\mathbf{P})$ is the clip distance i at point **P**. For point primitives, $c_i(\mathbf{P})$ is simply the clip distance for the vertex in question. For line and triangle primitives, per-vertex clip distances are interpolated using a weighted mean, with weights derived according to the algorithms described in sections Basic Line Segment Rasterization and Basic Polygon Rasterization, using the perspective interpolation equations.

The number of application-defined clip and cull half-spaces that are enabled is determined by the explicit size of the built-in arrays ClipDistance and CullDistance, respectively, declared as an output in the interface of the entry point of the final shader stage before clipping.

Depth clamping is enabled or disabled via the depthClampEnable enable of the VkPipelineRasterizationStateCreateInfo structure. Depth clipping is disabled when depthClampEnable is VK_TRUE.

When depth clipping is disabled, the plane equation

$$z_m \leq z_c \leq w_c$$

(see the clip volume definition above) is ignored by view volume clipping (effectively, there is no near or far plane clipping).

If the primitive under consideration is a point or line segment, then clipping passes it unchanged if its vertices lie entirely within the clip volume.

Possible values of VkPhysicalDevicePointClippingProperties::pointClippingBehavior, specifying clipping behavior of a point primitive whose vertex lies outside the clip volume, are:

```
// Provided by VK_VERSION_1_1
typedef enum VkPointClippingBehavior {
    VK_POINT_CLIPPING_BEHAVIOR_ALL_CLIP_PLANES = 0,
    VK_POINT_CLIPPING_BEHAVIOR_USER_CLIP_PLANES_ONLY = 1,
} VkPointClippingBehavior;
```

- VK_POINT_CLIPPING_BEHAVIOR_ALL_CLIP_PLANES specifies that the primitive is discarded if the vertex lies outside any clip plane, including the planes bounding the view volume.
- VK_POINT_CLIPPING_BEHAVIOR_USER_CLIP_PLANES_ONLY specifies that the primitive is discarded only if the vertex lies outside any user clip plane.

If either of a line segment's vertices lie outside of the clip volume, the line segment **may** be clipped, with new vertex coordinates computed for each vertex that lies outside the clip volume. A clipped line segment endpoint lies on both the original line segment and the boundary of the clip volume.

This clipping produces a value, $0 \leq t \leq 1$, for each clipped vertex. If the coordinates of a clipped vertex are **P** and the unclipped line segment's vertex coordinates are $\mathbf{P}_1$ and $\mathbf{P}_2$, then t satisfies the following equation

$$\mathbf{P} = t\,\mathbf{P}_1 + (1-t)\,\mathbf{P}_2.$$

t is used to clip vertex output attributes as described in Clipping Shader Outputs.

If the primitive is a polygon, it passes unchanged if every one of its edges lies entirely inside the clip volume, and is either clipped or discarded otherwise. If the edges of the polygon intersect the boundary of the clip volume, the intersecting edges are reconnected by new edges that lie along the boundary of the clip volume - in some cases requiring the introduction of new vertices into a polygon.

If a polygon intersects an edge of the clip volume's boundary, the clipped polygon **must** include a point on this boundary edge.

Primitives rendered with application-defined half-spaces **must** satisfy a complementarity criterion. Suppose a series of primitives is drawn where each vertex i has a single specified clip distance d_i (or a number of similarly specified clip distances, if multiple half-spaces are enabled). Next, suppose that the same series of primitives are drawn again with each such clip distance replaced by $-d_i$ (and the graphics pipeline is otherwise the same). In this case, primitives **must** not be missing any pixels, and pixels **must** not be drawn twice in regions where those primitives are cut by the clip planes.

24.3. Clipping Shader Outputs

Next, vertex output attributes are clipped. The output values associated with a vertex that lies within the clip volume are unaffected by clipping. If a primitive is clipped, however, the output values assigned to vertices produced by clipping are clipped.

Let the output values assigned to the two vertices $\mathbf{P}_1$ and $\mathbf{P}_2$ of an unclipped edge be $\mathbf{c}_1$ and $\mathbf{c}_2$. The value of t (see Primitive Clipping) for a clipped point **P** is used to obtain the output value associated

with **P** as

$$\mathbf{c} = t\,\mathbf{c}_1 + (1\text{-}t)\,\mathbf{c}_2.$$

(Multiplying an output value by a scalar means multiplying each of *x*, *y*, *z*, and *w* by the scalar.)

Since this computation is performed in clip space before division by w_c, clipped output values are perspective-correct.

Polygon clipping creates a clipped vertex along an edge of the clip volume's boundary. This situation is handled by noting that polygon clipping proceeds by clipping against one half-space at a time. Output value clipping is done in the same way, so that clipped points always occur at the intersection of polygon edges (possibly already clipped) with the clip volume's boundary.

For vertex output attributes whose matching fragment input attributes are decorated with `NoPerspective`, the value of t used to obtain the output value associated with **P** will be adjusted to produce results that vary linearly in framebuffer space.

Output attributes of integer or unsigned integer type **must** always be flat shaded. Flat shaded attributes are constant over the primitive being rasterized (see Basic Line Segment Rasterization and Basic Polygon Rasterization), and no interpolation is performed. The output value **c** is taken from either $\mathbf{c}_1$ or $\mathbf{c}_2$, since flat shading has already occurred and the two values are identical.

24.4. Coordinate Transformations

Clip coordinates for a vertex result from shader execution, which yields a vertex coordinate `Position`.

Perspective division on clip coordinates yields *normalized device coordinates*, followed by a *viewport* transformation (see Controlling the Viewport) to convert these coordinates into *framebuffer coordinates*.

If a vertex in clip coordinates has a position given by

$$\begin{pmatrix} x_c \\ y_c \\ z_c \\ w_c \end{pmatrix}$$

then the vertex's normalized device coordinates are

$$\begin{pmatrix} x_d \\ y_d \\ z_d \end{pmatrix} = \begin{pmatrix} \frac{x_c}{w_c} \\ \frac{y_c}{w_c} \\ \frac{z_c}{w_c} \end{pmatrix}$$

24.5. Controlling the Viewport

The viewport transformation is determined by the selected viewport's width and height in pixels, p_x and p_y, respectively, and its center (o_x, o_y) (also in pixels), as well as its depth range min and max determining a depth range scale value p_z and a depth range bias value o_z (defined below). The vertex's framebuffer coordinates (x_f, y_f, z_f) are given by

$$x_f = (p_x / 2)\, x_d + o_x$$

$$y_f = (p_y / 2)\, y_d + o_y$$

$$z_f = p_z \times z_d + o_z$$

Multiple viewports are available, numbered zero up to `VkPhysicalDeviceLimits`::`maxViewports` minus one. The number of viewports used by a pipeline is controlled by the `viewportCount` member of the `VkPipelineViewportStateCreateInfo` structure used in pipeline creation.

x_f and y_f have limited precision, where the number of fractional bits retained is specified by `VkPhysicalDeviceLimits`::`subPixelPrecisionBits`.

The `VkPipelineViewportStateCreateInfo` structure is defined as:

```
// Provided by VK_VERSION_1_0
typedef struct VkPipelineViewportStateCreateInfo {
    VkStructureType                       sType;
    const void*                           pNext;
    VkPipelineViewportStateCreateFlags    flags;
    uint32_t                              viewportCount;
    const VkViewport*                     pViewports;
    uint32_t                              scissorCount;
    const VkRect2D*                       pScissors;
} VkPipelineViewportStateCreateInfo;
```

- `sType` is a VkStructureType value identifying this structure.
- `pNext` is `NULL` or a pointer to a structure extending this structure.
- `flags` is reserved for future use.
- `viewportCount` is the number of viewports used by the pipeline.
- `pViewports` is a pointer to an array of VkViewport structures, defining the viewport transforms. If the viewport state is dynamic, this member is ignored.
- `scissorCount` is the number of scissors and **must** match the number of viewports.
- `pScissors` is a pointer to an array of VkRect2D structures defining the rectangular bounds of the scissor for the corresponding viewport. If the scissor state is dynamic, this member is ignored.

Valid Usage

- VUID-VkPipelineViewportStateCreateInfo-viewportCount-01216
  If the `multiViewport` feature is not enabled, `viewportCount` **must** not be greater than `1`
- VUID-VkPipelineViewportStateCreateInfo-scissorCount-01217
  If the `multiViewport` feature is not enabled, `scissorCount` **must** not be greater than `1`
- VUID-VkPipelineViewportStateCreateInfo-viewportCount-01218
  `viewportCount` **must** be less than or equal to `VkPhysicalDeviceLimits`::`maxViewports`
- VUID-VkPipelineViewportStateCreateInfo-scissorCount-01219
  `scissorCount` **must** be less than or equal to `VkPhysicalDeviceLimits`::`maxViewports`
- VUID-VkPipelineViewportStateCreateInfo-x-02821
  The `x` and `y` members of `offset` member of any element of `pScissors` **must** be greater than or equal to `0`
- VUID-VkPipelineViewportStateCreateInfo-offset-02822
  Evaluation of (`offset.x` + `extent.width`) **must** not cause a signed integer addition overflow for any element of `pScissors`
- VUID-VkPipelineViewportStateCreateInfo-offset-02823
  Evaluation of (`offset.y` + `extent.height`) **must** not cause a signed integer addition overflow for any element of `pScissors`
- VUID-VkPipelineViewportStateCreateInfo-scissorCount-04134
  If `scissorCount` and `viewportCount` are both not dynamic, then `scissorCount` and `viewportCount` **must** be identical
- VUID-VkPipelineViewportStateCreateInfo-viewportCount-04135
  If the graphics pipeline is being created with `VK_DYNAMIC_STATE_VIEWPORT_WITH_COUNT` set then `viewportCount` **must** be `0`, otherwise `viewportCount` **must** be greater than `0`
- VUID-VkPipelineViewportStateCreateInfo-scissorCount-04136
  If the graphics pipeline is being created with `VK_DYNAMIC_STATE_SCISSOR_WITH_COUNT` set then `scissorCount` **must** be `0`, otherwise `scissorCount` **must** be greater than `0`

Valid Usage (Implicit)

- VUID-VkPipelineViewportStateCreateInfo-sType-sType
  `sType` **must** be `VK_STRUCTURE_TYPE_PIPELINE_VIEWPORT_STATE_CREATE_INFO`
- VUID-VkPipelineViewportStateCreateInfo-pNext-pNext
  `pNext` **must** be `NULL`
- VUID-VkPipelineViewportStateCreateInfo-flags-zerobitmask
  `flags` **must** be `0`

To dynamically set the viewport count and viewports, call:

```
// Provided by VK_VERSION_1_3
void vkCmdSetViewportWithCount(
    VkCommandBuffer                             commandBuffer,
    uint32_t                                    viewportCount,
    const VkViewport*                           pViewports);
```

- `commandBuffer` is the command buffer into which the command will be recorded.
- `viewportCount` specifies the viewport count.
- `pViewports` specifies the viewports to use for drawing.

This command sets the viewport count and viewports state for subsequent drawing commands when the graphics pipeline is created with `VK_DYNAMIC_STATE_VIEWPORT_WITH_COUNT` set in VkPipelineDynamicStateCreateInfo::`pDynamicStates`. Otherwise, this state is specified by the corresponding VkPipelineViewportStateCreateInfo::`viewportCount` and `pViewports` values used to create the currently active pipeline.

Valid Usage

- VUID-vkCmdSetViewportWithCount-None-08971
  At least one of the following **must** be true:
  - the value of VkApplicationInfo::`apiVersion` used to create the VkInstance parent of `commandBuffer` is greater than or equal to Version 1.3
- VUID-vkCmdSetViewportWithCount-viewportCount-03394
  `viewportCount` **must** be between `1` and `VkPhysicalDeviceLimits`::`maxViewports`, inclusive
- VUID-vkCmdSetViewportWithCount-viewportCount-03395
  If the `multiViewport` feature is not enabled, `viewportCount` **must** be `1`

Valid Usage (Implicit)

- VUID-vkCmdSetViewportWithCount-commandBuffer-parameter
  `commandBuffer` **must** be a valid VkCommandBuffer handle
- VUID-vkCmdSetViewportWithCount-pViewports-parameter
  `pViewports` **must** be a valid pointer to an array of `viewportCount` valid VkViewport structures
- VUID-vkCmdSetViewportWithCount-commandBuffer-recording
  `commandBuffer` **must** be in the recording state
- VUID-vkCmdSetViewportWithCount-commandBuffer-cmdpool
  The `VkCommandPool` that `commandBuffer` was allocated from **must** support graphics operations
- VUID-vkCmdSetViewportWithCount-viewportCount-arraylength
  `viewportCount` **must** be greater than `0`

Host Synchronization

- Host access to `commandBuffer` **must** be externally synchronized
- Host access to the `VkCommandPool` that `commandBuffer` was allocated from **must** be externally synchronized

Command Properties

Command Buffer Levels	Render Pass Scope	Supported Queue Types	Command Type
Primary Secondary	Both	Graphics	State

To dynamically set the scissor count and scissor rectangular bounds, call:

```
// Provided by VK_VERSION_1_3
void vkCmdSetScissorWithCount(
    VkCommandBuffer                             commandBuffer,
    uint32_t                                    scissorCount,
    const VkRect2D*                             pScissors);
```

- `commandBuffer` is the command buffer into which the command will be recorded.
- `scissorCount` specifies the scissor count.
- `pScissors` specifies the scissors to use for drawing.

This command sets the scissor count and scissor rectangular bounds state for subsequent drawing commands when the graphics pipeline is created with `VK_DYNAMIC_STATE_SCISSOR_WITH_COUNT` set in VkPipelineDynamicStateCreateInfo::`pDynamicStates`. Otherwise, this state is specified by the corresponding VkPipelineViewportStateCreateInfo::`scissorCount` and `pScissors` values used to create the currently active pipeline.

Valid Usage

- VUID-vkCmdSetScissorWithCount-None-08971
  At least one of the following **must** be true:
  - the value of VkApplicationInfo::`apiVersion` used to create the VkInstance parent of `commandBuffer` is greater than or equal to Version 1.3
- VUID-vkCmdSetScissorWithCount-scissorCount-03397
  `scissorCount` **must** be between `1` and `VkPhysicalDeviceLimits`::`maxViewports`, inclusive
- VUID-vkCmdSetScissorWithCount-scissorCount-03398
  If the `multiViewport` feature is not enabled, `scissorCount` **must** be `1`

- VUID-vkCmdSetScissorWithCount-x-03399
  The `x` and `y` members of `offset` member of any element of `pScissors` **must** be greater than or equal to `0`
- VUID-vkCmdSetScissorWithCount-offset-03400
  Evaluation of (`offset.x` + `extent.width`) **must** not cause a signed integer addition overflow for any element of `pScissors`
- VUID-vkCmdSetScissorWithCount-offset-03401
  Evaluation of (`offset.y` + `extent.height`) **must** not cause a signed integer addition overflow for any element of `pScissors`

Valid Usage (Implicit)

- VUID-vkCmdSetScissorWithCount-commandBuffer-parameter
  `commandBuffer` **must** be a valid VkCommandBuffer handle
- VUID-vkCmdSetScissorWithCount-pScissors-parameter
  `pScissors` **must** be a valid pointer to an array of `scissorCount` VkRect2D structures
- VUID-vkCmdSetScissorWithCount-commandBuffer-recording
  `commandBuffer` **must** be in the recording state
- VUID-vkCmdSetScissorWithCount-commandBuffer-cmdpool
  The `VkCommandPool` that `commandBuffer` was allocated from **must** support graphics operations
- VUID-vkCmdSetScissorWithCount-scissorCount-arraylength
  `scissorCount` **must** be greater than `0`

Host Synchronization

- Host access to `commandBuffer` **must** be externally synchronized
- Host access to the `VkCommandPool` that `commandBuffer` was allocated from **must** be externally synchronized

Command Properties

Command Buffer Levels	Render Pass Scope	Supported Queue Types	Command Type
Primary Secondary	Both	Graphics	State

```
// Provided by VK_VERSION_1_0
typedef VkFlags VkPipelineViewportStateCreateFlags;
```

VkPipelineViewportStateCreateFlags is a bitmask type for setting a mask, but is currently reserved for future use.

A *pre-rasterization shader stage* **can** direct each primitive to one of several viewports. The destination viewport for a primitive is selected by the last active pre-rasterization shader stage that has an output variable decorated with ViewportIndex. The viewport transform uses the viewport corresponding to the value assigned to ViewportIndex, and taken from an implementation-dependent vertex of each primitive. If ViewportIndex is outside the range zero to viewportCount minus one for a primitive, or if the last active pre-rasterization shader stage did not assign a value to ViewportIndex for all vertices of a primitive due to flow control, the values resulting from the viewport transformation of the vertices of such primitives are undefined. If the last pre-rasterization shader stage does not have an output decorated with ViewportIndex, the viewport numbered zero is used by the viewport transformation.

A single vertex **can** be used in more than one individual primitive, in primitives such as VK_PRIMITIVE_TOPOLOGY_TRIANGLE_STRIP. In this case, the viewport transformation is applied separately for each primitive.

To dynamically set the viewport transformation parameters, call:

```
// Provided by VK_VERSION_1_0
void vkCmdSetViewport(
    VkCommandBuffer                             commandBuffer,
    uint32_t                                    firstViewport,
    uint32_t                                    viewportCount,
    const VkViewport*                           pViewports);
```

- commandBuffer is the command buffer into which the command will be recorded.
- firstViewport is the index of the first viewport whose parameters are updated by the command.
- viewportCount is the number of viewports whose parameters are updated by the command.
- pViewports is a pointer to an array of VkViewport structures specifying viewport parameters.

This command sets the viewport transformation parameters state for subsequent drawing commands when the graphics pipeline is created with VK_DYNAMIC_STATE_VIEWPORT set in VkPipelineDynamicStateCreateInfo::pDynamicStates. Otherwise, this state is specified by the VkPipelineViewportStateCreateInfo::pViewports values used to create the currently active pipeline.

The viewport parameters taken from element i of pViewports replace the current state for the viewport index firstViewport + i, for i in [0, viewportCount).

Valid Usage

- VUID-vkCmdSetViewport-firstViewport-01223
  The sum of firstViewport and viewportCount **must** be between 1 and VkPhysicalDeviceLimits::maxViewports, inclusive
- VUID-vkCmdSetViewport-firstViewport-01224

If the `multiViewport` feature is not enabled, `firstViewport` **must** be `0`

- VUID-vkCmdSetViewport-viewportCount-01225
  If the `multiViewport` feature is not enabled, `viewportCount` **must** be `1`

Valid Usage (Implicit)

- VUID-vkCmdSetViewport-commandBuffer-parameter
  `commandBuffer` **must** be a valid VkCommandBuffer handle
- VUID-vkCmdSetViewport-pViewports-parameter
  `pViewports` **must** be a valid pointer to an array of `viewportCount` valid VkViewport structures
- VUID-vkCmdSetViewport-commandBuffer-recording
  `commandBuffer` **must** be in the recording state
- VUID-vkCmdSetViewport-commandBuffer-cmdpool
  The `VkCommandPool` that `commandBuffer` was allocated from **must** support graphics operations
- VUID-vkCmdSetViewport-viewportCount-arraylength
  `viewportCount` **must** be greater than `0`

Host Synchronization

- Host access to `commandBuffer` **must** be externally synchronized
- Host access to the `VkCommandPool` that `commandBuffer` was allocated from **must** be externally synchronized

Command Properties

Command Buffer Levels	Render Pass Scope	Supported Queue Types	Command Type
Primary Secondary	Both	Graphics	State

Both VkPipelineViewportStateCreateInfo and vkCmdSetViewport use `VkViewport` to set the viewport transformation parameters.

The `VkViewport` structure is defined as:

```
// Provided by VK_VERSION_1_0
typedef struct VkViewport {
    float    x;
    float    y;
    float    width;
    float    height;
    float    minDepth;
    float    maxDepth;
} VkViewport;
```

- `x` and `y` are the viewport's upper left corner (x,y).
- `width` and `height` are the viewport's width and height, respectively.
- `minDepth` and `maxDepth` are the depth range for the viewport.

NOTE	Despite their names, `minDepth` **can** be less than, equal to, or greater than `maxDepth`.

The framebuffer depth coordinate z_f **may** be represented using either a fixed-point or floating-point representation. However, a floating-point representation **must** be used if the depth/stencil attachment has a floating-point depth component. If an m-bit fixed-point representation is used, we assume that it represents each value $\frac{k}{2^m - 1}$, where k ∈ { 0, 1, ..., 2^m-1 }, as k (e.g. 1.0 is represented in binary as a string of all ones).

The viewport parameters shown in the above equations are found from these values as

o_x = `x` + `width` / 2

o_y = `y` + `height` / 2

o_z = `minDepth`

p_x = `width`

p_y = `height`

p_z = `maxDepth` - `minDepth`

The application **can** specify a negative term for `height`, which has the effect of negating the y coordinate in clip space before performing the transform. When using a negative `height`, the application **should** also adjust the `y` value to point to the lower left corner of the viewport instead of the upper left corner. Using the negative `height` allows the application to avoid having to negate the y component of the `Position` output from the last pre-rasterization shader stage.

The width and height of the implementation-dependent maximum viewport dimensions **must** be greater than or equal to the width and height of the largest image which **can** be created and attached to a framebuffer.

The floating-point viewport bounds are represented with an implementation-dependent precision.

Valid Usage

- VUID-VkViewport-width-01770
  `width` **must** be greater than `0.0`
- VUID-VkViewport-width-01771
  `width` **must** be less than or equal to `VkPhysicalDeviceLimits`::`maxViewportDimensions`[0]
- VUID-VkViewport-apiVersion-07917
  If the `VK_KHR_maintenance1` extension is not enabled, the `VK_AMD_negative_viewport_height` extension is not enabled, and VkPhysicalDeviceProperties::`apiVersion` is less than Vulkan 1.1, `height` **must** be greater than `0.0`
- VUID-VkViewport-height-01773
  The absolute value of `height` **must** be less than or equal to `VkPhysicalDeviceLimits`::`maxViewportDimensions`[1]
- VUID-VkViewport-x-01774
  `x` **must** be greater than or equal to `viewportBoundsRange`[0]
- VUID-VkViewport-x-01232
  (`x` + `width`) **must** be less than or equal to `viewportBoundsRange`[1]
- VUID-VkViewport-y-01775
  `y` **must** be greater than or equal to `viewportBoundsRange`[0]
- VUID-VkViewport-y-01776
  `y` **must** be less than or equal to `viewportBoundsRange`[1]
- VUID-VkViewport-y-01777
  (`y` + `height`) **must** be greater than or equal to `viewportBoundsRange`[0]
- VUID-VkViewport-y-01233
  (`y` + `height`) **must** be less than or equal to `viewportBoundsRange`[1]
- VUID-VkViewport-minDepth-01234
  `minDepth` **must** be between `0.0` and `1.0`, inclusive
- VUID-VkViewport-maxDepth-01235
  `maxDepth` **must** be between `0.0` and `1.0`, inclusive

Chapter 25. Rasterization

Rasterization is the process by which a primitive is converted to a two-dimensional image. Each discrete location of this image contains associated data such as depth, color, or other attributes.

Rasterizing a primitive begins by determining which squares of an integer grid in framebuffer coordinates are occupied by the primitive, and assigning one or more depth values to each such square. This process is described below for points, lines, and polygons.

A grid square, including its (x,y) framebuffer coordinates, z (depth), and associated data added by fragment shaders, is called a fragment. A fragment is located by its upper left corner, which lies on integer grid coordinates.

Rasterization operations also refer to a fragment's sample locations, which are offset by fractional values from its upper left corner. The rasterization rules for points, lines, and triangles involve testing whether each sample location is inside the primitive. Fragments need not actually be square, and rasterization rules are not affected by the aspect ratio of fragments. Display of non-square grids, however, will cause rasterized points and line segments to appear fatter in one direction than the other.

We assume that fragments are square, since it simplifies antialiasing and texturing. After rasterization, fragments are processed by fragment operations.

Several factors affect rasterization, including the members of VkPipelineRasterizationStateCreateInfo and VkPipelineMultisampleStateCreateInfo.

The `VkPipelineRasterizationStateCreateInfo` structure is defined as:

```
// Provided by VK_VERSION_1_0
typedef struct VkPipelineRasterizationStateCreateInfo {
    VkStructureType                            sType;
    const void*                                pNext;
    VkPipelineRasterizationStateCreateFlags    flags;
    VkBool32                                   depthClampEnable;
    VkBool32                                   rasterizerDiscardEnable;
    VkPolygonMode                              polygonMode;
    VkCullModeFlags                            cullMode;
    VkFrontFace                                frontFace;
    VkBool32                                   depthBiasEnable;
    float                                      depthBiasConstantFactor;
    float                                      depthBiasClamp;
    float                                      depthBiasSlopeFactor;
    float                                      lineWidth;
} VkPipelineRasterizationStateCreateInfo;
```

- `sType` is a VkStructureType value identifying this structure.
- `pNext` is `NULL` or a pointer to a structure extending this structure.
- `flags` is reserved for future use.

- `depthClampEnable` controls whether to clamp the fragment's depth values as described in Depth Test. Enabling depth clamp will also disable clipping primitives to the z planes of the frustum as described in Primitive Clipping.
- `rasterizerDiscardEnable` controls whether primitives are discarded immediately before the rasterization stage.
- `polygonMode` is the triangle rendering mode. See VkPolygonMode.
- `cullMode` is the triangle facing direction used for primitive culling. See VkCullModeFlagBits.
- `frontFace` is a VkFrontFace value specifying the front-facing triangle orientation to be used for culling.
- `depthBiasEnable` controls whether to bias fragment depth values.
- `depthBiasConstantFactor` is a scalar factor controlling the constant depth value added to each fragment.
- `depthBiasClamp` is the maximum (or minimum) depth bias of a fragment.
- `depthBiasSlopeFactor` is a scalar factor applied to a fragment's slope in depth bias calculations.
- `lineWidth` is the width of rasterized line segments.

Valid Usage

- VUID-VkPipelineRasterizationStateCreateInfo-depthClampEnable-00782
  If the `depthClamp` feature is not enabled, `depthClampEnable` **must** be `VK_FALSE`
- VUID-VkPipelineRasterizationStateCreateInfo-polygonMode-01507
  If the `fillModeNonSolid` feature is not enabled, `polygonMode` **must** be `VK_POLYGON_MODE_FILL`

Valid Usage (Implicit)

- VUID-VkPipelineRasterizationStateCreateInfo-sType-sType
  `sType` **must** be `VK_STRUCTURE_TYPE_PIPELINE_RASTERIZATION_STATE_CREATE_INFO`
- VUID-VkPipelineRasterizationStateCreateInfo-pNext-pNext
  `pNext` **must** be `NULL`
- VUID-VkPipelineRasterizationStateCreateInfo-flags-zerobitmask
  `flags` **must** be `0`
- VUID-VkPipelineRasterizationStateCreateInfo-polygonMode-parameter
  `polygonMode` **must** be a valid VkPolygonMode value
- VUID-VkPipelineRasterizationStateCreateInfo-cullMode-parameter
  `cullMode` **must** be a valid combination of VkCullModeFlagBits values
- VUID-VkPipelineRasterizationStateCreateInfo-frontFace-parameter
  `frontFace` **must** be a valid VkFrontFace value

```
// Provided by VK_VERSION_1_0
typedef VkFlags VkPipelineRasterizationStateCreateFlags;
```

VkPipelineRasterizationStateCreateFlags is a bitmask type for setting a mask, but is currently reserved for future use.

The VkPipelineMultisampleStateCreateInfo structure is defined as:

```
// Provided by VK_VERSION_1_0
typedef struct VkPipelineMultisampleStateCreateInfo {
    VkStructureType                         sType;
    const void*                             pNext;
    VkPipelineMultisampleStateCreateFlags   flags;
    VkSampleCountFlagBits                   rasterizationSamples;
    VkBool32                                sampleShadingEnable;
    float                                   minSampleShading;
    const VkSampleMask*                     pSampleMask;
    VkBool32                                alphaToCoverageEnable;
    VkBool32                                alphaToOneEnable;
} VkPipelineMultisampleStateCreateInfo;
```

- sType is a VkStructureType value identifying this structure.
- pNext is NULL or a pointer to a structure extending this structure.
- flags is reserved for future use.
- rasterizationSamples is a VkSampleCountFlagBits value specifying the number of samples used in rasterization.
- sampleShadingEnable **can** be used to enable Sample Shading.
- minSampleShading specifies a minimum fraction of sample shading if sampleShadingEnable is VK_TRUE.
- pSampleMask is a pointer to an array of VkSampleMask values used in the sample mask test.
- alphaToCoverageEnable controls whether a temporary coverage value is generated based on the alpha component of the fragment's first color output as specified in the Multisample Coverage section.
- alphaToOneEnable controls whether the alpha component of the fragment's first color output is replaced with one as described in Multisample Coverage.

Each bit in the sample mask is associated with a unique sample index as defined for the coverage mask. Each bit b for mask word w in the sample mask corresponds to sample index i, where $i = 32 \times w + b$. pSampleMask has a length equal to $\lceil$ rasterizationSamples / 32 $\rceil$ words.

If pSampleMask is NULL, it is treated as if the mask has all bits set to 1.

Valid Usage

- VUID-VkPipelineMultisampleStateCreateInfo-sampleShadingEnable-00784
  If the `sampleRateShading` feature is not enabled, `sampleShadingEnable` **must** be `VK_FALSE`
- VUID-VkPipelineMultisampleStateCreateInfo-alphaToOneEnable-00785
  If the `alphaToOne` feature is not enabled, `alphaToOneEnable` **must** be `VK_FALSE`
- VUID-VkPipelineMultisampleStateCreateInfo-minSampleShading-00786
  `minSampleShading` **must** be in the range [0,1]

Valid Usage (Implicit)

- VUID-VkPipelineMultisampleStateCreateInfo-sType-sType
  `sType` **must** be `VK_STRUCTURE_TYPE_PIPELINE_MULTISAMPLE_STATE_CREATE_INFO`
- VUID-VkPipelineMultisampleStateCreateInfo-pNext-pNext
  `pNext` **must** be `NULL`
- VUID-VkPipelineMultisampleStateCreateInfo-flags-zerobitmask
  `flags` **must** be `0`
- VUID-VkPipelineMultisampleStateCreateInfo-rasterizationSamples-parameter
  `rasterizationSamples` **must** be a valid VkSampleCountFlagBits value
- VUID-VkPipelineMultisampleStateCreateInfo-pSampleMask-parameter
  If `pSampleMask` is not `NULL`, `pSampleMask` **must** be a valid pointer to an array of $\lceil \frac{rasterizationSamples}{32} \rceil$ VkSampleMask values

```
// Provided by VK_VERSION_1_0
typedef VkFlags VkPipelineMultisampleStateCreateFlags;
```

`VkPipelineMultisampleStateCreateFlags` is a bitmask type for setting a mask, but is currently reserved for future use.

The elements of the sample mask array are of type VkSampleMask, each representing 32 bits of coverage information:

```
// Provided by VK_VERSION_1_0
typedef uint32_t VkSampleMask;
```

Rasterization only generates fragments which cover one or more pixels inside the framebuffer. Pixels outside the framebuffer are never considered covered in the fragment. Fragments which would be produced by application of any of the primitive rasterization rules described below but which lie outside the framebuffer are not produced, nor are they processed by any later stage of the pipeline, including any of the fragment operations.

Surviving fragments are processed by fragment shaders. Fragment shaders determine associated

data for fragments, and **can** also modify or replace their assigned depth values.

25.1. Discarding Primitives Before Rasterization

Primitives are discarded before rasterization if the `rasterizerDiscardEnable` member of VkPipelineRasterizationStateCreateInfo is enabled. When enabled, primitives are discarded after they are processed by the last active shader stage in the pipeline before rasterization.

To dynamically enable whether primitives are discarded before the rasterization stage, call:

```
// Provided by VK_VERSION_1_3
void vkCmdSetRasterizerDiscardEnable(
    VkCommandBuffer                             commandBuffer,
    VkBool32                                    rasterizerDiscardEnable);
```

- `commandBuffer` is the command buffer into which the command will be recorded.
- `rasterizerDiscardEnable` controls whether primitives are discarded immediately before the rasterization stage.

This command sets the discard enable for subsequent drawing commands when the graphics pipeline is created with `VK_DYNAMIC_STATE_RASTERIZER_DISCARD_ENABLE` set in VkPipelineDynamicStateCreateInfo::`pDynamicStates`. Otherwise, this state is specified by the VkPipelineRasterizationStateCreateInfo::`rasterizerDiscardEnable` value used to create the currently active pipeline.

Valid Usage

- VUID-vkCmdSetRasterizerDiscardEnable-None-08970
  At least one of the following **must** be true:
  - the value of VkApplicationInfo::`apiVersion` used to create the VkInstance parent of `commandBuffer` is greater than or equal to Version 1.3

Valid Usage (Implicit)

- VUID-vkCmdSetRasterizerDiscardEnable-commandBuffer-parameter
  `commandBuffer` **must** be a valid VkCommandBuffer handle
- VUID-vkCmdSetRasterizerDiscardEnable-commandBuffer-recording
  `commandBuffer` **must** be in the recording state
- VUID-vkCmdSetRasterizerDiscardEnable-commandBuffer-cmdpool
  The `VkCommandPool` that `commandBuffer` was allocated from **must** support graphics operations

Host Synchronization

- Host access to `commandBuffer` **must** be externally synchronized
- Host access to the `VkCommandPool` that `commandBuffer` was allocated from **must** be externally synchronized

Command Properties

Command Buffer Levels	Render Pass Scope	Supported Queue Types	Command Type
Primary Secondary	Both	Graphics	State

25.2. Rasterization Order

Within a subpass of a render pass instance, for a given (x,y,layer,sample) sample location, the following operations are guaranteed to execute in *rasterization order*, for each separate primitive that includes that sample location:

1. Fragment operations, in the order defined
2. Blending, logic operations, and color writes

Execution of these operations for each primitive in a subpass occurs in primitive order.

25.3. Multisampling

Multisampling is a mechanism to antialias all Vulkan primitives: points, lines, and polygons. The technique is to sample all primitives multiple times at each pixel. Each sample in each framebuffer attachment has storage for a color, depth, and/or stencil value, such that per-fragment operations apply to each sample independently. The color sample values **can** be later *resolved* to a single color (see Resolving Multisample Images and the Render Pass chapter for more details on how to resolve multisample images to non-multisample images).

Vulkan defines rasterization rules for single-sample modes in a way that is equivalent to a multisample mode with a single sample in the center of each fragment.

Each fragment includes a coverage mask with a single bit for each sample in the fragment, and a number of depth values and associated data for each sample.

It is understood that each pixel has `rasterizationSamples` locations associated with it. These locations are exact positions, rather than regions or areas, and each is referred to as a sample point. The sample points associated with a pixel **must** be located inside or on the boundary of the unit square that is considered to bound the pixel. Furthermore, the relative locations of sample points **may** be identical for each pixel in the framebuffer, or they **may** differ.

If the current pipeline includes a fragment shader with one or more variables in its interface decorated with `Sample` and `Input`, the data associated with those variables will be assigned independently for each sample. The values for each sample **must** be evaluated at the location of the sample. The data associated with any other variables not decorated with `Sample` and `Input` need not be evaluated independently for each sample.

A *coverage mask* is generated for each fragment, based on which samples within that fragment are determined to be within the area of the primitive that generated the fragment.

Single pixel fragments have one set of samples. Each set of samples has a number of samples determined by VkPipelineMultisampleStateCreateInfo::`rasterizationSamples`. Each sample in a set is assigned a unique *sample index* i in the range [0, `rasterizationSamples`).

Each sample in a fragment is also assigned a unique *coverage index* j in the range [0, n × `rasterizationSamples`), where n is the number of sets in the fragment. If the fragment contains a single set of samples, the *coverage index* is always equal to the *sample index*.

The coverage mask includes B bits packed into W words, defined as:

$$B = n \times \texttt{rasterizationSamples}$$

$$W = \lceil B/32 \rceil$$

Bit b in coverage mask word w is `1` if the sample with coverage index j = 32×w + b is covered, and `0` otherwise.

If the `standardSampleLocations` member of VkPhysicalDeviceLimits is `VK_TRUE`, then the sample counts `VK_SAMPLE_COUNT_1_BIT`, `VK_SAMPLE_COUNT_2_BIT`, `VK_SAMPLE_COUNT_4_BIT`, `VK_SAMPLE_COUNT_8_BIT`, and `VK_SAMPLE_COUNT_16_BIT` have sample locations as listed in the following table, with the ith entry in the table corresponding to sample index i. `VK_SAMPLE_COUNT_32_BIT` and `VK_SAMPLE_COUNT_64_BIT` do not have standard sample locations. Locations are defined relative to an origin in the upper left corner of the fragment.

Table 24. Standard Sample Locations

Sample count	Sample Locations	
VK_SAMPLE_COUNT_1_BIT	(0.5,0.5)	
VK_SAMPLE_COUNT_2_BIT	(0.75,0.75) (0.25,0.25)	
VK_SAMPLE_COUNT_4_BIT	(0.375, 0.125) (0.875, 0.375) (0.125, 0.625) (0.625, 0.875)	
VK_SAMPLE_COUNT_8_BIT	(0.5625, 0.3125) (0.4375, 0.6875) (0.8125, 0.5625) (0.3125, 0.1875) (0.1875, 0.8125) (0.0625, 0.4375) (0.6875, 0.9375) (0.9375, 0.0625)	
VK_SAMPLE_COUNT_16_BIT	(0.5625, 0.5625) (0.4375, 0.3125) (0.3125, 0.625) (0.75, 0.4375) (0.1875, 0.375) (0.625, 0.8125) (0.8125, 0.6875) (0.6875, 0.1875) (0.375, 0.875) (0.5, 0.0625) (0.25, 0.125) (0.125, 0.75) (0.0, 0.5) (0.9375, 0.25) (0.875, 0.9375) (0.0625, 0.0)	

25.4. Sample Shading

Sample shading **can** be used to specify a minimum number of unique samples to process for each fragment. If sample shading is enabled, an implementation **must** invoke the fragment shader at least max(⌈ VkPipelineMultisampleStateCreateInfo::minSampleShading × VkPipelineMultisampleStateCreateInfo::rasterizationSamples ⌉, 1) times per fragment. If VkPipelineMultisampleStateCreateInfo::sampleShadingEnable is VK_TRUE, sample shading is enabled.

If a fragment shader entry point statically uses an input variable decorated with a BuiltIn of SampleId or SamplePosition, sample shading is enabled and a value of 1.0 is used instead of minSampleShading. If a fragment shader entry point statically uses an input variable decorated with Sample, sample shading **may** be enabled and a value of 1.0 will be used instead of minSampleShading if it is.

NOTE

If a shader decorates an input variable with Sample and that value meaningfully impacts the output of a shader, sample shading will be enabled to ensure that the input is in fact interpolated per-sample. This is inherent to the specification and not spelled out here - if an application simply declares such a variable it is implementation-defined whether sample shading is enabled or not. It is possible to see the effects of this by using atomics in the shader or using a pipeline statistics query to query the number of fragment invocations, even if the shader itself does not use any per-sample variables.

If there are fewer fragment invocations than covered samples, implementations **may** include those samples in fragment shader invocations in any manner as long as covered samples are all shaded at least once, and each invocation that is not a helper invocation covers at least one sample.

25.5. Points

A point is drawn by generating a set of fragments in the shape of a square centered around the vertex of the point. Each vertex has an associated point size controlling the width/height of that square. The point size is taken from the (potentially clipped) shader built-in PointSize written by:

- the geometry shader, if active;
- the tessellation evaluation shader, if active and no geometry shader is active;
- the vertex shader, otherwise

and clamped to the implementation-dependent point size range [pointSizeRange[0], pointSizeRange[1]]. The value written to PointSize **must** be greater than zero.

Not all point sizes need be supported, but the size 1.0 **must** be supported. The range of supported sizes and the size of evenly-spaced gradations within that range are implementation-dependent. The range and gradations are obtained from the pointSizeRange and pointSizeGranularity members of VkPhysicalDeviceLimits. If, for instance, the size range is from 0.1 to 2.0 and the gradation size is 0.1, then the sizes 0.1, 0.2, ..., 1.9, 2.0 are supported. Additional point sizes **may** also be supported. There is no requirement that these sizes be equally spaced. If an unsupported size is requested, the nearest supported size is used instead.

25.5.1. Basic Point Rasterization

Point rasterization produces a fragment for each fragment area group of framebuffer pixels with one or more sample points that intersect a region centered at the point's (x_f,y_f). This region is a square with side equal to the current point size. Coverage bits that correspond to sample points that intersect the region are 1, other coverage bits are 0. All fragments produced in rasterizing a point are assigned the same associated data, which are those of the vertex corresponding to the point. However, the fragment shader built-in `PointCoord` contains point sprite texture coordinates. The s and t point sprite texture coordinates vary from zero to one across the point horizontally left-to-right and vertically top-to-bottom, respectively. The following formulas are used to evaluate s and t:

$$s = \frac{1}{2} + \frac{(x_p - x_f)}{\text{size}}$$

$$t = \frac{1}{2} + \frac{(y_p - y_f)}{\text{size}}$$

where size is the point's size; (x_p,y_p) is the location at which the point sprite coordinates are evaluated - this **may** be the framebuffer coordinates of the fragment center, or the location of a sample; and (x_f,y_f) is the exact, unrounded framebuffer coordinate of the vertex for the point.

25.6. Line Segments

To dynamically set the line width, call:

```
// Provided by VK_VERSION_1_0
void vkCmdSetLineWidth(
    VkCommandBuffer                             commandBuffer,
    float                                       lineWidth);
```

- `commandBuffer` is the command buffer into which the command will be recorded.
- `lineWidth` is the width of rasterized line segments.

This command sets the line width for subsequent drawing commands when the graphics pipeline is created with `VK_DYNAMIC_STATE_LINE_WIDTH` set in VkPipelineDynamicStateCreateInfo::`pDynamicStates`. Otherwise, this state is specified by the VkPipelineRasterizationStateCreateInfo::`lineWidth` value used to create the currently active pipeline.

Valid Usage

- VUID-vkCmdSetLineWidth-lineWidth-00788
  If the `wideLines` feature is not enabled, `lineWidth` **must** be `1.0`

Valid Usage (Implicit)

- VUID-vkCmdSetLineWidth-commandBuffer-parameter

`commandBuffer` **must** be a valid VkCommandBuffer handle

- VUID-vkCmdSetLineWidth-commandBuffer-recording
  `commandBuffer` **must** be in the recording state
- VUID-vkCmdSetLineWidth-commandBuffer-cmdpool
  The `VkCommandPool` that `commandBuffer` was allocated from **must** support graphics operations

Host Synchronization

- Host access to `commandBuffer` **must** be externally synchronized
- Host access to the `VkCommandPool` that `commandBuffer` was allocated from **must** be externally synchronized

Command Properties

Command Buffer Levels	Render Pass Scope	Supported Queue Types	Command Type
Primary Secondary	Both	Graphics	State

Not all line widths need be supported for line segment rasterization, but width 1.0 antialiased segments **must** be provided. The range and gradations are obtained from the `lineWidthRange` and `lineWidthGranularity` members of VkPhysicalDeviceLimits. If, for instance, the size range is from 0.1 to 2.0 and the gradation size is 0.1, then the sizes 0.1, 0.2, ..., 1.9, 2.0 are supported. Additional line widths **may** also be supported. There is no requirement that these widths be equally spaced. If an unsupported width is requested, the nearest supported width is used instead.

25.6.1. Basic Line Segment Rasterization

Rasterized line segments produce fragments which intersect a rectangle centered on the line segment. Two of the edges are parallel to the specified line segment; each is at a distance of one-half the current width from that segment in directions perpendicular to the direction of the line. The other two edges pass through the line endpoints and are perpendicular to the direction of the specified line segment. Coverage bits that correspond to sample points that intersect the rectangle are 1, other coverage bits are 0.

Next we specify how the data associated with each rasterized fragment are obtained. Let $\mathbf{p}_r = (x_d, y_d)$ be the framebuffer coordinates at which associated data are evaluated. This **may** be the center of a fragment or the location of a sample within the fragment. When `rasterizationSamples` is `VK_SAMPLE_COUNT_1_BIT`, the fragment center **must** be used. Let $\mathbf{p}_a = (x_a, y_a)$ and $\mathbf{p}_b = (x_b, y_b)$ be initial and final endpoints of the line segment, respectively. Set

$$t = \frac{(\mathbf{p}_r - \mathbf{p}_a) \cdot (\mathbf{p}_b - \mathbf{p}_a)}{\| \mathbf{p}_b - \mathbf{p}_a \|^2}$$

(Note that t = 0 at $\mathbf{p}_a$ and t = 1 at $\mathbf{p}_b$. Also note that this calculation projects the vector from $\mathbf{p}_a$ to $\mathbf{p}_r$ onto the line, and thus computes the normalized distance of the fragment along the line.)

If `strictLines` is `VK_TRUE`, line segments are rasterized using perspective or linear interpolation.

Perspective interpolation for a line segment interpolates two values in a manner that is correct when taking the perspective of the viewport into consideration, by way of the line segment's clip coordinates. An interpolated value f can be determined by

$$f = \frac{(1-t) f_a / w_a + t f_b / w_b}{(1-t) / w_a + t / w_b}$$

where f_a and f_b are the data associated with the starting and ending endpoints of the segment, respectively; w_a and w_b are the clip w coordinates of the starting and ending endpoints of the segment, respectively.

Linear interpolation for a line segment directly interpolates two values, and an interpolated value f can be determined by

$$f = (1 - t) f_a + t f_b$$

where f_a and f_b are the data associated with the starting and ending endpoints of the segment, respectively.

The clip coordinate w for a sample is determined using perspective interpolation. The depth value z for a sample is determined using linear interpolation. Interpolation of fragment shader input values are determined by Interpolation decorations.

The above description documents the preferred method of line rasterization, and **must** be used when the implementation advertises the `strictLines` limit in VkPhysicalDeviceLimits as `VK_TRUE`.

When `strictLines` is `VK_FALSE`, the edges of the lines are generated as a parallelogram surrounding the original line. The major axis is chosen by noting the axis in which there is the greatest distance between the line start and end points. If the difference is equal in both directions then the X axis is chosen as the major axis. Edges 2 and 3 are aligned to the minor axis and are centered on the endpoints of the line as in Non strict lines, and each is `lineWidth` long. Edges 0 and 1 are parallel to the line and connect the endpoints of edges 2 and 3. Coverage bits that correspond to sample points that intersect the parallelogram are 1, other coverage bits are 0.

Samples that fall exactly on the edge of the parallelogram follow the polygon rasterization rules.

Interpolation occurs as if the parallelogram was decomposed into two triangles where each pair of vertices at each end of the line has identical attributes.

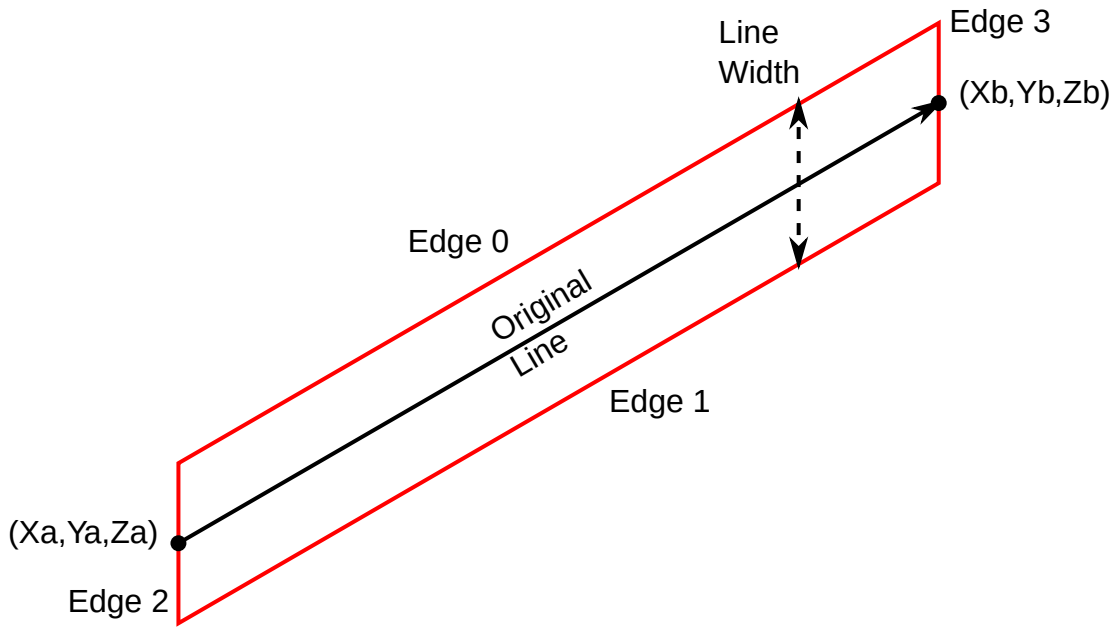

Figure 15. Non strict lines

Only when `strictLines` is `VK_FALSE` implementations **may** deviate from the non-strict line algorithm described above in the following ways:

- Implementations **may** instead interpolate each fragment according to the formula in Basic Line Segment Rasterization using the original line segment endpoints.
- Rasterization of non-antialiased non-strict line segments **may** be performed using the rules defined in Bresenham Line Segment Rasterization.

25.6.2. Bresenham Line Segment Rasterization

Non-strict lines **may** also follow these rasterization rules for non-antialiased lines.

Line segment rasterization begins by characterizing the segment as either *x-major* or *y-major*. x-major line segments have slope in the closed interval [-1,1]; all other line segments are y-major (slope is determined by the segment's endpoints). We specify rasterization only for x-major segments except in cases where the modifications for y-major segments are not self-evident.

Ideally, Vulkan uses a *diamond-exit* rule to determine those fragments that are produced by rasterizing a line segment. For each fragment f with center at framebuffer coordinates x_f and y_f, define a diamond-shaped region that is the intersection of four half planes:

$$R_f = \{(x, y) \,|\, |x - x_f| + |y - y_f| < \frac{1}{2}\}$$

Essentially, a line segment starting at p_a and ending at p_b produces those fragments f for which the segment intersects R_f, except if p_b is contained in R_f.

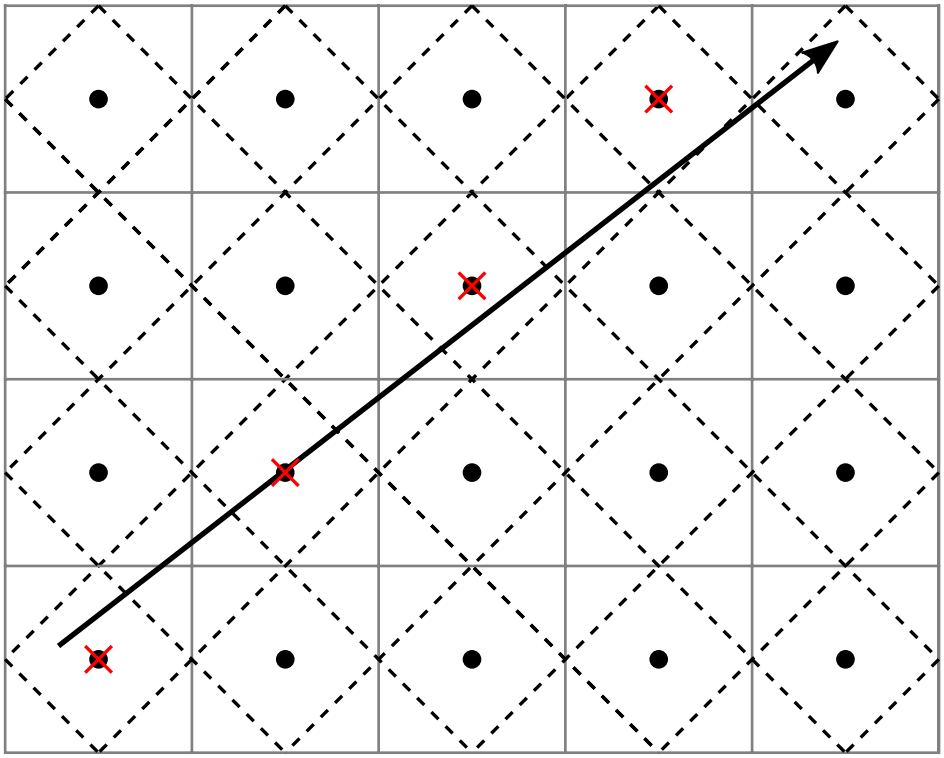

Figure 16. Visualization of Bresenham's algorithm

To avoid difficulties when an endpoint lies on a boundary of R_f we (in principle) perturb the supplied endpoints by a tiny amount. Let p_a and p_b have framebuffer coordinates (x_a, y_a) and (x_b, y_b), respectively. Obtain the perturbed endpoints p_a' given by $(x_a, y_a) - (\varepsilon, \varepsilon^2)$ and p_b' given by $(x_b, y_b) - (\varepsilon, \varepsilon^2)$. Rasterizing the line segment starting at p_a and ending at p_b produces those fragments f for which the segment starting at p_a' and ending on p_b' intersects R_f, except if p_b' is contained in R_f. ε is chosen to be so small that rasterizing the line segment produces the same fragments when δ is substituted for ε for any $0 < \delta \leq \varepsilon$.

When p_a and p_b lie on fragment centers, this characterization of fragments reduces to Bresenham's algorithm with one modification: lines produced in this description are "half-open", meaning that the final fragment (corresponding to p_b) is not drawn. This means that when rasterizing a series of connected line segments, shared endpoints will be produced only once rather than twice (as would occur with Bresenham's algorithm).

Implementations **may** use other line segment rasterization algorithms, subject to the following rules:

- The coordinates of a fragment produced by the algorithm **must** not deviate by more than one unit in either x or y framebuffer coordinates from a corresponding fragment produced by the diamond-exit rule.
- The total number of fragments produced by the algorithm **must** not differ from that produced by the diamond-exit rule by more than one.
- For an x-major line, two fragments that lie in the same framebuffer-coordinate column **must** not be produced (for a y-major line, two fragments that lie in the same framebuffer-coordinate row **must** not be produced).

- If two line segments share a common endpoint, and both segments are either x-major (both left-to-right or both right-to-left) or y-major (both bottom-to-top or both top-to-bottom), then rasterizing both segments **must** not produce duplicate fragments. Fragments also **must** not be omitted so as to interrupt continuity of the connected segments.

The actual width w of Bresenham lines is determined by rounding the line width to the nearest integer, clamping it to the implementation-dependent `lineWidthRange` (with both values rounded to the nearest integer), then clamping it to be no less than 1.

Bresenham line segments of width other than one are rasterized by offsetting them in the minor direction (for an x-major line, the minor direction is y, and for a y-major line, the minor direction is x) and producing a row or column of fragments in the minor direction. If the line segment has endpoints given by (x_0, y_0) and (x_1, y_1) in framebuffer coordinates, the segment with endpoints $(x_0, y_0 - \frac{w-1}{2})$ and $(x_1, y_1 - \frac{w-1}{2})$ is rasterized, but instead of a single fragment, a column of fragments of height w (a row of fragments of length w for a y-major segment) is produced at each x (y for y-major) location. The lowest fragment of this column is the fragment that would be produced by rasterizing the segment of width 1 with the modified coordinates.

The preferred method of attribute interpolation for a wide line is to generate the same attribute values for all fragments in the row or column described above, as if the adjusted line was used for interpolation and those values replicated to the other fragments, except for `FragCoord` which is interpolated as usual. Implementations **may** instead interpolate each fragment according to the formula in Basic Line Segment Rasterization, using the original line segment endpoints.

When Bresenham lines are being rasterized, sample locations **may** all be treated as being at the pixel center (this **may** affect attribute and depth interpolation).

NOTE

The sample locations described above are **not** used for determining coverage, they are only used for things like attribute interpolation. The rasterization rules that determine coverage are defined in terms of whether the line intersects **pixels**, as opposed to the point sampling rules used for other primitive types. So these rules are independent of the sample locations. One consequence of this is that Bresenham lines cover the same pixels regardless of the number of rasterization samples, and cover all samples in those pixels (unless masked out or killed).

25.7. Polygons

A polygon results from the decomposition of a triangle strip, triangle fan or a series of independent triangles. Like points and line segments, polygon rasterization is controlled by several variables in the VkPipelineRasterizationStateCreateInfo structure.

25.7.1. Basic Polygon Rasterization

The first step of polygon rasterization is to determine whether the triangle is *back-facing* or *front-facing*. This determination is made based on the sign of the (clipped or unclipped) polygon's area computed in framebuffer coordinates. One way to compute this area is:

$$a = -\frac{1}{2}\sum_{i=0}^{n-1} x_f^i y_f^{i \oplus 1} - x_f^{i \oplus 1} y_f^i$$

where x_f^i and y_f^i are the x and y framebuffer coordinates of the ith vertex of the n-vertex polygon (vertices are numbered starting at zero for the purposes of this computation) and i ⊕ 1 is (i + 1) mod n.

The interpretation of the sign of a is determined by the VkPipelineRasterizationStateCreateInfo ::frontFace property of the currently active pipeline. Possible values are:

```
// Provided by VK_VERSION_1_0
typedef enum VkFrontFace {
    VK_FRONT_FACE_COUNTER_CLOCKWISE = 0,
    VK_FRONT_FACE_CLOCKWISE = 1,
} VkFrontFace;
```

- VK_FRONT_FACE_COUNTER_CLOCKWISE specifies that a triangle with positive area is considered front-facing.
- VK_FRONT_FACE_CLOCKWISE specifies that a triangle with negative area is considered front-facing.

Any triangle which is not front-facing is back-facing, including zero-area triangles.

To dynamically set the front face orientation, call:

```
// Provided by VK_VERSION_1_3
void vkCmdSetFrontFace(
    VkCommandBuffer                             commandBuffer,
    VkFrontFace                                 frontFace);
```

- commandBuffer is the command buffer into which the command will be recorded.
- frontFace is a VkFrontFace value specifying the front-facing triangle orientation to be used for culling.

This command sets the front face orientation for subsequent drawing commands when the graphics pipeline is created with VK_DYNAMIC_STATE_FRONT_FACE set in VkPipelineDynamicStateCreateInfo::pDynamicStates. Otherwise, this state is specified by the VkPipelineRasterizationStateCreateInfo::frontFace value used to create the currently active pipeline.

Valid Usage

- VUID-vkCmdSetFrontFace-None-08971
  At least one of the following **must** be true:
  - the value of VkApplicationInfo::apiVersion used to create the VkInstance parent of commandBuffer is greater than or equal to Version 1.3

Valid Usage (Implicit)

- VUID-vkCmdSetFrontFace-commandBuffer-parameter
  `commandBuffer` **must** be a valid VkCommandBuffer handle
- VUID-vkCmdSetFrontFace-frontFace-parameter
  `frontFace` **must** be a valid VkFrontFace value
- VUID-vkCmdSetFrontFace-commandBuffer-recording
  `commandBuffer` **must** be in the recording state
- VUID-vkCmdSetFrontFace-commandBuffer-cmdpool
  The `VkCommandPool` that `commandBuffer` was allocated from **must** support graphics operations

Host Synchronization

- Host access to `commandBuffer` **must** be externally synchronized
- Host access to the `VkCommandPool` that `commandBuffer` was allocated from **must** be externally synchronized

Command Properties

Command Buffer Levels	Render Pass Scope	Supported Queue Types	Command Type
Primary Secondary	Both	Graphics	State

Once the orientation of triangles is determined, they are culled according to the VkPipelineRasterizationStateCreateInfo::`cullMode` property of the currently active pipeline. Possible values are:

```
// Provided by VK_VERSION_1_0
typedef enum VkCullModeFlagBits {
    VK_CULL_MODE_NONE = 0,
    VK_CULL_MODE_FRONT_BIT = 0x00000001,
    VK_CULL_MODE_BACK_BIT = 0x00000002,
    VK_CULL_MODE_FRONT_AND_BACK = 0x00000003,
} VkCullModeFlagBits;
```

- `VK_CULL_MODE_NONE` specifies that no triangles are discarded
- `VK_CULL_MODE_FRONT_BIT` specifies that front-facing triangles are discarded
- `VK_CULL_MODE_BACK_BIT` specifies that back-facing triangles are discarded

- VK_CULL_MODE_FRONT_AND_BACK specifies that all triangles are discarded.

Following culling, fragments are produced for any triangles which have not been discarded.

```
// Provided by VK_VERSION_1_0
typedef VkFlags VkCullModeFlags;
```

VkCullModeFlags is a bitmask type for setting a mask of zero or more VkCullModeFlagBits.

To dynamically set the cull mode, call:

```
// Provided by VK_VERSION_1_3
void vkCmdSetCullMode(
    VkCommandBuffer                             commandBuffer,
    VkCullModeFlags                             cullMode);
```

- commandBuffer is the command buffer into which the command will be recorded.
- cullMode specifies the cull mode property to use for drawing.

This command sets the cull mode for subsequent drawing commands when the graphics pipeline is created with VK_DYNAMIC_STATE_CULL_MODE set in VkPipelineDynamicStateCreateInfo::pDynamicStates. Otherwise, this state is specified by the VkPipelineRasterizationStateCreateInfo::cullMode value used to create the currently active pipeline.

Valid Usage

- VUID-vkCmdSetCullMode-None-08971
  At least one of the following **must** be true:
  - the value of VkApplicationInfo::apiVersion used to create the VkInstance parent of commandBuffer is greater than or equal to Version 1.3

Valid Usage (Implicit)

- VUID-vkCmdSetCullMode-commandBuffer-parameter
  commandBuffer **must** be a valid VkCommandBuffer handle
- VUID-vkCmdSetCullMode-cullMode-parameter
  cullMode **must** be a valid combination of VkCullModeFlagBits values
- VUID-vkCmdSetCullMode-commandBuffer-recording
  commandBuffer **must** be in the recording state
- VUID-vkCmdSetCullMode-commandBuffer-cmdpool
  The VkCommandPool that commandBuffer was allocated from **must** support graphics operations

Host Synchronization

- Host access to `commandBuffer` **must** be externally synchronized
- Host access to the `VkCommandPool` that `commandBuffer` was allocated from **must** be externally synchronized

Command Properties

Command Buffer Levels	Render Pass Scope	Supported Queue Types	Command Type
Primary Secondary	Both	Graphics	State

The rule for determining which fragments are produced by polygon rasterization is called *point sampling*. The two-dimensional projection obtained by taking the x and y framebuffer coordinates of the polygon's vertices is formed. Fragments are produced for any fragment area groups of pixels for which any sample points lie inside of this polygon. Coverage bits that correspond to sample points that satisfy the point sampling criteria are 1, other coverage bits are 0. Special treatment is given to a sample whose sample location lies on a polygon edge. In such a case, if two polygons lie on either side of a common edge (with identical endpoints) on which a sample point lies, then exactly one of the polygons **must** result in a covered sample for that fragment during rasterization. As for the data associated with each fragment produced by rasterizing a polygon, we begin by specifying how these values are produced for fragments in a triangle.

Barycentric coordinates are a set of three numbers, a, b, and c, each in the range [0,1], with a + b + c = 1. These coordinates uniquely specify any point p within the triangle or on the triangle's boundary as

$$p = a\,p_a + b\,p_b + c\,p_c$$

where p_a, p_b, and p_c are the vertices of the triangle. a, b, and c are determined by:

$$a = \frac{\mathrm{A}(pp_bp_c)}{\mathrm{A}(p_ap_bp_c)}, \quad b = \frac{\mathrm{A}(pp_ap_c)}{\mathrm{A}(p_ap_bp_c)}, \quad c = \frac{\mathrm{A}(pp_ap_b)}{\mathrm{A}(p_ap_bp_c)},$$

where A(lmn) denotes the area in framebuffer coordinates of the triangle with vertices l, m, and n.

Denote an associated datum at p_a, p_b, or p_c as f_a, f_b, or f_c, respectively.

Perspective interpolation for a triangle interpolates three values in a manner that is correct when taking the perspective of the viewport into consideration, by way of the triangle's clip coordinates. An interpolated value f can be determined by

$$f = \frac{af_a/w_a + bf_b/w_b + cf_c/w_c}{a/w_a + b/w_b + c/w_c}$$

where w_a, w_b, and w_c are the clip w coordinates of p_a, p_b, and p_c, respectively. a, b, and c are the barycentric coordinates of the location at which the data are produced.

Linear interpolation for a triangle directly interpolates three values, and an interpolated value f can be determined by

$$f = a\,f_a + b\,f_b + c\,f_c$$

where f_a, f_b, and f_c are the data associated with p_a, p_b, and p_c, respectively.

The clip coordinate w for a sample is determined using perspective interpolation. The depth value z for a sample is determined using linear interpolation. Interpolation of fragment shader input values are determined by Interpolation decorations.

For a polygon with more than three edges, such as are produced by clipping a triangle, a convex combination of the values of the datum at the polygon's vertices **must** be used to obtain the value assigned to each fragment produced by the rasterization algorithm. That is, it **must** be the case that at every fragment

$$f = \sum_{i=1}^{n} a_i f_i$$

where n is the number of vertices in the polygon and f_i is the value of f at vertex i. For each i, $0 \le a_i \le 1$ and $\sum_{i=1}^{n} a_i = 1$. The values of a_i **may** differ from fragment to fragment, but at vertex i, $a_i = 1$ and $a_j = 0$ for $j \neq i$.

NOTE

One algorithm that achieves the required behavior is to triangulate a polygon (without adding any vertices) and then treat each triangle individually as already discussed. A scan-line rasterizer that linearly interpolates data along each edge and then linearly interpolates data across each horizontal span from edge to edge also satisfies the restrictions (in this case the numerator and denominator of perspective interpolation are iterated independently, and a division is performed for each fragment).

25.7.2. Polygon Mode

Possible values of the VkPipelineRasterizationStateCreateInfo::`polygonMode` property of the currently active pipeline, specifying the method of rasterization for polygons, are:

```
// Provided by VK_VERSION_1_0
typedef enum VkPolygonMode {
    VK_POLYGON_MODE_FILL = 0,
    VK_POLYGON_MODE_LINE = 1,
    VK_POLYGON_MODE_POINT = 2,
} VkPolygonMode;
```

- `VK_POLYGON_MODE_POINT` specifies that polygon vertices are drawn as points.

- VK_POLYGON_MODE_LINE specifies that polygon edges are drawn as line segments.
- VK_POLYGON_MODE_FILL specifies that polygons are rendered using the polygon rasterization rules in this section.

These modes affect only the final rasterization of polygons: in particular, a polygon's vertices are shaded and the polygon is clipped and possibly culled before these modes are applied.

The point size of the final rasterization of polygons when polygon mode is VK_POLYGON_MODE_POINT is implementation-dependent, and the point size **may** either be PointSize or 1.0.

25.7.3. Depth Bias

The depth values of all fragments generated by the rasterization of a polygon **can** be biased (offset) by a single depth bias value o that is computed for that polygon.

Depth Bias Enable

The depth bias computation is enabled by the depthBiasEnable set with vkCmdSetDepthBiasEnable or the corresponding VkPipelineRasterizationStateCreateInfo::depthBiasEnable value used to create the currently active pipeline. If the depth bias enable is VK_FALSE, no bias is applied and the fragment's depth values are unchanged.

To dynamically enable whether to bias fragment depth values, call:

```
// Provided by VK_VERSION_1_3
void vkCmdSetDepthBiasEnable(
    VkCommandBuffer                             commandBuffer,
    VkBool32                                    depthBiasEnable);
```

- commandBuffer is the command buffer into which the command will be recorded.
- depthBiasEnable controls whether to bias fragment depth values.

This command sets the depth bias enable for subsequent drawing commands when the graphics pipeline is created with VK_DYNAMIC_STATE_DEPTH_BIAS_ENABLE set in VkPipelineDynamicStateCreateInfo::pDynamicStates. Otherwise, this state is specified by the VkPipelineRasterizationStateCreateInfo::depthBiasEnable value used to create the currently active pipeline.

Valid Usage

- VUID-vkCmdSetDepthBiasEnable-None-08970
  At least one of the following **must** be true:
  - the value of VkApplicationInfo::apiVersion used to create the VkInstance parent of commandBuffer is greater than or equal to Version 1.3

Valid Usage (Implicit)

- VUID-vkCmdSetDepthBiasEnable-commandBuffer-parameter
  `commandBuffer` **must** be a valid VkCommandBuffer handle
- VUID-vkCmdSetDepthBiasEnable-commandBuffer-recording
  `commandBuffer` **must** be in the recording state
- VUID-vkCmdSetDepthBiasEnable-commandBuffer-cmdpool
  The `VkCommandPool` that `commandBuffer` was allocated from **must** support graphics operations

Host Synchronization

- Host access to `commandBuffer` **must** be externally synchronized
- Host access to the `VkCommandPool` that `commandBuffer` was allocated from **must** be externally synchronized

Command Properties

Command Buffer Levels	Render Pass Scope	Supported Queue Types	Command Type
Primary Secondary	Both	Graphics	State

Depth Bias Computation

The depth bias depends on three parameters:

- `depthBiasSlopeFactor` scales the maximum depth slope m of the polygon
- `depthBiasConstantFactor` scales the parameter r of the depth attachment
- the scaled terms are summed to produce a value which is then clamped to a minimum or maximum value specified by `depthBiasClamp`

`depthBiasSlopeFactor`, `depthBiasConstantFactor`, and `depthBiasClamp` **can** each be positive, negative, or zero. These parameters are set as described for vkCmdSetDepthBias below.

The maximum depth slope m of a triangle is

$$m = \sqrt{\left(\frac{\partial z_f}{\partial x_f}\right)^2 + \left(\frac{\partial z_f}{\partial y_f}\right)^2}$$

where (x_f, y_f, z_f) is a point on the triangle. m **may** be approximated as

$$m = \max\left(\left|\frac{\partial z_f}{\partial x_f}\right|, \left|\frac{\partial z_f}{\partial y_f}\right|\right).$$

r is the minimum resolvable difference that depends on the depth attachment representation. It is the smallest difference in framebuffer coordinate z values that is guaranteed to remain distinct throughout polygon rasterization and in the depth attachment. All pairs of fragments generated by the rasterization of two polygons with otherwise identical vertices, but z_f values that differ by r, will have distinct depth values.

For fixed-point depth attachment representations, r is constant throughout the range of the entire depth attachment. Its value is implementation-dependent but **must** be at most

$$r = 2 \times 2^{-n}$$

where n is the number of bits used for the depth aspect.

For floating-point depth attachment, there is no single minimum resolvable difference. In this case, the minimum resolvable difference for a given polygon is dependent on the maximum exponent, e, in the range of z values spanned by the primitive. If n is the number of bits in the floating-point mantissa, the minimum resolvable difference, r, for the given primitive is defined as

$$r = 2^{e-n}$$

If no depth attachment is present, r is undefined.

The bias value o for a polygon is

$$o = \text{dbclamp}(m \times depthBiasSlopeFactor + r \times depthBiasConstantFactor)$$

$$\text{where} \quad \text{dbclamp}(x) = \begin{cases} x & depthBiasClamp = 0 \text{ or } NaN \\ \min(x, depthBiasClamp) & depthBiasClamp > 0 \\ \max(x, depthBiasClamp) & depthBiasClamp < 0 \end{cases}$$

m is computed as described above. If the depth attachment uses a fixed-point representation, m is a function of depth values in the range [0,1], and o is applied to depth values in the same range.

Depth bias is applied to triangle topology primitives received by the rasterizer regardless of polygon mode. Depth bias **may** also be applied to line and point topology primitives received by the rasterizer.

To dynamically set the depth bias parameters, call:

```
// Provided by VK_VERSION_1_0
void vkCmdSetDepthBias(
    VkCommandBuffer                             commandBuffer,
    float                                       depthBiasConstantFactor,
    float                                       depthBiasClamp,
    float                                       depthBiasSlopeFactor);
```

- `commandBuffer` is the command buffer into which the command will be recorded.
- `depthBiasConstantFactor` is a scalar factor controlling the constant depth value added to each fragment.
- `depthBiasClamp` is the maximum (or minimum) depth bias of a fragment.
- `depthBiasSlopeFactor` is a scalar factor applied to a fragment's slope in depth bias calculations.

This command sets the depth bias parameters for subsequent drawing commands when the graphics pipeline is created with `VK_DYNAMIC_STATE_DEPTH_BIAS` set in VkPipelineDynamicStateCreateInfo::`pDynamicStates`. Otherwise, this state is specified by the corresponding VkPipelineRasterizationStateCreateInfo::`depthBiasConstantFactor`, `depthBiasClamp`, and `depthBiasSlopeFactor` values used to create the currently active pipeline.

Valid Usage

- VUID-vkCmdSetDepthBias-depthBiasClamp-00790
  If the `depthBiasClamp` feature is not enabled, `depthBiasClamp` **must** be `0.0`

Valid Usage (Implicit)

- VUID-vkCmdSetDepthBias-commandBuffer-parameter
  `commandBuffer` **must** be a valid VkCommandBuffer handle
- VUID-vkCmdSetDepthBias-commandBuffer-recording
  `commandBuffer` **must** be in the recording state
- VUID-vkCmdSetDepthBias-commandBuffer-cmdpool
  The `VkCommandPool` that `commandBuffer` was allocated from **must** support graphics operations

Host Synchronization

- Host access to `commandBuffer` **must** be externally synchronized
- Host access to the `VkCommandPool` that `commandBuffer` was allocated from **must** be externally synchronized

Command Properties

Command Buffer Levels	Render Pass Scope	Supported Queue Types	Command Type
Primary Secondary	Both	Graphics	State

Chapter 26. Fragment Operations

Fragments produced by rasterization go through a number of operations to determine whether or how values produced by fragment shading are written to the framebuffer.

The following fragment operations adhere to rasterization order, and are typically performed in this order:

1. Scissor test
2. Sample mask test
3. Certain Fragment shading operations:
    - Sample Mask Accesses
    - Depth Replacement
4. Multisample coverage
5. Depth bounds test
6. Stencil test
7. Depth test
8. Sample counting
9. Coverage reduction

The coverage mask generated by rasterization describes the initial coverage of each sample covered by the fragment. Fragment operations will update the coverage mask to add or subtract coverage where appropriate. If a fragment operation results in all bits of the coverage mask being `0`, the fragment is discarded, and no further operations are performed. Fragments can also be programmatically discarded in a fragment shader by executing one of

- `OpTerminateInvocation`
- `OpDemoteToHelperInvocationEXT`
- `OpKill`.

When one of the fragment operations in this chapter is described as “replacing” a fragment shader output, that output is replaced unconditionally, even if no fragment shader previously wrote to that output.

If there is a fragment shader and it declares the `EarlyFragmentTests` execution mode, fragment shading and multisample coverage operations **should** instead be performed after sample counting, and sample mask test **may** instead be performed after sample counting.

For a pipeline with the following properties:

- a fragment shader is specified
- the fragment shader does not write to storage resources;
- the fragment shader specifies the `DepthReplacing` execution mode; and

- either
  - the fragment shader specifies the `DepthUnchanged` execution mode;
  - the fragment shader specifies the `DepthLess` execution mode and the pipeline uses a VkPipelineDepthStencilStateCreateInfo::`depthCompareOp` of `VK_COMPARE_OP_GREATER` or `VK_COMPARE_OP_GREATER_OR_EQUAL`; or
  - the fragment shader specifies the `DepthGreater` execution mode and the pipeline uses a VkPipelineDepthStencilStateCreateInfo::`depthCompareOp` of `VK_COMPARE_OP_LESS` or `VK_COMPARE_OP_LESS_OR_EQUAL`

the implementation **may** perform depth bounds test before fragment shading and perform an additional depth test immediately after that using the interpolated depth value generated by rasterization.

Once all fragment operations have completed, fragment shader outputs for covered color attachment samples pass through framebuffer operations.

26.1. Scissor Test

The scissor test compares the framebuffer coordinates (x_f,y_f) of each sample covered by a fragment against a *scissor rectangle* at the index equal to the fragment's `ViewportIndex`.

Each scissor rectangle is defined by a VkRect2D. These values are either set by the VkPipelineViewportStateCreateInfo structure during pipeline creation, or dynamically by the vkCmdSetScissor command.

A given sample is considered inside a scissor rectangle if x_f is in the range [VkRect2D::`offset.x`, VkRect2D::`offset.x` + VkRect2D::`extent.x`), and y_f is in the range [VkRect2D::`offset.y`, VkRect2D::`offset.y` + VkRect2D::`extent.y`). Samples with coordinates outside the scissor rectangle at the corresponding `ViewportIndex` will have their coverage set to `0`.

To dynamically set the scissor rectangles, call:

```
// Provided by VK_VERSION_1_0
void vkCmdSetScissor(
    VkCommandBuffer                             commandBuffer,
    uint32_t                                    firstScissor,
    uint32_t                                    scissorCount,
    const VkRect2D*                             pScissors);
```

- `commandBuffer` is the command buffer into which the command will be recorded.
- `firstScissor` is the index of the first scissor whose state is updated by the command.
- `scissorCount` is the number of scissors whose rectangles are updated by the command.
- `pScissors` is a pointer to an array of VkRect2D structures defining scissor rectangles.

The scissor rectangles taken from element i of `pScissors` replace the current state for the scissor index `firstScissor` + i, for i in [0, `scissorCount`).

This command sets the scissor rectangles for subsequent drawing commands when the graphics pipeline is created with VK_DYNAMIC_STATE_SCISSOR set in VkPipelineDynamicStateCreateInfo ::pDynamicStates. Otherwise, this state is specified by the VkPipelineViewportStateCreateInfo ::pScissors values used to create the currently active pipeline.

Valid Usage

- VUID-vkCmdSetScissor-firstScissor-00592
  The sum of firstScissor and scissorCount **must** be between 1 and VkPhysicalDeviceLimits::maxViewports, inclusive
- VUID-vkCmdSetScissor-firstScissor-00593
  If the multiViewport feature is not enabled, firstScissor **must** be 0
- VUID-vkCmdSetScissor-scissorCount-00594
  If the multiViewport feature is not enabled, scissorCount **must** be 1
- VUID-vkCmdSetScissor-x-00595
  The x and y members of offset member of any element of pScissors **must** be greater than or equal to 0
- VUID-vkCmdSetScissor-offset-00596
  Evaluation of (offset.x + extent.width) **must** not cause a signed integer addition overflow for any element of pScissors
- VUID-vkCmdSetScissor-offset-00597
  Evaluation of (offset.y + extent.height) **must** not cause a signed integer addition overflow for any element of pScissors

Valid Usage (Implicit)

- VUID-vkCmdSetScissor-commandBuffer-parameter
  commandBuffer **must** be a valid VkCommandBuffer handle
- VUID-vkCmdSetScissor-pScissors-parameter
  pScissors **must** be a valid pointer to an array of scissorCount VkRect2D structures
- VUID-vkCmdSetScissor-commandBuffer-recording
  commandBuffer **must** be in the recording state
- VUID-vkCmdSetScissor-commandBuffer-cmdpool
  The VkCommandPool that commandBuffer was allocated from **must** support graphics operations
- VUID-vkCmdSetScissor-scissorCount-arraylength
  scissorCount **must** be greater than 0

Host Synchronization

- Host access to commandBuffer **must** be externally synchronized

- Host access to the VkCommandPool that commandBuffer was allocated from **must** be externally synchronized

Command Properties

Command Buffer Levels	Render Pass Scope	Supported Queue Types	Command Type
Primary Secondary	Both	Graphics	State

26.2. Sample Mask Test

The sample mask test compares the coverage mask for a fragment with the *sample mask* defined by VkPipelineMultisampleStateCreateInfo::pSampleMask.

Each bit of the coverage mask is associated with a sample index as described in the rasterization chapter. If the bit in VkPipelineMultisampleStateCreateInfo::pSampleMask which is associated with that same sample index is set to 0, the coverage mask bit is set to 0.

26.3. Fragment Shading

Fragment shaders are invoked for each fragment, or as helper invocations.

Most operations in the fragment shader are not performed in rasterization order, with exceptions called out in the following sections.

For fragment shaders invoked by fragments, the following rules apply:

- A fragment shader **must** not be executed if a fragment operation that executes before fragment shading discards the fragment.
- A fragment shader **may** not be executed if:
  - An implementation determines that another fragment shader, invoked by a subsequent primitive in primitive order, overwrites all results computed by the shader (including writes to storage resources).
  - Any other fragment operation discards the fragment, and the shader does not write to any storage resources.
  - If a fragment shader statically computes the same values for different framebuffer locations, and does not write to any storage resources, multiple fragments **may** be shaded by one fragment shader invocation. This **may** affect VK_QUERY_PIPELINE_STATISTIC_FRAGMENT_SHADER_INVOCATIONS_BIT results, but **must** otherwise not be visible behavior to applications.
- Otherwise, at least one fragment shader **must** be executed.
  - If sample shading is enabled and multiple invocations per fragment are **required**,

additional invocations **must** be executed as specified.

- Each covered sample **must** be included in at least one fragment shader invocation.

If no fragment shader is included in the pipeline, no fragment shader is executed, and undefined values **may** be written to all color attachment outputs during this fragment operation.

NOTE

Multiple fragment shader invocations may be executed for the same fragment for any number of implementation-dependent reasons. When there is more than one fragment shader invocation per fragment, the association of samples to invocations is implementation-dependent. Stores and atomics performed by these additional invocations have the normal effect.

For example, if the subpass includes multiple views in its view mask, a fragment shader may be invoked separately for each view.

26.3.1. Sample Mask

Reading from the `SampleMask` built-in in the `Input` storage class will return the coverage mask for the current fragment as calculated by fragment operations that executed prior to fragment shading.

If sample shading is enabled, fragment shaders will only see values of `1` for samples being shaded - other bits will be `0`.

Each bit of the coverage mask is associated with a sample index as described in the rasterization chapter. If the bit in `SampleMask` which is associated with that same sample index is set to `0`, that coverage mask bit is set to `0`.

Values written to the `SampleMask` built-in in the `Output` storage class will be used by the multisample coverage operation, with the same encoding as the input built-in.

26.3.2. Depth Replacement

Writing to the `FragDepth` built-in will replace the fragment's calculated depth values for each sample in the input `SampleMask`. Depth testing performed after the fragment shader for this fragment will use this new value as z_f.

26.4. Multisample Coverage

If a fragment shader is active and its entry point's interface includes a built-in output variable decorated with `SampleMask`, the coverage mask is `ANDed` with the bits of the `SampleMask` built-in to generate a new coverage mask. If sample shading is enabled, bits written to `SampleMask` corresponding to samples that are not being shaded by the fragment shader invocation are ignored. If no fragment shader is active, or if the active fragment shader does not include `SampleMask` in its interface, the coverage mask is not modified.

Next, the fragment alpha value and coverage mask are modified based on the `alphaToCoverageEnable` and `alphaToOneEnable` members of the VkPipelineMultisampleStateCreateInfo structure.

All alpha values in this section refer only to the alpha component of the fragment shader output that has a `Location` and `Index` decoration of zero (see the Fragment Output Interface section). If that shader output has an integer or unsigned integer type, then these operations are skipped.

If `alphaToCoverageEnable` is enabled, a temporary coverage mask is generated where each bit is determined by the fragment's alpha value, which is ANDed with the fragment coverage mask.

No specific algorithm is specified for converting the alpha value to a temporary coverage mask. It is intended that the number of 1's in this value be proportional to the alpha value (clamped to [0,1]), with all 1's corresponding to a value of 1.0 and all 0's corresponding to 0.0. The algorithm **may** be different at different framebuffer coordinates.

NOTE	Using different algorithms at different framebuffer coordinates **may** help to avoid artifacts caused by regular coverage sample locations.

Finally, if `alphaToOneEnable` is enabled, each alpha value is replaced by the maximum representable alpha value for fixed-point color attachments, or by 1.0 for floating-point attachments. Otherwise, the alpha values are not changed.

26.5. Depth and Stencil Operations

Pipeline state controlling the depth bounds tests, stencil test, and depth test is specified through the members of the `VkPipelineDepthStencilStateCreateInfo` structure.

The `VkPipelineDepthStencilStateCreateInfo` structure is defined as:

```
// Provided by VK_VERSION_1_0
typedef struct VkPipelineDepthStencilStateCreateInfo {
    VkStructureType                           sType;
    const void*                               pNext;
    VkPipelineDepthStencilStateCreateFlags    flags;
    VkBool32                                  depthTestEnable;
    VkBool32                                  depthWriteEnable;
    VkCompareOp                               depthCompareOp;
    VkBool32                                  depthBoundsTestEnable;
    VkBool32                                  stencilTestEnable;
    VkStencilOpState                          front;
    VkStencilOpState                          back;
    float                                     minDepthBounds;
    float                                     maxDepthBounds;
} VkPipelineDepthStencilStateCreateInfo;
```

- `sType` is a `VkStructureType` value identifying this structure.
- `pNext` is `NULL` or a pointer to a structure extending this structure.
- `flags` is reserved for future use.
- `depthTestEnable` controls whether depth testing is enabled.
- `depthWriteEnable` controls whether depth writes are enabled when `depthTestEnable` is `VK_TRUE`.

Depth writes are always disabled when `depthTestEnable` is `VK_FALSE`.

- `depthCompareOp` is a VkCompareOp value specifying the comparison operator to use in the Depth Comparison step of the depth test.
- `depthBoundsTestEnable` controls whether depth bounds testing is enabled.
- `stencilTestEnable` controls whether stencil testing is enabled.
- `front` and `back` are VkStencilOpState values controlling the corresponding parameters of the stencil test.
- `minDepthBounds` is the minimum depth bound used in the depth bounds test.
- `maxDepthBounds` is the maximum depth bound used in the depth bounds test.

Valid Usage

- VUID-VkPipelineDepthStencilStateCreateInfo-depthBoundsTestEnable-00598
  If the `depthBounds` feature is not enabled, `depthBoundsTestEnable` **must** be `VK_FALSE`

Valid Usage (Implicit)

- VUID-VkPipelineDepthStencilStateCreateInfo-sType-sType
  `sType` **must** be `VK_STRUCTURE_TYPE_PIPELINE_DEPTH_STENCIL_STATE_CREATE_INFO`
- VUID-VkPipelineDepthStencilStateCreateInfo-pNext-pNext
  `pNext` **must** be `NULL`
- VUID-VkPipelineDepthStencilStateCreateInfo-flags-zerobitmask
  `flags` **must** be `0`
- VUID-VkPipelineDepthStencilStateCreateInfo-depthCompareOp-parameter
  `depthCompareOp` **must** be a valid VkCompareOp value
- VUID-VkPipelineDepthStencilStateCreateInfo-front-parameter
  `front` **must** be a valid VkStencilOpState structure
- VUID-VkPipelineDepthStencilStateCreateInfo-back-parameter
  `back` **must** be a valid VkStencilOpState structure

```
// Provided by VK_VERSION_1_0
typedef VkFlags VkPipelineDepthStencilStateCreateFlags;
```

`VkPipelineDepthStencilStateCreateFlags` is a bitmask type for setting a mask, but is currently reserved for future use.

26.6. Depth Bounds Test

The depth bounds test compares the depth value z_a in the depth/stencil attachment at each sample's framebuffer coordinates (x_f, y_f) and sample index i against a set of *depth bounds*.

The depth bounds are determined by two floating-point values defining a minimum (`minDepthBounds`) and maximum (`maxDepthBounds`) depth value. These values are either set by the VkPipelineDepthStencilStateCreateInfo structure during pipeline creation, or dynamically by vkCmdSetDepthBoundsTestEnable and vkCmdSetDepthBounds.

A given sample is considered within the depth bounds if z_a is in the range [`minDepthBounds` ,`maxDepthBounds`]. Samples with depth attachment values outside of the depth bounds will have their coverage set to `0`.

If the depth bounds test is disabled, or if there is no depth attachment, the coverage mask is unmodified by this operation.

To dynamically enable or disable the depth bounds test, call:

```
// Provided by VK_VERSION_1_3
void vkCmdSetDepthBoundsTestEnable(
    VkCommandBuffer                             commandBuffer,
    VkBool32                                    depthBoundsTestEnable);
```

- `commandBuffer` is the command buffer into which the command will be recorded.
- `depthBoundsTestEnable` specifies if the depth bounds test is enabled.

This command sets the depth bounds enable for subsequent drawing commands when the graphics pipeline is created with `VK_DYNAMIC_STATE_DEPTH_BOUNDS_TEST_ENABLE` set in VkPipelineDynamicStateCreateInfo::`pDynamicStates`. Otherwise, this state is specified by the VkPipelineDepthStencilStateCreateInfo::`depthBoundsTestEnable` value used to create the currently active pipeline.

Valid Usage

- VUID-vkCmdSetDepthBoundsTestEnable-None-08971
  At least one of the following **must** be true:
  - the value of VkApplicationInfo::`apiVersion` used to create the VkInstance parent of `commandBuffer` is greater than or equal to Version 1.3
- VUID-vkCmdSetDepthBoundsTestEnable-depthBounds-10010
  If the `depthBounds` feature is not enabled, `depthBoundsTestEnable` **must** be `VK_FALSE`

Valid Usage (Implicit)

- VUID-vkCmdSetDepthBoundsTestEnable-commandBuffer-parameter
  `commandBuffer` **must** be a valid VkCommandBuffer handle
- VUID-vkCmdSetDepthBoundsTestEnable-commandBuffer-recording
  `commandBuffer` **must** be in the recording state
- VUID-vkCmdSetDepthBoundsTestEnable-commandBuffer-cmdpool
  The `VkCommandPool` that `commandBuffer` was allocated from **must** support graphics

operations

Host Synchronization

- Host access to `commandBuffer` **must** be externally synchronized
- Host access to the `VkCommandPool` that `commandBuffer` was allocated from **must** be externally synchronized

Command Properties

Command Buffer Levels	Render Pass Scope	Supported Queue Types	Command Type
Primary Secondary	Both	Graphics	State

To dynamically set the depth bounds range, call:

```
// Provided by VK_VERSION_1_0
void vkCmdSetDepthBounds(
    VkCommandBuffer                             commandBuffer,
    float                                       minDepthBounds,
    float                                       maxDepthBounds);
```

- `commandBuffer` is the command buffer into which the command will be recorded.
- `minDepthBounds` is the minimum depth bound.
- `maxDepthBounds` is the maximum depth bound.

This command sets the depth bounds range for subsequent drawing commands when the graphics pipeline is created with `VK_DYNAMIC_STATE_DEPTH_BOUNDS` set in VkPipelineDynamicStateCreateInfo ::`pDynamicStates`. Otherwise, this state is specified by the VkPipelineDepthStencilStateCreateInfo ::`minDepthBounds` and VkPipelineDepthStencilStateCreateInfo::`maxDepthBounds` values used to create the currently active pipeline.

Valid Usage

- VUID-vkCmdSetDepthBounds-minDepthBounds-00600
  `minDepthBounds` **must** be between `0.0` and `1.0`, inclusive
- VUID-vkCmdSetDepthBounds-maxDepthBounds-00601
  `maxDepthBounds` **must** be between `0.0` and `1.0`, inclusive

Valid Usage (Implicit)

- VUID-vkCmdSetDepthBounds-commandBuffer-parameter
  `commandBuffer` **must** be a valid VkCommandBuffer handle
- VUID-vkCmdSetDepthBounds-commandBuffer-recording
  `commandBuffer` **must** be in the recording state
- VUID-vkCmdSetDepthBounds-commandBuffer-cmdpool
  The `VkCommandPool` that `commandBuffer` was allocated from **must** support graphics operations

Host Synchronization

- Host access to `commandBuffer` **must** be externally synchronized
- Host access to the `VkCommandPool` that `commandBuffer` was allocated from **must** be externally synchronized

Command Properties

Command Buffer Levels	Render Pass Scope	Supported Queue Types	Command Type
Primary Secondary	Both	Graphics	State

26.7. Stencil Test

The stencil test compares the stencil attachment value s_a in the depth/stencil attachment at each sample's framebuffer coordinates (x_f,y_f) and sample index i against a *stencil reference value*.

If the stencil test is not enabled, as specified by vkCmdSetStencilTestEnable or VkPipelineDepthStencilStateCreateInfo::`stencilTestEnable`, or if there is no stencil attachment, the coverage mask is unmodified by this operation.

The stencil test is controlled by one of two sets of stencil-related state, the front stencil state and the back stencil state. Stencil tests and writes use the back stencil state when processing fragments generated by back-facing polygons, and the front stencil state when processing fragments generated by front-facing polygons or any other primitives.

The comparison operation performed is determined by the VkCompareOp value set by vkCmdSetStencilOp::`compareOp`, or by VkStencilOpState::`compareOp` during pipeline creation.

The compare mask s_c and stencil reference value s_r of the front or the back stencil state set determine arguments of the comparison operation. s_c is set by the VkPipelineDepthStencilStateCreateInfo structure during pipeline creation, or by the

vkCmdSetStencilCompareMask command. s_r is set by VkPipelineDepthStencilStateCreateInfo or by vkCmdSetStencilReference.

s_r and s_a are each independently combined with s_c using a bitwise AND operation to create masked reference and attachment values s'_r and s'_a. s'_r and s'_a are used as the *reference* and *test* values, respectively, in the operation specified by the VkCompareOp.

If the comparison evaluates to false, the coverage for the sample is set to 0.

A new stencil value s_g is generated according to a stencil operation defined by VkStencilOp parameters set by vkCmdSetStencilOp or VkPipelineDepthStencilStateCreateInfo. If the stencil test fails, failOp defines the stencil operation used. If the stencil test passes however, the stencil op used is based on the depth test - if it passes, VkPipelineDepthStencilStateCreateInfo::passOp is used, otherwise VkPipelineDepthStencilStateCreateInfo::depthFailOp is used.

The stencil attachment value s_a is then updated with the generated stencil value s_g according to the write mask s_w defined by writeMask in VkPipelineDepthStencilStateCreateInfo::front and VkPipelineDepthStencilStateCreateInfo::back as:

$$s_a = (s_a \,\&\, \neg s_w) \mid (s_g \,\&\, s_w)$$

To dynamically enable or disable the stencil test, call:

```
// Provided by VK_VERSION_1_3
void vkCmdSetStencilTestEnable(
    VkCommandBuffer                             commandBuffer,
    VkBool32                                    stencilTestEnable);
```

- commandBuffer is the command buffer into which the command will be recorded.
- stencilTestEnable specifies if the stencil test is enabled.

This command sets the stencil test enable for subsequent drawing commands when the graphics pipeline is created with VK_DYNAMIC_STATE_STENCIL_TEST_ENABLE set in VkPipelineDynamicStateCreateInfo::pDynamicStates. Otherwise, this state is specified by the VkPipelineDepthStencilStateCreateInfo::stencilTestEnable value used to create the currently active pipeline.

Valid Usage

- VUID-vkCmdSetStencilTestEnable-None-08971
  At least one of the following **must** be true:
  - the value of VkApplicationInfo::apiVersion used to create the VkInstance parent of commandBuffer is greater than or equal to Version 1.3

Valid Usage (Implicit)

- VUID-vkCmdSetStencilTestEnable-commandBuffer-parameter
  `commandBuffer` **must** be a valid VkCommandBuffer handle
- VUID-vkCmdSetStencilTestEnable-commandBuffer-recording
  `commandBuffer` **must** be in the recording state
- VUID-vkCmdSetStencilTestEnable-commandBuffer-cmdpool
  The `VkCommandPool` that `commandBuffer` was allocated from **must** support graphics operations

Host Synchronization

- Host access to `commandBuffer` **must** be externally synchronized
- Host access to the `VkCommandPool` that `commandBuffer` was allocated from **must** be externally synchronized

Command Properties

Command Buffer Levels	Render Pass Scope	Supported Queue Types	Command Type
Primary Secondary	Both	Graphics	State

To dynamically set the stencil operation, call:

```
// Provided by VK_VERSION_1_3
void vkCmdSetStencilOp(
    VkCommandBuffer                             commandBuffer,
    VkStencilFaceFlags                          faceMask,
    VkStencilOp                                 failOp,
    VkStencilOp                                 passOp,
    VkStencilOp                                 depthFailOp,
    VkCompareOp                                 compareOp);
```

- `commandBuffer` is the command buffer into which the command will be recorded.
- `faceMask` is a bitmask of VkStencilFaceFlagBits specifying the set of stencil state for which to update the stencil operation.
- `failOp` is a VkStencilOp value specifying the action performed on samples that fail the stencil test.
- `passOp` is a VkStencilOp value specifying the action performed on samples that pass both the depth and stencil tests.

- `depthFailOp` is a VkStencilOp value specifying the action performed on samples that pass the stencil test and fail the depth test.
- `compareOp` is a VkCompareOp value specifying the comparison operator used in the stencil test.

This command sets the stencil operation for subsequent drawing commands when when the graphics pipeline is created with `VK_DYNAMIC_STATE_STENCIL_OP` set in VkPipelineDynamicStateCreateInfo::`pDynamicStates`. Otherwise, this state is specified by the corresponding `VkPipelineDepthStencilStateCreateInfo`::`failOp`, `passOp`, `depthFailOp`, and `compareOp` values used to create the currently active pipeline, for both front and back faces.

Valid Usage

- VUID-vkCmdSetStencilOp-None-08971
  At least one of the following **must** be true:
  - the value of VkApplicationInfo::`apiVersion` used to create the VkInstance parent of `commandBuffer` is greater than or equal to Version 1.3

Valid Usage (Implicit)

- VUID-vkCmdSetStencilOp-commandBuffer-parameter
  `commandBuffer` **must** be a valid VkCommandBuffer handle
- VUID-vkCmdSetStencilOp-faceMask-parameter
  `faceMask` **must** be a valid combination of VkStencilFaceFlagBits values
- VUID-vkCmdSetStencilOp-faceMask-requiredbitmask
  `faceMask` **must** not be `0`
- VUID-vkCmdSetStencilOp-failOp-parameter
  `failOp` **must** be a valid VkStencilOp value
- VUID-vkCmdSetStencilOp-passOp-parameter
  `passOp` **must** be a valid VkStencilOp value
- VUID-vkCmdSetStencilOp-depthFailOp-parameter
  `depthFailOp` **must** be a valid VkStencilOp value
- VUID-vkCmdSetStencilOp-compareOp-parameter
  `compareOp` **must** be a valid VkCompareOp value
- VUID-vkCmdSetStencilOp-commandBuffer-recording
  `commandBuffer` **must** be in the recording state
- VUID-vkCmdSetStencilOp-commandBuffer-cmdpool
  The `VkCommandPool` that `commandBuffer` was allocated from **must** support graphics operations

Host Synchronization

- Host access to `commandBuffer` **must** be externally synchronized

- Host access to the VkCommandPool that commandBuffer was allocated from **must** be externally synchronized

Command Properties

Command Buffer Levels	Render Pass Scope	Supported Queue Types	Command Type
Primary Secondary	Both	Graphics	State

The VkStencilOpState structure is defined as:

```
// Provided by VK_VERSION_1_0
typedef struct VkStencilOpState {
    VkStencilOp    failOp;
    VkStencilOp    passOp;
    VkStencilOp    depthFailOp;
    VkCompareOp    compareOp;
    uint32_t       compareMask;
    uint32_t       writeMask;
    uint32_t       reference;
} VkStencilOpState;
```

- failOp is a VkStencilOp value specifying the action performed on samples that fail the stencil test.
- passOp is a VkStencilOp value specifying the action performed on samples that pass both the depth and stencil tests.
- depthFailOp is a VkStencilOp value specifying the action performed on samples that pass the stencil test and fail the depth test.
- compareOp is a VkCompareOp value specifying the comparison operator used in the stencil test.
- compareMask selects the bits of the unsigned integer stencil values participating in the stencil test.
- writeMask selects the bits of the unsigned integer stencil values updated by the stencil test in the stencil framebuffer attachment.
- reference is an integer stencil reference value that is used in the unsigned stencil comparison.

Valid Usage (Implicit)

- VUID-VkStencilOpState-failOp-parameter
  failOp **must** be a valid VkStencilOp value
- VUID-VkStencilOpState-passOp-parameter
  passOp **must** be a valid VkStencilOp value
- VUID-VkStencilOpState-depthFailOp-parameter

depthFailOp **must** be a valid VkStencilOp value

- VUID-VkStencilOpState-compareOp-parameter
  compareOp **must** be a valid VkCompareOp value

To dynamically set the stencil compare mask, call:

```
// Provided by VK_VERSION_1_0
void vkCmdSetStencilCompareMask(
    VkCommandBuffer                             commandBuffer,
    VkStencilFaceFlags                          faceMask,
    uint32_t                                    compareMask);
```

- commandBuffer is the command buffer into which the command will be recorded.
- faceMask is a bitmask of VkStencilFaceFlagBits specifying the set of stencil state for which to update the compare mask.
- compareMask is the new value to use as the stencil compare mask.

This command sets the stencil compare mask for subsequent drawing commands when the graphics pipeline is created with VK_DYNAMIC_STATE_STENCIL_COMPARE_MASK set in VkPipelineDynamicStateCreateInfo::pDynamicStates. Otherwise, this state is specified by the VkStencilOpState::compareMask value used to create the currently active pipeline, for both front and back faces.

Valid Usage (Implicit)

- VUID-vkCmdSetStencilCompareMask-commandBuffer-parameter
  commandBuffer **must** be a valid VkCommandBuffer handle
- VUID-vkCmdSetStencilCompareMask-faceMask-parameter
  faceMask **must** be a valid combination of VkStencilFaceFlagBits values
- VUID-vkCmdSetStencilCompareMask-faceMask-requiredbitmask
  faceMask **must** not be 0
- VUID-vkCmdSetStencilCompareMask-commandBuffer-recording
  commandBuffer **must** be in the recording state
- VUID-vkCmdSetStencilCompareMask-commandBuffer-cmdpool
  The VkCommandPool that commandBuffer was allocated from **must** support graphics operations

Host Synchronization

- Host access to commandBuffer **must** be externally synchronized
- Host access to the VkCommandPool that commandBuffer was allocated from **must** be externally synchronized

Command Properties

Command Buffer Levels	Render Pass Scope	Supported Queue Types	Command Type
Primary Secondary	Both	Graphics	State

VkStencilFaceFlagBits values are:

```
// Provided by VK_VERSION_1_0
typedef enum VkStencilFaceFlagBits {
    VK_STENCIL_FACE_FRONT_BIT = 0x00000001,
    VK_STENCIL_FACE_BACK_BIT = 0x00000002,
    VK_STENCIL_FACE_FRONT_AND_BACK = 0x00000003,
  // VK_STENCIL_FRONT_AND_BACK is a deprecated alias
    VK_STENCIL_FRONT_AND_BACK = VK_STENCIL_FACE_FRONT_AND_BACK,
} VkStencilFaceFlagBits;
```

- VK_STENCIL_FACE_FRONT_BIT specifies that only the front set of stencil state is updated.
- VK_STENCIL_FACE_BACK_BIT specifies that only the back set of stencil state is updated.
- VK_STENCIL_FACE_FRONT_AND_BACK is the combination of VK_STENCIL_FACE_FRONT_BIT and VK_STENCIL_FACE_BACK_BIT, and specifies that both sets of stencil state are updated.

```
// Provided by VK_VERSION_1_0
typedef VkFlags VkStencilFaceFlags;
```

VkStencilFaceFlags is a bitmask type for setting a mask of zero or more VkStencilFaceFlagBits.

To dynamically set the stencil write mask, call:

```
// Provided by VK_VERSION_1_0
void vkCmdSetStencilWriteMask(
    VkCommandBuffer                             commandBuffer,
    VkStencilFaceFlags                          faceMask,
    uint32_t                                    writeMask);
```

- commandBuffer is the command buffer into which the command will be recorded.
- faceMask is a bitmask of VkStencilFaceFlagBits specifying the set of stencil state for which to update the write mask, as described above for vkCmdSetStencilCompareMask.
- writeMask is the new value to use as the stencil write mask.

This command sets the stencil write mask for subsequent drawing commands when the graphics pipeline is created with VK_DYNAMIC_STATE_STENCIL_WRITE_MASK set in

VkPipelineDynamicStateCreateInfo::pDynamicStates. Otherwise, this state is specified by the writeMask value used to create the currently active pipeline, for both VkPipelineDepthStencilStateCreateInfo::front and VkPipelineDepthStencilStateCreateInfo::back faces.

Valid Usage (Implicit)

- VUID-vkCmdSetStencilWriteMask-commandBuffer-parameter
  commandBuffer **must** be a valid VkCommandBuffer handle
- VUID-vkCmdSetStencilWriteMask-faceMask-parameter
  faceMask **must** be a valid combination of VkStencilFaceFlagBits values
- VUID-vkCmdSetStencilWriteMask-faceMask-requiredbitmask
  faceMask **must** not be 0
- VUID-vkCmdSetStencilWriteMask-commandBuffer-recording
  commandBuffer **must** be in the recording state
- VUID-vkCmdSetStencilWriteMask-commandBuffer-cmdpool
  The VkCommandPool that commandBuffer was allocated from **must** support graphics operations

Host Synchronization

- Host access to commandBuffer **must** be externally synchronized
- Host access to the VkCommandPool that commandBuffer was allocated from **must** be externally synchronized

Command Properties

Command Buffer Levels	Render Pass Scope	Supported Queue Types	Command Type
Primary Secondary	Both	Graphics	State

To dynamically set the stencil reference value, call:

```
// Provided by VK_VERSION_1_0
void vkCmdSetStencilReference(
    VkCommandBuffer                             commandBuffer,
    VkStencilFaceFlags                          faceMask,
    uint32_t                                    reference);
```

- commandBuffer is the command buffer into which the command will be recorded.

- `faceMask` is a bitmask of VkStencilFaceFlagBits specifying the set of stencil state for which to update the reference value, as described above for vkCmdSetStencilCompareMask.
- `reference` is the new value to use as the stencil reference value.

This command sets the stencil reference value for subsequent drawing commands when the graphics pipeline is created with `VK_DYNAMIC_STATE_STENCIL_REFERENCE` set in VkPipelineDynamicStateCreateInfo::`pDynamicStates`. Otherwise, this state is specified by the VkPipelineDepthStencilStateCreateInfo::`reference` value used to create the currently active pipeline, for both front and back faces.

Valid Usage (Implicit)

- VUID-vkCmdSetStencilReference-commandBuffer-parameter
  `commandBuffer` **must** be a valid VkCommandBuffer handle
- VUID-vkCmdSetStencilReference-faceMask-parameter
  `faceMask` **must** be a valid combination of VkStencilFaceFlagBits values
- VUID-vkCmdSetStencilReference-faceMask-requiredbitmask
  `faceMask` **must** not be `0`
- VUID-vkCmdSetStencilReference-commandBuffer-recording
  `commandBuffer` **must** be in the recording state
- VUID-vkCmdSetStencilReference-commandBuffer-cmdpool
  The `VkCommandPool` that `commandBuffer` was allocated from **must** support graphics operations

Host Synchronization

- Host access to `commandBuffer` **must** be externally synchronized
- Host access to the `VkCommandPool` that `commandBuffer` was allocated from **must** be externally synchronized

Command Properties

Command Buffer Levels	Render Pass Scope	Supported Queue Types	Command Type
Primary Secondary	Both	Graphics	State

Possible values of the `failOp`, `passOp`, and `depthFailOp` members of VkStencilOpState, specifying what happens to the stored stencil value if this or certain subsequent tests fail or pass, are:

```
// Provided by VK_VERSION_1_0
typedef enum VkStencilOp {
    VK_STENCIL_OP_KEEP = 0,
    VK_STENCIL_OP_ZERO = 1,
    VK_STENCIL_OP_REPLACE = 2,
    VK_STENCIL_OP_INCREMENT_AND_CLAMP = 3,
    VK_STENCIL_OP_DECREMENT_AND_CLAMP = 4,
    VK_STENCIL_OP_INVERT = 5,
    VK_STENCIL_OP_INCREMENT_AND_WRAP = 6,
    VK_STENCIL_OP_DECREMENT_AND_WRAP = 7,
} VkStencilOp;
```

- `VK_STENCIL_OP_KEEP` keeps the current value.
- `VK_STENCIL_OP_ZERO` sets the value to 0.
- `VK_STENCIL_OP_REPLACE` sets the value to `reference`.
- `VK_STENCIL_OP_INCREMENT_AND_CLAMP` increments the current value and clamps to the maximum representable unsigned value.
- `VK_STENCIL_OP_DECREMENT_AND_CLAMP` decrements the current value and clamps to 0.
- `VK_STENCIL_OP_INVERT` bitwise-inverts the current value.
- `VK_STENCIL_OP_INCREMENT_AND_WRAP` increments the current value and wraps to 0 when the maximum value would have been exceeded.
- `VK_STENCIL_OP_DECREMENT_AND_WRAP` decrements the current value and wraps to the maximum possible value when the value would go below 0.

For purposes of increment and decrement, the stencil bits are considered as an unsigned integer.

26.8. Depth Test

The depth test compares the depth value z_a in the depth/stencil attachment at each sample's framebuffer coordinates (x_f,y_f) and sample index i against the sample's depth value z_f. If there is no depth attachment then the depth test is skipped.

The depth test occurs in three stages, as detailed in the following sections.

26.8.1. Depth Clamping and Range Adjustment

If VkPipelineRasterizationStateCreateInfo::`depthClampEnable` is enabled, z_f is clamped to $[z_{min}, z_{max}]$, where z_{min} = min(n,f), z_{max} = max(n,f), and n and f are the `minDepth` and `maxDepth` depth range values of the viewport used by this fragment, respectively.

Following depth clamping:

- If z_f is not in the range $[z_{min}, z_{max}]$, then z_f is undefined following this step.

26.8.2. Depth Comparison

If the depth test is not enabled, as specified by vkCmdSetDepthTestEnable or VkPipelineDepthStencilStateCreateInfo::depthTestEnable, then this step is skipped.

The comparison operation performed is determined by the VkCompareOp value set by vkCmdSetDepthCompareOp, or by VkPipelineDepthStencilStateCreateInfo::depthCompareOp during pipeline creation. z_f and z_a are used as the *reference* and *test* values, respectively, in the operation specified by the VkCompareOp.

If the comparison evaluates to false, the coverage for the sample is set to 0.

26.8.3. Depth Attachment Writes

If depth writes are enabled, as specified by vkCmdSetDepthWriteEnable or VkPipelineDepthStencilStateCreateInfo::depthWriteEnable, and the comparison evaluated to true, the depth attachment value z_a is set to the sample's depth value z_f. If there is no depth attachment, no value is written.

To dynamically enable or disable the depth test, call:

```
// Provided by VK_VERSION_1_3
void vkCmdSetDepthTestEnable(
    VkCommandBuffer                             commandBuffer,
    VkBool32                                    depthTestEnable);
```

- commandBuffer is the command buffer into which the command will be recorded.
- depthTestEnable specifies if the depth test is enabled.

This command sets the depth test enable for subsequent drawing commands when the graphics pipeline is created with VK_DYNAMIC_STATE_DEPTH_TEST_ENABLE set in VkPipelineDynamicStateCreateInfo::pDynamicStates. Otherwise, this state is specified by the VkPipelineDepthStencilStateCreateInfo::depthTestEnable value used to create the currently active pipeline.

Valid Usage

- VUID-vkCmdSetDepthTestEnable-None-08971
  At least one of the following **must** be true:
  - the value of VkApplicationInfo::apiVersion used to create the VkInstance parent of commandBuffer is greater than or equal to Version 1.3

Valid Usage (Implicit)

- VUID-vkCmdSetDepthTestEnable-commandBuffer-parameter
  commandBuffer **must** be a valid VkCommandBuffer handle

- VUID-vkCmdSetDepthTestEnable-commandBuffer-recording
  `commandBuffer` **must** be in the recording state
- VUID-vkCmdSetDepthTestEnable-commandBuffer-cmdpool
  The `VkCommandPool` that `commandBuffer` was allocated from **must** support graphics operations

Host Synchronization

- Host access to `commandBuffer` **must** be externally synchronized
- Host access to the `VkCommandPool` that `commandBuffer` was allocated from **must** be externally synchronized

Command Properties

Command Buffer Levels	Render Pass Scope	Supported Queue Types	Command Type
Primary Secondary	Both	Graphics	State

To dynamically set the depth compare operator, call:

```
// Provided by VK_VERSION_1_3
void vkCmdSetDepthCompareOp(
    VkCommandBuffer                             commandBuffer,
    VkCompareOp                                 depthCompareOp);
```

- `commandBuffer` is the command buffer into which the command will be recorded.
- `depthCompareOp` is a VkCompareOp value specifying the comparison operator used for the Depth Comparison step of the depth test.

This command sets the depth comparison operator for subsequent drawing commands when the graphics pipeline is created with `VK_DYNAMIC_STATE_DEPTH_COMPARE_OP` set in VkPipelineDynamicStateCreateInfo::`pDynamicStates`. Otherwise, this state is specified by the VkPipelineDepthStencilStateCreateInfo::`depthCompareOp` value used to create the currently active pipeline.

Valid Usage

- VUID-vkCmdSetDepthCompareOp-None-08971
  At least one of the following **must** be true:
  - the value of VkApplicationInfo::`apiVersion` used to create the VkInstance parent of `commandBuffer` is greater than or equal to Version 1.3

Valid Usage (Implicit)

- VUID-vkCmdSetDepthCompareOp-commandBuffer-parameter
  `commandBuffer` **must** be a valid VkCommandBuffer handle
- VUID-vkCmdSetDepthCompareOp-depthCompareOp-parameter
  `depthCompareOp` **must** be a valid VkCompareOp value
- VUID-vkCmdSetDepthCompareOp-commandBuffer-recording
  `commandBuffer` **must** be in the recording state
- VUID-vkCmdSetDepthCompareOp-commandBuffer-cmdpool
  The `VkCommandPool` that `commandBuffer` was allocated from **must** support graphics operations

Host Synchronization

- Host access to `commandBuffer` **must** be externally synchronized
- Host access to the `VkCommandPool` that `commandBuffer` was allocated from **must** be externally synchronized

Command Properties

Command Buffer Levels	Render Pass Scope	Supported Queue Types	Command Type
Primary Secondary	Both	Graphics	State

To dynamically set the depth write enable, call:

```
// Provided by VK_VERSION_1_3
void vkCmdSetDepthWriteEnable(
    VkCommandBuffer                             commandBuffer,
    VkBool32                                    depthWriteEnable);
```

- `commandBuffer` is the command buffer into which the command will be recorded.
- `depthWriteEnable` specifies if depth writes are enabled.

This command sets the depth write enable for subsequent drawing commands when the graphics pipeline is created with `VK_DYNAMIC_STATE_DEPTH_WRITE_ENABLE` set in VkPipelineDynamicStateCreateInfo::`pDynamicStates`. Otherwise, this state is specified by the VkPipelineDepthStencilStateCreateInfo::`depthWriteEnable` value used to create the currently active pipeline.

Valid Usage

- VUID-vkCmdSetDepthWriteEnable-None-08971
  At least one of the following **must** be true:
  - the value of VkApplicationInfo::`apiVersion` used to create the VkInstance parent of `commandBuffer` is greater than or equal to Version 1.3

Valid Usage (Implicit)

- VUID-vkCmdSetDepthWriteEnable-commandBuffer-parameter
  `commandBuffer` **must** be a valid VkCommandBuffer handle
- VUID-vkCmdSetDepthWriteEnable-commandBuffer-recording
  `commandBuffer` **must** be in the recording state
- VUID-vkCmdSetDepthWriteEnable-commandBuffer-cmdpool
  The `VkCommandPool` that `commandBuffer` was allocated from **must** support graphics operations

Host Synchronization

- Host access to `commandBuffer` **must** be externally synchronized
- Host access to the `VkCommandPool` that `commandBuffer` was allocated from **must** be externally synchronized

Command Properties

Command Buffer Levels	Render Pass Scope	Supported Queue Types	Command Type
Primary Secondary	Both	Graphics	State

26.9. Sample Counting

Occlusion queries use query pool entries to track the number of samples that pass all the per-fragment tests. The mechanism of collecting an occlusion query value is described in Occlusion Queries.

The occlusion query sample counter increments by one for each sample with a coverage value of 1 in each fragment that survives all the per-fragment tests, including scissor, sample mask, alpha to coverage, stencil, and depth tests.

26.10. Coverage Reduction

Coverage reduction takes the coverage information for a fragment and converts that to a boolean coverage value for each color sample in each pixel covered by the fragment.

26.10.1. Pixel Coverage

Coverage for each pixel is first extracted from the total fragment coverage mask. This consists of `rasterizationSamples` unique coverage samples for each pixel in the fragment area, each with a unique sample index. If the fragment only contains a single pixel, coverage for the pixel is equivalent to the fragment coverage.

26.10.2. Color Sample Coverage

Once pixel coverage is determined, coverage for each individual color sample corresponding to that pixel is determined.

The number of `rasterizationSamples` is identical to the number of samples in the color attachments. A color sample is covered if the pixel coverage sample with the same sample index i is covered.

Chapter 27. The Framebuffer

27.1. Blending

Blending combines the incoming *source* fragment's R, G, B, and A values with the *destination* R, G, B, and A values of each sample stored in the framebuffer at the fragment's (x_f,y_f) location. Blending is performed for each color sample covered by the fragment, rather than just once for each fragment.

Source and destination values are combined according to the blend operation, quadruplets of source and destination weighting factors determined by the blend factors, and a blend constant, to obtain a new set of R, G, B, and A values, as described below.

Blending is computed and applied separately to each color attachment used by the subpass, with separate controls for each attachment.

Prior to performing the blend operation, signed and unsigned normalized fixed-point color components undergo an implied conversion to floating-point as specified by Conversion from Normalized Fixed-Point to Floating-Point. Blending computations are treated as if carried out in floating-point, and basic blend operations are performed with a precision and dynamic range no lower than that used to represent destination components.

NOTE

Blending is only defined for floating-point, UNORM, SNORM, and sRGB formats. Within those formats, the implementation may only support blending on some subset of them. Which formats support blending is indicated by `VK_FORMAT_FEATURE_COLOR_ATTACHMENT_BLEND_BIT`.

The pipeline blend state is included in the `VkPipelineColorBlendStateCreateInfo` structure during graphics pipeline creation:

The `VkPipelineColorBlendStateCreateInfo` structure is defined as:

```
// Provided by VK_VERSION_1_0
typedef struct VkPipelineColorBlendStateCreateInfo {
    VkStructureType                               sType;
    const void*                                   pNext;
    VkPipelineColorBlendStateCreateFlags          flags;
    VkBool32                                      logicOpEnable;
    VkLogicOp                                     logicOp;
    uint32_t                                      attachmentCount;
    const VkPipelineColorBlendAttachmentState*    pAttachments;
    float                                         blendConstants[4];
} VkPipelineColorBlendStateCreateInfo;
```

- `sType` is a VkStructureType value identifying this structure.
- `pNext` is `NULL` or a pointer to a structure extending this structure.
- `flags` is reserved for future use.

- `logicOpEnable` controls whether to apply Logical Operations.
- `logicOp` selects which logical operation to apply.
- `attachmentCount` is the number of VkPipelineColorBlendAttachmentState elements in `pAttachments`.
- `pAttachments` is a pointer to an array of VkPipelineColorBlendAttachmentState structures defining blend state for each color attachment.
- `blendConstants` is a pointer to an array of four values used as the R, G, B, and A components of the blend constant that are used in blending, depending on the blend factor.

Valid Usage

- VUID-VkPipelineColorBlendStateCreateInfo-pAttachments-00605
  If the `independentBlend` feature is not enabled, all elements of `pAttachments` **must** be identical
- VUID-VkPipelineColorBlendStateCreateInfo-logicOpEnable-00606
  If the `logicOp` feature is not enabled, `logicOpEnable` **must** be `VK_FALSE`
- VUID-VkPipelineColorBlendStateCreateInfo-logicOpEnable-00607
  If `logicOpEnable` is `VK_TRUE`, `logicOp` **must** be a valid VkLogicOp value
- VUID-VkPipelineColorBlendStateCreateInfo-pAttachments-07353
  If `attachmentCount` is not `0` `pAttachments` **must** be a valid pointer to an array of `attachmentCount` valid VkPipelineColorBlendAttachmentState structures

Valid Usage (Implicit)

- VUID-VkPipelineColorBlendStateCreateInfo-sType-sType
  `sType` **must** be `VK_STRUCTURE_TYPE_PIPELINE_COLOR_BLEND_STATE_CREATE_INFO`
- VUID-VkPipelineColorBlendStateCreateInfo-pNext-pNext
  `pNext` **must** be `NULL`
- VUID-VkPipelineColorBlendStateCreateInfo-flags-zerobitmask
  `flags` **must** be `0`
- VUID-VkPipelineColorBlendStateCreateInfo-pAttachments-parameter
  If `attachmentCount` is not `0`, and `pAttachments` is not `NULL`, `pAttachments` **must** be a valid pointer to an array of `attachmentCount` valid VkPipelineColorBlendAttachmentState structures

```
// Provided by VK_VERSION_1_0
typedef VkFlags VkPipelineColorBlendStateCreateFlags;
```

`VkPipelineColorBlendStateCreateFlags` is a bitmask type for setting a mask, but is currently reserved for future use.

The VkPipelineColorBlendAttachmentState structure is defined as:

```
// Provided by VK_VERSION_1_0
typedef struct VkPipelineColorBlendAttachmentState {
    VkBool32                 blendEnable;
    VkBlendFactor            srcColorBlendFactor;
    VkBlendFactor            dstColorBlendFactor;
    VkBlendOp                colorBlendOp;
    VkBlendFactor            srcAlphaBlendFactor;
    VkBlendFactor            dstAlphaBlendFactor;
    VkBlendOp                alphaBlendOp;
    VkColorComponentFlags    colorWriteMask;
} VkPipelineColorBlendAttachmentState;
```

- blendEnable controls whether blending is enabled for the corresponding color attachment. If blending is not enabled, the source fragment's color for that attachment is passed through unmodified.
- srcColorBlendFactor selects which blend factor is used to determine the source factors (S_r,S_g,S_b).
- dstColorBlendFactor selects which blend factor is used to determine the destination factors (D_r,D_g,D_b).
- colorBlendOp selects which blend operation is used to calculate the RGB values to write to the color attachment.
- srcAlphaBlendFactor selects which blend factor is used to determine the source factor S_a.
- dstAlphaBlendFactor selects which blend factor is used to determine the destination factor D_a.
- alphaBlendOp selects which blend operation is used to calculate the alpha values to write to the color attachment.
- colorWriteMask is a bitmask of VkColorComponentFlagBits specifying which of the R, G, B, and/or A components are enabled for writing, as described for the Color Write Mask.

Valid Usage

- VUID-VkPipelineColorBlendAttachmentState-srcColorBlendFactor-00608
  If the dualSrcBlend feature is not enabled, srcColorBlendFactor **must** not be VK_BLEND_FACTOR_SRC1_COLOR, VK_BLEND_FACTOR_ONE_MINUS_SRC1_COLOR, VK_BLEND_FACTOR_SRC1_ALPHA, or VK_BLEND_FACTOR_ONE_MINUS_SRC1_ALPHA
- VUID-VkPipelineColorBlendAttachmentState-dstColorBlendFactor-00609
  If the dualSrcBlend feature is not enabled, dstColorBlendFactor **must** not be VK_BLEND_FACTOR_SRC1_COLOR, VK_BLEND_FACTOR_ONE_MINUS_SRC1_COLOR, VK_BLEND_FACTOR_SRC1_ALPHA, or VK_BLEND_FACTOR_ONE_MINUS_SRC1_ALPHA
- VUID-VkPipelineColorBlendAttachmentState-srcAlphaBlendFactor-00610
  If the dualSrcBlend feature is not enabled, srcAlphaBlendFactor **must** not be VK_BLEND_FACTOR_SRC1_COLOR, VK_BLEND_FACTOR_ONE_MINUS_SRC1_COLOR, VK_BLEND_FACTOR_SRC1_ALPHA, or VK_BLEND_FACTOR_ONE_MINUS_SRC1_ALPHA

- VUID-VkPipelineColorBlendAttachmentState-dstAlphaBlendFactor-00611
  If the `dualSrcBlend` feature is not enabled, `dstAlphaBlendFactor` **must** not be `VK_BLEND_FACTOR_SRC1_COLOR`, `VK_BLEND_FACTOR_ONE_MINUS_SRC1_COLOR`, `VK_BLEND_FACTOR_SRC1_ALPHA`, or `VK_BLEND_FACTOR_ONE_MINUS_SRC1_ALPHA`

Valid Usage (Implicit)

- VUID-VkPipelineColorBlendAttachmentState-srcColorBlendFactor-parameter
  `srcColorBlendFactor` **must** be a valid VkBlendFactor value
- VUID-VkPipelineColorBlendAttachmentState-dstColorBlendFactor-parameter
  `dstColorBlendFactor` **must** be a valid VkBlendFactor value
- VUID-VkPipelineColorBlendAttachmentState-colorBlendOp-parameter
  `colorBlendOp` **must** be a valid VkBlendOp value
- VUID-VkPipelineColorBlendAttachmentState-srcAlphaBlendFactor-parameter
  `srcAlphaBlendFactor` **must** be a valid VkBlendFactor value
- VUID-VkPipelineColorBlendAttachmentState-dstAlphaBlendFactor-parameter
  `dstAlphaBlendFactor` **must** be a valid VkBlendFactor value
- VUID-VkPipelineColorBlendAttachmentState-alphaBlendOp-parameter
  `alphaBlendOp` **must** be a valid VkBlendOp value
- VUID-VkPipelineColorBlendAttachmentState-colorWriteMask-parameter
  `colorWriteMask` **must** be a valid combination of VkColorComponentFlagBits values

27.1.1. Blend Factors

The source and destination color and alpha blending factors are selected from the enum:

```
// Provided by VK_VERSION_1_0
typedef enum VkBlendFactor {
    VK_BLEND_FACTOR_ZERO = 0,
    VK_BLEND_FACTOR_ONE = 1,
    VK_BLEND_FACTOR_SRC_COLOR = 2,
    VK_BLEND_FACTOR_ONE_MINUS_SRC_COLOR = 3,
    VK_BLEND_FACTOR_DST_COLOR = 4,
    VK_BLEND_FACTOR_ONE_MINUS_DST_COLOR = 5,
    VK_BLEND_FACTOR_SRC_ALPHA = 6,
    VK_BLEND_FACTOR_ONE_MINUS_SRC_ALPHA = 7,
    VK_BLEND_FACTOR_DST_ALPHA = 8,
    VK_BLEND_FACTOR_ONE_MINUS_DST_ALPHA = 9,
    VK_BLEND_FACTOR_CONSTANT_COLOR = 10,
    VK_BLEND_FACTOR_ONE_MINUS_CONSTANT_COLOR = 11,
    VK_BLEND_FACTOR_CONSTANT_ALPHA = 12,
    VK_BLEND_FACTOR_ONE_MINUS_CONSTANT_ALPHA = 13,
    VK_BLEND_FACTOR_SRC_ALPHA_SATURATE = 14,
    VK_BLEND_FACTOR_SRC1_COLOR = 15,
    VK_BLEND_FACTOR_ONE_MINUS_SRC1_COLOR = 16,
    VK_BLEND_FACTOR_SRC1_ALPHA = 17,
    VK_BLEND_FACTOR_ONE_MINUS_SRC1_ALPHA = 18,
} VkBlendFactor;
```

The semantics of the enum values are described in the table below:

Table 25. Blend Factors

VkBlendFactor	RGB Blend Factors (S_r,S_g,S_b) or (D_r,D_g,D_b)	Alpha Blend Factor (S_a or D_a)
VK_BLEND_FACTOR_ZERO	(0,0,0)	0
VK_BLEND_FACTOR_ONE	(1,1,1)	1
VK_BLEND_FACTOR_SRC_COLOR	(R_{s0},G_{s0},B_{s0})	A_{s0}
VK_BLEND_FACTOR_ONE_MINUS_SRC_COLOR	(1-R_{s0},1-G_{s0},1-B_{s0})	1-A_{s0}
VK_BLEND_FACTOR_DST_COLOR	(R_d,G_d,B_d)	A_d
VK_BLEND_FACTOR_ONE_MINUS_DST_COLOR	(1-R_d,1-G_d,1-B_d)	1-A_d
VK_BLEND_FACTOR_SRC_ALPHA	(A_{s0},A_{s0},A_{s0})	A_{s0}
VK_BLEND_FACTOR_ONE_MINUS_SRC_ALPHA	(1-A_{s0},1-A_{s0},1-A_{s0})	1-A_{s0}
VK_BLEND_FACTOR_DST_ALPHA	(A_d,A_d,A_d)	A_d
VK_BLEND_FACTOR_ONE_MINUS_DST_ALPHA	(1-A_d,1-A_d,1-A_d)	1-A_d
VK_BLEND_FACTOR_CONSTANT_COLOR	(R_c,G_c,B_c)	A_c
VK_BLEND_FACTOR_ONE_MINUS_CONSTANT_COLOR	(1-R_c,1-G_c,1-B_c)	1-A_c
VK_BLEND_FACTOR_CONSTANT_ALPHA	(A_c,A_c,A_c)	A_c

VkBlendFactor	RGB Blend Factors (S_r,S_g,S_b) or (D_r,D_g,D_b)	Alpha Blend Factor (S_a or D_a)
VK_BLEND_FACTOR_ONE_MINUS_CONSTANT_ALPHA	(1-A_c,1-A_c,1-A_c)	1-A_c
VK_BLEND_FACTOR_SRC_ALPHA_SATURATE	(f,f,f); f = min(A_{s0},1-A_d)	1
VK_BLEND_FACTOR_SRC1_COLOR	(R_{s1},G_{s1},B_{s1})	A_{s1}
VK_BLEND_FACTOR_ONE_MINUS_SRC1_COLOR	(1-R_{s1},1-G_{s1},1-B_{s1})	1-A_{s1}
VK_BLEND_FACTOR_SRC1_ALPHA	(A_{s1},A_{s1},A_{s1})	A_{s1}
VK_BLEND_FACTOR_ONE_MINUS_SRC1_ALPHA	(1-A_{s1},1-A_{s1},1-A_{s1})	1-A_{s1}

In this table, the following conventions are used:

- R_{s0},G_{s0},B_{s0} and A_{s0} represent the first source color R, G, B, and A components, respectively, for the fragment output location corresponding to the color attachment being blended.
- R_{s1},G_{s1},B_{s1} and A_{s1} represent the second source color R, G, B, and A components, respectively, used in dual source blending modes, for the fragment output location corresponding to the color attachment being blended.
- R_d,G_d,B_d and A_d represent the R, G, B, and A components of the destination color. That is, the color currently in the corresponding color attachment for this fragment/sample.
- R_c,G_c,B_c and A_c represent the blend constant R, G, B, and A components, respectively.

To dynamically set and change the blend constants, call:

```
// Provided by VK_VERSION_1_0
void vkCmdSetBlendConstants(
    VkCommandBuffer                             commandBuffer,
    const float                                 blendConstants[4]);
```

- `commandBuffer` is the command buffer into which the command will be recorded.
- `blendConstants` is a pointer to an array of four values specifying the R_c, G_c, B_c, and A_c components of the blend constant color used in blending, depending on the blend factor.

This command sets blend constants for subsequent drawing commands when the graphics pipeline is created with `VK_DYNAMIC_STATE_BLEND_CONSTANTS` set in VkPipelineDynamicStateCreateInfo ::`pDynamicStates`. Otherwise, this state is specified by the VkPipelineColorBlendStateCreateInfo ::`blendConstants` values used to create the currently active pipeline.

Valid Usage (Implicit)

- VUID-vkCmdSetBlendConstants-commandBuffer-parameter `commandBuffer` **must** be a valid VkCommandBuffer handle
- VUID-vkCmdSetBlendConstants-commandBuffer-recording

commandBuffer **must** be in the recording state

- VUID-vkCmdSetBlendConstants-commandBuffer-cmdpool
  The VkCommandPool that commandBuffer was allocated from **must** support graphics operations

Host Synchronization

- Host access to commandBuffer **must** be externally synchronized
- Host access to the VkCommandPool that commandBuffer was allocated from **must** be externally synchronized

Command Properties

Command Buffer Levels	Render Pass Scope	Supported Queue Types	Command Type
Primary Secondary	Both	Graphics	State

27.1.2. Dual-Source Blending

Blend factors that use the secondary color input (R_{s1},G_{s1},B_{s1},A_{s1}) (VK_BLEND_FACTOR_SRC1_COLOR, VK_BLEND_FACTOR_ONE_MINUS_SRC1_COLOR, VK_BLEND_FACTOR_SRC1_ALPHA, and VK_BLEND_FACTOR_ONE_MINUS_SRC1_ALPHA) **may** consume implementation resources that could otherwise be used for rendering to multiple color attachments. Therefore, the number of color attachments that **can** be used in a framebuffer **may** be lower when using dual-source blending.

Dual-source blending is only supported if the dualSrcBlend feature is enabled.

The maximum number of color attachments that **can** be used in a subpass when using dual-source blending functions is implementation-dependent and is reported as the maxFragmentDualSrcAttachments member of VkPhysicalDeviceLimits.

Color outputs **can** be bound to the first and second inputs of the blender using the Index decoration, as described in Fragment Output Interface. If the second color input to the blender is not written in the shader, or if no output is bound to the second input of a blender, the value of the second input is undefined.

27.1.3. Blend Operations

Once the source and destination blend factors have been selected, they along with the source and destination components are passed to the blending operations. RGB and alpha components **can** use different operations. Possible values of VkBlendOp, specifying the operations, are:

```
// Provided by VK_VERSION_1_0
typedef enum VkBlendOp {
    VK_BLEND_OP_ADD = 0,
    VK_BLEND_OP_SUBTRACT = 1,
    VK_BLEND_OP_REVERSE_SUBTRACT = 2,
    VK_BLEND_OP_MIN = 3,
    VK_BLEND_OP_MAX = 4,
} VkBlendOp;
```

The semantics of the basic blend operations are described in the table below:

Table 26. Basic Blend Operations

VkBlendOp	RGB Components	Alpha Component
VK_BLEND_OP_ADD	$R = R_{s0} \times S_r + R_d \times D_r$ $G = G_{s0} \times S_g + G_d \times D_g$ $B = B_{s0} \times S_b + B_d \times D_b$	$A = A_{s0} \times S_a + A_d \times D_a$
VK_BLEND_OP_SUBTRACT	$R = R_{s0} \times S_r - R_d \times D_r$ $G = G_{s0} \times S_g - G_d \times D_g$ $B = B_{s0} \times S_b - B_d \times D_b$	$A = A_{s0} \times S_a - A_d \times D_a$
VK_BLEND_OP_REVERSE_SUBTRACT	$R = R_d \times D_r - R_{s0} \times S_r$ $G = G_d \times D_g - G_{s0} \times S_g$ $B = B_d \times D_b - B_{s0} \times S_b$	$A = A_d \times D_a - A_{s0} \times S_a$
VK_BLEND_OP_MIN	$R = \min(R_{s0},R_d)$ $G = \min(G_{s0},G_d)$ $B = \min(B_{s0},B_d)$	$A = \min(A_{s0},A_d)$
VK_BLEND_OP_MAX	$R = \max(R_{s0},R_d)$ $G = \max(G_{s0},G_d)$ $B = \max(B_{s0},B_d)$	$A = \max(A_{s0},A_d)$

In this table, the following conventions are used:

- R_{s0}, G_{s0}, B_{s0} and A_{s0} represent the first source color R, G, B, and A components, respectively.
- R_d, G_d, B_d and A_d represent the R, G, B, and A components of the destination color. That is, the color currently in the corresponding color attachment for this fragment/sample.
- S_r, S_g, S_b and S_a represent the source blend factor R, G, B, and A components, respectively.
- D_r, D_g, D_b and D_a represent the destination blend factor R, G, B, and A components, respectively.

The blending operation produces a new set of values R, G, B and A, which are written to the framebuffer attachment. If blending is not enabled for this attachment, then R, G, B and A are assigned R_{s0}, G_{s0}, B_{s0} and A_{s0}, respectively.

If the color attachment is fixed-point, the components of the source and destination values and blend factors are each clamped to [0,1] or [-1,1] respectively for an unsigned normalized or signed normalized color attachment prior to evaluating the blend operations. If the color attachment is floating-point, no clamping occurs.

If the numeric format of a framebuffer attachment uses sRGB encoding, the R, G, and B destination color values (after conversion from fixed-point to floating-point) are considered to be encoded for the sRGB color space and hence are linearized prior to their use in blending. Each R, G, and B component is converted from nonlinear to linear as described in the “sRGB EOTF” section of the Khronos Data Format Specification. If the format is not sRGB, no linearization is performed.

If the numeric format of a framebuffer attachment uses sRGB encoding, then the final R, G and B values are converted into the nonlinear sRGB representation before being written to the framebuffer attachment as described in the “sRGB $EOTF^{-1}$” section of the Khronos Data Format

Specification.

If the numeric format of a framebuffer color attachment is not sRGB encoded then the resulting c_s values for R, G and B are unmodified. The value of A is never sRGB encoded. That is, the alpha component is always stored in memory as linear.

If the framebuffer color attachment is VK_ATTACHMENT_UNUSED, no writes are performed through that attachment. Writes are not performed to framebuffer color attachments greater than or equal to the VkSubpassDescription::colorAttachmentCount or VkSubpassDescription2::colorAttachmentCount value.

27.2. Logical Operations

The application **can** enable a *logical operation* between the fragment's color values and the existing value in the framebuffer attachment. This logical operation is applied prior to updating the framebuffer attachment. Logical operations are applied only for signed and unsigned integer and normalized integer framebuffers. Logical operations are not applied to floating-point or sRGB format color attachments.

Logical operations are controlled by the logicOpEnable and logicOp members of VkPipelineColorBlendStateCreateInfo. If logicOpEnable is VK_TRUE, then a logical operation selected by logicOp is applied between each color attachment and the fragment's corresponding output value, and blending of all attachments is treated as if it were disabled. Any attachments using color formats for which logical operations are not supported simply pass through the color values unmodified. The logical operation is applied independently for each of the red, green, blue, and alpha components. The logicOp is selected from the following operations:

```
// Provided by VK_VERSION_1_0
typedef enum VkLogicOp {
    VK_LOGIC_OP_CLEAR = 0,
    VK_LOGIC_OP_AND = 1,
    VK_LOGIC_OP_AND_REVERSE = 2,
    VK_LOGIC_OP_COPY = 3,
    VK_LOGIC_OP_AND_INVERTED = 4,
    VK_LOGIC_OP_NO_OP = 5,
    VK_LOGIC_OP_XOR = 6,
    VK_LOGIC_OP_OR = 7,
    VK_LOGIC_OP_NOR = 8,
    VK_LOGIC_OP_EQUIVALENT = 9,
    VK_LOGIC_OP_INVERT = 10,
    VK_LOGIC_OP_OR_REVERSE = 11,
    VK_LOGIC_OP_COPY_INVERTED = 12,
    VK_LOGIC_OP_OR_INVERTED = 13,
    VK_LOGIC_OP_NAND = 14,
    VK_LOGIC_OP_SET = 15,
} VkLogicOp;
```

The logical operations supported by Vulkan are summarized in the following table in which

- ¬ is bitwise invert,
- ∧ is bitwise and,
- ∨ is bitwise or,
- ⊕ is bitwise exclusive or,
- s is the fragment's R_{s0}, G_{s0}, B_{s0} or A_{s0} component value for the fragment output corresponding to the color attachment being updated, and
- d is the color attachment's R, G, B or A component value:

Table 27. Logical Operations

Mode	Operation
VK_LOGIC_OP_CLEAR	0
VK_LOGIC_OP_AND	s ∧ d
VK_LOGIC_OP_AND_REVERSE	s ∧ ¬ d
VK_LOGIC_OP_COPY	s
VK_LOGIC_OP_AND_INVERTED	¬ s ∧ d
VK_LOGIC_OP_NO_OP	d
VK_LOGIC_OP_XOR	s ⊕ d
VK_LOGIC_OP_OR	s ∨ d
VK_LOGIC_OP_NOR	¬ (s ∨ d)
VK_LOGIC_OP_EQUIVALENT	¬ (s ⊕ d)
VK_LOGIC_OP_INVERT	¬ d
VK_LOGIC_OP_OR_REVERSE	s ∨ ¬ d
VK_LOGIC_OP_COPY_INVERTED	¬ s
VK_LOGIC_OP_OR_INVERTED	¬ s ∨ d
VK_LOGIC_OP_NAND	¬ (s ∧ d)
VK_LOGIC_OP_SET	all 1s

The result of the logical operation is then written to the color attachment as controlled by the component write mask, described in Blend Operations.

27.3. Color Write Mask

Bits which **can** be set in VkPipelineColorBlendAttachmentState::colorWriteMask, determining whether the final color values R, G, B and A are written to the framebuffer attachment, are:

```
// Provided by VK_VERSION_1_0
typedef enum VkColorComponentFlagBits {
    VK_COLOR_COMPONENT_R_BIT = 0x00000001,
    VK_COLOR_COMPONENT_G_BIT = 0x00000002,
    VK_COLOR_COMPONENT_B_BIT = 0x00000004,
    VK_COLOR_COMPONENT_A_BIT = 0x00000008,
} VkColorComponentFlagBits;
```

- VK_COLOR_COMPONENT_R_BIT specifies that the R value is written to the color attachment for the appropriate sample. Otherwise, the value in memory is unmodified.
- VK_COLOR_COMPONENT_G_BIT specifies that the G value is written to the color attachment for the appropriate sample. Otherwise, the value in memory is unmodified.
- VK_COLOR_COMPONENT_B_BIT specifies that the B value is written to the color attachment for the appropriate sample. Otherwise, the value in memory is unmodified.
- VK_COLOR_COMPONENT_A_BIT specifies that the A value is written to the color attachment for the appropriate sample. Otherwise, the value in memory is unmodified.

The color write mask operation is applied regardless of whether blending is enabled.

```
// Provided by VK_VERSION_1_0
typedef VkFlags VkColorComponentFlags;
```

VkColorComponentFlags is a bitmask type for setting a mask of zero or more VkColorComponentFlagBits.

Chapter 28. Dispatching Commands

Dispatching commands (commands with `Dispatch` in the name) provoke work in a compute pipeline. Dispatching commands are recorded into a command buffer and when executed by a queue, will produce work which executes according to the bound compute pipeline. A compute pipeline **must** be bound to a command buffer before any dispatching commands are recorded in that command buffer.

To record a dispatch, call:

```
// Provided by VK_VERSION_1_0
void vkCmdDispatch(
    VkCommandBuffer                             commandBuffer,
    uint32_t                                    groupCountX,
    uint32_t                                    groupCountY,
    uint32_t                                    groupCountZ);
```

- `commandBuffer` is the command buffer into which the command will be recorded.
- `groupCountX` is the number of local workgroups to dispatch in the X dimension.
- `groupCountY` is the number of local workgroups to dispatch in the Y dimension.
- `groupCountZ` is the number of local workgroups to dispatch in the Z dimension.

When the command is executed, a global workgroup consisting of `groupCountX` × `groupCountY` × `groupCountZ` local workgroups is assembled.

Valid Usage

- VUID-vkCmdDispatch-magFilter-04553
  If a VkSampler created with `magFilter` or `minFilter` equal to `VK_FILTER_LINEAR`, `reductionMode` equal to `VK_SAMPLER_REDUCTION_MODE_WEIGHTED_AVERAGE`, and `compareEnable` equal to `VK_FALSE` is used to sample a VkImageView as a result of this command, then the image view's format features **must** contain `VK_FORMAT_FEATURE_SAMPLED_IMAGE_FILTER_LINEAR_BIT`
- VUID-vkCmdDispatch-magFilter-09598
  If a VkSampler created with `magFilter` or `minFilter` equal to `VK_FILTER_LINEAR` and `reductionMode` equal to either `VK_SAMPLER_REDUCTION_MODE_MIN` or `VK_SAMPLER_REDUCTION_MODE_MAX` is used to sample a VkImageView as a result of this command, then the image view's format features **must** contain `VK_FORMAT_FEATURE_SAMPLED_IMAGE_FILTER_MINMAX_BIT`
- VUID-vkCmdDispatch-mipmapMode-04770
  If a VkSampler created with `mipmapMode` equal to `VK_SAMPLER_MIPMAP_MODE_LINEAR`, `reductionMode` equal to `VK_SAMPLER_REDUCTION_MODE_WEIGHTED_AVERAGE`, and `compareEnable` equal to `VK_FALSE` is used to sample a VkImageView as a result of this command, then the image view's format features **must** contain `VK_FORMAT_FEATURE_SAMPLED_IMAGE_FILTER_LINEAR_BIT`

- VUID-vkCmdDispatch-mipmapMode-09599
  If a VkSampler created with mipmapMode equal to VK_SAMPLER_MIPMAP_MODE_LINEAR and reductionMode equal to either VK_SAMPLER_REDUCTION_MODE_MIN or VK_SAMPLER_REDUCTION_MODE_MAX is used to sample a VkImageView as a result of this command, then the image view's format features **must** contain VK_FORMAT_FEATURE_SAMPLED_IMAGE_FILTER_MINMAX_BIT
- VUID-vkCmdDispatch-unnormalizedCoordinates-09635
  If a VkSampler created with unnormalizedCoordinates equal to VK_TRUE is used to sample a VkImageView as a result of this command, then the image view's levelCount and layerCount **must** be 1
- VUID-vkCmdDispatch-unnormalizedCoordinates-09636
  If a VkSampler created with unnormalizedCoordinates equal to VK_TRUE is used to sample a VkImageView as a result of this command, then the image view's viewType **must** be VK_IMAGE_VIEW_TYPE_1D or VK_IMAGE_VIEW_TYPE_2D
- VUID-vkCmdDispatch-None-06479
  If a VkImageView is sampled with depth comparison, the image view's format features **must** contain VK_FORMAT_FEATURE_2_SAMPLED_IMAGE_DEPTH_COMPARISON_BIT
- VUID-vkCmdDispatch-None-02691
  If a VkImageView is accessed using atomic operations as a result of this command, then the image view's format features **must** contain VK_FORMAT_FEATURE_STORAGE_IMAGE_ATOMIC_BIT
- VUID-vkCmdDispatch-None-07888
  If a VK_DESCRIPTOR_TYPE_STORAGE_TEXEL_BUFFER descriptor is accessed using atomic operations as a result of this command, then the storage texel buffer's format features **must** contain VK_FORMAT_FEATURE_STORAGE_TEXEL_BUFFER_ATOMIC_BIT
- VUID-vkCmdDispatch-OpTypeImage-07027
  For any VkImageView being written as a storage image where the image format field of the OpTypeImage is Unknown, the view's format features **must** contain VK_FORMAT_FEATURE_2_STORAGE_WRITE_WITHOUT_FORMAT_BIT
- VUID-vkCmdDispatch-OpTypeImage-07028
  For any VkImageView being read as a storage image where the image format field of the OpTypeImage is Unknown, the view's format features **must** contain VK_FORMAT_FEATURE_2_STORAGE_READ_WITHOUT_FORMAT_BIT
- VUID-vkCmdDispatch-OpTypeImage-07029
  For any VkBufferView being written as a storage texel buffer where the image format field of the OpTypeImage is Unknown, the view's buffer features **must** contain VK_FORMAT_FEATURE_2_STORAGE_WRITE_WITHOUT_FORMAT_BIT
- VUID-vkCmdDispatch-OpTypeImage-07030
  Any VkBufferView being read as a storage texel buffer where the image format field of the OpTypeImage is Unknown then the view's buffer features **must** contain VK_FORMAT_FEATURE_2_STORAGE_READ_WITHOUT_FORMAT_BIT
- VUID-vkCmdDispatch-None-08600
  For each set *n* that is statically used by a bound shader, a descriptor set **must** have been bound to *n* at the same pipeline bind point, with a VkPipelineLayout that is compatible for

set *n*, with the VkPipelineLayout used to create the current VkPipeline , as described in Pipeline Layout Compatibility

- VUID-vkCmdDispatch-None-08601
  For each push constant that is statically used by a bound shader, a push constant value **must** have been set for the same pipeline bind point, with a VkPipelineLayout that is compatible for push constants, with the VkPipelineLayout used to create the current VkPipeline , as described in Pipeline Layout Compatibility
- VUID-vkCmdDispatch-None-10068
  For each array of resources that is used by a bound shader, the indices used to access members of the array **must** be less than the descriptor count for the identified binding in the descriptor sets used by this command
- VUID-vkCmdDispatch-maintenance4-08602
  If the `maintenance4` feature is not enabled, then for each push constant that is statically used by a bound shader, a push constant value **must** have been set for the same pipeline bind point, with a VkPipelineLayout that is compatible for push constants, with the VkPipelineLayout used to create the current VkPipeline , as described in Pipeline Layout Compatibility
- VUID-vkCmdDispatch-None-08114
  Descriptors in each bound descriptor set, specified via vkCmdBindDescriptorSets, **must** be valid as described by descriptor validity if they are statically used by a bound shader
- VUID-vkCmdDispatch-None-08606
  A valid pipeline **must** be bound to the pipeline bind point used by this command
- VUID-vkCmdDispatch-None-08608
  There **must** not have been any calls to dynamic state setting commands for any state specified statically in the VkPipeline object bound to the pipeline bind point used by this command, since that pipeline was bound
- VUID-vkCmdDispatch-None-08609
  If the VkPipeline object bound to the pipeline bind point used by this command accesses a VkSampler object that uses unnormalized coordinates, that sampler **must** not be used to sample from any VkImage with a VkImageView of the type `VK_IMAGE_VIEW_TYPE_3D`, `VK_IMAGE_VIEW_TYPE_CUBE`, `VK_IMAGE_VIEW_TYPE_1D_ARRAY`, `VK_IMAGE_VIEW_TYPE_2D_ARRAY` or `VK_IMAGE_VIEW_TYPE_CUBE_ARRAY`, in any shader stage
- VUID-vkCmdDispatch-None-08610
  If the VkPipeline object bound to the pipeline bind point used by this command accesses a VkSampler object that uses unnormalized coordinates, that sampler **must** not be used with any of the SPIR-V `OpImageSample*` or `OpImageSparseSample*` instructions with `ImplicitLod`, `Dref` or `Proj` in their name, in any shader stage
- VUID-vkCmdDispatch-None-08611
  If the VkPipeline object bound to the pipeline bind point used by this command accesses a VkSampler object that uses unnormalized coordinates, that sampler **must** not be used with any of the SPIR-V `OpImageSample*` or `OpImageSparseSample*` instructions that includes a LOD bias or any offset values, in any shader stage
- VUID-vkCmdDispatch-uniformBuffers-06935
  If any stage of the VkPipeline object bound to the pipeline bind point used by this

command accesses a uniform buffer, and the `robustBufferAccess` feature is not enabled, that stage **must** not access values outside of the range of the buffer as specified in the descriptor set bound to the same pipeline bind point

- VUID-vkCmdDispatch-storageBuffers-06936
  If any stage of the VkPipeline object bound to the pipeline bind point used by this command accesses a storage buffer, and the `robustBufferAccess` feature is not enabled, that stage **must** not access values outside of the range of the buffer as specified in the descriptor set bound to the same pipeline bind point
- VUID-vkCmdDispatch-commandBuffer-02707
  If `commandBuffer` is an unprotected command buffer and `protectedNoFault` is not supported, any resource accessed by bound shaders **must** not be a protected resource
- VUID-vkCmdDispatch-None-06550
  If a bound shader accesses a VkSampler or VkImageView object that enables sampler $Y'C_BC_R$ conversion, that object **must** only be used with `OpImageSample*` or `OpImageSparseSample*` instructions
- VUID-vkCmdDispatch-ConstOffset-06551
  If a bound shader accesses a VkSampler or VkImageView object that enables sampler $Y'C_BC_R$ conversion, that object **must** not use the `ConstOffset` and `Offset` operands
- VUID-vkCmdDispatch-viewType-07752
  If a VkImageView is accessed as a result of this command, then the image view's `viewType` **must** match the `Dim` operand of the `OpTypeImage` as described in Compatibility Between SPIR-V Image Dimensions and Vulkan ImageView Types
- VUID-vkCmdDispatch-format-07753
  If a VkImageView is accessed as a result of this command, then the numeric type of the image view's `format` and the `Sampled Type` operand of the `OpTypeImage` **must** match
- VUID-vkCmdDispatch-OpImageWrite-08795
  If a VkImageView is accessed using `OpImageWrite` as a result of this command, then the `Type` of the `Texel` operand of that instruction **must** have at least as many components as the image view's format
- VUID-vkCmdDispatch-OpImageWrite-04469
  If a VkBufferView is accessed using `OpImageWrite` as a result of this command, then the `Type` of the `Texel` operand of that instruction **must** have at least as many components as the buffer view's format
- VUID-vkCmdDispatch-None-07288
  Any shader invocation executed by this command **must** terminate
- VUID-vkCmdDispatch-None-09600
  If a descriptor with type equal to any of `VK_DESCRIPTOR_TYPE_SAMPLED_IMAGE`, `VK_DESCRIPTOR_TYPE_STORAGE_IMAGE`, or `VK_DESCRIPTOR_TYPE_INPUT_ATTACHMENT` is accessed as a result of this command, the image subresource identified by that descriptor **must** be in the image layout identified when the descriptor was written
- VUID-vkCmdDispatch-commandBuffer-02712
  If `commandBuffer` is a protected command buffer and `protectedNoFault` is not supported, any resource written to by the `VkPipeline` object bound to the pipeline bind point used by

this command **must** not be an unprotected resource

- VUID-vkCmdDispatch-commandBuffer-02713
  If `commandBuffer` is a protected command buffer and `protectedNoFault` is not supported, pipeline stages other than the framebuffer-space and compute stages in the `VkPipeline` object bound to the pipeline bind point used by this command **must** not write to any resource
- VUID-vkCmdDispatch-groupCountX-00386
  `groupCountX` **must** be less than or equal to `VkPhysicalDeviceLimits::maxComputeWorkGroupCount`[0]
- VUID-vkCmdDispatch-groupCountY-00387
  `groupCountY` **must** be less than or equal to `VkPhysicalDeviceLimits::maxComputeWorkGroupCount`[1]
- VUID-vkCmdDispatch-groupCountZ-00388
  `groupCountZ` **must** be less than or equal to `VkPhysicalDeviceLimits::maxComputeWorkGroupCount`[2]

Valid Usage (Implicit)

- VUID-vkCmdDispatch-commandBuffer-parameter
  `commandBuffer` **must** be a valid VkCommandBuffer handle
- VUID-vkCmdDispatch-commandBuffer-recording
  `commandBuffer` **must** be in the recording state
- VUID-vkCmdDispatch-commandBuffer-cmdpool
  The `VkCommandPool` that `commandBuffer` was allocated from **must** support compute operations
- VUID-vkCmdDispatch-renderpass
  This command **must** only be called outside of a render pass instance

Host Synchronization

- Host access to `commandBuffer` **must** be externally synchronized
- Host access to the `VkCommandPool` that `commandBuffer` was allocated from **must** be externally synchronized

Command Properties

Command Buffer Levels	Render Pass Scope	Supported Queue Types	Command Type
Primary Secondary	Outside	Compute	Action

To record an indirect dispatching command, call:

```
// Provided by VK_VERSION_1_0
void vkCmdDispatchIndirect(
    VkCommandBuffer                             commandBuffer,
    VkBuffer                                    buffer,
    VkDeviceSize                                offset);
```

- `commandBuffer` is the command buffer into which the command will be recorded.
- `buffer` is the buffer containing dispatch parameters.
- `offset` is the byte offset into `buffer` where parameters begin.

`vkCmdDispatchIndirect` behaves similarly to vkCmdDispatch except that the parameters are read by the device from a buffer during execution. The parameters of the dispatch are encoded in a VkDispatchIndirectCommand structure taken from `buffer` starting at `offset`.

Valid Usage

- VUID-vkCmdDispatchIndirect-magFilter-04553
  If a VkSampler created with `magFilter` or `minFilter` equal to `VK_FILTER_LINEAR`, `reductionMode` equal to `VK_SAMPLER_REDUCTION_MODE_WEIGHTED_AVERAGE`, and `compareEnable` equal to `VK_FALSE` is used to sample a VkImageView as a result of this command, then the image view's format features **must** contain `VK_FORMAT_FEATURE_SAMPLED_IMAGE_FILTER_LINEAR_BIT`
- VUID-vkCmdDispatchIndirect-magFilter-09598
  If a VkSampler created with `magFilter` or `minFilter` equal to `VK_FILTER_LINEAR` and `reductionMode` equal to either `VK_SAMPLER_REDUCTION_MODE_MIN` or `VK_SAMPLER_REDUCTION_MODE_MAX` is used to sample a VkImageView as a result of this command, then the image view's format features **must** contain `VK_FORMAT_FEATURE_SAMPLED_IMAGE_FILTER_MINMAX_BIT`
- VUID-vkCmdDispatchIndirect-mipmapMode-04770
  If a VkSampler created with `mipmapMode` equal to `VK_SAMPLER_MIPMAP_MODE_LINEAR`, `reductionMode` equal to `VK_SAMPLER_REDUCTION_MODE_WEIGHTED_AVERAGE`, and `compareEnable` equal to `VK_FALSE` is used to sample a VkImageView as a result of this command, then the image view's format features **must** contain `VK_FORMAT_FEATURE_SAMPLED_IMAGE_FILTER_LINEAR_BIT`
- VUID-vkCmdDispatchIndirect-mipmapMode-09599
  If a VkSampler created with `mipmapMode` equal to `VK_SAMPLER_MIPMAP_MODE_LINEAR` and `reductionMode` equal to either `VK_SAMPLER_REDUCTION_MODE_MIN` or `VK_SAMPLER_REDUCTION_MODE_MAX` is used to sample a VkImageView as a result of this command, then the image view's format features **must** contain `VK_FORMAT_FEATURE_SAMPLED_IMAGE_FILTER_MINMAX_BIT`
- VUID-vkCmdDispatchIndirect-unnormalizedCoordinates-09635
  If a VkSampler created with `unnormalizedCoordinates` equal to `VK_TRUE` is used to sample a VkImageView as a result of this command, then the image view's `levelCount` and

`layerCount` **must** be 1

- VUID-vkCmdDispatchIndirect-unnormalizedCoordinates-09636
  If a VkSampler created with `unnormalizedCoordinates` equal to `VK_TRUE` is used to sample a VkImageView as a result of this command, then the image view's `viewType` **must** be `VK_IMAGE_VIEW_TYPE_1D` or `VK_IMAGE_VIEW_TYPE_2D`
- VUID-vkCmdDispatchIndirect-None-06479
  If a VkImageView is sampled with depth comparison, the image view's format features **must** contain `VK_FORMAT_FEATURE_2_SAMPLED_IMAGE_DEPTH_COMPARISON_BIT`
- VUID-vkCmdDispatchIndirect-None-02691
  If a VkImageView is accessed using atomic operations as a result of this command, then the image view's format features **must** contain `VK_FORMAT_FEATURE_STORAGE_IMAGE_ATOMIC_BIT`
- VUID-vkCmdDispatchIndirect-None-07888
  If a `VK_DESCRIPTOR_TYPE_STORAGE_TEXEL_BUFFER` descriptor is accessed using atomic operations as a result of this command, then the storage texel buffer's format features **must** contain `VK_FORMAT_FEATURE_STORAGE_TEXEL_BUFFER_ATOMIC_BIT`
- VUID-vkCmdDispatchIndirect-OpTypeImage-07027
  For any VkImageView being written as a storage image where the image format field of the `OpTypeImage` is `Unknown`, the view's format features **must** contain `VK_FORMAT_FEATURE_2_STORAGE_WRITE_WITHOUT_FORMAT_BIT`
- VUID-vkCmdDispatchIndirect-OpTypeImage-07028
  For any VkImageView being read as a storage image where the image format field of the `OpTypeImage` is `Unknown`, the view's format features **must** contain `VK_FORMAT_FEATURE_2_STORAGE_READ_WITHOUT_FORMAT_BIT`
- VUID-vkCmdDispatchIndirect-OpTypeImage-07029
  For any VkBufferView being written as a storage texel buffer where the image format field of the `OpTypeImage` is `Unknown`, the view's buffer features **must** contain `VK_FORMAT_FEATURE_2_STORAGE_WRITE_WITHOUT_FORMAT_BIT`
- VUID-vkCmdDispatchIndirect-OpTypeImage-07030
  Any VkBufferView being read as a storage texel buffer where the image format field of the `OpTypeImage` is `Unknown` then the view's buffer features **must** contain `VK_FORMAT_FEATURE_2_STORAGE_READ_WITHOUT_FORMAT_BIT`
- VUID-vkCmdDispatchIndirect-None-08600
  For each set *n* that is statically used by a bound shader, a descriptor set **must** have been bound to *n* at the same pipeline bind point, with a VkPipelineLayout that is compatible for set *n*, with the VkPipelineLayout used to create the current VkPipeline , as described in Pipeline Layout Compatibility
- VUID-vkCmdDispatchIndirect-None-08601
  For each push constant that is statically used by a bound shader, a push constant value **must** have been set for the same pipeline bind point, with a VkPipelineLayout that is compatible for push constants, with the VkPipelineLayout used to create the current VkPipeline , as described in Pipeline Layout Compatibility
- VUID-vkCmdDispatchIndirect-None-10068

For each array of resources that is used by a bound shader, the indices used to access members of the array **must** be less than the descriptor count for the identified binding in the descriptor sets used by this command

- VUID-vkCmdDispatchIndirect-maintenance4-08602
  If the `maintenance4` feature is not enabled, then for each push constant that is statically used by a bound shader, a push constant value **must** have been set for the same pipeline bind point, with a VkPipelineLayout that is compatible for push constants, with the VkPipelineLayout used to create the current VkPipeline , as described in Pipeline Layout Compatibility
- VUID-vkCmdDispatchIndirect-None-08114
  Descriptors in each bound descriptor set, specified via vkCmdBindDescriptorSets, **must** be valid as described by descriptor validity if they are statically used by a bound shader
- VUID-vkCmdDispatchIndirect-None-08606
  A valid pipeline **must** be bound to the pipeline bind point used by this command
- VUID-vkCmdDispatchIndirect-None-08608
  There **must** not have been any calls to dynamic state setting commands for any state specified statically in the VkPipeline object bound to the pipeline bind point used by this command, since that pipeline was bound
- VUID-vkCmdDispatchIndirect-None-08609
  If the VkPipeline object bound to the pipeline bind point used by this command accesses a VkSampler object that uses unnormalized coordinates, that sampler **must** not be used to sample from any VkImage with a VkImageView of the type `VK_IMAGE_VIEW_TYPE_3D`, `VK_IMAGE_VIEW_TYPE_CUBE`, `VK_IMAGE_VIEW_TYPE_1D_ARRAY`, `VK_IMAGE_VIEW_TYPE_2D_ARRAY` or `VK_IMAGE_VIEW_TYPE_CUBE_ARRAY`, in any shader stage
- VUID-vkCmdDispatchIndirect-None-08610
  If the VkPipeline object bound to the pipeline bind point used by this command accesses a VkSampler object that uses unnormalized coordinates, that sampler **must** not be used with any of the SPIR-V `OpImageSample*` or `OpImageSparseSample*` instructions with `ImplicitLod`, `Dref` or `Proj` in their name, in any shader stage
- VUID-vkCmdDispatchIndirect-None-08611
  If the VkPipeline object bound to the pipeline bind point used by this command accesses a VkSampler object that uses unnormalized coordinates, that sampler **must** not be used with any of the SPIR-V `OpImageSample*` or `OpImageSparseSample*` instructions that includes a LOD bias or any offset values, in any shader stage
- VUID-vkCmdDispatchIndirect-uniformBuffers-06935
  If any stage of the VkPipeline object bound to the pipeline bind point used by this command accesses a uniform buffer, and the `robustBufferAccess` feature is not enabled, that stage **must** not access values outside of the range of the buffer as specified in the descriptor set bound to the same pipeline bind point
- VUID-vkCmdDispatchIndirect-storageBuffers-06936
  If any stage of the VkPipeline object bound to the pipeline bind point used by this command accesses a storage buffer, and the `robustBufferAccess` feature is not enabled, that stage **must** not access values outside of the range of the buffer as specified in the descriptor set bound to the same pipeline bind point

- VUID-vkCmdDispatchIndirect-commandBuffer-02707
  If `commandBuffer` is an unprotected command buffer and `protectedNoFault` is not supported, any resource accessed by bound shaders **must** not be a protected resource
- VUID-vkCmdDispatchIndirect-None-06550
  If a bound shader accesses a VkSampler or VkImageView object that enables sampler $Y'C_BC_R$ conversion, that object **must** only be used with `OpImageSample*` or `OpImageSparseSample*` instructions
- VUID-vkCmdDispatchIndirect-ConstOffset-06551
  If a bound shader accesses a VkSampler or VkImageView object that enables sampler $Y'C_BC_R$ conversion, that object **must** not use the `ConstOffset` and `Offset` operands
- VUID-vkCmdDispatchIndirect-viewType-07752
  If a VkImageView is accessed as a result of this command, then the image view's `viewType` **must** match the `Dim` operand of the `OpTypeImage` as described in Compatibility Between SPIR-V Image Dimensions and Vulkan ImageView Types
- VUID-vkCmdDispatchIndirect-format-07753
  If a VkImageView is accessed as a result of this command, then the numeric type of the image view's `format` and the `Sampled Type` operand of the `OpTypeImage` **must** match
- VUID-vkCmdDispatchIndirect-OpImageWrite-08795
  If a VkImageView is accessed using `OpImageWrite` as a result of this command, then the `Type` of the `Texel` operand of that instruction **must** have at least as many components as the image view's format
- VUID-vkCmdDispatchIndirect-OpImageWrite-04469
  If a VkBufferView is accessed using `OpImageWrite` as a result of this command, then the `Type` of the `Texel` operand of that instruction **must** have at least as many components as the buffer view's format
- VUID-vkCmdDispatchIndirect-None-07288
  Any shader invocation executed by this command **must** terminate
- VUID-vkCmdDispatchIndirect-None-09600
  If a descriptor with type equal to any of `VK_DESCRIPTOR_TYPE_SAMPLED_IMAGE`, `VK_DESCRIPTOR_TYPE_STORAGE_IMAGE`, or `VK_DESCRIPTOR_TYPE_INPUT_ATTACHMENT` is accessed as a result of this command, the image subresource identified by that descriptor **must** be in the image layout identified when the descriptor was written
- VUID-vkCmdDispatchIndirect-buffer-02708
  If `buffer` is non-sparse then it **must** be bound completely and contiguously to a single `VkDeviceMemory` object
- VUID-vkCmdDispatchIndirect-buffer-02709
  `buffer` **must** have been created with the `VK_BUFFER_USAGE_INDIRECT_BUFFER_BIT` bit set
- VUID-vkCmdDispatchIndirect-offset-02710
  `offset` **must** be a multiple of `4`
- VUID-vkCmdDispatchIndirect-commandBuffer-02711
  `commandBuffer` **must** not be a protected command buffer
- VUID-vkCmdDispatchIndirect-offset-00407

The sum of `offset` and the size of `VkDispatchIndirectCommand` **must** be less than or equal to the size of `buffer`

Valid Usage (Implicit)

- VUID-vkCmdDispatchIndirect-commandBuffer-parameter
  `commandBuffer` **must** be a valid VkCommandBuffer handle
- VUID-vkCmdDispatchIndirect-buffer-parameter
  `buffer` **must** be a valid VkBuffer handle
- VUID-vkCmdDispatchIndirect-commandBuffer-recording
  `commandBuffer` **must** be in the recording state
- VUID-vkCmdDispatchIndirect-commandBuffer-cmdpool
  The `VkCommandPool` that `commandBuffer` was allocated from **must** support compute operations
- VUID-vkCmdDispatchIndirect-renderpass
  This command **must** only be called outside of a render pass instance
- VUID-vkCmdDispatchIndirect-commonparent
  Both of `buffer`, and `commandBuffer` **must** have been created, allocated, or retrieved from the same VkDevice

Host Synchronization

- Host access to `commandBuffer` **must** be externally synchronized
- Host access to the `VkCommandPool` that `commandBuffer` was allocated from **must** be externally synchronized

Command Properties

Command Buffer Levels	Render Pass Scope	Supported Queue Types	Command Type
Primary Secondary	Outside	Compute	Action

The `VkDispatchIndirectCommand` structure is defined as:

```
// Provided by VK_VERSION_1_0
typedef struct VkDispatchIndirectCommand {
    uint32_t    x;
    uint32_t    y;
    uint32_t    z;
} VkDispatchIndirectCommand;
```

- `x` is the number of local workgroups to dispatch in the X dimension.
- `y` is the number of local workgroups to dispatch in the Y dimension.
- `z` is the number of local workgroups to dispatch in the Z dimension.

The members of `VkDispatchIndirectCommand` have the same meaning as the corresponding parameters of vkCmdDispatch.

Valid Usage

- VUID-VkDispatchIndirectCommand-x-00417
  `x` **must** be less than or equal to `VkPhysicalDeviceLimits`::`maxComputeWorkGroupCount`[0]
- VUID-VkDispatchIndirectCommand-y-00418
  `y` **must** be less than or equal to `VkPhysicalDeviceLimits`::`maxComputeWorkGroupCount`[1]
- VUID-VkDispatchIndirectCommand-z-00419
  `z` **must** be less than or equal to `VkPhysicalDeviceLimits`::`maxComputeWorkGroupCount`[2]

To record a dispatch using non-zero base values for the components of `WorkgroupId`, call:

```
// Provided by VK_VERSION_1_1
void vkCmdDispatchBase(
    VkCommandBuffer                             commandBuffer,
    uint32_t                                    baseGroupX,
    uint32_t                                    baseGroupY,
    uint32_t                                    baseGroupZ,
    uint32_t                                    groupCountX,
    uint32_t                                    groupCountY,
    uint32_t                                    groupCountZ);
```

- `commandBuffer` is the command buffer into which the command will be recorded.
- `baseGroupX` is the start value for the X component of `WorkgroupId`.
- `baseGroupY` is the start value for the Y component of `WorkgroupId`.
- `baseGroupZ` is the start value for the Z component of `WorkgroupId`.
- `groupCountX` is the number of local workgroups to dispatch in the X dimension.
- `groupCountY` is the number of local workgroups to dispatch in the Y dimension.
- `groupCountZ` is the number of local workgroups to dispatch in the Z dimension.

When the command is executed, a global workgroup consisting of `groupCountX` × `groupCountY` × `groupCountZ` local workgroups is assembled, with `WorkgroupId` values ranging from [`baseGroup*`, `baseGroup*` + `groupCount*`) in each component. vkCmdDispatch is equivalent to `vkCmdDispatchBase(0,0,0,groupCountX,groupCountY,groupCountZ)`.

Valid Usage

- VUID-vkCmdDispatchBase-magFilter-04553
  If a VkSampler created with `magFilter` or `minFilter` equal to `VK_FILTER_LINEAR`, `reductionMode` equal to `VK_SAMPLER_REDUCTION_MODE_WEIGHTED_AVERAGE`, and `compareEnable` equal to `VK_FALSE` is used to sample a VkImageView as a result of this command, then the image view's format features **must** contain `VK_FORMAT_FEATURE_SAMPLED_IMAGE_FILTER_LINEAR_BIT`
- VUID-vkCmdDispatchBase-magFilter-09598
  If a VkSampler created with `magFilter` or `minFilter` equal to `VK_FILTER_LINEAR` and `reductionMode` equal to either `VK_SAMPLER_REDUCTION_MODE_MIN` or `VK_SAMPLER_REDUCTION_MODE_MAX` is used to sample a VkImageView as a result of this command, then the image view's format features **must** contain `VK_FORMAT_FEATURE_SAMPLED_IMAGE_FILTER_MINMAX_BIT`
- VUID-vkCmdDispatchBase-mipmapMode-04770
  If a VkSampler created with `mipmapMode` equal to `VK_SAMPLER_MIPMAP_MODE_LINEAR`, `reductionMode` equal to `VK_SAMPLER_REDUCTION_MODE_WEIGHTED_AVERAGE`, and `compareEnable` equal to `VK_FALSE` is used to sample a VkImageView as a result of this command, then the image view's format features **must** contain `VK_FORMAT_FEATURE_SAMPLED_IMAGE_FILTER_LINEAR_BIT`
- VUID-vkCmdDispatchBase-mipmapMode-09599
  If a VkSampler created with `mipmapMode` equal to `VK_SAMPLER_MIPMAP_MODE_LINEAR` and `reductionMode` equal to either `VK_SAMPLER_REDUCTION_MODE_MIN` or `VK_SAMPLER_REDUCTION_MODE_MAX` is used to sample a VkImageView as a result of this command, then the image view's format features **must** contain `VK_FORMAT_FEATURE_SAMPLED_IMAGE_FILTER_MINMAX_BIT`
- VUID-vkCmdDispatchBase-unnormalizedCoordinates-09635
  If a VkSampler created with `unnormalizedCoordinates` equal to `VK_TRUE` is used to sample a VkImageView as a result of this command, then the image view's `levelCount` and `layerCount` **must** be 1
- VUID-vkCmdDispatchBase-unnormalizedCoordinates-09636
  If a VkSampler created with `unnormalizedCoordinates` equal to `VK_TRUE` is used to sample a VkImageView as a result of this command, then the image view's `viewType` **must** be `VK_IMAGE_VIEW_TYPE_1D` or `VK_IMAGE_VIEW_TYPE_2D`
- VUID-vkCmdDispatchBase-None-06479
  If a VkImageView is sampled with depth comparison, the image view's format features **must** contain `VK_FORMAT_FEATURE_2_SAMPLED_IMAGE_DEPTH_COMPARISON_BIT`
- VUID-vkCmdDispatchBase-None-02691
  If a VkImageView is accessed using atomic operations as a result of this command, then the image view's format features **must** contain

VK_FORMAT_FEATURE_STORAGE_IMAGE_ATOMIC_BIT

- VUID-vkCmdDispatchBase-None-07888
  If a VK_DESCRIPTOR_TYPE_STORAGE_TEXEL_BUFFER descriptor is accessed using atomic operations as a result of this command, then the storage texel buffer's format features **must** contain VK_FORMAT_FEATURE_STORAGE_TEXEL_BUFFER_ATOMIC_BIT
- VUID-vkCmdDispatchBase-OpTypeImage-07027
  For any VkImageView being written as a storage image where the image format field of the OpTypeImage is Unknown, the view's format features **must** contain VK_FORMAT_FEATURE_2_STORAGE_WRITE_WITHOUT_FORMAT_BIT
- VUID-vkCmdDispatchBase-OpTypeImage-07028
  For any VkImageView being read as a storage image where the image format field of the OpTypeImage is Unknown, the view's format features **must** contain VK_FORMAT_FEATURE_2_STORAGE_READ_WITHOUT_FORMAT_BIT
- VUID-vkCmdDispatchBase-OpTypeImage-07029
  For any VkBufferView being written as a storage texel buffer where the image format field of the OpTypeImage is Unknown, the view's buffer features **must** contain VK_FORMAT_FEATURE_2_STORAGE_WRITE_WITHOUT_FORMAT_BIT
- VUID-vkCmdDispatchBase-OpTypeImage-07030
  Any VkBufferView being read as a storage texel buffer where the image format field of the OpTypeImage is Unknown then the view's buffer features **must** contain VK_FORMAT_FEATURE_2_STORAGE_READ_WITHOUT_FORMAT_BIT
- VUID-vkCmdDispatchBase-None-08600
  For each set *n* that is statically used by a bound shader, a descriptor set **must** have been bound to *n* at the same pipeline bind point, with a VkPipelineLayout that is compatible for set *n*, with the VkPipelineLayout used to create the current VkPipeline , as described in Pipeline Layout Compatibility
- VUID-vkCmdDispatchBase-None-08601
  For each push constant that is statically used by a bound shader, a push constant value **must** have been set for the same pipeline bind point, with a VkPipelineLayout that is compatible for push constants, with the VkPipelineLayout used to create the current VkPipeline , as described in Pipeline Layout Compatibility
- VUID-vkCmdDispatchBase-None-10068
  For each array of resources that is used by a bound shader, the indices used to access members of the array **must** be less than the descriptor count for the identified binding in the descriptor sets used by this command
- VUID-vkCmdDispatchBase-maintenance4-08602
  If the maintenance4 feature is not enabled, then for each push constant that is statically used by a bound shader, a push constant value **must** have been set for the same pipeline bind point, with a VkPipelineLayout that is compatible for push constants, with the VkPipelineLayout used to create the current VkPipeline , as described in Pipeline Layout Compatibility
- VUID-vkCmdDispatchBase-None-08114
  Descriptors in each bound descriptor set, specified via vkCmdBindDescriptorSets, **must** be valid as described by descriptor validity if they are statically used by a bound shader

- VUID-vkCmdDispatchBase-None-08606
  A valid pipeline **must** be bound to the pipeline bind point used by this command
- VUID-vkCmdDispatchBase-None-08608
  There **must** not have been any calls to dynamic state setting commands for any state specified statically in the VkPipeline object bound to the pipeline bind point used by this command, since that pipeline was bound
- VUID-vkCmdDispatchBase-None-08609
  If the VkPipeline object bound to the pipeline bind point used by this command accesses a VkSampler object that uses unnormalized coordinates, that sampler **must** not be used to sample from any VkImage with a VkImageView of the type `VK_IMAGE_VIEW_TYPE_3D`, `VK_IMAGE_VIEW_TYPE_CUBE`, `VK_IMAGE_VIEW_TYPE_1D_ARRAY`, `VK_IMAGE_VIEW_TYPE_2D_ARRAY` or `VK_IMAGE_VIEW_TYPE_CUBE_ARRAY`, in any shader stage
- VUID-vkCmdDispatchBase-None-08610
  If the VkPipeline object bound to the pipeline bind point used by this command accesses a VkSampler object that uses unnormalized coordinates, that sampler **must** not be used with any of the SPIR-V `OpImageSample*` or `OpImageSparseSample*` instructions with `ImplicitLod`, `Dref` or `Proj` in their name, in any shader stage
- VUID-vkCmdDispatchBase-None-08611
  If the VkPipeline object bound to the pipeline bind point used by this command accesses a VkSampler object that uses unnormalized coordinates, that sampler **must** not be used with any of the SPIR-V `OpImageSample*` or `OpImageSparseSample*` instructions that includes a LOD bias or any offset values, in any shader stage
- VUID-vkCmdDispatchBase-uniformBuffers-06935
  If any stage of the VkPipeline object bound to the pipeline bind point used by this command accesses a uniform buffer, and the `robustBufferAccess` feature is not enabled, that stage **must** not access values outside of the range of the buffer as specified in the descriptor set bound to the same pipeline bind point
- VUID-vkCmdDispatchBase-storageBuffers-06936
  If any stage of the VkPipeline object bound to the pipeline bind point used by this command accesses a storage buffer, and the `robustBufferAccess` feature is not enabled, that stage **must** not access values outside of the range of the buffer as specified in the descriptor set bound to the same pipeline bind point
- VUID-vkCmdDispatchBase-commandBuffer-02707
  If `commandBuffer` is an unprotected command buffer and `protectedNoFault` is not supported, any resource accessed by bound shaders **must** not be a protected resource
- VUID-vkCmdDispatchBase-None-06550
  If a bound shader accesses a VkSampler or VkImageView object that enables sampler $Y'C_BC_R$ conversion, that object **must** only be used with `OpImageSample*` or `OpImageSparseSample*` instructions
- VUID-vkCmdDispatchBase-ConstOffset-06551
  If a bound shader accesses a VkSampler or VkImageView object that enables sampler $Y'C_BC_R$ conversion, that object **must** not use the `ConstOffset` and `Offset` operands
- VUID-vkCmdDispatchBase-viewType-07752
  If a VkImageView is accessed as a result of this command, then the image view's `viewType`

must match the `Dim` operand of the `OpTypeImage` as described in Compatibility Between SPIR-V Image Dimensions and Vulkan ImageView Types

- VUID-vkCmdDispatchBase-format-07753
  If a VkImageView is accessed as a result of this command, then the numeric type of the image view's `format` and the `Sampled Type` operand of the `OpTypeImage` **must** match
- VUID-vkCmdDispatchBase-OpImageWrite-08795
  If a VkImageView is accessed using `OpImageWrite` as a result of this command, then the `Type` of the `Texel` operand of that instruction **must** have at least as many components as the image view's format
- VUID-vkCmdDispatchBase-OpImageWrite-04469
  If a VkBufferView is accessed using `OpImageWrite` as a result of this command, then the `Type` of the `Texel` operand of that instruction **must** have at least as many components as the buffer view's format
- VUID-vkCmdDispatchBase-None-07288
  Any shader invocation executed by this command **must** terminate
- VUID-vkCmdDispatchBase-None-09600
  If a descriptor with type equal to any of `VK_DESCRIPTOR_TYPE_SAMPLED_IMAGE`, `VK_DESCRIPTOR_TYPE_STORAGE_IMAGE`, or `VK_DESCRIPTOR_TYPE_INPUT_ATTACHMENT` is accessed as a result of this command, the image subresource identified by that descriptor **must** be in the image layout identified when the descriptor was written
- VUID-vkCmdDispatchBase-commandBuffer-02712
  If `commandBuffer` is a protected command buffer and `protectedNoFault` is not supported, any resource written to by the `VkPipeline` object bound to the pipeline bind point used by this command **must** not be an unprotected resource
- VUID-vkCmdDispatchBase-commandBuffer-02713
  If `commandBuffer` is a protected command buffer and `protectedNoFault` is not supported, pipeline stages other than the framebuffer-space and compute stages in the `VkPipeline` object bound to the pipeline bind point used by this command **must** not write to any resource
- VUID-vkCmdDispatchBase-baseGroupX-00421
  `baseGroupX` **must** be less than `VkPhysicalDeviceLimits`::`maxComputeWorkGroupCount`[0]
- VUID-vkCmdDispatchBase-baseGroupX-00422
  `baseGroupY` **must** be less than `VkPhysicalDeviceLimits`::`maxComputeWorkGroupCount`[1]
- VUID-vkCmdDispatchBase-baseGroupZ-00423
  `baseGroupZ` **must** be less than `VkPhysicalDeviceLimits`::`maxComputeWorkGroupCount`[2]
- VUID-vkCmdDispatchBase-groupCountX-00424
  `groupCountX` **must** be less than or equal to `VkPhysicalDeviceLimits`::`maxComputeWorkGroupCount`[0] minus `baseGroupX`
- VUID-vkCmdDispatchBase-groupCountY-00425
  `groupCountY` **must** be less than or equal to `VkPhysicalDeviceLimits`::`maxComputeWorkGroupCount`[1] minus `baseGroupY`
- VUID-vkCmdDispatchBase-groupCountZ-00426

groupCountZ **must** be less than or equal to VkPhysicalDeviceLimits ::maxComputeWorkGroupCount[2] minus baseGroupZ

- VUID-vkCmdDispatchBase-baseGroupX-00427
  If any of baseGroupX, baseGroupY, or baseGroupZ are not zero, then the bound compute pipeline **must** have been created with the VK_PIPELINE_CREATE_DISPATCH_BASE flag

Valid Usage (Implicit)

- VUID-vkCmdDispatchBase-commandBuffer-parameter
  commandBuffer **must** be a valid VkCommandBuffer handle
- VUID-vkCmdDispatchBase-commandBuffer-recording
  commandBuffer **must** be in the recording state
- VUID-vkCmdDispatchBase-commandBuffer-cmdpool
  The VkCommandPool that commandBuffer was allocated from **must** support compute operations
- VUID-vkCmdDispatchBase-renderpass
  This command **must** only be called outside of a render pass instance

Host Synchronization

- Host access to commandBuffer **must** be externally synchronized
- Host access to the VkCommandPool that commandBuffer was allocated from **must** be externally synchronized

Command Properties

Command Buffer Levels	Render Pass Scope	Supported Queue Types	Command Type
Primary Secondary	Outside	Compute	Action

Chapter 29. Sparse Resources

As documented in Resource Memory Association, `VkBuffer` and `VkImage` resources in Vulkan **must** be bound completely and contiguously to a single `VkDeviceMemory` object. This binding **must** be done before the resource is used, and the binding is immutable for the lifetime of the resource.

Sparse resources relax these restrictions and provide these additional features:

- Sparse resources **can** be bound non-contiguously to one or more `VkDeviceMemory` allocations.
- Sparse resources **can** be re-bound to different memory allocations over the lifetime of the resource.
- Sparse resources **can** have descriptors generated and used orthogonally with memory binding commands.

29.1. Sparse Resource Features

Sparse resources have several features that **must** be enabled explicitly at resource creation time. The features are enabled by including bits in the `flags` parameter of VkImageCreateInfo or VkBufferCreateInfo. Each feature also has one or more corresponding feature enables specified in VkPhysicalDeviceFeatures.

- The `sparseBinding` feature is the base, and provides the following capabilities:
  - Resources **can** be bound at some defined (sparse block) granularity.
  - The entire resource **must** be bound to memory before use regardless of regions actually accessed.
  - No specific mapping of image region to memory offset is defined, i.e. the location that each texel corresponds to in memory is implementation-dependent.
  - Sparse buffers have a well-defined mapping of buffer range to memory range, where an offset into a range of the buffer that is bound to a single contiguous range of memory corresponds to an identical offset within that range of memory.
  - Requested via the `VK_IMAGE_CREATE_SPARSE_BINDING_BIT` and `VK_BUFFER_CREATE_SPARSE_BINDING_BIT` bits.
  - A sparse image created using `VK_IMAGE_CREATE_SPARSE_BINDING_BIT` (but not `VK_IMAGE_CREATE_SPARSE_RESIDENCY_BIT`) supports all formats that non-sparse usage supports, and supports both `VK_IMAGE_TILING_OPTIMAL` and `VK_IMAGE_TILING_LINEAR` tiling.
- *Sparse Residency* builds on (and requires) the `sparseBinding` feature. It includes the following capabilities:
  - Resources do not have to be completely bound to memory before use on the device.
  - Images have a prescribed sparse image block layout, allowing specific rectangular regions of the image to be bound to specific offsets in memory allocations.
  - Consistency of access to unbound regions of the resource is defined by the absence or presence of `VkPhysicalDeviceSparseProperties`::`residencyNonResidentStrict`. If this property is present, accesses to unbound regions of the resource are well defined and behave as if the

data bound is populated with all zeros; writes are discarded. When this property is absent, accesses are considered safe, but reads will return undefined values.

  - Requested via the VK_IMAGE_CREATE_SPARSE_RESIDENCY_BIT and VK_BUFFER_CREATE_SPARSE_RESIDENCY_BIT bits.
  - Sparse residency support is advertised on a finer grain via the following features:
    - The sparseResidencyBuffer feature provides support for creating VkBuffer objects with the VK_BUFFER_CREATE_SPARSE_RESIDENCY_BIT.
    - The sparseResidencyImage2D feature provides support for creating 2D single-sampled VkImage objects with VK_IMAGE_CREATE_SPARSE_RESIDENCY_BIT.
    - The sparseResidencyImage3D feature provides support for creating 3D VkImage objects with VK_IMAGE_CREATE_SPARSE_RESIDENCY_BIT.
    - The sparseResidency2Samples feature provides support for creating 2D VkImage objects with 2 samples and VK_IMAGE_CREATE_SPARSE_RESIDENCY_BIT.
    - The sparseResidency4Samples feature provides support for creating 2D VkImage objects with 4 samples and VK_IMAGE_CREATE_SPARSE_RESIDENCY_BIT.
    - The sparseResidency8Samples feature provides support for creating 2D VkImage objects with 8 samples and VK_IMAGE_CREATE_SPARSE_RESIDENCY_BIT.
    - The sparseResidency16Samples feature provides support for creating 2D VkImage objects with 16 samples and VK_IMAGE_CREATE_SPARSE_RESIDENCY_BIT.

      Implementations supporting sparseResidencyImage2D are only **required** to support sparse 2D, single-sampled images. Support for sparse 3D and MSAA images is **optional** and **can** be enabled via sparseResidencyImage3D, sparseResidency2Samples, sparseResidency4Samples, sparseResidency8Samples, and sparseResidency16Samples.
  - A sparse image created using VK_IMAGE_CREATE_SPARSE_RESIDENCY_BIT supports all non-compressed color formats with power-of-two element size that non-sparse usage supports. Additional formats **may** also be supported and **can** be queried via vkGetPhysicalDeviceSparseImageFormatProperties. VK_IMAGE_TILING_LINEAR tiling is not supported.
- The sparseResidencyAliased feature provides the following capability that **can** be enabled per resource:

  Allows physical memory ranges to be shared between multiple locations in the same sparse resource or between multiple sparse resources, with each binding of a memory location observing a consistent interpretation of the memory contents.

  See Sparse Memory Aliasing for more information.

29.2. Sparse Buffers and Fully-Resident Images

Both VkBuffer and VkImage objects created with the VK_IMAGE_CREATE_SPARSE_BINDING_BIT or VK_BUFFER_CREATE_SPARSE_BINDING_BIT bits **can** be thought of as a linear region of address space. In the VkImage case if VK_IMAGE_CREATE_SPARSE_RESIDENCY_BIT is not used, this linear region is entirely

opaque, meaning that there is no application-visible mapping between texel location and memory offset.

Unless VK_IMAGE_CREATE_SPARSE_RESIDENCY_BIT or VK_BUFFER_CREATE_SPARSE_RESIDENCY_BIT are also used, the entire resource **must** be bound to one or more VkDeviceMemory objects before use.

29.2.1. Sparse Buffer and Fully-Resident Image Block Size

The sparse block size in bytes for sparse buffers and fully-resident images is reported as VkMemoryRequirements::alignment. alignment represents both the memory alignment requirement and the binding granularity (in bytes) for sparse resources.

29.3. Sparse Partially-Resident Buffers

VkBuffer objects created with the VK_BUFFER_CREATE_SPARSE_RESIDENCY_BIT bit allow the buffer to be made only partially resident. Partially resident VkBuffer objects are allocated and bound identically to VkBuffer objects using only the VK_BUFFER_CREATE_SPARSE_BINDING_BIT feature. The only difference is the ability for some regions of the buffer to be unbound during device use.

29.4. Sparse Partially-Resident Images

VkImage objects created with the VK_IMAGE_CREATE_SPARSE_RESIDENCY_BIT bit allow specific rectangular regions of the image called sparse image blocks to be bound to specific ranges of memory. This allows the application to manage residency at either image subresource or sparse image block granularity. Each image subresource (outside of the mip tail) starts on a sparse block boundary and has dimensions that are integer multiples of the corresponding dimensions of the sparse image block.

NOTE

Applications **can** use these types of images to control LOD based on total memory consumption. If memory pressure becomes an issue the application **can** unbind and disable specific mipmap levels of images without having to recreate resources or modify texel data of unaffected levels.

The application **can** also use this functionality to access subregions of the image in a “megatexture” fashion. The application **can** create a large image and only populate the region of the image that is currently being used in the scene.

29.4.1. Accessing Unbound Regions

The following member of VkPhysicalDeviceSparseProperties affects how data in unbound regions of sparse resources are handled by the implementation:

- residencyNonResidentStrict

If this property is not present, reads of unbound regions of the image will return undefined values. Both reads and writes are still considered *safe* and will not affect other resources or populated regions of the image.

If this property is present, all reads of unbound regions of the image will behave as if the region was bound to memory populated with all zeros; writes will be discarded.

Image operations performed on unbound memory **may** still alter some component values in the natural way for those accesses, e.g. substituting a value of one for alpha in formats that do not have an alpha component.

> Example: Reading the alpha component of an unbacked `VK_FORMAT_R8_UNORM` image will return a value of 1.0f.

See Physical Device Enumeration for instructions for retrieving physical device properties.

> **Implementor's Note**
>
> For implementations that **cannot** natively handle access to unbound regions of a resource, the implementation **may** allocate and bind memory to the unbound regions. Reads and writes to unbound regions will access the implementation-managed memory instead.
>
> Given that the values resulting from reads of unbound regions are undefined in this scenario, implementations **may** use the same physical memory for all unbound regions of multiple resources within the same process.

29.4.2. Mip Tail Regions

Sparse images created using `VK_IMAGE_CREATE_SPARSE_BINDING_BIT` (without also using `VK_IMAGE_CREATE_SPARSE_RESIDENCY_BIT`) have no specific mapping of image region or image subresource to memory offset defined, so the entire image **can** be thought of as a linear opaque address region. However, images created with `VK_IMAGE_CREATE_SPARSE_RESIDENCY_BIT` do have a prescribed sparse image block layout, and hence each image subresource **must** start on a sparse block boundary. Within each array layer, the set of mip levels that have a smaller size than the sparse block size in bytes are grouped together into a *mip tail region*.

If the `VK_SPARSE_IMAGE_FORMAT_ALIGNED_MIP_SIZE_BIT` flag is present in the `flags` member of `VkSparseImageFormatProperties`, for the image's `format`, then any mip level which has dimensions that are not integer multiples of the corresponding dimensions of the sparse image block, and all subsequent mip levels, are also included in the mip tail region.

The following member of `VkPhysicalDeviceSparseProperties` **may** affect how the implementation places mip levels in the mip tail region:

- `residencyAlignedMipSize`

Each mip tail region is bound to memory as an opaque region (i.e. **must** be bound using a VkSparseImageOpaqueMemoryBindInfo structure) and **may** be of a size greater than or equal to the sparse block size in bytes. This size is guaranteed to be an integer multiple of the sparse block size in bytes.

An implementation **may** choose to allow each array-layer's mip tail region to be bound to memory independently or require that all array-layer's mip tail regions be treated as one. This is dictated by `VK_SPARSE_IMAGE_FORMAT_SINGLE_MIPTAIL_BIT` in `VkSparseImageMemoryRequirements::flags`.

The following diagrams depict how `VK_SPARSE_IMAGE_FORMAT_ALIGNED_MIP_SIZE_BIT` and `VK_SPARSE_IMAGE_FORMAT_SINGLE_MIPTAIL_BIT` alter memory usage and requirements.

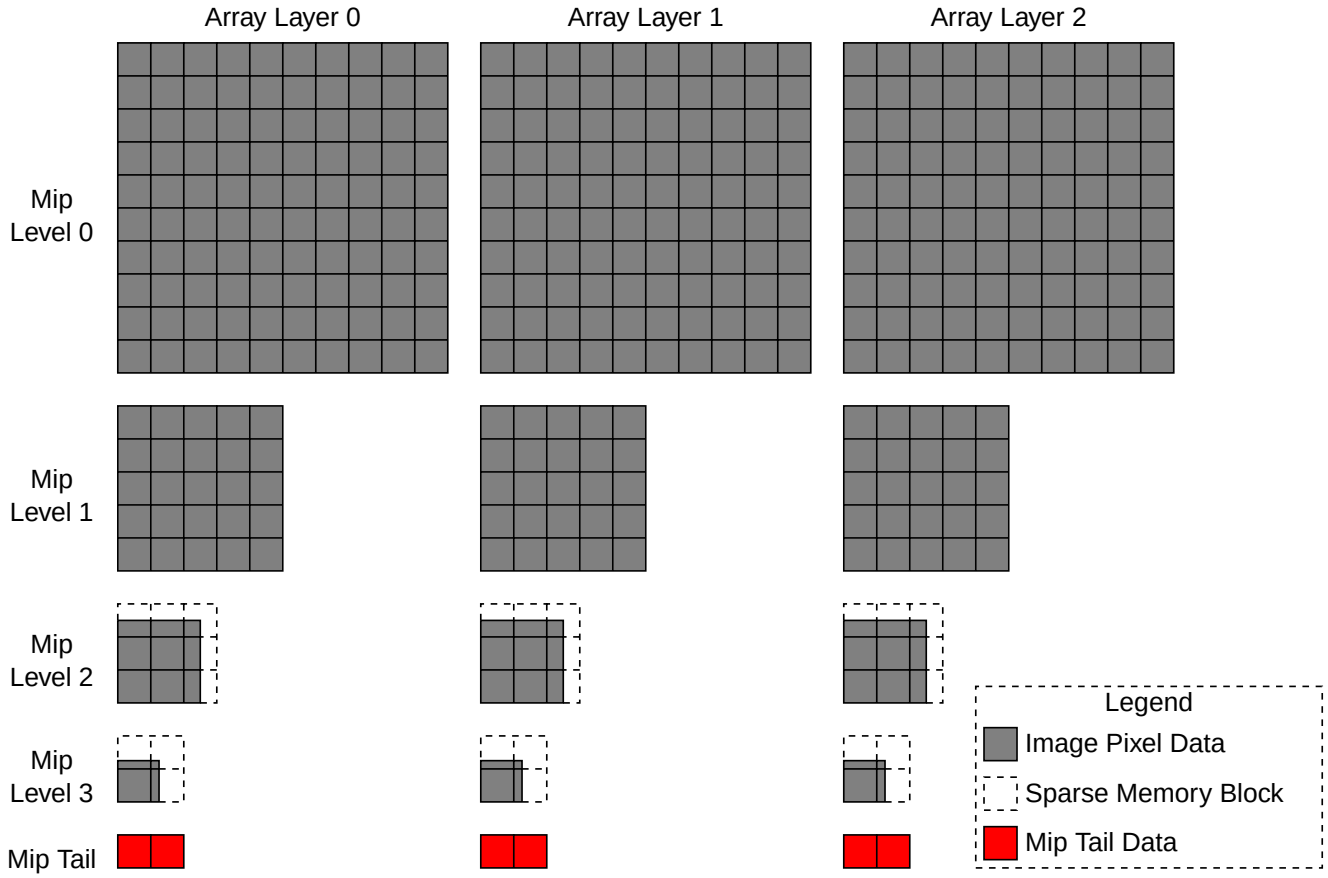

Figure 17. Sparse Image

In the absence of `VK_SPARSE_IMAGE_FORMAT_ALIGNED_MIP_SIZE_BIT` and `VK_SPARSE_IMAGE_FORMAT_SINGLE_MIPTAIL_BIT`, each array layer contains a mip tail region containing texel data for all mip levels smaller than the sparse image block in any dimension.

Mip levels that are as large or larger than a sparse image block in all dimensions **can** be bound individually. Right-edges and bottom-edges of each level are allowed to have partially used sparse blocks. Any bound partially-used-sparse-blocks **must** still have their full sparse block size in bytes allocated in memory.

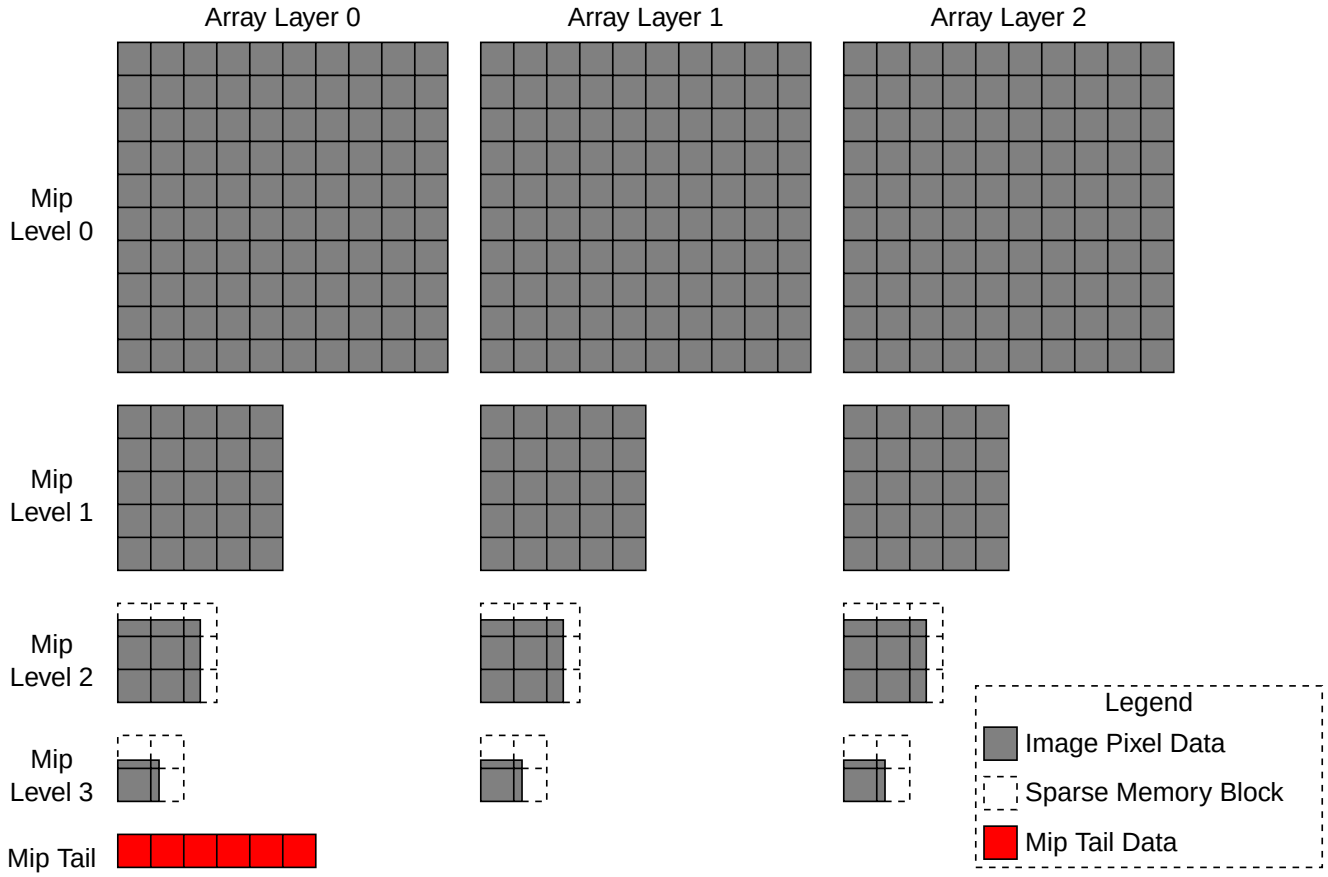

Figure 18. Sparse Image with Single Mip Tail

When `VK_SPARSE_IMAGE_FORMAT_SINGLE_MIPTAIL_BIT` is present all array layers will share a single mip tail region.

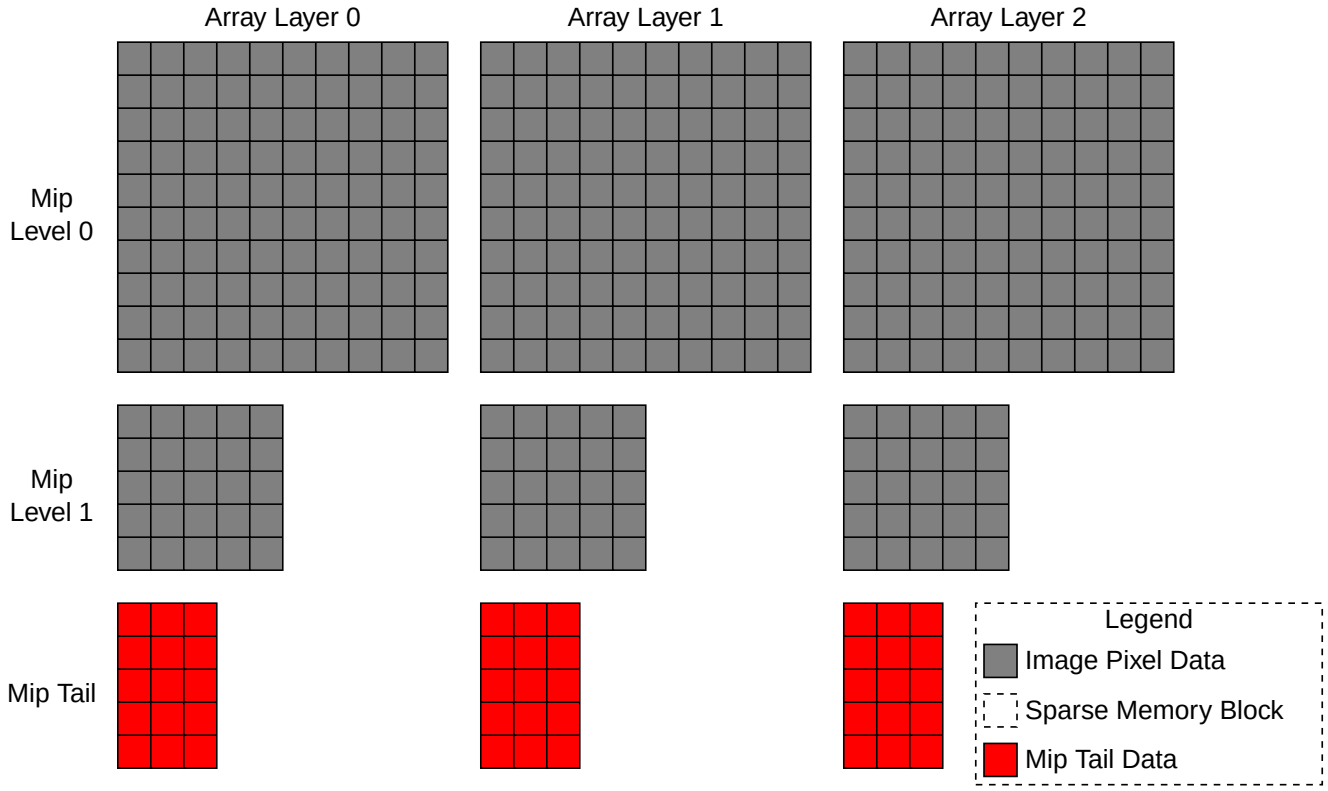

Figure 19. Sparse Image with Aligned Mip Size

NOTE The mip tail regions are presented here in 2D arrays simply for figure size reasons.

> Each mip tail is logically a single array of sparse blocks with an implementation-dependent mapping of texels or compressed texel blocks to sparse blocks.

When VK_SPARSE_IMAGE_FORMAT_ALIGNED_MIP_SIZE_BIT is present the first mip level that would contain partially used sparse blocks begins the mip tail region. This level and all subsequent levels are placed in the mip tail. Only the first N mip levels whose dimensions are an exact multiple of the sparse image block dimensions **can** be bound and unbound on a sparse block basis.

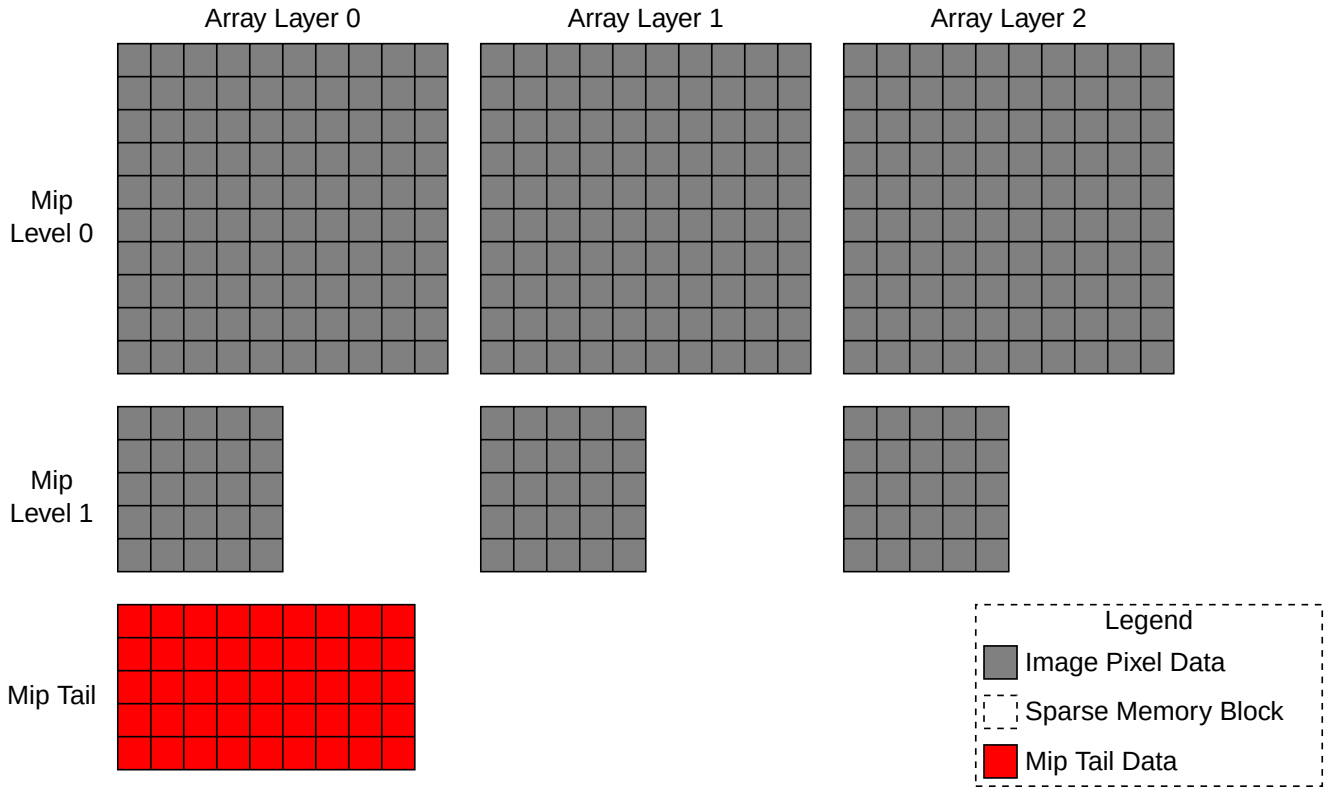

Figure 20. Sparse Image with Aligned Mip Size and Single Mip Tail

> **NOTE** The mip tail region is presented here in a 2D array simply for figure size reasons. It is logically a single array of sparse blocks with an implementation-dependent mapping of texels or compressed texel blocks to sparse blocks.

When both VK_SPARSE_IMAGE_FORMAT_ALIGNED_MIP_SIZE_BIT and VK_SPARSE_IMAGE_FORMAT_SINGLE_MIPTAIL_BIT are present the constraints from each of these flags are in effect.

29.4.3. Standard Sparse Image Block Shapes

Standard sparse image block shapes define a standard set of dimensions for sparse image blocks that depend on the format of the image. Layout of texels or compressed texel blocks within a sparse image block is implementation-dependent. All currently defined standard sparse image block shapes are 64 KB in size.

For block-compressed formats (e.g. VK_FORMAT_BC5_UNORM_BLOCK), the texel size is the size of the compressed texel block (e.g. 128-bit for BC5) thus the dimensions of the standard sparse image block shapes apply in terms of compressed texel blocks.

NOTE For block-compressed formats, the dimensions of a sparse image block in terms of texels **can** be calculated by multiplying the sparse image block dimensions by the compressed texel block dimensions.

Table 28. Standard Sparse Image Block Shapes (Single Sample)

TEXEL SIZE (bits)	Block Shape (2D)	Block Shape (3D)
8-Bit	256 × 256 × 1	64 × 32 × 32
16-Bit	256 × 128 × 1	32 × 32 × 32
32-Bit	128 × 128 × 1	32 × 32 × 16
64-Bit	128 × 64 × 1	32 × 16 × 16
128-Bit	64 × 64 × 1	16 × 16 × 16

Table 29. Standard Sparse Image Block Shapes (MSAA)

TEXEL SIZE (bits)	Block Shape (2X)	Block Shape (4X)	Block Shape (8X)	Block Shape (16X)
8-Bit	128 × 256 × 1	128 × 128 × 1	64 × 128 × 1	64 × 64 × 1
16-Bit	128 × 128 × 1	128 × 64 × 1	64 × 64 × 1	64 × 32 × 1
32-Bit	64 × 128 × 1	64 × 64 × 1	32 × 64 × 1	32 × 32 × 1
64-Bit	64 × 64 × 1	64 × 32 × 1	32 × 32 × 1	32 × 16 × 1
128-Bit	32 × 64 × 1	32 × 32 × 1	16 × 32 × 1	16 × 16 × 1

Implementations that support the standard sparse image block shape for all formats listed in the Standard Sparse Image Block Shapes (Single Sample) and Standard Sparse Image Block Shapes (MSAA) tables **may** advertise the following `VkPhysicalDeviceSparseProperties`:

- `residencyStandard2DBlockShape`
- `residencyStandard2DMultisampleBlockShape`
- `residencyStandard3DBlockShape`

Reporting each of these features does *not* imply that all possible image types are supported as sparse. Instead, this indicates that no supported sparse image of the corresponding type will use custom sparse image block dimensions for any formats that have a corresponding standard sparse image block shape.

29.4.4. Custom Sparse Image Block Shapes

An implementation that does not support a standard image block shape for a particular sparse partially-resident image **may** choose to support a custom sparse image block shape for it instead. The dimensions of such a custom sparse image block shape are reported in `VkSparseImageFormatProperties`::`imageGranularity`. As with standard sparse image block shapes, the size in bytes of the custom sparse image block shape will be reported in `VkMemoryRequirements`::`alignment`.

Custom sparse image block dimensions are reported through `vkGetPhysicalDeviceSparseImageFormatProperties` and `vkGetImageSparseMemoryRequirements`.

An implementation **must** not support both the standard sparse image block shape and a custom

sparse image block shape for the same image. The standard sparse image block shape **must** be used if it is supported.

29.4.5. Multiple Aspects

Partially resident images are allowed to report separate sparse properties for different aspects of the image. One example is for depth/stencil images where the implementation separates the depth and stencil data into separate planes. Another reason for multiple aspects is to allow the application to manage memory allocation for implementation-private *metadata* associated with the image. See the figure below:

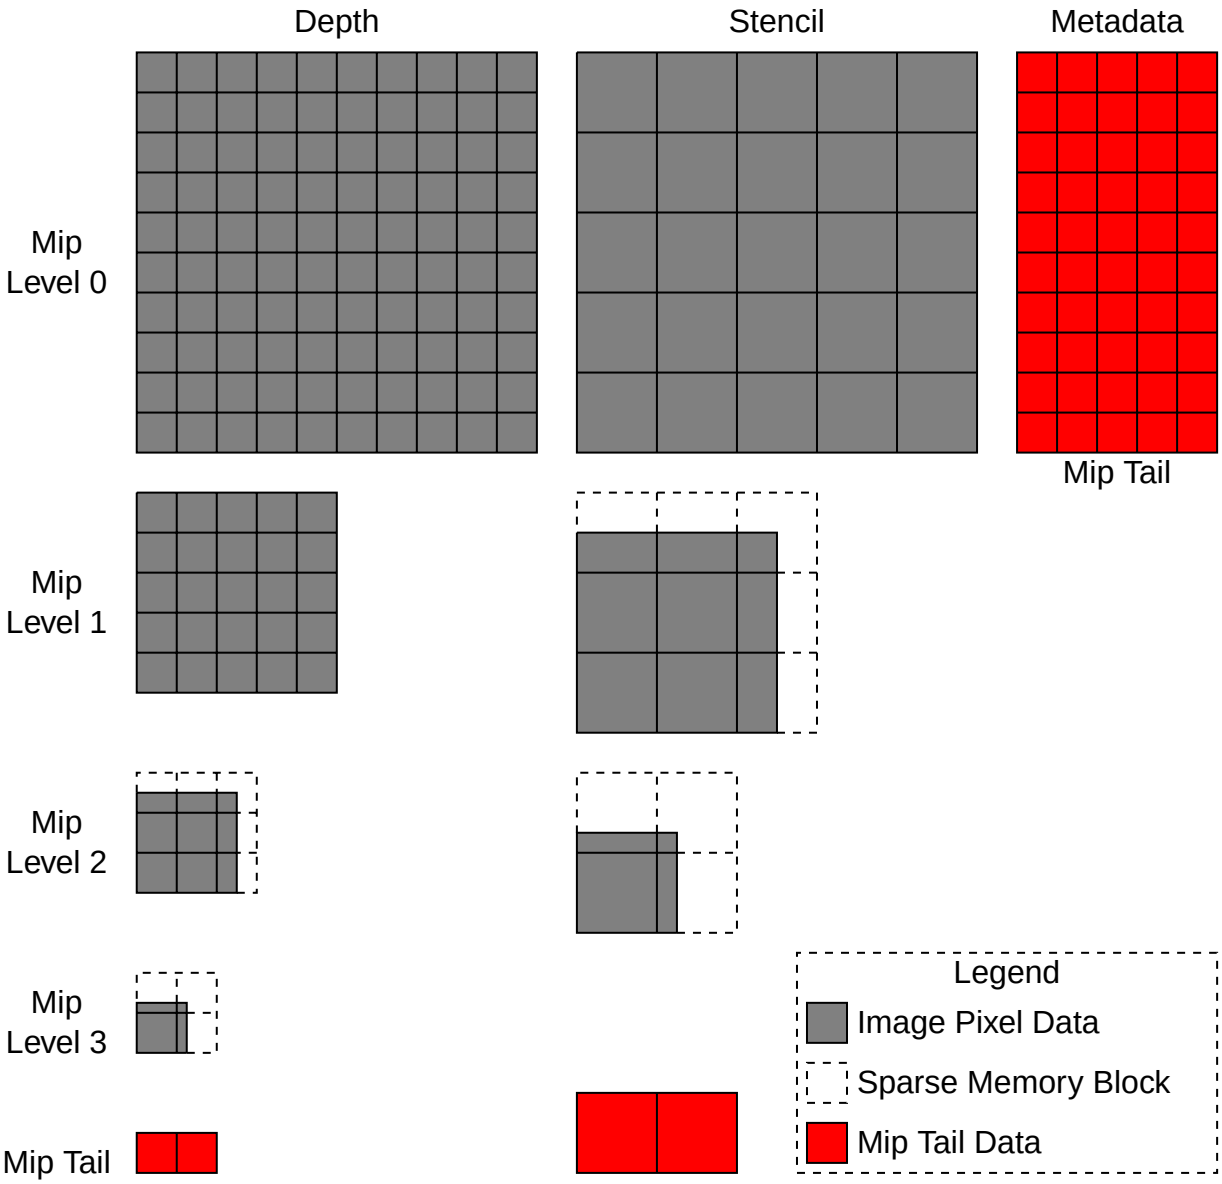

Figure 21. Multiple Aspect Sparse Image

NOTE The mip tail regions are presented here in 2D arrays simply for figure size reasons. Each mip tail is logically a single array of sparse blocks with an implementation-dependent mapping of texels or compressed texel blocks to sparse blocks.

In the figure above the depth, stencil, and metadata aspects all have unique sparse properties. The per-texel stencil data is ¼ the size of the depth data, hence the stencil sparse blocks include 4 × the number of texels. The sparse block size in bytes for all of the aspects is identical and defined by

`VkMemoryRequirements::alignment`.

Metadata

The metadata aspect of an image has the following constraints:

- All metadata is reported in the mip tail region of the metadata aspect.
- All metadata **must** be bound prior to device use of the sparse image.

29.5. Sparse Memory Aliasing

By default sparse resources have the same aliasing rules as non-sparse resources. See Memory Aliasing for more information.

`VkDevice` objects that have the `sparseResidencyAliased` feature enabled are able to use the `VK_BUFFER_CREATE_SPARSE_ALIASED_BIT` and `VK_IMAGE_CREATE_SPARSE_ALIASED_BIT` flags for resource creation. These flags allow resources to access physical memory bound into multiple locations within one or more sparse resources in a *data consistent* fashion. This means that reading physical memory from multiple aliased locations will return the same value.

Care **must** be taken when performing a write operation to aliased physical memory. Memory dependencies **must** be used to separate writes to one alias from reads or writes to another alias. Writes to aliased memory that are not properly guarded against accesses to different aliases will have undefined results for all accesses to the aliased memory.

Applications that wish to make use of data consistent sparse memory aliasing **must** abide by the following guidelines:

- All sparse resources that are bound to aliased physical memory **must** be created with the `VK_BUFFER_CREATE_SPARSE_ALIASED_BIT` / `VK_IMAGE_CREATE_SPARSE_ALIASED_BIT` flag.
- All resources that access aliased physical memory **must** interpret the memory in the same way. This implies the following:
  - Buffers and images **cannot** alias the same physical memory in a data consistent fashion. The physical memory ranges **must** be used exclusively by buffers or used exclusively by images for data consistency to be guaranteed.
  - Memory in sparse image mip tail regions **cannot** access aliased memory in a data consistent fashion.
  - Sparse images that alias the same physical memory **must** have compatible formats and be using the same sparse image block shape in order to access aliased memory in a data consistent fashion.

Failure to follow any of the above guidelines will require the application to abide by the normal, non-sparse resource aliasing rules. In this case memory **cannot** be accessed in a data consistent fashion.

NOTE	Enabling sparse resource memory aliasing **can** be a way to lower physical memory use, but it **may** reduce performance on some implementations. An application

> developer **can** test on their target HW and balance the memory / performance trade-offs measured.

29.6. Sparse Resource Implementation Guidelines (Informative)

This section is Informative. It is included to aid in implementors' understanding of sparse resources.

Device Virtual Address

The basic `sparseBinding` feature allows the resource to reserve its own device virtual address range at resource creation time rather than relying on a bind operation to set this. Without any other creation flags, no other constraints are relaxed compared to normal resources. All pages **must** be bound to physical memory before the device accesses the resource.

The `sparseResidency` features allow sparse resources to be used even when not all pages are bound to memory. Implementations that support access to unbound pages without causing a fault **may** support `residencyNonResidentStrict`.

Not faulting on access to unbound pages is not enough to support `residencyNonResidentStrict`. An implementation **must** also guarantee that reads after writes to unbound regions of the resource always return data for the read as if the memory contains zeros. Depending on any caching hierarchy of the implementation this **may** not always be possible.

Any implementation that does not fault, but does not guarantee correct read values **must** not support `residencyNonResidentStrict`.

Any implementation that **cannot** access unbound pages without causing a fault will require the implementation to bind the entire device virtual address range to physical memory. Any pages that the application does not bind to memory **may** be bound to one (or more) "`placeholder" physical page(s) allocated by the implementation. Given the following properties:

- A process **must** not access memory from another process
- Reads return undefined values

It is sufficient for each host process to allocate these placeholder pages and use them for all resources in that process. Implementations **may** allocate more often (per instance, per device, or per resource).

Binding Memory

The byte size reported in `VkMemoryRequirements`::`size` **must** be greater than or equal to the amount of physical memory **required** to fully populate the resource. Some implementations require "holes" in the device virtual address range that are never accessed. These holes **may** be included in the `size` reported for the resource.

Including or not including the device virtual address holes in the resource size will alter how

the implementation provides support for VkSparseImageOpaqueMemoryBindInfo. This operation **must** be supported for all sparse images, even ones created with VK_IMAGE_CREATE_SPARSE_RESIDENCY_BIT.

- If the holes are included in the size, this bind function becomes very easy. In most cases the resourceOffset is simply a device virtual address offset and the implementation can easily determine what device virtual address to bind. The cost is that the application **may** allocate more physical memory for the resource than it needs.
- If the holes are not included in the size, the application **can** allocate less physical memory than otherwise for the resource. However, in this case the implementation **must** account for the holes when mapping resourceOffset to the actual device virtual address intended to be mapped.

NOTE

If the application always uses VkSparseImageMemoryBindInfo to bind memory for the non-tail mip levels, any holes that are present in the resource size **may** never be bound.

Since VkSparseImageMemoryBindInfo uses texel locations to determine which device virtual addresses to bind, it is impossible to bind device virtual address holes with this operation.

Binding Metadata Memory

All metadata for sparse images have their own sparse properties and are embedded in the mip tail region for said properties. See the Multiaspect section for details.

Given that metadata is in a mip tail region, and the mip tail region **must** be reported as contiguous (either globally or per-array-layer), some implementations will have to resort to complicated offset → device virtual address mapping for handling VkSparseImageOpaqueMemoryBindInfo.

To make this easier on the implementation, the VK_SPARSE_MEMORY_BIND_METADATA_BIT explicitly specifies when metadata is bound with VkSparseImageOpaqueMemoryBindInfo. When this flag is not present, the resourceOffset **may** be treated as a strict device virtual address offset.

When VK_SPARSE_MEMORY_BIND_METADATA_BIT is present, the resourceOffset **must** have been derived explicitly from the imageMipTailOffset in the sparse resource properties returned for the metadata aspect. By manipulating the value returned for imageMipTailOffset, the resourceOffset does not have to correlate directly to a device virtual address offset, and **may** instead be whatever value makes it easiest for the implementation to derive the correct device virtual address.

29.7. Sparse Resource API

The APIs related to sparse resources are grouped into the following categories:

- Physical Device Features
- Physical Device Sparse Properties

- Sparse Image Format Properties
- Sparse Resource Creation
- Sparse Resource Memory Requirements
- Binding Resource Memory

29.7.1. Physical Device Features

Some sparse-resource related features are reported and enabled in VkPhysicalDeviceFeatures. These features **must** be supported and enabled on the VkDevice object before applications **can** use them. See Physical Device Features for information on how to get and set enabled device features, and for more detailed explanations of these features.

Sparse Physical Device Features

- sparseBinding: Support for creating VkBuffer and VkImage objects with the VK_BUFFER_CREATE_SPARSE_BINDING_BIT and VK_IMAGE_CREATE_SPARSE_BINDING_BIT flags, respectively.
- sparseResidencyBuffer: Support for creating VkBuffer objects with the VK_BUFFER_CREATE_SPARSE_RESIDENCY_BIT flag.
- sparseResidencyImage2D: Support for creating 2D single-sampled VkImage objects with VK_IMAGE_CREATE_SPARSE_RESIDENCY_BIT.
- sparseResidencyImage3D: Support for creating 3D VkImage objects with VK_IMAGE_CREATE_SPARSE_RESIDENCY_BIT.
- sparseResidency2Samples: Support for creating 2D VkImage objects with 2 samples and VK_IMAGE_CREATE_SPARSE_RESIDENCY_BIT.
- sparseResidency4Samples: Support for creating 2D VkImage objects with 4 samples and VK_IMAGE_CREATE_SPARSE_RESIDENCY_BIT.
- sparseResidency8Samples: Support for creating 2D VkImage objects with 8 samples and VK_IMAGE_CREATE_SPARSE_RESIDENCY_BIT.
- sparseResidency16Samples: Support for creating 2D VkImage objects with 16 samples and VK_IMAGE_CREATE_SPARSE_RESIDENCY_BIT.
- sparseResidencyAliased: Support for creating VkBuffer and VkImage objects with the VK_BUFFER_CREATE_SPARSE_ALIASED_BIT and VK_IMAGE_CREATE_SPARSE_ALIASED_BIT flags, respectively.

29.7.2. Physical Device Sparse Properties

Some features of the implementation are not possible to disable, and are reported to allow applications to alter their sparse resource usage accordingly. These read-only capabilities are reported in the VkPhysicalDeviceProperties::sparseProperties member, which is a VkPhysicalDeviceSparseProperties structure.

The VkPhysicalDeviceSparseProperties structure is defined as:

```
// Provided by VK_VERSION_1_0
typedef struct VkPhysicalDeviceSparseProperties {
    VkBool32    residencyStandard2DBlockShape;
    VkBool32    residencyStandard2DMultisampleBlockShape;
    VkBool32    residencyStandard3DBlockShape;
    VkBool32    residencyAlignedMipSize;
    VkBool32    residencyNonResidentStrict;
} VkPhysicalDeviceSparseProperties;
```

- `residencyStandard2DBlockShape` is `VK_TRUE` if the physical device will access all single-sample 2D sparse resources using the standard sparse image block shapes (based on image format), as described in the Standard Sparse Image Block Shapes (Single Sample) table. If this property is not supported the value returned in the `imageGranularity` member of the `VkSparseImageFormatProperties` structure for single-sample 2D images is not **required** to match the standard sparse image block dimensions listed in the table.
- `residencyStandard2DMultisampleBlockShape` is `VK_TRUE` if the physical device will access all multisample 2D sparse resources using the standard sparse image block shapes (based on image format), as described in the Standard Sparse Image Block Shapes (MSAA) table. If this property is not supported, the value returned in the `imageGranularity` member of the `VkSparseImageFormatProperties` structure for multisample 2D images is not **required** to match the standard sparse image block dimensions listed in the table.
- `residencyStandard3DBlockShape` is `VK_TRUE` if the physical device will access all 3D sparse resources using the standard sparse image block shapes (based on image format), as described in the Standard Sparse Image Block Shapes (Single Sample) table. If this property is not supported, the value returned in the `imageGranularity` member of the `VkSparseImageFormatProperties` structure for 3D images is not **required** to match the standard sparse image block dimensions listed in the table.
- `residencyAlignedMipSize` is `VK_TRUE` if images with mip level dimensions that are not integer multiples of the corresponding dimensions of the sparse image block **may** be placed in the mip tail. If this property is not reported, only mip levels with dimensions smaller than the `imageGranularity` member of the `VkSparseImageFormatProperties` structure will be placed in the mip tail. If this property is reported the implementation is allowed to return `VK_SPARSE_IMAGE_FORMAT_ALIGNED_MIP_SIZE_BIT` in the `flags` member of `VkSparseImageFormatProperties`, indicating that mip level dimensions that are not integer multiples of the corresponding dimensions of the sparse image block will be placed in the mip tail.
- `residencyNonResidentStrict` specifies whether the physical device **can** consistently access non-resident regions of a resource. If this property is `VK_TRUE`, access to non-resident regions of resources will be guaranteed to return values as if the resource was populated with 0; writes to non-resident regions will be discarded.

29.7.3. Sparse Image Format Properties

Given that certain aspects of sparse image support, including the sparse image block dimensions, **may** be implementation-dependent, vkGetPhysicalDeviceSparseImageFormatProperties **can** be used to query for sparse image format properties prior to resource creation. This command is used

to check whether a given set of sparse image parameters is supported and what the sparse image block shape will be.

Sparse Image Format Properties API

The VkSparseImageFormatProperties structure is defined as:

```
// Provided by VK_VERSION_1_0
typedef struct VkSparseImageFormatProperties {
    VkImageAspectFlags          aspectMask;
    VkExtent3D                  imageGranularity;
    VkSparseImageFormatFlags    flags;
} VkSparseImageFormatProperties;
```

- aspectMask is a bitmask VkImageAspectFlagBits specifying which aspects of the image the properties apply to.
- imageGranularity is the width, height, and depth of the sparse image block in texels or compressed texel blocks.
- flags is a bitmask of VkSparseImageFormatFlagBits specifying additional information about the sparse resource.

Bits which **may** be set in VkSparseImageFormatProperties::flags, specifying additional information about the sparse resource, are:

```
// Provided by VK_VERSION_1_0
typedef enum VkSparseImageFormatFlagBits {
    VK_SPARSE_IMAGE_FORMAT_SINGLE_MIPTAIL_BIT = 0x00000001,
    VK_SPARSE_IMAGE_FORMAT_ALIGNED_MIP_SIZE_BIT = 0x00000002,
    VK_SPARSE_IMAGE_FORMAT_NONSTANDARD_BLOCK_SIZE_BIT = 0x00000004,
} VkSparseImageFormatFlagBits;
```

- VK_SPARSE_IMAGE_FORMAT_SINGLE_MIPTAIL_BIT specifies that the image uses a single mip tail region for all array layers.
- VK_SPARSE_IMAGE_FORMAT_ALIGNED_MIP_SIZE_BIT specifies that the first mip level whose dimensions are not integer multiples of the corresponding dimensions of the sparse image block begins the mip tail region.
- VK_SPARSE_IMAGE_FORMAT_NONSTANDARD_BLOCK_SIZE_BIT specifies that the image uses non-standard sparse image block dimensions, and the imageGranularity values do not match the standard sparse image block dimensions for the given format.

```
// Provided by VK_VERSION_1_0
typedef VkFlags VkSparseImageFormatFlags;
```

VkSparseImageFormatFlags is a bitmask type for setting a mask of zero or more VkSparseImageFormatFlagBits.

vkGetPhysicalDeviceSparseImageFormatProperties returns an array of VkSparseImageFormatProperties. Each element describes properties for one set of image aspects that are bound simultaneously for a VkImage created with the provided image creation parameters. This is usually one element for each aspect in the image, but for interleaved depth/stencil images there is only one element describing the combined aspects.

```
// Provided by VK_VERSION_1_0
void vkGetPhysicalDeviceSparseImageFormatProperties(
    VkPhysicalDevice                            physicalDevice,
    VkFormat                                    format,
    VkImageType                                 type,
    VkSampleCountFlagBits                       samples,
    VkImageUsageFlags                           usage,
    VkImageTiling                               tiling,
    uint32_t*                                   pPropertyCount,
    VkSparseImageFormatProperties*              pProperties);
```

- physicalDevice is the physical device from which to query the sparse image format properties.
- format is the image format.
- type is the dimensionality of the image.
- samples is a VkSampleCountFlagBits value specifying the number of samples per texel.
- usage is a bitmask describing the intended usage of the image.
- tiling is the tiling arrangement of the texel blocks in memory.
- pPropertyCount is a pointer to an integer related to the number of sparse format properties available or queried, as described below.
- pProperties is either NULL or a pointer to an array of VkSparseImageFormatProperties structures.

If pProperties is NULL, then the number of sparse format properties available is returned in pPropertyCount. Otherwise, pPropertyCount **must** point to a variable set by the application to the number of elements in the pProperties array, and on return the variable is overwritten with the number of structures actually written to pProperties. If pPropertyCount is less than the number of sparse format properties available, at most pPropertyCount structures will be written.

If VK_IMAGE_CREATE_SPARSE_RESIDENCY_BIT is not supported for the given arguments, pPropertyCount will be zero upon return, and no data will be written to pProperties.

Multiple aspects are returned for depth/stencil images that are implemented as separate planes by the implementation. The depth and stencil data planes each have unique VkSparseImageFormatProperties data.

Depth/stencil images with depth and stencil data interleaved into a single plane will return a single VkSparseImageFormatProperties structure with the aspectMask set to VK_IMAGE_ASPECT_DEPTH_BIT | VK_IMAGE_ASPECT_STENCIL_BIT.

Valid Usage

- VUID-vkGetPhysicalDeviceSparseImageFormatProperties-samples-01094
  `samples` **must** be a valid VkSampleCountFlagBits value that is set in `VkImageFormatProperties`::`sampleCounts` returned by `vkGetPhysicalDeviceImageFormatProperties` with `format`, `type`, `tiling`, and `usage` equal to those in this command

Valid Usage (Implicit)

- VUID-vkGetPhysicalDeviceSparseImageFormatProperties-physicalDevice-parameter
  `physicalDevice` **must** be a valid VkPhysicalDevice handle
- VUID-vkGetPhysicalDeviceSparseImageFormatProperties-format-parameter
  `format` **must** be a valid VkFormat value
- VUID-vkGetPhysicalDeviceSparseImageFormatProperties-type-parameter
  `type` **must** be a valid VkImageType value
- VUID-vkGetPhysicalDeviceSparseImageFormatProperties-samples-parameter
  `samples` **must** be a valid VkSampleCountFlagBits value
- VUID-vkGetPhysicalDeviceSparseImageFormatProperties-usage-parameter
  `usage` **must** be a valid combination of VkImageUsageFlagBits values
- VUID-vkGetPhysicalDeviceSparseImageFormatProperties-usage-requiredbitmask
  `usage` **must** not be `0`
- VUID-vkGetPhysicalDeviceSparseImageFormatProperties-tiling-parameter
  `tiling` **must** be a valid VkImageTiling value
- VUID-vkGetPhysicalDeviceSparseImageFormatProperties-pPropertyCount-parameter
  `pPropertyCount` **must** be a valid pointer to a `uint32_t` value
- VUID-vkGetPhysicalDeviceSparseImageFormatProperties-pProperties-parameter
  If the value referenced by `pPropertyCount` is not `0`, and `pProperties` is not `NULL`, `pProperties` **must** be a valid pointer to an array of `pPropertyCount` VkSparseImageFormatProperties structures

`vkGetPhysicalDeviceSparseImageFormatProperties2` returns an array of VkSparseImageFormatProperties2. Each element describes properties for one set of image aspects that are bound simultaneously for a `VkImage` created with the provided image creation parameters. This is usually one element for each aspect in the image, but for interleaved depth/stencil images there is only one element describing the combined aspects.

```
// Provided by VK_VERSION_1_1
void vkGetPhysicalDeviceSparseImageFormatProperties2(
    VkPhysicalDevice                            physicalDevice,
    const VkPhysicalDeviceSparseImageFormatInfo2* pFormatInfo,
    uint32_t*                                   pPropertyCount,
    VkSparseImageFormatProperties2*             pProperties);
```

- `physicalDevice` is the physical device from which to query the sparse image format properties.
- `pFormatInfo` is a pointer to a VkPhysicalDeviceSparseImageFormatInfo2 structure containing input parameters to the command.
- `pPropertyCount` is a pointer to an integer related to the number of sparse format properties available or queried, as described below.
- `pProperties` is either `NULL` or a pointer to an array of VkSparseImageFormatProperties2 structures.

`vkGetPhysicalDeviceSparseImageFormatProperties2` behaves identically to vkGetPhysicalDeviceSparseImageFormatProperties, with the ability to return extended information by adding extending structures to the `pNext` chain of its `pProperties` parameter.

Valid Usage (Implicit)

- VUID-vkGetPhysicalDeviceSparseImageFormatProperties2-physicalDevice-parameter
  `physicalDevice` **must** be a valid VkPhysicalDevice handle
- VUID-vkGetPhysicalDeviceSparseImageFormatProperties2-pFormatInfo-parameter
  `pFormatInfo` **must** be a valid pointer to a valid VkPhysicalDeviceSparseImageFormatInfo2 structure
- VUID-vkGetPhysicalDeviceSparseImageFormatProperties2-pPropertyCount-parameter
  `pPropertyCount` **must** be a valid pointer to a `uint32_t` value
- VUID-vkGetPhysicalDeviceSparseImageFormatProperties2-pProperties-parameter
  If the value referenced by `pPropertyCount` is not `0`, and `pProperties` is not `NULL`, `pProperties` **must** be a valid pointer to an array of `pPropertyCount` VkSparseImageFormatProperties2 structures

The `VkPhysicalDeviceSparseImageFormatInfo2` structure is defined as:

```
// Provided by VK_VERSION_1_1
typedef struct VkPhysicalDeviceSparseImageFormatInfo2 {
    VkStructureType           sType;
    const void*               pNext;
    VkFormat                  format;
    VkImageType               type;
    VkSampleCountFlagBits     samples;
    VkImageUsageFlags         usage;
    VkImageTiling             tiling;
} VkPhysicalDeviceSparseImageFormatInfo2;
```

- `sType` is a VkStructureType value identifying this structure.
- `pNext` is `NULL` or a pointer to a structure extending this structure.
- `format` is the image format.
- `type` is the dimensionality of the image.
- `samples` is a VkSampleCountFlagBits value specifying the number of samples per texel.
- `usage` is a bitmask describing the intended usage of the image.
- `tiling` is the tiling arrangement of the texel blocks in memory.

Valid Usage

- VUID-VkPhysicalDeviceSparseImageFormatInfo2-samples-01095
  `samples` **must** be a valid VkSampleCountFlagBits value that is set in `VkImageFormatProperties`::`sampleCounts` returned by `vkGetPhysicalDeviceImageFormatProperties` with `format`, `type`, `tiling`, and `usage` equal to those in this command

Valid Usage (Implicit)

- VUID-VkPhysicalDeviceSparseImageFormatInfo2-sType-sType
  `sType` **must** be `VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_SPARSE_IMAGE_FORMAT_INFO_2`
- VUID-VkPhysicalDeviceSparseImageFormatInfo2-pNext-pNext
  `pNext` **must** be `NULL`
- VUID-VkPhysicalDeviceSparseImageFormatInfo2-format-parameter
  `format` **must** be a valid VkFormat value
- VUID-VkPhysicalDeviceSparseImageFormatInfo2-type-parameter
  `type` **must** be a valid VkImageType value
- VUID-VkPhysicalDeviceSparseImageFormatInfo2-samples-parameter
  `samples` **must** be a valid VkSampleCountFlagBits value
- VUID-VkPhysicalDeviceSparseImageFormatInfo2-usage-parameter
  `usage` **must** be a valid combination of VkImageUsageFlagBits values

- VUID-VkPhysicalDeviceSparseImageFormatInfo2-usage-requiredbitmask
  `usage` **must** not be `0`
- VUID-VkPhysicalDeviceSparseImageFormatInfo2-tiling-parameter
  `tiling` **must** be a valid VkImageTiling value

The `VkSparseImageFormatProperties2` structure is defined as:

```
// Provided by VK_VERSION_1_1
typedef struct VkSparseImageFormatProperties2 {
    VkStructureType                 sType;
    void*                           pNext;
    VkSparseImageFormatProperties   properties;
} VkSparseImageFormatProperties2;
```

- `sType` is a VkStructureType value identifying this structure.
- `pNext` is `NULL` or a pointer to a structure extending this structure.
- `properties` is a VkSparseImageFormatProperties structure which is populated with the same values as in vkGetPhysicalDeviceSparseImageFormatProperties.

Valid Usage (Implicit)

- VUID-VkSparseImageFormatProperties2-sType-sType
  `sType` **must** be `VK_STRUCTURE_TYPE_SPARSE_IMAGE_FORMAT_PROPERTIES_2`
- VUID-VkSparseImageFormatProperties2-pNext-pNext
  `pNext` **must** be `NULL`

29.7.4. Sparse Resource Creation

Sparse resources require that one or more sparse feature flags be specified (as part of the `VkPhysicalDeviceFeatures` structure described previously in the Physical Device Features section) when calling vkCreateDevice. When the appropriate device features are enabled, the `VK_BUFFER_CREATE_SPARSE_*` and `VK_IMAGE_CREATE_SPARSE_*` flags **can** be used. See vkCreateBuffer and vkCreateImage for details of the resource creation APIs.

NOTE

Specifying `VK_BUFFER_CREATE_SPARSE_RESIDENCY_BIT` or `VK_IMAGE_CREATE_SPARSE_RESIDENCY_BIT` requires specifying `VK_BUFFER_CREATE_SPARSE_BINDING_BIT` or `VK_IMAGE_CREATE_SPARSE_BINDING_BIT`, respectively, as well. This means that resources **must** be created with the appropriate `*_SPARSE_BINDING_BIT` to be used with the sparse binding command (`vkQueueBindSparse`).

29.7.5. Sparse Resource Memory Requirements

Sparse resources have specific memory requirements related to binding sparse memory. These

memory requirements are reported differently for VkBuffer objects and VkImage objects.

Buffer and Fully-Resident Images

Buffers (both fully and partially resident) and fully-resident images **can** be bound to memory using only the data from VkMemoryRequirements. For all sparse resources the VkMemoryRequirements::alignment member specifies both the binding granularity in bytes and the **required** alignment of VkDeviceMemory.

Partially Resident Images

Partially resident images have a different method for binding memory. As with buffers and fully resident images, the VkMemoryRequirements::alignment field specifies the binding granularity in bytes for the image.

Requesting sparse memory requirements for VkImage objects using vkGetImageSparseMemoryRequirements will return an array of one or more VkSparseImageMemoryRequirements structures. Each structure describes the sparse memory requirements for a group of aspects of the image.

The sparse image **must** have been created using the VK_IMAGE_CREATE_SPARSE_RESIDENCY_BIT flag to retrieve valid sparse image memory requirements.

Sparse Image Memory Requirements

The VkSparseImageMemoryRequirements structure is defined as:

```
// Provided by VK_VERSION_1_0
typedef struct VkSparseImageMemoryRequirements {
    VkSparseImageFormatProperties    formatProperties;
    uint32_t                         imageMipTailFirstLod;
    VkDeviceSize                     imageMipTailSize;
    VkDeviceSize                     imageMipTailOffset;
    VkDeviceSize                     imageMipTailStride;
} VkSparseImageMemoryRequirements;
```

- formatProperties is a VkSparseImageFormatProperties structure specifying properties of the image format.
- imageMipTailFirstLod is the first mip level at which image subresources are included in the mip tail region.
- imageMipTailSize is the memory size (in bytes) of the mip tail region. If formatProperties.flags contains VK_SPARSE_IMAGE_FORMAT_SINGLE_MIPTAIL_BIT, this is the size of the whole mip tail, otherwise this is the size of the mip tail of a single array layer. This value is guaranteed to be a multiple of the sparse block size in bytes.
- imageMipTailOffset is the opaque memory offset used with VkSparseImageOpaqueMemoryBindInfo to bind the mip tail region(s).
- imageMipTailStride is the offset stride between each array-layer's mip tail, if

`formatProperties.flags` does not contain `VK_SPARSE_IMAGE_FORMAT_SINGLE_MIPTAIL_BIT` (otherwise the value is undefined).

To query sparse memory requirements for an image, call:

```
// Provided by VK_VERSION_1_0
void vkGetImageSparseMemoryRequirements(
    VkDevice                                    device,
    VkImage                                     image,
    uint32_t*                                   pSparseMemoryRequirementCount,
    VkSparseImageMemoryRequirements*            pSparseMemoryRequirements);
```

- `device` is the logical device that owns the image.
- `image` is the VkImage object to get the memory requirements for.
- `pSparseMemoryRequirementCount` is a pointer to an integer related to the number of sparse memory requirements available or queried, as described below.
- `pSparseMemoryRequirements` is either `NULL` or a pointer to an array of `VkSparseImageMemoryRequirements` structures.

If `pSparseMemoryRequirements` is `NULL`, then the number of sparse memory requirements available is returned in `pSparseMemoryRequirementCount`. Otherwise, `pSparseMemoryRequirementCount` **must** point to a variable set by the application to the number of elements in the `pSparseMemoryRequirements` array, and on return the variable is overwritten with the number of structures actually written to `pSparseMemoryRequirements`. If `pSparseMemoryRequirementCount` is less than the number of sparse memory requirements available, at most `pSparseMemoryRequirementCount` structures will be written.

If the image was not created with `VK_IMAGE_CREATE_SPARSE_RESIDENCY_BIT` then `pSparseMemoryRequirementCount` will be zero and `pSparseMemoryRequirements` will not be written to.

NOTE

It is legal for an implementation to report a larger value in `VkMemoryRequirements::size` than would be obtained by adding together memory sizes for all `VkSparseImageMemoryRequirements` returned by `vkGetImageSparseMemoryRequirements`. This **may** occur when the implementation requires unused padding in the address range describing the resource.

Valid Usage (Implicit)

- VUID-vkGetImageSparseMemoryRequirements-device-parameter
  `device` **must** be a valid VkDevice handle
- VUID-vkGetImageSparseMemoryRequirements-image-parameter
  `image` **must** be a valid VkImage handle
- VUID-vkGetImageSparseMemoryRequirements-pSparseMemoryRequirementCount-parameter
  `pSparseMemoryRequirementCount` **must** be a valid pointer to a `uint32_t` value
- VUID-vkGetImageSparseMemoryRequirements-pSparseMemoryRequirements-parameter

If the value referenced by pSparseMemoryRequirementCount is not 0, and pSparseMemoryRequirements is not NULL, pSparseMemoryRequirements **must** be a valid pointer to an array of pSparseMemoryRequirementCount VkSparseImageMemoryRequirements structures

- VUID-vkGetImageSparseMemoryRequirements-image-parent
  image **must** have been created, allocated, or retrieved from device

To query sparse memory requirements for an image, call:

```
// Provided by VK_VERSION_1_1
void vkGetImageSparseMemoryRequirements2(
    VkDevice                                    device,
    const VkImageSparseMemoryRequirementsInfo2* pInfo,
    uint32_t*                                   pSparseMemoryRequirementCount,
    VkSparseImageMemoryRequirements2*           pSparseMemoryRequirements);
```

- device is the logical device that owns the image.
- pInfo is a pointer to a VkImageSparseMemoryRequirementsInfo2 structure containing parameters required for the memory requirements query.
- pSparseMemoryRequirementCount is a pointer to an integer related to the number of sparse memory requirements available or queried, as described below.
- pSparseMemoryRequirements is either NULL or a pointer to an array of VkSparseImageMemoryRequirements2 structures.

Valid Usage (Implicit)

- VUID-vkGetImageSparseMemoryRequirements2-device-parameter
  device **must** be a valid VkDevice handle
- VUID-vkGetImageSparseMemoryRequirements2-pInfo-parameter
  pInfo **must** be a valid pointer to a valid VkImageSparseMemoryRequirementsInfo2 structure
- VUID-vkGetImageSparseMemoryRequirements2-pSparseMemoryRequirementCount-parameter
  pSparseMemoryRequirementCount **must** be a valid pointer to a uint32_t value
- VUID-vkGetImageSparseMemoryRequirements2-pSparseMemoryRequirements-parameter
  If the value referenced by pSparseMemoryRequirementCount is not 0, and pSparseMemoryRequirements is not NULL, pSparseMemoryRequirements **must** be a valid pointer to an array of pSparseMemoryRequirementCount VkSparseImageMemoryRequirements2 structures

To determine the sparse memory requirements for an image resource without creating an object, call:

```
// Provided by VK_VERSION_1_3
void vkGetDeviceImageSparseMemoryRequirements(
    VkDevice                                    device,
    const VkDeviceImageMemoryRequirements*      pInfo,
    uint32_t*                                   pSparseMemoryRequirementCount,
    VkSparseImageMemoryRequirements2*           pSparseMemoryRequirements);
```

- `device` is the logical device intended to own the image.
- `pInfo` is a pointer to a VkDeviceImageMemoryRequirements structure containing parameters required for the memory requirements query.
- `pSparseMemoryRequirementCount` is a pointer to an integer related to the number of sparse memory requirements available or queried, as described below.
- `pSparseMemoryRequirements` is either `NULL` or a pointer to an array of `VkSparseImageMemoryRequirements2` structures.

Valid Usage (Implicit)

- VUID-vkGetDeviceImageSparseMemoryRequirements-device-parameter
  `device` **must** be a valid VkDevice handle
- VUID-vkGetDeviceImageSparseMemoryRequirements-pInfo-parameter
  `pInfo` **must** be a valid pointer to a valid VkDeviceImageMemoryRequirements structure
- VUID-vkGetDeviceImageSparseMemoryRequirements-pSparseMemoryRequirementCount-parameter
  `pSparseMemoryRequirementCount` **must** be a valid pointer to a `uint32_t` value
- VUID-vkGetDeviceImageSparseMemoryRequirements-pSparseMemoryRequirements-parameter
  If the value referenced by `pSparseMemoryRequirementCount` is not `0`, and `pSparseMemoryRequirements` is not `NULL`, `pSparseMemoryRequirements` **must** be a valid pointer to an array of `pSparseMemoryRequirementCount` VkSparseImageMemoryRequirements2 structures

The `VkImageSparseMemoryRequirementsInfo2` structure is defined as:

```
// Provided by VK_VERSION_1_1
typedef struct VkImageSparseMemoryRequirementsInfo2 {
    VkStructureType    sType;
    const void*        pNext;
    VkImage            image;
} VkImageSparseMemoryRequirementsInfo2;
```

- `sType` is a VkStructureType value identifying this structure.
- `pNext` is `NULL` or a pointer to a structure extending this structure.

- `image` is the image to query.

Valid Usage (Implicit)

- VUID-VkImageSparseMemoryRequirementsInfo2-sType-sType
  `sType` **must** be `VK_STRUCTURE_TYPE_IMAGE_SPARSE_MEMORY_REQUIREMENTS_INFO_2`
- VUID-VkImageSparseMemoryRequirementsInfo2-pNext-pNext
  `pNext` **must** be `NULL`
- VUID-VkImageSparseMemoryRequirementsInfo2-image-parameter
  `image` **must** be a valid VkImage handle

The `VkSparseImageMemoryRequirements2` structure is defined as:

```
// Provided by VK_VERSION_1_1
typedef struct VkSparseImageMemoryRequirements2 {
    VkStructureType                    sType;
    void*                              pNext;
    VkSparseImageMemoryRequirements    memoryRequirements;
} VkSparseImageMemoryRequirements2;
```

- `sType` is a VkStructureType value identifying this structure.
- `pNext` is `NULL` or a pointer to a structure extending this structure.
- `memoryRequirements` is a VkSparseImageMemoryRequirements structure describing the memory requirements of the sparse image.

Valid Usage (Implicit)

- VUID-VkSparseImageMemoryRequirements2-sType-sType
  `sType` **must** be `VK_STRUCTURE_TYPE_SPARSE_IMAGE_MEMORY_REQUIREMENTS_2`
- VUID-VkSparseImageMemoryRequirements2-pNext-pNext
  `pNext` **must** be `NULL`

29.7.6. Binding Resource Memory

Non-sparse resources are backed by a single physical allocation prior to device use (via `vkBindImageMemory` or `vkBindBufferMemory`), and their backing **must** not be changed. On the other hand, sparse resources **can** be bound to memory non-contiguously and these bindings **can** be altered during the lifetime of the resource.

NOTE It is important to note that freeing a `VkDeviceMemory` object with `vkFreeMemory` will not cause resources (or resource regions) bound to the memory object to become unbound. Applications **must** not access resources bound to memory that has been freed.

Sparse memory bindings execute on a queue that includes the VK_QUEUE_SPARSE_BINDING_BIT bit. Applications **must** use synchronization primitives to guarantee that other queues do not access ranges of memory concurrently with a binding change. Applications **can** access other ranges of the same resource while a bind operation is executing.

NOTE	Implementations **must** provide a guarantee that simultaneously binding sparse blocks while another queue accesses those same sparse blocks via a sparse resource **must** not access memory owned by another process or otherwise corrupt the system.

While some implementations **may** include VK_QUEUE_SPARSE_BINDING_BIT support in queue families that also include graphics and compute support, other implementations **may** only expose a VK_QUEUE_SPARSE_BINDING_BIT-only queue family. In either case, applications **must** use synchronization primitives to explicitly request any ordering dependencies between sparse memory binding operations and other graphics/compute/transfer operations, as sparse binding operations are not automatically ordered against command buffer execution, even within a single queue.

When binding memory explicitly for the VK_IMAGE_ASPECT_METADATA_BIT the application **must** use the VK_SPARSE_MEMORY_BIND_METADATA_BIT in the VkSparseMemoryBind::flags field when binding memory. Binding memory for metadata is done the same way as binding memory for the mip tail, with the addition of the VK_SPARSE_MEMORY_BIND_METADATA_BIT flag.

Binding the mip tail for any aspect **must** only be performed using VkSparseImageOpaqueMemoryBindInfo. If formatProperties.flags contains VK_SPARSE_IMAGE_FORMAT_SINGLE_MIPTAIL_BIT, then it **can** be bound with a single VkSparseMemoryBind structure, with resourceOffset = imageMipTailOffset and size = imageMipTailSize.

If formatProperties.flags does not contain VK_SPARSE_IMAGE_FORMAT_SINGLE_MIPTAIL_BIT then the offset for the mip tail in each array layer is given as:

```
arrayMipTailOffset = imageMipTailOffset + arrayLayer * imageMipTailStride;
```

and the mip tail **can** be bound with layerCount VkSparseMemoryBind structures, each using size = imageMipTailSize and resourceOffset = arrayMipTailOffset as defined above.

Sparse memory binding is handled by the following APIs and related data structures.

Sparse Memory Binding Functions

The VkSparseMemoryBind structure is defined as:

```
// Provided by VK_VERSION_1_0
typedef struct VkSparseMemoryBind {
    VkDeviceSize               resourceOffset;
    VkDeviceSize               size;
    VkDeviceMemory             memory;
    VkDeviceSize               memoryOffset;
    VkSparseMemoryBindFlags    flags;
} VkSparseMemoryBind;
```

- `resourceOffset` is the offset into the resource.
- `size` is the size of the memory region to be bound.
- `memory` is the VkDeviceMemory object that the range of the resource is bound to. If `memory` is VK_NULL_HANDLE, the range is unbound.
- `memoryOffset` is the offset into the VkDeviceMemory object to bind the resource range to. If `memory` is VK_NULL_HANDLE, this value is ignored.
- `flags` is a bitmask of VkSparseMemoryBindFlagBits specifying usage of the binding operation.

The *binding range* [`resourceOffset`, `resourceOffset` + `size`) has different constraints based on `flags`. If `flags` contains `VK_SPARSE_MEMORY_BIND_METADATA_BIT`, the binding range **must** be within the mip tail region of the metadata aspect. This metadata region is defined by:

metadataRegion = [base, base + `imageMipTailSize`)

base = `imageMipTailOffset` + `imageMipTailStride` × n

and `imageMipTailOffset`, `imageMipTailSize`, and `imageMipTailStride` values are from the VkSparseImageMemoryRequirements corresponding to the metadata aspect of the image, and n is a valid array layer index for the image,

`imageMipTailStride` is considered to be zero for aspects where `VkSparseImageMemoryRequirements::formatProperties.flags` contains `VK_SPARSE_IMAGE_FORMAT_SINGLE_MIPTAIL_BIT`.

If `flags` does not contain `VK_SPARSE_MEMORY_BIND_METADATA_BIT`, the binding range **must** be within the range [0,VkMemoryRequirements::`size`).

Valid Usage

- VUID-VkSparseMemoryBind-memory-01096
  If `memory` is not VK_NULL_HANDLE, `memory` and `memoryOffset` **must** match the memory requirements of the resource, as described in section Resource Memory Association
- VUID-VkSparseMemoryBind-resourceOffset-09491
  If the resource being bound is a `VkBuffer`, `resourceOffset`, `memoryOffset` and `size` **must** be an integer multiple of the `alignment` of the VkMemoryRequirements structure returned from a call to vkGetBufferMemoryRequirements with the buffer resource

- VUID-VkSparseMemoryBind-resourceOffset-09492
  If the resource being bound is a `VkImage`, `resourceOffset` and `memoryOffset` **must** be an integer multiple of the `alignment` of the VkMemoryRequirements structure returned from a call to vkGetImageMemoryRequirements with the image resource
- VUID-VkSparseMemoryBind-memory-01097
  If `memory` is not VK_NULL_HANDLE, `memory` **must** not have been created with a memory type that reports `VK_MEMORY_PROPERTY_LAZILY_ALLOCATED_BIT` bit set
- VUID-VkSparseMemoryBind-size-01098
  `size` **must** be greater than `0`
- VUID-VkSparseMemoryBind-resourceOffset-01099
  `resourceOffset` **must** be less than the size of the resource
- VUID-VkSparseMemoryBind-size-01100
  `size` **must** be less than or equal to the size of the resource minus `resourceOffset`
- VUID-VkSparseMemoryBind-memoryOffset-01101
  `memoryOffset` **must** be less than the size of `memory`
- VUID-VkSparseMemoryBind-size-01102
  `size` **must** be less than or equal to the size of `memory` minus `memoryOffset`
- VUID-VkSparseMemoryBind-memory-02730
  If `memory` was created with VkExportMemoryAllocateInfo::`handleTypes` not equal to `0`, at least one handle type it contained **must** also have been set in VkExternalMemoryBufferCreateInfo::`handleTypes` or VkExternalMemoryImageCreateInfo::`handleTypes` when the resource was created
- VUID-VkSparseMemoryBind-memory-02731
  If `memory` was created by a memory import operation, the external handle type of the imported memory **must** also have been set in VkExternalMemoryBufferCreateInfo::`handleTypes` or VkExternalMemoryImageCreateInfo::`handleTypes` when the resource was created

Valid Usage (Implicit)

- VUID-VkSparseMemoryBind-memory-parameter
  If `memory` is not VK_NULL_HANDLE, `memory` **must** be a valid VkDeviceMemory handle
- VUID-VkSparseMemoryBind-flags-parameter
  `flags` **must** be a valid combination of VkSparseMemoryBindFlagBits values

Bits which **can** be set in VkSparseMemoryBind::`flags`, specifying usage of a sparse memory binding operation, are:

```
// Provided by VK_VERSION_1_0
typedef enum VkSparseMemoryBindFlagBits {
    VK_SPARSE_MEMORY_BIND_METADATA_BIT = 0x00000001,
} VkSparseMemoryBindFlagBits;
```

- VK_SPARSE_MEMORY_BIND_METADATA_BIT specifies that the memory being bound is only for the metadata aspect.

```
// Provided by VK_VERSION_1_0
typedef VkFlags VkSparseMemoryBindFlags;
```

VkSparseMemoryBindFlags is a bitmask type for setting a mask of zero or more VkSparseMemoryBindFlagBits.

Memory is bound to VkBuffer objects created with the VK_BUFFER_CREATE_SPARSE_BINDING_BIT flag using the following structure:

```
// Provided by VK_VERSION_1_0
typedef struct VkSparseBufferMemoryBindInfo {
    VkBuffer                     buffer;
    uint32_t                     bindCount;
    const VkSparseMemoryBind*    pBinds;
} VkSparseBufferMemoryBindInfo;
```

- buffer is the VkBuffer object to be bound.
- bindCount is the number of VkSparseMemoryBind structures in the pBinds array.
- pBinds is a pointer to an array of VkSparseMemoryBind structures.

Valid Usage (Implicit)

- VUID-VkSparseBufferMemoryBindInfo-buffer-parameter
  buffer **must** be a valid VkBuffer handle
- VUID-VkSparseBufferMemoryBindInfo-pBinds-parameter
  pBinds **must** be a valid pointer to an array of bindCount valid VkSparseMemoryBind structures
- VUID-VkSparseBufferMemoryBindInfo-bindCount-arraylength
  bindCount **must** be greater than 0

Memory is bound to opaque regions of VkImage objects created with the VK_IMAGE_CREATE_SPARSE_BINDING_BIT flag using the following structure:

```
// Provided by VK_VERSION_1_0
typedef struct VkSparseImageOpaqueMemoryBindInfo {
    VkImage                      image;
    uint32_t                     bindCount;
    const VkSparseMemoryBind*    pBinds;
} VkSparseImageOpaqueMemoryBindInfo;
```

- image is the VkImage object to be bound.

- `bindCount` is the number of VkSparseMemoryBind structures in the `pBinds` array.
- `pBinds` is a pointer to an array of VkSparseMemoryBind structures.

NOTE

This structure is normally used to bind memory to fully-resident sparse images or for mip tail regions of partially resident images. However, it **can** also be used to bind memory for the entire binding range of partially resident images.

If the `pBinds`[i].flags of an element *i* of `pBinds` does not contain `VK_SPARSE_MEMORY_BIND_METADATA_BIT`, the `resourceOffset` is in the range [0, VkMemoryRequirements::`size`), This range includes data from all aspects of the image, including metadata. For most implementations this will probably mean that the `resourceOffset` is a simple device address offset within the resource. It is possible for an application to bind a range of memory that includes both resource data and metadata. However, the application would not know what part of the image the memory is used for, or if any range is being used for metadata.

If the `pBinds`[i].flags of an element *i* of `pBinds` contains `VK_SPARSE_MEMORY_BIND_METADATA_BIT`, the binding range specified **must** be within the mip tail region of the metadata aspect. In this case the `resourceOffset` is not **required** to be a simple device address offset within the resource. However, it *is* defined to be within [`imageMipTailOffset`, `imageMipTailOffset` + `imageMipTailSize`) for the metadata aspect. See VkSparseMemoryBind for the full constraints on binding region with this flag present.

Valid Usage

- VUID-VkSparseImageOpaqueMemoryBindInfo-pBinds-01103
  If the `flags` member of any element of `pBinds` contains `VK_SPARSE_MEMORY_BIND_METADATA_BIT`, the binding range defined **must** be within the mip tail region of the metadata aspect of `image`

Valid Usage (Implicit)

- VUID-VkSparseImageOpaqueMemoryBindInfo-image-parameter
  `image` **must** be a valid VkImage handle
- VUID-VkSparseImageOpaqueMemoryBindInfo-pBinds-parameter
  `pBinds` **must** be a valid pointer to an array of `bindCount` valid VkSparseMemoryBind structures
- VUID-VkSparseImageOpaqueMemoryBindInfo-bindCount-arraylength
  `bindCount` **must** be greater than `0`

Memory **can** be bound to sparse image blocks of `VkImage` objects created with the `VK_IMAGE_CREATE_SPARSE_RESIDENCY_BIT` flag using the following structure:

```
// Provided by VK_VERSION_1_0
typedef struct VkSparseImageMemoryBindInfo {
    VkImage                                  image;
    uint32_t                                 bindCount;
    const VkSparseImageMemoryBind*           pBinds;
} VkSparseImageMemoryBindInfo;
```

- `image` is the VkImage object to be bound
- `bindCount` is the number of VkSparseImageMemoryBind structures in `pBinds` array
- `pBinds` is a pointer to an array of VkSparseImageMemoryBind structures

Valid Usage

- VUID-VkSparseImageMemoryBindInfo-subresource-01722
  The `subresource.mipLevel` member of each element of `pBinds` **must** be less than the `mipLevels` specified in VkImageCreateInfo when `image` was created
- VUID-VkSparseImageMemoryBindInfo-subresource-01723
  The `subresource.arrayLayer` member of each element of `pBinds` **must** be less than the `arrayLayers` specified in VkImageCreateInfo when `image` was created
- VUID-VkSparseImageMemoryBindInfo-subresource-01106
  The `subresource.aspectMask` member of each element of `pBinds` **must** be valid for the `format` specified in VkImageCreateInfo when `image` was created
- VUID-VkSparseImageMemoryBindInfo-image-02901
  `image` **must** have been created with `VK_IMAGE_CREATE_SPARSE_RESIDENCY_BIT` set

Valid Usage (Implicit)

- VUID-VkSparseImageMemoryBindInfo-image-parameter
  `image` **must** be a valid VkImage handle
- VUID-VkSparseImageMemoryBindInfo-pBinds-parameter
  `pBinds` **must** be a valid pointer to an array of `bindCount` valid VkSparseImageMemoryBind structures
- VUID-VkSparseImageMemoryBindInfo-bindCount-arraylength
  `bindCount` **must** be greater than `0`

The `VkSparseImageMemoryBind` structure is defined as:

```
// Provided by VK_VERSION_1_0
typedef struct VkSparseImageMemoryBind {
    VkImageSubresource         subresource;
    VkOffset3D                 offset;
    VkExtent3D                 extent;
    VkDeviceMemory             memory;
    VkDeviceSize               memoryOffset;
    VkSparseMemoryBindFlags    flags;
} VkSparseImageMemoryBind;
```

- `subresource` is the image *aspect* and region of interest in the image.
- `offset` are the coordinates of the first texel within the image subresource to bind.
- `extent` is the size in texels of the region within the image subresource to bind. The extent **must** be a multiple of the sparse image block dimensions, except when binding sparse image blocks along the edge of an image subresource it **can** instead be such that any coordinate of `offset` + `extent` equals the corresponding dimensions of the image subresource.
- `memory` is the VkDeviceMemory object that the sparse image blocks of the image are bound to. If `memory` is VK_NULL_HANDLE, the sparse image blocks are unbound.
- `memoryOffset` is an offset into VkDeviceMemory object. If `memory` is VK_NULL_HANDLE, this value is ignored.
- `flags` are sparse memory binding flags.

Valid Usage

- VUID-VkSparseImageMemoryBind-memory-01104
  If the `sparseResidencyAliased` feature is not enabled, and if any other resources are bound to ranges of `memory`, the range of `memory` being bound **must** not overlap with those bound ranges
- VUID-VkSparseImageMemoryBind-memory-01105
  `memory` and `memoryOffset` **must** match the memory requirements of the calling command's `image`, as described in section Resource Memory Association
- VUID-VkSparseImageMemoryBind-offset-01107
  `offset.x` **must** be a multiple of the sparse image block width (`VkSparseImageFormatProperties`::`imageGranularity.width`) of the image
- VUID-VkSparseImageMemoryBind-extent-09388
  `extent.width` **must** be greater than `0`
- VUID-VkSparseImageMemoryBind-extent-01108
  `extent.width` **must** either be a multiple of the sparse image block width of the image, or else (`extent.width` + `offset.x`) **must** equal the width of the image subresource
- VUID-VkSparseImageMemoryBind-offset-01109
  `offset.y` **must** be a multiple of the sparse image block height (`VkSparseImageFormatProperties`::`imageGranularity.height`) of the image

- VUID-VkSparseImageMemoryBind-extent-09389
  `extent.height` **must** be greater than `0`
- VUID-VkSparseImageMemoryBind-extent-01110
  `extent.height` **must** either be a multiple of the sparse image block height of the image, or else (`extent.height` + `offset.y`) **must** equal the height of the image subresource
- VUID-VkSparseImageMemoryBind-offset-01111
  `offset.z` **must** be a multiple of the sparse image block depth (`VkSparseImageFormatProperties`::`imageGranularity.depth`) of the image
- VUID-VkSparseImageMemoryBind-extent-09390
  `extent.depth` **must** be greater than `0`
- VUID-VkSparseImageMemoryBind-extent-01112
  `extent.depth` **must** either be a multiple of the sparse image block depth of the image, or else (`extent.depth` + `offset.z`) **must** equal the depth of the image subresource
- VUID-VkSparseImageMemoryBind-memory-02732
  If `memory` was created with VkExportMemoryAllocateInfo::`handleTypes` not equal to `0`, at least one handle type it contained **must** also have been set in VkExternalMemoryImageCreateInfo::`handleTypes` when the image was created
- VUID-VkSparseImageMemoryBind-memory-02733
  If `memory` was created by a memory import operation, the external handle type of the imported memory **must** also have been set in VkExternalMemoryImageCreateInfo ::`handleTypes` when `image` was created

Valid Usage (Implicit)

- VUID-VkSparseImageMemoryBind-subresource-parameter
  `subresource` **must** be a valid VkImageSubresource structure
- VUID-VkSparseImageMemoryBind-memory-parameter
  If `memory` is not VK_NULL_HANDLE, `memory` **must** be a valid VkDeviceMemory handle
- VUID-VkSparseImageMemoryBind-flags-parameter
  `flags` **must** be a valid combination of VkSparseMemoryBindFlagBits values

To submit sparse binding operations to a queue, call:

```
// Provided by VK_VERSION_1_0
VkResult vkQueueBindSparse(
    VkQueue                                     queue,
    uint32_t                                    bindInfoCount,
    const VkBindSparseInfo*                     pBindInfo,
    VkFence                                     fence);
```

- `queue` is the queue that the sparse binding operations will be submitted to.
- `bindInfoCount` is the number of elements in the `pBindInfo` array.

- `pBindInfo` is a pointer to an array of VkBindSparseInfo structures, each specifying a sparse binding submission batch.
- `fence` is an **optional** handle to a fence to be signaled. If `fence` is not VK_NULL_HANDLE, it defines a fence signal operation.

`vkQueueBindSparse` is a queue submission command, with each batch defined by an element of `pBindInfo` as a VkBindSparseInfo structure. Batches begin execution in the order they appear in `pBindInfo`, but **may** complete out of order.

Within a batch, a given range of a resource **must** not be bound more than once. Across batches, if a range is to be bound to one allocation and offset and then to another allocation and offset, then the application **must** guarantee (usually using semaphores) that the binding operations are executed in the correct order, as well as to order binding operations against the execution of command buffer submissions.

As no operation to vkQueueBindSparse causes any pipeline stage to access memory, synchronization primitives used in this command effectively only define execution dependencies.

Additional information about fence and semaphore operation is described in the synchronization chapter.

Valid Usage

- VUID-vkQueueBindSparse-fence-01113
  If `fence` is not VK_NULL_HANDLE, `fence` **must** be unsignaled
- VUID-vkQueueBindSparse-fence-01114
  If `fence` is not VK_NULL_HANDLE, `fence` **must** not be associated with any other queue command that has not yet completed execution on that queue
- VUID-vkQueueBindSparse-pSignalSemaphores-01115
  Each element of the `pSignalSemaphores` member of each element of `pBindInfo` **must** be unsignaled when the semaphore signal operation it defines is executed on the device
- VUID-vkQueueBindSparse-pWaitSemaphores-01116
  When a semaphore wait operation referring to a binary semaphore defined by any element of the `pWaitSemaphores` member of any element of `pBindInfo` executes on `queue`, there **must** be no other queues waiting on the same semaphore
- VUID-vkQueueBindSparse-pWaitSemaphores-03245
  All elements of the `pWaitSemaphores` member of all elements of `pBindInfo` referring to a semaphore created with a VkSemaphoreType of `VK_SEMAPHORE_TYPE_BINARY` **must** reference a semaphore signal operation that has been submitted for execution and any semaphore signal operations on which it depends **must** have also been submitted for execution

Valid Usage (Implicit)

- VUID-vkQueueBindSparse-queue-parameter
  `queue` **must** be a valid VkQueue handle

- VUID-vkQueueBindSparse-pBindInfo-parameter
  If `bindInfoCount` is not `0`, `pBindInfo` **must** be a valid pointer to an array of `bindInfoCount` valid VkBindSparseInfo structures
- VUID-vkQueueBindSparse-fence-parameter
  If `fence` is not VK_NULL_HANDLE, `fence` **must** be a valid VkFence handle
- VUID-vkQueueBindSparse-queuetype
  The `queue` **must** support sparse binding operations
- VUID-vkQueueBindSparse-commonparent
  Both of `fence`, and `queue` that are valid handles of non-ignored parameters **must** have been created, allocated, or retrieved from the same VkDevice

Host Synchronization

- Host access to `queue` **must** be externally synchronized
- Host access to `fence` **must** be externally synchronized

Command Properties

Command Buffer Levels	Render Pass Scope	Supported Queue Types	Command Type
-	-	SPARSE_BINDING	-

Return Codes

Success

- `VK_SUCCESS`

Failure

- `VK_ERROR_OUT_OF_HOST_MEMORY`
- `VK_ERROR_OUT_OF_DEVICE_MEMORY`
- `VK_ERROR_DEVICE_LOST`

The `VkBindSparseInfo` structure is defined as:

```
// Provided by VK_VERSION_1_0
typedef struct VkBindSparseInfo {
    VkStructureType                              sType;
    const void*                                  pNext;
    uint32_t                                     waitSemaphoreCount;
    const VkSemaphore*                           pWaitSemaphores;
    uint32_t                                     bufferBindCount;
    const VkSparseBufferMemoryBindInfo*          pBufferBinds;
    uint32_t                                     imageOpaqueBindCount;
    const VkSparseImageOpaqueMemoryBindInfo*     pImageOpaqueBinds;
    uint32_t                                     imageBindCount;
    const VkSparseImageMemoryBindInfo*           pImageBinds;
    uint32_t                                     signalSemaphoreCount;
    const VkSemaphore*                           pSignalSemaphores;
} VkBindSparseInfo;
```

- `sType` is a VkStructureType value identifying this structure.
- `pNext` is `NULL` or a pointer to a structure extending this structure.
- `waitSemaphoreCount` is the number of semaphores upon which to wait before executing the sparse binding operations for the batch.
- `pWaitSemaphores` is a pointer to an array of semaphores upon which to wait on before the sparse binding operations for this batch begin execution. If semaphores to wait on are provided, they define a semaphore wait operation.
- `bufferBindCount` is the number of sparse buffer bindings to perform in the batch.
- `pBufferBinds` is a pointer to an array of VkSparseBufferMemoryBindInfo structures.
- `imageOpaqueBindCount` is the number of opaque sparse image bindings to perform.
- `pImageOpaqueBinds` is a pointer to an array of VkSparseImageOpaqueMemoryBindInfo structures, indicating opaque sparse image bindings to perform.
- `imageBindCount` is the number of sparse image bindings to perform.
- `pImageBinds` is a pointer to an array of VkSparseImageMemoryBindInfo structures, indicating sparse image bindings to perform.
- `signalSemaphoreCount` is the number of semaphores to be signaled once the sparse binding operations specified by the structure have completed execution.
- `pSignalSemaphores` is a pointer to an array of semaphores which will be signaled when the sparse binding operations for this batch have completed execution. If semaphores to be signaled are provided, they define a semaphore signal operation.

Valid Usage

- VUID-VkBindSparseInfo-pWaitSemaphores-03246
  If any element of `pWaitSemaphores` or `pSignalSemaphores` was created with a VkSemaphoreType of `VK_SEMAPHORE_TYPE_TIMELINE` then the `pNext` chain **must** include a VkTimelineSemaphoreSubmitInfo structure

- VUID-VkBindSparseInfo-pNext-03247
  If the pNext chain of this structure includes a VkTimelineSemaphoreSubmitInfo structure and any element of pWaitSemaphores was created with a VkSemaphoreType of VK_SEMAPHORE_TYPE_TIMELINE then its waitSemaphoreValueCount member **must** equal waitSemaphoreCount
- VUID-VkBindSparseInfo-pNext-03248
  If the pNext chain of this structure includes a VkTimelineSemaphoreSubmitInfo structure and any element of pSignalSemaphores was created with a VkSemaphoreType of VK_SEMAPHORE_TYPE_TIMELINE then its signalSemaphoreValueCount member **must** equal signalSemaphoreCount
- VUID-VkBindSparseInfo-pSignalSemaphores-03249
  For each element of pSignalSemaphores created with a VkSemaphoreType of VK_SEMAPHORE_TYPE_TIMELINE the corresponding element of VkTimelineSemaphoreSubmitInfo::pSignalSemaphoreValues **must** have a value greater than the current value of the semaphore when the semaphore signal operation is executed
- VUID-VkBindSparseInfo-pWaitSemaphores-03250
  For each element of pWaitSemaphores created with a VkSemaphoreType of VK_SEMAPHORE_TYPE_TIMELINE the corresponding element of VkTimelineSemaphoreSubmitInfo::pWaitSemaphoreValues **must** have a value which does not differ from the current value of the semaphore or from the value of any outstanding semaphore wait or signal operation on that semaphore by more than maxTimelineSemaphoreValueDifference
- VUID-VkBindSparseInfo-pSignalSemaphores-03251
  For each element of pSignalSemaphores created with a VkSemaphoreType of VK_SEMAPHORE_TYPE_TIMELINE the corresponding element of VkTimelineSemaphoreSubmitInfo::pSignalSemaphoreValues **must** have a value which does not differ from the current value of the semaphore or from the value of any outstanding semaphore wait or signal operation on that semaphore by more than maxTimelineSemaphoreValueDifference

Valid Usage (Implicit)

- VUID-VkBindSparseInfo-sType-sType
  sType **must** be VK_STRUCTURE_TYPE_BIND_SPARSE_INFO
- VUID-VkBindSparseInfo-pNext-pNext
  Each pNext member of any structure (including this one) in the pNext chain **must** be either NULL or a pointer to a valid instance of VkDeviceGroupBindSparseInfo or VkTimelineSemaphoreSubmitInfo
- VUID-VkBindSparseInfo-sType-unique
  The sType value of each struct in the pNext chain **must** be unique
- VUID-VkBindSparseInfo-pWaitSemaphores-parameter
  If waitSemaphoreCount is not 0, pWaitSemaphores **must** be a valid pointer to an array of waitSemaphoreCount valid VkSemaphore handles

- VUID-VkBindSparseInfo-pBufferBinds-parameter
  If `bufferBindCount` is not `0`, `pBufferBinds` **must** be a valid pointer to an array of `bufferBindCount` valid VkSparseBufferMemoryBindInfo structures
- VUID-VkBindSparseInfo-pImageOpaqueBinds-parameter
  If `imageOpaqueBindCount` is not `0`, `pImageOpaqueBinds` **must** be a valid pointer to an array of `imageOpaqueBindCount` valid VkSparseImageOpaqueMemoryBindInfo structures
- VUID-VkBindSparseInfo-pImageBinds-parameter
  If `imageBindCount` is not `0`, `pImageBinds` **must** be a valid pointer to an array of `imageBindCount` valid VkSparseImageMemoryBindInfo structures
- VUID-VkBindSparseInfo-pSignalSemaphores-parameter
  If `signalSemaphoreCount` is not `0`, `pSignalSemaphores` **must** be a valid pointer to an array of `signalSemaphoreCount` valid VkSemaphore handles
- VUID-VkBindSparseInfo-commonparent
  Both of the elements of `pSignalSemaphores`, and the elements of `pWaitSemaphores` that are valid handles of non-ignored parameters **must** have been created, allocated, or retrieved from the same VkDevice

To specify the values to use when waiting for and signaling semaphores created with a VkSemaphoreType of `VK_SEMAPHORE_TYPE_TIMELINE`, add a VkTimelineSemaphoreSubmitInfo structure to the `pNext` chain of the VkBindSparseInfo structure.

If the `pNext` chain of VkBindSparseInfo includes a `VkDeviceGroupBindSparseInfo` structure, then that structure includes device indices specifying which instance of the resources and memory are bound.

The `VkDeviceGroupBindSparseInfo` structure is defined as:

```
// Provided by VK_VERSION_1_1
typedef struct VkDeviceGroupBindSparseInfo {
    VkStructureType    sType;
    const void*        pNext;
    uint32_t           resourceDeviceIndex;
    uint32_t           memoryDeviceIndex;
} VkDeviceGroupBindSparseInfo;
```

- `sType` is a VkStructureType value identifying this structure.
- `pNext` is `NULL` or a pointer to a structure extending this structure.
- `resourceDeviceIndex` is a device index indicating which instance of the resource is bound.
- `memoryDeviceIndex` is a device index indicating which instance of the memory the resource instance is bound to.

These device indices apply to all buffer and image memory binds included in the batch pointing to this structure. The semaphore waits and signals for the batch are executed only by the physical device specified by the `resourceDeviceIndex`.

If this structure is not present, `resourceDeviceIndex` and `memoryDeviceIndex` are assumed to be zero.

Valid Usage

- VUID-VkDeviceGroupBindSparseInfo-resourceDeviceIndex-01118
  `resourceDeviceIndex` and `memoryDeviceIndex` **must** both be valid device indices
- VUID-VkDeviceGroupBindSparseInfo-memoryDeviceIndex-01119
  Each memory allocation bound in this batch **must** have allocated an instance for `memoryDeviceIndex`

Valid Usage (Implicit)

- VUID-VkDeviceGroupBindSparseInfo-sType-sType
  `sType` **must** be `VK_STRUCTURE_TYPE_DEVICE_GROUP_BIND_SPARSE_INFO`

Chapter 30. Private Data

The private data extension provides a way for users to associate arbitrary application-defined data with Vulkan objects. This association is accomplished by storing 64-bit unsigned integers of application-defined data in private data slots. A private data slot represents a storage allocation for one data item for each child object of the device.

An application **can** reserve private data slots at device creation. To reserve private data slots, insert a VkDevicePrivateDataCreateInfo in the pNext chain in VkDeviceCreateInfo before device creation. Multiple VkDevicePrivateDataCreateInfo structures **can** be chained together, and the sum of the requested slots will be reserved. This is an exception to the specified valid usage for structure pointer chains. Reserving slots in this manner is not strictly necessary but it **may** improve performance.

Private data slots are represented by VkPrivateDataSlot handles:

```
// Provided by VK_VERSION_1_3
VK_DEFINE_NON_DISPATCHABLE_HANDLE(VkPrivateDataSlot)
```

To create a private data slot, call:

```
// Provided by VK_VERSION_1_3
VkResult vkCreatePrivateDataSlot(
    VkDevice                                    device,
    const VkPrivateDataSlotCreateInfo*          pCreateInfo,
    const VkAllocationCallbacks*                pAllocator,
    VkPrivateDataSlot*                          pPrivateDataSlot);
```

- device is the logical device associated with the creation of the object(s) holding the private data slot.
- pCreateInfo is a pointer to a VkPrivateDataSlotCreateInfo
- pAllocator controls host memory allocation as described in the Memory Allocation chapter.
- pPrivateDataSlot is a pointer to a VkPrivateDataSlot handle in which the resulting private data slot is returned

Valid Usage

- VUID-vkCreatePrivateDataSlot-privateData-04564
  The privateData feature **must** be enabled

Valid Usage (Implicit)

- VUID-vkCreatePrivateDataSlot-device-parameter
  device **must** be a valid VkDevice handle

- VUID-vkCreatePrivateDataSlot-pCreateInfo-parameter
  `pCreateInfo` **must** be a valid pointer to a valid VkPrivateDataSlotCreateInfo structure
- VUID-vkCreatePrivateDataSlot-pAllocator-parameter
  If `pAllocator` is not `NULL`, `pAllocator` **must** be a valid pointer to a valid VkAllocationCallbacks structure
- VUID-vkCreatePrivateDataSlot-pPrivateDataSlot-parameter
  `pPrivateDataSlot` **must** be a valid pointer to a VkPrivateDataSlot handle

Return Codes

Success

- `VK_SUCCESS`

Failure

- `VK_ERROR_OUT_OF_HOST_MEMORY`

The `VkPrivateDataSlotCreateInfo` structure is defined as:

```
// Provided by VK_VERSION_1_3
typedef struct VkPrivateDataSlotCreateInfo {
    VkStructureType                 sType;
    const void*                     pNext;
    VkPrivateDataSlotCreateFlags    flags;
} VkPrivateDataSlotCreateInfo;
```

- `sType` is a VkStructureType value identifying this structure.
- `pNext` is `NULL` or a pointer to a structure extending this structure.
- `flags` is reserved for future use.

Valid Usage (Implicit)

- VUID-VkPrivateDataSlotCreateInfo-sType-sType
  `sType` **must** be `VK_STRUCTURE_TYPE_PRIVATE_DATA_SLOT_CREATE_INFO`
- VUID-VkPrivateDataSlotCreateInfo-pNext-pNext
  `pNext` **must** be `NULL`
- VUID-VkPrivateDataSlotCreateInfo-flags-zerobitmask
  `flags` **must** be `0`

```
// Provided by VK_VERSION_1_3
typedef VkFlags VkPrivateDataSlotCreateFlags;
```

`VkPrivateDataSlotCreateFlags` is a bitmask type for setting a mask, but is currently reserved for

future use.

To destroy a private data slot, call:

```
// Provided by VK_VERSION_1_3
void vkDestroyPrivateDataSlot(
    VkDevice                                    device,
    VkPrivateDataSlot                           privateDataSlot,
    const VkAllocationCallbacks*                pAllocator);
```

- `device` is the logical device associated with the creation of the object(s) holding the private data slot.
- `pAllocator` controls host memory allocation as described in the Memory Allocation chapter.
- `privateDataSlot` is the private data slot to destroy.

Valid Usage

- VUID-vkDestroyPrivateDataSlot-privateDataSlot-04062
  If `VkAllocationCallbacks` were provided when `privateDataSlot` was created, a compatible set of callbacks **must** be provided here
- VUID-vkDestroyPrivateDataSlot-privateDataSlot-04063
  If no `VkAllocationCallbacks` were provided when `privateDataSlot` was created, `pAllocator` **must** be `NULL`

Valid Usage (Implicit)

- VUID-vkDestroyPrivateDataSlot-device-parameter
  `device` **must** be a valid VkDevice handle
- VUID-vkDestroyPrivateDataSlot-privateDataSlot-parameter
  If `privateDataSlot` is not VK_NULL_HANDLE, `privateDataSlot` **must** be a valid VkPrivateDataSlot handle
- VUID-vkDestroyPrivateDataSlot-pAllocator-parameter
  If `pAllocator` is not `NULL`, `pAllocator` **must** be a valid pointer to a valid VkAllocationCallbacks structure
- VUID-vkDestroyPrivateDataSlot-privateDataSlot-parent
  If `privateDataSlot` is a valid handle, it **must** have been created, allocated, or retrieved from `device`

Host Synchronization

- Host access to `privateDataSlot` **must** be externally synchronized

To store application-defined data in a slot associated with a Vulkan object, call:

```
// Provided by VK_VERSION_1_3
VkResult vkSetPrivateData(
    VkDevice                                    device,
    VkObjectType                                objectType,
    uint64_t                                    objectHandle,
    VkPrivateDataSlot                           privateDataSlot,
    uint64_t                                    data);
```

- `device` is the device that created the object.
- `objectType` is a VkObjectType specifying the type of object to associate data with.
- `objectHandle` is a handle to the object to associate data with.
- `privateDataSlot` is a handle to a VkPrivateDataSlot specifying location of private data storage.
- `data` is application-defined data to associate the object with. This data will be stored at `privateDataSlot`.

Valid Usage

- VUID-vkSetPrivateData-objectHandle-04016
  `objectHandle` **must** be `device` or a child of `device`
- VUID-vkSetPrivateData-objectHandle-04017
  `objectHandle` **must** be a valid handle to an object of type `objectType`

Valid Usage (Implicit)

- VUID-vkSetPrivateData-device-parameter
  `device` **must** be a valid VkDevice handle
- VUID-vkSetPrivateData-objectType-parameter
  `objectType` **must** be a valid VkObjectType value
- VUID-vkSetPrivateData-privateDataSlot-parameter
  `privateDataSlot` **must** be a valid VkPrivateDataSlot handle
- VUID-vkSetPrivateData-privateDataSlot-parent
  `privateDataSlot` **must** have been created, allocated, or retrieved from `device`

Return Codes

Success

- `VK_SUCCESS`

Failure

- `VK_ERROR_OUT_OF_HOST_MEMORY`

To retrieve application-defined data from a slot associated with a Vulkan object, call:

```
// Provided by VK_VERSION_1_3
void vkGetPrivateData(
    VkDevice                                    device,
    VkObjectType                                objectType,
    uint64_t                                    objectHandle,
    VkPrivateDataSlot                           privateDataSlot,
    uint64_t*                                   pData);
```

- `device` is the device that created the object
- `objectType` is a VkObjectType specifying the type of object data is associated with.
- `objectHandle` is a handle to the object data is associated with.
- `privateDataSlot` is a handle to a VkPrivateDataSlot specifying location of private data pointer storage.
- `pData` is a pointer to specify where application-defined data is returned. `0` will be written in the absence of a previous call to `vkSetPrivateData` using the object specified by `objectHandle`.

NOTE

Due to platform details on Android, implementations might not be able to reliably return `0` from calls to `vkGetPrivateData` for `VkSwapchainKHR` objects on which `vkSetPrivateData` has not previously been called. This erratum is exclusive to the Android platform and objects of type `VkSwapchainKHR`.

Valid Usage

- VUID-vkGetPrivateData-objectType-04018
  `objectHandle` **must** be `device` or a child of `device`
- VUID-vkGetPrivateData-objectHandle-09498
  `objectHandle` **must** be a valid handle to an object of type `objectType`

Valid Usage (Implicit)

- VUID-vkGetPrivateData-device-parameter
  `device` **must** be a valid VkDevice handle
- VUID-vkGetPrivateData-objectType-parameter
  `objectType` **must** be a valid VkObjectType value
- VUID-vkGetPrivateData-privateDataSlot-parameter
  `privateDataSlot` **must** be a valid VkPrivateDataSlot handle
- VUID-vkGetPrivateData-pData-parameter
  `pData` **must** be a valid pointer to a `uint64_t` value
- VUID-vkGetPrivateData-privateDataSlot-parent
  `privateDataSlot` **must** have been created, allocated, or retrieved from `device`

Chapter 31. Extending Vulkan

New functionality **may** be added to Vulkan via either new extensions or new versions of the core, or new versions of an extension in some cases.

This chapter describes how Vulkan is versioned, how compatibility is affected between different versions, and compatibility rules that are followed by the Vulkan Working Group.

31.1. Instance and Device Functionality

Commands that enumerate instance properties, or that accept a VkInstance object as a parameter, are considered instance-level functionality.

Commands that dispatch from a VkDevice object or a child object of a VkDevice, or take any of them as a parameter, are considered device-level functionality. Types defined by a device extension are also considered device-level functionality.

Commands that dispatch from VkPhysicalDevice, or accept a VkPhysicalDevice object as a parameter, are considered either instance-level or device-level functionality depending if the functionality is specified by an instance extension or device extension respectively.

Additionally, commands that enumerate physical device properties are considered device-level functionality.

NOTE Applications usually interface to Vulkan using a loader that implements only instance-level functionality, passing device-level functionality to implementations of the full Vulkan API on the system. In some circumstances, as these may be implemented independently, it is possible that the loader and device implementations on a given installation will support different versions. To allow for this and call out when it happens, the Vulkan specification enumerates device and instance level functionality separately - they have independent version queries.

NOTE Vulkan 1.0 initially specified new physical device enumeration functionality as instance-level, requiring it to be included in an instance extension. As the capabilities of device-level functionality require discovery via physical device enumeration, this led to the situation where many device extensions required an instance extension as well. To alleviate this extra work, `VK_KHR_get_physical_device_properties2` (and subsequently Vulkan 1.1) redefined device-level functionality to include physical device enumeration.

31.2. Core Versions

The Vulkan Specification is regularly updated with bug fixes and clarifications. Occasionally new functionality is added to the core and at some point it is expected that there will be a desire to perform a large, breaking change to the API. In order to indicate to developers how and when these changes are made to the specification, and to provide a way to identify each set of changes, the Vulkan API maintains a version number.

31.2.1. Version Numbers

The Vulkan version number comprises four parts indicating the variant, major, minor and patch version of the Vulkan API Specification.

The *variant* indicates the variant of the Vulkan API supported by the implementation. This is always 0 for the Vulkan API.

NOTE

A non-zero variant indicates the API is a variant of the Vulkan API and applications will typically need to be modified to run against it. The variant field was a later addition to the version number, added in version 1.2.175 of the Specification. As Vulkan uses variant 0, this change is fully backwards compatible with the previous version number format for Vulkan implementations. New version number macros have been added for this change and the old macros deprecated. For existing applications using the older format and macros, an implementation with non-zero variant will decode as a very high Vulkan version. The high version number should be detectable by applications performing suitable version checking.

The *major version* indicates a significant change in the API, which will encompass a wholly new version of the specification.

The *minor version* indicates the incorporation of new functionality into the core specification.

The *patch version* indicates bug fixes, clarifications, and language improvements have been incorporated into the specification.

Compatibility guarantees made about versions of the API sharing any of the same version numbers are documented in Core Versions

The version number is used in several places in the API. In each such use, the version numbers are packed into a 32-bit integer as follows:

- The variant is a 3-bit integer packed into bits 31-29.
- The major version is a 7-bit integer packed into bits 28-22.
- The minor version number is a 10-bit integer packed into bits 21-12.
- The patch version number is a 12-bit integer packed into bits 11-0.

`VK_API_VERSION_VARIANT` extracts the API variant number from a packed version number:

```
// Provided by VK_VERSION_1_0
#define VK_API_VERSION_VARIANT(version) ((uint32_t)(version) >> 29U)
```

`VK_API_VERSION_MAJOR` extracts the API major version number from a packed version number:

```
// Provided by VK_VERSION_1_0
#define VK_API_VERSION_MAJOR(version) (((uint32_t)(version) >> 22U) & 0x7FU)
```

VK_VERSION_MAJOR extracts the API major version number from a packed version number:

```
// Provided by VK_VERSION_1_0
// VK_VERSION_MAJOR is deprecated, but no reason was given in the API XML
// DEPRECATED: This define is deprecated. VK_API_VERSION_MAJOR should be used instead.
#define VK_VERSION_MAJOR(version) ((uint32_t)(version) >> 22U)
```

VK_API_VERSION_MINOR extracts the API minor version number from a packed version number:

```
// Provided by VK_VERSION_1_0
#define VK_API_VERSION_MINOR(version) (((uint32_t)(version) >> 12U) & 0x3FFU)
```

VK_VERSION_MINOR extracts the API minor version number from a packed version number:

```
// Provided by VK_VERSION_1_0
// VK_VERSION_MINOR is deprecated, but no reason was given in the API XML
// DEPRECATED: This define is deprecated. VK_API_VERSION_MINOR should be used instead.
#define VK_VERSION_MINOR(version) (((uint32_t)(version) >> 12U) & 0x3FFU)
```

VK_API_VERSION_PATCH extracts the API patch version number from a packed version number:

```
// Provided by VK_VERSION_1_0
#define VK_API_VERSION_PATCH(version) ((uint32_t)(version) & 0xFFFU)
```

VK_VERSION_PATCH extracts the API patch version number from a packed version number:

```
// Provided by VK_VERSION_1_0
// VK_VERSION_PATCH is deprecated, but no reason was given in the API XML
// DEPRECATED: This define is deprecated. VK_API_VERSION_PATCH should be used instead.
#define VK_VERSION_PATCH(version) ((uint32_t)(version) & 0xFFFU)
```

VK_MAKE_API_VERSION constructs an API version number.

```
// Provided by VK_VERSION_1_0
#define VK_MAKE_API_VERSION(variant, major, minor, patch) \
    ((((uint32_t)(variant)) << 29U) | (((uint32_t)(major)) << 22U) |
(((uint32_t)(minor)) << 12U) | ((uint32_t)(patch)))
```

- variant is the variant number.
- major is the major version number.
- minor is the minor version number.
- patch is the patch version number.

VK_MAKE_VERSION constructs an API version number.

```
// Provided by VK_VERSION_1_0
// VK_MAKE_VERSION is deprecated, but no reason was given in the API XML
// DEPRECATED: This define is deprecated. VK_MAKE_API_VERSION should be used instead.
#define VK_MAKE_VERSION(major, minor, patch) \
    ((((uint32_t)(major)) << 22U) | (((uint32_t)(minor)) << 12U) |
((uint32_t)(patch)))
```

- major is the major version number.
- minor is the minor version number.
- patch is the patch version number.

VK_API_VERSION_1_0 returns the API version number for Vulkan 1.0.0.

```
// Provided by VK_VERSION_1_0
// Vulkan 1.0 version number
#define VK_API_VERSION_1_0 VK_MAKE_API_VERSION(0, 1, 0, 0)// Patch version should
always be set to 0
```

VK_API_VERSION_1_1 returns the API version number for Vulkan 1.1.0.

```
// Provided by VK_VERSION_1_1
// Vulkan 1.1 version number
#define VK_API_VERSION_1_1 VK_MAKE_API_VERSION(0, 1, 1, 0)// Patch version should
always be set to 0
```

VK_API_VERSION_1_2 returns the API version number for Vulkan 1.2.0.

```
// Provided by VK_VERSION_1_2
// Vulkan 1.2 version number
#define VK_API_VERSION_1_2 VK_MAKE_API_VERSION(0, 1, 2, 0)// Patch version should
always be set to 0
```

VK_API_VERSION_1_3 returns the API version number for Vulkan 1.3.0.

```
// Provided by VK_VERSION_1_3
// Vulkan 1.3 version number
#define VK_API_VERSION_1_3 VK_MAKE_API_VERSION(0, 1, 3, 0)// Patch version should
always be set to 0
```

31.2.2. Querying Version Support

The version of instance-level functionality can be queried by calling vkEnumerateInstanceVersion.

The version of device-level functionality can be queried by calling vkGetPhysicalDeviceProperties or vkGetPhysicalDeviceProperties2, and is returned in VkPhysicalDeviceProperties::apiVersion, encoded as described in Version Numbers.

31.3. Layers

When a layer is enabled, it inserts itself into the call chain for Vulkan commands the layer is interested in. Layers **can** be used for a variety of tasks that extend the base behavior of Vulkan beyond what is required by the specification - such as call logging, tracing, validation, or providing additional extensions.

NOTE	For example, an implementation is not expected to check that the value of enums used by the application fall within allowed ranges. Instead, a validation layer would do those checks and flag issues. This avoids a performance penalty during production use of the application because those layers would not be enabled in production.

NOTE	Vulkan layers **may** wrap object handles (i.e. return a different handle value to the application than that generated by the implementation). This is generally discouraged, as it increases the probability of incompatibilities with new extensions. The validation layers wrap handles in order to track the proper use and destruction of each object. See the "Architecture of the Vulkan Loader Interfaces" document for additional information.

To query the available layers, call:

```
// Provided by VK_VERSION_1_0
VkResult vkEnumerateInstanceLayerProperties(
    uint32_t*                                   pPropertyCount,
    VkLayerProperties*                          pProperties);
```

- pPropertyCount is a pointer to an integer related to the number of layer properties available or queried, as described below.
- pProperties is either NULL or a pointer to an array of VkLayerProperties structures.

If pProperties is NULL, then the number of layer properties available is returned in pPropertyCount. Otherwise, pPropertyCount **must** point to a variable set by the application to the number of elements in the pProperties array, and on return the variable is overwritten with the number of structures actually written to pProperties. If pPropertyCount is less than the number of layer properties available, at most pPropertyCount structures will be written, and VK_INCOMPLETE will be returned instead of VK_SUCCESS, to indicate that not all the available properties were returned.

The list of available layers may change at any time due to actions outside of the Vulkan implementation, so two calls to vkEnumerateInstanceLayerProperties with the same parameters **may** return different results, or retrieve different pPropertyCount values or pProperties contents. Once an instance has been created, the layers enabled for that instance will continue to be enabled and

valid for the lifetime of that instance, even if some of them become unavailable for future instances.

Valid Usage (Implicit)

- VUID-vkEnumerateInstanceLayerProperties-pPropertyCount-parameter
  `pPropertyCount` **must** be a valid pointer to a `uint32_t` value
- VUID-vkEnumerateInstanceLayerProperties-pProperties-parameter
  If the value referenced by `pPropertyCount` is not `0`, and `pProperties` is not `NULL`, `pProperties` **must** be a valid pointer to an array of `pPropertyCount` VkLayerProperties structures

Return Codes

Success

- `VK_SUCCESS`
- `VK_INCOMPLETE`

Failure

- `VK_ERROR_OUT_OF_HOST_MEMORY`
- `VK_ERROR_OUT_OF_DEVICE_MEMORY`

The `VkLayerProperties` structure is defined as:

```
// Provided by VK_VERSION_1_0
typedef struct VkLayerProperties {
    char        layerName[VK_MAX_EXTENSION_NAME_SIZE];
    uint32_t    specVersion;
    uint32_t    implementationVersion;
    char        description[VK_MAX_DESCRIPTION_SIZE];
} VkLayerProperties;
```

- `layerName` is an array of `VK_MAX_EXTENSION_NAME_SIZE` `char` containing a null-terminated UTF-8 string which is the name of the layer. Use this name in the `ppEnabledLayerNames` array passed in the VkInstanceCreateInfo structure to enable this layer for an instance.
- `specVersion` is the Vulkan version the layer was written to, encoded as described in Version Numbers.
- `implementationVersion` is the version of this layer. It is an integer, increasing with backward compatible changes.
- `description` is an array of `VK_MAX_DESCRIPTION_SIZE` `char` containing a null-terminated UTF-8 string which provides additional details that **can** be used by the application to identify the layer.

`VK_MAX_EXTENSION_NAME_SIZE` is the length in `char` values of an array containing a layer or extension name string, as returned in VkLayerProperties::`layerName`, VkExtensionProperties::`extensionName`,

and other queries.

```
#define VK_MAX_EXTENSION_NAME_SIZE        256U
```

VK_MAX_DESCRIPTION_SIZE is the length in char values of an array containing a string with additional descriptive information about a query, as returned in VkLayerProperties::description and other queries.

```
#define VK_MAX_DESCRIPTION_SIZE           256U
```

To enable a layer, the name of the layer **should** be added to the ppEnabledLayerNames member of VkInstanceCreateInfo when creating a VkInstance.

Loader implementations **may** provide mechanisms outside the Vulkan API for enabling specific layers. Layers enabled through such a mechanism are *implicitly enabled*, while layers enabled by including the layer name in the ppEnabledLayerNames member of VkInstanceCreateInfo are *explicitly enabled*. Implicitly enabled layers are loaded before explicitly enabled layers, such that implicitly enabled layers are closer to the application, and explicitly enabled layers are closer to the driver. Except where otherwise specified, implicitly enabled and explicitly enabled layers differ only in the way they are enabled, and the order in which they are loaded. Explicitly enabling a layer that is implicitly enabled results in this layer being loaded as an implicitly enabled layer; it has no additional effect.

31.3.1. Device Layer Deprecation

Previous versions of this specification distinguished between instance and device layers. Instance layers were only able to intercept commands that operate on VkInstance and VkPhysicalDevice, except they were not able to intercept vkCreateDevice. Device layers were enabled for individual devices when they were created, and could only intercept commands operating on that device or its child objects.

Device-only layers are now deprecated, and this specification no longer distinguishes between instance and device layers. Layers are enabled during instance creation, and are able to intercept all commands operating on that instance or any of its child objects. At the time of deprecation there were no known device-only layers and no compelling reason to create one.

In order to maintain compatibility with implementations released prior to device-layer deprecation, applications **should** still enumerate and enable device layers. The behavior of vkEnumerateDeviceLayerProperties and valid usage of the ppEnabledLayerNames member of VkDeviceCreateInfo maximizes compatibility with applications written to work with the previous requirements.

To enumerate device layers, call:

```
// Provided by VK_VERSION_1_0
VkResult vkEnumerateDeviceLayerProperties(
    VkPhysicalDevice                            physicalDevice,
    uint32_t*                                   pPropertyCount,
    VkLayerProperties*                          pProperties);
```

- `physicalDevice` is the physical device that will be queried.
- `pPropertyCount` is a pointer to an integer related to the number of layer properties available or queried.
- `pProperties` is either `NULL` or a pointer to an array of VkLayerProperties structures.

If `pProperties` is `NULL`, then the number of layer properties available is returned in `pPropertyCount`. Otherwise, `pPropertyCount` **must** point to a variable set by the application to the number of elements in the `pProperties` array, and on return the variable is overwritten with the number of structures actually written to `pProperties`. If `pPropertyCount` is less than the number of layer properties available, at most `pPropertyCount` structures will be written, and `VK_INCOMPLETE` will be returned instead of `VK_SUCCESS`, to indicate that not all the available properties were returned.

The list of layers enumerated by `vkEnumerateDeviceLayerProperties` **must** be exactly the sequence of layers enabled for the instance. The members of `VkLayerProperties` for each enumerated layer **must** be the same as the properties when the layer was enumerated by `vkEnumerateInstanceLayerProperties`.

NOTE	Due to platform details on Android, `vkEnumerateDeviceLayerProperties` may be called with `physicalDevice` equal to `NULL` during layer discovery. This behavior will only be observed by layer implementations, and not the underlying Vulkan driver.

Valid Usage (Implicit)

- VUID-vkEnumerateDeviceLayerProperties-physicalDevice-parameter
  `physicalDevice` **must** be a valid VkPhysicalDevice handle
- VUID-vkEnumerateDeviceLayerProperties-pPropertyCount-parameter
  `pPropertyCount` **must** be a valid pointer to a `uint32_t` value
- VUID-vkEnumerateDeviceLayerProperties-pProperties-parameter
  If the value referenced by `pPropertyCount` is not `0`, and `pProperties` is not `NULL`, `pProperties` **must** be a valid pointer to an array of `pPropertyCount` VkLayerProperties structures

Return Codes

Success

- `VK_SUCCESS`
- `VK_INCOMPLETE`

Failure

- `VK_ERROR_OUT_OF_HOST_MEMORY`
- `VK_ERROR_OUT_OF_DEVICE_MEMORY`

The `ppEnabledLayerNames` and `enabledLayerCount` members of VkDeviceCreateInfo are deprecated and their values **must** be ignored by implementations. However, for compatibility, only an empty list of layers or a list that exactly matches the sequence enabled at instance creation time are valid, and validation layers **should** issue diagnostics for other cases.

Regardless of the enabled layer list provided in VkDeviceCreateInfo, the sequence of layers active for a device will be exactly the sequence of layers enabled when the parent instance was created.

31.4. Extensions

Extensions **may** define new Vulkan commands, structures, and enumerants. For compilation purposes, the interfaces defined by registered extensions, including new structures and enumerants as well as function pointer types for new commands, are defined in the Khronos-supplied `vulkan_core.h` together with the core API. However, commands defined by extensions **may** not be available for static linking - in which case function pointers to these commands **should** be queried at runtime as described in Command Function Pointers. Extensions **may** be provided by layers as well as by a Vulkan implementation.

Because extensions **may** extend or change the behavior of the Vulkan API, extension authors **should** add support for their extensions to the Khronos validation layers. This is especially important for new commands whose parameters have been wrapped by the validation layers. See the "Architecture of the Vulkan Loader Interfaces" document for additional information.

NOTE

To enable an instance extension, the name of the extension **can** be added to the `ppEnabledExtensionNames` member of VkInstanceCreateInfo when creating a `VkInstance`.

To enable a device extension, the name of the extension **can** be added to the `ppEnabledExtensionNames` member of VkDeviceCreateInfo when creating a `VkDevice`.

Physical-Device-Level functionality does not have any enabling mechanism and **can** be used as long as the VkPhysicalDevice supports the device extension as determined by vkEnumerateDeviceExtensionProperties.

Enabling an extension (with no further use of that extension) does not change the behavior of functionality exposed by the core Vulkan API or any other extension, other than making valid the use of the commands, enums and structures defined by that extension.

Valid Usage sections for individual commands and structures do not currently contain which extensions have to be enabled in order to make their use valid, although they might do so in the future. It is defined only in the Valid Usage for Extensions section.

31.4.1. Instance Extensions

Instance extensions add new instance-level functionality to the API, outside of the core specification.

To query the available instance extensions, call:

```
// Provided by VK_VERSION_1_0
VkResult vkEnumerateInstanceExtensionProperties(
    const char*                                 pLayerName,
    uint32_t*                                   pPropertyCount,
    VkExtensionProperties*                      pProperties);
```

- `pLayerName` is either `NULL` or a pointer to a null-terminated UTF-8 string naming the layer to retrieve extensions from.
- `pPropertyCount` is a pointer to an integer related to the number of extension properties available or queried, as described below.
- `pProperties` is either `NULL` or a pointer to an array of VkExtensionProperties structures.

When `pLayerName` parameter is `NULL`, only extensions provided by the Vulkan implementation or by implicitly enabled layers are returned. When `pLayerName` is the name of a layer, the instance extensions provided by that layer are returned.

If `pProperties` is `NULL`, then the number of extensions properties available is returned in `pPropertyCount`. Otherwise, `pPropertyCount` **must** point to a variable set by the application to the number of elements in the `pProperties` array, and on return the variable is overwritten with the number of structures actually written to `pProperties`. If `pPropertyCount` is less than the number of extension properties available, at most `pPropertyCount` structures will be written, and `VK_INCOMPLETE` will be returned instead of `VK_SUCCESS`, to indicate that not all the available properties were returned.

Because the list of available layers may change externally between calls to vkEnumerateInstanceExtensionProperties, two calls may retrieve different results if a `pLayerName` is available in one call but not in another. The extensions supported by a layer may also change between two calls, e.g. if the layer implementation is replaced by a different version between those calls.

Implementations **must** not advertise any pair of extensions that cannot be enabled together due to behavioral differences, or any extension that cannot be enabled against the advertised version.

Valid Usage (Implicit)

- VUID-vkEnumerateInstanceExtensionProperties-pLayerName-parameter
  If `pLayerName` is not `NULL`, `pLayerName` **must** be a null-terminated UTF-8 string
- VUID-vkEnumerateInstanceExtensionProperties-pPropertyCount-parameter
  `pPropertyCount` **must** be a valid pointer to a `uint32_t` value
- VUID-vkEnumerateInstanceExtensionProperties-pProperties-parameter

If the value referenced by pPropertyCount is not 0, and pProperties is not NULL, pProperties **must** be a valid pointer to an array of pPropertyCount VkExtensionProperties structures

Return Codes

Success

- VK_SUCCESS
- VK_INCOMPLETE

Failure

- VK_ERROR_OUT_OF_HOST_MEMORY
- VK_ERROR_OUT_OF_DEVICE_MEMORY
- VK_ERROR_LAYER_NOT_PRESENT

31.4.2. Device Extensions

Device extensions add new device-level functionality to the API, outside of the core specification.

To query the extensions available to a given physical device, call:

```
// Provided by VK_VERSION_1_0
VkResult vkEnumerateDeviceExtensionProperties(
    VkPhysicalDevice                            physicalDevice,
    const char*                                 pLayerName,
    uint32_t*                                   pPropertyCount,
    VkExtensionProperties*                      pProperties);
```

- physicalDevice is the physical device that will be queried.
- pLayerName is either NULL or a pointer to a null-terminated UTF-8 string naming the layer to retrieve extensions from.
- pPropertyCount is a pointer to an integer related to the number of extension properties available or queried, and is treated in the same fashion as the vkEnumerateInstanceExtensionProperties ::pPropertyCount parameter.
- pProperties is either NULL or a pointer to an array of VkExtensionProperties structures.

When pLayerName parameter is NULL, only extensions provided by the Vulkan implementation or by implicitly enabled layers are returned. When pLayerName is the name of a layer, the device extensions provided by that layer are returned.

Implementations **must** not advertise any pair of extensions that cannot be enabled together due to behavioral differences, or any extension that cannot be enabled against the advertised version.

Implementations claiming support for the Roadmap 2022 profile **must** advertise the VK_KHR_global_priority extension in pProperties.

Implementations claiming support for the Roadmap 2024 profile **must** advertise the following extensions in pProperties:

- VK_KHR_dynamic_rendering_local_read
- VK_KHR_load_store_op_none
- VK_KHR_shader_quad_control
- VK_KHR_shader_maximal_reconvergence
- VK_KHR_shader_subgroup_uniform_control_flow
- VK_KHR_shader_subgroup_rotate
- VK_KHR_shader_float_controls2
- VK_KHR_shader_expect_assume
- VK_KHR_line_rasterization
- VK_KHR_vertex_attribute_divisor
- VK_KHR_index_type_uint8
- VK_KHR_map_memory2
- VK_KHR_maintenance5
- VK_KHR_push_descriptor

NOTE	Due to platform details on Android, vkEnumerateDeviceExtensionProperties may be called with physicalDevice equal to NULL during layer discovery. This behavior will only be observed by layer implementations, and not the underlying Vulkan driver.

Valid Usage (Implicit)

- VUID-vkEnumerateDeviceExtensionProperties-physicalDevice-parameter
  physicalDevice **must** be a valid VkPhysicalDevice handle
- VUID-vkEnumerateDeviceExtensionProperties-pLayerName-parameter
  If pLayerName is not NULL, pLayerName **must** be a null-terminated UTF-8 string
- VUID-vkEnumerateDeviceExtensionProperties-pPropertyCount-parameter
  pPropertyCount **must** be a valid pointer to a uint32_t value
- VUID-vkEnumerateDeviceExtensionProperties-pProperties-parameter
  If the value referenced by pPropertyCount is not 0, and pProperties is not NULL, pProperties **must** be a valid pointer to an array of pPropertyCount VkExtensionProperties structures

Return Codes

Success

- VK_SUCCESS
- VK_INCOMPLETE

Failure

- VK_ERROR_OUT_OF_HOST_MEMORY
- VK_ERROR_OUT_OF_DEVICE_MEMORY
- VK_ERROR_LAYER_NOT_PRESENT

The VkExtensionProperties structure is defined as:

```
// Provided by VK_VERSION_1_0
typedef struct VkExtensionProperties {
    char        extensionName[VK_MAX_EXTENSION_NAME_SIZE];
    uint32_t    specVersion;
} VkExtensionProperties;
```

- extensionName is an array of VK_MAX_EXTENSION_NAME_SIZE char containing a null-terminated UTF-8 string which is the name of the extension.
- specVersion is the version of this extension. It is an integer, incremented with backward compatible changes.

Accessing Device-Level Functionality From a VkPhysicalDevice

Some device extensions also add support for physical-device-level functionality. Physical-device-level functionality **can** be used, if the required extension is supported as advertised by vkEnumerateDeviceExtensionProperties for a given VkPhysicalDevice.

Accessing Device-Level Functionality From a VkDevice

For commands that are dispatched from a VkDevice, or from a child object of a VkDevice, device extensions **must** be enabled in vkCreateDevice.

31.5. Extension Dependencies

Some extensions are dependent on other extensions, or on specific core API versions, to function. To enable extensions with dependencies, any *required extensions* **must** also be enabled through the same API mechanisms when creating an instance with vkCreateInstance or a device with vkCreateDevice. Each extension which has such dependencies documents them in the appendix summarizing that extension.

If an extension is supported (as queried by vkEnumerateInstanceExtensionProperties or vkEnumerateDeviceExtensionProperties), then *required extensions* of that extension **must** also be supported for the same instance or physical device.

Any device extension that has an instance extension dependency that is not enabled by vkCreateInstance is considered to be unsupported, hence it **must** not be returned by vkEnumerateDeviceExtensionProperties for any VkPhysicalDevice child of the instance. Instance extensions do not have dependencies on device extensions.

If a required extension has been promoted to another extension or to a core API version, then as a *general* rule, the dependency is also satisfied by the promoted extension or core version. This will be true so long as any features required by the original extension are also required or enabled by the promoted extension or core version. However, in some cases an extension is promoted while making some of its features optional in the promoted extension or core version. In this case, the dependency **may** not be satisfied. The only way to be certain is to look at the descriptions of the original dependency and the promoted version in the Layers & Extensions and Core Revisions appendices.

NOTE

There is metadata in `vk.xml` describing some aspects of promotion, especially `requires`, `promotedto` and `deprecatedby` attributes of `<extension>` tags. However, the metadata does not yet fully describe this scenario. In the future, we may extend the XML schema to describe the full set of extensions and versions satisfying a dependency. As discussed in more detail for Promotion below, when an extension is promoted it does not mean that a mechanical substitution of an extension API by the corresponding promoted API will work in exactly the same fashion; be supported at runtime; or even exist.

31.6. Compatibility Guarantees (Informative)

This section is marked as informal as there is no binding responsibility on implementations of the Vulkan API - these guarantees are however a contract between the Vulkan Working Group and developers using this Specification.

31.6.1. Core Versions

Each of the major, minor, and patch versions of the Vulkan specification provide different compatibility guarantees.

Patch Versions

A difference in the patch version indicates that a set of bug fixes or clarifications have been made to the Specification. Informative enums returned by Vulkan commands that will not affect the runtime behavior of a valid application may be added in a patch version (e.g. VkVendorId).

The specification's patch version is strictly increasing for a given major version of the specification; any change to a specification as described above will result in the patch version being increased by 1. Patch versions are applied to all minor versions, even if a given minor version is not affected by the provoking change.

Specifications with different patch versions but the same major and minor version are *fully compatible* with each other - such that a valid application written against one will work with an implementation of another.

NOTE

If a patch version includes a bug fix or clarification that could have a significant impact on developer expectations, these will be highlighted in the change log. Generally the Vulkan Working Group tries to avoid these kinds of changes, instead fixing them in either an extension or core version.

Minor Versions

Changes in the minor version of the specification indicate that new functionality has been added to the core specification. This will usually include new interfaces in the header, and **may** also include behavior changes and bug fixes. Core functionality **may** be deprecated in a minor version, but will not be obsoleted or removed.

The specification's minor version is strictly increasing for a given major version of the specification; any change to a specification as described above will result in the minor version being increased by 1. Changes that can be accommodated in a patch version will not increase the minor version.

Specifications with a lower minor version are *backwards compatible* with an implementation of a specification with a higher minor version for core functionality and extensions issued with the KHR vendor tag. Vendor and multi-vendor extensions are not guaranteed to remain functional across minor versions, though in general they are with few exceptions - see Obsoletion for more information.

Major Versions

A difference in the major version of specifications indicates a large set of changes which will likely include interface changes, behavioral changes, removal of deprecated functionality, and the modification, addition, or replacement of other functionality.

The specification's major version is monotonically increasing; any change to the specification as described above will result in the major version being increased. Changes that can be accommodated in a patch or minor version will not increase the major version.

The Vulkan Working Group intends to only issue a new major version of the Specification in order to realize significant improvements to the Vulkan API that will necessarily require breaking compatibility.

A new major version will likely include a wholly new version of the specification to be issued - which could include an overhaul of the versioning semantics for the minor and patch versions. The patch and minor versions of a specification are therefore not meaningful across major versions. If a major version of the specification includes similar versioning semantics, it is expected that the patch and the minor version will be reset to 0 for that major version.

31.6.2. Extensions

A KHR extension **must** be able to be enabled alongside any other KHR extension, and for any minor or patch version of the core Specification beyond the minimum version it requires. A multi-vendor extension **should** be able to be enabled alongside any KHR extension or other multi-vendor extension, and for any minor or patch version of the core Specification beyond the minimum version it requires. A vendor extension **should** be able to be enabled alongside any KHR extension, multi-vendor extension, or other vendor extension from the same vendor, and for any minor or patch version of the core Specification beyond the minimum version it requires. A vendor extension **may** be able to be enabled alongside vendor extensions from another vendor.

The one other exception to this is if a vendor or multi-vendor extension is made obsolete by either a

core version or another extension, which will be highlighted in the extension appendix.

Promotion

Extensions, or features of an extension, **may** be promoted to a new core version of the API, or a newer extension which an equal or greater number of implementors are in favor of.

When extension functionality is promoted, minor changes **may** be introduced, limited to the following:

- Naming
- Non-intrusive parameter changes
- Feature advertisement/enablement
- Combining structure parameters into larger structures
- Author ID suffixes changed or removed

> **NOTE**
>
> If extension functionality is promoted, there is no guarantee of direct compatibility, however it should require little effort to port code from the original feature to the promoted one.
>
> The Vulkan Working Group endeavors to ensure that larger changes are marked as either deprecated or obsoleted as appropriate, and can do so retroactively if necessary.

Extensions that are promoted are listed as being promoted in their extension appendices, with reference to where they were promoted to.

When an extension is promoted, any backwards compatibility aliases which exist in the extension will **not** be promoted.

> **NOTE**
>
> As a hypothetical example, if the `VK_KHR_surface` extension were promoted to part of a future core version, the `VK_COLOR_SPACE_SRGB_NONLINEAR_KHR` token defined by that extension would be promoted to `VK_COLOR_SPACE_SRGB_NONLINEAR`. However, the `VK_COLORSPACE_SRGB_NONLINEAR_KHR` token aliases `VK_COLOR_SPACE_SRGB_NONLINEAR_KHR`. The `VK_COLORSPACE_SRGB_NONLINEAR_KHR` would not be promoted, because it is a backwards compatibility alias that exists only due to a naming mistake when the extension was initially published.

Deprecation

Extensions **may** be marked as deprecated when the intended use cases either become irrelevant or can be solved in other ways. Generally, a new feature will become available to solve the use case in another extension or core version of the API, but it is not guaranteed.

> **NOTE**
>
> Features that are intended to replace deprecated functionality have no guarantees of compatibility, and applications may require drastic modification in order to make use of the new features.

Extensions that are deprecated are listed as being deprecated in their extension appendices, with an explanation of the deprecation and any features that are relevant.

Obsoletion

Occasionally, an extension will be marked as obsolete if a new version of the core API or a new extension is fundamentally incompatible with it. An obsoleted extension **must** not be used with the extension or core version that obsoleted it.

Extensions that are obsoleted are listed as being obsoleted in their extension appendices, with reference to what they were obsoleted by.

Aliases

When an extension is promoted or deprecated by a newer feature, some or all of its functionality **may** be replicated into the newer feature. Rather than duplication of all the documentation and definitions, the specification instead identifies the identical commands and types as *aliases* of one another. Each alias is mentioned together with the definition it aliases, with the older aliases marked as "equivalents". Each alias of the same command has identical behavior, and each alias of the same type has identical meaning - they can be used interchangeably in an application with no compatibility issues.

NOTE

For promoted types, the aliased extension type is semantically identical to the new core type. The C99 headers simply `typedef` the older aliases to the promoted types.

For promoted command aliases, however, there are two separate command definitions, due to the fact that the C99 ABI has no way to alias command definitions without resorting to macros. Calling either command will produce identical behavior within the bounds of the specification, and should still invoke the same path in the implementation. Debug tools may use separate commands with different debug behavior; to write the appropriate command name to an output log, for instance.

Special Use Extensions

Some extensions exist only to support a specific purpose or specific class of application. These are referred to as "special use extensions". Use of these extensions in applications not meeting the special use criteria is not recommended.

Special use cases are restricted, and only those defined below are used to describe extensions:

Table 30. Extension Special Use Cases

Special Use	XML Tag	Full Description
CAD support	cadsupport	Extension is intended to support specialized functionality used by CAD/CAM applications.
D3D support	d3demulation	Extension is intended to support D3D emulation layers, and applications ported from D3D, by adding functionality specific to D3D.

Special Use	XML Tag	Full Description
Developer tools	devtools	Extension is intended to support developer tools such as capture-replay libraries.
Debugging tools	debugging	Extension is intended for use by applications when debugging.
OpenGL / ES support	glemulation	Extension is intended to support OpenGL and/or OpenGL ES emulation layers, and applications ported from those APIs, by adding functionality specific to those APIs.

Special use extensions are identified in the metadata for each such extension in the Layers & Extensions appendix, using the name in the “Special Use” column above.

Special use extensions are also identified in `vk.xml` with the short name in “XML Tag” column above, as described in the “API Extensions (`extension` tag)” section of the registry schema documentation.

Chapter 32. Features

Features advertise additional functionality which **can** be enabled in the API. If a feature is *supported* by a physical device, it **must** be *enabled* when creating a VkDevice in order to use its associated functionality with that VkDevice. If a feature is *unsupported*, that functionality **cannot** be used with that VkDevice.

NOTE

Features are reported via the basic VkPhysicalDeviceFeatures structure, as well as the extensible structure VkPhysicalDeviceFeatures2, which was added in the VK_KHR_get_physical_device_properties2 extension and included in Vulkan 1.1. When new features are added in future Vulkan versions or extensions, each extension **should** introduce one new feature structure, if needed. This structure **can** be added to the pNext chain of the VkPhysicalDeviceFeatures2 structure.

For convenience, new core versions of Vulkan **may** introduce new unified feature structures for features promoted from extensions. At the same time, the extension's original feature structure (if any) is also promoted to the core API, and is an alias of the extension's structure. This results in multiple names for the same feature: in the original extension's feature structure and the promoted structure alias, in the unified feature structure. When a feature was implicitly supported and enabled in the extension, but an explicit name was added during promotion, then the extension itself acts as an alias for the feature as listed in the table below.

All aliases of the same feature in the core API **must** be reported consistently: either all **must** be reported as supported, or none of them. When a promoted extension is available, any corresponding feature aliases **must** be supported.

Table 31. Extension Feature Aliases

Extension	Feature(s)

To query supported features, call:

```
// Provided by VK_VERSION_1_0
void vkGetPhysicalDeviceFeatures(
    VkPhysicalDevice                            physicalDevice,
    VkPhysicalDeviceFeatures*                   pFeatures);
```

- physicalDevice is the physical device from which to query the supported features.
- pFeatures is a pointer to a VkPhysicalDeviceFeatures structure in which the physical device features are returned. For each feature, a value of VK_TRUE specifies that the feature is supported on this physical device, and VK_FALSE specifies that the feature is not supported.

Valid Usage (Implicit)

- VUID-vkGetPhysicalDeviceFeatures-physicalDevice-parameter
  physicalDevice **must** be a valid VkPhysicalDevice handle

- VUID-vkGetPhysicalDeviceFeatures-pFeatures-parameter
  `pFeatures` **must** be a valid pointer to a VkPhysicalDeviceFeatures structure

Fine-grained features used by a logical device **must** be enabled at `VkDevice` creation time. If a feature is enabled that the physical device does not support, `VkDevice` creation will fail and return `VK_ERROR_FEATURE_NOT_PRESENT`.

The fine-grained features are enabled by passing a pointer to the `VkPhysicalDeviceFeatures` structure via the `pEnabledFeatures` member of the VkDeviceCreateInfo structure that is passed into the `vkCreateDevice` call. If a member of `pEnabledFeatures` is `VK_TRUE` or `VK_FALSE`, then the device will be created with the indicated feature enabled or disabled, respectively. Features **can** also be enabled by using the VkPhysicalDeviceFeatures2 structure.

If an application wishes to enable all features supported by a device, it **can** simply pass in the `VkPhysicalDeviceFeatures` structure that was previously returned by `vkGetPhysicalDeviceFeatures`. To disable an individual feature, the application **can** set the desired member to `VK_FALSE` in the same structure. Setting `pEnabledFeatures` to `NULL` and not including a VkPhysicalDeviceFeatures2 in the `pNext` chain of VkDeviceCreateInfo is equivalent to setting all members of the structure to `VK_FALSE`.

NOTE Some features, such as `robustBufferAccess`, **may** incur a runtime performance cost. Application writers **should** carefully consider the implications of enabling all supported features.

To query supported features defined by the core or extensions, call:

```
// Provided by VK_VERSION_1_1
void vkGetPhysicalDeviceFeatures2(
    VkPhysicalDevice                            physicalDevice,
    VkPhysicalDeviceFeatures2*                  pFeatures);
```

- `physicalDevice` is the physical device from which to query the supported features.
- `pFeatures` is a pointer to a VkPhysicalDeviceFeatures2 structure in which the physical device features are returned.

Each structure in `pFeatures` and its `pNext` chain contains members corresponding to fine-grained features. Each structure in `pFeatures` and its `pNext` chain contains VkBool32 members corresponding to fine-grained features. Each such member is returned with a `VK_TRUE` value indicating that feature is supported on this physical device, or a `VK_FALSE` value indicating it is unsupported.

Valid Usage (Implicit)

- VUID-vkGetPhysicalDeviceFeatures2-physicalDevice-parameter
  `physicalDevice` **must** be a valid VkPhysicalDevice handle
- VUID-vkGetPhysicalDeviceFeatures2-pFeatures-parameter
  `pFeatures` **must** be a valid pointer to a VkPhysicalDeviceFeatures2 structure

The VkPhysicalDeviceFeatures2 structure is defined as:

```
// Provided by VK_VERSION_1_1
typedef struct VkPhysicalDeviceFeatures2 {
    VkStructureType             sType;
    void*                       pNext;
    VkPhysicalDeviceFeatures    features;
} VkPhysicalDeviceFeatures2;
```

- sType is a VkStructureType value identifying this structure.
- pNext is NULL or a pointer to a structure extending this structure.
- features is a VkPhysicalDeviceFeatures structure describing the fine-grained features of the Vulkan 1.0 API.

The pNext chain of this structure is used to extend the structure with features defined by extensions. This structure **can** be used in vkGetPhysicalDeviceFeatures2 or **can** be included in the pNext chain of a VkDeviceCreateInfo structure, in which case it controls which features are enabled on the device in lieu of pEnabledFeatures.

Valid Usage (Implicit)

- VUID-VkPhysicalDeviceFeatures2-sType-sType
  sType **must** be VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_FEATURES_2

The VkPhysicalDeviceFeatures structure is defined as:

```
// Provided by VK_VERSION_1_0
typedef struct VkPhysicalDeviceFeatures {
    VkBool32    robustBufferAccess;
    VkBool32    fullDrawIndexUint32;
    VkBool32    imageCubeArray;
    VkBool32    independentBlend;
    VkBool32    geometryShader;
    VkBool32    tessellationShader;
    VkBool32    sampleRateShading;
    VkBool32    dualSrcBlend;
    VkBool32    logicOp;
    VkBool32    multiDrawIndirect;
    VkBool32    drawIndirectFirstInstance;
    VkBool32    depthClamp;
    VkBool32    depthBiasClamp;
    VkBool32    fillModeNonSolid;
    VkBool32    depthBounds;
    VkBool32    wideLines;
    VkBool32    largePoints;
    VkBool32    alphaToOne;
    VkBool32    multiViewport;
```

```
    VkBool32    samplerAnisotropy;
    VkBool32    textureCompressionETC2;
    VkBool32    textureCompressionASTC_LDR;
    VkBool32    textureCompressionBC;
    VkBool32    occlusionQueryPrecise;
    VkBool32    pipelineStatisticsQuery;
    VkBool32    vertexPipelineStoresAndAtomics;
    VkBool32    fragmentStoresAndAtomics;
    VkBool32    shaderTessellationAndGeometryPointSize;
    VkBool32    shaderImageGatherExtended;
    VkBool32    shaderStorageImageExtendedFormats;
    VkBool32    shaderStorageImageMultisample;
    VkBool32    shaderStorageImageReadWithoutFormat;
    VkBool32    shaderStorageImageWriteWithoutFormat;
    VkBool32    shaderUniformBufferArrayDynamicIndexing;
    VkBool32    shaderSampledImageArrayDynamicIndexing;
    VkBool32    shaderStorageBufferArrayDynamicIndexing;
    VkBool32    shaderStorageImageArrayDynamicIndexing;
    VkBool32    shaderClipDistance;
    VkBool32    shaderCullDistance;
    VkBool32    shaderFloat64;
    VkBool32    shaderInt64;
    VkBool32    shaderInt16;
    VkBool32    shaderResourceResidency;
    VkBool32    shaderResourceMinLod;
    VkBool32    sparseBinding;
    VkBool32    sparseResidencyBuffer;
    VkBool32    sparseResidencyImage2D;
    VkBool32    sparseResidencyImage3D;
    VkBool32    sparseResidency2Samples;
    VkBool32    sparseResidency4Samples;
    VkBool32    sparseResidency8Samples;
    VkBool32    sparseResidency16Samples;
    VkBool32    sparseResidencyAliased;
    VkBool32    variableMultisampleRate;
    VkBool32    inheritedQueries;
} VkPhysicalDeviceFeatures;
```

This structure describes the following features:

- `robustBufferAccess` specifies that accesses to buffers are bounds-checked against the range of the buffer descriptor (as determined by `VkDescriptorBufferInfo`::`range`, VkBufferViewCreateInfo::`range`, or the size of the buffer). Out of bounds accesses **must** not cause application termination, and the effects of shader loads, stores, and atomics **must** conform to an implementation-dependent behavior as described below.
  - A buffer access is considered to be out of bounds if any of the following are true:
    - The pointer was formed by `OpImageTexelPointer` and the coordinate is less than zero or greater than or equal to the number of whole elements in the bound range.
    - The pointer was not formed by `OpImageTexelPointer` and the object pointed to is not

wholly contained within the bound range. This includes accesses performed via *variable pointers* where the buffer descriptor being accessed cannot be statically determined. Uninitialized pointers and pointers equal to `OpConstantNull` are treated as pointing to a zero-sized object, so all accesses through such pointers are considered to be out of bounds. Buffer accesses through buffer device addresses are not bounds-checked.

> **NOTE** If a SPIR-V `OpLoad` instruction loads a structure and the tail end of the structure is out of bounds, then all members of the structure are considered out of bounds even if the members at the end are not statically used.

- If any buffer access is determined to be out of bounds, then any other access of the same type (load, store, or atomic) to the same buffer that accesses an address less than 16 bytes away from the out of bounds address **may** also be considered out of bounds.
- If the access is a load that reads from the same memory locations as a prior store in the same shader invocation, with no other intervening accesses to the same memory locations in that shader invocation, then the result of the load **may** be the value stored by the store instruction, even if the access is out of bounds. If the load is `Volatile`, then an out of bounds load **must** return the appropriate out of bounds value.

◦ Out-of-bounds buffer loads will return any of the following values:

- Values from anywhere within the memory range(s) bound to the buffer (possibly including bytes of memory past the end of the buffer, up to the end of the bound range).
- Zero values, or (0,0,0,x) vectors for vector reads where x is a valid value represented in the type of the vector components and **may** be any of:
  - 0, 1, or the maximum representable positive integer value, for signed or unsigned integer components
  - 0.0 or 1.0, for floating-point components

◦ Out-of-bounds writes **may** modify values within the memory range(s) bound to the buffer, but **must** not modify any other memory.

◦ Out-of-bounds atomics **may** modify values within the memory range(s) bound to the buffer, but **must** not modify any other memory, and return an undefined value.

◦ Vertex input attributes are considered out of bounds if the offset of the attribute in the bound vertex buffer range plus the size of the attribute is greater than either:

- `vertexBufferRangeSize`, if `bindingStride` == 0; or
- (`vertexBufferRangeSize` - (`vertexBufferRangeSize` % `bindingStride`))

  where `vertexBufferRangeSize` is the byte size of the memory range bound to the vertex buffer binding and `bindingStride` is the byte stride of the corresponding vertex input binding. Further, if any vertex input attribute using a specific vertex input binding is out of bounds, then all vertex input attributes using that vertex input binding for that vertex shader invocation are considered out of bounds.

- If a vertex input attribute is out of bounds, it will be assigned one of the following values:

        - Values from anywhere within the memory range(s) bound to the buffer, converted according to the format of the attribute.
        - Zero values, format converted according to the format of the attribute.
        - Zero values, or (0,0,0,x) vectors, as described above.
    - If `robustBufferAccess` is not enabled, applications **must** not perform out of bounds accesses .
- `fullDrawIndexUint32` specifies the full 32-bit range of indices is supported for indexed draw calls when using a VkIndexType of `VK_INDEX_TYPE_UINT32`. `maxDrawIndexedIndexValue` is the maximum index value that **may** be used (aside from the primitive restart index, which is always 2^{32}-1 when the VkIndexType is `VK_INDEX_TYPE_UINT32`). If this feature is supported, `maxDrawIndexedIndexValue` **must** be 2^{32}-1; otherwise it **must** be no smaller than 2^{24}-1. See `maxDrawIndexedIndexValue`.
- `imageCubeArray` specifies whether image views with a VkImageViewType of `VK_IMAGE_VIEW_TYPE_CUBE_ARRAY` **can** be created, and that the corresponding `SampledCubeArray` and `ImageCubeArray` SPIR-V capabilities **can** be used in shader code.
- `independentBlend` specifies whether the `VkPipelineColorBlendAttachmentState` settings are controlled independently per-attachment. If this feature is not enabled, the `VkPipelineColorBlendAttachmentState` settings for all color attachments **must** be identical. Otherwise, a different `VkPipelineColorBlendAttachmentState` **can** be provided for each bound color attachment.
- `geometryShader` specifies whether geometry shaders are supported. If this feature is not enabled, the `VK_SHADER_STAGE_GEOMETRY_BIT` and `VK_PIPELINE_STAGE_GEOMETRY_SHADER_BIT` enum values **must** not be used. This also specifies whether shader modules **can** declare the `Geometry` capability.
- `tessellationShader` specifies whether tessellation control and evaluation shaders are supported. If this feature is not enabled, the `VK_SHADER_STAGE_TESSELLATION_CONTROL_BIT`, `VK_SHADER_STAGE_TESSELLATION_EVALUATION_BIT`, `VK_PIPELINE_STAGE_TESSELLATION_CONTROL_SHADER_BIT`, `VK_PIPELINE_STAGE_TESSELLATION_EVALUATION_SHADER_BIT`, and `VK_STRUCTURE_TYPE_PIPELINE_TESSELLATION_STATE_CREATE_INFO` enum values **must** not be used. This also specifies whether shader modules **can** declare the `Tessellation` capability.
- `sampleRateShading` specifies whether Sample Shading and multisample interpolation are supported. If this feature is not enabled, the `sampleShadingEnable` member of the VkPipelineMultisampleStateCreateInfo structure **must** be `VK_FALSE` and the `minSampleShading` member is ignored. This also specifies whether shader modules **can** declare the `SampleRateShading` capability.
- `dualSrcBlend` specifies whether blend operations which take two sources are supported. If this feature is not enabled, the `VK_BLEND_FACTOR_SRC1_COLOR`, `VK_BLEND_FACTOR_ONE_MINUS_SRC1_COLOR`, `VK_BLEND_FACTOR_SRC1_ALPHA`, and `VK_BLEND_FACTOR_ONE_MINUS_SRC1_ALPHA` enum values **must** not be used as source or destination blending factors. See Dual-Source Blending.
- `logicOp` specifies whether logic operations are supported. If this feature is not enabled, the `logicOpEnable` member of the VkPipelineColorBlendStateCreateInfo structure **must** be `VK_FALSE`, and the `logicOp` member is ignored.
- `multiDrawIndirect` specifies whether multiple draw indirect is supported. If this feature is not enabled, the `drawCount` parameter to the vkCmdDrawIndirect and vkCmdDrawIndexedIndirect

commands **must** be 0 or 1. The maxDrawIndirectCount member of the VkPhysicalDeviceLimits structure **must** also be 1 if this feature is not supported. See maxDrawIndirectCount.

- drawIndirectFirstInstance specifies whether indirect drawing calls support the firstInstance parameter. If this feature is not enabled, the firstInstance member of all VkDrawIndirectCommand and VkDrawIndexedIndirectCommand structures that are provided to the vkCmdDrawIndirect and vkCmdDrawIndexedIndirect commands **must** be 0.
- depthClamp specifies whether depth clamping is supported. If this feature is not enabled, the depthClampEnable member of the VkPipelineRasterizationStateCreateInfo structure **must** be VK_FALSE. Otherwise, setting depthClampEnable to VK_TRUE will enable depth clamping.
- depthBiasClamp specifies whether depth bias clamping is supported. If this feature is not enabled, the depthBiasClamp member of the VkPipelineRasterizationStateCreateInfo structure **must** be 0.0 unless the VK_DYNAMIC_STATE_DEPTH_BIAS dynamic state is enabled, in which case the depthBiasClamp parameter to vkCmdSetDepthBias **must** be 0.0.
- fillModeNonSolid specifies whether point and wireframe fill modes are supported. If this feature is not enabled, the VK_POLYGON_MODE_POINT and VK_POLYGON_MODE_LINE enum values **must** not be used.
- depthBounds specifies whether depth bounds tests are supported. If this feature is not enabled, the depthBoundsTestEnable member of the VkPipelineDepthStencilStateCreateInfo structure **must** be VK_FALSE unless the VK_DYNAMIC_STATE_DEPTH_BOUNDS_TEST_ENABLE dynamic state is enabled, in which case the depthBoundsTestEnable parameter to vkCmdSetDepthBoundsTestEnable **must** be VK_FALSE. When depthBoundsTestEnable is VK_FALSE, the minDepthBounds and maxDepthBounds members of the VkPipelineDepthStencilStateCreateInfo structure are ignored.
- wideLines specifies whether lines with width other than 1.0 are supported. If this feature is not enabled, the lineWidth member of the VkPipelineRasterizationStateCreateInfo structure **must** be 1.0 unless the VK_DYNAMIC_STATE_LINE_WIDTH dynamic state is enabled, in which case the lineWidth parameter to vkCmdSetLineWidth **must** be 1.0. When this feature is supported, the range and granularity of supported line widths are indicated by the lineWidthRange and lineWidthGranularity members of the VkPhysicalDeviceLimits structure, respectively.
- largePoints specifies whether points with size greater than 1.0 are supported. If this feature is not enabled, only a point size of 1.0 written by a shader is supported. The range and granularity of supported point sizes are indicated by the pointSizeRange and pointSizeGranularity members of the VkPhysicalDeviceLimits structure, respectively.
- alphaToOne specifies whether the implementation is able to replace the alpha value of the fragment shader color output in the Multisample Coverage fragment operation. If this feature is not enabled, then the alphaToOneEnable member of the VkPipelineMultisampleStateCreateInfo structure **must** be VK_FALSE. Otherwise setting alphaToOneEnable to VK_TRUE will enable alpha-to-one behavior.
- multiViewport specifies whether more than one viewport is supported. If this feature is not enabled:
  - The viewportCount and scissorCount members of the VkPipelineViewportStateCreateInfo structure **must** be 1.
  - The firstViewport and viewportCount parameters to the vkCmdSetViewport command **must**

be 0 and 1, respectively.

  - The `firstScissor` and `scissorCount` parameters to the vkCmdSetScissor command **must** be 0 and 1, respectively.

- `samplerAnisotropy` specifies whether anisotropic filtering is supported. If this feature is not enabled, the `anisotropyEnable` member of the VkSamplerCreateInfo structure **must** be `VK_FALSE`.
- `textureCompressionETC2` specifies whether all of the ETC2 and EAC compressed texture formats are supported. If this feature is enabled, then the `VK_FORMAT_FEATURE_SAMPLED_IMAGE_BIT`, `VK_FORMAT_FEATURE_BLIT_SRC_BIT` and `VK_FORMAT_FEATURE_SAMPLED_IMAGE_FILTER_LINEAR_BIT` features **must** be supported in `optimalTilingFeatures` for the following formats:
  - `VK_FORMAT_ETC2_R8G8B8_UNORM_BLOCK`
  - `VK_FORMAT_ETC2_R8G8B8_SRGB_BLOCK`
  - `VK_FORMAT_ETC2_R8G8B8A1_UNORM_BLOCK`
  - `VK_FORMAT_ETC2_R8G8B8A1_SRGB_BLOCK`
  - `VK_FORMAT_ETC2_R8G8B8A8_UNORM_BLOCK`
  - `VK_FORMAT_ETC2_R8G8B8A8_SRGB_BLOCK`
  - `VK_FORMAT_EAC_R11_UNORM_BLOCK`
  - `VK_FORMAT_EAC_R11_SNORM_BLOCK`
  - `VK_FORMAT_EAC_R11G11_UNORM_BLOCK`
  - `VK_FORMAT_EAC_R11G11_SNORM_BLOCK`

    To query for additional properties, or if the feature is not enabled, vkGetPhysicalDeviceFormatProperties and vkGetPhysicalDeviceImageFormatProperties **can** be used to check for supported properties of individual formats as normal.

- `textureCompressionASTC_LDR` specifies whether all of the ASTC LDR compressed texture formats are supported. If this feature is enabled, then the `VK_FORMAT_FEATURE_SAMPLED_IMAGE_BIT`, `VK_FORMAT_FEATURE_BLIT_SRC_BIT` and `VK_FORMAT_FEATURE_SAMPLED_IMAGE_FILTER_LINEAR_BIT` features **must** be supported in `optimalTilingFeatures` for the following formats:
  - `VK_FORMAT_ASTC_4x4_UNORM_BLOCK`
  - `VK_FORMAT_ASTC_4x4_SRGB_BLOCK`
  - `VK_FORMAT_ASTC_5x4_UNORM_BLOCK`
  - `VK_FORMAT_ASTC_5x4_SRGB_BLOCK`
  - `VK_FORMAT_ASTC_5x5_UNORM_BLOCK`
  - `VK_FORMAT_ASTC_5x5_SRGB_BLOCK`
  - `VK_FORMAT_ASTC_6x5_UNORM_BLOCK`
  - `VK_FORMAT_ASTC_6x5_SRGB_BLOCK`
  - `VK_FORMAT_ASTC_6x6_UNORM_BLOCK`
  - `VK_FORMAT_ASTC_6x6_SRGB_BLOCK`
  - `VK_FORMAT_ASTC_8x5_UNORM_BLOCK`

    - VK_FORMAT_ASTC_8x5_SRGB_BLOCK
    - VK_FORMAT_ASTC_8x6_UNORM_BLOCK
    - VK_FORMAT_ASTC_8x6_SRGB_BLOCK
    - VK_FORMAT_ASTC_8x8_UNORM_BLOCK
    - VK_FORMAT_ASTC_8x8_SRGB_BLOCK
    - VK_FORMAT_ASTC_10x5_UNORM_BLOCK
    - VK_FORMAT_ASTC_10x5_SRGB_BLOCK
    - VK_FORMAT_ASTC_10x6_UNORM_BLOCK
    - VK_FORMAT_ASTC_10x6_SRGB_BLOCK
    - VK_FORMAT_ASTC_10x8_UNORM_BLOCK
    - VK_FORMAT_ASTC_10x8_SRGB_BLOCK
    - VK_FORMAT_ASTC_10x10_UNORM_BLOCK
    - VK_FORMAT_ASTC_10x10_SRGB_BLOCK
    - VK_FORMAT_ASTC_12x10_UNORM_BLOCK
    - VK_FORMAT_ASTC_12x10_SRGB_BLOCK
    - VK_FORMAT_ASTC_12x12_UNORM_BLOCK
    - VK_FORMAT_ASTC_12x12_SRGB_BLOCK

      To query for additional properties, or if the feature is not enabled, vkGetPhysicalDeviceFormatProperties and vkGetPhysicalDeviceImageFormatProperties **can** be used to check for supported properties of individual formats as normal.

- textureCompressionBC specifies whether all of the BC compressed texture formats are supported. If this feature is enabled, then the VK_FORMAT_FEATURE_SAMPLED_IMAGE_BIT, VK_FORMAT_FEATURE_BLIT_SRC_BIT and VK_FORMAT_FEATURE_SAMPLED_IMAGE_FILTER_LINEAR_BIT features **must** be supported in optimalTilingFeatures for the following formats:
    - VK_FORMAT_BC1_RGB_UNORM_BLOCK
    - VK_FORMAT_BC1_RGB_SRGB_BLOCK
    - VK_FORMAT_BC1_RGBA_UNORM_BLOCK
    - VK_FORMAT_BC1_RGBA_SRGB_BLOCK
    - VK_FORMAT_BC2_UNORM_BLOCK
    - VK_FORMAT_BC2_SRGB_BLOCK
    - VK_FORMAT_BC3_UNORM_BLOCK
    - VK_FORMAT_BC3_SRGB_BLOCK
    - VK_FORMAT_BC4_UNORM_BLOCK
    - VK_FORMAT_BC4_SNORM_BLOCK
    - VK_FORMAT_BC5_UNORM_BLOCK

    - VK_FORMAT_BC5_SNORM_BLOCK
    - VK_FORMAT_BC6H_UFLOAT_BLOCK
    - VK_FORMAT_BC6H_SFLOAT_BLOCK
    - VK_FORMAT_BC7_UNORM_BLOCK
    - VK_FORMAT_BC7_SRGB_BLOCK

    To query for additional properties, or if the feature is not enabled, vkGetPhysicalDeviceFormatProperties and vkGetPhysicalDeviceImageFormatProperties **can** be used to check for supported properties of individual formats as normal.

- occlusionQueryPrecise specifies whether occlusion queries returning actual sample counts are supported. Occlusion queries are created in a VkQueryPool by specifying the queryType of VK_QUERY_TYPE_OCCLUSION in the VkQueryPoolCreateInfo structure which is passed to vkCreateQueryPool. If this feature is enabled, queries of this type **can** enable VK_QUERY_CONTROL_PRECISE_BIT in the flags parameter to vkCmdBeginQuery. If this feature is not supported, the implementation supports only boolean occlusion queries. When any samples are passed, boolean queries will return a non-zero result value, otherwise a result value of zero is returned. When this feature is enabled and VK_QUERY_CONTROL_PRECISE_BIT is set, occlusion queries will report the actual number of samples passed.
- pipelineStatisticsQuery specifies whether the pipeline statistics queries are supported. If this feature is not enabled, queries of type VK_QUERY_TYPE_PIPELINE_STATISTICS **cannot** be created, and none of the VkQueryPipelineStatisticFlagBits bits **can** be set in the pipelineStatistics member of the VkQueryPoolCreateInfo structure.
- vertexPipelineStoresAndAtomics specifies whether storage buffers and images support stores and atomic operations in the vertex, tessellation, and geometry shader stages. If this feature is not enabled, all storage image, storage texel buffer, and storage buffer variables used by these stages in shader modules **must** be decorated with the NonWritable decoration (or the readonly memory qualifier in GLSL).
- fragmentStoresAndAtomics specifies whether storage buffers and images support stores and atomic operations in the fragment shader stage. If this feature is not enabled, all storage image, storage texel buffer, and storage buffer variables used by the fragment stage in shader modules **must** be decorated with the NonWritable decoration (or the readonly memory qualifier in GLSL).
- shaderTessellationAndGeometryPointSize specifies whether the PointSize built-in decoration is available in the tessellation control, tessellation evaluation, and geometry shader stages. If this feature is not enabled, members decorated with the PointSize built-in decoration **must** not be read from or written to and all points written from a tessellation or geometry shader will have a size of 1.0. This also specifies whether shader modules **can** declare the TessellationPointSize capability for tessellation control and evaluation shaders, or if the shader modules **can** declare the GeometryPointSize capability for geometry shaders. An implementation supporting this feature **must** also support one or both of the tessellationShader or geometryShader features.
- shaderImageGatherExtended specifies whether the extended set of image gather instructions are available in shader code. If this feature is not enabled, the OpImage*Gather instructions do not support the Offset and ConstOffsets operands. This also specifies whether shader modules **can** declare the ImageGatherExtended capability.

- `shaderStorageImageExtendedFormats` specifies whether all the “storage image extended formats” below are supported; if this feature is supported, then the `VK_FORMAT_FEATURE_STORAGE_IMAGE_BIT` **must** be supported in `optimalTilingFeatures` for the following formats:
  - `VK_FORMAT_R16G16_SFLOAT`
  - `VK_FORMAT_B10G11R11_UFLOAT_PACK32`
  - `VK_FORMAT_R16_SFLOAT`
  - `VK_FORMAT_R16G16B16A16_UNORM`
  - `VK_FORMAT_A2B10G10R10_UNORM_PACK32`
  - `VK_FORMAT_R16G16_UNORM`
  - `VK_FORMAT_R8G8_UNORM`
  - `VK_FORMAT_R16_UNORM`
  - `VK_FORMAT_R8_UNORM`
  - `VK_FORMAT_R16G16B16A16_SNORM`
  - `VK_FORMAT_R16G16_SNORM`
  - `VK_FORMAT_R8G8_SNORM`
  - `VK_FORMAT_R16_SNORM`
  - `VK_FORMAT_R8_SNORM`
  - `VK_FORMAT_R16G16_SINT`
  - `VK_FORMAT_R8G8_SINT`
  - `VK_FORMAT_R16_SINT`
  - `VK_FORMAT_R8_SINT`
  - `VK_FORMAT_A2B10G10R10_UINT_PACK32`
  - `VK_FORMAT_R16G16_UINT`
  - `VK_FORMAT_R8G8_UINT`
  - `VK_FORMAT_R16_UINT`
  - `VK_FORMAT_R8_UINT`

NOTE

`shaderStorageImageExtendedFormats` feature only adds a guarantee of format support, which is specified for the whole physical device. Therefore enabling or disabling the feature via vkCreateDevice has no practical effect.

To query for additional properties, or if the feature is not supported, vkGetPhysicalDeviceFormatProperties and vkGetPhysicalDeviceImageFormatProperties **can** be used to check for supported properties of individual formats, as usual rules allow.

`VK_FORMAT_R32G32_UINT`, `VK_FORMAT_R32G32_SINT`, and `VK_FORMAT_R32G32_SFLOAT` from `StorageImageExtendedFormats` SPIR-V capability, are already covered by core Vulkan mandatory format support.

- shaderStorageImageMultisample specifies whether multisampled storage images are supported. If this feature is not enabled, images that are created with a usage that includes VK_IMAGE_USAGE_STORAGE_BIT **must** be created with samples equal to VK_SAMPLE_COUNT_1_BIT. This also specifies whether shader modules **can** declare the StorageImageMultisample and ImageMSArray capabilities.
- shaderStorageImageReadWithoutFormat specifies whether storage images and storage texel buffers require a format qualifier to be specified when reading. shaderStorageImageReadWithoutFormat applies only to formats listed in the storage without format list.
- shaderStorageImageWriteWithoutFormat specifies whether storage images and storage texel buffers require a format qualifier to be specified when writing. shaderStorageImageWriteWithoutFormat applies only to formats listed in the storage without format list.
- shaderUniformBufferArrayDynamicIndexing specifies whether arrays of uniform buffers **can** be indexed by integer expressions that are dynamically uniform within either the subgroup or the invocation group in shader code. If this feature is not enabled, resources with a descriptor type of VK_DESCRIPTOR_TYPE_UNIFORM_BUFFER or VK_DESCRIPTOR_TYPE_UNIFORM_BUFFER_DYNAMIC **must** be indexed only by constant integral expressions when aggregated into arrays in shader code. This also specifies whether shader modules **can** declare the UniformBufferArrayDynamicIndexing capability.
- shaderSampledImageArrayDynamicIndexing specifies whether arrays of samplers or sampled images **can** be indexed by integer expressions that are dynamically uniform within either the subgroup or the invocation group in shader code. If this feature is not enabled, resources with a descriptor type of VK_DESCRIPTOR_TYPE_SAMPLER, VK_DESCRIPTOR_TYPE_COMBINED_IMAGE_SAMPLER, or VK_DESCRIPTOR_TYPE_SAMPLED_IMAGE **must** be indexed only by constant integral expressions when aggregated into arrays in shader code. This also specifies whether shader modules **can** declare the SampledImageArrayDynamicIndexing capability.
- shaderStorageBufferArrayDynamicIndexing specifies whether arrays of storage buffers **can** be indexed by integer expressions that are dynamically uniform within either the subgroup or the invocation group in shader code. If this feature is not enabled, resources with a descriptor type of VK_DESCRIPTOR_TYPE_STORAGE_BUFFER or VK_DESCRIPTOR_TYPE_STORAGE_BUFFER_DYNAMIC **must** be indexed only by constant integral expressions when aggregated into arrays in shader code. This also specifies whether shader modules **can** declare the StorageBufferArrayDynamicIndexing capability.
- shaderStorageImageArrayDynamicIndexing specifies whether arrays of storage images **can** be indexed by integer expressions that are dynamically uniform within either the subgroup or the invocation group in shader code. If this feature is not enabled, resources with a descriptor type of VK_DESCRIPTOR_TYPE_STORAGE_IMAGE **must** be indexed only by constant integral expressions when aggregated into arrays in shader code. This also specifies whether shader modules **can** declare the StorageImageArrayDynamicIndexing capability.
- shaderClipDistance specifies whether clip distances are supported in shader code. If this feature is not enabled, any members decorated with the ClipDistance built-in decoration **must** not be read from or written to in shader modules. This also specifies whether shader modules **can** declare the ClipDistance capability.
- shaderCullDistance specifies whether cull distances are supported in shader code. If this feature is not enabled, any members decorated with the CullDistance built-in decoration **must** not be

read from or written to in shader modules. This also specifies whether shader modules **can** declare the `CullDistance` capability.

- `shaderFloat64` specifies whether 64-bit floats (doubles) are supported in shader code. If this feature is not enabled, 64-bit floating-point types **must** not be used in shader code. This also specifies whether shader modules **can** declare the `Float64` capability. Declaring and using 64-bit floats is enabled for all storage classes that SPIR-V allows with the `Float64` capability.
- `shaderInt64` specifies whether 64-bit integers (signed and unsigned) are supported in shader code. If this feature is not enabled, 64-bit integer types **must** not be used in shader code. This also specifies whether shader modules **can** declare the `Int64` capability. Declaring and using 64-bit integers is enabled for all storage classes that SPIR-V allows with the `Int64` capability.
- `shaderInt16` specifies whether 16-bit integers (signed and unsigned) are supported in shader code. If this feature is not enabled, 16-bit integer types **must** not be used in shader code. This also specifies whether shader modules **can** declare the `Int16` capability. However, this only enables a subset of the storage classes that SPIR-V allows for the `Int16` SPIR-V capability: Declaring and using 16-bit integers in the `Private`, `Workgroup`, and `Function` storage classes is enabled, while declaring them in the interface storage classes (e.g., `UniformConstant`, `Uniform`, `StorageBuffer`, `Input`, `Output`, and `PushConstant`) is not enabled.
- `shaderResourceResidency` specifies whether image operations that return resource residency information are supported in shader code. If this feature is not enabled, the `OpImageSparse*` instructions **must** not be used in shader code. This also specifies whether shader modules **can** declare the `SparseResidency` capability. The feature requires at least one of the `sparseResidency*` features to be supported.
- `shaderResourceMinLod` specifies whether image operations specifying the minimum resource LOD are supported in shader code. If this feature is not enabled, the `MinLod` image operand **must** not be used in shader code. This also specifies whether shader modules **can** declare the `MinLod` capability.
- `sparseBinding` specifies whether resource memory **can** be managed at opaque sparse block level instead of at the object level. If this feature is not enabled, resource memory **must** be bound only on a per-object basis using the vkBindBufferMemory and vkBindImageMemory commands. In this case, buffers and images **must** not be created with `VK_BUFFER_CREATE_SPARSE_BINDING_BIT` and `VK_IMAGE_CREATE_SPARSE_BINDING_BIT` set in the `flags` member of the VkBufferCreateInfo and VkImageCreateInfo structures, respectively. Otherwise resource memory **can** be managed as described in Sparse Resource Features.
- `sparseResidencyBuffer` specifies whether the device **can** access partially resident buffers. If this feature is not enabled, buffers **must** not be created with `VK_BUFFER_CREATE_SPARSE_RESIDENCY_BIT` set in the `flags` member of the VkBufferCreateInfo structure.
- `sparseResidencyImage2D` specifies whether the device **can** access partially resident 2D images with 1 sample per pixel. If this feature is not enabled, images with an `imageType` of `VK_IMAGE_TYPE_2D` and `samples` set to `VK_SAMPLE_COUNT_1_BIT` **must** not be created with `VK_IMAGE_CREATE_SPARSE_RESIDENCY_BIT` set in the `flags` member of the VkImageCreateInfo structure.
- `sparseResidencyImage3D` specifies whether the device **can** access partially resident 3D images. If this feature is not enabled, images with an `imageType` of `VK_IMAGE_TYPE_3D` **must** not be created with `VK_IMAGE_CREATE_SPARSE_RESIDENCY_BIT` set in the `flags` member of the VkImageCreateInfo

structure.

- sparseResidency2Samples specifies whether the physical device **can** access partially resident 2D images with 2 samples per pixel. If this feature is not enabled, images with an imageType of VK_IMAGE_TYPE_2D and samples set to VK_SAMPLE_COUNT_2_BIT **must** not be created with VK_IMAGE_CREATE_SPARSE_RESIDENCY_BIT set in the flags member of the VkImageCreateInfo structure.
- sparseResidency4Samples specifies whether the physical device **can** access partially resident 2D images with 4 samples per pixel. If this feature is not enabled, images with an imageType of VK_IMAGE_TYPE_2D and samples set to VK_SAMPLE_COUNT_4_BIT **must** not be created with VK_IMAGE_CREATE_SPARSE_RESIDENCY_BIT set in the flags member of the VkImageCreateInfo structure.
- sparseResidency8Samples specifies whether the physical device **can** access partially resident 2D images with 8 samples per pixel. If this feature is not enabled, images with an imageType of VK_IMAGE_TYPE_2D and samples set to VK_SAMPLE_COUNT_8_BIT **must** not be created with VK_IMAGE_CREATE_SPARSE_RESIDENCY_BIT set in the flags member of the VkImageCreateInfo structure.
- sparseResidency16Samples specifies whether the physical device **can** access partially resident 2D images with 16 samples per pixel. If this feature is not enabled, images with an imageType of VK_IMAGE_TYPE_2D and samples set to VK_SAMPLE_COUNT_16_BIT **must** not be created with VK_IMAGE_CREATE_SPARSE_RESIDENCY_BIT set in the flags member of the VkImageCreateInfo structure.
- sparseResidencyAliased specifies whether the physical device **can** correctly access data aliased into multiple locations. If this feature is not enabled, the VK_BUFFER_CREATE_SPARSE_ALIASED_BIT and VK_IMAGE_CREATE_SPARSE_ALIASED_BIT enum values **must** not be used in flags members of the VkBufferCreateInfo and VkImageCreateInfo structures, respectively.
- variableMultisampleRate specifies whether all pipelines that will be bound to a command buffer during a subpass which uses no attachments **must** have the same value for VkPipelineMultisampleStateCreateInfo::rasterizationSamples. If set to VK_TRUE, the implementation supports variable multisample rates in a subpass which uses no attachments. If set to VK_FALSE, then all pipelines bound in such a subpass **must** have the same multisample rate. This has no effect in situations where a subpass uses any attachments.
- inheritedQueries specifies whether a secondary command buffer **may** be executed while a query is active.

The VkPhysicalDeviceVulkan11Features structure is defined as:

```
// Provided by VK_VERSION_1_2
typedef struct VkPhysicalDeviceVulkan11Features {
    VkStructureType    sType;
    void*              pNext;
    VkBool32           storageBuffer16BitAccess;
    VkBool32           uniformAndStorageBuffer16BitAccess;
    VkBool32           storagePushConstant16;
    VkBool32           storageInputOutput16;
    VkBool32           multiview;
    VkBool32           multiviewGeometryShader;
    VkBool32           multiviewTessellationShader;
    VkBool32           variablePointersStorageBuffer;
    VkBool32           variablePointers;
    VkBool32           protectedMemory;
    VkBool32           samplerYcbcrConversion;
    VkBool32           shaderDrawParameters;
} VkPhysicalDeviceVulkan11Features;
```

This structure describes the following features:

- `sType` is a VkStructureType value identifying this structure.
- `pNext` is `NULL` or a pointer to a structure extending this structure.
- `storageBuffer16BitAccess` specifies whether objects in the `StorageBuffer`, or `PhysicalStorageBuffer` storage class with the `Block` decoration **can** have 16-bit integer and 16-bit floating-point members. If this feature is not enabled, 16-bit integer or 16-bit floating-point members **must** not be used in such objects. This also specifies whether shader modules **can** declare the `StorageBuffer16BitAccess` capability.
- `uniformAndStorageBuffer16BitAccess` specifies whether objects in the `Uniform` storage class with the `Block` decoration **can** have 16-bit integer and 16-bit floating-point members. If this feature is not enabled, 16-bit integer or 16-bit floating-point members **must** not be used in such objects. This also specifies whether shader modules **can** declare the `UniformAndStorageBuffer16BitAccess` capability.
- `storagePushConstant16` specifies whether objects in the `PushConstant` storage class **can** have 16-bit integer and 16-bit floating-point members. If this feature is not enabled, 16-bit integer or floating-point members **must** not be used in such objects. This also specifies whether shader modules **can** declare the `StoragePushConstant16` capability.
- `storageInputOutput16` specifies whether objects in the `Input` and `Output` storage classes **can** have 16-bit integer and 16-bit floating-point members. If this feature is not enabled, 16-bit integer or 16-bit floating-point members **must** not be used in such objects. This also specifies whether shader modules **can** declare the `StorageInputOutput16` capability.
- `multiview` specifies whether the implementation supports multiview rendering within a render pass. If this feature is not enabled, the view mask of each subpass **must** always be zero.
- `multiviewGeometryShader` specifies whether the implementation supports multiview rendering within a render pass, with geometry shaders. If this feature is not enabled, then a pipeline compiled against a subpass with a non-zero view mask **must** not include a geometry shader.

- `multiviewTessellationShader` specifies whether the implementation supports multiview rendering within a render pass, with tessellation shaders. If this feature is not enabled, then a pipeline compiled against a subpass with a non-zero view mask **must** not include any tessellation shaders.
- `variablePointersStorageBuffer` specifies whether the implementation supports the SPIR-V `VariablePointersStorageBuffer` capability. When this feature is not enabled, shader modules **must** not declare the `SPV_KHR_variable_pointers` extension or the `VariablePointersStorageBuffer` capability.
- `variablePointers` specifies whether the implementation supports the SPIR-V `VariablePointers` capability. When this feature is not enabled, shader modules **must** not declare the `VariablePointers` capability.
- `protectedMemory` specifies whether protected memory is supported.
- `samplerYcbcrConversion` specifies whether the implementation supports sampler $Y'C_BC_R$ conversion. If `samplerYcbcrConversion` is `VK_FALSE`, sampler $Y'C_BC_R$ conversion is not supported, and samplers using sampler $Y'C_BC_R$ conversion **must** not be used.
- `shaderDrawParameters` specifies whether the implementation supports the SPIR-V `DrawParameters` capability. When this feature is not enabled, shader modules **must** not declare the `SPV_KHR_shader_draw_parameters` extension or the `DrawParameters` capability.

If the `VkPhysicalDeviceVulkan11Features` structure is included in the `pNext` chain of the `VkPhysicalDeviceFeatures2` structure passed to `vkGetPhysicalDeviceFeatures2`, it is filled in to indicate whether each corresponding feature is supported. `VkPhysicalDeviceVulkan11Features` **can** also be used in the `pNext` chain of `VkDeviceCreateInfo` to selectively enable these features.

Valid Usage (Implicit)

- VUID-VkPhysicalDeviceVulkan11Features-sType-sType
  `sType` **must** be `VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_VULKAN_1_1_FEATURES`

The `VkPhysicalDeviceVulkan12Features` structure is defined as:

```
// Provided by VK_VERSION_1_2
typedef struct VkPhysicalDeviceVulkan12Features {
    VkStructureType    sType;
    void*              pNext;
    VkBool32           samplerMirrorClampToEdge;
    VkBool32           drawIndirectCount;
    VkBool32           storageBuffer8BitAccess;
    VkBool32           uniformAndStorageBuffer8BitAccess;
    VkBool32           storagePushConstant8;
    VkBool32           shaderBufferInt64Atomics;
    VkBool32           shaderSharedInt64Atomics;
    VkBool32           shaderFloat16;
    VkBool32           shaderInt8;
    VkBool32           descriptorIndexing;
    VkBool32           shaderInputAttachmentArrayDynamicIndexing;
```

```
    VkBool32           shaderUniformTexelBufferArrayDynamicIndexing;
    VkBool32           shaderStorageTexelBufferArrayDynamicIndexing;
    VkBool32           shaderUniformBufferArrayNonUniformIndexing;
    VkBool32           shaderSampledImageArrayNonUniformIndexing;
    VkBool32           shaderStorageBufferArrayNonUniformIndexing;
    VkBool32           shaderStorageImageArrayNonUniformIndexing;
    VkBool32           shaderInputAttachmentArrayNonUniformIndexing;
    VkBool32           shaderUniformTexelBufferArrayNonUniformIndexing;
    VkBool32           shaderStorageTexelBufferArrayNonUniformIndexing;
    VkBool32           descriptorBindingUniformBufferUpdateAfterBind;
    VkBool32           descriptorBindingSampledImageUpdateAfterBind;
    VkBool32           descriptorBindingStorageImageUpdateAfterBind;
    VkBool32           descriptorBindingStorageBufferUpdateAfterBind;
    VkBool32           descriptorBindingUniformTexelBufferUpdateAfterBind;
    VkBool32           descriptorBindingStorageTexelBufferUpdateAfterBind;
    VkBool32           descriptorBindingUpdateUnusedWhilePending;
    VkBool32           descriptorBindingPartiallyBound;
    VkBool32           descriptorBindingVariableDescriptorCount;
    VkBool32           runtimeDescriptorArray;
    VkBool32           samplerFilterMinmax;
    VkBool32           scalarBlockLayout;
    VkBool32           imagelessFramebuffer;
    VkBool32           uniformBufferStandardLayout;
    VkBool32           shaderSubgroupExtendedTypes;
    VkBool32           separateDepthStencilLayouts;
    VkBool32           hostQueryReset;
    VkBool32           timelineSemaphore;
    VkBool32           bufferDeviceAddress;
    VkBool32           bufferDeviceAddressCaptureReplay;
    VkBool32           bufferDeviceAddressMultiDevice;
    VkBool32           vulkanMemoryModel;
    VkBool32           vulkanMemoryModelDeviceScope;
    VkBool32           vulkanMemoryModelAvailabilityVisibilityChains;
    VkBool32           shaderOutputViewportIndex;
    VkBool32           shaderOutputLayer;
    VkBool32           subgroupBroadcastDynamicId;
} VkPhysicalDeviceVulkan12Features;
```

This structure describes the following features:

- `sType` is a VkStructureType value identifying this structure.
- `pNext` is `NULL` or a pointer to a structure extending this structure.
- `samplerMirrorClampToEdge` indicates whether the implementation supports the `VK_SAMPLER_ADDRESS_MODE_MIRROR_CLAMP_TO_EDGE` sampler address mode. If this feature is not enabled, the `VK_SAMPLER_ADDRESS_MODE_MIRROR_CLAMP_TO_EDGE` sampler address mode **must** not be used.
- `drawIndirectCount` indicates whether the implementation supports the vkCmdDrawIndirectCount and vkCmdDrawIndexedIndirectCount functions. If this feature is

not enabled, these functions **must** not be used.

- `storageBuffer8BitAccess` indicates whether objects in the `StorageBuffer`, or `PhysicalStorageBuffer` storage class with the `Block` decoration **can** have 8-bit integer members. If this feature is not enabled, 8-bit integer members **must** not be used in such objects. This also indicates whether shader modules **can** declare the `StorageBuffer8BitAccess` capability.
- `uniformAndStorageBuffer8BitAccess` indicates whether objects in the `Uniform` storage class with the `Block` decoration **can** have 8-bit integer members. If this feature is not enabled, 8-bit integer members **must** not be used in such objects. This also indicates whether shader modules **can** declare the `UniformAndStorageBuffer8BitAccess` capability.
- `storagePushConstant8` indicates whether objects in the `PushConstant` storage class **can** have 8-bit integer members. If this feature is not enabled, 8-bit integer members **must** not be used in such objects. This also indicates whether shader modules **can** declare the `StoragePushConstant8` capability.
- `shaderBufferInt64Atomics` indicates whether shaders **can** perform 64-bit unsigned and signed integer atomic operations on buffers.
- `shaderSharedInt64Atomics` indicates whether shaders **can** perform 64-bit unsigned and signed integer atomic operations on shared memory.
- `shaderFloat16` indicates whether 16-bit floats (halfs) are supported in shader code. This also indicates whether shader modules **can** declare the `Float16` capability. However, this only enables a subset of the storage classes that SPIR-V allows for the `Float16` SPIR-V capability: Declaring and using 16-bit floats in the `Private`, `Workgroup`, and `Function` storage classes is enabled, while declaring them in the interface storage classes (e.g., `UniformConstant`, `Uniform`, `StorageBuffer`, `Input`, `Output`, and `PushConstant`) is not enabled.
- `shaderInt8` indicates whether 8-bit integers (signed and unsigned) are supported in shader code. This also indicates whether shader modules **can** declare the `Int8` capability. However, this only enables a subset of the storage classes that SPIR-V allows for the `Int8` SPIR-V capability: Declaring and using 8-bit integers in the `Private`, `Workgroup`, and `Function` storage classes is enabled, while declaring them in the interface storage classes (e.g., `UniformConstant`, `Uniform`, `StorageBuffer`, `Input`, `Output`, and `PushConstant`) is not enabled.
- `descriptorIndexing` indicates whether the implementation supports the minimum set of descriptor indexing features as described in the Feature Requirements section. Enabling the `descriptorIndexing` member when vkCreateDevice is called does not imply the other minimum descriptor indexing features are also enabled. Those other descriptor indexing features **must** be enabled individually as needed by the application.
- `shaderInputAttachmentArrayDynamicIndexing` indicates whether arrays of input attachments **can** be indexed by integer expressions that are dynamically uniform within either the subgroup or the invocation group in shader code. If this feature is not enabled, resources with a descriptor type of `VK_DESCRIPTOR_TYPE_INPUT_ATTACHMENT` **must** be indexed only by constant integral expressions when aggregated into arrays in shader code. This also indicates whether shader modules **can** declare the `InputAttachmentArrayDynamicIndexing` capability.
- `shaderUniformTexelBufferArrayDynamicIndexing` indicates whether arrays of uniform texel buffers **can** be indexed by integer expressions that are dynamically uniform within either the subgroup or the invocation group in shader code. If this feature is not enabled, resources with a descriptor type of `VK_DESCRIPTOR_TYPE_UNIFORM_TEXEL_BUFFER` **must** be indexed only by constant

integral expressions when aggregated into arrays in shader code. This also indicates whether shader modules **can** declare the UniformTexelBufferArrayDynamicIndexing capability.

- shaderStorageTexelBufferArrayDynamicIndexing indicates whether arrays of storage texel buffers **can** be indexed by integer expressions that are dynamically uniform within either the subgroup or the invocation group in shader code. If this feature is not enabled, resources with a descriptor type of VK_DESCRIPTOR_TYPE_STORAGE_TEXEL_BUFFER **must** be indexed only by constant integral expressions when aggregated into arrays in shader code. This also indicates whether shader modules **can** declare the StorageTexelBufferArrayDynamicIndexing capability.
- shaderUniformBufferArrayNonUniformIndexing indicates whether arrays of uniform buffers **can** be indexed by non-uniform integer expressions in shader code. If this feature is not enabled, resources with a descriptor type of VK_DESCRIPTOR_TYPE_UNIFORM_BUFFER or VK_DESCRIPTOR_TYPE_UNIFORM_BUFFER_DYNAMIC **must** not be indexed by non-uniform integer expressions when aggregated into arrays in shader code. This also indicates whether shader modules **can** declare the UniformBufferArrayNonUniformIndexing capability.
- shaderSampledImageArrayNonUniformIndexing indicates whether arrays of samplers or sampled images **can** be indexed by non-uniform integer expressions in shader code. If this feature is not enabled, resources with a descriptor type of VK_DESCRIPTOR_TYPE_SAMPLER, VK_DESCRIPTOR_TYPE_COMBINED_IMAGE_SAMPLER, or VK_DESCRIPTOR_TYPE_SAMPLED_IMAGE **must** not be indexed by non-uniform integer expressions when aggregated into arrays in shader code. This also indicates whether shader modules **can** declare the SampledImageArrayNonUniformIndexing capability.
- shaderStorageBufferArrayNonUniformIndexing indicates whether arrays of storage buffers **can** be indexed by non-uniform integer expressions in shader code. If this feature is not enabled, resources with a descriptor type of VK_DESCRIPTOR_TYPE_STORAGE_BUFFER or VK_DESCRIPTOR_TYPE_STORAGE_BUFFER_DYNAMIC **must** not be indexed by non-uniform integer expressions when aggregated into arrays in shader code. This also indicates whether shader modules **can** declare the StorageBufferArrayNonUniformIndexing capability.
- shaderStorageImageArrayNonUniformIndexing indicates whether arrays of storage images **can** be indexed by non-uniform integer expressions in shader code. If this feature is not enabled, resources with a descriptor type of VK_DESCRIPTOR_TYPE_STORAGE_IMAGE **must** not be indexed by non-uniform integer expressions when aggregated into arrays in shader code. This also indicates whether shader modules **can** declare the StorageImageArrayNonUniformIndexing capability.
- shaderInputAttachmentArrayNonUniformIndexing indicates whether arrays of input attachments **can** be indexed by non-uniform integer expressions in shader code. If this feature is not enabled, resources with a descriptor type of VK_DESCRIPTOR_TYPE_INPUT_ATTACHMENT **must** not be indexed by non-uniform integer expressions when aggregated into arrays in shader code. This also indicates whether shader modules **can** declare the InputAttachmentArrayNonUniformIndexing capability.
- shaderUniformTexelBufferArrayNonUniformIndexing indicates whether arrays of uniform texel buffers **can** be indexed by non-uniform integer expressions in shader code. If this feature is not enabled, resources with a descriptor type of VK_DESCRIPTOR_TYPE_UNIFORM_TEXEL_BUFFER **must** not be indexed by non-uniform integer expressions when aggregated into arrays in shader code. This also indicates whether shader modules **can** declare the UniformTexelBufferArrayNonUniformIndexing capability.

- `shaderStorageTexelBufferArrayNonUniformIndexing` indicates whether arrays of storage texel buffers **can** be indexed by non-uniform integer expressions in shader code. If this feature is not enabled, resources with a descriptor type of `VK_DESCRIPTOR_TYPE_STORAGE_TEXEL_BUFFER` **must** not be indexed by non-uniform integer expressions when aggregated into arrays in shader code. This also indicates whether shader modules **can** declare the `StorageTexelBufferArrayNonUniformIndexing` capability.
- `descriptorBindingUniformBufferUpdateAfterBind` indicates whether the implementation supports updating uniform buffer descriptors after a set is bound. If this feature is not enabled, `VK_DESCRIPTOR_BINDING_UPDATE_AFTER_BIND_BIT` **must** not be used with `VK_DESCRIPTOR_TYPE_UNIFORM_BUFFER`.
- `descriptorBindingSampledImageUpdateAfterBind` indicates whether the implementation supports updating sampled image descriptors after a set is bound. If this feature is not enabled, `VK_DESCRIPTOR_BINDING_UPDATE_AFTER_BIND_BIT` **must** not be used with `VK_DESCRIPTOR_TYPE_SAMPLER`, `VK_DESCRIPTOR_TYPE_COMBINED_IMAGE_SAMPLER`, or `VK_DESCRIPTOR_TYPE_SAMPLED_IMAGE`.
- `descriptorBindingStorageImageUpdateAfterBind` indicates whether the implementation supports updating storage image descriptors after a set is bound. If this feature is not enabled, `VK_DESCRIPTOR_BINDING_UPDATE_AFTER_BIND_BIT` **must** not be used with `VK_DESCRIPTOR_TYPE_STORAGE_IMAGE`.
- `descriptorBindingStorageBufferUpdateAfterBind` indicates whether the implementation supports updating storage buffer descriptors after a set is bound. If this feature is not enabled, `VK_DESCRIPTOR_BINDING_UPDATE_AFTER_BIND_BIT` **must** not be used with `VK_DESCRIPTOR_TYPE_STORAGE_BUFFER`.
- `descriptorBindingUniformTexelBufferUpdateAfterBind` indicates whether the implementation supports updating uniform texel buffer descriptors after a set is bound. If this feature is not enabled, `VK_DESCRIPTOR_BINDING_UPDATE_AFTER_BIND_BIT` **must** not be used with `VK_DESCRIPTOR_TYPE_UNIFORM_TEXEL_BUFFER`.
- `descriptorBindingStorageTexelBufferUpdateAfterBind` indicates whether the implementation supports updating storage texel buffer descriptors after a set is bound. If this feature is not enabled, `VK_DESCRIPTOR_BINDING_UPDATE_AFTER_BIND_BIT` **must** not be used with `VK_DESCRIPTOR_TYPE_STORAGE_TEXEL_BUFFER`.
- `descriptorBindingUpdateUnusedWhilePending` indicates whether the implementation supports updating descriptors while the set is in use. If this feature is not enabled, `VK_DESCRIPTOR_BINDING_UPDATE_UNUSED_WHILE_PENDING_BIT` **must** not be used.
- `descriptorBindingPartiallyBound` indicates whether the implementation supports statically using a descriptor set binding in which some descriptors are not valid. If this feature is not enabled, `VK_DESCRIPTOR_BINDING_PARTIALLY_BOUND_BIT` **must** not be used.
- `descriptorBindingVariableDescriptorCount` indicates whether the implementation supports descriptor sets with a variable-sized last binding. If this feature is not enabled, `VK_DESCRIPTOR_BINDING_VARIABLE_DESCRIPTOR_COUNT_BIT` **must** not be used.
- `runtimeDescriptorArray` indicates whether the implementation supports the SPIR-V `RuntimeDescriptorArray` capability. If this feature is not enabled, descriptors **must** not be declared in runtime arrays.

- samplerFilterMinmax indicates whether the implementation supports a minimum set of required formats supporting min/max filtering as defined by the filterMinmaxSingleComponentFormats property minimum requirements. If this feature is not enabled, then VkSamplerReductionModeCreateInfo **must** only use VK_SAMPLER_REDUCTION_MODE_WEIGHTED_AVERAGE.
- scalarBlockLayout indicates that the implementation supports the layout of resource blocks in shaders using scalar alignment.
- imagelessFramebuffer indicates that the implementation supports specifying the image view for attachments at render pass begin time via VkRenderPassAttachmentBeginInfo.
- uniformBufferStandardLayout indicates that the implementation supports the same layouts for uniform buffers as for storage and other kinds of buffers. See Standard Buffer Layout.
- shaderSubgroupExtendedTypes is a boolean specifying whether subgroup operations can use 8-bit integer, 16-bit integer, 64-bit integer, 16-bit floating-point, and vectors of these types in group operations with subgroup scope, if the implementation supports the types.
- separateDepthStencilLayouts indicates whether the implementation supports a VkImageMemoryBarrier for a depth/stencil image with only one of VK_IMAGE_ASPECT_DEPTH_BIT or VK_IMAGE_ASPECT_STENCIL_BIT set, and whether VK_IMAGE_LAYOUT_DEPTH_ATTACHMENT_OPTIMAL, VK_IMAGE_LAYOUT_DEPTH_READ_ONLY_OPTIMAL, VK_IMAGE_LAYOUT_STENCIL_ATTACHMENT_OPTIMAL, or VK_IMAGE_LAYOUT_STENCIL_READ_ONLY_OPTIMAL can be used.
- hostQueryReset indicates that the implementation supports resetting queries from the host with vkResetQueryPool.
- timelineSemaphore indicates whether semaphores created with a VkSemaphoreType of VK_SEMAPHORE_TYPE_TIMELINE are supported.
- bufferDeviceAddress indicates that the implementation supports accessing buffer memory in shaders as storage buffers via an address queried from vkGetBufferDeviceAddress.
- bufferDeviceAddressCaptureReplay indicates that the implementation supports saving and reusing buffer and device addresses, e.g. for trace capture and replay.
- bufferDeviceAddressMultiDevice indicates that the implementation supports the bufferDeviceAddress feature for logical devices created with multiple physical devices. If this feature is not supported, buffer addresses **must** not be queried on a logical device created with more than one physical device.
- vulkanMemoryModel indicates whether shader modules **can** declare the VulkanMemoryModel capability.
- vulkanMemoryModelDeviceScope indicates whether the Vulkan Memory Model can use Device scope synchronization. This also indicates whether shader modules **can** declare the VulkanMemoryModelDeviceScope capability.
- vulkanMemoryModelAvailabilityVisibilityChains indicates whether the Vulkan Memory Model can use availability and visibility chains with more than one element.
- shaderOutputViewportIndex indicates whether the implementation supports the ShaderViewportIndex SPIR-V capability enabling variables decorated with the ViewportIndex built-in to be exported from vertex or tessellation evaluation shaders. If this feature is not enabled, the ViewportIndex built-in decoration **must** not be used on outputs in vertex or tessellation

evaluation shaders.

- `shaderOutputLayer` indicates whether the implementation supports the `ShaderLayer` SPIR-V capability enabling variables decorated with the `Layer` built-in to be exported from vertex or tessellation evaluation shaders. If this feature is not enabled, the `Layer` built-in decoration **must** not be used on outputs in vertex or tessellation evaluation shaders.
- If `subgroupBroadcastDynamicId` is `VK_TRUE`, the "Id" operand of `OpGroupNonUniformBroadcast` **can** be dynamically uniform within a subgroup, and the "Index" operand of `OpGroupNonUniformQuadBroadcast` **can** be dynamically uniform within the derivative group. If it is `VK_FALSE`, these operands **must** be constants.

If the `VkPhysicalDeviceVulkan12Features` structure is included in the `pNext` chain of the VkPhysicalDeviceFeatures2 structure passed to vkGetPhysicalDeviceFeatures2, it is filled in to indicate whether each corresponding feature is supported. `VkPhysicalDeviceVulkan12Features` **can** also be used in the `pNext` chain of VkDeviceCreateInfo to selectively enable these features.

Valid Usage (Implicit)

- VUID-VkPhysicalDeviceVulkan12Features-sType-sType
  `sType` **must** be `VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_VULKAN_1_2_FEATURES`

The `VkPhysicalDeviceVulkan13Features` structure is defined as:

```
// Provided by VK_VERSION_1_3
typedef struct VkPhysicalDeviceVulkan13Features {
    VkStructureType    sType;
    void*              pNext;
    VkBool32           robustImageAccess;
    VkBool32           inlineUniformBlock;
    VkBool32           descriptorBindingInlineUniformBlockUpdateAfterBind;
    VkBool32           pipelineCreationCacheControl;
    VkBool32           privateData;
    VkBool32           shaderDemoteToHelperInvocation;
    VkBool32           shaderTerminateInvocation;
    VkBool32           subgroupSizeControl;
    VkBool32           computeFullSubgroups;
    VkBool32           synchronization2;
    VkBool32           textureCompressionASTC_HDR;
    VkBool32           shaderZeroInitializeWorkgroupMemory;
    VkBool32           dynamicRendering;
    VkBool32           shaderIntegerDotProduct;
    VkBool32           maintenance4;
} VkPhysicalDeviceVulkan13Features;
```

This structure describes the following features:

- `sType` is a VkStructureType value identifying this structure.

- pNext is NULL or a pointer to a structure extending this structure.
- robustImageAccess indicates whether image accesses are tightly bounds-checked against the dimensions of the image view. Invalid texels resulting from out of bounds image loads will be replaced as described in Texel Replacement, with either (0,0,1) or (0,0,0) values inserted for missing G, B, or A components based on the format.
- inlineUniformBlock indicates whether the implementation supports inline uniform block descriptors. If this feature is not enabled, VK_DESCRIPTOR_TYPE_INLINE_UNIFORM_BLOCK **must** not be used.
- descriptorBindingInlineUniformBlockUpdateAfterBind indicates whether the implementation supports updating inline uniform block descriptors after a set is bound. If this feature is not enabled, VK_DESCRIPTOR_BINDING_UPDATE_AFTER_BIND_BIT **must** not be used with VK_DESCRIPTOR_TYPE_INLINE_UNIFORM_BLOCK.
- pipelineCreationCacheControl indicates that the implementation supports:
  - The following **can** be used in Vk*PipelineCreateInfo::flags:
    - VK_PIPELINE_CREATE_FAIL_ON_PIPELINE_COMPILE_REQUIRED_BIT
    - VK_PIPELINE_CREATE_EARLY_RETURN_ON_FAILURE_BIT
  - The following **can** be used in VkPipelineCacheCreateInfo::flags:
    - VK_PIPELINE_CACHE_CREATE_EXTERNALLY_SYNCHRONIZED_BIT
- privateData indicates whether the implementation supports private data. See Private Data.
- shaderDemoteToHelperInvocation indicates whether the implementation supports the SPIR-V DemoteToHelperInvocationEXT capability.
- shaderTerminateInvocation specifies whether the implementation supports SPIR-V modules that use the SPV_KHR_terminate_invocation extension.
- subgroupSizeControl indicates whether the implementation supports controlling shader subgroup sizes via the VK_PIPELINE_SHADER_STAGE_CREATE_ALLOW_VARYING_SUBGROUP_SIZE_BIT flag and the VkPipelineShaderStageRequiredSubgroupSizeCreateInfo structure.
- computeFullSubgroups indicates whether the implementation supports requiring full subgroups in compute shaders via the VK_PIPELINE_SHADER_STAGE_CREATE_REQUIRE_FULL_SUBGROUPS_BIT flag.
- synchronization2 indicates whether the implementation supports the new set of synchronization commands introduced in VK_KHR_synchronization2.
- textureCompressionASTC_HDR indicates whether all of the ASTC HDR compressed texture formats are supported. If this feature is enabled, then the VK_FORMAT_FEATURE_SAMPLED_IMAGE_BIT, VK_FORMAT_FEATURE_BLIT_SRC_BIT and VK_FORMAT_FEATURE_SAMPLED_IMAGE_FILTER_LINEAR_BIT features **must** be supported in optimalTilingFeatures for the following formats:
  - VK_FORMAT_ASTC_4x4_SFLOAT_BLOCK
  - VK_FORMAT_ASTC_5x4_SFLOAT_BLOCK
  - VK_FORMAT_ASTC_5x5_SFLOAT_BLOCK
  - VK_FORMAT_ASTC_6x5_SFLOAT_BLOCK
  - VK_FORMAT_ASTC_6x6_SFLOAT_BLOCK

    - VK_FORMAT_ASTC_8x5_SFLOAT_BLOCK
    - VK_FORMAT_ASTC_8x6_SFLOAT_BLOCK
    - VK_FORMAT_ASTC_8x8_SFLOAT_BLOCK
    - VK_FORMAT_ASTC_10x5_SFLOAT_BLOCK
    - VK_FORMAT_ASTC_10x6_SFLOAT_BLOCK
    - VK_FORMAT_ASTC_10x8_SFLOAT_BLOCK
    - VK_FORMAT_ASTC_10x10_SFLOAT_BLOCK
    - VK_FORMAT_ASTC_12x10_SFLOAT_BLOCK
    - VK_FORMAT_ASTC_12x12_SFLOAT_BLOCK

      To query for additional properties, or if the feature is not enabled, vkGetPhysicalDeviceFormatProperties and vkGetPhysicalDeviceImageFormatProperties **can** be used to check for supported properties of individual formats as normal.

- shaderZeroInitializeWorkgroupMemory specifies whether the implementation supports initializing a variable in Workgroup storage class.
- dynamicRendering specifies that the implementation supports dynamic render pass instances using the vkCmdBeginRendering command.
- shaderIntegerDotProduct specifies whether shader modules **can** declare the DotProductInputAllKHR, DotProductInput4x8BitKHR, DotProductInput4x8BitPackedKHR and DotProductKHR capabilities.
- maintenance4 indicates that the implementation supports the following:
    - The application **may** destroy a VkPipelineLayout object immediately after using it to create another object.
    - LocalSizeId **can** be used as an alternative to LocalSize to specify the local workgroup size with specialization constants.
    - Images created with identical creation parameters will always have the same alignment requirements.
    - The size memory requirement of a buffer or image is never greater than that of another buffer or image created with a greater or equal size.
    - Push constants do not have to be initialized before they are dynamically accessed.
    - The interface matching rules allow a larger output vector to match with a smaller input vector, with additional values being discarded.

If the VkPhysicalDeviceVulkan13Features structure is included in the pNext chain of the VkPhysicalDeviceFeatures2 structure passed to vkGetPhysicalDeviceFeatures2, it is filled in to indicate whether each corresponding feature is supported. VkPhysicalDeviceVulkan13Features **can** also be used in the pNext chain of VkDeviceCreateInfo to selectively enable these features.

Valid Usage (Implicit)

- VUID-VkPhysicalDeviceVulkan13Features-sType-sType
  `sType` **must** be `VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_VULKAN_1_3_FEATURES`

The `VkPhysicalDeviceVariablePointersFeatures` structure is defined as:

```
// Provided by VK_VERSION_1_1
typedef struct VkPhysicalDeviceVariablePointersFeatures {
    VkStructureType    sType;
    void*              pNext;
    VkBool32           variablePointersStorageBuffer;
    VkBool32           variablePointers;
} VkPhysicalDeviceVariablePointersFeatures;
```

```
// Provided by VK_VERSION_1_1
typedef VkPhysicalDeviceVariablePointersFeatures
VkPhysicalDeviceVariablePointerFeatures;
```

This structure describes the following features:

- `sType` is a VkStructureType value identifying this structure.
- `pNext` is `NULL` or a pointer to a structure extending this structure.
- `variablePointersStorageBuffer` specifies whether the implementation supports the SPIR-V `VariablePointersStorageBuffer` capability. When this feature is not enabled, shader modules **must** not declare the `SPV_KHR_variable_pointers` extension or the `VariablePointersStorageBuffer` capability.
- `variablePointers` specifies whether the implementation supports the SPIR-V `VariablePointers` capability. When this feature is not enabled, shader modules **must** not declare the `VariablePointers` capability.

If the `VkPhysicalDeviceVariablePointersFeatures` structure is included in the `pNext` chain of the VkPhysicalDeviceFeatures2 structure passed to vkGetPhysicalDeviceFeatures2, it is filled in to indicate whether each corresponding feature is supported. `VkPhysicalDeviceVariablePointersFeatures` **can** also be used in the `pNext` chain of VkDeviceCreateInfo to selectively enable these features.

Valid Usage

- VUID-VkPhysicalDeviceVariablePointersFeatures-variablePointers-01431
  If `variablePointers` is enabled then `variablePointersStorageBuffer` **must** also be enabled

Valid Usage (Implicit)

- VUID-VkPhysicalDeviceVariablePointersFeatures-sType-sType

sType **must** be VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_VARIABLE_POINTERS_FEATURES

The VkPhysicalDeviceMultiviewFeatures structure is defined as:

```
// Provided by VK_VERSION_1_1
typedef struct VkPhysicalDeviceMultiviewFeatures {
    VkStructureType    sType;
    void*              pNext;
    VkBool32           multiview;
    VkBool32           multiviewGeometryShader;
    VkBool32           multiviewTessellationShader;
} VkPhysicalDeviceMultiviewFeatures;
```

This structure describes the following features:

- sType is a VkStructureType value identifying this structure.
- pNext is NULL or a pointer to a structure extending this structure.
- multiview specifies whether the implementation supports multiview rendering within a render pass. If this feature is not enabled, the view mask of each subpass **must** always be zero.
- multiviewGeometryShader specifies whether the implementation supports multiview rendering within a render pass, with geometry shaders. If this feature is not enabled, then a pipeline compiled against a subpass with a non-zero view mask **must** not include a geometry shader.
- multiviewTessellationShader specifies whether the implementation supports multiview rendering within a render pass, with tessellation shaders. If this feature is not enabled, then a pipeline compiled against a subpass with a non-zero view mask **must** not include any tessellation shaders.

If the VkPhysicalDeviceMultiviewFeatures structure is included in the pNext chain of the VkPhysicalDeviceFeatures2 structure passed to vkGetPhysicalDeviceFeatures2, it is filled in to indicate whether each corresponding feature is supported. VkPhysicalDeviceMultiviewFeatures **can** also be used in the pNext chain of VkDeviceCreateInfo to selectively enable these features.

Valid Usage

- VUID-VkPhysicalDeviceMultiviewFeatures-multiviewGeometryShader-00580
  If multiviewGeometryShader is enabled then multiview **must** also be enabled
- VUID-VkPhysicalDeviceMultiviewFeatures-multiviewTessellationShader-00581
  If multiviewTessellationShader is enabled then multiview **must** also be enabled

Valid Usage (Implicit)

- VUID-VkPhysicalDeviceMultiviewFeatures-sType-sType
  sType **must** be VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_MULTIVIEW_FEATURES

The VkPhysicalDeviceShaderAtomicInt64Features structure is defined as:

```
// Provided by VK_VERSION_1_2
typedef struct VkPhysicalDeviceShaderAtomicInt64Features {
    VkStructureType    sType;
    void*              pNext;
    VkBool32           shaderBufferInt64Atomics;
    VkBool32           shaderSharedInt64Atomics;
} VkPhysicalDeviceShaderAtomicInt64Features;
```

This structure describes the following features:

- sType is a VkStructureType value identifying this structure.
- pNext is NULL or a pointer to a structure extending this structure.
- shaderBufferInt64Atomics indicates whether shaders **can** perform 64-bit unsigned and signed integer atomic operations on buffers.
- shaderSharedInt64Atomics indicates whether shaders **can** perform 64-bit unsigned and signed integer atomic operations on shared memory.

If the VkPhysicalDeviceShaderAtomicInt64Features structure is included in the pNext chain of the VkPhysicalDeviceFeatures2 structure passed to vkGetPhysicalDeviceFeatures2, it is filled in to indicate whether each corresponding feature is supported. VkPhysicalDeviceShaderAtomicInt64Features **can** also be used in the pNext chain of VkDeviceCreateInfo to selectively enable these features.

Valid Usage (Implicit)

- VUID-VkPhysicalDeviceShaderAtomicInt64Features-sType-sType
  sType **must** be VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_SHADER_ATOMIC_INT64_FEATURES

The VkPhysicalDevice8BitStorageFeatures structure is defined as:

```
// Provided by VK_VERSION_1_2
typedef struct VkPhysicalDevice8BitStorageFeatures {
    VkStructureType    sType;
    void*              pNext;
    VkBool32           storageBuffer8BitAccess;
    VkBool32           uniformAndStorageBuffer8BitAccess;
    VkBool32           storagePushConstant8;
} VkPhysicalDevice8BitStorageFeatures;
```

This structure describes the following features:

- sType is a VkStructureType value identifying this structure.
- pNext is NULL or a pointer to a structure extending this structure.

- storageBuffer8BitAccess indicates whether objects in the StorageBuffer, or PhysicalStorageBuffer storage class with the Block decoration **can** have 8-bit integer members. If this feature is not enabled, 8-bit integer members **must** not be used in such objects. This also indicates whether shader modules **can** declare the StorageBuffer8BitAccess capability.
- uniformAndStorageBuffer8BitAccess indicates whether objects in the Uniform storage class with the Block decoration **can** have 8-bit integer members. If this feature is not enabled, 8-bit integer members **must** not be used in such objects. This also indicates whether shader modules **can** declare the UniformAndStorageBuffer8BitAccess capability.
- storagePushConstant8 indicates whether objects in the PushConstant storage class **can** have 8-bit integer members. If this feature is not enabled, 8-bit integer members **must** not be used in such objects. This also indicates whether shader modules **can** declare the StoragePushConstant8 capability.

If the VkPhysicalDevice8BitStorageFeatures structure is included in the pNext chain of the VkPhysicalDeviceFeatures2 structure passed to vkGetPhysicalDeviceFeatures2, it is filled in to indicate whether each corresponding feature is supported. VkPhysicalDevice8BitStorageFeatures **can** also be used in the pNext chain of VkDeviceCreateInfo to selectively enable these features.

Valid Usage (Implicit)

- VUID-VkPhysicalDevice8BitStorageFeatures-sType-sType
  sType **must** be VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_8BIT_STORAGE_FEATURES

The VkPhysicalDevice16BitStorageFeatures structure is defined as:

```
// Provided by VK_VERSION_1_1
typedef struct VkPhysicalDevice16BitStorageFeatures {
    VkStructureType    sType;
    void*              pNext;
    VkBool32           storageBuffer16BitAccess;
    VkBool32           uniformAndStorageBuffer16BitAccess;
    VkBool32           storagePushConstant16;
    VkBool32           storageInputOutput16;
} VkPhysicalDevice16BitStorageFeatures;
```

This structure describes the following features:

- sType is a VkStructureType value identifying this structure.
- pNext is NULL or a pointer to a structure extending this structure.
- storageBuffer16BitAccess specifies whether objects in the StorageBuffer, or PhysicalStorageBuffer storage class with the Block decoration **can** have 16-bit integer and 16-bit floating-point members. If this feature is not enabled, 16-bit integer or 16-bit floating-point members **must** not be used in such objects. This also specifies whether shader modules **can** declare the StorageBuffer16BitAccess capability.
- uniformAndStorageBuffer16BitAccess specifies whether objects in the Uniform storage class with

the Block decoration **can** have 16-bit integer and 16-bit floating-point members. If this feature is not enabled, 16-bit integer or 16-bit floating-point members **must** not be used in such objects. This also specifies whether shader modules **can** declare the UniformAndStorageBuffer16BitAccess capability.

- storagePushConstant16 specifies whether objects in the PushConstant storage class **can** have 16-bit integer and 16-bit floating-point members. If this feature is not enabled, 16-bit integer or floating-point members **must** not be used in such objects. This also specifies whether shader modules **can** declare the StoragePushConstant16 capability.
- storageInputOutput16 specifies whether objects in the Input and Output storage classes **can** have 16-bit integer and 16-bit floating-point members. If this feature is not enabled, 16-bit integer or 16-bit floating-point members **must** not be used in such objects. This also specifies whether shader modules **can** declare the StorageInputOutput16 capability.

If the VkPhysicalDevice16BitStorageFeatures structure is included in the pNext chain of the VkPhysicalDeviceFeatures2 structure passed to vkGetPhysicalDeviceFeatures2, it is filled in to indicate whether each corresponding feature is supported. VkPhysicalDevice16BitStorageFeatures **can** also be used in the pNext chain of VkDeviceCreateInfo to selectively enable these features.

Valid Usage (Implicit)

- VUID-VkPhysicalDevice16BitStorageFeatures-sType-sType
  sType **must** be VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_16BIT_STORAGE_FEATURES

The VkPhysicalDeviceShaderFloat16Int8Features structure is defined as:

```
// Provided by VK_VERSION_1_2
typedef struct VkPhysicalDeviceShaderFloat16Int8Features {
    VkStructureType    sType;
    void*              pNext;
    VkBool32           shaderFloat16;
    VkBool32           shaderInt8;
} VkPhysicalDeviceShaderFloat16Int8Features;
```

This structure describes the following features:

- sType is a VkStructureType value identifying this structure.
- pNext is NULL or a pointer to a structure extending this structure.
- shaderFloat16 indicates whether 16-bit floats (halfs) are supported in shader code. This also indicates whether shader modules **can** declare the Float16 capability. However, this only enables a subset of the storage classes that SPIR-V allows for the Float16 SPIR-V capability: Declaring and using 16-bit floats in the Private, Workgroup, and Function storage classes is enabled, while declaring them in the interface storage classes (e.g., UniformConstant, Uniform, StorageBuffer, Input, Output, and PushConstant) is not enabled.
- shaderInt8 indicates whether 8-bit integers (signed and unsigned) are supported in shader code.

This also indicates whether shader modules **can** declare the `Int8` capability. However, this only enables a subset of the storage classes that SPIR-V allows for the `Int8` SPIR-V capability: Declaring and using 8-bit integers in the `Private`, `Workgroup`, and `Function` storage classes is enabled, while declaring them in the interface storage classes (e.g., `UniformConstant`, `Uniform`, `StorageBuffer`, `Input`, `Output`, and `PushConstant`) is not enabled.

If the `VkPhysicalDeviceShaderFloat16Int8Features` structure is included in the `pNext` chain of the VkPhysicalDeviceFeatures2 structure passed to vkGetPhysicalDeviceFeatures2, it is filled in to indicate whether each corresponding feature is supported. `VkPhysicalDeviceShaderFloat16Int8Features` **can** also be used in the `pNext` chain of VkDeviceCreateInfo to selectively enable these features.

Valid Usage (Implicit)

- VUID-VkPhysicalDeviceShaderFloat16Int8Features-sType-sType
  `sType` **must** be `VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_SHADER_FLOAT16_INT8_FEATURES`

The `VkPhysicalDeviceSamplerYcbcrConversionFeatures` structure is defined as:

```
// Provided by VK_VERSION_1_1
typedef struct VkPhysicalDeviceSamplerYcbcrConversionFeatures {
    VkStructureType    sType;
    void*              pNext;
    VkBool32           samplerYcbcrConversion;
} VkPhysicalDeviceSamplerYcbcrConversionFeatures;
```

This structure describes the following feature:

- `sType` is a VkStructureType value identifying this structure.
- `pNext` is `NULL` or a pointer to a structure extending this structure.
- `samplerYcbcrConversion` specifies whether the implementation supports sampler $Y'C_BC_R$ conversion. If `samplerYcbcrConversion` is `VK_FALSE`, sampler $Y'C_BC_R$ conversion is not supported, and samplers using sampler $Y'C_BC_R$ conversion **must** not be used.

If the `VkPhysicalDeviceSamplerYcbcrConversionFeatures` structure is included in the `pNext` chain of the VkPhysicalDeviceFeatures2 structure passed to vkGetPhysicalDeviceFeatures2, it is filled in to indicate whether each corresponding feature is supported. `VkPhysicalDeviceSamplerYcbcrConversionFeatures` **can** also be used in the `pNext` chain of VkDeviceCreateInfo to selectively enable these features.

Valid Usage (Implicit)

- VUID-VkPhysicalDeviceSamplerYcbcrConversionFeatures-sType-sType
  `sType` **must** be `VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_SAMPLER_YCBCR_CONVERSION_FEATURES`

The VkPhysicalDeviceProtectedMemoryFeatures structure is defined as:

```
// Provided by VK_VERSION_1_1
typedef struct VkPhysicalDeviceProtectedMemoryFeatures {
    VkStructureType    sType;
    void*              pNext;
    VkBool32           protectedMemory;
} VkPhysicalDeviceProtectedMemoryFeatures;
```

This structure describes the following feature:

- sType is a VkStructureType value identifying this structure.
- pNext is NULL or a pointer to a structure extending this structure.
- protectedMemory specifies whether protected memory is supported.

If the VkPhysicalDeviceProtectedMemoryFeatures structure is included in the pNext chain of the VkPhysicalDeviceFeatures2 structure passed to vkGetPhysicalDeviceFeatures2, it is filled in to indicate whether each corresponding feature is supported. VkPhysicalDeviceProtectedMemoryFeatures **can** also be used in the pNext chain of VkDeviceCreateInfo to selectively enable these features.

Valid Usage (Implicit)

- VUID-VkPhysicalDeviceProtectedMemoryFeatures-sType-sType
  sType **must** be VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_PROTECTED_MEMORY_FEATURES

The VkPhysicalDeviceShaderDrawParametersFeatures structure is defined as:

```
// Provided by VK_VERSION_1_1
typedef struct VkPhysicalDeviceShaderDrawParametersFeatures {
    VkStructureType    sType;
    void*              pNext;
    VkBool32           shaderDrawParameters;
} VkPhysicalDeviceShaderDrawParametersFeatures;
```

```
// Provided by VK_VERSION_1_1
typedef VkPhysicalDeviceShaderDrawParametersFeatures
VkPhysicalDeviceShaderDrawParameterFeatures;
```

This structure describes the following feature:

- sType is a VkStructureType value identifying this structure.
- pNext is NULL or a pointer to a structure extending this structure.

- shaderDrawParameters specifies whether the implementation supports the SPIR-V DrawParameters capability. When this feature is not enabled, shader modules **must** not declare the SPV_KHR_shader_draw_parameters extension or the DrawParameters capability.

If the VkPhysicalDeviceShaderDrawParametersFeatures structure is included in the pNext chain of the VkPhysicalDeviceFeatures2 structure passed to vkGetPhysicalDeviceFeatures2, it is filled in to indicate whether each corresponding feature is supported. VkPhysicalDeviceShaderDrawParametersFeatures **can** also be used in the pNext chain of VkDeviceCreateInfo to selectively enable these features.

Valid Usage (Implicit)

- VUID-VkPhysicalDeviceShaderDrawParametersFeatures-sType-sType
  sType **must** be VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_SHADER_DRAW_PARAMETERS_FEATURES

The VkPhysicalDeviceDescriptorIndexingFeatures structure is defined as:

```
// Provided by VK_VERSION_1_2
typedef struct VkPhysicalDeviceDescriptorIndexingFeatures {
    VkStructureType    sType;
    void*              pNext;
    VkBool32           shaderInputAttachmentArrayDynamicIndexing;
    VkBool32           shaderUniformTexelBufferArrayDynamicIndexing;
    VkBool32           shaderStorageTexelBufferArrayDynamicIndexing;
    VkBool32           shaderUniformBufferArrayNonUniformIndexing;
    VkBool32           shaderSampledImageArrayNonUniformIndexing;
    VkBool32           shaderStorageBufferArrayNonUniformIndexing;
    VkBool32           shaderStorageImageArrayNonUniformIndexing;
    VkBool32           shaderInputAttachmentArrayNonUniformIndexing;
    VkBool32           shaderUniformTexelBufferArrayNonUniformIndexing;
    VkBool32           shaderStorageTexelBufferArrayNonUniformIndexing;
    VkBool32           descriptorBindingUniformBufferUpdateAfterBind;
    VkBool32           descriptorBindingSampledImageUpdateAfterBind;
    VkBool32           descriptorBindingStorageImageUpdateAfterBind;
    VkBool32           descriptorBindingStorageBufferUpdateAfterBind;
    VkBool32           descriptorBindingUniformTexelBufferUpdateAfterBind;
    VkBool32           descriptorBindingStorageTexelBufferUpdateAfterBind;
    VkBool32           descriptorBindingUpdateUnusedWhilePending;
    VkBool32           descriptorBindingPartiallyBound;
    VkBool32           descriptorBindingVariableDescriptorCount;
    VkBool32           runtimeDescriptorArray;
} VkPhysicalDeviceDescriptorIndexingFeatures;
```

This structure describes the following features:

- sType is a VkStructureType value identifying this structure.
- pNext is NULL or a pointer to a structure extending this structure.

- shaderInputAttachmentArrayDynamicIndexing indicates whether arrays of input attachments **can** be indexed by integer expressions that are dynamically uniform within either the subgroup or the invocation group in shader code. If this feature is not enabled, resources with a descriptor type of VK_DESCRIPTOR_TYPE_INPUT_ATTACHMENT **must** be indexed only by constant integral expressions when aggregated into arrays in shader code. This also indicates whether shader modules **can** declare the InputAttachmentArrayDynamicIndexing capability.
- shaderUniformTexelBufferArrayDynamicIndexing indicates whether arrays of uniform texel buffers **can** be indexed by integer expressions that are dynamically uniform within either the subgroup or the invocation group in shader code. If this feature is not enabled, resources with a descriptor type of VK_DESCRIPTOR_TYPE_UNIFORM_TEXEL_BUFFER **must** be indexed only by constant integral expressions when aggregated into arrays in shader code. This also indicates whether shader modules **can** declare the UniformTexelBufferArrayDynamicIndexing capability.
- shaderStorageTexelBufferArrayDynamicIndexing indicates whether arrays of storage texel buffers **can** be indexed by integer expressions that are dynamically uniform within either the subgroup or the invocation group in shader code. If this feature is not enabled, resources with a descriptor type of VK_DESCRIPTOR_TYPE_STORAGE_TEXEL_BUFFER **must** be indexed only by constant integral expressions when aggregated into arrays in shader code. This also indicates whether shader modules **can** declare the StorageTexelBufferArrayDynamicIndexing capability.
- shaderUniformBufferArrayNonUniformIndexing indicates whether arrays of uniform buffers **can** be indexed by non-uniform integer expressions in shader code. If this feature is not enabled, resources with a descriptor type of VK_DESCRIPTOR_TYPE_UNIFORM_BUFFER or VK_DESCRIPTOR_TYPE_UNIFORM_BUFFER_DYNAMIC **must** not be indexed by non-uniform integer expressions when aggregated into arrays in shader code. This also indicates whether shader modules **can** declare the UniformBufferArrayNonUniformIndexing capability.
- shaderSampledImageArrayNonUniformIndexing indicates whether arrays of samplers or sampled images **can** be indexed by non-uniform integer expressions in shader code. If this feature is not enabled, resources with a descriptor type of VK_DESCRIPTOR_TYPE_SAMPLER, VK_DESCRIPTOR_TYPE_COMBINED_IMAGE_SAMPLER, or VK_DESCRIPTOR_TYPE_SAMPLED_IMAGE **must** not be indexed by non-uniform integer expressions when aggregated into arrays in shader code. This also indicates whether shader modules **can** declare the SampledImageArrayNonUniformIndexing capability.
- shaderStorageBufferArrayNonUniformIndexing indicates whether arrays of storage buffers **can** be indexed by non-uniform integer expressions in shader code. If this feature is not enabled, resources with a descriptor type of VK_DESCRIPTOR_TYPE_STORAGE_BUFFER or VK_DESCRIPTOR_TYPE_STORAGE_BUFFER_DYNAMIC **must** not be indexed by non-uniform integer expressions when aggregated into arrays in shader code. This also indicates whether shader modules **can** declare the StorageBufferArrayNonUniformIndexing capability.
- shaderStorageImageArrayNonUniformIndexing indicates whether arrays of storage images **can** be indexed by non-uniform integer expressions in shader code. If this feature is not enabled, resources with a descriptor type of VK_DESCRIPTOR_TYPE_STORAGE_IMAGE **must** not be indexed by non-uniform integer expressions when aggregated into arrays in shader code. This also indicates whether shader modules **can** declare the StorageImageArrayNonUniformIndexing capability.
- shaderInputAttachmentArrayNonUniformIndexing indicates whether arrays of input attachments **can** be indexed by non-uniform integer expressions in shader code. If this feature is not

enabled, resources with a descriptor type of VK_DESCRIPTOR_TYPE_INPUT_ATTACHMENT **must** not be indexed by non-uniform integer expressions when aggregated into arrays in shader code. This also indicates whether shader modules **can** declare the InputAttachmentArrayNonUniformIndexing capability.

- shaderUniformTexelBufferArrayNonUniformIndexing indicates whether arrays of uniform texel buffers **can** be indexed by non-uniform integer expressions in shader code. If this feature is not enabled, resources with a descriptor type of VK_DESCRIPTOR_TYPE_UNIFORM_TEXEL_BUFFER **must** not be indexed by non-uniform integer expressions when aggregated into arrays in shader code. This also indicates whether shader modules **can** declare the UniformTexelBufferArrayNonUniformIndexing capability.
- shaderStorageTexelBufferArrayNonUniformIndexing indicates whether arrays of storage texel buffers **can** be indexed by non-uniform integer expressions in shader code. If this feature is not enabled, resources with a descriptor type of VK_DESCRIPTOR_TYPE_STORAGE_TEXEL_BUFFER **must** not be indexed by non-uniform integer expressions when aggregated into arrays in shader code. This also indicates whether shader modules **can** declare the StorageTexelBufferArrayNonUniformIndexing capability.
- descriptorBindingUniformBufferUpdateAfterBind indicates whether the implementation supports updating uniform buffer descriptors after a set is bound. If this feature is not enabled, VK_DESCRIPTOR_BINDING_UPDATE_AFTER_BIND_BIT **must** not be used with VK_DESCRIPTOR_TYPE_UNIFORM_BUFFER.
- descriptorBindingSampledImageUpdateAfterBind indicates whether the implementation supports updating sampled image descriptors after a set is bound. If this feature is not enabled, VK_DESCRIPTOR_BINDING_UPDATE_AFTER_BIND_BIT **must** not be used with VK_DESCRIPTOR_TYPE_SAMPLER, VK_DESCRIPTOR_TYPE_COMBINED_IMAGE_SAMPLER, or VK_DESCRIPTOR_TYPE_SAMPLED_IMAGE.
- descriptorBindingStorageImageUpdateAfterBind indicates whether the implementation supports updating storage image descriptors after a set is bound. If this feature is not enabled, VK_DESCRIPTOR_BINDING_UPDATE_AFTER_BIND_BIT **must** not be used with VK_DESCRIPTOR_TYPE_STORAGE_IMAGE.
- descriptorBindingStorageBufferUpdateAfterBind indicates whether the implementation supports updating storage buffer descriptors after a set is bound. If this feature is not enabled, VK_DESCRIPTOR_BINDING_UPDATE_AFTER_BIND_BIT **must** not be used with VK_DESCRIPTOR_TYPE_STORAGE_BUFFER.
- descriptorBindingUniformTexelBufferUpdateAfterBind indicates whether the implementation supports updating uniform texel buffer descriptors after a set is bound. If this feature is not enabled, VK_DESCRIPTOR_BINDING_UPDATE_AFTER_BIND_BIT **must** not be used with VK_DESCRIPTOR_TYPE_UNIFORM_TEXEL_BUFFER.
- descriptorBindingStorageTexelBufferUpdateAfterBind indicates whether the implementation supports updating storage texel buffer descriptors after a set is bound. If this feature is not enabled, VK_DESCRIPTOR_BINDING_UPDATE_AFTER_BIND_BIT **must** not be used with VK_DESCRIPTOR_TYPE_STORAGE_TEXEL_BUFFER.
- descriptorBindingUpdateUnusedWhilePending indicates whether the implementation supports updating descriptors while the set is in use. If this feature is not enabled, VK_DESCRIPTOR_BINDING_UPDATE_UNUSED_WHILE_PENDING_BIT **must** not be used.

- descriptorBindingPartiallyBound indicates whether the implementation supports statically using a descriptor set binding in which some descriptors are not valid. If this feature is not enabled, VK_DESCRIPTOR_BINDING_PARTIALLY_BOUND_BIT **must** not be used.
- descriptorBindingVariableDescriptorCount indicates whether the implementation supports descriptor sets with a variable-sized last binding. If this feature is not enabled, VK_DESCRIPTOR_BINDING_VARIABLE_DESCRIPTOR_COUNT_BIT **must** not be used.
- runtimeDescriptorArray indicates whether the implementation supports the SPIR-V RuntimeDescriptorArray capability. If this feature is not enabled, descriptors **must** not be declared in runtime arrays.

If the VkPhysicalDeviceDescriptorIndexingFeatures structure is included in the pNext chain of the VkPhysicalDeviceFeatures2 structure passed to vkGetPhysicalDeviceFeatures2, it is filled in to indicate whether each corresponding feature is supported. VkPhysicalDeviceDescriptorIndexingFeatures **can** also be used in the pNext chain of VkDeviceCreateInfo to selectively enable these features.

Valid Usage (Implicit)

- VUID-VkPhysicalDeviceDescriptorIndexingFeatures-sType-sType
  sType **must** be VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_DESCRIPTOR_INDEXING_FEATURES

The VkPhysicalDeviceVulkanMemoryModelFeatures structure is defined as:

```
// Provided by VK_VERSION_1_2
typedef struct VkPhysicalDeviceVulkanMemoryModelFeatures {
    VkStructureType    sType;
    void*              pNext;
    VkBool32           vulkanMemoryModel;
    VkBool32           vulkanMemoryModelDeviceScope;
    VkBool32           vulkanMemoryModelAvailabilityVisibilityChains;
} VkPhysicalDeviceVulkanMemoryModelFeatures;
```

This structure describes the following features:

- sType is a VkStructureType value identifying this structure.
- pNext is NULL or a pointer to a structure extending this structure.
- vulkanMemoryModel indicates whether shader modules **can** declare the VulkanMemoryModel capability.
- vulkanMemoryModelDeviceScope indicates whether the Vulkan Memory Model can use Device scope synchronization. This also indicates whether shader modules **can** declare the VulkanMemoryModelDeviceScope capability.
- vulkanMemoryModelAvailabilityVisibilityChains indicates whether the Vulkan Memory Model can use availability and visibility chains with more than one element.

If the VkPhysicalDeviceVulkanMemoryModelFeaturesKHR structure is included in the pNext chain of the VkPhysicalDeviceFeatures2 structure passed to vkGetPhysicalDeviceFeatures2, it is filled in to indicate whether each corresponding feature is supported. VkPhysicalDeviceVulkanMemoryModelFeaturesKHR **can** also be used in the pNext chain of VkDeviceCreateInfo to selectively enable these features.

Valid Usage (Implicit)

- VUID-VkPhysicalDeviceVulkanMemoryModelFeatures-sType-sType
  sType **must** be VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_VULKAN_MEMORY_MODEL_FEATURES

The VkPhysicalDeviceInlineUniformBlockFeatures structure is defined as:

```
// Provided by VK_VERSION_1_3
typedef struct VkPhysicalDeviceInlineUniformBlockFeatures {
    VkStructureType    sType;
    void*              pNext;
    VkBool32           inlineUniformBlock;
    VkBool32           descriptorBindingInlineUniformBlockUpdateAfterBind;
} VkPhysicalDeviceInlineUniformBlockFeatures;
```

This structure describes the following features:

- sType is a VkStructureType value identifying this structure.
- pNext is NULL or a pointer to a structure extending this structure.
- inlineUniformBlock indicates whether the implementation supports inline uniform block descriptors. If this feature is not enabled, VK_DESCRIPTOR_TYPE_INLINE_UNIFORM_BLOCK **must** not be used.
- descriptorBindingInlineUniformBlockUpdateAfterBind indicates whether the implementation supports updating inline uniform block descriptors after a set is bound. If this feature is not enabled, VK_DESCRIPTOR_BINDING_UPDATE_AFTER_BIND_BIT **must** not be used with VK_DESCRIPTOR_TYPE_INLINE_UNIFORM_BLOCK.

If the VkPhysicalDeviceInlineUniformBlockFeatures structure is included in the pNext chain of the VkPhysicalDeviceFeatures2 structure passed to vkGetPhysicalDeviceFeatures2, it is filled in to indicate whether each corresponding feature is supported. VkPhysicalDeviceInlineUniformBlockFeatures **can** also be used in the pNext chain of VkDeviceCreateInfo to selectively enable these features.

Valid Usage (Implicit)

- VUID-VkPhysicalDeviceInlineUniformBlockFeatures-sType-sType
  sType **must** be VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_INLINE_UNIFORM_BLOCK_FEATURES

The VkPhysicalDeviceScalarBlockLayoutFeatures structure is defined as:

```
// Provided by VK_VERSION_1_2
typedef struct VkPhysicalDeviceScalarBlockLayoutFeatures {
    VkStructureType    sType;
    void*              pNext;
    VkBool32           scalarBlockLayout;
} VkPhysicalDeviceScalarBlockLayoutFeatures;
```

This structure describes the following feature:

- sType is a VkStructureType value identifying this structure.
- pNext is NULL or a pointer to a structure extending this structure.
- scalarBlockLayout indicates that the implementation supports the layout of resource blocks in shaders using scalar alignment.

If the VkPhysicalDeviceScalarBlockLayoutFeatures structure is included in the pNext chain of the VkPhysicalDeviceFeatures2 structure passed to vkGetPhysicalDeviceFeatures2, it is filled in to indicate whether each corresponding feature is supported. VkPhysicalDeviceScalarBlockLayoutFeatures **can** also be used in the pNext chain of VkDeviceCreateInfo to selectively enable these features.

Valid Usage (Implicit)

- VUID-VkPhysicalDeviceScalarBlockLayoutFeatures-sType-sType
  sType **must** be VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_SCALAR_BLOCK_LAYOUT_FEATURES

The VkPhysicalDeviceUniformBufferStandardLayoutFeatures structure is defined as:

```
// Provided by VK_VERSION_1_2
typedef struct VkPhysicalDeviceUniformBufferStandardLayoutFeatures {
    VkStructureType    sType;
    void*              pNext;
    VkBool32           uniformBufferStandardLayout;
} VkPhysicalDeviceUniformBufferStandardLayoutFeatures;
```

This structure describes the following feature:

- sType is a VkStructureType value identifying this structure.
- pNext is NULL or a pointer to a structure extending this structure.
- uniformBufferStandardLayout indicates that the implementation supports the same layouts for uniform buffers as for storage and other kinds of buffers. See Standard Buffer Layout.

If the VkPhysicalDeviceUniformBufferStandardLayoutFeatures structure is included in the pNext chain

of the VkPhysicalDeviceFeatures2 structure passed to vkGetPhysicalDeviceFeatures2, it is filled in to indicate whether each corresponding feature is supported. VkPhysicalDeviceUniformBufferStandardLayoutFeatures **can** also be used in the pNext chain of VkDeviceCreateInfo to selectively enable these features.

Valid Usage (Implicit)

- VUID-VkPhysicalDeviceUniformBufferStandardLayoutFeatures-sType-sType sType **must** be VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_UNIFORM_BUFFER_STANDARD_LAYOUT_FEATURES

The VkPhysicalDeviceBufferDeviceAddressFeatures structure is defined as:

```
// Provided by VK_VERSION_1_2
typedef struct VkPhysicalDeviceBufferDeviceAddressFeatures {
    VkStructureType    sType;
    void*              pNext;
    VkBool32           bufferDeviceAddress;
    VkBool32           bufferDeviceAddressCaptureReplay;
    VkBool32           bufferDeviceAddressMultiDevice;
} VkPhysicalDeviceBufferDeviceAddressFeatures;
```

This structure describes the following features:

- sType is a VkStructureType value identifying this structure.
- pNext is NULL or a pointer to a structure extending this structure.
- bufferDeviceAddress indicates that the implementation supports accessing buffer memory in shaders as storage buffers via an address queried from vkGetBufferDeviceAddress.
- bufferDeviceAddressCaptureReplay indicates that the implementation supports saving and reusing buffer and device addresses, e.g. for trace capture and replay.
- bufferDeviceAddressMultiDevice indicates that the implementation supports the bufferDeviceAddress feature for logical devices created with multiple physical devices. If this feature is not supported, buffer addresses **must** not be queried on a logical device created with more than one physical device.

> **NOTE** bufferDeviceAddressMultiDevice exists to allow certain legacy platforms to be able to support bufferDeviceAddress without needing to support shared GPU virtual addresses for multi-device configurations.

See vkGetBufferDeviceAddress for more information.

If the VkPhysicalDeviceBufferDeviceAddressFeatures structure is included in the pNext chain of the VkPhysicalDeviceFeatures2 structure passed to vkGetPhysicalDeviceFeatures2, it is filled in to indicate whether each corresponding feature is supported. VkPhysicalDeviceBufferDeviceAddressFeatures **can** also be used in the pNext chain of

VkDeviceCreateInfo to selectively enable these features.

Valid Usage (Implicit)

- VUID-VkPhysicalDeviceBufferDeviceAddressFeatures-sType-sType
  sType **must** be VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_BUFFER_DEVICE_ADDRESS_FEATURES

The VkPhysicalDeviceImagelessFramebufferFeatures structure is defined as:

```
// Provided by VK_VERSION_1_2
typedef struct VkPhysicalDeviceImagelessFramebufferFeatures {
    VkStructureType    sType;
    void*              pNext;
    VkBool32           imagelessFramebuffer;
} VkPhysicalDeviceImagelessFramebufferFeatures;
```

This structure describes the following feature:

- sType is a VkStructureType value identifying this structure.
- pNext is NULL or a pointer to a structure extending this structure.
- imagelessFramebuffer indicates that the implementation supports specifying the image view for attachments at render pass begin time via VkRenderPassAttachmentBeginInfo.

If the VkPhysicalDeviceImagelessFramebufferFeatures structure is included in the pNext chain of the VkPhysicalDeviceFeatures2 structure passed to vkGetPhysicalDeviceFeatures2, it is filled in to indicate whether each corresponding feature is supported. VkPhysicalDeviceImagelessFramebufferFeatures **can** also be used in the pNext chain of VkDeviceCreateInfo to selectively enable these features.

Valid Usage (Implicit)

- VUID-VkPhysicalDeviceImagelessFramebufferFeatures-sType-sType
  sType **must** be VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_IMAGELESS_FRAMEBUFFER_FEATURES

The VkPhysicalDeviceShaderSubgroupExtendedTypesFeatures structure is defined as:

```
// Provided by VK_VERSION_1_2
typedef struct VkPhysicalDeviceShaderSubgroupExtendedTypesFeatures {
    VkStructureType    sType;
    void*              pNext;
    VkBool32           shaderSubgroupExtendedTypes;
} VkPhysicalDeviceShaderSubgroupExtendedTypesFeatures;
```

This structure describes the following feature:

- sType is a VkStructureType value identifying this structure.
- pNext is NULL or a pointer to a structure extending this structure.
- shaderSubgroupExtendedTypes is a boolean specifying whether subgroup operations can use 8-bit integer, 16-bit integer, 64-bit integer, 16-bit floating-point, and vectors of these types in group operations with subgroup scope, if the implementation supports the types.

If the VkPhysicalDeviceShaderSubgroupExtendedTypesFeatures structure is included in the pNext chain of the VkPhysicalDeviceFeatures2 structure passed to vkGetPhysicalDeviceFeatures2, it is filled in to indicate whether each corresponding feature is supported. VkPhysicalDeviceShaderSubgroupExtendedTypesFeatures **can** also be used in the pNext chain of VkDeviceCreateInfo to selectively enable these features.

Valid Usage (Implicit)

- VUID-VkPhysicalDeviceShaderSubgroupExtendedTypesFeatures-sType-sType sType **must** be VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_SHADER_SUBGROUP_EXTENDED_TYPES_FEATURES

The VkPhysicalDeviceHostQueryResetFeatures structure is defined as:

```
// Provided by VK_VERSION_1_2
typedef struct VkPhysicalDeviceHostQueryResetFeatures {
    VkStructureType    sType;
    void*              pNext;
    VkBool32           hostQueryReset;
} VkPhysicalDeviceHostQueryResetFeatures;
```

This structure describes the following feature:

- sType is a VkStructureType value identifying this structure.
- pNext is NULL or a pointer to a structure extending this structure.
- hostQueryReset indicates that the implementation supports resetting queries from the host with vkResetQueryPool.

If the VkPhysicalDeviceHostQueryResetFeatures structure is included in the pNext chain of the VkPhysicalDeviceFeatures2 structure passed to vkGetPhysicalDeviceFeatures2, it is filled in to indicate whether each corresponding feature is supported. VkPhysicalDeviceHostQueryResetFeatures **can** also be used in the pNext chain of VkDeviceCreateInfo to selectively enable these features.

Valid Usage (Implicit)

- VUID-VkPhysicalDeviceHostQueryResetFeatures-sType-sType sType **must** be VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_HOST_QUERY_RESET_FEATURES

The VkPhysicalDeviceTimelineSemaphoreFeatures structure is defined as:

```
// Provided by VK_VERSION_1_2
typedef struct VkPhysicalDeviceTimelineSemaphoreFeatures {
    VkStructureType    sType;
    void*              pNext;
    VkBool32           timelineSemaphore;
} VkPhysicalDeviceTimelineSemaphoreFeatures;
```

This structure describes the following feature:

- sType is a VkStructureType value identifying this structure.
- pNext is NULL or a pointer to a structure extending this structure.
- timelineSemaphore indicates whether semaphores created with a VkSemaphoreType of VK_SEMAPHORE_TYPE_TIMELINE are supported.

If the VkPhysicalDeviceTimelineSemaphoreFeatures structure is included in the pNext chain of the VkPhysicalDeviceFeatures2 structure passed to vkGetPhysicalDeviceFeatures2, it is filled in to indicate whether each corresponding feature is supported. VkPhysicalDeviceTimelineSemaphoreFeatures **can** also be used in the pNext chain of VkDeviceCreateInfo to selectively enable these features.

Valid Usage (Implicit)

- VUID-VkPhysicalDeviceTimelineSemaphoreFeatures-sType-sType
  sType **must** be VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_TIMELINE_SEMAPHORE_FEATURES

The VkPhysicalDeviceSeparateDepthStencilLayoutsFeatures structure is defined as:

```
// Provided by VK_VERSION_1_2
typedef struct VkPhysicalDeviceSeparateDepthStencilLayoutsFeatures {
    VkStructureType    sType;
    void*              pNext;
    VkBool32           separateDepthStencilLayouts;
} VkPhysicalDeviceSeparateDepthStencilLayoutsFeatures;
```

This structure describes the following feature:

- sType is a VkStructureType value identifying this structure.
- pNext is NULL or a pointer to a structure extending this structure.
- separateDepthStencilLayouts indicates whether the implementation supports a VkImageMemoryBarrier for a depth/stencil image with only one of VK_IMAGE_ASPECT_DEPTH_BIT or VK_IMAGE_ASPECT_STENCIL_BIT set, and whether VK_IMAGE_LAYOUT_DEPTH_ATTACHMENT_OPTIMAL, VK_IMAGE_LAYOUT_DEPTH_READ_ONLY_OPTIMAL, VK_IMAGE_LAYOUT_STENCIL_ATTACHMENT_OPTIMAL, or

VK_IMAGE_LAYOUT_STENCIL_READ_ONLY_OPTIMAL can be used.

If the VkPhysicalDeviceSeparateDepthStencilLayoutsFeatures structure is included in the pNext chain of the VkPhysicalDeviceFeatures2 structure passed to vkGetPhysicalDeviceFeatures2, it is filled in to indicate whether each corresponding feature is supported. VkPhysicalDeviceSeparateDepthStencilLayoutsFeatures **can** also be used in the pNext chain of VkDeviceCreateInfo to selectively enable these features.

Valid Usage (Implicit)

- VUID-VkPhysicalDeviceSeparateDepthStencilLayoutsFeatures-sType-sType sType **must** be VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_SEPARATE_DEPTH_STENCIL_LAYOUTS_FEATURES

The VkPhysicalDeviceShaderDemoteToHelperInvocationFeatures structure is defined as:

```
// Provided by VK_VERSION_1_3
typedef struct VkPhysicalDeviceShaderDemoteToHelperInvocationFeatures {
    VkStructureType    sType;
    void*              pNext;
    VkBool32           shaderDemoteToHelperInvocation;
} VkPhysicalDeviceShaderDemoteToHelperInvocationFeatures;
```

This structure describes the following feature:

- sType is a VkStructureType value identifying this structure.
- pNext is NULL or a pointer to a structure extending this structure.
- shaderDemoteToHelperInvocation indicates whether the implementation supports the SPIR-V DemoteToHelperInvocationEXT capability.

If the VkPhysicalDeviceShaderDemoteToHelperInvocationFeatures structure is included in the pNext chain of the VkPhysicalDeviceFeatures2 structure passed to vkGetPhysicalDeviceFeatures2, it is filled in to indicate whether each corresponding feature is supported. VkPhysicalDeviceShaderDemoteToHelperInvocationFeatures **can** also be used in the pNext chain of VkDeviceCreateInfo to selectively enable these features.

Valid Usage (Implicit)

- VUID-VkPhysicalDeviceShaderDemoteToHelperInvocationFeatures-sType-sType sType **must** be VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_SHADER_DEMOTE_TO_HELPER_INVOCATION_FEATURES

The VkPhysicalDeviceTextureCompressionASTCHDRFeatures structure is defined as:

```
// Provided by VK_VERSION_1_3
typedef struct VkPhysicalDeviceTextureCompressionASTCHDRFeatures {
    VkStructureType    sType;
    void*              pNext;
    VkBool32           textureCompressionASTC_HDR;
} VkPhysicalDeviceTextureCompressionASTCHDRFeatures;
```

This structure describes the following feature:

- `sType` is a VkStructureType value identifying this structure.
- `pNext` is `NULL` or a pointer to a structure extending this structure.
- `textureCompressionASTC_HDR` indicates whether all of the ASTC HDR compressed texture formats are supported. If this feature is enabled, then the `VK_FORMAT_FEATURE_SAMPLED_IMAGE_BIT`, `VK_FORMAT_FEATURE_BLIT_SRC_BIT` and `VK_FORMAT_FEATURE_SAMPLED_IMAGE_FILTER_LINEAR_BIT` features **must** be supported in `optimalTilingFeatures` for the following formats:
  - `VK_FORMAT_ASTC_4x4_SFLOAT_BLOCK`
  - `VK_FORMAT_ASTC_5x4_SFLOAT_BLOCK`
  - `VK_FORMAT_ASTC_5x5_SFLOAT_BLOCK`
  - `VK_FORMAT_ASTC_6x5_SFLOAT_BLOCK`
  - `VK_FORMAT_ASTC_6x6_SFLOAT_BLOCK`
  - `VK_FORMAT_ASTC_8x5_SFLOAT_BLOCK`
  - `VK_FORMAT_ASTC_8x6_SFLOAT_BLOCK`
  - `VK_FORMAT_ASTC_8x8_SFLOAT_BLOCK`
  - `VK_FORMAT_ASTC_10x5_SFLOAT_BLOCK`
  - `VK_FORMAT_ASTC_10x6_SFLOAT_BLOCK`
  - `VK_FORMAT_ASTC_10x8_SFLOAT_BLOCK`
  - `VK_FORMAT_ASTC_10x10_SFLOAT_BLOCK`
  - `VK_FORMAT_ASTC_12x10_SFLOAT_BLOCK`
  - `VK_FORMAT_ASTC_12x12_SFLOAT_BLOCK`

  To query for additional properties, or if the feature is not enabled, vkGetPhysicalDeviceFormatProperties and vkGetPhysicalDeviceImageFormatProperties **can** be used to check for supported properties of individual formats as normal.

If the `VkPhysicalDeviceTextureCompressionASTCHDRFeatures` structure is included in the `pNext` chain of the VkPhysicalDeviceFeatures2 structure passed to vkGetPhysicalDeviceFeatures2, it is filled in to indicate whether each corresponding feature is supported. `VkPhysicalDeviceTextureCompressionASTCHDRFeatures` **can** also be used in the `pNext` chain of VkDeviceCreateInfo to selectively enable these features.

Valid Usage (Implicit)

- VUID-VkPhysicalDeviceTextureCompressionASTCHDRFeatures-sType-sType
  `sType` **must** be `VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_TEXTURE_COMPRESSION_ASTC_HDR_FEATURES`

The `VkPhysicalDeviceSubgroupSizeControlFeatures` structure is defined as:

```
// Provided by VK_VERSION_1_3
typedef struct VkPhysicalDeviceSubgroupSizeControlFeatures {
    VkStructureType    sType;
    void*              pNext;
    VkBool32           subgroupSizeControl;
    VkBool32           computeFullSubgroups;
} VkPhysicalDeviceSubgroupSizeControlFeatures;
```

This structure describes the following features:

- `sType` is a VkStructureType value identifying this structure.
- `pNext` is `NULL` or a pointer to a structure extending this structure.
- `subgroupSizeControl` indicates whether the implementation supports controlling shader subgroup sizes via the `VK_PIPELINE_SHADER_STAGE_CREATE_ALLOW_VARYING_SUBGROUP_SIZE_BIT` flag and the VkPipelineShaderStageRequiredSubgroupSizeCreateInfo structure.
- `computeFullSubgroups` indicates whether the implementation supports requiring full subgroups in compute shaders via the `VK_PIPELINE_SHADER_STAGE_CREATE_REQUIRE_FULL_SUBGROUPS_BIT` flag.

If the `VkPhysicalDeviceSubgroupSizeControlFeatures` structure is included in the `pNext` chain of the VkPhysicalDeviceFeatures2 structure passed to vkGetPhysicalDeviceFeatures2, it is filled in to indicate whether each corresponding feature is supported. `VkPhysicalDeviceSubgroupSizeControlFeatures` **can** also be used in the `pNext` chain of VkDeviceCreateInfo to selectively enable these features.

NOTE

The `VkPhysicalDeviceSubgroupSizeControlFeaturesEXT` structure was added in version 2 of the `VK_EXT_subgroup_size_control` extension. Version 1 implementations of this extension will not fill out the features structure but applications may assume that both `subgroupSizeControl` and `computeFullSubgroups` are supported if the extension is supported. (See also the Feature Requirements section.) Applications are advised to add a `VkPhysicalDeviceSubgroupSizeControlFeaturesEXT` structure to the `pNext` chain of VkDeviceCreateInfo to enable the features regardless of the version of the extension supported by the implementation. If the implementation only supports version 1, it will safely ignore the `VkPhysicalDeviceSubgroupSizeControlFeaturesEXT` structure.

Vulkan 1.3 implementations always support the features structure.

Valid Usage (Implicit)

- VUID-VkPhysicalDeviceSubgroupSizeControlFeatures-sType-sType
  `sType` **must** be `VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_SUBGROUP_SIZE_CONTROL_FEATURES`

The `VkPhysicalDevicePipelineCreationCacheControlFeatures` structure is defined as:

```
// Provided by VK_VERSION_1_3
typedef struct VkPhysicalDevicePipelineCreationCacheControlFeatures {
    VkStructureType    sType;
    void*              pNext;
    VkBool32           pipelineCreationCacheControl;
} VkPhysicalDevicePipelineCreationCacheControlFeatures;
```

This structure describes the following feature:

- `sType` is a VkStructureType value identifying this structure.
- `pNext` is `NULL` or a pointer to a structure extending this structure.
- `pipelineCreationCacheControl` indicates that the implementation supports:
  - The following **can** be used in `Vk*PipelineCreateInfo`::`flags`:
    - `VK_PIPELINE_CREATE_FAIL_ON_PIPELINE_COMPILE_REQUIRED_BIT`
    - `VK_PIPELINE_CREATE_EARLY_RETURN_ON_FAILURE_BIT`
  - The following **can** be used in VkPipelineCacheCreateInfo::`flags`:
    - `VK_PIPELINE_CACHE_CREATE_EXTERNALLY_SYNCHRONIZED_BIT`

If the `VkPhysicalDevicePipelineCreationCacheControlFeatures` structure is included in the `pNext` chain of the VkPhysicalDeviceFeatures2 structure passed to vkGetPhysicalDeviceFeatures2, it is filled in to indicate whether each corresponding feature is supported. `VkPhysicalDevicePipelineCreationCacheControlFeatures` **can** also be used in the `pNext` chain of VkDeviceCreateInfo to selectively enable these features.

Valid Usage (Implicit)

- VUID-VkPhysicalDevicePipelineCreationCacheControlFeatures-sType-sType
  `sType` **must** be `VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_PIPELINE_CREATION_CACHE_CONTROL_FEATURES`

The `VkPhysicalDeviceZeroInitializeWorkgroupMemoryFeatures` structure is defined as:

```
// Provided by VK_VERSION_1_3
typedef struct VkPhysicalDeviceZeroInitializeWorkgroupMemoryFeatures {
    VkStructureType    sType;
    void*              pNext;
    VkBool32           shaderZeroInitializeWorkgroupMemory;
} VkPhysicalDeviceZeroInitializeWorkgroupMemoryFeatures;
```

This structure describes the following feature:

- `sType` is a VkStructureType value identifying this structure.
- `pNext` is `NULL` or a pointer to a structure extending this structure.
- `shaderZeroInitializeWorkgroupMemory` specifies whether the implementation supports initializing a variable in Workgroup storage class.

If the `VkPhysicalDeviceZeroInitializeWorkgroupMemoryFeatures` structure is included in the `pNext` chain of the VkPhysicalDeviceFeatures2 structure passed to vkGetPhysicalDeviceFeatures2, it is filled in to indicate whether each corresponding feature is supported. `VkPhysicalDeviceZeroInitializeWorkgroupMemoryFeatures` **can** also be used in the `pNext` chain of VkDeviceCreateInfo to selectively enable these features.

Valid Usage (Implicit)

- VUID-VkPhysicalDeviceZeroInitializeWorkgroupMemoryFeatures-sType-sType `sType` **must** be `VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_ZERO_INITIALIZE_WORKGROUP_MEMORY_FEATURES`

The `VkPhysicalDevicePrivateDataFeatures` structure is defined as:

```
// Provided by VK_VERSION_1_3
typedef struct VkPhysicalDevicePrivateDataFeatures {
    VkStructureType    sType;
    void*              pNext;
    VkBool32           privateData;
} VkPhysicalDevicePrivateDataFeatures;
```

This structure describes the following feature:

- `sType` is a VkStructureType value identifying this structure.
- `pNext` is `NULL` or a pointer to a structure extending this structure.
- `privateData` indicates whether the implementation supports private data. See Private Data.

If the `VkPhysicalDevicePrivateDataFeatures` structure is included in the `pNext` chain of the VkPhysicalDeviceFeatures2 structure passed to vkGetPhysicalDeviceFeatures2, it is filled in to indicate whether each corresponding feature is supported. `VkPhysicalDevicePrivateDataFeatures`

can also be used in the pNext chain of VkDeviceCreateInfo to selectively enable these features.

Valid Usage (Implicit)

- VUID-VkPhysicalDevicePrivateDataFeatures-sType-sType
  sType **must** be VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_PRIVATE_DATA_FEATURES

nullDescriptor support requires the VK_EXT_robustness2 extension.

The VkPhysicalDeviceImageRobustnessFeatures structure is defined as:

```
// Provided by VK_VERSION_1_3
typedef struct VkPhysicalDeviceImageRobustnessFeatures {
    VkStructureType    sType;
    void*              pNext;
    VkBool32           robustImageAccess;
} VkPhysicalDeviceImageRobustnessFeatures;
```

This structure describes the following feature:

- sType is a VkStructureType value identifying this structure.
- pNext is NULL or a pointer to a structure extending this structure.
- robustImageAccess indicates whether image accesses are tightly bounds-checked against the dimensions of the image view. Invalid texels resulting from out of bounds image loads will be replaced as described in Texel Replacement, with either (0,0,1) or (0,0,0) values inserted for missing G, B, or A components based on the format.

If the VkPhysicalDeviceImageRobustnessFeatures structure is included in the pNext chain of the VkPhysicalDeviceFeatures2 structure passed to vkGetPhysicalDeviceFeatures2, it is filled in to indicate whether each corresponding feature is supported. VkPhysicalDeviceImageRobustnessFeatures **can** also be used in the pNext chain of VkDeviceCreateInfo to selectively enable these features.

Valid Usage (Implicit)

- VUID-VkPhysicalDeviceImageRobustnessFeatures-sType-sType
  sType **must** be VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_IMAGE_ROBUSTNESS_FEATURES

The VkPhysicalDeviceShaderTerminateInvocationFeatures structure is defined as:

```
// Provided by VK_VERSION_1_3
typedef struct VkPhysicalDeviceShaderTerminateInvocationFeatures {
    VkStructureType    sType;
    void*              pNext;
    VkBool32           shaderTerminateInvocation;
} VkPhysicalDeviceShaderTerminateInvocationFeatures;
```

This structure describes the following feature:

- `sType` is a VkStructureType value identifying this structure.
- `pNext` is `NULL` or a pointer to a structure extending this structure.
- `shaderTerminateInvocation` specifies whether the implementation supports SPIR-V modules that use the `SPV_KHR_terminate_invocation` extension.

If the `VkPhysicalDeviceShaderTerminateInvocationFeatures` structure is included in the `pNext` chain of the VkPhysicalDeviceFeatures2 structure passed to vkGetPhysicalDeviceFeatures2, it is filled in to indicate whether each corresponding feature is supported. `VkPhysicalDeviceShaderTerminateInvocationFeatures` **can** also be used in the `pNext` chain of VkDeviceCreateInfo to selectively enable these features.

Valid Usage (Implicit)

- VUID-VkPhysicalDeviceShaderTerminateInvocationFeatures-sType-sType
  `sType` **must** be `VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_SHADER_TERMINATE_INVOCATION_FEATURES`

The `VkPhysicalDeviceSynchronization2Features` structure is defined as:

```
// Provided by VK_VERSION_1_3
typedef struct VkPhysicalDeviceSynchronization2Features {
    VkStructureType    sType;
    void*              pNext;
    VkBool32           synchronization2;
} VkPhysicalDeviceSynchronization2Features;
```

This structure describes the following feature:

- `sType` is a VkStructureType value identifying this structure.
- `pNext` is `NULL` or a pointer to a structure extending this structure.
- `synchronization2` indicates whether the implementation supports the new set of synchronization commands introduced in `VK_KHR_synchronization2`.

If the `VkPhysicalDeviceSynchronization2Features` structure is included in the `pNext` chain of the VkPhysicalDeviceFeatures2 structure passed to vkGetPhysicalDeviceFeatures2, it is filled in to indicate whether each corresponding feature is supported.

VkPhysicalDeviceSynchronization2Features **can** also be used in the pNext chain of VkDeviceCreateInfo to selectively enable these features.

Valid Usage (Implicit)

- VUID-VkPhysicalDeviceSynchronization2Features-sType-sType
  sType **must** be VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_SYNCHRONIZATION_2_FEATURES

The VkPhysicalDeviceShaderIntegerDotProductFeatures structure is defined as:

```
// Provided by VK_VERSION_1_3
typedef struct VkPhysicalDeviceShaderIntegerDotProductFeatures {
    VkStructureType    sType;
    void*              pNext;
    VkBool32           shaderIntegerDotProduct;
} VkPhysicalDeviceShaderIntegerDotProductFeatures;
```

This structure describes the following feature:

- sType is a VkStructureType value identifying this structure.
- pNext is NULL or a pointer to a structure extending this structure.
- shaderIntegerDotProduct specifies whether shader modules **can** declare the DotProductInputAllKHR, DotProductInput4x8BitKHR, DotProductInput4x8BitPackedKHR and DotProductKHR capabilities.

If the VkPhysicalDeviceShaderIntegerDotProductFeatures structure is included in the pNext chain of the VkPhysicalDeviceFeatures2 structure passed to vkGetPhysicalDeviceFeatures2, it is filled in to indicate whether each corresponding feature is supported. VkPhysicalDeviceShaderIntegerDotProductFeatures **can** also be used in the pNext chain of VkDeviceCreateInfo to selectively enable these features.

Valid Usage (Implicit)

- VUID-VkPhysicalDeviceShaderIntegerDotProductFeatures-sType-sType
  sType **must** be VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_SHADER_INTEGER_DOT_PRODUCT_FEATURES

The VkPhysicalDeviceMaintenance4Features structure is defined as:

```
// Provided by VK_VERSION_1_3
typedef struct VkPhysicalDeviceMaintenance4Features {
    VkStructureType    sType;
    void*              pNext;
    VkBool32           maintenance4;
} VkPhysicalDeviceMaintenance4Features;
```

This structure describes the following feature:

- `sType` is a VkStructureType value identifying this structure.
- `pNext` is `NULL` or a pointer to a structure extending this structure.
- `maintenance4` indicates that the implementation supports the following:
  - The application **may** destroy a VkPipelineLayout object immediately after using it to create another object.
  - `LocalSizeId` **can** be used as an alternative to `LocalSize` to specify the local workgroup size with specialization constants.
  - Images created with identical creation parameters will always have the same alignment requirements.
  - The size memory requirement of a buffer or image is never greater than that of another buffer or image created with a greater or equal size.
  - Push constants do not have to be initialized before they are dynamically accessed.
  - The interface matching rules allow a larger output vector to match with a smaller input vector, with additional values being discarded.

If the `VkPhysicalDeviceMaintenance4Features` structure is included in the `pNext` chain of the VkPhysicalDeviceFeatures2 structure passed to vkGetPhysicalDeviceFeatures2, it is filled in to indicate whether each corresponding feature is supported. `VkPhysicalDeviceMaintenance4Features` **can** also be used in the `pNext` chain of VkDeviceCreateInfo to selectively enable these features.

Valid Usage (Implicit)

- VUID-VkPhysicalDeviceMaintenance4Features-sType-sType
  `sType` **must** be `VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_MAINTENANCE_4_FEATURES`

The `VkPhysicalDeviceDynamicRenderingFeatures` structure is defined as:

```
// Provided by VK_VERSION_1_3
typedef struct VkPhysicalDeviceDynamicRenderingFeatures {
    VkStructureType    sType;
    void*              pNext;
    VkBool32           dynamicRendering;
} VkPhysicalDeviceDynamicRenderingFeatures;
```

This structure describes the following feature:

- `sType` is a VkStructureType value identifying this structure.
- `pNext` is `NULL` or a pointer to a structure extending this structure.
- `dynamicRendering` specifies that the implementation supports dynamic render pass instances using the vkCmdBeginRendering command.

If the VkPhysicalDeviceDynamicRenderingFeatures structure is included in the pNext chain of the VkPhysicalDeviceFeatures2 structure passed to vkGetPhysicalDeviceFeatures2, it is filled in to indicate whether each corresponding feature is supported. VkPhysicalDeviceDynamicRenderingFeatures **can** also be used in the pNext chain of VkDeviceCreateInfo to selectively enable these features.

Valid Usage (Implicit)

- VUID-VkPhysicalDeviceDynamicRenderingFeatures-sType-sType
  sType **must** be VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_DYNAMIC_RENDERING_FEATURES

32.1. Feature Requirements

All Vulkan graphics implementations **must** support the following features:

- If Vulkan 1.0 is supported, robustBufferAccess **must** be supported
- If Vulkan 1.1 is supported, the following features **must** be supported:
  - storageBuffer16BitAccess if uniformAndStorageBuffer16BitAccess is supported
  - multiview
  - shaderDrawParameters if VK_KHR_shader_draw_parameters is supported
- If Vulkan 1.2 is supported, the following features **must** be supported:
  - subgroupBroadcastDynamicId
  - samplerMirrorClampToEdge if VK_KHR_sampler_mirror_clamp_to_edge is supported
  - drawIndirectCount if VK_KHR_draw_indirect_count is supported
  - storageBuffer8BitAccess if uniformAndStorageBuffer8BitAccess is supported
  - shaderInt64 if shaderSharedInt64Atomics or shaderBufferInt64Atomics are supported
  - descriptorIndexing if VK_EXT_descriptor_indexing is supported
  - shaderSampledImageArrayDynamicIndexing if descriptorIndexing is supported
  - shaderStorageBufferArrayDynamicIndexing if descriptorIndexing is supported
  - shaderUniformTexelBufferArrayDynamicIndexing if descriptorIndexing is supported
  - shaderStorageTexelBufferArrayDynamicIndexing if descriptorIndexing is supported
  - shaderSampledImageArrayNonUniformIndexing if descriptorIndexing is supported
  - shaderStorageBufferArrayNonUniformIndexing if descriptorIndexing is supported
  - shaderUniformTexelBufferArrayNonUniformIndexing if descriptorIndexing is supported
  - descriptorBindingSampledImageUpdateAfterBind if descriptorIndexing is supported
  - descriptorBindingStorageImageUpdateAfterBind if descriptorIndexing is supported
  - descriptorBindingStorageBufferUpdateAfterBind if descriptorIndexing is supported
  - descriptorBindingUniformTexelBufferUpdateAfterBind if descriptorIndexing is supported

    - `descriptorBindingStorageTexelBufferUpdateAfterBind` if descriptorIndexing is supported
    - `descriptorBindingUpdateUnusedWhilePending` if descriptorIndexing is supported
    - `descriptorBindingPartiallyBound` if descriptorIndexing is supported
    - `runtimeDescriptorArray` if descriptorIndexing is supported
    - `shaderOutputViewportIndex` if `VK_EXT_shader_viewport_index_layer` is supported
    - `shaderOutputLayer` if `VK_EXT_shader_viewport_index_layer` is supported
    - `samplerFilterMinmax` if `VK_EXT_sampler_filter_minmax` is supported
    - `imagelessFramebuffer`
    - `uniformBufferStandardLayout`
    - `shaderSubgroupExtendedTypes`
    - `separateDepthStencilLayouts`
    - `hostQueryReset`
    - `timelineSemaphore`
- If Vulkan 1.3 is supported, the following features **must** be supported:
    - `shaderTerminateInvocation`
    - `shaderDemoteToHelperInvocation`
    - `privateData`
    - `pipelineCreationCacheControl`
    - `synchronization2`
    - `shaderZeroInitializeWorkgroupMemory`
    - `robustImageAccess`
    - `subgroupSizeControl`
    - `computeFullSubgroups`
    - `dynamicRendering`
    - `shaderIntegerDotProduct`
    - `maintenance4`
    - `vulkanMemoryModel`
    - `vulkanMemoryModelDeviceScope`
    - `inlineUniformBlock`
    - `bufferDeviceAddress`
    - `descriptorBindingInlineUniformBlockUpdateAfterBind` if `VK_EXT_descriptor_indexing` or descriptorIndexing are supported

All other features defined in the Specification are **optional**.

32.2. Profile Features

32.2.1. Roadmap 2022

Implementations that claim support for the Roadmap 2022 profile **must** support the following features:

- `fullDrawIndexUint32`
- `imageCubeArray`
- `independentBlend`
- `sampleRateShading`
- `drawIndirectFirstInstance`
- `depthClamp`
- `depthBiasClamp`
- `samplerAnisotropy`
- `occlusionQueryPrecise`
- `fragmentStoresAndAtomics`
- `shaderStorageImageExtendedFormats`
- `shaderUniformBufferArrayDynamicIndexing`
- `shaderSampledImageArrayDynamicIndexing`
- `shaderStorageBufferArrayDynamicIndexing`
- `shaderStorageImageArrayDynamicIndexing`
- `samplerYcbcrConversion`
- `samplerMirrorClampToEdge`
- `descriptorIndexing`
- `shaderUniformTexelBufferArrayDynamicIndexing`
- `shaderStorageTexelBufferArrayDynamicIndexing`
- `shaderUniformBufferArrayNonUniformIndexing`
- `shaderSampledImageArrayNonUniformIndexing`
- `shaderStorageBufferArrayNonUniformIndexing`
- `shaderStorageImageArrayNonUniformIndexing`
- `shaderUniformTexelBufferArrayNonUniformIndexing`
- `shaderStorageTexelBufferArrayNonUniformIndexing`
- `descriptorBindingSampledImageUpdateAfterBind`
- `descriptorBindingStorageImageUpdateAfterBind`
- `descriptorBindingStorageBufferUpdateAfterBind`

- descriptorBindingUniformTexelBufferUpdateAfterBind
- descriptorBindingStorageTexelBufferUpdateAfterBind
- descriptorBindingUpdateUnusedWhilePending
- descriptorBindingPartiallyBound
- descriptorBindingVariableDescriptorCount
- runtimeDescriptorArray
- scalarBlockLayout

32.2.2. Roadmap 2024

Implementations that claim support for the Roadmap 2024 profile **must** support the following features:

- multiDrawIndirect
- shaderImageGatherExtended
- shaderDrawParameters
- shaderInt8
- shaderInt16
- shaderFloat16
- storageBuffer16BitAccess
- storageBuffer8BitAccess

Chapter 33. Limits

Limits are implementation-dependent minimums, maximums, and other device characteristics that an application **may** need to be aware of.

NOTE

Limits are reported via the basic VkPhysicalDeviceLimits structure as well as the extensible structure VkPhysicalDeviceProperties2, which was added in VK_KHR_get_physical_device_properties2 and included in Vulkan 1.1. When limits are added in future Vulkan versions or extensions, each extension **should** introduce one new limit structure, if needed. This structure **can** be added to the pNext chain of the VkPhysicalDeviceProperties2 structure.

The VkPhysicalDeviceLimits structure is defined as:

```
// Provided by VK_VERSION_1_0
typedef struct VkPhysicalDeviceLimits {
    uint32_t              maxImageDimension1D;
    uint32_t              maxImageDimension2D;
    uint32_t              maxImageDimension3D;
    uint32_t              maxImageDimensionCube;
    uint32_t              maxImageArrayLayers;
    uint32_t              maxTexelBufferElements;
    uint32_t              maxUniformBufferRange;
    uint32_t              maxStorageBufferRange;
    uint32_t              maxPushConstantsSize;
    uint32_t              maxMemoryAllocationCount;
    uint32_t              maxSamplerAllocationCount;
    VkDeviceSize          bufferImageGranularity;
    VkDeviceSize          sparseAddressSpaceSize;
    uint32_t              maxBoundDescriptorSets;
    uint32_t              maxPerStageDescriptorSamplers;
    uint32_t              maxPerStageDescriptorUniformBuffers;
    uint32_t              maxPerStageDescriptorStorageBuffers;
    uint32_t              maxPerStageDescriptorSampledImages;
    uint32_t              maxPerStageDescriptorStorageImages;
    uint32_t              maxPerStageDescriptorInputAttachments;
    uint32_t              maxPerStageResources;
    uint32_t              maxDescriptorSetSamplers;
    uint32_t              maxDescriptorSetUniformBuffers;
    uint32_t              maxDescriptorSetUniformBuffersDynamic;
    uint32_t              maxDescriptorSetStorageBuffers;
    uint32_t              maxDescriptorSetStorageBuffersDynamic;
    uint32_t              maxDescriptorSetSampledImages;
    uint32_t              maxDescriptorSetStorageImages;
    uint32_t              maxDescriptorSetInputAttachments;
    uint32_t              maxVertexInputAttributes;
    uint32_t              maxVertexInputBindings;
    uint32_t              maxVertexInputAttributeOffset;
    uint32_t              maxVertexInputBindingStride;
```

```
    uint32_t              maxVertexOutputComponents;
    uint32_t              maxTessellationGenerationLevel;
    uint32_t              maxTessellationPatchSize;
    uint32_t              maxTessellationControlPerVertexInputComponents;
    uint32_t              maxTessellationControlPerVertexOutputComponents;
    uint32_t              maxTessellationControlPerPatchOutputComponents;
    uint32_t              maxTessellationControlTotalOutputComponents;
    uint32_t              maxTessellationEvaluationInputComponents;
    uint32_t              maxTessellationEvaluationOutputComponents;
    uint32_t              maxGeometryShaderInvocations;
    uint32_t              maxGeometryInputComponents;
    uint32_t              maxGeometryOutputComponents;
    uint32_t              maxGeometryOutputVertices;
    uint32_t              maxGeometryTotalOutputComponents;
    uint32_t              maxFragmentInputComponents;
    uint32_t              maxFragmentOutputAttachments;
    uint32_t              maxFragmentDualSrcAttachments;
    uint32_t              maxFragmentCombinedOutputResources;
    uint32_t              maxComputeSharedMemorySize;
    uint32_t              maxComputeWorkGroupCount[3];
    uint32_t              maxComputeWorkGroupInvocations;
    uint32_t              maxComputeWorkGroupSize[3];
    uint32_t              subPixelPrecisionBits;
    uint32_t              subTexelPrecisionBits;
    uint32_t              mipmapPrecisionBits;
    uint32_t              maxDrawIndexedIndexValue;
    uint32_t              maxDrawIndirectCount;
    float                 maxSamplerLodBias;
    float                 maxSamplerAnisotropy;
    uint32_t              maxViewports;
    uint32_t              maxViewportDimensions[2];
    float                 viewportBoundsRange[2];
    uint32_t              viewportSubPixelBits;
    size_t                minMemoryMapAlignment;
    VkDeviceSize          minTexelBufferOffsetAlignment;
    VkDeviceSize          minUniformBufferOffsetAlignment;
    VkDeviceSize          minStorageBufferOffsetAlignment;
    int32_t               minTexelOffset;
    uint32_t              maxTexelOffset;
    int32_t               minTexelGatherOffset;
    uint32_t              maxTexelGatherOffset;
    float                 minInterpolationOffset;
    float                 maxInterpolationOffset;
    uint32_t              subPixelInterpolationOffsetBits;
    uint32_t              maxFramebufferWidth;
    uint32_t              maxFramebufferHeight;
    uint32_t              maxFramebufferLayers;
    VkSampleCountFlags    framebufferColorSampleCounts;
    VkSampleCountFlags    framebufferDepthSampleCounts;
    VkSampleCountFlags    framebufferStencilSampleCounts;
    VkSampleCountFlags    framebufferNoAttachmentsSampleCounts;
```

```
    uint32_t              maxColorAttachments;
    VkSampleCountFlags    sampledImageColorSampleCounts;
    VkSampleCountFlags    sampledImageIntegerSampleCounts;
    VkSampleCountFlags    sampledImageDepthSampleCounts;
    VkSampleCountFlags    sampledImageStencilSampleCounts;
    VkSampleCountFlags    storageImageSampleCounts;
    uint32_t              maxSampleMaskWords;
    VkBool32              timestampComputeAndGraphics;
    float                 timestampPeriod;
    uint32_t              maxClipDistances;
    uint32_t              maxCullDistances;
    uint32_t              maxCombinedClipAndCullDistances;
    uint32_t              discreteQueuePriorities;
    float                 pointSizeRange[2];
    float                 lineWidthRange[2];
    float                 pointSizeGranularity;
    float                 lineWidthGranularity;
    VkBool32              strictLines;
    VkBool32              standardSampleLocations;
    VkDeviceSize          optimalBufferCopyOffsetAlignment;
    VkDeviceSize          optimalBufferCopyRowPitchAlignment;
    VkDeviceSize          nonCoherentAtomSize;
} VkPhysicalDeviceLimits;
```

The VkPhysicalDeviceLimits are properties of the physical device. These are available in the limits member of the VkPhysicalDeviceProperties structure which is returned from vkGetPhysicalDeviceProperties.

- maxImageDimension1D is the largest dimension (width) that is guaranteed to be supported for all images created with an imageType of VK_IMAGE_TYPE_1D. Some combinations of image parameters (format, usage, etc.) **may** allow support for larger dimensions, which **can** be queried using vkGetPhysicalDeviceImageFormatProperties.
- maxImageDimension2D is the largest dimension (width or height) that is guaranteed to be supported for all images created with an imageType of VK_IMAGE_TYPE_2D and without VK_IMAGE_CREATE_CUBE_COMPATIBLE_BIT set in flags. Some combinations of image parameters (format, usage, etc.) **may** allow support for larger dimensions, which **can** be queried using vkGetPhysicalDeviceImageFormatProperties.
- maxImageDimension3D is the largest dimension (width, height, or depth) that is guaranteed to be supported for all images created with an imageType of VK_IMAGE_TYPE_3D. Some combinations of image parameters (format, usage, etc.) **may** allow support for larger dimensions, which **can** be queried using vkGetPhysicalDeviceImageFormatProperties.
- maxImageDimensionCube is the largest dimension (width or height) that is guaranteed to be supported for all images created with an imageType of VK_IMAGE_TYPE_2D and with VK_IMAGE_CREATE_CUBE_COMPATIBLE_BIT set in flags. Some combinations of image parameters (format, usage, etc.) **may** allow support for larger dimensions, which **can** be queried using vkGetPhysicalDeviceImageFormatProperties.
- maxImageArrayLayers is the maximum number of layers (arrayLayers) for an image.

- `maxTexelBufferElements` is the maximum number of addressable texels for a buffer view created on a buffer which was created with the `VK_BUFFER_USAGE_UNIFORM_TEXEL_BUFFER_BIT` or `VK_BUFFER_USAGE_STORAGE_TEXEL_BUFFER_BIT` set in the `usage` member of the VkBufferCreateInfo structure.
- `maxUniformBufferRange` is the maximum value that **can** be specified in the `range` member of a VkDescriptorBufferInfo structure passed to vkUpdateDescriptorSets for descriptors of type `VK_DESCRIPTOR_TYPE_UNIFORM_BUFFER` or `VK_DESCRIPTOR_TYPE_UNIFORM_BUFFER_DYNAMIC`.
- `maxStorageBufferRange` is the maximum value that **can** be specified in the `range` member of a VkDescriptorBufferInfo structure passed to vkUpdateDescriptorSets for descriptors of type `VK_DESCRIPTOR_TYPE_STORAGE_BUFFER` or `VK_DESCRIPTOR_TYPE_STORAGE_BUFFER_DYNAMIC`.
- `maxPushConstantsSize` is the maximum size, in bytes, of the pool of push constant memory. For each of the push constant ranges indicated by the `pPushConstantRanges` member of the VkPipelineLayoutCreateInfo structure, (`offset` + `size`) **must** be less than or equal to this limit.
- `maxMemoryAllocationCount` is the maximum number of device memory allocations, as created by vkAllocateMemory, which **can** simultaneously exist.
- `maxSamplerAllocationCount` is the maximum number of sampler objects, as created by vkCreateSampler, which **can** simultaneously exist on a device.
- `bufferImageGranularity` is the granularity, in bytes, at which buffer or linear image resources, and optimal image resources **can** be bound to adjacent offsets in the same `VkDeviceMemory` object without aliasing. See Buffer-Image Granularity for more details.
- `sparseAddressSpaceSize` is the total amount of address space available, in bytes, for sparse memory resources. This is an upper bound on the sum of the sizes of all sparse resources, regardless of whether any memory is bound to them.
- `maxBoundDescriptorSets` is the maximum number of descriptor sets that **can** be simultaneously used by a pipeline. All `DescriptorSet` decorations in shader modules **must** have a value less than `maxBoundDescriptorSets`. See Descriptor Sets.
- `maxPerStageDescriptorSamplers` is the maximum number of samplers that **can** be accessible to a single shader stage in a pipeline layout. Descriptors with a type of `VK_DESCRIPTOR_TYPE_SAMPLER` or `VK_DESCRIPTOR_TYPE_COMBINED_IMAGE_SAMPLER` count against this limit. Only descriptors in descriptor set layouts created without the `VK_DESCRIPTOR_SET_LAYOUT_CREATE_UPDATE_AFTER_BIND_POOL_BIT` bit set count against this limit. A descriptor is accessible to a shader stage when the `stageFlags` member of the `VkDescriptorSetLayoutBinding` structure has the bit for that shader stage set. See Sampler and Combined Image Sampler.
- `maxPerStageDescriptorUniformBuffers` is the maximum number of uniform buffers that **can** be accessible to a single shader stage in a pipeline layout. Descriptors with a type of `VK_DESCRIPTOR_TYPE_UNIFORM_BUFFER` or `VK_DESCRIPTOR_TYPE_UNIFORM_BUFFER_DYNAMIC` count against this limit. Only descriptors in descriptor set layouts created without the `VK_DESCRIPTOR_SET_LAYOUT_CREATE_UPDATE_AFTER_BIND_POOL_BIT` bit set count against this limit. A descriptor is accessible to a shader stage when the `stageFlags` member of the `VkDescriptorSetLayoutBinding` structure has the bit for that shader stage set. See Uniform Buffer and Dynamic Uniform Buffer.
- `maxPerStageDescriptorStorageBuffers` is the maximum number of storage buffers that **can** be

accessible to a single shader stage in a pipeline layout. Descriptors with a type of VK_DESCRIPTOR_TYPE_STORAGE_BUFFER or VK_DESCRIPTOR_TYPE_STORAGE_BUFFER_DYNAMIC count against this limit. Only descriptors in descriptor set layouts created without the VK_DESCRIPTOR_SET_LAYOUT_CREATE_UPDATE_AFTER_BIND_POOL_BIT bit set count against this limit. A descriptor is accessible to a pipeline shader stage when the stageFlags member of the VkDescriptorSetLayoutBinding structure has the bit for that shader stage set. See Storage Buffer and Dynamic Storage Buffer.

- maxPerStageDescriptorSampledImages is the maximum number of sampled images that **can** be accessible to a single shader stage in a pipeline layout. Descriptors with a type of VK_DESCRIPTOR_TYPE_COMBINED_IMAGE_SAMPLER, VK_DESCRIPTOR_TYPE_SAMPLED_IMAGE, or VK_DESCRIPTOR_TYPE_UNIFORM_TEXEL_BUFFER count against this limit. Only descriptors in descriptor set layouts created without the VK_DESCRIPTOR_SET_LAYOUT_CREATE_UPDATE_AFTER_BIND_POOL_BIT bit set count against this limit. A descriptor is accessible to a pipeline shader stage when the stageFlags member of the VkDescriptorSetLayoutBinding structure has the bit for that shader stage set. See Combined Image Sampler, Sampled Image, and Uniform Texel Buffer.
- maxPerStageDescriptorStorageImages is the maximum number of storage images that **can** be accessible to a single shader stage in a pipeline layout. Descriptors with a type of VK_DESCRIPTOR_TYPE_STORAGE_IMAGE, or VK_DESCRIPTOR_TYPE_STORAGE_TEXEL_BUFFER count against this limit. Only descriptors in descriptor set layouts created without the VK_DESCRIPTOR_SET_LAYOUT_CREATE_UPDATE_AFTER_BIND_POOL_BIT bit set count against this limit. A descriptor is accessible to a pipeline shader stage when the stageFlags member of the VkDescriptorSetLayoutBinding structure has the bit for that shader stage set. See Storage Image, and Storage Texel Buffer.
- maxPerStageDescriptorInputAttachments is the maximum number of input attachments that **can** be accessible to a single shader stage in a pipeline layout. Descriptors with a type of VK_DESCRIPTOR_TYPE_INPUT_ATTACHMENT count against this limit. Only descriptors in descriptor set layouts created without the VK_DESCRIPTOR_SET_LAYOUT_CREATE_UPDATE_AFTER_BIND_POOL_BIT bit set count against this limit. A descriptor is accessible to a pipeline shader stage when the stageFlags member of the VkDescriptorSetLayoutBinding structure has the bit for that shader stage set. These are only supported for the fragment stage. See Input Attachment.
- maxPerStageResources is the maximum number of resources that **can** be accessible to a single shader stage in a pipeline layout. Descriptors with a type of VK_DESCRIPTOR_TYPE_COMBINED_IMAGE_SAMPLER, VK_DESCRIPTOR_TYPE_SAMPLED_IMAGE, VK_DESCRIPTOR_TYPE_STORAGE_IMAGE, VK_DESCRIPTOR_TYPE_UNIFORM_TEXEL_BUFFER, VK_DESCRIPTOR_TYPE_STORAGE_TEXEL_BUFFER, VK_DESCRIPTOR_TYPE_UNIFORM_BUFFER, VK_DESCRIPTOR_TYPE_STORAGE_BUFFER, VK_DESCRIPTOR_TYPE_UNIFORM_BUFFER_DYNAMIC, VK_DESCRIPTOR_TYPE_STORAGE_BUFFER_DYNAMIC, or VK_DESCRIPTOR_TYPE_INPUT_ATTACHMENT count against this limit. Only descriptors in descriptor set layouts created without the VK_DESCRIPTOR_SET_LAYOUT_CREATE_UPDATE_AFTER_BIND_POOL_BIT bit set count against this limit. For the fragment shader stage the framebuffer color attachments also count against this limit.
- maxDescriptorSetSamplers is the maximum number of samplers that **can** be included in a pipeline layout. Descriptors with a type of VK_DESCRIPTOR_TYPE_SAMPLER or VK_DESCRIPTOR_TYPE_COMBINED_IMAGE_SAMPLER count against this limit. Only descriptors in descriptor set layouts created without the VK_DESCRIPTOR_SET_LAYOUT_CREATE_UPDATE_AFTER_BIND_POOL_BIT bit set count against this limit. See Sampler and Combined Image Sampler.

- `maxDescriptorSetUniformBuffers` is the maximum number of uniform buffers that **can** be included in a pipeline layout. Descriptors with a type of `VK_DESCRIPTOR_TYPE_UNIFORM_BUFFER` or `VK_DESCRIPTOR_TYPE_UNIFORM_BUFFER_DYNAMIC` count against this limit. Only descriptors in descriptor set layouts created without the `VK_DESCRIPTOR_SET_LAYOUT_CREATE_UPDATE_AFTER_BIND_POOL_BIT` bit set count against this limit. See Uniform Buffer and Dynamic Uniform Buffer.
- `maxDescriptorSetUniformBuffersDynamic` is the maximum number of dynamic uniform buffers that **can** be included in a pipeline layout. Descriptors with a type of `VK_DESCRIPTOR_TYPE_UNIFORM_BUFFER_DYNAMIC` count against this limit. Only descriptors in descriptor set layouts created without the `VK_DESCRIPTOR_SET_LAYOUT_CREATE_UPDATE_AFTER_BIND_POOL_BIT` bit set count against this limit. See Dynamic Uniform Buffer.
- `maxDescriptorSetStorageBuffers` is the maximum number of storage buffers that **can** be included in a pipeline layout. Descriptors with a type of `VK_DESCRIPTOR_TYPE_STORAGE_BUFFER` or `VK_DESCRIPTOR_TYPE_STORAGE_BUFFER_DYNAMIC` count against this limit. Only descriptors in descriptor set layouts created without the `VK_DESCRIPTOR_SET_LAYOUT_CREATE_UPDATE_AFTER_BIND_POOL_BIT` bit set count against this limit. See Storage Buffer and Dynamic Storage Buffer.
- `maxDescriptorSetStorageBuffersDynamic` is the maximum number of dynamic storage buffers that **can** be included in a pipeline layout. Descriptors with a type of `VK_DESCRIPTOR_TYPE_STORAGE_BUFFER_DYNAMIC` count against this limit. Only descriptors in descriptor set layouts created without the `VK_DESCRIPTOR_SET_LAYOUT_CREATE_UPDATE_AFTER_BIND_POOL_BIT` bit set count against this limit. See Dynamic Storage Buffer.
- `maxDescriptorSetSampledImages` is the maximum number of sampled images that **can** be included in a pipeline layout. Descriptors with a type of `VK_DESCRIPTOR_TYPE_COMBINED_IMAGE_SAMPLER`, `VK_DESCRIPTOR_TYPE_SAMPLED_IMAGE`, or `VK_DESCRIPTOR_TYPE_UNIFORM_TEXEL_BUFFER` count against this limit. Only descriptors in descriptor set layouts created without the `VK_DESCRIPTOR_SET_LAYOUT_CREATE_UPDATE_AFTER_BIND_POOL_BIT` bit set count against this limit. See Combined Image Sampler, Sampled Image, and Uniform Texel Buffer.
- `maxDescriptorSetStorageImages` is the maximum number of storage images that **can** be included in a pipeline layout. Descriptors with a type of `VK_DESCRIPTOR_TYPE_STORAGE_IMAGE`, or `VK_DESCRIPTOR_TYPE_STORAGE_TEXEL_BUFFER` count against this limit. Only descriptors in descriptor set layouts created without the `VK_DESCRIPTOR_SET_LAYOUT_CREATE_UPDATE_AFTER_BIND_POOL_BIT` bit set count against this limit. See Storage Image, and Storage Texel Buffer.
- `maxDescriptorSetInputAttachments` is the maximum number of input attachments that **can** be included in a pipeline layout. Descriptors with a type of `VK_DESCRIPTOR_TYPE_INPUT_ATTACHMENT` count against this limit. Only descriptors in descriptor set layouts created without the `VK_DESCRIPTOR_SET_LAYOUT_CREATE_UPDATE_AFTER_BIND_POOL_BIT` bit set count against this limit. See Input Attachment.
- `maxVertexInputAttributes` is the maximum number of vertex input attributes that **can** be specified for a graphics pipeline. These are described in the array of `VkVertexInputAttributeDescription` structures that are provided at graphics pipeline creation time via the `pVertexAttributeDescriptions` member of the `VkPipelineVertexInputStateCreateInfo` structure. See Vertex Attributes and Vertex Input Description.

- `maxVertexInputBindings` is the maximum number of vertex buffers that **can** be specified for providing vertex attributes to a graphics pipeline. These are described in the array of `VkVertexInputBindingDescription` structures that are provided at graphics pipeline creation time via the `pVertexBindingDescriptions` member of the VkPipelineVertexInputStateCreateInfo structure. The `binding` member of `VkVertexInputBindingDescription` **must** be less than this limit. See Vertex Input Description.
- `maxVertexInputAttributeOffset` is the maximum vertex input attribute offset that **can** be added to the vertex input binding stride. The `offset` member of the `VkVertexInputAttributeDescription` structure **must** be less than or equal to this limit. See Vertex Input Description.
- `maxVertexInputBindingStride` is the maximum vertex input binding stride that **can** be specified in a vertex input binding. The `stride` member of the `VkVertexInputBindingDescription` structure **must** be less than or equal to this limit. See Vertex Input Description.
- `maxVertexOutputComponents` is the maximum number of components of output variables which **can** be output by a vertex shader. See Vertex Shaders.
- `maxTessellationGenerationLevel` is the maximum tessellation generation level supported by the fixed-function tessellation primitive generator. See Tessellation.
- `maxTessellationPatchSize` is the maximum patch size, in vertices, of patches that **can** be processed by the tessellation control shader and tessellation primitive generator. The `patchControlPoints` member of the VkPipelineTessellationStateCreateInfo structure specified at pipeline creation time and the value provided in the `OutputVertices` execution mode of shader modules **must** be less than or equal to this limit. See Tessellation.
- `maxTessellationControlPerVertexInputComponents` is the maximum number of components of input variables which **can** be provided as per-vertex inputs to the tessellation control shader stage.
- `maxTessellationControlPerVertexOutputComponents` is the maximum number of components of per-vertex output variables which **can** be output from the tessellation control shader stage.
- `maxTessellationControlPerPatchOutputComponents` is the maximum number of components of per-patch output variables which **can** be output from the tessellation control shader stage.
- `maxTessellationControlTotalOutputComponents` is the maximum total number of components of per-vertex and per-patch output variables which **can** be output from the tessellation control shader stage.
- `maxTessellationEvaluationInputComponents` is the maximum number of components of input variables which **can** be provided as per-vertex inputs to the tessellation evaluation shader stage.
- `maxTessellationEvaluationOutputComponents` is the maximum number of components of per-vertex output variables which **can** be output from the tessellation evaluation shader stage.
- `maxGeometryShaderInvocations` is the maximum invocation count supported for instanced geometry shaders. The value provided in the `Invocations` execution mode of shader modules **must** be less than or equal to this limit. See Geometry Shading.
- `maxGeometryInputComponents` is the maximum number of components of input variables which **can** be provided as inputs to the geometry shader stage.
- `maxGeometryOutputComponents` is the maximum number of components of output variables which

can be output from the geometry shader stage.

- `maxGeometryOutputVertices` is the maximum number of vertices which **can** be emitted by any geometry shader.
- `maxGeometryTotalOutputComponents` is the maximum total number of components of output variables, across all emitted vertices, which **can** be output from the geometry shader stage.
- `maxFragmentInputComponents` is the maximum number of components of input variables which **can** be provided as inputs to the fragment shader stage.
- `maxFragmentOutputAttachments` is the maximum number of output attachments which **can** be written to by the fragment shader stage.
- `maxFragmentDualSrcAttachments` is the maximum number of output attachments which **can** be written to by the fragment shader stage when blending is enabled and one of the dual source blend modes is in use. See Dual-Source Blending and `dualSrcBlend`.
- `maxFragmentCombinedOutputResources` is the total number of storage buffers, storage images, and output `Location` decorated color attachments (described in Fragment Output Interface) which **can** be used in the fragment shader stage.
- `maxComputeSharedMemorySize` is the maximum total storage size, in bytes, available for variables declared with the `Workgroup` storage class in shader modules (or with the `shared` storage qualifier in GLSL) in the compute shader stage.
- `maxComputeWorkGroupCount`[3] is the maximum number of local workgroups that **can** be dispatched by a single dispatching command. These three values represent the maximum number of local workgroups for the X, Y, and Z dimensions, respectively. The workgroup count parameters to the dispatching commands **must** be less than or equal to the corresponding limit. See Dispatching Commands.
- `maxComputeWorkGroupInvocations` is the maximum total number of compute shader invocations in a single local workgroup. The product of the X, Y, and Z sizes, as specified by the `LocalSize` or `LocalSizeId` execution mode in shader modules or by the object decorated by the `WorkgroupSize` decoration, **must** be less than or equal to this limit.
- `maxComputeWorkGroupSize`[3] is the maximum size of a local compute workgroup, per dimension. These three values represent the maximum local workgroup size in the X, Y, and Z dimensions, respectively. The `x`, `y`, and `z` sizes, as specified by the `LocalSize` or `LocalSizeId` execution mode or by the object decorated by the `WorkgroupSize` decoration in shader modules, **must** be less than or equal to the corresponding limit.
- `subPixelPrecisionBits` is the number of bits of subpixel precision in framebuffer coordinates x_f and y_f. See Rasterization.
- `subTexelPrecisionBits` is the number of bits of precision in the division along an axis of an image used for minification and magnification filters. $2^{\texttt{subTexelPrecisionBits}}$ is the actual number of divisions along each axis of the image represented. Sub-texel values calculated during image sampling will snap to these locations when generating the filtered results.
- `mipmapPrecisionBits` is the number of bits of division that the LOD calculation for mipmap fetching get snapped to when determining the contribution from each mip level to the mip filtered results. $2^{\texttt{mipmapPrecisionBits}}$ is the actual number of divisions.
- `maxDrawIndexedIndexValue` is the maximum index value that **can** be used for indexed draw calls

when using 32-bit indices. This excludes the primitive restart index value of 0xFFFFFFFF. See fullDrawIndexUint32.

- maxDrawIndirectCount is the maximum draw count that is supported for indirect drawing calls. See multiDrawIndirect.
- maxSamplerLodBias is the maximum absolute sampler LOD bias. The sum of the mipLodBias member of the VkSamplerCreateInfo structure and the Bias operand of image sampling operations in shader modules (or 0 if no Bias operand is provided to an image sampling operation) are clamped to the range [-maxSamplerLodBias,+maxSamplerLodBias]. See [samplers-mipLodBias].
- maxSamplerAnisotropy is the maximum degree of sampler anisotropy. The maximum degree of anisotropic filtering used for an image sampling operation is the minimum of the maxAnisotropy member of the VkSamplerCreateInfo structure and this limit. See [samplers-maxAnisotropy].
- maxViewports is the maximum number of active viewports. The viewportCount member of the VkPipelineViewportStateCreateInfo structure that is provided at pipeline creation **must** be less than or equal to this limit.
- maxViewportDimensions[2] are the maximum viewport dimensions in the X (width) and Y (height) dimensions, respectively. The maximum viewport dimensions **must** be greater than or equal to the largest image which **can** be created and used as a framebuffer attachment. See Controlling the Viewport.
- viewportBoundsRange[2] is the [minimum, maximum] range that the corners of a viewport **must** be contained in. This range **must** be at least [-2 × size, 2 × size - 1], where size = max(maxViewportDimensions[0], maxViewportDimensions[1]). See Controlling the Viewport.

> **NOTE** The intent of the viewportBoundsRange limit is to allow a maximum sized viewport to be arbitrarily shifted relative to the output target as long as at least some portion intersects. This would give a bounds limit of [-size + 1, 2 × size - 1] which would allow all possible non-empty-set intersections of the output target and the viewport. Since these numbers are typically powers of two, picking the signed number range using the smallest possible number of bits ends up with the specified range.

- viewportSubPixelBits is the number of bits of subpixel precision for viewport bounds. The subpixel precision that floating-point viewport bounds are interpreted at is given by this limit.
- minMemoryMapAlignment is the minimum **required** alignment, in bytes, of host visible memory allocations within the host address space. When mapping a memory allocation with vkMapMemory, subtracting offset bytes from the returned pointer will always produce an integer multiple of this limit. See Host Access to Device Memory Objects. The value **must** be a power of two.
- minTexelBufferOffsetAlignment is the minimum **required** alignment, in bytes, for the offset member of the VkBufferViewCreateInfo structure for texel buffers. The value **must** be a power of two. If texelBufferAlignment is enabled, this limit is equivalent to the maximum of the uniformTexelBufferOffsetAlignmentBytes and storageTexelBufferOffsetAlignmentBytes members of VkPhysicalDeviceTexelBufferAlignmentProperties, but smaller alignment is **optionally** allowed by storageTexelBufferOffsetSingleTexelAlignment and

uniformTexelBufferOffsetSingleTexelAlignment. If texelBufferAlignment is not enabled, VkBufferViewCreateInfo::offset **must** be a multiple of this value.

- minUniformBufferOffsetAlignment is the minimum **required** alignment, in bytes, for the offset member of the VkDescriptorBufferInfo structure for uniform buffers. When a descriptor of type VK_DESCRIPTOR_TYPE_UNIFORM_BUFFER or VK_DESCRIPTOR_TYPE_UNIFORM_BUFFER_DYNAMIC is updated, the offset **must** be an integer multiple of this limit. Similarly, dynamic offsets for uniform buffers **must** be multiples of this limit. The value **must** be a power of two.
- minStorageBufferOffsetAlignment is the minimum **required** alignment, in bytes, for the offset member of the VkDescriptorBufferInfo structure for storage buffers. When a descriptor of type VK_DESCRIPTOR_TYPE_STORAGE_BUFFER or VK_DESCRIPTOR_TYPE_STORAGE_BUFFER_DYNAMIC is updated, the offset **must** be an integer multiple of this limit. Similarly, dynamic offsets for storage buffers **must** be multiples of this limit. The value **must** be a power of two.
- minTexelOffset is the minimum offset value for the ConstOffset image operand of any of the OpImageSample* or OpImageFetch* image instructions.
- maxTexelOffset is the maximum offset value for the ConstOffset image operand of any of the OpImageSample* or OpImageFetch* image instructions.
- minTexelGatherOffset is the minimum offset value for the Offset, ConstOffset, or ConstOffsets image operands of any of the OpImage*Gather image instructions.
- maxTexelGatherOffset is the maximum offset value for the Offset, ConstOffset, or ConstOffsets image operands of any of the OpImage*Gather image instructions.
- minInterpolationOffset is the base minimum (inclusive) negative offset value for the Offset operand of the InterpolateAtOffset extended instruction.
- maxInterpolationOffset is the base maximum (inclusive) positive offset value for the Offset operand of the InterpolateAtOffset extended instruction.
- subPixelInterpolationOffsetBits is the number of fractional bits that the x and y offsets to the InterpolateAtOffset extended instruction **may** be rounded to as fixed-point values.
- maxFramebufferWidth is the maximum width for a framebuffer. The width member of the VkFramebufferCreateInfo structure **must** be less than or equal to this limit.
- maxFramebufferHeight is the maximum height for a framebuffer. The height member of the VkFramebufferCreateInfo structure **must** be less than or equal to this limit.
- maxFramebufferLayers is the maximum layer count for a layered framebuffer. The layers member of the VkFramebufferCreateInfo structure **must** be less than or equal to this limit.
- framebufferColorSampleCounts is a bitmask[1] of VkSampleCountFlagBits indicating the color sample counts that are supported for all framebuffer color attachments with floating- or fixed-point formats. For color attachments with integer formats, see framebufferIntegerColorSampleCounts.
- framebufferDepthSampleCounts is a bitmask[1] of VkSampleCountFlagBits indicating the supported depth sample counts for all framebuffer depth/stencil attachments, when the format includes a depth component.
- framebufferStencilSampleCounts is a bitmask[1] of VkSampleCountFlagBits indicating the supported stencil sample counts for all framebuffer depth/stencil attachments, when the format includes a stencil component.

- framebufferNoAttachmentsSampleCounts is a bitmask[1] of VkSampleCountFlagBits indicating the supported sample counts for a subpass which uses no attachments.
- maxColorAttachments is the maximum number of color attachments that **can** be used by a subpass in a render pass. The colorAttachmentCount member of the VkSubpassDescription or VkSubpassDescription2 structure **must** be less than or equal to this limit.
- sampledImageColorSampleCounts is a bitmask[1] of VkSampleCountFlagBits indicating the sample counts supported for all 2D images created with VK_IMAGE_TILING_OPTIMAL, usage containing VK_IMAGE_USAGE_SAMPLED_BIT, and a non-integer color format.
- sampledImageIntegerSampleCounts is a bitmask[1] of VkSampleCountFlagBits indicating the sample counts supported for all 2D images created with VK_IMAGE_TILING_OPTIMAL, usage containing VK_IMAGE_USAGE_SAMPLED_BIT, and an integer color format.
- sampledImageDepthSampleCounts is a bitmask[1] of VkSampleCountFlagBits indicating the sample counts supported for all 2D images created with VK_IMAGE_TILING_OPTIMAL, usage containing VK_IMAGE_USAGE_SAMPLED_BIT, and a depth format.
- sampledImageStencilSampleCounts is a bitmask[1] of VkSampleCountFlagBits indicating the sample counts supported for all 2D images created with VK_IMAGE_TILING_OPTIMAL, usage containing VK_IMAGE_USAGE_SAMPLED_BIT, and a stencil format.
- storageImageSampleCounts is a bitmask[1] of VkSampleCountFlagBits indicating the sample counts supported for all 2D images created with VK_IMAGE_TILING_OPTIMAL, and usage containing VK_IMAGE_USAGE_STORAGE_BIT.
- maxSampleMaskWords is the maximum number of array elements of a variable decorated with the SampleMask built-in decoration.
- timestampComputeAndGraphics specifies support for timestamps on all graphics and compute queues. If this limit is VK_TRUE, all queues that advertise the VK_QUEUE_GRAPHICS_BIT or VK_QUEUE_COMPUTE_BIT in the VkQueueFamilyProperties::queueFlags support VkQueueFamilyProperties::timestampValidBits of at least 36. See Timestamp Queries.
- timestampPeriod is the number of nanoseconds **required** for a timestamp query to be incremented by 1. See Timestamp Queries.
- maxClipDistances is the maximum number of clip distances that **can** be used in a single shader stage. The size of any array declared with the ClipDistance built-in decoration in a shader module **must** be less than or equal to this limit.
- maxCullDistances is the maximum number of cull distances that **can** be used in a single shader stage. The size of any array declared with the CullDistance built-in decoration in a shader module **must** be less than or equal to this limit.
- maxCombinedClipAndCullDistances is the maximum combined number of clip and cull distances that **can** be used in a single shader stage. The sum of the sizes of all arrays declared with the ClipDistance and CullDistance built-in decoration used by a single shader stage in a shader module **must** be less than or equal to this limit.
- discreteQueuePriorities is the number of discrete priorities that **can** be assigned to a queue based on the value of each member of VkDeviceQueueCreateInfo::pQueuePriorities. This **must** be at least 2, and levels **must** be spread evenly over the range, with at least one level at 1.0, and another at 0.0. See Queue Priority.

- `pointSizeRange`[2] is the range [`minimum`,`maximum`] of supported sizes for points. Values written to variables decorated with the `PointSize` built-in decoration are clamped to this range.
- `lineWidthRange`[2] is the range [`minimum`,`maximum`] of supported widths for lines. Values specified by the `lineWidth` member of the VkPipelineRasterizationStateCreateInfo or the `lineWidth` parameter to `vkCmdSetLineWidth` are clamped to this range.
- `pointSizeGranularity` is the granularity of supported point sizes. Not all point sizes in the range defined by `pointSizeRange` are supported. This limit specifies the granularity (or increment) between successive supported point sizes.
- `lineWidthGranularity` is the granularity of supported line widths. Not all line widths in the range defined by `lineWidthRange` are supported. This limit specifies the granularity (or increment) between successive supported line widths.
- `strictLines` specifies whether lines are rasterized according to the preferred method of rasterization. If set to `VK_FALSE`, lines **may** be rasterized under a relaxed set of rules. If set to `VK_TRUE`, lines are rasterized as per the strict definition. See Basic Line Segment Rasterization.
- `standardSampleLocations` specifies whether rasterization uses the standard sample locations as documented in Multisampling. If set to `VK_TRUE`, the implementation uses the documented sample locations. If set to `VK_FALSE`, the implementation **may** use different sample locations.
- `optimalBufferCopyOffsetAlignment` is the optimal buffer offset alignment in bytes for vkCmdCopyBufferToImage2, vkCmdCopyBufferToImage, vkCmdCopyImageToBuffer2, and vkCmdCopyImageToBuffer. The per texel alignment requirements are enforced, but applications **should** use the optimal alignment for optimal performance and power use. The value **must** be a power of two.
- `optimalBufferCopyRowPitchAlignment` is the optimal buffer row pitch alignment in bytes for vkCmdCopyBufferToImage2, vkCmdCopyBufferToImage, vkCmdCopyImageToBuffer2, and vkCmdCopyImageToBuffer. Row pitch is the number of bytes between texels with the same X coordinate in adjacent rows (Y coordinates differ by one). The per texel alignment requirements are enforced, but applications **should** use the optimal alignment for optimal performance and power use. The value **must** be a power of two.
- `nonCoherentAtomSize` is the size and alignment in bytes that bounds concurrent access to host-mapped device memory. The value **must** be a power of two.

1

For all bitmasks of VkSampleCountFlagBits, the sample count limits defined above represent the minimum supported sample counts for each image type. Individual images **may** support additional sample counts, which are queried using vkGetPhysicalDeviceImageFormatProperties as described in Supported Sample Counts.

Bits which **may** be set in the sample count limits returned by VkPhysicalDeviceLimits, as well as in other queries and structures representing image sample counts, are:

```
// Provided by VK_VERSION_1_0
typedef enum VkSampleCountFlagBits {
    VK_SAMPLE_COUNT_1_BIT = 0x00000001,
    VK_SAMPLE_COUNT_2_BIT = 0x00000002,
    VK_SAMPLE_COUNT_4_BIT = 0x00000004,
    VK_SAMPLE_COUNT_8_BIT = 0x00000008,
    VK_SAMPLE_COUNT_16_BIT = 0x00000010,
    VK_SAMPLE_COUNT_32_BIT = 0x00000020,
    VK_SAMPLE_COUNT_64_BIT = 0x00000040,
} VkSampleCountFlagBits;
```

- VK_SAMPLE_COUNT_1_BIT specifies an image with one sample per pixel.
- VK_SAMPLE_COUNT_2_BIT specifies an image with 2 samples per pixel.
- VK_SAMPLE_COUNT_4_BIT specifies an image with 4 samples per pixel.
- VK_SAMPLE_COUNT_8_BIT specifies an image with 8 samples per pixel.
- VK_SAMPLE_COUNT_16_BIT specifies an image with 16 samples per pixel.
- VK_SAMPLE_COUNT_32_BIT specifies an image with 32 samples per pixel.
- VK_SAMPLE_COUNT_64_BIT specifies an image with 64 samples per pixel.

```
// Provided by VK_VERSION_1_0
typedef VkFlags VkSampleCountFlags;
```

VkSampleCountFlags is a bitmask type for setting a mask of zero or more VkSampleCountFlagBits.

The VkPhysicalDeviceMultiviewProperties structure is defined as:

```
// Provided by VK_VERSION_1_1
typedef struct VkPhysicalDeviceMultiviewProperties {
    VkStructureType    sType;
    void*              pNext;
    uint32_t           maxMultiviewViewCount;
    uint32_t           maxMultiviewInstanceIndex;
} VkPhysicalDeviceMultiviewProperties;
```

- sType is a VkStructureType value identifying this structure.
- pNext is NULL or a pointer to a structure extending this structure.
- maxMultiviewViewCount is one greater than the maximum view index that **can** be used in a subpass.
- maxMultiviewInstanceIndex is the maximum valid value of instance index allowed to be generated by a drawing command recorded within a subpass of a multiview render pass instance.

If the VkPhysicalDeviceMultiviewProperties structure is included in the pNext chain of the

VkPhysicalDeviceProperties2 structure passed to vkGetPhysicalDeviceProperties2, it is filled in with each corresponding implementation-dependent property.

Valid Usage (Implicit)

- VUID-VkPhysicalDeviceMultiviewProperties-sType-sType
  sType **must** be VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_MULTIVIEW_PROPERTIES

The VkPhysicalDeviceFloatControlsProperties structure is defined as:

```
// Provided by VK_VERSION_1_2
typedef struct VkPhysicalDeviceFloatControlsProperties {
    VkStructureType                      sType;
    void*                                pNext;
    VkShaderFloatControlsIndependence    denormBehaviorIndependence;
    VkShaderFloatControlsIndependence    roundingModeIndependence;
    VkBool32                             shaderSignedZeroInfNanPreserveFloat16;
    VkBool32                             shaderSignedZeroInfNanPreserveFloat32;
    VkBool32                             shaderSignedZeroInfNanPreserveFloat64;
    VkBool32                             shaderDenormPreserveFloat16;
    VkBool32                             shaderDenormPreserveFloat32;
    VkBool32                             shaderDenormPreserveFloat64;
    VkBool32                             shaderDenormFlushToZeroFloat16;
    VkBool32                             shaderDenormFlushToZeroFloat32;
    VkBool32                             shaderDenormFlushToZeroFloat64;
    VkBool32                             shaderRoundingModeRTEFloat16;
    VkBool32                             shaderRoundingModeRTEFloat32;
    VkBool32                             shaderRoundingModeRTEFloat64;
    VkBool32                             shaderRoundingModeRTZFloat16;
    VkBool32                             shaderRoundingModeRTZFloat32;
    VkBool32                             shaderRoundingModeRTZFloat64;
} VkPhysicalDeviceFloatControlsProperties;
```

- sType is a VkStructureType value identifying this structure.
- pNext is NULL or a pointer to a structure extending this structure.
- denormBehaviorIndependence is a VkShaderFloatControlsIndependence value indicating whether, and how, denorm behavior can be set independently for different bit widths.
- roundingModeIndependence is a VkShaderFloatControlsIndependence value indicating whether, and how, rounding modes can be set independently for different bit widths.
- shaderSignedZeroInfNanPreserveFloat16 is a boolean value indicating whether sign of a zero, Nans and ±∞ **can** be preserved in 16-bit floating-point computations. It also indicates whether the SignedZeroInfNanPreserve execution mode **can** be used for 16-bit floating-point types.
- shaderSignedZeroInfNanPreserveFloat32 is a boolean value indicating whether sign of a zero, Nans and ±∞ **can** be preserved in 32-bit floating-point computations. It also indicates whether the SignedZeroInfNanPreserve execution mode **can** be used for 32-bit floating-point types.

- shaderSignedZeroInfNanPreserveFloat64 is a boolean value indicating whether sign of a zero, Nans and ±∞ **can** be preserved in 64-bit floating-point computations. It also indicates whether the SignedZeroInfNanPreserve execution mode **can** be used for 64-bit floating-point types.
- shaderDenormPreserveFloat16 is a boolean value indicating whether denormals **can** be preserved in 16-bit floating-point computations. It also indicates whether the DenormPreserve execution mode **can** be used for 16-bit floating-point types.
- shaderDenormPreserveFloat32 is a boolean value indicating whether denormals **can** be preserved in 32-bit floating-point computations. It also indicates whether the DenormPreserve execution mode **can** be used for 32-bit floating-point types.
- shaderDenormPreserveFloat64 is a boolean value indicating whether denormals **can** be preserved in 64-bit floating-point computations. It also indicates whether the DenormPreserve execution mode **can** be used for 64-bit floating-point types.
- shaderDenormFlushToZeroFloat16 is a boolean value indicating whether denormals **can** be flushed to zero in 16-bit floating-point computations. It also indicates whether the DenormFlushToZero execution mode **can** be used for 16-bit floating-point types.
- shaderDenormFlushToZeroFloat32 is a boolean value indicating whether denormals **can** be flushed to zero in 32-bit floating-point computations. It also indicates whether the DenormFlushToZero execution mode **can** be used for 32-bit floating-point types.
- shaderDenormFlushToZeroFloat64 is a boolean value indicating whether denormals **can** be flushed to zero in 64-bit floating-point computations. It also indicates whether the DenormFlushToZero execution mode **can** be used for 64-bit floating-point types.
- shaderRoundingModeRTEFloat16 is a boolean value indicating whether an implementation supports the round-to-nearest-even rounding mode for 16-bit floating-point arithmetic and conversion instructions. It also indicates whether the RoundingModeRTE execution mode **can** be used for 16-bit floating-point types.
- shaderRoundingModeRTEFloat32 is a boolean value indicating whether an implementation supports the round-to-nearest-even rounding mode for 32-bit floating-point arithmetic and conversion instructions. It also indicates whether the RoundingModeRTE execution mode **can** be used for 32-bit floating-point types.
- shaderRoundingModeRTEFloat64 is a boolean value indicating whether an implementation supports the round-to-nearest-even rounding mode for 64-bit floating-point arithmetic and conversion instructions. It also indicates whether the RoundingModeRTE execution mode **can** be used for 64-bit floating-point types.
- shaderRoundingModeRTZFloat16 is a boolean value indicating whether an implementation supports the round-towards-zero rounding mode for 16-bit floating-point arithmetic and conversion instructions. It also indicates whether the RoundingModeRTZ execution mode **can** be used for 16-bit floating-point types.
- shaderRoundingModeRTZFloat32 is a boolean value indicating whether an implementation supports the round-towards-zero rounding mode for 32-bit floating-point arithmetic and conversion instructions. It also indicates whether the RoundingModeRTZ execution mode **can** be used for 32-bit floating-point types.
- shaderRoundingModeRTZFloat64 is a boolean value indicating whether an implementation supports the round-towards-zero rounding mode for 64-bit floating-point arithmetic and

conversion instructions. It also indicates whether the RoundingModeRTZ execution mode **can** be used for 64-bit floating-point types.

If the VkPhysicalDeviceFloatControlsProperties structure is included in the pNext chain of the VkPhysicalDeviceProperties2 structure passed to vkGetPhysicalDeviceProperties2, it is filled in with each corresponding implementation-dependent property.

Valid Usage (Implicit)

- VUID-VkPhysicalDeviceFloatControlsProperties-sType-sType
  sType **must** be VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_FLOAT_CONTROLS_PROPERTIES

Values which **may** be returned in the denormBehaviorIndependence and roundingModeIndependence fields of VkPhysicalDeviceFloatControlsProperties are:

```
// Provided by VK_VERSION_1_2
typedef enum VkShaderFloatControlsIndependence {
    VK_SHADER_FLOAT_CONTROLS_INDEPENDENCE_32_BIT_ONLY = 0,
    VK_SHADER_FLOAT_CONTROLS_INDEPENDENCE_ALL = 1,
    VK_SHADER_FLOAT_CONTROLS_INDEPENDENCE_NONE = 2,
} VkShaderFloatControlsIndependence;
```

- VK_SHADER_FLOAT_CONTROLS_INDEPENDENCE_32_BIT_ONLY specifies that shader float controls for 32-bit floating-point **can** be set independently; other bit widths **must** be set identically to each other.
- VK_SHADER_FLOAT_CONTROLS_INDEPENDENCE_ALL specifies that shader float controls for all bit widths **can** be set independently.
- VK_SHADER_FLOAT_CONTROLS_INDEPENDENCE_NONE specifies that shader float controls for all bit widths **must** be set identically.

The VkPhysicalDevicePointClippingProperties structure is defined as:

```
// Provided by VK_VERSION_1_1
typedef struct VkPhysicalDevicePointClippingProperties {
    VkStructureType            sType;
    void*                      pNext;
    VkPointClippingBehavior    pointClippingBehavior;
} VkPhysicalDevicePointClippingProperties;
```

- sType is a VkStructureType value identifying this structure.
- pNext is NULL or a pointer to a structure extending this structure.
- pointClippingBehavior is a VkPointClippingBehavior value specifying the point clipping behavior supported by the implementation.

If the VkPhysicalDevicePointClippingProperties structure is included in the pNext chain of the

VkPhysicalDeviceProperties2 structure passed to vkGetPhysicalDeviceProperties2, it is filled in with each corresponding implementation-dependent property.

Valid Usage (Implicit)

- VUID-VkPhysicalDevicePointClippingProperties-sType-sType
  `sType` **must** be `VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_POINT_CLIPPING_PROPERTIES`

The `VkPhysicalDeviceSubgroupProperties` structure is defined as:

```
// Provided by VK_VERSION_1_1
typedef struct VkPhysicalDeviceSubgroupProperties {
    VkStructureType           sType;
    void*                     pNext;
    uint32_t                  subgroupSize;
    VkShaderStageFlags        supportedStages;
    VkSubgroupFeatureFlags    supportedOperations;
    VkBool32                  quadOperationsInAllStages;
} VkPhysicalDeviceSubgroupProperties;
```

- `sType` is a VkStructureType value identifying this structure.
- `pNext` is `NULL` or a pointer to a structure extending this structure.
- `subgroupSize` is the default number of invocations in each subgroup. `subgroupSize` is at least 1 if any of the physical device's queues support `VK_QUEUE_GRAPHICS_BIT` or `VK_QUEUE_COMPUTE_BIT`. `subgroupSize` is a power-of-two.
- `supportedStages` is a bitfield of VkShaderStageFlagBits describing the shader stages that group operations with subgroup scope are supported in. `supportedStages` will have the `VK_SHADER_STAGE_COMPUTE_BIT` bit set if any of the physical device's queues support `VK_QUEUE_COMPUTE_BIT`.
- `supportedOperations` is a bitmask of VkSubgroupFeatureFlagBits specifying the sets of group operations with subgroup scope supported on this device. `supportedOperations` will have the `VK_SUBGROUP_FEATURE_BASIC_BIT` bit set if any of the physical device's queues support `VK_QUEUE_GRAPHICS_BIT` or `VK_QUEUE_COMPUTE_BIT`.
- `quadOperationsInAllStages` is a boolean specifying whether quad group operations are available in all stages, or are restricted to fragment and compute stages.

If the `VkPhysicalDeviceSubgroupProperties` structure is included in the `pNext` chain of the VkPhysicalDeviceProperties2 structure passed to vkGetPhysicalDeviceProperties2, it is filled in with each corresponding implementation-dependent property.

If `supportedOperations` includes `VK_SUBGROUP_FEATURE_QUAD_BIT`, `subgroupSize` **must** be greater than or equal to 4.

Valid Usage (Implicit)

- VUID-VkPhysicalDeviceSubgroupProperties-sType-sType
  `sType` **must** be `VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_SUBGROUP_PROPERTIES`

Bits which **can** be set in VkPhysicalDeviceSubgroupProperties::`supportedOperations` and VkPhysicalDeviceVulkan11Properties::`subgroupSupportedOperations` to specify supported group operations with subgroup scope are:

```
// Provided by VK_VERSION_1_1
typedef enum VkSubgroupFeatureFlagBits {
    VK_SUBGROUP_FEATURE_BASIC_BIT = 0x00000001,
    VK_SUBGROUP_FEATURE_VOTE_BIT = 0x00000002,
    VK_SUBGROUP_FEATURE_ARITHMETIC_BIT = 0x00000004,
    VK_SUBGROUP_FEATURE_BALLOT_BIT = 0x00000008,
    VK_SUBGROUP_FEATURE_SHUFFLE_BIT = 0x00000010,
    VK_SUBGROUP_FEATURE_SHUFFLE_RELATIVE_BIT = 0x00000020,
    VK_SUBGROUP_FEATURE_CLUSTERED_BIT = 0x00000040,
    VK_SUBGROUP_FEATURE_QUAD_BIT = 0x00000080,
} VkSubgroupFeatureFlagBits;
```

- `VK_SUBGROUP_FEATURE_BASIC_BIT` specifies the device will accept SPIR-V shader modules containing the `GroupNonUniform` capability.
- `VK_SUBGROUP_FEATURE_VOTE_BIT` specifies the device will accept SPIR-V shader modules containing the `GroupNonUniformVote` capability.
- `VK_SUBGROUP_FEATURE_ARITHMETIC_BIT` specifies the device will accept SPIR-V shader modules containing the `GroupNonUniformArithmetic` capability.
- `VK_SUBGROUP_FEATURE_BALLOT_BIT` specifies the device will accept SPIR-V shader modules containing the `GroupNonUniformBallot` capability.
- `VK_SUBGROUP_FEATURE_SHUFFLE_BIT` specifies the device will accept SPIR-V shader modules containing the `GroupNonUniformShuffle` capability.
- `VK_SUBGROUP_FEATURE_SHUFFLE_RELATIVE_BIT` specifies the device will accept SPIR-V shader modules containing the `GroupNonUniformShuffleRelative` capability.
- `VK_SUBGROUP_FEATURE_CLUSTERED_BIT` specifies the device will accept SPIR-V shader modules containing the `GroupNonUniformClustered` capability.
- `VK_SUBGROUP_FEATURE_QUAD_BIT` specifies the device will accept SPIR-V shader modules containing the `GroupNonUniformQuad` capability.

```
// Provided by VK_VERSION_1_1
typedef VkFlags VkSubgroupFeatureFlags;
```

`VkSubgroupFeatureFlags` is a bitmask type for setting a mask of zero or more VkSubgroupFeatureFlagBits.

The VkPhysicalDeviceSubgroupSizeControlProperties structure is defined as:

```
// Provided by VK_VERSION_1_3
typedef struct VkPhysicalDeviceSubgroupSizeControlProperties {
    VkStructureType       sType;
    void*                 pNext;
    uint32_t              minSubgroupSize;
    uint32_t              maxSubgroupSize;
    uint32_t              maxComputeWorkgroupSubgroups;
    VkShaderStageFlags    requiredSubgroupSizeStages;
} VkPhysicalDeviceSubgroupSizeControlProperties;
```

- sType is a VkStructureType value identifying this structure.
- pNext is NULL or a pointer to a structure extending this structure.
- minSubgroupSize is the minimum subgroup size supported by this device. minSubgroupSize is at least one if any of the physical device's queues support VK_QUEUE_GRAPHICS_BIT or VK_QUEUE_COMPUTE_BIT. minSubgroupSize is a power-of-two. minSubgroupSize is less than or equal to maxSubgroupSize. minSubgroupSize is less than or equal to subgroupSize.
- maxSubgroupSize is the maximum subgroup size supported by this device. maxSubgroupSize is at least one if any of the physical device's queues support VK_QUEUE_GRAPHICS_BIT or VK_QUEUE_COMPUTE_BIT. maxSubgroupSize is a power-of-two. maxSubgroupSize is greater than or equal to minSubgroupSize. maxSubgroupSize is greater than or equal to subgroupSize.
- maxComputeWorkgroupSubgroups is the maximum number of subgroups supported by the implementation within a workgroup.
- requiredSubgroupSizeStages is a bitfield of what shader stages support having a required subgroup size specified.

If the VkPhysicalDeviceSubgroupSizeControlProperties structure is included in the pNext chain of the VkPhysicalDeviceProperties2 structure passed to vkGetPhysicalDeviceProperties2, it is filled in with each corresponding implementation-dependent property.

If VkPhysicalDeviceSubgroupProperties::supportedOperations includes VK_SUBGROUP_FEATURE_QUAD_BIT, minSubgroupSize **must** be greater than or equal to 4.

Valid Usage (Implicit)

- VUID-VkPhysicalDeviceSubgroupSizeControlProperties-sType-sType
  sType **must** be VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_SUBGROUP_SIZE_CONTROL_PROPERTIES

The VkPhysicalDeviceSamplerFilterMinmaxProperties structure is defined as:

```
// Provided by VK_VERSION_1_2
typedef struct VkPhysicalDeviceSamplerFilterMinmaxProperties {
    VkStructureType    sType;
    void*              pNext;
    VkBool32           filterMinmaxSingleComponentFormats;
    VkBool32           filterMinmaxImageComponentMapping;
} VkPhysicalDeviceSamplerFilterMinmaxProperties;
```

- `sType` is a VkStructureType value identifying this structure.
- `pNext` is `NULL` or a pointer to a structure extending this structure.
- `filterMinmaxSingleComponentFormats` is a boolean value indicating whether a minimum set of required formats support min/max filtering.
- `filterMinmaxImageComponentMapping` is a boolean value indicating whether the implementation supports non-identity component mapping of the image when doing min/max filtering.

If the `VkPhysicalDeviceSamplerFilterMinmaxProperties` structure is included in the `pNext` chain of the VkPhysicalDeviceProperties2 structure passed to vkGetPhysicalDeviceProperties2, it is filled in with each corresponding implementation-dependent property.

If `filterMinmaxSingleComponentFormats` is `VK_TRUE`, the following formats **must** support the `VK_FORMAT_FEATURE_SAMPLED_IMAGE_FILTER_MINMAX_BIT` feature with `VK_IMAGE_TILING_OPTIMAL`, if they support `VK_FORMAT_FEATURE_SAMPLED_IMAGE_BIT`:

- `VK_FORMAT_R8_UNORM`
- `VK_FORMAT_R8_SNORM`
- `VK_FORMAT_R16_UNORM`
- `VK_FORMAT_R16_SNORM`
- `VK_FORMAT_R16_SFLOAT`
- `VK_FORMAT_R32_SFLOAT`
- `VK_FORMAT_D16_UNORM`
- `VK_FORMAT_X8_D24_UNORM_PACK32`
- `VK_FORMAT_D32_SFLOAT`
- `VK_FORMAT_D16_UNORM_S8_UINT`
- `VK_FORMAT_D24_UNORM_S8_UINT`
- `VK_FORMAT_D32_SFLOAT_S8_UINT`

If the format is a depth/stencil format, this bit only specifies that the depth aspect (not the stencil aspect) of an image of this format supports min/max filtering, and that min/max filtering of the depth aspect is supported when depth compare is disabled in the sampler.

If `filterMinmaxImageComponentMapping` is `VK_FALSE` the component mapping of the image view used with min/max filtering **must** have been created with the `r` component set to the identity swizzle.

Only the r component of the sampled image value is defined and the other component values are undefined. If filterMinmaxImageComponentMapping is VK_TRUE this restriction does not apply and image component mapping works as normal.

Valid Usage (Implicit)

- VUID-VkPhysicalDeviceSamplerFilterMinmaxProperties-sType-sType
  sType **must** be VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_SAMPLER_FILTER_MINMAX_PROPERTIES

The VkPhysicalDeviceProtectedMemoryProperties structure is defined as:

```
// Provided by VK_VERSION_1_1
typedef struct VkPhysicalDeviceProtectedMemoryProperties {
    VkStructureType    sType;
    void*              pNext;
    VkBool32           protectedNoFault;
} VkPhysicalDeviceProtectedMemoryProperties;
```

- sType is a VkStructureType value identifying this structure.
- pNext is NULL or a pointer to a structure extending this structure.
- protectedNoFault specifies how an implementation behaves when an application attempts to write to unprotected memory in a protected queue operation, read from protected memory in an unprotected queue operation, or perform a query in a protected queue operation. If this limit is VK_TRUE, such writes will be discarded or have undefined values written, reads and queries will return undefined values. If this limit is VK_FALSE, applications **must** not perform these operations. See Protected Memory Access Rules for more information.

If the VkPhysicalDeviceProtectedMemoryProperties structure is included in the pNext chain of the VkPhysicalDeviceProperties2 structure passed to vkGetPhysicalDeviceProperties2, it is filled in with each corresponding implementation-dependent property.

Valid Usage (Implicit)

- VUID-VkPhysicalDeviceProtectedMemoryProperties-sType-sType
  sType **must** be VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_PROTECTED_MEMORY_PROPERTIES

The VkPhysicalDeviceMaintenance3Properties structure is defined as:

```
// Provided by VK_VERSION_1_1
typedef struct VkPhysicalDeviceMaintenance3Properties {
    VkStructureType    sType;
    void*              pNext;
    uint32_t           maxPerSetDescriptors;
    VkDeviceSize       maxMemoryAllocationSize;
} VkPhysicalDeviceMaintenance3Properties;
```

- `sType` is a VkStructureType value identifying this structure.
- `pNext` is `NULL` or a pointer to a structure extending this structure.
- `maxPerSetDescriptors` is a maximum number of descriptors (summed over all descriptor types) in a single descriptor set that is guaranteed to satisfy any implementation-dependent constraints on the size of a descriptor set itself. Applications **can** query whether a descriptor set that goes beyond this limit is supported using vkGetDescriptorSetLayoutSupport.
- `maxMemoryAllocationSize` is the maximum size of a memory allocation that **can** be created, even if there is more space available in the heap.

If the `VkPhysicalDeviceMaintenance3Properties` structure is included in the `pNext` chain of the VkPhysicalDeviceProperties2 structure passed to vkGetPhysicalDeviceProperties2, it is filled in with each corresponding implementation-dependent property.

Valid Usage (Implicit)

- VUID-VkPhysicalDeviceMaintenance3Properties-sType-sType
  `sType` **must** be `VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_MAINTENANCE_3_PROPERTIES`

The `VkPhysicalDeviceMaintenance4Properties` structure is defined as:

```
// Provided by VK_VERSION_1_3
typedef struct VkPhysicalDeviceMaintenance4Properties {
    VkStructureType    sType;
    void*              pNext;
    VkDeviceSize       maxBufferSize;
} VkPhysicalDeviceMaintenance4Properties;
```

- `sType` is a VkStructureType value identifying this structure.
- `pNext` is `NULL` or a pointer to a structure extending this structure.
- `maxBufferSize` is the maximum size `VkBuffer` that **can** be created.

If the `VkPhysicalDeviceMaintenance4Properties` structure is included in the `pNext` chain of the VkPhysicalDeviceProperties2 structure passed to vkGetPhysicalDeviceProperties2, it is filled in with each corresponding implementation-dependent property.

Valid Usage (Implicit)

- VUID-VkPhysicalDeviceMaintenance4Properties-sType-sType
  `sType` **must** be `VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_MAINTENANCE_4_PROPERTIES`

The `VkPhysicalDeviceDescriptorIndexingProperties` structure is defined as:

```
// Provided by VK_VERSION_1_2
typedef struct VkPhysicalDeviceDescriptorIndexingProperties {
    VkStructureType    sType;
    void*              pNext;
    uint32_t           maxUpdateAfterBindDescriptorsInAllPools;
    VkBool32           shaderUniformBufferArrayNonUniformIndexingNative;
    VkBool32           shaderSampledImageArrayNonUniformIndexingNative;
    VkBool32           shaderStorageBufferArrayNonUniformIndexingNative;
    VkBool32           shaderStorageImageArrayNonUniformIndexingNative;
    VkBool32           shaderInputAttachmentArrayNonUniformIndexingNative;
    VkBool32           robustBufferAccessUpdateAfterBind;
    VkBool32           quadDivergentImplicitLod;
    uint32_t           maxPerStageDescriptorUpdateAfterBindSamplers;
    uint32_t           maxPerStageDescriptorUpdateAfterBindUniformBuffers;
    uint32_t           maxPerStageDescriptorUpdateAfterBindStorageBuffers;
    uint32_t           maxPerStageDescriptorUpdateAfterBindSampledImages;
    uint32_t           maxPerStageDescriptorUpdateAfterBindStorageImages;
    uint32_t           maxPerStageDescriptorUpdateAfterBindInputAttachments;
    uint32_t           maxPerStageUpdateAfterBindResources;
    uint32_t           maxDescriptorSetUpdateAfterBindSamplers;
    uint32_t           maxDescriptorSetUpdateAfterBindUniformBuffers;
    uint32_t           maxDescriptorSetUpdateAfterBindUniformBuffersDynamic;
    uint32_t           maxDescriptorSetUpdateAfterBindStorageBuffers;
    uint32_t           maxDescriptorSetUpdateAfterBindStorageBuffersDynamic;
    uint32_t           maxDescriptorSetUpdateAfterBindSampledImages;
    uint32_t           maxDescriptorSetUpdateAfterBindStorageImages;
    uint32_t           maxDescriptorSetUpdateAfterBindInputAttachments;
} VkPhysicalDeviceDescriptorIndexingProperties;
```

- `sType` is a VkStructureType value identifying this structure.
- `pNext` is `NULL` or a pointer to a structure extending this structure.
- `maxUpdateAfterBindDescriptorsInAllPools` is the maximum number of descriptors (summed over all descriptor types) that **can** be created across all pools that are created with the `VK_DESCRIPTOR_POOL_CREATE_UPDATE_AFTER_BIND_BIT` bit set. Pool creation **may** fail when this limit is exceeded, or when the space this limit represents is unable to satisfy a pool creation due to fragmentation.
- `shaderUniformBufferArrayNonUniformIndexingNative` is a boolean value indicating whether uniform buffer descriptors natively support non-uniform indexing. If this is `VK_FALSE`, then a single dynamic instance of an instruction that non-uniformly indexes an array of uniform

buffers **may** execute multiple times in order to access all the descriptors.

- `shaderSampledImageArrayNonUniformIndexingNative` is a boolean value indicating whether sampler and image descriptors natively support non-uniform indexing. If this is `VK_FALSE`, then a single dynamic instance of an instruction that non-uniformly indexes an array of samplers or images **may** execute multiple times in order to access all the descriptors.
- `shaderStorageBufferArrayNonUniformIndexingNative` is a boolean value indicating whether storage buffer descriptors natively support non-uniform indexing. If this is `VK_FALSE`, then a single dynamic instance of an instruction that non-uniformly indexes an array of storage buffers **may** execute multiple times in order to access all the descriptors.
- `shaderStorageImageArrayNonUniformIndexingNative` is a boolean value indicating whether storage image descriptors natively support non-uniform indexing. If this is `VK_FALSE`, then a single dynamic instance of an instruction that non-uniformly indexes an array of storage images **may** execute multiple times in order to access all the descriptors.
- `shaderInputAttachmentArrayNonUniformIndexingNative` is a boolean value indicating whether input attachment descriptors natively support non-uniform indexing. If this is `VK_FALSE`, then a single dynamic instance of an instruction that non-uniformly indexes an array of input attachments **may** execute multiple times in order to access all the descriptors.
- `robustBufferAccessUpdateAfterBind` is a boolean value indicating whether `robustBufferAccess` **can** be enabled on a device simultaneously with `descriptorBindingUniformBufferUpdateAfterBind`, `descriptorBindingStorageBufferUpdateAfterBind`, `descriptorBindingUniformTexelBufferUpdateAfterBind`, and/or `descriptorBindingStorageTexelBufferUpdateAfterBind`. If this is `VK_FALSE`, then either `robustBufferAccess` **must** be disabled or all of these update-after-bind features **must** be disabled.
- `quadDivergentImplicitLod` is a boolean value indicating whether implicit LOD calculations for image operations have well-defined results when the image and/or sampler objects used for the instruction are not uniform within a quad. See Derivative Image Operations.
- `maxPerStageDescriptorUpdateAfterBindSamplers` is similar to `maxPerStageDescriptorSamplers` but counts descriptors from descriptor sets created with or without the `VK_DESCRIPTOR_SET_LAYOUT_CREATE_UPDATE_AFTER_BIND_POOL_BIT` bit set.
- `maxPerStageDescriptorUpdateAfterBindUniformBuffers` is similar to `maxPerStageDescriptorUniformBuffers` but counts descriptors from descriptor sets created with or without the `VK_DESCRIPTOR_SET_LAYOUT_CREATE_UPDATE_AFTER_BIND_POOL_BIT` bit set.
- `maxPerStageDescriptorUpdateAfterBindStorageBuffers` is similar to `maxPerStageDescriptorStorageBuffers` but counts descriptors from descriptor sets created with or without the `VK_DESCRIPTOR_SET_LAYOUT_CREATE_UPDATE_AFTER_BIND_POOL_BIT` bit set.
- `maxPerStageDescriptorUpdateAfterBindSampledImages` is similar to `maxPerStageDescriptorSampledImages` but counts descriptors from descriptor sets created with or without the `VK_DESCRIPTOR_SET_LAYOUT_CREATE_UPDATE_AFTER_BIND_POOL_BIT` bit set.
- `maxPerStageDescriptorUpdateAfterBindStorageImages` is similar to `maxPerStageDescriptorStorageImages` but counts descriptors from descriptor sets created with or without the `VK_DESCRIPTOR_SET_LAYOUT_CREATE_UPDATE_AFTER_BIND_POOL_BIT` bit set.
- `maxPerStageDescriptorUpdateAfterBindInputAttachments` is similar to `maxPerStageDescriptorInputAttachments` but counts descriptors from descriptor sets created with

or without the VK_DESCRIPTOR_SET_LAYOUT_CREATE_UPDATE_AFTER_BIND_POOL_BIT bit set.

- maxPerStageUpdateAfterBindResources is similar to maxPerStageResources but counts descriptors from descriptor sets created with or without the VK_DESCRIPTOR_SET_LAYOUT_CREATE_UPDATE_AFTER_BIND_POOL_BIT bit set.
- maxDescriptorSetUpdateAfterBindSamplers is similar to maxDescriptorSetSamplers but counts descriptors from descriptor sets created with or without the VK_DESCRIPTOR_SET_LAYOUT_CREATE_UPDATE_AFTER_BIND_POOL_BIT bit set.
- maxDescriptorSetUpdateAfterBindUniformBuffers is similar to maxDescriptorSetUniformBuffers but counts descriptors from descriptor sets created with or without the VK_DESCRIPTOR_SET_LAYOUT_CREATE_UPDATE_AFTER_BIND_POOL_BIT bit set.
- maxDescriptorSetUpdateAfterBindUniformBuffersDynamic is similar to maxDescriptorSetUniformBuffersDynamic but counts descriptors from descriptor sets created with or without the VK_DESCRIPTOR_SET_LAYOUT_CREATE_UPDATE_AFTER_BIND_POOL_BIT bit set. While an application **can** allocate dynamic uniform buffer descriptors from a pool created with the VK_DESCRIPTOR_SET_LAYOUT_CREATE_UPDATE_AFTER_BIND_POOL_BIT, bindings for these descriptors **must** not be present in any descriptor set layout that includes bindings created with VK_DESCRIPTOR_BINDING_UPDATE_AFTER_BIND_BIT.
- maxDescriptorSetUpdateAfterBindStorageBuffers is similar to maxDescriptorSetStorageBuffers but counts descriptors from descriptor sets created with or without the VK_DESCRIPTOR_SET_LAYOUT_CREATE_UPDATE_AFTER_BIND_POOL_BIT bit set.
- maxDescriptorSetUpdateAfterBindStorageBuffersDynamic is similar to maxDescriptorSetStorageBuffersDynamic but counts descriptors from descriptor sets created with or without the VK_DESCRIPTOR_SET_LAYOUT_CREATE_UPDATE_AFTER_BIND_POOL_BIT bit set. While an application **can** allocate dynamic storage buffer descriptors from a pool created with the VK_DESCRIPTOR_SET_LAYOUT_CREATE_UPDATE_AFTER_BIND_POOL_BIT, bindings for these descriptors **must** not be present in any descriptor set layout that includes bindings created with VK_DESCRIPTOR_BINDING_UPDATE_AFTER_BIND_BIT.
- maxDescriptorSetUpdateAfterBindSampledImages is similar to maxDescriptorSetSampledImages but counts descriptors from descriptor sets created with or without the VK_DESCRIPTOR_SET_LAYOUT_CREATE_UPDATE_AFTER_BIND_POOL_BIT bit set.
- maxDescriptorSetUpdateAfterBindStorageImages is similar to maxDescriptorSetStorageImages but counts descriptors from descriptor sets created with or without the VK_DESCRIPTOR_SET_LAYOUT_CREATE_UPDATE_AFTER_BIND_POOL_BIT bit set.
- maxDescriptorSetUpdateAfterBindInputAttachments is similar to maxDescriptorSetInputAttachments but counts descriptors from descriptor sets created with or without the VK_DESCRIPTOR_SET_LAYOUT_CREATE_UPDATE_AFTER_BIND_POOL_BIT bit set.

If the VkPhysicalDeviceDescriptorIndexingProperties structure is included in the pNext chain of the VkPhysicalDeviceProperties2 structure passed to vkGetPhysicalDeviceProperties2, it is filled in with each corresponding implementation-dependent property.

Valid Usage (Implicit)

- VUID-VkPhysicalDeviceDescriptorIndexingProperties-sType-sType

sType **must** be VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_DESCRIPTOR_INDEXING_PROPERTIES

The VkPhysicalDeviceInlineUniformBlockProperties structure is defined as:

```
// Provided by VK_VERSION_1_3
typedef struct VkPhysicalDeviceInlineUniformBlockProperties {
    VkStructureType    sType;
    void*              pNext;
    uint32_t           maxInlineUniformBlockSize;
    uint32_t           maxPerStageDescriptorInlineUniformBlocks;
    uint32_t           maxPerStageDescriptorUpdateAfterBindInlineUniformBlocks;
    uint32_t           maxDescriptorSetInlineUniformBlocks;
    uint32_t           maxDescriptorSetUpdateAfterBindInlineUniformBlocks;
} VkPhysicalDeviceInlineUniformBlockProperties;
```

- sType is a VkStructureType value identifying this structure.
- pNext is NULL or a pointer to a structure extending this structure.
- maxInlineUniformBlockSize is the maximum size in bytes of an inline uniform block binding.
- maxPerStageDescriptorInlineUniformBlocks is the maximum number of inline uniform block bindings that **can** be accessible to a single shader stage in a pipeline layout. Descriptor bindings with a descriptor type of VK_DESCRIPTOR_TYPE_INLINE_UNIFORM_BLOCK count against this limit. Only descriptor bindings in descriptor set layouts created without the VK_DESCRIPTOR_SET_LAYOUT_CREATE_UPDATE_AFTER_BIND_POOL_BIT bit set count against this limit.
- maxPerStageDescriptorUpdateAfterBindInlineUniformBlocks is similar to maxPerStageDescriptorInlineUniformBlocks but counts descriptor bindings from descriptor sets created with or without the VK_DESCRIPTOR_SET_LAYOUT_CREATE_UPDATE_AFTER_BIND_POOL_BIT bit set.
- maxDescriptorSetInlineUniformBlocks is the maximum number of inline uniform block bindings that **can** be included in descriptor bindings in a pipeline layout across all pipeline shader stages and descriptor set numbers. Descriptor bindings with a descriptor type of VK_DESCRIPTOR_TYPE_INLINE_UNIFORM_BLOCK count against this limit. Only descriptor bindings in descriptor set layouts created without the VK_DESCRIPTOR_SET_LAYOUT_CREATE_UPDATE_AFTER_BIND_POOL_BIT bit set count against this limit.
- maxDescriptorSetUpdateAfterBindInlineUniformBlocks is similar to maxDescriptorSetInlineUniformBlocks but counts descriptor bindings from descriptor sets created with or without the VK_DESCRIPTOR_SET_LAYOUT_CREATE_UPDATE_AFTER_BIND_POOL_BIT bit set.

If the VkPhysicalDeviceInlineUniformBlockProperties structure is included in the pNext chain of the VkPhysicalDeviceProperties2 structure passed to vkGetPhysicalDeviceProperties2, it is filled in with each corresponding implementation-dependent property.

Valid Usage (Implicit)

- VUID-VkPhysicalDeviceInlineUniformBlockProperties-sType-sType
  sType **must** be VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_INLINE_UNIFORM_BLOCK_PROPERTIES

The VkPhysicalDeviceDepthStencilResolveProperties structure is defined as:

```
// Provided by VK_VERSION_1_2
typedef struct VkPhysicalDeviceDepthStencilResolveProperties {
    VkStructureType       sType;
    void*                 pNext;
    VkResolveModeFlags    supportedDepthResolveModes;
    VkResolveModeFlags    supportedStencilResolveModes;
    VkBool32              independentResolveNone;
    VkBool32              independentResolve;
} VkPhysicalDeviceDepthStencilResolveProperties;
```

- sType is a VkStructureType value identifying this structure.
- pNext is NULL or a pointer to a structure extending this structure.
- supportedDepthResolveModes is a bitmask of VkResolveModeFlagBits indicating the set of supported depth resolve modes. VK_RESOLVE_MODE_SAMPLE_ZERO_BIT **must** be included in the set but implementations **may** support additional modes.
- supportedStencilResolveModes is a bitmask of VkResolveModeFlagBits indicating the set of supported stencil resolve modes. VK_RESOLVE_MODE_SAMPLE_ZERO_BIT **must** be included in the set but implementations **may** support additional modes. VK_RESOLVE_MODE_AVERAGE_BIT **must** not be included in the set.
- independentResolveNone is VK_TRUE if the implementation supports setting the depth and stencil resolve modes to different values when one of those modes is VK_RESOLVE_MODE_NONE. Otherwise the implementation only supports setting both modes to the same value.
- independentResolve is VK_TRUE if the implementation supports all combinations of the supported depth and stencil resolve modes, including setting either depth or stencil resolve mode to VK_RESOLVE_MODE_NONE. An implementation that supports independentResolve **must** also support independentResolveNone.

If the VkPhysicalDeviceDepthStencilResolveProperties structure is included in the pNext chain of the VkPhysicalDeviceProperties2 structure passed to vkGetPhysicalDeviceProperties2, it is filled in with each corresponding implementation-dependent property.

Valid Usage (Implicit)

- VUID-VkPhysicalDeviceDepthStencilResolveProperties-sType-sType
  sType **must** be VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_DEPTH_STENCIL_RESOLVE_PROPERTIES

The VkPhysicalDeviceTexelBufferAlignmentProperties structure is defined as:

```
// Provided by VK_VERSION_1_3
typedef struct VkPhysicalDeviceTexelBufferAlignmentProperties {
    VkStructureType    sType;
    void*              pNext;
    VkDeviceSize       storageTexelBufferOffsetAlignmentBytes;
    VkBool32           storageTexelBufferOffsetSingleTexelAlignment;
    VkDeviceSize       uniformTexelBufferOffsetAlignmentBytes;
    VkBool32           uniformTexelBufferOffsetSingleTexelAlignment;
} VkPhysicalDeviceTexelBufferAlignmentProperties;
```

- `sType` is a VkStructureType value identifying this structure.
- `pNext` is `NULL` or a pointer to a structure extending this structure.
- `storageTexelBufferOffsetAlignmentBytes` is a byte alignment that is sufficient for a storage texel buffer of any format. The value **must** be a power of two.
- `storageTexelBufferOffsetSingleTexelAlignment` indicates whether single texel alignment is sufficient for a storage texel buffer of any format.
- `uniformTexelBufferOffsetAlignmentBytes` is a byte alignment that is sufficient for a uniform texel buffer of any format. The value **must** be a power of two.
- `uniformTexelBufferOffsetSingleTexelAlignment` indicates whether single texel alignment is sufficient for a uniform texel buffer of any format.

If the `VkPhysicalDeviceTexelBufferAlignmentProperties` structure is included in the `pNext` chain of the VkPhysicalDeviceProperties2 structure passed to vkGetPhysicalDeviceProperties2, it is filled in with each corresponding implementation-dependent property.

If the single texel alignment property is `VK_FALSE`, then the buffer view's offset **must** be aligned to the corresponding byte alignment value. If the single texel alignment property is `VK_TRUE`, then the buffer view's offset **must** be aligned to the lesser of the corresponding byte alignment value or the size of a single texel, based on VkBufferViewCreateInfo::`format`. If the size of a single texel is a multiple of three bytes, then the size of a single component of the format is used instead.

These limits **must** not advertise a larger alignment than the required maximum minimum value of VkPhysicalDeviceLimits::`minTexelBufferOffsetAlignment`, for any format that supports use as a texel buffer.

Valid Usage (Implicit)

- VUID-VkPhysicalDeviceTexelBufferAlignmentProperties-sType-sType
  `sType` **must** be `VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_TEXEL_BUFFER_ALIGNMENT_PROPERTIES`

The `VkPhysicalDeviceTimelineSemaphoreProperties` structure is defined as:

```
// Provided by VK_VERSION_1_2
typedef struct VkPhysicalDeviceTimelineSemaphoreProperties {
    VkStructureType    sType;
    void*              pNext;
    uint64_t           maxTimelineSemaphoreValueDifference;
} VkPhysicalDeviceTimelineSemaphoreProperties;
```

- `sType` is a VkStructureType value identifying this structure.
- `pNext` is `NULL` or a pointer to a structure extending this structure.
- `maxTimelineSemaphoreValueDifference` indicates the maximum difference allowed by the implementation between the current value of a timeline semaphore and any pending signal or wait operations.

If the `VkPhysicalDeviceTimelineSemaphoreProperties` structure is included in the `pNext` chain of the VkPhysicalDeviceProperties2 structure passed to vkGetPhysicalDeviceProperties2, it is filled in with each corresponding implementation-dependent property.

Valid Usage (Implicit)

- VUID-VkPhysicalDeviceTimelineSemaphoreProperties-sType-sType
  `sType` **must** be `VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_TIMELINE_SEMAPHORE_PROPERTIES`

33.1. Limit Requirements

The following table specifies the **required** minimum/maximum for all Vulkan graphics implementations. Where a limit corresponds to a fine-grained device feature which is **optional**, the feature name is listed with two **required** limits, one when the feature is supported and one when it is not supported. If an implementation supports a feature, the limits reported are the same whether or not the feature is enabled.

Table 32. Required Limit Types

Type	Limit	Feature
`uint32_t`	`maxImageDimension1D`	-
`uint32_t`	`maxImageDimension2D`	-
`uint32_t`	`maxImageDimension3D`	-
`uint32_t`	`maxImageDimensionCube`	-
`uint32_t`	`maxImageArrayLayers`	-
`uint32_t`	`maxTexelBufferElements`	-
`uint32_t`	`maxUniformBufferRange`	-
`uint32_t`	`maxStorageBufferRange`	-
`uint32_t`	`maxPushConstantsSize`	-

Type	Limit	Feature
uint32_t	maxMemoryAllocationCount	-
uint32_t	maxSamplerAllocationCount	-
VkDeviceSize	bufferImageGranularity	-
VkDeviceSize	sparseAddressSpaceSize	sparseBinding
uint32_t	maxBoundDescriptorSets	-
uint32_t	maxPerStageDescriptorSamplers	-
uint32_t	maxPerStageDescriptorUniformBuffers	-
uint32_t	maxPerStageDescriptorStorageBuffers	-
uint32_t	maxPerStageDescriptorSampledImages	-
uint32_t	maxPerStageDescriptorStorageImages	-
uint32_t	maxPerStageDescriptorInputAttachments	-
uint32_t	maxPerStageResources	-
uint32_t	maxDescriptorSetSamplers	-
uint32_t	maxDescriptorSetUniformBuffers	-
uint32_t	maxDescriptorSetUniformBuffersDynamic	-
uint32_t	maxDescriptorSetStorageBuffers	-
uint32_t	maxDescriptorSetStorageBuffersDynamic	-
uint32_t	maxDescriptorSetSampledImages	-
uint32_t	maxDescriptorSetStorageImages	-
uint32_t	maxDescriptorSetInputAttachments	-
uint32_t	maxVertexInputAttributes	-
uint32_t	maxVertexInputBindings	-
uint32_t	maxVertexInputAttributeOffset	-
uint32_t	maxVertexInputBindingStride	-
uint32_t	maxVertexOutputComponents	-
uint32_t	maxTessellationGenerationLevel	tessellationShader
uint32_t	maxTessellationPatchSize	tessellationShader
uint32_t	maxTessellationControlPerVertexInputComponents	tessellationShader
uint32_t	maxTessellationControlPerVertexOutputComponents	tessellationShader
uint32_t	maxTessellationControlPerPatchOutputComponents	tessellationShader
uint32_t	maxTessellationControlTotalOutputComponents	tessellationShader
uint32_t	maxTessellationEvaluationInputComponents	tessellationShader
uint32_t	maxTessellationEvaluationOutputComponents	tessellationShader
uint32_t	maxGeometryShaderInvocations	geometryShader

Type	Limit	Feature
uint32_t	maxGeometryInputComponents	geometryShader
uint32_t	maxGeometryOutputComponents	geometryShader
uint32_t	maxGeometryOutputVertices	geometryShader
uint32_t	maxGeometryTotalOutputComponents	geometryShader
uint32_t	maxFragmentInputComponents	-
uint32_t	maxFragmentOutputAttachments	-
uint32_t	maxFragmentDualSrcAttachments	dualSrcBlend
uint32_t	maxFragmentCombinedOutputResources	-
uint32_t	maxComputeSharedMemorySize	-
3 × uint32_t	maxComputeWorkGroupCount	-
uint32_t	maxComputeWorkGroupInvocations	-
3 × uint32_t	maxComputeWorkGroupSize	-
uint32_t	subPixelPrecisionBits	-
uint32_t	subTexelPrecisionBits	-
uint32_t	mipmapPrecisionBits	-
uint32_t	maxDrawIndexedIndexValue	fullDrawIndexUint32
uint32_t	maxDrawIndirectCount	multiDrawIndirect
float	maxSamplerLodBias	-
float	maxSamplerAnisotropy	samplerAnisotropy
uint32_t	maxViewports	multiViewport
2 × uint32_t	maxViewportDimensions	-
2 × float	viewportBoundsRange	-
uint32_t	viewportSubPixelBits	-
size_t	minMemoryMapAlignment	-
VkDeviceSize	minTexelBufferOffsetAlignment	-
VkDeviceSize	minUniformBufferOffsetAlignment	-
VkDeviceSize	minStorageBufferOffsetAlignment	-
int32_t	minTexelOffset	-
uint32_t	maxTexelOffset	-
int32_t	minTexelGatherOffset	shaderImageGatherExtended
uint32_t	maxTexelGatherOffset	shaderImageGatherExtended
float	minInterpolationOffset	sampleRateShading
float	maxInterpolationOffset	sampleRateShading
uint32_t	subPixelInterpolationOffsetBits	sampleRateShading
uint32_t	maxFramebufferWidth	-

Type	Limit	Feature
uint32_t	maxFramebufferHeight	-
uint32_t	maxFramebufferLayers	-
VkSampleCountFlags	framebufferColorSampleCounts	-
VkSampleCountFlags	framebufferIntegerColorSampleCounts	-
VkSampleCountFlags	framebufferDepthSampleCounts	-
VkSampleCountFlags	framebufferStencilSampleCounts	-
VkSampleCountFlags	framebufferNoAttachmentsSampleCounts	-
uint32_t	maxColorAttachments	-
VkSampleCountFlags	sampledImageColorSampleCounts	-
VkSampleCountFlags	sampledImageIntegerSampleCounts	-
VkSampleCountFlags	sampledImageDepthSampleCounts	-
VkSampleCountFlags	sampledImageStencilSampleCounts	-
VkSampleCountFlags	storageImageSampleCounts	shaderStorageImageMultisample
uint32_t	maxSampleMaskWords	-
VkBool32	timestampComputeAndGraphics	-
float	timestampPeriod	-
uint32_t	maxClipDistances	shaderClipDistance
uint32_t	maxCullDistances	shaderCullDistance
uint32_t	maxCombinedClipAndCullDistances	shaderCullDistance
uint32_t	discreteQueuePriorities	-
2 × float	pointSizeRange	largePoints
2 × float	lineWidthRange	wideLines
float	pointSizeGranularity	largePoints
float	lineWidthGranularity	wideLines
VkBool32	strictLines	-
VkBool32	standardSampleLocations	-
VkDeviceSize	optimalBufferCopyOffsetAlignment	-

Type	Limit	Feature
VkDeviceSize	optimalBufferCopyRowPitchAlignment	-
VkDeviceSize	nonCoherentAtomSize	-
VkBool32	filterMinmaxSingleComponentFormats	samplerFilterMinmax
VkBool32	filterMinmaxImageComponentMapping	samplerFilterMinmax
VkDeviceSize	maxBufferSize	maintenance4
uint32_t	maxUpdateAfterBindDescriptorsInAllPools	descriptorIndexing
VkBool32	shaderUniformBufferArrayNonUniformIndexingNative	-
VkBool32	shaderSampledImageArrayNonUniformIndexingNative	-
VkBool32	shaderStorageBufferArrayNonUniformIndexingNative	-
VkBool32	shaderStorageImageArrayNonUniformIndexingNative	-
VkBool32	shaderInputAttachmentArrayNonUniformIndexingNative	-
uint32_t	maxPerStageDescriptorUpdateAfterBindSamplers	descriptorIndexing
uint32_t	maxPerStageDescriptorUpdateAfterBindUniformBuffers	descriptorIndexing
uint32_t	maxPerStageDescriptorUpdateAfterBindStorageBuffers	descriptorIndexing
uint32_t	maxPerStageDescriptorUpdateAfterBindSampledImages	descriptorIndexing
uint32_t	maxPerStageDescriptorUpdateAfterBindStorageImages	descriptorIndexing
uint32_t	maxPerStageDescriptorUpdateAfterBindInputAttachments	descriptorIndexing
uint32_t	maxPerStageUpdateAfterBindResources	descriptorIndexing
uint32_t	maxDescriptorSetUpdateAfterBindSamplers	descriptorIndexing
uint32_t	maxDescriptorSetUpdateAfterBindUniformBuffers	descriptorIndexing
uint32_t	maxDescriptorSetUpdateAfterBindUniformBuffersDynamic	descriptorIndexing
uint32_t	maxDescriptorSetUpdateAfterBindStorageBuffers	descriptorIndexing
uint32_t	maxDescriptorSetUpdateAfterBindStorageBuffersDynamic	descriptorIndexing
uint32_t	maxDescriptorSetUpdateAfterBindSampledImages	descriptorIndexing
uint32_t	maxDescriptorSetUpdateAfterBindStorageImages	descriptorIndexing
uint32_t	maxDescriptorSetUpdateAfterBindInputAttachments	descriptorIndexing
uint32_t	maxInlineUniformBlockSize	inlineUniformBlock
uint32_t	maxPerStageDescriptorInlineUniformBlocks	inlineUniformBlock

Type	Limit	Feature
uint32_t	maxPerStageDescriptorUpdateAfterBindInlineUniformBlocks	inlineUniformBlock
uint32_t	maxDescriptorSetInlineUniformBlocks	inlineUniformBlock
uint32_t	maxDescriptorSetUpdateAfterBindInlineUniformBlocks	inlineUniformBlock
uint32_t	maxInlineUniformTotalSize	inlineUniformBlock
uint64_t	maxTimelineSemaphoreValueDifference	timelineSemaphore

Table 33. Required Limits

Limit	Unsupported Limit	Supported Limit	Limit Type[1]
maxImageDimension1D	-	4096	min
maxImageDimension2D	-	4096	min
maxImageDimension3D	-	256	min
maxImageDimensionCube	-	4096	min
maxImageArrayLayers	-	256	min
maxTexelBufferElements	-	65536	min
maxUniformBufferRange	-	16384	min
maxStorageBufferRange	-	2^{27}	min
maxPushConstantsSize	-	128	min
maxMemoryAllocationCount	-	4096	min
maxSamplerAllocationCount	-	4000	min
bufferImageGranularity	-	131072	max
sparseAddressSpaceSize	0	2^{31}	min
maxBoundDescriptorSets	-	4	min
maxPerStageDescriptorSamplers	-	16	min
maxPerStageDescriptorUniformBuffers	-	12	min
maxPerStageDescriptorStorageBuffers	-	4	min
maxPerStageDescriptorSampledImages	-	16	min
maxPerStageDescriptorStorageImages	-	4	min
maxPerStageDescriptorInputAttachments	-	4	min
maxPerStageResources	-	128 [2]	min
maxDescriptorSetSamplers	-	96 [8]	min, $n \times$ PerStage
maxDescriptorSetUniformBuffers	-	72 [8]	min, $n \times$ PerStage

Limit	Unsupported Limit	Supported Limit	Limit Type[1]
maxDescriptorSetUniformBuffersDynamic	-	8	min
maxDescriptorSetStorageBuffers	-	24 [8]	min, $n \times$ PerStage
maxDescriptorSetStorageBuffersDynamic	-	4	min
maxDescriptorSetSampledImages	-	96 [8]	min, $n \times$ PerStage
maxDescriptorSetStorageImages	-	24 [8]	min, $n \times$ PerStage
maxDescriptorSetInputAttachments	-	4	min
maxVertexInputAttributes	-	16	min
maxVertexInputBindings	-	16	min
maxVertexInputAttributeOffset	-	2047	min
maxVertexInputBindingStride	-	2048	min
maxVertexOutputComponents	-	64	min
maxTessellationGenerationLevel	0	64	min
maxTessellationPatchSize	0	32	min
maxTessellationControlPerVertexInputComponents	0	64	min
maxTessellationControlPerVertexOutputComponents	0	64	min
maxTessellationControlPerPatchOutputComponents	0	120	min
maxTessellationControlTotalOutputComponents	0	2048	min
maxTessellationEvaluationInputComponents	0	64	min
maxTessellationEvaluationOutputComponents	0	64	min
maxGeometryShaderInvocations	0	32	min
maxGeometryInputComponents	0	64	min
maxGeometryOutputComponents	0	64	min
maxGeometryOutputVertices	0	256	min
maxGeometryTotalOutputComponents	0	1024	min
maxFragmentInputComponents	-	64	min
maxFragmentOutputAttachments	-	4	min
maxFragmentDualSrcAttachments	0	1	min
maxFragmentCombinedOutputResources	-	4	min
maxComputeSharedMemorySize	-	16384	min
maxComputeWorkGroupCount	-	(65535,65535,65535)	min

Limit	Unsupported Limit	Supported Limit	Limit Type[1]
maxComputeWorkGroupInvocations	-	128	min
maxComputeWorkGroupSize	-	(128,128,64)	min
subPixelPrecisionBits	-	4	min
subTexelPrecisionBits	-	4	min
mipmapPrecisionBits	-	4	min
maxDrawIndexedIndexValue	2^{24}-1	2^{32}-1	min
maxDrawIndirectCount	1	2^{16}-1	min
maxSamplerLodBias	-	2	min
maxSamplerAnisotropy	1	16	min
maxViewports	1	16	min
maxViewportDimensions	-	(4096,4096) [3]	min
viewportBoundsRange	-	(-8192,8191) [4]	(max,min)
viewportSubPixelBits	-	0	min
minMemoryMapAlignment	-	64	min
minTexelBufferOffsetAlignment	-	256	max
minUniformBufferOffsetAlignment	-	256	max
minStorageBufferOffsetAlignment	-	256	max
minTexelOffset	-	-8	max
maxTexelOffset	-	7	min
minTexelGatherOffset	0	-8	max
maxTexelGatherOffset	0	7	min
minInterpolationOffset	0.0	-0.5 [5]	max
maxInterpolationOffset	0.0	0.5 - (1 ULP) [5]	min
subPixelInterpolationOffsetBits	0	4 [5]	min
maxFramebufferWidth	-	4096	min
maxFramebufferHeight	-	4096	min
maxFramebufferLayers	-	256	min
framebufferColorSampleCounts	-	(VK_SAMPLE_COUNT_1_BIT | VK_SAMPLE_COUNT_4_BIT)	min
framebufferIntegerColorSampleCounts	-	(VK_SAMPLE_COUNT_1_BIT)	min

Limit	Unsupported Limit	Supported Limit	Limit Type[1]
framebufferDepthSampleCounts	-	(VK_SAMPLE_COUNT_1_BIT | VK_SAMPLE_COUNT_4_BIT)	min
framebufferStencilSampleCounts	-	(VK_SAMPLE_COUNT_1_BIT | VK_SAMPLE_COUNT_4_BIT)	min
framebufferNoAttachmentsSampleCounts	-	(VK_SAMPLE_COUNT_1_BIT | VK_SAMPLE_COUNT_4_BIT)	min
maxColorAttachments	-	4	min
sampledImageColorSampleCounts	-	(VK_SAMPLE_COUNT_1_BIT | VK_SAMPLE_COUNT_4_BIT)	min
sampledImageIntegerSampleCounts	-	VK_SAMPLE_COUNT_1_BIT	min
sampledImageDepthSampleCounts	-	(VK_SAMPLE_COUNT_1_BIT | VK_SAMPLE_COUNT_4_BIT)	min
sampledImageStencilSampleCounts	-	(VK_SAMPLE_COUNT_1_BIT | VK_SAMPLE_COUNT_4_BIT)	min
storageImageSampleCounts	VK_SAMPLE_COUNT_1_BIT	(VK_SAMPLE_COUNT_1_BIT | VK_SAMPLE_COUNT_4_BIT)	min
maxSampleMaskWords	-	1	min
timestampComputeAndGraphics	-	-	implementation-dependent
timestampPeriod	-	-	duration
maxClipDistances	0	8	min
maxCullDistances	0	8	min
maxCombinedClipAndCullDistances	0	8	min
discreteQueuePriorities	-	2	min
pointSizeRange	(1.0,1.0)	(1.0,64.0 - ULP) [6]	(max,min)

Limit	Unsupported Limit	Supported Limit	Limit Type[1]
lineWidthRange	(1.0,1.0)	(1.0,8.0 - ULP) [7]	(max,min)
pointSizeGranularity	0.0	1.0 [6]	max, fixed point increment
lineWidthGranularity	0.0	1.0 [7]	max, fixed point increment
strictLines	-	-	implementation-dependent
standardSampleLocations	-	-	implementation-dependent
optimalBufferCopyOffsetAlignment	-	-	recommendation
optimalBufferCopyRowPitchAlignment	-	-	recommendation
nonCoherentAtomSize	-	256	max
maxMultiviewViewCount	-	6	min
maxMultiviewInstanceIndex	-	2^{27}-1	min
filterMinmaxSingleComponentFormats	-	-	implementation-dependent
filterMinmaxImageComponentMapping	-	-	implementation-dependent
maxPerSetDescriptors	-	1024	min
maxMemoryAllocationSize	-	2^{30}	min
maxBufferSize	-	2^{30}	min
maxUpdateAfterBindDescriptorsInAllPools	0	500000	min
shaderUniformBufferArrayNonUniformIndexingNative	-	false	implementation-dependent
shaderSampledImageArrayNonUniformIndexingNative	-	false	implementation-dependent
shaderStorageBufferArrayNonUniformIndexingNative	-	false	implementation-dependent
shaderStorageImageArrayNonUniformIndexingNative	-	false	implementation-dependent
shaderInputAttachmentArrayNonUniformIndexingNative	-	false	implementation-dependent
maxPerStageDescriptorUpdateAfterBindSamplers	0 [9]	500000 [9]	min

Limit	Unsupported Limit	Supported Limit	Limit Type[1]
maxPerStageDescriptorUpdateAfterBindUniformBuffers	0 [9]	12 [9]	min
maxPerStageDescriptorUpdateAfterBindStorageBuffers	0 [9]	500000 [9]	min
maxPerStageDescriptorUpdateAfterBindSampledImages	0 [9]	500000 [9]	min
maxPerStageDescriptorUpdateAfterBindStorageImages	0 [9]	500000 [9]	min
maxPerStageDescriptorUpdateAfterBindInputAttachments	0 [9]	4 [9]	min
maxPerStageUpdateAfterBindResources	0 [9]	500000 [9]	min
maxDescriptorSetUpdateAfterBindSamplers	0 [9]	500000 [9]	min
maxDescriptorSetUpdateAfterBindUniformBuffers	0 [9]	72 [8] [9]	min, $n \times$ PerStage
maxDescriptorSetUpdateAfterBindUniformBuffersDynamic	0 [9]	8 [9]	min
maxDescriptorSetUpdateAfterBindStorageBuffers	0 [9]	500000 [9]	min
maxDescriptorSetUpdateAfterBindStorageBuffersDynamic	0 [9]	4 [9]	min
maxDescriptorSetUpdateAfterBindSampledImages	0 [9]	500000 [9]	min
maxDescriptorSetUpdateAfterBindStorageImages	0 [9]	500000 [9]	min
maxDescriptorSetUpdateAfterBindInputAttachments	0 [9]	4 [9]	min
maxInlineUniformBlockSize	-	256	min
maxPerStageDescriptorInlineUniformBlocks	-	4	min
maxPerStageDescriptorUpdateAfterBindInlineUniformBlocks	-	4	min
maxDescriptorSetInlineUniformBlocks	-	4	min
maxDescriptorSetUpdateAfterBindInlineUniformBlocks	-	4	min
maxInlineUniformTotalSize	-	256	min
maxTimelineSemaphoreValueDifference	-	2^{31}-1	min

1

The **Limit Type** column specifies the limit is either the minimum limit all implementations **must** support, the maximum limit all implementations **must** support, or the exact value all implementations **must** support. For bitmasks a minimum limit is the least bits all implementations **must** set, but they **may** have additional bits set beyond this minimum.

2

The maxPerStageResources **must** be at least the smallest of the following:

- the sum of the maxPerStageDescriptorUniformBuffers, maxPerStageDescriptorStorageBuffers, maxPerStageDescriptorSampledImages, maxPerStageDescriptorStorageImages, maxPerStageDescriptorInputAttachments, maxColorAttachments limits, or
- 128.

It **may** not be possible to reach this limit in every stage.

3

See maxViewportDimensions for the **required** relationship to other limits.

4

See viewportBoundsRange for the **required** relationship to other limits.

5

The values minInterpolationOffset and maxInterpolationOffset describe the closed interval of supported interpolation offsets: [minInterpolationOffset, maxInterpolationOffset]. The ULP is determined by subPixelInterpolationOffsetBits. If subPixelInterpolationOffsetBits is 4, this provides increments of $(1/2^4) = 0.0625$, and thus the range of supported interpolation offsets would be [-0.5, 0.4375].

6

The point size ULP is determined by pointSizeGranularity. If the pointSizeGranularity is 0.125, the range of supported point sizes **must** be at least [1.0, 63.875].

7

The line width ULP is determined by lineWidthGranularity. If the lineWidthGranularity is 0.0625, the range of supported line widths **must** be at least [1.0, 7.9375].

8

The minimum maxDescriptorSet* limit is *n* times the corresponding *specification* minimum maxPerStageDescriptor* limit, where *n* is the number of shader stages supported by the VkPhysicalDevice. If all shader stages are supported, $n = 6$ (vertex, tessellation control, tessellation evaluation, geometry, fragment, compute).

9

The UpdateAfterBind descriptor limits **must** each be greater than or equal to the corresponding non-UpdateAfterBind limit.

33.2. Profile Limits

33.2.1. Roadmap 2022

Implementations that claim support for the Roadmap 2022 profile **must** satisfy the following additional limit requirements:

Limit	Supported Limit	Limit Type[1]
maxImageDimension1D	8192	min

Limit	Supported Limit	Limit Type[1]
maxImageDimension2D	8192	min
maxImageDimensionCube	8192	min
maxImageArrayLayers	2048	min
maxUniformBufferRange	65536	min
bufferImageGranularity	4096	max
maxPerStageDescriptorSamplers	64	min
maxPerStageDescriptorUniformBuffers	15	min
maxPerStageDescriptorStorageBuffers	30	min
maxPerStageDescriptorSampledImages	200	min
maxPerStageDescriptorStorageImages	16	min
maxPerStageResources	200	min
maxDescriptorSetSamplers	576	min
maxDescriptorSetUniformBuffers	90	min
maxDescriptorSetStorageBuffers	96	min
maxDescriptorSetSampledImages	1800	min
maxDescriptorSetStorageImages	144	min
maxFragmentCombinedOutputResources	16	min
maxComputeWorkGroupInvocations	256	min
maxComputeWorkGroupSize	(256,256,64)	min
subTexelPrecisionBits	8	min
mipmapPrecisionBits	6	min
maxSamplerLodBias	14	min
pointSizeGranularity	0.125	max
lineWidthGranularity	0.5	max
standardSampleLocations	VK_TRUE	Boolean
maxColorAttachments	7	min
subgroupSize	4	min
subgroupSupportedStages	VK_SHADER_STAGE_COMPUTE_BIT VK_SHADER_STAGE_FRAGMENT_BIT	bitfield

Limit	Supported Limit	Limit Type[1]
subgroupSupportedOperations	VK_SUBGROUP_FEATURE_BASIC_BIT VK_SUBGROUP_FEATURE_VOTE_BIT VK_SUBGROUP_FEATURE_ARITHMETIC_BIT VK_SUBGROUP_FEATURE_BALLOT_BIT VK_SUBGROUP_FEATURE_SHUFFLE_BIT VK_SUBGROUP_FEATURE_SHUFFLE_RELATIVE_BIT VK_SUBGROUP_FEATURE_QUAD_BIT	bitfield
shaderSignedZeroInfNanPreserveFloat16	VK_TRUE	Boolean
shaderSignedZeroInfNanPreserveFloat32	VK_TRUE	Boolean
maxSubgroupSize	4	min
maxPerStageDescriptorUpdateAfterBindInputAttachments	7	min

33.2.2. Roadmap 2024

Implementations that claim support for the Roadmap 2024 profile **must** satisfy the following additional limit requirements:

Limit	Supported Limit	Limit Type[1]
shaderRoundingModeRTEFloat16	VK_TRUE	Boolean
shaderRoundingModeRTEFloat32	VK_TRUE	Boolean
timestampComputeAndGraphics	VK_TRUE	Boolean
maxColorAttachments	8	min
maxBoundDescriptorSets	7	min

Chapter 34. Formats

Supported buffer and image formats **may** vary across implementations. A minimum set of format features are guaranteed, but others **must** be explicitly queried before use to ensure they are supported by the implementation.

The features for the set of formats (VkFormat) supported by the implementation are queried individually using the vkGetPhysicalDeviceFormatProperties command.

34.1. Format Definition

The following image formats **can** be passed to, and **may** be returned from Vulkan commands. The memory required to store each format is discussed with that format, and also summarized in the Representation and Texel Block Size section and the Compatible formats table.

```
// Provided by VK_VERSION_1_0
typedef enum VkFormat {
    VK_FORMAT_UNDEFINED = 0,
    VK_FORMAT_R4G4_UNORM_PACK8 = 1,
    VK_FORMAT_R4G4B4A4_UNORM_PACK16 = 2,
    VK_FORMAT_B4G4R4A4_UNORM_PACK16 = 3,
    VK_FORMAT_R5G6B5_UNORM_PACK16 = 4,
    VK_FORMAT_B5G6R5_UNORM_PACK16 = 5,
    VK_FORMAT_R5G5B5A1_UNORM_PACK16 = 6,
    VK_FORMAT_B5G5R5A1_UNORM_PACK16 = 7,
    VK_FORMAT_A1R5G5B5_UNORM_PACK16 = 8,
    VK_FORMAT_R8_UNORM = 9,
    VK_FORMAT_R8_SNORM = 10,
    VK_FORMAT_R8_USCALED = 11,
    VK_FORMAT_R8_SSCALED = 12,
    VK_FORMAT_R8_UINT = 13,
    VK_FORMAT_R8_SINT = 14,
    VK_FORMAT_R8_SRGB = 15,
    VK_FORMAT_R8G8_UNORM = 16,
    VK_FORMAT_R8G8_SNORM = 17,
    VK_FORMAT_R8G8_USCALED = 18,
    VK_FORMAT_R8G8_SSCALED = 19,
    VK_FORMAT_R8G8_UINT = 20,
    VK_FORMAT_R8G8_SINT = 21,
    VK_FORMAT_R8G8_SRGB = 22,
    VK_FORMAT_R8G8B8_UNORM = 23,
    VK_FORMAT_R8G8B8_SNORM = 24,
    VK_FORMAT_R8G8B8_USCALED = 25,
    VK_FORMAT_R8G8B8_SSCALED = 26,
    VK_FORMAT_R8G8B8_UINT = 27,
    VK_FORMAT_R8G8B8_SINT = 28,
    VK_FORMAT_R8G8B8_SRGB = 29,
    VK_FORMAT_B8G8R8_UNORM = 30,
    VK_FORMAT_B8G8R8_SNORM = 31,
```

```
    VK_FORMAT_B8G8R8_USCALED = 32,
    VK_FORMAT_B8G8R8_SSCALED = 33,
    VK_FORMAT_B8G8R8_UINT = 34,
    VK_FORMAT_B8G8R8_SINT = 35,
    VK_FORMAT_B8G8R8_SRGB = 36,
    VK_FORMAT_R8G8B8A8_UNORM = 37,
    VK_FORMAT_R8G8B8A8_SNORM = 38,
    VK_FORMAT_R8G8B8A8_USCALED = 39,
    VK_FORMAT_R8G8B8A8_SSCALED = 40,
    VK_FORMAT_R8G8B8A8_UINT = 41,
    VK_FORMAT_R8G8B8A8_SINT = 42,
    VK_FORMAT_R8G8B8A8_SRGB = 43,
    VK_FORMAT_B8G8R8A8_UNORM = 44,
    VK_FORMAT_B8G8R8A8_SNORM = 45,
    VK_FORMAT_B8G8R8A8_USCALED = 46,
    VK_FORMAT_B8G8R8A8_SSCALED = 47,
    VK_FORMAT_B8G8R8A8_UINT = 48,
    VK_FORMAT_B8G8R8A8_SINT = 49,
    VK_FORMAT_B8G8R8A8_SRGB = 50,
    VK_FORMAT_A8B8G8R8_UNORM_PACK32 = 51,
    VK_FORMAT_A8B8G8R8_SNORM_PACK32 = 52,
    VK_FORMAT_A8B8G8R8_USCALED_PACK32 = 53,
    VK_FORMAT_A8B8G8R8_SSCALED_PACK32 = 54,
    VK_FORMAT_A8B8G8R8_UINT_PACK32 = 55,
    VK_FORMAT_A8B8G8R8_SINT_PACK32 = 56,
    VK_FORMAT_A8B8G8R8_SRGB_PACK32 = 57,
    VK_FORMAT_A2R10G10B10_UNORM_PACK32 = 58,
    VK_FORMAT_A2R10G10B10_SNORM_PACK32 = 59,
    VK_FORMAT_A2R10G10B10_USCALED_PACK32 = 60,
    VK_FORMAT_A2R10G10B10_SSCALED_PACK32 = 61,
    VK_FORMAT_A2R10G10B10_UINT_PACK32 = 62,
    VK_FORMAT_A2R10G10B10_SINT_PACK32 = 63,
    VK_FORMAT_A2B10G10R10_UNORM_PACK32 = 64,
    VK_FORMAT_A2B10G10R10_SNORM_PACK32 = 65,
    VK_FORMAT_A2B10G10R10_USCALED_PACK32 = 66,
    VK_FORMAT_A2B10G10R10_SSCALED_PACK32 = 67,
    VK_FORMAT_A2B10G10R10_UINT_PACK32 = 68,
    VK_FORMAT_A2B10G10R10_SINT_PACK32 = 69,
    VK_FORMAT_R16_UNORM = 70,
    VK_FORMAT_R16_SNORM = 71,
    VK_FORMAT_R16_USCALED = 72,
    VK_FORMAT_R16_SSCALED = 73,
    VK_FORMAT_R16_UINT = 74,
    VK_FORMAT_R16_SINT = 75,
    VK_FORMAT_R16_SFLOAT = 76,
    VK_FORMAT_R16G16_UNORM = 77,
    VK_FORMAT_R16G16_SNORM = 78,
    VK_FORMAT_R16G16_USCALED = 79,
    VK_FORMAT_R16G16_SSCALED = 80,
    VK_FORMAT_R16G16_UINT = 81,
    VK_FORMAT_R16G16_SINT = 82,
```

```
    VK_FORMAT_R16G16_SFLOAT = 83,
    VK_FORMAT_R16G16B16_UNORM = 84,
    VK_FORMAT_R16G16B16_SNORM = 85,
    VK_FORMAT_R16G16B16_USCALED = 86,
    VK_FORMAT_R16G16B16_SSCALED = 87,
    VK_FORMAT_R16G16B16_UINT = 88,
    VK_FORMAT_R16G16B16_SINT = 89,
    VK_FORMAT_R16G16B16_SFLOAT = 90,
    VK_FORMAT_R16G16B16A16_UNORM = 91,
    VK_FORMAT_R16G16B16A16_SNORM = 92,
    VK_FORMAT_R16G16B16A16_USCALED = 93,
    VK_FORMAT_R16G16B16A16_SSCALED = 94,
    VK_FORMAT_R16G16B16A16_UINT = 95,
    VK_FORMAT_R16G16B16A16_SINT = 96,
    VK_FORMAT_R16G16B16A16_SFLOAT = 97,
    VK_FORMAT_R32_UINT = 98,
    VK_FORMAT_R32_SINT = 99,
    VK_FORMAT_R32_SFLOAT = 100,
    VK_FORMAT_R32G32_UINT = 101,
    VK_FORMAT_R32G32_SINT = 102,
    VK_FORMAT_R32G32_SFLOAT = 103,
    VK_FORMAT_R32G32B32_UINT = 104,
    VK_FORMAT_R32G32B32_SINT = 105,
    VK_FORMAT_R32G32B32_SFLOAT = 106,
    VK_FORMAT_R32G32B32A32_UINT = 107,
    VK_FORMAT_R32G32B32A32_SINT = 108,
    VK_FORMAT_R32G32B32A32_SFLOAT = 109,
    VK_FORMAT_R64_UINT = 110,
    VK_FORMAT_R64_SINT = 111,
    VK_FORMAT_R64_SFLOAT = 112,
    VK_FORMAT_R64G64_UINT = 113,
    VK_FORMAT_R64G64_SINT = 114,
    VK_FORMAT_R64G64_SFLOAT = 115,
    VK_FORMAT_R64G64B64_UINT = 116,
    VK_FORMAT_R64G64B64_SINT = 117,
    VK_FORMAT_R64G64B64_SFLOAT = 118,
    VK_FORMAT_R64G64B64A64_UINT = 119,
    VK_FORMAT_R64G64B64A64_SINT = 120,
    VK_FORMAT_R64G64B64A64_SFLOAT = 121,
    VK_FORMAT_B10G11R11_UFLOAT_PACK32 = 122,
    VK_FORMAT_E5B9G9R9_UFLOAT_PACK32 = 123,
    VK_FORMAT_D16_UNORM = 124,
    VK_FORMAT_X8_D24_UNORM_PACK32 = 125,
    VK_FORMAT_D32_SFLOAT = 126,
    VK_FORMAT_S8_UINT = 127,
    VK_FORMAT_D16_UNORM_S8_UINT = 128,
    VK_FORMAT_D24_UNORM_S8_UINT = 129,
    VK_FORMAT_D32_SFLOAT_S8_UINT = 130,
    VK_FORMAT_BC1_RGB_UNORM_BLOCK = 131,
    VK_FORMAT_BC1_RGB_SRGB_BLOCK = 132,
    VK_FORMAT_BC1_RGBA_UNORM_BLOCK = 133,
```

```
    VK_FORMAT_BC1_RGBA_SRGB_BLOCK = 134,
    VK_FORMAT_BC2_UNORM_BLOCK = 135,
    VK_FORMAT_BC2_SRGB_BLOCK = 136,
    VK_FORMAT_BC3_UNORM_BLOCK = 137,
    VK_FORMAT_BC3_SRGB_BLOCK = 138,
    VK_FORMAT_BC4_UNORM_BLOCK = 139,
    VK_FORMAT_BC4_SNORM_BLOCK = 140,
    VK_FORMAT_BC5_UNORM_BLOCK = 141,
    VK_FORMAT_BC5_SNORM_BLOCK = 142,
    VK_FORMAT_BC6H_UFLOAT_BLOCK = 143,
    VK_FORMAT_BC6H_SFLOAT_BLOCK = 144,
    VK_FORMAT_BC7_UNORM_BLOCK = 145,
    VK_FORMAT_BC7_SRGB_BLOCK = 146,
    VK_FORMAT_ETC2_R8G8B8_UNORM_BLOCK = 147,
    VK_FORMAT_ETC2_R8G8B8_SRGB_BLOCK = 148,
    VK_FORMAT_ETC2_R8G8B8A1_UNORM_BLOCK = 149,
    VK_FORMAT_ETC2_R8G8B8A1_SRGB_BLOCK = 150,
    VK_FORMAT_ETC2_R8G8B8A8_UNORM_BLOCK = 151,
    VK_FORMAT_ETC2_R8G8B8A8_SRGB_BLOCK = 152,
    VK_FORMAT_EAC_R11_UNORM_BLOCK = 153,
    VK_FORMAT_EAC_R11_SNORM_BLOCK = 154,
    VK_FORMAT_EAC_R11G11_UNORM_BLOCK = 155,
    VK_FORMAT_EAC_R11G11_SNORM_BLOCK = 156,
    VK_FORMAT_ASTC_4x4_UNORM_BLOCK = 157,
    VK_FORMAT_ASTC_4x4_SRGB_BLOCK = 158,
    VK_FORMAT_ASTC_5x4_UNORM_BLOCK = 159,
    VK_FORMAT_ASTC_5x4_SRGB_BLOCK = 160,
    VK_FORMAT_ASTC_5x5_UNORM_BLOCK = 161,
    VK_FORMAT_ASTC_5x5_SRGB_BLOCK = 162,
    VK_FORMAT_ASTC_6x5_UNORM_BLOCK = 163,
    VK_FORMAT_ASTC_6x5_SRGB_BLOCK = 164,
    VK_FORMAT_ASTC_6x6_UNORM_BLOCK = 165,
    VK_FORMAT_ASTC_6x6_SRGB_BLOCK = 166,
    VK_FORMAT_ASTC_8x5_UNORM_BLOCK = 167,
    VK_FORMAT_ASTC_8x5_SRGB_BLOCK = 168,
    VK_FORMAT_ASTC_8x6_UNORM_BLOCK = 169,
    VK_FORMAT_ASTC_8x6_SRGB_BLOCK = 170,
    VK_FORMAT_ASTC_8x8_UNORM_BLOCK = 171,
    VK_FORMAT_ASTC_8x8_SRGB_BLOCK = 172,
    VK_FORMAT_ASTC_10x5_UNORM_BLOCK = 173,
    VK_FORMAT_ASTC_10x5_SRGB_BLOCK = 174,
    VK_FORMAT_ASTC_10x6_UNORM_BLOCK = 175,
    VK_FORMAT_ASTC_10x6_SRGB_BLOCK = 176,
    VK_FORMAT_ASTC_10x8_UNORM_BLOCK = 177,
    VK_FORMAT_ASTC_10x8_SRGB_BLOCK = 178,
    VK_FORMAT_ASTC_10x10_UNORM_BLOCK = 179,
    VK_FORMAT_ASTC_10x10_SRGB_BLOCK = 180,
    VK_FORMAT_ASTC_12x10_UNORM_BLOCK = 181,
    VK_FORMAT_ASTC_12x10_SRGB_BLOCK = 182,
    VK_FORMAT_ASTC_12x12_UNORM_BLOCK = 183,
    VK_FORMAT_ASTC_12x12_SRGB_BLOCK = 184,
```

```
  // Provided by VK_VERSION_1_1
    VK_FORMAT_G8B8G8R8_422_UNORM = 1000156000,
  // Provided by VK_VERSION_1_1
    VK_FORMAT_B8G8R8G8_422_UNORM = 1000156001,
  // Provided by VK_VERSION_1_1
    VK_FORMAT_G8_B8_R8_3PLANE_420_UNORM = 1000156002,
  // Provided by VK_VERSION_1_1
    VK_FORMAT_G8_B8R8_2PLANE_420_UNORM = 1000156003,
  // Provided by VK_VERSION_1_1
    VK_FORMAT_G8_B8_R8_3PLANE_422_UNORM = 1000156004,
  // Provided by VK_VERSION_1_1
    VK_FORMAT_G8_B8R8_2PLANE_422_UNORM = 1000156005,
  // Provided by VK_VERSION_1_1
    VK_FORMAT_G8_B8_R8_3PLANE_444_UNORM = 1000156006,
  // Provided by VK_VERSION_1_1
    VK_FORMAT_R10X6_UNORM_PACK16 = 1000156007,
  // Provided by VK_VERSION_1_1
    VK_FORMAT_R10X6G10X6_UNORM_2PACK16 = 1000156008,
  // Provided by VK_VERSION_1_1
    VK_FORMAT_R10X6G10X6B10X6A10X6_UNORM_4PACK16 = 1000156009,
  // Provided by VK_VERSION_1_1
    VK_FORMAT_G10X6B10X6G10X6R10X6_422_UNORM_4PACK16 = 1000156010,
  // Provided by VK_VERSION_1_1
    VK_FORMAT_B10X6G10X6R10X6G10X6_422_UNORM_4PACK16 = 1000156011,
  // Provided by VK_VERSION_1_1
    VK_FORMAT_G10X6_B10X6_R10X6_3PLANE_420_UNORM_3PACK16 = 1000156012,
  // Provided by VK_VERSION_1_1
    VK_FORMAT_G10X6_B10X6R10X6_2PLANE_420_UNORM_3PACK16 = 1000156013,
  // Provided by VK_VERSION_1_1
    VK_FORMAT_G10X6_B10X6_R10X6_3PLANE_422_UNORM_3PACK16 = 1000156014,
  // Provided by VK_VERSION_1_1
    VK_FORMAT_G10X6_B10X6R10X6_2PLANE_422_UNORM_3PACK16 = 1000156015,
  // Provided by VK_VERSION_1_1
    VK_FORMAT_G10X6_B10X6_R10X6_3PLANE_444_UNORM_3PACK16 = 1000156016,
  // Provided by VK_VERSION_1_1
    VK_FORMAT_R12X4_UNORM_PACK16 = 1000156017,
  // Provided by VK_VERSION_1_1
    VK_FORMAT_R12X4G12X4_UNORM_2PACK16 = 1000156018,
  // Provided by VK_VERSION_1_1
    VK_FORMAT_R12X4G12X4B12X4A12X4_UNORM_4PACK16 = 1000156019,
  // Provided by VK_VERSION_1_1
    VK_FORMAT_G12X4B12X4G12X4R12X4_422_UNORM_4PACK16 = 1000156020,
  // Provided by VK_VERSION_1_1
    VK_FORMAT_B12X4G12X4R12X4G12X4_422_UNORM_4PACK16 = 1000156021,
  // Provided by VK_VERSION_1_1
    VK_FORMAT_G12X4_B12X4_R12X4_3PLANE_420_UNORM_3PACK16 = 1000156022,
  // Provided by VK_VERSION_1_1
    VK_FORMAT_G12X4_B12X4R12X4_2PLANE_420_UNORM_3PACK16 = 1000156023,
  // Provided by VK_VERSION_1_1
    VK_FORMAT_G12X4_B12X4_R12X4_3PLANE_422_UNORM_3PACK16 = 1000156024,
  // Provided by VK_VERSION_1_1
```

```
    VK_FORMAT_G12X4_B12X4R12X4_2PLANE_422_UNORM_3PACK16 = 1000156025,
  // Provided by VK_VERSION_1_1
    VK_FORMAT_G12X4_B12X4_R12X4_3PLANE_444_UNORM_3PACK16 = 1000156026,
  // Provided by VK_VERSION_1_1
    VK_FORMAT_G16B16G16R16_422_UNORM = 1000156027,
  // Provided by VK_VERSION_1_1
    VK_FORMAT_B16G16R16G16_422_UNORM = 1000156028,
  // Provided by VK_VERSION_1_1
    VK_FORMAT_G16_B16_R16_3PLANE_420_UNORM = 1000156029,
  // Provided by VK_VERSION_1_1
    VK_FORMAT_G16_B16R16_2PLANE_420_UNORM = 1000156030,
  // Provided by VK_VERSION_1_1
    VK_FORMAT_G16_B16_R16_3PLANE_422_UNORM = 1000156031,
  // Provided by VK_VERSION_1_1
    VK_FORMAT_G16_B16R16_2PLANE_422_UNORM = 1000156032,
  // Provided by VK_VERSION_1_1
    VK_FORMAT_G16_B16_R16_3PLANE_444_UNORM = 1000156033,
  // Provided by VK_VERSION_1_3
    VK_FORMAT_G8_B8R8_2PLANE_444_UNORM = 1000330000,
  // Provided by VK_VERSION_1_3
    VK_FORMAT_G10X6_B10X6R10X6_2PLANE_444_UNORM_3PACK16 = 1000330001,
  // Provided by VK_VERSION_1_3
    VK_FORMAT_G12X4_B12X4R12X4_2PLANE_444_UNORM_3PACK16 = 1000330002,
  // Provided by VK_VERSION_1_3
    VK_FORMAT_G16_B16R16_2PLANE_444_UNORM = 1000330003,
  // Provided by VK_VERSION_1_3
    VK_FORMAT_A4R4G4B4_UNORM_PACK16 = 1000340000,
  // Provided by VK_VERSION_1_3
    VK_FORMAT_A4B4G4R4_UNORM_PACK16 = 1000340001,
  // Provided by VK_VERSION_1_3
    VK_FORMAT_ASTC_4x4_SFLOAT_BLOCK = 1000066000,
  // Provided by VK_VERSION_1_3
    VK_FORMAT_ASTC_5x4_SFLOAT_BLOCK = 1000066001,
  // Provided by VK_VERSION_1_3
    VK_FORMAT_ASTC_5x5_SFLOAT_BLOCK = 1000066002,
  // Provided by VK_VERSION_1_3
    VK_FORMAT_ASTC_6x5_SFLOAT_BLOCK = 1000066003,
  // Provided by VK_VERSION_1_3
    VK_FORMAT_ASTC_6x6_SFLOAT_BLOCK = 1000066004,
  // Provided by VK_VERSION_1_3
    VK_FORMAT_ASTC_8x5_SFLOAT_BLOCK = 1000066005,
  // Provided by VK_VERSION_1_3
    VK_FORMAT_ASTC_8x6_SFLOAT_BLOCK = 1000066006,
  // Provided by VK_VERSION_1_3
    VK_FORMAT_ASTC_8x8_SFLOAT_BLOCK = 1000066007,
  // Provided by VK_VERSION_1_3
    VK_FORMAT_ASTC_10x5_SFLOAT_BLOCK = 1000066008,
  // Provided by VK_VERSION_1_3
    VK_FORMAT_ASTC_10x6_SFLOAT_BLOCK = 1000066009,
  // Provided by VK_VERSION_1_3
    VK_FORMAT_ASTC_10x8_SFLOAT_BLOCK = 1000066010,
```

```
  // Provided by VK_VERSION_1_3
    VK_FORMAT_ASTC_10x10_SFLOAT_BLOCK = 1000066011,
  // Provided by VK_VERSION_1_3
    VK_FORMAT_ASTC_12x10_SFLOAT_BLOCK = 1000066012,
  // Provided by VK_VERSION_1_3
    VK_FORMAT_ASTC_12x12_SFLOAT_BLOCK = 1000066013,
} VkFormat;
```

- VK_FORMAT_UNDEFINED specifies that the format is not specified.
- VK_FORMAT_R4G4_UNORM_PACK8 specifies a two-component, 8-bit packed unsigned normalized format that has a 4-bit R component in bits 4..7, and a 4-bit G component in bits 0..3.
- VK_FORMAT_R4G4B4A4_UNORM_PACK16 specifies a four-component, 16-bit packed unsigned normalized format that has a 4-bit R component in bits 12..15, a 4-bit G component in bits 8..11, a 4-bit B component in bits 4..7, and a 4-bit A component in bits 0..3.
- VK_FORMAT_B4G4R4A4_UNORM_PACK16 specifies a four-component, 16-bit packed unsigned normalized format that has a 4-bit B component in bits 12..15, a 4-bit G component in bits 8..11, a 4-bit R component in bits 4..7, and a 4-bit A component in bits 0..3.
- VK_FORMAT_A4R4G4B4_UNORM_PACK16 specifies a four-component, 16-bit packed unsigned normalized format that has a 4-bit A component in bits 12..15, a 4-bit R component in bits 8..11, a 4-bit G component in bits 4..7, and a 4-bit B component in bits 0..3.
- VK_FORMAT_A4B4G4R4_UNORM_PACK16 specifies a four-component, 16-bit packed unsigned normalized format that has a 4-bit A component in bits 12..15, a 4-bit B component in bits 8..11, a 4-bit G component in bits 4..7, and a 4-bit R component in bits 0..3.
- VK_FORMAT_R5G6B5_UNORM_PACK16 specifies a three-component, 16-bit packed unsigned normalized format that has a 5-bit R component in bits 11..15, a 6-bit G component in bits 5..10, and a 5-bit B component in bits 0..4.
- VK_FORMAT_B5G6R5_UNORM_PACK16 specifies a three-component, 16-bit packed unsigned normalized format that has a 5-bit B component in bits 11..15, a 6-bit G component in bits 5..10, and a 5-bit R component in bits 0..4.
- VK_FORMAT_R5G5B5A1_UNORM_PACK16 specifies a four-component, 16-bit packed unsigned normalized format that has a 5-bit R component in bits 11..15, a 5-bit G component in bits 6..10, a 5-bit B component in bits 1..5, and a 1-bit A component in bit 0.
- VK_FORMAT_B5G5R5A1_UNORM_PACK16 specifies a four-component, 16-bit packed unsigned normalized format that has a 5-bit B component in bits 11..15, a 5-bit G component in bits 6..10, a 5-bit R component in bits 1..5, and a 1-bit A component in bit 0.
- VK_FORMAT_A1R5G5B5_UNORM_PACK16 specifies a four-component, 16-bit packed unsigned normalized format that has a 1-bit A component in bit 15, a 5-bit R component in bits 10..14, a 5-bit G component in bits 5..9, and a 5-bit B component in bits 0..4.
- VK_FORMAT_R8_UNORM specifies a one-component, 8-bit unsigned normalized format that has a single 8-bit R component.
- VK_FORMAT_R8_SNORM specifies a one-component, 8-bit signed normalized format that has a single 8-bit R component.
- VK_FORMAT_R8_USCALED specifies a one-component, 8-bit unsigned scaled integer format that has a

single 8-bit R component.

- VK_FORMAT_R8_SSCALED specifies a one-component, 8-bit signed scaled integer format that has a single 8-bit R component.
- VK_FORMAT_R8_UINT specifies a one-component, 8-bit unsigned integer format that has a single 8-bit R component.
- VK_FORMAT_R8_SINT specifies a one-component, 8-bit signed integer format that has a single 8-bit R component.
- VK_FORMAT_R8_SRGB specifies a one-component, 8-bit unsigned normalized format that has a single 8-bit R component stored with sRGB nonlinear encoding.
- VK_FORMAT_R8G8_UNORM specifies a two-component, 16-bit unsigned normalized format that has an 8-bit R component in byte 0, and an 8-bit G component in byte 1.
- VK_FORMAT_R8G8_SNORM specifies a two-component, 16-bit signed normalized format that has an 8-bit R component in byte 0, and an 8-bit G component in byte 1.
- VK_FORMAT_R8G8_USCALED specifies a two-component, 16-bit unsigned scaled integer format that has an 8-bit R component in byte 0, and an 8-bit G component in byte 1.
- VK_FORMAT_R8G8_SSCALED specifies a two-component, 16-bit signed scaled integer format that has an 8-bit R component in byte 0, and an 8-bit G component in byte 1.
- VK_FORMAT_R8G8_UINT specifies a two-component, 16-bit unsigned integer format that has an 8-bit R component in byte 0, and an 8-bit G component in byte 1.
- VK_FORMAT_R8G8_SINT specifies a two-component, 16-bit signed integer format that has an 8-bit R component in byte 0, and an 8-bit G component in byte 1.
- VK_FORMAT_R8G8_SRGB specifies a two-component, 16-bit unsigned normalized format that has an 8-bit R component stored with sRGB nonlinear encoding in byte 0, and an 8-bit G component stored with sRGB nonlinear encoding in byte 1.
- VK_FORMAT_R8G8B8_UNORM specifies a three-component, 24-bit unsigned normalized format that has an 8-bit R component in byte 0, an 8-bit G component in byte 1, and an 8-bit B component in byte 2.
- VK_FORMAT_R8G8B8_SNORM specifies a three-component, 24-bit signed normalized format that has an 8-bit R component in byte 0, an 8-bit G component in byte 1, and an 8-bit B component in byte 2.
- VK_FORMAT_R8G8B8_USCALED specifies a three-component, 24-bit unsigned scaled format that has an 8-bit R component in byte 0, an 8-bit G component in byte 1, and an 8-bit B component in byte 2.
- VK_FORMAT_R8G8B8_SSCALED specifies a three-component, 24-bit signed scaled format that has an 8-bit R component in byte 0, an 8-bit G component in byte 1, and an 8-bit B component in byte 2.
- VK_FORMAT_R8G8B8_UINT specifies a three-component, 24-bit unsigned integer format that has an 8-bit R component in byte 0, an 8-bit G component in byte 1, and an 8-bit B component in byte 2.
- VK_FORMAT_R8G8B8_SINT specifies a three-component, 24-bit signed integer format that has an 8-bit R component in byte 0, an 8-bit G component in byte 1, and an 8-bit B component in byte 2.
- VK_FORMAT_R8G8B8_SRGB specifies a three-component, 24-bit unsigned normalized format that has an 8-bit R component stored with sRGB nonlinear encoding in byte 0, an 8-bit G component stored with sRGB nonlinear encoding in byte 1, and an 8-bit B component stored with sRGB

nonlinear encoding in byte 2.

- VK_FORMAT_B8G8R8_UNORM specifies a three-component, 24-bit unsigned normalized format that has an 8-bit B component in byte 0, an 8-bit G component in byte 1, and an 8-bit R component in byte 2.
- VK_FORMAT_B8G8R8_SNORM specifies a three-component, 24-bit signed normalized format that has an 8-bit B component in byte 0, an 8-bit G component in byte 1, and an 8-bit R component in byte 2.
- VK_FORMAT_B8G8R8_USCALED specifies a three-component, 24-bit unsigned scaled format that has an 8-bit B component in byte 0, an 8-bit G component in byte 1, and an 8-bit R component in byte 2.
- VK_FORMAT_B8G8R8_SSCALED specifies a three-component, 24-bit signed scaled format that has an 8-bit B component in byte 0, an 8-bit G component in byte 1, and an 8-bit R component in byte 2.
- VK_FORMAT_B8G8R8_UINT specifies a three-component, 24-bit unsigned integer format that has an 8-bit B component in byte 0, an 8-bit G component in byte 1, and an 8-bit R component in byte 2.
- VK_FORMAT_B8G8R8_SINT specifies a three-component, 24-bit signed integer format that has an 8-bit B component in byte 0, an 8-bit G component in byte 1, and an 8-bit R component in byte 2.
- VK_FORMAT_B8G8R8_SRGB specifies a three-component, 24-bit unsigned normalized format that has an 8-bit B component stored with sRGB nonlinear encoding in byte 0, an 8-bit G component stored with sRGB nonlinear encoding in byte 1, and an 8-bit R component stored with sRGB nonlinear encoding in byte 2.
- VK_FORMAT_R8G8B8A8_UNORM specifies a four-component, 32-bit unsigned normalized format that has an 8-bit R component in byte 0, an 8-bit G component in byte 1, an 8-bit B component in byte 2, and an 8-bit A component in byte 3.
- VK_FORMAT_R8G8B8A8_SNORM specifies a four-component, 32-bit signed normalized format that has an 8-bit R component in byte 0, an 8-bit G component in byte 1, an 8-bit B component in byte 2, and an 8-bit A component in byte 3.
- VK_FORMAT_R8G8B8A8_USCALED specifies a four-component, 32-bit unsigned scaled format that has an 8-bit R component in byte 0, an 8-bit G component in byte 1, an 8-bit B component in byte 2, and an 8-bit A component in byte 3.
- VK_FORMAT_R8G8B8A8_SSCALED specifies a four-component, 32-bit signed scaled format that has an 8-bit R component in byte 0, an 8-bit G component in byte 1, an 8-bit B component in byte 2, and an 8-bit A component in byte 3.
- VK_FORMAT_R8G8B8A8_UINT specifies a four-component, 32-bit unsigned integer format that has an 8-bit R component in byte 0, an 8-bit G component in byte 1, an 8-bit B component in byte 2, and an 8-bit A component in byte 3.
- VK_FORMAT_R8G8B8A8_SINT specifies a four-component, 32-bit signed integer format that has an 8-bit R component in byte 0, an 8-bit G component in byte 1, an 8-bit B component in byte 2, and an 8-bit A component in byte 3.
- VK_FORMAT_R8G8B8A8_SRGB specifies a four-component, 32-bit unsigned normalized format that has an 8-bit R component stored with sRGB nonlinear encoding in byte 0, an 8-bit G component stored with sRGB nonlinear encoding in byte 1, an 8-bit B component stored with sRGB nonlinear encoding in byte 2, and an 8-bit A component in byte 3.
- VK_FORMAT_B8G8R8A8_UNORM specifies a four-component, 32-bit unsigned normalized format that

has an 8-bit B component in byte 0, an 8-bit G component in byte 1, an 8-bit R component in byte 2, and an 8-bit A component in byte 3.

- VK_FORMAT_B8G8R8A8_SNORM specifies a four-component, 32-bit signed normalized format that has an 8-bit B component in byte 0, an 8-bit G component in byte 1, an 8-bit R component in byte 2, and an 8-bit A component in byte 3.
- VK_FORMAT_B8G8R8A8_USCALED specifies a four-component, 32-bit unsigned scaled format that has an 8-bit B component in byte 0, an 8-bit G component in byte 1, an 8-bit R component in byte 2, and an 8-bit A component in byte 3.
- VK_FORMAT_B8G8R8A8_SSCALED specifies a four-component, 32-bit signed scaled format that has an 8-bit B component in byte 0, an 8-bit G component in byte 1, an 8-bit R component in byte 2, and an 8-bit A component in byte 3.
- VK_FORMAT_B8G8R8A8_UINT specifies a four-component, 32-bit unsigned integer format that has an 8-bit B component in byte 0, an 8-bit G component in byte 1, an 8-bit R component in byte 2, and an 8-bit A component in byte 3.
- VK_FORMAT_B8G8R8A8_SINT specifies a four-component, 32-bit signed integer format that has an 8-bit B component in byte 0, an 8-bit G component in byte 1, an 8-bit R component in byte 2, and an 8-bit A component in byte 3.
- VK_FORMAT_B8G8R8A8_SRGB specifies a four-component, 32-bit unsigned normalized format that has an 8-bit B component stored with sRGB nonlinear encoding in byte 0, an 8-bit G component stored with sRGB nonlinear encoding in byte 1, an 8-bit R component stored with sRGB nonlinear encoding in byte 2, and an 8-bit A component in byte 3.
- VK_FORMAT_A8B8G8R8_UNORM_PACK32 specifies a four-component, 32-bit packed unsigned normalized format that has an 8-bit A component in bits 24..31, an 8-bit B component in bits 16..23, an 8-bit G component in bits 8..15, and an 8-bit R component in bits 0..7.
- VK_FORMAT_A8B8G8R8_SNORM_PACK32 specifies a four-component, 32-bit packed signed normalized format that has an 8-bit A component in bits 24..31, an 8-bit B component in bits 16..23, an 8-bit G component in bits 8..15, and an 8-bit R component in bits 0..7.
- VK_FORMAT_A8B8G8R8_USCALED_PACK32 specifies a four-component, 32-bit packed unsigned scaled integer format that has an 8-bit A component in bits 24..31, an 8-bit B component in bits 16..23, an 8-bit G component in bits 8..15, and an 8-bit R component in bits 0..7.
- VK_FORMAT_A8B8G8R8_SSCALED_PACK32 specifies a four-component, 32-bit packed signed scaled integer format that has an 8-bit A component in bits 24..31, an 8-bit B component in bits 16..23, an 8-bit G component in bits 8..15, and an 8-bit R component in bits 0..7.
- VK_FORMAT_A8B8G8R8_UINT_PACK32 specifies a four-component, 32-bit packed unsigned integer format that has an 8-bit A component in bits 24..31, an 8-bit B component in bits 16..23, an 8-bit G component in bits 8..15, and an 8-bit R component in bits 0..7.
- VK_FORMAT_A8B8G8R8_SINT_PACK32 specifies a four-component, 32-bit packed signed integer format that has an 8-bit A component in bits 24..31, an 8-bit B component in bits 16..23, an 8-bit G component in bits 8..15, and an 8-bit R component in bits 0..7.
- VK_FORMAT_A8B8G8R8_SRGB_PACK32 specifies a four-component, 32-bit packed unsigned normalized format that has an 8-bit A component in bits 24..31, an 8-bit B component stored with sRGB nonlinear encoding in bits 16..23, an 8-bit G component stored with sRGB nonlinear encoding in bits 8..15, and an 8-bit R component stored with sRGB nonlinear encoding in bits 0..7.

- VK_FORMAT_A2R10G10B10_UNORM_PACK32 specifies a four-component, 32-bit packed unsigned normalized format that has a 2-bit A component in bits 30..31, a 10-bit R component in bits 20..29, a 10-bit G component in bits 10..19, and a 10-bit B component in bits 0..9.
- VK_FORMAT_A2R10G10B10_SNORM_PACK32 specifies a four-component, 32-bit packed signed normalized format that has a 2-bit A component in bits 30..31, a 10-bit R component in bits 20..29, a 10-bit G component in bits 10..19, and a 10-bit B component in bits 0..9.
- VK_FORMAT_A2R10G10B10_USCALED_PACK32 specifies a four-component, 32-bit packed unsigned scaled integer format that has a 2-bit A component in bits 30..31, a 10-bit R component in bits 20..29, a 10-bit G component in bits 10..19, and a 10-bit B component in bits 0..9.
- VK_FORMAT_A2R10G10B10_SSCALED_PACK32 specifies a four-component, 32-bit packed signed scaled integer format that has a 2-bit A component in bits 30..31, a 10-bit R component in bits 20..29, a 10-bit G component in bits 10..19, and a 10-bit B component in bits 0..9.
- VK_FORMAT_A2R10G10B10_UINT_PACK32 specifies a four-component, 32-bit packed unsigned integer format that has a 2-bit A component in bits 30..31, a 10-bit R component in bits 20..29, a 10-bit G component in bits 10..19, and a 10-bit B component in bits 0..9.
- VK_FORMAT_A2R10G10B10_SINT_PACK32 specifies a four-component, 32-bit packed signed integer format that has a 2-bit A component in bits 30..31, a 10-bit R component in bits 20..29, a 10-bit G component in bits 10..19, and a 10-bit B component in bits 0..9.
- VK_FORMAT_A2B10G10R10_UNORM_PACK32 specifies a four-component, 32-bit packed unsigned normalized format that has a 2-bit A component in bits 30..31, a 10-bit B component in bits 20..29, a 10-bit G component in bits 10..19, and a 10-bit R component in bits 0..9.
- VK_FORMAT_A2B10G10R10_SNORM_PACK32 specifies a four-component, 32-bit packed signed normalized format that has a 2-bit A component in bits 30..31, a 10-bit B component in bits 20..29, a 10-bit G component in bits 10..19, and a 10-bit R component in bits 0..9.
- VK_FORMAT_A2B10G10R10_USCALED_PACK32 specifies a four-component, 32-bit packed unsigned scaled integer format that has a 2-bit A component in bits 30..31, a 10-bit B component in bits 20..29, a 10-bit G component in bits 10..19, and a 10-bit R component in bits 0..9.
- VK_FORMAT_A2B10G10R10_SSCALED_PACK32 specifies a four-component, 32-bit packed signed scaled integer format that has a 2-bit A component in bits 30..31, a 10-bit B component in bits 20..29, a 10-bit G component in bits 10..19, and a 10-bit R component in bits 0..9.
- VK_FORMAT_A2B10G10R10_UINT_PACK32 specifies a four-component, 32-bit packed unsigned integer format that has a 2-bit A component in bits 30..31, a 10-bit B component in bits 20..29, a 10-bit G component in bits 10..19, and a 10-bit R component in bits 0..9.
- VK_FORMAT_A2B10G10R10_SINT_PACK32 specifies a four-component, 32-bit packed signed integer format that has a 2-bit A component in bits 30..31, a 10-bit B component in bits 20..29, a 10-bit G component in bits 10..19, and a 10-bit R component in bits 0..9.
- VK_FORMAT_R16_UNORM specifies a one-component, 16-bit unsigned normalized format that has a single 16-bit R component.
- VK_FORMAT_R16_SNORM specifies a one-component, 16-bit signed normalized format that has a single 16-bit R component.
- VK_FORMAT_R16_USCALED specifies a one-component, 16-bit unsigned scaled integer format that has a single 16-bit R component.

- VK_FORMAT_R16_SSCALED specifies a one-component, 16-bit signed scaled integer format that has a single 16-bit R component.
- VK_FORMAT_R16_UINT specifies a one-component, 16-bit unsigned integer format that has a single 16-bit R component.
- VK_FORMAT_R16_SINT specifies a one-component, 16-bit signed integer format that has a single 16-bit R component.
- VK_FORMAT_R16_SFLOAT specifies a one-component, 16-bit signed floating-point format that has a single 16-bit R component.
- VK_FORMAT_R16G16_UNORM specifies a two-component, 32-bit unsigned normalized format that has a 16-bit R component in bytes 0..1, and a 16-bit G component in bytes 2..3.
- VK_FORMAT_R16G16_SNORM specifies a two-component, 32-bit signed normalized format that has a 16-bit R component in bytes 0..1, and a 16-bit G component in bytes 2..3.
- VK_FORMAT_R16G16_USCALED specifies a two-component, 32-bit unsigned scaled integer format that has a 16-bit R component in bytes 0..1, and a 16-bit G component in bytes 2..3.
- VK_FORMAT_R16G16_SSCALED specifies a two-component, 32-bit signed scaled integer format that has a 16-bit R component in bytes 0..1, and a 16-bit G component in bytes 2..3.
- VK_FORMAT_R16G16_UINT specifies a two-component, 32-bit unsigned integer format that has a 16-bit R component in bytes 0..1, and a 16-bit G component in bytes 2..3.
- VK_FORMAT_R16G16_SINT specifies a two-component, 32-bit signed integer format that has a 16-bit R component in bytes 0..1, and a 16-bit G component in bytes 2..3.
- VK_FORMAT_R16G16_SFLOAT specifies a two-component, 32-bit signed floating-point format that has a 16-bit R component in bytes 0..1, and a 16-bit G component in bytes 2..3.
- VK_FORMAT_R16G16B16_UNORM specifies a three-component, 48-bit unsigned normalized format that has a 16-bit R component in bytes 0..1, a 16-bit G component in bytes 2..3, and a 16-bit B component in bytes 4..5.
- VK_FORMAT_R16G16B16_SNORM specifies a three-component, 48-bit signed normalized format that has a 16-bit R component in bytes 0..1, a 16-bit G component in bytes 2..3, and a 16-bit B component in bytes 4..5.
- VK_FORMAT_R16G16B16_USCALED specifies a three-component, 48-bit unsigned scaled integer format that has a 16-bit R component in bytes 0..1, a 16-bit G component in bytes 2..3, and a 16-bit B component in bytes 4..5.
- VK_FORMAT_R16G16B16_SSCALED specifies a three-component, 48-bit signed scaled integer format that has a 16-bit R component in bytes 0..1, a 16-bit G component in bytes 2..3, and a 16-bit B component in bytes 4..5.
- VK_FORMAT_R16G16B16_UINT specifies a three-component, 48-bit unsigned integer format that has a 16-bit R component in bytes 0..1, a 16-bit G component in bytes 2..3, and a 16-bit B component in bytes 4..5.
- VK_FORMAT_R16G16B16_SINT specifies a three-component, 48-bit signed integer format that has a 16-bit R component in bytes 0..1, a 16-bit G component in bytes 2..3, and a 16-bit B component in bytes 4..5.
- VK_FORMAT_R16G16B16_SFLOAT specifies a three-component, 48-bit signed floating-point format that

has a 16-bit R component in bytes 0..1, a 16-bit G component in bytes 2..3, and a 16-bit B component in bytes 4..5.

- VK_FORMAT_R16G16B16A16_UNORM specifies a four-component, 64-bit unsigned normalized format that has a 16-bit R component in bytes 0..1, a 16-bit G component in bytes 2..3, a 16-bit B component in bytes 4..5, and a 16-bit A component in bytes 6..7.
- VK_FORMAT_R16G16B16A16_SNORM specifies a four-component, 64-bit signed normalized format that has a 16-bit R component in bytes 0..1, a 16-bit G component in bytes 2..3, a 16-bit B component in bytes 4..5, and a 16-bit A component in bytes 6..7.
- VK_FORMAT_R16G16B16A16_USCALED specifies a four-component, 64-bit unsigned scaled integer format that has a 16-bit R component in bytes 0..1, a 16-bit G component in bytes 2..3, a 16-bit B component in bytes 4..5, and a 16-bit A component in bytes 6..7.
- VK_FORMAT_R16G16B16A16_SSCALED specifies a four-component, 64-bit signed scaled integer format that has a 16-bit R component in bytes 0..1, a 16-bit G component in bytes 2..3, a 16-bit B component in bytes 4..5, and a 16-bit A component in bytes 6..7.
- VK_FORMAT_R16G16B16A16_UINT specifies a four-component, 64-bit unsigned integer format that has a 16-bit R component in bytes 0..1, a 16-bit G component in bytes 2..3, a 16-bit B component in bytes 4..5, and a 16-bit A component in bytes 6..7.
- VK_FORMAT_R16G16B16A16_SINT specifies a four-component, 64-bit signed integer format that has a 16-bit R component in bytes 0..1, a 16-bit G component in bytes 2..3, a 16-bit B component in bytes 4..5, and a 16-bit A component in bytes 6..7.
- VK_FORMAT_R16G16B16A16_SFLOAT specifies a four-component, 64-bit signed floating-point format that has a 16-bit R component in bytes 0..1, a 16-bit G component in bytes 2..3, a 16-bit B component in bytes 4..5, and a 16-bit A component in bytes 6..7.
- VK_FORMAT_R32_UINT specifies a one-component, 32-bit unsigned integer format that has a single 32-bit R component.
- VK_FORMAT_R32_SINT specifies a one-component, 32-bit signed integer format that has a single 32-bit R component.
- VK_FORMAT_R32_SFLOAT specifies a one-component, 32-bit signed floating-point format that has a single 32-bit R component.
- VK_FORMAT_R32G32_UINT specifies a two-component, 64-bit unsigned integer format that has a 32-bit R component in bytes 0..3, and a 32-bit G component in bytes 4..7.
- VK_FORMAT_R32G32_SINT specifies a two-component, 64-bit signed integer format that has a 32-bit R component in bytes 0..3, and a 32-bit G component in bytes 4..7.
- VK_FORMAT_R32G32_SFLOAT specifies a two-component, 64-bit signed floating-point format that has a 32-bit R component in bytes 0..3, and a 32-bit G component in bytes 4..7.
- VK_FORMAT_R32G32B32_UINT specifies a three-component, 96-bit unsigned integer format that has a 32-bit R component in bytes 0..3, a 32-bit G component in bytes 4..7, and a 32-bit B component in bytes 8..11.
- VK_FORMAT_R32G32B32_SINT specifies a three-component, 96-bit signed integer format that has a 32-bit R component in bytes 0..3, a 32-bit G component in bytes 4..7, and a 32-bit B component in bytes 8..11.

- VK_FORMAT_R32G32B32_SFLOAT specifies a three-component, 96-bit signed floating-point format that has a 32-bit R component in bytes 0..3, a 32-bit G component in bytes 4..7, and a 32-bit B component in bytes 8..11.
- VK_FORMAT_R32G32B32A32_UINT specifies a four-component, 128-bit unsigned integer format that has a 32-bit R component in bytes 0..3, a 32-bit G component in bytes 4..7, a 32-bit B component in bytes 8..11, and a 32-bit A component in bytes 12..15.
- VK_FORMAT_R32G32B32A32_SINT specifies a four-component, 128-bit signed integer format that has a 32-bit R component in bytes 0..3, a 32-bit G component in bytes 4..7, a 32-bit B component in bytes 8..11, and a 32-bit A component in bytes 12..15.
- VK_FORMAT_R32G32B32A32_SFLOAT specifies a four-component, 128-bit signed floating-point format that has a 32-bit R component in bytes 0..3, a 32-bit G component in bytes 4..7, a 32-bit B component in bytes 8..11, and a 32-bit A component in bytes 12..15.
- VK_FORMAT_R64_UINT specifies a one-component, 64-bit unsigned integer format that has a single 64-bit R component.
- VK_FORMAT_R64_SINT specifies a one-component, 64-bit signed integer format that has a single 64-bit R component.
- VK_FORMAT_R64_SFLOAT specifies a one-component, 64-bit signed floating-point format that has a single 64-bit R component.
- VK_FORMAT_R64G64_UINT specifies a two-component, 128-bit unsigned integer format that has a 64-bit R component in bytes 0..7, and a 64-bit G component in bytes 8..15.
- VK_FORMAT_R64G64_SINT specifies a two-component, 128-bit signed integer format that has a 64-bit R component in bytes 0..7, and a 64-bit G component in bytes 8..15.
- VK_FORMAT_R64G64_SFLOAT specifies a two-component, 128-bit signed floating-point format that has a 64-bit R component in bytes 0..7, and a 64-bit G component in bytes 8..15.
- VK_FORMAT_R64G64B64_UINT specifies a three-component, 192-bit unsigned integer format that has a 64-bit R component in bytes 0..7, a 64-bit G component in bytes 8..15, and a 64-bit B component in bytes 16..23.
- VK_FORMAT_R64G64B64_SINT specifies a three-component, 192-bit signed integer format that has a 64-bit R component in bytes 0..7, a 64-bit G component in bytes 8..15, and a 64-bit B component in bytes 16..23.
- VK_FORMAT_R64G64B64_SFLOAT specifies a three-component, 192-bit signed floating-point format that has a 64-bit R component in bytes 0..7, a 64-bit G component in bytes 8..15, and a 64-bit B component in bytes 16..23.
- VK_FORMAT_R64G64B64A64_UINT specifies a four-component, 256-bit unsigned integer format that has a 64-bit R component in bytes 0..7, a 64-bit G component in bytes 8..15, a 64-bit B component in bytes 16..23, and a 64-bit A component in bytes 24..31.
- VK_FORMAT_R64G64B64A64_SINT specifies a four-component, 256-bit signed integer format that has a 64-bit R component in bytes 0..7, a 64-bit G component in bytes 8..15, a 64-bit B component in bytes 16..23, and a 64-bit A component in bytes 24..31.
- VK_FORMAT_R64G64B64A64_SFLOAT specifies a four-component, 256-bit signed floating-point format that has a 64-bit R component in bytes 0..7, a 64-bit G component in bytes 8..15, a 64-bit B component in bytes 16..23, and a 64-bit A component in bytes 24..31.

- VK_FORMAT_B10G11R11_UFLOAT_PACK32 specifies a three-component, 32-bit packed unsigned floating-point format that has a 10-bit B component in bits 22..31, an 11-bit G component in bits 11..21, an 11-bit R component in bits 0..10. See Unsigned 10-Bit Floating-Point Numbers and Unsigned 11-Bit Floating-Point Numbers.
- VK_FORMAT_E5B9G9R9_UFLOAT_PACK32 specifies a three-component, 32-bit packed unsigned floating-point format that has a 5-bit shared exponent in bits 27..31, a 9-bit B component mantissa in bits 18..26, a 9-bit G component mantissa in bits 9..17, and a 9-bit R component mantissa in bits 0..8.
- VK_FORMAT_D16_UNORM specifies a one-component, 16-bit unsigned normalized format that has a single 16-bit depth component.
- VK_FORMAT_X8_D24_UNORM_PACK32 specifies a two-component, 32-bit format that has 24 unsigned normalized bits in the depth component and, **optionally**, 8 bits that are unused.
- VK_FORMAT_D32_SFLOAT specifies a one-component, 32-bit signed floating-point format that has 32 bits in the depth component.
- VK_FORMAT_S8_UINT specifies a one-component, 8-bit unsigned integer format that has 8 bits in the stencil component.
- VK_FORMAT_D16_UNORM_S8_UINT specifies a two-component, 24-bit format that has 16 unsigned normalized bits in the depth component and 8 unsigned integer bits in the stencil component.
- VK_FORMAT_D24_UNORM_S8_UINT specifies a two-component, 32-bit packed format that has 8 unsigned integer bits in the stencil component, and 24 unsigned normalized bits in the depth component.
- VK_FORMAT_D32_SFLOAT_S8_UINT specifies a two-component format that has 32 signed float bits in the depth component and 8 unsigned integer bits in the stencil component. There are **optionally** 24 bits that are unused.
- VK_FORMAT_BC1_RGB_UNORM_BLOCK specifies a three-component, block-compressed format where each 64-bit compressed texel block encodes a 4×4 rectangle of unsigned normalized RGB texel data. This format has no alpha and is considered opaque.
- VK_FORMAT_BC1_RGB_SRGB_BLOCK specifies a three-component, block-compressed format where each 64-bit compressed texel block encodes a 4×4 rectangle of unsigned normalized RGB texel data with sRGB nonlinear encoding. This format has no alpha and is considered opaque.
- VK_FORMAT_BC1_RGBA_UNORM_BLOCK specifies a four-component, block-compressed format where each 64-bit compressed texel block encodes a 4×4 rectangle of unsigned normalized RGB texel data, and provides 1 bit of alpha.
- VK_FORMAT_BC1_RGBA_SRGB_BLOCK specifies a four-component, block-compressed format where each 64-bit compressed texel block encodes a 4×4 rectangle of unsigned normalized RGB texel data with sRGB nonlinear encoding, and provides 1 bit of alpha.
- VK_FORMAT_BC2_UNORM_BLOCK specifies a four-component, block-compressed format where each 128-bit compressed texel block encodes a 4×4 rectangle of unsigned normalized RGBA texel data with the first 64 bits encoding alpha values followed by 64 bits encoding RGB values.
- VK_FORMAT_BC2_SRGB_BLOCK specifies a four-component, block-compressed format where each 128-bit compressed texel block encodes a 4×4 rectangle of unsigned normalized RGBA texel data with the first 64 bits encoding alpha values followed by 64 bits encoding RGB values with sRGB nonlinear encoding.

- VK_FORMAT_BC3_UNORM_BLOCK specifies a four-component, block-compressed format where each 128-bit compressed texel block encodes a 4×4 rectangle of unsigned normalized RGBA texel data with the first 64 bits encoding alpha values followed by 64 bits encoding RGB values.
- VK_FORMAT_BC3_SRGB_BLOCK specifies a four-component, block-compressed format where each 128-bit compressed texel block encodes a 4×4 rectangle of unsigned normalized RGBA texel data with the first 64 bits encoding alpha values followed by 64 bits encoding RGB values with sRGB nonlinear encoding.
- VK_FORMAT_BC4_UNORM_BLOCK specifies a one-component, block-compressed format where each 64-bit compressed texel block encodes a 4×4 rectangle of unsigned normalized red texel data.
- VK_FORMAT_BC4_SNORM_BLOCK specifies a one-component, block-compressed format where each 64-bit compressed texel block encodes a 4×4 rectangle of signed normalized red texel data.
- VK_FORMAT_BC5_UNORM_BLOCK specifies a two-component, block-compressed format where each 128-bit compressed texel block encodes a 4×4 rectangle of unsigned normalized RG texel data with the first 64 bits encoding red values followed by 64 bits encoding green values.
- VK_FORMAT_BC5_SNORM_BLOCK specifies a two-component, block-compressed format where each 128-bit compressed texel block encodes a 4×4 rectangle of signed normalized RG texel data with the first 64 bits encoding red values followed by 64 bits encoding green values.
- VK_FORMAT_BC6H_UFLOAT_BLOCK specifies a three-component, block-compressed format where each 128-bit compressed texel block encodes a 4×4 rectangle of unsigned floating-point RGB texel data.
- VK_FORMAT_BC6H_SFLOAT_BLOCK specifies a three-component, block-compressed format where each 128-bit compressed texel block encodes a 4×4 rectangle of signed floating-point RGB texel data.
- VK_FORMAT_BC7_UNORM_BLOCK specifies a four-component, block-compressed format where each 128-bit compressed texel block encodes a 4×4 rectangle of unsigned normalized RGBA texel data.
- VK_FORMAT_BC7_SRGB_BLOCK specifies a four-component, block-compressed format where each 128-bit compressed texel block encodes a 4×4 rectangle of unsigned normalized RGBA texel data with sRGB nonlinear encoding applied to the RGB components.
- VK_FORMAT_ETC2_R8G8B8_UNORM_BLOCK specifies a three-component, ETC2 compressed format where each 64-bit compressed texel block encodes a 4×4 rectangle of unsigned normalized RGB texel data. This format has no alpha and is considered opaque.
- VK_FORMAT_ETC2_R8G8B8_SRGB_BLOCK specifies a three-component, ETC2 compressed format where each 64-bit compressed texel block encodes a 4×4 rectangle of unsigned normalized RGB texel data with sRGB nonlinear encoding. This format has no alpha and is considered opaque.
- VK_FORMAT_ETC2_R8G8B8A1_UNORM_BLOCK specifies a four-component, ETC2 compressed format where each 64-bit compressed texel block encodes a 4×4 rectangle of unsigned normalized RGB texel data, and provides 1 bit of alpha.
- VK_FORMAT_ETC2_R8G8B8A1_SRGB_BLOCK specifies a four-component, ETC2 compressed format where each 64-bit compressed texel block encodes a 4×4 rectangle of unsigned normalized RGB texel data with sRGB nonlinear encoding, and provides 1 bit of alpha.
- VK_FORMAT_ETC2_R8G8B8A8_UNORM_BLOCK specifies a four-component, ETC2 compressed format where each 128-bit compressed texel block encodes a 4×4 rectangle of unsigned normalized

RGBA texel data with the first 64 bits encoding alpha values followed by 64 bits encoding RGB values.

- VK_FORMAT_ETC2_R8G8B8A8_SRGB_BLOCK specifies a four-component, ETC2 compressed format where each 128-bit compressed texel block encodes a 4×4 rectangle of unsigned normalized RGBA texel data with the first 64 bits encoding alpha values followed by 64 bits encoding RGB values with sRGB nonlinear encoding applied.
- VK_FORMAT_EAC_R11_UNORM_BLOCK specifies a one-component, ETC2 compressed format where each 64-bit compressed texel block encodes a 4×4 rectangle of unsigned normalized red texel data.
- VK_FORMAT_EAC_R11_SNORM_BLOCK specifies a one-component, ETC2 compressed format where each 64-bit compressed texel block encodes a 4×4 rectangle of signed normalized red texel data.
- VK_FORMAT_EAC_R11G11_UNORM_BLOCK specifies a two-component, ETC2 compressed format where each 128-bit compressed texel block encodes a 4×4 rectangle of unsigned normalized RG texel data with the first 64 bits encoding red values followed by 64 bits encoding green values.
- VK_FORMAT_EAC_R11G11_SNORM_BLOCK specifies a two-component, ETC2 compressed format where each 128-bit compressed texel block encodes a 4×4 rectangle of signed normalized RG texel data with the first 64 bits encoding red values followed by 64 bits encoding green values.
- VK_FORMAT_ASTC_4x4_UNORM_BLOCK specifies a four-component, ASTC compressed format where each 128-bit compressed texel block encodes a 4×4 rectangle of unsigned normalized RGBA texel data.
- VK_FORMAT_ASTC_4x4_SRGB_BLOCK specifies a four-component, ASTC compressed format where each 128-bit compressed texel block encodes a 4×4 rectangle of unsigned normalized RGBA texel data with sRGB nonlinear encoding applied to the RGB components.
- VK_FORMAT_ASTC_4x4_SFLOAT_BLOCK specifies a four-component, ASTC compressed format where each 128-bit compressed texel block encodes a 4×4 rectangle of signed floating-point RGBA texel data.
- VK_FORMAT_ASTC_5x4_UNORM_BLOCK specifies a four-component, ASTC compressed format where each 128-bit compressed texel block encodes a 5×4 rectangle of unsigned normalized RGBA texel data.
- VK_FORMAT_ASTC_5x4_SRGB_BLOCK specifies a four-component, ASTC compressed format where each 128-bit compressed texel block encodes a 5×4 rectangle of unsigned normalized RGBA texel data with sRGB nonlinear encoding applied to the RGB components.
- VK_FORMAT_ASTC_5x4_SFLOAT_BLOCK specifies a four-component, ASTC compressed format where each 128-bit compressed texel block encodes a 5×4 rectangle of signed floating-point RGBA texel data.
- VK_FORMAT_ASTC_5x5_UNORM_BLOCK specifies a four-component, ASTC compressed format where each 128-bit compressed texel block encodes a 5×5 rectangle of unsigned normalized RGBA texel data.
- VK_FORMAT_ASTC_5x5_SRGB_BLOCK specifies a four-component, ASTC compressed format where each 128-bit compressed texel block encodes a 5×5 rectangle of unsigned normalized RGBA texel data with sRGB nonlinear encoding applied to the RGB components.
- VK_FORMAT_ASTC_5x5_SFLOAT_BLOCK specifies a four-component, ASTC compressed format where each 128-bit compressed texel block encodes a 5×5 rectangle of signed floating-point RGBA texel

data.

- VK_FORMAT_ASTC_6x5_UNORM_BLOCK specifies a four-component, ASTC compressed format where each 128-bit compressed texel block encodes a 6×5 rectangle of unsigned normalized RGBA texel data.
- VK_FORMAT_ASTC_6x5_SRGB_BLOCK specifies a four-component, ASTC compressed format where each 128-bit compressed texel block encodes a 6×5 rectangle of unsigned normalized RGBA texel data with sRGB nonlinear encoding applied to the RGB components.
- VK_FORMAT_ASTC_6x5_SFLOAT_BLOCK specifies a four-component, ASTC compressed format where each 128-bit compressed texel block encodes a 6×5 rectangle of signed floating-point RGBA texel data.
- VK_FORMAT_ASTC_6x6_UNORM_BLOCK specifies a four-component, ASTC compressed format where each 128-bit compressed texel block encodes a 6×6 rectangle of unsigned normalized RGBA texel data.
- VK_FORMAT_ASTC_6x6_SRGB_BLOCK specifies a four-component, ASTC compressed format where each 128-bit compressed texel block encodes a 6×6 rectangle of unsigned normalized RGBA texel data with sRGB nonlinear encoding applied to the RGB components.
- VK_FORMAT_ASTC_6x6_SFLOAT_BLOCK specifies a four-component, ASTC compressed format where each 128-bit compressed texel block encodes a 6×6 rectangle of signed floating-point RGBA texel data.
- VK_FORMAT_ASTC_8x5_UNORM_BLOCK specifies a four-component, ASTC compressed format where each 128-bit compressed texel block encodes an 8×5 rectangle of unsigned normalized RGBA texel data.
- VK_FORMAT_ASTC_8x5_SRGB_BLOCK specifies a four-component, ASTC compressed format where each 128-bit compressed texel block encodes an 8×5 rectangle of unsigned normalized RGBA texel data with sRGB nonlinear encoding applied to the RGB components.
- VK_FORMAT_ASTC_8x5_SFLOAT_BLOCK specifies a four-component, ASTC compressed format where each 128-bit compressed texel block encodes a 8×5 rectangle of signed floating-point RGBA texel data.
- VK_FORMAT_ASTC_8x6_UNORM_BLOCK specifies a four-component, ASTC compressed format where each 128-bit compressed texel block encodes an 8×6 rectangle of unsigned normalized RGBA texel data.
- VK_FORMAT_ASTC_8x6_SRGB_BLOCK specifies a four-component, ASTC compressed format where each 128-bit compressed texel block encodes an 8×6 rectangle of unsigned normalized RGBA texel data with sRGB nonlinear encoding applied to the RGB components.
- VK_FORMAT_ASTC_8x6_SFLOAT_BLOCK specifies a four-component, ASTC compressed format where each 128-bit compressed texel block encodes a 8×6 rectangle of signed floating-point RGBA texel data.
- VK_FORMAT_ASTC_8x8_UNORM_BLOCK specifies a four-component, ASTC compressed format where each 128-bit compressed texel block encodes an 8×8 rectangle of unsigned normalized RGBA texel data.
- VK_FORMAT_ASTC_8x8_SRGB_BLOCK specifies a four-component, ASTC compressed format where each 128-bit compressed texel block encodes an 8×8 rectangle of unsigned normalized RGBA

texel data with sRGB nonlinear encoding applied to the RGB components.

- VK_FORMAT_ASTC_8x8_SFLOAT_BLOCK specifies a four-component, ASTC compressed format where each 128-bit compressed texel block encodes a 8×8 rectangle of signed floating-point RGBA texel data.
- VK_FORMAT_ASTC_10x5_UNORM_BLOCK specifies a four-component, ASTC compressed format where each 128-bit compressed texel block encodes a 10×5 rectangle of unsigned normalized RGBA texel data.
- VK_FORMAT_ASTC_10x5_SRGB_BLOCK specifies a four-component, ASTC compressed format where each 128-bit compressed texel block encodes a 10×5 rectangle of unsigned normalized RGBA texel data with sRGB nonlinear encoding applied to the RGB components.
- VK_FORMAT_ASTC_10x5_SFLOAT_BLOCK specifies a four-component, ASTC compressed format where each 128-bit compressed texel block encodes a 10×5 rectangle of signed floating-point RGBA texel data.
- VK_FORMAT_ASTC_10x6_UNORM_BLOCK specifies a four-component, ASTC compressed format where each 128-bit compressed texel block encodes a 10×6 rectangle of unsigned normalized RGBA texel data.
- VK_FORMAT_ASTC_10x6_SRGB_BLOCK specifies a four-component, ASTC compressed format where each 128-bit compressed texel block encodes a 10×6 rectangle of unsigned normalized RGBA texel data with sRGB nonlinear encoding applied to the RGB components.
- VK_FORMAT_ASTC_10x6_SFLOAT_BLOCK specifies a four-component, ASTC compressed format where each 128-bit compressed texel block encodes a 10×6 rectangle of signed floating-point RGBA texel data.
- VK_FORMAT_ASTC_10x8_UNORM_BLOCK specifies a four-component, ASTC compressed format where each 128-bit compressed texel block encodes a 10×8 rectangle of unsigned normalized RGBA texel data.
- VK_FORMAT_ASTC_10x8_SRGB_BLOCK specifies a four-component, ASTC compressed format where each 128-bit compressed texel block encodes a 10×8 rectangle of unsigned normalized RGBA texel data with sRGB nonlinear encoding applied to the RGB components.
- VK_FORMAT_ASTC_10x8_SFLOAT_BLOCK specifies a four-component, ASTC compressed format where each 128-bit compressed texel block encodes a 10×8 rectangle of signed floating-point RGBA texel data.
- VK_FORMAT_ASTC_10x10_UNORM_BLOCK specifies a four-component, ASTC compressed format where each 128-bit compressed texel block encodes a 10×10 rectangle of unsigned normalized RGBA texel data.
- VK_FORMAT_ASTC_10x10_SRGB_BLOCK specifies a four-component, ASTC compressed format where each 128-bit compressed texel block encodes a 10×10 rectangle of unsigned normalized RGBA texel data with sRGB nonlinear encoding applied to the RGB components.
- VK_FORMAT_ASTC_10x10_SFLOAT_BLOCK specifies a four-component, ASTC compressed format where each 128-bit compressed texel block encodes a 10×10 rectangle of signed floating-point RGBA texel data.
- VK_FORMAT_ASTC_12x10_UNORM_BLOCK specifies a four-component, ASTC compressed format where each 128-bit compressed texel block encodes a 12×10 rectangle of unsigned normalized RGBA

texel data.

- VK_FORMAT_ASTC_12x10_SRGB_BLOCK specifies a four-component, ASTC compressed format where each 128-bit compressed texel block encodes a 12×10 rectangle of unsigned normalized RGBA texel data with sRGB nonlinear encoding applied to the RGB components.
- VK_FORMAT_ASTC_12x10_SFLOAT_BLOCK specifies a four-component, ASTC compressed format where each 128-bit compressed texel block encodes a 12×10 rectangle of signed floating-point RGBA texel data.
- VK_FORMAT_ASTC_12x12_UNORM_BLOCK specifies a four-component, ASTC compressed format where each 128-bit compressed texel block encodes a 12×12 rectangle of unsigned normalized RGBA texel data.
- VK_FORMAT_ASTC_12x12_SRGB_BLOCK specifies a four-component, ASTC compressed format where each 128-bit compressed texel block encodes a 12×12 rectangle of unsigned normalized RGBA texel data with sRGB nonlinear encoding applied to the RGB components.
- VK_FORMAT_ASTC_12x12_SFLOAT_BLOCK specifies a four-component, ASTC compressed format where each 128-bit compressed texel block encodes a 12×12 rectangle of signed floating-point RGBA texel data.
- VK_FORMAT_G8B8G8R8_422_UNORM specifies a four-component, 32-bit format containing a pair of G components, an R component, and a B component, collectively encoding a 2×1 rectangle of unsigned normalized RGB texel data. One G value is present at each *i* coordinate, with the B and R values shared across both G values and thus recorded at half the horizontal resolution of the image. This format has an 8-bit G component for the even *i* coordinate in byte 0, an 8-bit B component in byte 1, an 8-bit G component for the odd *i* coordinate in byte 2, and an 8-bit R component in byte 3. This format only supports images with a width that is a multiple of two. For the purposes of the constraints on copy extents, this format is treated as a compressed format with a 2×1 compressed texel block.
- VK_FORMAT_B8G8R8G8_422_UNORM specifies a four-component, 32-bit format containing a pair of G components, an R component, and a B component, collectively encoding a 2×1 rectangle of unsigned normalized RGB texel data. One G value is present at each *i* coordinate, with the B and R values shared across both G values and thus recorded at half the horizontal resolution of the image. This format has an 8-bit B component in byte 0, an 8-bit G component for the even *i* coordinate in byte 1, an 8-bit R component in byte 2, and an 8-bit G component for the odd *i* coordinate in byte 3. This format only supports images with a width that is a multiple of two. For the purposes of the constraints on copy extents, this format is treated as a compressed format with a 2×1 compressed texel block.
- VK_FORMAT_G8_B8_R8_3PLANE_420_UNORM specifies an unsigned normalized *multi-planar format* that has an 8-bit G component in plane 0, an 8-bit B component in plane 1, and an 8-bit R component in plane 2. The horizontal and vertical dimensions of the R and B planes are halved relative to the image dimensions, and each R and B component is shared with the G components for which $\lfloor i_G \times 0.5 \rfloor = i_B = i_R$ and $\lfloor j_G \times 0.5 \rfloor = j_B = j_R$. The location of each plane when this image is in linear layout can be determined via vkGetImageSubresourceLayout, using VK_IMAGE_ASPECT_PLANE_0_BIT for the G plane, VK_IMAGE_ASPECT_PLANE_1_BIT for the B plane, and VK_IMAGE_ASPECT_PLANE_2_BIT for the R plane. This format only supports images with a width and height that is a multiple of two.
- VK_FORMAT_G8_B8R8_2PLANE_420_UNORM specifies an unsigned normalized *multi-planar format* that

has an 8-bit G component in plane 0, and a two-component, 16-bit BR plane 1 consisting of an 8-bit B component in byte 0 and an 8-bit R component in byte 1. The horizontal and vertical dimensions of the BR plane are halved relative to the image dimensions, and each R and B value is shared with the G components for which $\lfloor i_G \times 0.5 \rfloor = i_B = i_R$ and $\lfloor j_G \times 0.5 \rfloor = j_B = j_R$. The location of each plane when this image is in linear layout can be determined via vkGetImageSubresourceLayout, using VK_IMAGE_ASPECT_PLANE_0_BIT for the G plane, and VK_IMAGE_ASPECT_PLANE_1_BIT for the BR plane. This format only supports images with a width and height that is a multiple of two.

- VK_FORMAT_G8_B8_R8_3PLANE_422_UNORM specifies an unsigned normalized *multi-planar format* that has an 8-bit G component in plane 0, an 8-bit B component in plane 1, and an 8-bit R component in plane 2. The horizontal dimension of the R and B plane is halved relative to the image dimensions, and each R and B value is shared with the G components for which $\lfloor i_G \times 0.5 \rfloor = i_B = i_R$. The location of each plane when this image is in linear layout can be determined via vkGetImageSubresourceLayout, using VK_IMAGE_ASPECT_PLANE_0_BIT for the G plane, VK_IMAGE_ASPECT_PLANE_1_BIT for the B plane, and VK_IMAGE_ASPECT_PLANE_2_BIT for the R plane. This format only supports images with a width that is a multiple of two.
- VK_FORMAT_G8_B8R8_2PLANE_422_UNORM specifies an unsigned normalized *multi-planar format* that has an 8-bit G component in plane 0, and a two-component, 16-bit BR plane 1 consisting of an 8-bit B component in byte 0 and an 8-bit R component in byte 1. The horizontal dimension of the BR plane is halved relative to the image dimensions, and each R and B value is shared with the G components for which $\lfloor i_G \times 0.5 \rfloor = i_B = i_R$. The location of each plane when this image is in linear layout can be determined via vkGetImageSubresourceLayout, using VK_IMAGE_ASPECT_PLANE_0_BIT for the G plane, and VK_IMAGE_ASPECT_PLANE_1_BIT for the BR plane. This format only supports images with a width that is a multiple of two.
- VK_FORMAT_G8_B8_R8_3PLANE_444_UNORM specifies an unsigned normalized *multi-planar format* that has an 8-bit G component in plane 0, an 8-bit B component in plane 1, and an 8-bit R component in plane 2. Each plane has the same dimensions and each R, G and B component contributes to a single texel. The location of each plane when this image is in linear layout can be determined via vkGetImageSubresourceLayout, using VK_IMAGE_ASPECT_PLANE_0_BIT for the G plane, VK_IMAGE_ASPECT_PLANE_1_BIT for the B plane, and VK_IMAGE_ASPECT_PLANE_2_BIT for the R plane.
- VK_FORMAT_R10X6_UNORM_PACK16 specifies a one-component, 16-bit unsigned normalized format that has a single 10-bit R component in the top 10 bits of a 16-bit word, with the bottom 6 bits unused.
- VK_FORMAT_R10X6G10X6_UNORM_2PACK16 specifies a two-component, 32-bit unsigned normalized format that has a 10-bit R component in the top 10 bits of the word in bytes 0..1, and a 10-bit G component in the top 10 bits of the word in bytes 2..3, with the bottom 6 bits of each word unused.
- VK_FORMAT_R10X6G10X6B10X6A10X6_UNORM_4PACK16 specifies a four-component, 64-bit unsigned normalized format that has a 10-bit R component in the top 10 bits of the word in bytes 0..1, a 10-bit G component in the top 10 bits of the word in bytes 2..3, a 10-bit B component in the top 10 bits of the word in bytes 4..5, and a 10-bit A component in the top 10 bits of the word in bytes 6..7, with the bottom 6 bits of each word unused.
- VK_FORMAT_G10X6B10X6G10X6R10X6_422_UNORM_4PACK16 specifies a four-component, 64-bit format containing a pair of G components, an R component, and a B component, collectively encoding a 2×1 rectangle of unsigned normalized RGB texel data. One G value is present at each *i*

coordinate, with the B and R values shared across both G values and thus recorded at half the horizontal resolution of the image. This format has a 10-bit G component for the even i coordinate in the top 10 bits of the word in bytes 0..1, a 10-bit B component in the top 10 bits of the word in bytes 2..3, a 10-bit G component for the odd i coordinate in the top 10 bits of the word in bytes 4..5, and a 10-bit R component in the top 10 bits of the word in bytes 6..7, with the bottom 6 bits of each word unused. This format only supports images with a width that is a multiple of two. For the purposes of the constraints on copy extents, this format is treated as a compressed format with a 2×1 compressed texel block.

- VK_FORMAT_B10X6G10X6R10X6G10X6_422_UNORM_4PACK16 specifies a four-component, 64-bit format containing a pair of G components, an R component, and a B component, collectively encoding a 2×1 rectangle of unsigned normalized RGB texel data. One G value is present at each i coordinate, with the B and R values shared across both G values and thus recorded at half the horizontal resolution of the image. This format has a 10-bit B component in the top 10 bits of the word in bytes 0..1, a 10-bit G component for the even i coordinate in the top 10 bits of the word in bytes 2..3, a 10-bit R component in the top 10 bits of the word in bytes 4..5, and a 10-bit G component for the odd i coordinate in the top 10 bits of the word in bytes 6..7, with the bottom 6 bits of each word unused. This format only supports images with a width that is a multiple of two. For the purposes of the constraints on copy extents, this format is treated as a compressed format with a 2×1 compressed texel block.
- VK_FORMAT_G10X6_B10X6_R10X6_3PLANE_420_UNORM_3PACK16 specifies an unsigned normalized *multi-planar format* that has a 10-bit G component in the top 10 bits of each 16-bit word of plane 0, a 10-bit B component in the top 10 bits of each 16-bit word of plane 1, and a 10-bit R component in the top 10 bits of each 16-bit word of plane 2, with the bottom 6 bits of each word unused. The horizontal and vertical dimensions of the R and B planes are halved relative to the image dimensions, and each R and B component is shared with the G components for which $\lfloor i_G \times 0.5 \rfloor = i_B = i_R$ and $\lfloor j_G \times 0.5 \rfloor = j_B = j_R$. The location of each plane when this image is in linear layout can be determined via vkGetImageSubresourceLayout, using VK_IMAGE_ASPECT_PLANE_0_BIT for the G plane, VK_IMAGE_ASPECT_PLANE_1_BIT for the B plane, and VK_IMAGE_ASPECT_PLANE_2_BIT for the R plane. This format only supports images with a width and height that is a multiple of two.
- VK_FORMAT_G10X6_B10X6R10X6_2PLANE_420_UNORM_3PACK16 specifies an unsigned normalized *multi-planar format* that has a 10-bit G component in the top 10 bits of each 16-bit word of plane 0, and a two-component, 32-bit BR plane 1 consisting of a 10-bit B component in the top 10 bits of the word in bytes 0..1, and a 10-bit R component in the top 10 bits of the word in bytes 2..3, with the bottom 6 bits of each word unused. The horizontal and vertical dimensions of the BR plane are halved relative to the image dimensions, and each R and B value is shared with the G components for which $\lfloor i_G \times 0.5 \rfloor = i_B = i_R$ and $\lfloor j_G \times 0.5 \rfloor = j_B = j_R$. The location of each plane when this image is in linear layout can be determined via vkGetImageSubresourceLayout, using VK_IMAGE_ASPECT_PLANE_0_BIT for the G plane, and VK_IMAGE_ASPECT_PLANE_1_BIT for the BR plane. This format only supports images with a width and height that is a multiple of two.
- VK_FORMAT_G10X6_B10X6_R10X6_3PLANE_422_UNORM_3PACK16 specifies an unsigned normalized *multi-planar format* that has a 10-bit G component in the top 10 bits of each 16-bit word of plane 0, a 10-bit B component in the top 10 bits of each 16-bit word of plane 1, and a 10-bit R component in the top 10 bits of each 16-bit word of plane 2, with the bottom 6 bits of each word unused. The horizontal dimension of the R and B plane is halved relative to the image dimensions, and each R and B value is shared with the G components for which $\lfloor i_G \times 0.5 \rfloor = i_B = i_R$. The location of each

plane when this image is in linear layout can be determined via vkGetImageSubresourceLayout, using VK_IMAGE_ASPECT_PLANE_0_BIT for the G plane, VK_IMAGE_ASPECT_PLANE_1_BIT for the B plane, and VK_IMAGE_ASPECT_PLANE_2_BIT for the R plane. This format only supports images with a width that is a multiple of two.

- VK_FORMAT_G10X6_B10X6R10X6_2PLANE_422_UNORM_3PACK16 specifies an unsigned normalized *multi-planar format* that has a 10-bit G component in the top 10 bits of each 16-bit word of plane 0, and a two-component, 32-bit BR plane 1 consisting of a 10-bit B component in the top 10 bits of the word in bytes 0..1, and a 10-bit R component in the top 10 bits of the word in bytes 2..3, with the bottom 6 bits of each word unused. The horizontal dimension of the BR plane is halved relative to the image dimensions, and each R and B value is shared with the G components for which $\lfloor i_G \times 0.5 \rfloor = i_B = i_R$. The location of each plane when this image is in linear layout can be determined via vkGetImageSubresourceLayout, using VK_IMAGE_ASPECT_PLANE_0_BIT for the G plane, and VK_IMAGE_ASPECT_PLANE_1_BIT for the BR plane. This format only supports images with a width that is a multiple of two.
- VK_FORMAT_G10X6_B10X6_R10X6_3PLANE_444_UNORM_3PACK16 specifies an unsigned normalized *multi-planar format* that has a 10-bit G component in the top 10 bits of each 16-bit word of plane 0, a 10-bit B component in the top 10 bits of each 16-bit word of plane 1, and a 10-bit R component in the top 10 bits of each 16-bit word of plane 2, with the bottom 6 bits of each word unused. Each plane has the same dimensions and each R, G and B component contributes to a single texel. The location of each plane when this image is in linear layout can be determined via vkGetImageSubresourceLayout, using VK_IMAGE_ASPECT_PLANE_0_BIT for the G plane, VK_IMAGE_ASPECT_PLANE_1_BIT for the B plane, and VK_IMAGE_ASPECT_PLANE_2_BIT for the R plane.
- VK_FORMAT_R12X4_UNORM_PACK16 specifies a one-component, 16-bit unsigned normalized format that has a single 12-bit R component in the top 12 bits of a 16-bit word, with the bottom 4 bits unused.
- VK_FORMAT_R12X4G12X4_UNORM_2PACK16 specifies a two-component, 32-bit unsigned normalized format that has a 12-bit R component in the top 12 bits of the word in bytes 0..1, and a 12-bit G component in the top 12 bits of the word in bytes 2..3, with the bottom 4 bits of each word unused.
- VK_FORMAT_R12X4G12X4B12X4A12X4_UNORM_4PACK16 specifies a four-component, 64-bit unsigned normalized format that has a 12-bit R component in the top 12 bits of the word in bytes 0..1, a 12-bit G component in the top 12 bits of the word in bytes 2..3, a 12-bit B component in the top 12 bits of the word in bytes 4..5, and a 12-bit A component in the top 12 bits of the word in bytes 6..7, with the bottom 4 bits of each word unused.
- VK_FORMAT_G12X4B12X4G12X4R12X4_422_UNORM_4PACK16 specifies a four-component, 64-bit format containing a pair of G components, an R component, and a B component, collectively encoding a 2×1 rectangle of unsigned normalized RGB texel data. One G value is present at each i coordinate, with the B and R values shared across both G values and thus recorded at half the horizontal resolution of the image. This format has a 12-bit G component for the even i coordinate in the top 12 bits of the word in bytes 0..1, a 12-bit B component in the top 12 bits of the word in bytes 2..3, a 12-bit G component for the odd i coordinate in the top 12 bits of the word in bytes 4..5, and a 12-bit R component in the top 12 bits of the word in bytes 6..7, with the bottom 4 bits of each word unused. This format only supports images with a width that is a multiple of two. For the purposes of the constraints on copy extents, this format is treated as a compressed format with a 2×1 compressed texel block.

- VK_FORMAT_B12X4G12X4R12X4G12X4_422_UNORM_4PACK16 specifies a four-component, 64-bit format containing a pair of G components, an R component, and a B component, collectively encoding a 2×1 rectangle of unsigned normalized RGB texel data. One G value is present at each i coordinate, with the B and R values shared across both G values and thus recorded at half the horizontal resolution of the image. This format has a 12-bit B component in the top 12 bits of the word in bytes 0..1, a 12-bit G component for the even i coordinate in the top 12 bits of the word in bytes 2..3, a 12-bit R component in the top 12 bits of the word in bytes 4..5, and a 12-bit G component for the odd i coordinate in the top 12 bits of the word in bytes 6..7, with the bottom 4 bits of each word unused. This format only supports images with a width that is a multiple of two. For the purposes of the constraints on copy extents, this format is treated as a compressed format with a 2×1 compressed texel block.
- VK_FORMAT_G12X4_B12X4_R12X4_3PLANE_420_UNORM_3PACK16 specifies an unsigned normalized *multi-planar format* that has a 12-bit G component in the top 12 bits of each 16-bit word of plane 0, a 12-bit B component in the top 12 bits of each 16-bit word of plane 1, and a 12-bit R component in the top 12 bits of each 16-bit word of plane 2, with the bottom 4 bits of each word unused. The horizontal and vertical dimensions of the R and B planes are halved relative to the image dimensions, and each R and B component is shared with the G components for which $\lfloor i_G \times 0.5 \rfloor = i_B = i_R$ and $\lfloor j_G \times 0.5 \rfloor = j_B = j_R$. The location of each plane when this image is in linear layout can be determined via vkGetImageSubresourceLayout, using VK_IMAGE_ASPECT_PLANE_0_BIT for the G plane, VK_IMAGE_ASPECT_PLANE_1_BIT for the B plane, and VK_IMAGE_ASPECT_PLANE_2_BIT for the R plane. This format only supports images with a width and height that is a multiple of two.
- VK_FORMAT_G12X4_B12X4R12X4_2PLANE_420_UNORM_3PACK16 specifies an unsigned normalized *multi-planar format* that has a 12-bit G component in the top 12 bits of each 16-bit word of plane 0, and a two-component, 32-bit BR plane 1 consisting of a 12-bit B component in the top 12 bits of the word in bytes 0..1, and a 12-bit R component in the top 12 bits of the word in bytes 2..3, with the bottom 4 bits of each word unused. The horizontal and vertical dimensions of the BR plane are halved relative to the image dimensions, and each R and B value is shared with the G components for which $\lfloor i_G \times 0.5 \rfloor = i_B = i_R$ and $\lfloor j_G \times 0.5 \rfloor = j_B = j_R$. The location of each plane when this image is in linear layout can be determined via vkGetImageSubresourceLayout, using VK_IMAGE_ASPECT_PLANE_0_BIT for the G plane, and VK_IMAGE_ASPECT_PLANE_1_BIT for the BR plane. This format only supports images with a width and height that is a multiple of two.
- VK_FORMAT_G12X4_B12X4_R12X4_3PLANE_422_UNORM_3PACK16 specifies an unsigned normalized *multi-planar format* that has a 12-bit G component in the top 12 bits of each 16-bit word of plane 0, a 12-bit B component in the top 12 bits of each 16-bit word of plane 1, and a 12-bit R component in the top 12 bits of each 16-bit word of plane 2, with the bottom 4 bits of each word unused. The horizontal dimension of the R and B plane is halved relative to the image dimensions, and each R and B value is shared with the G components for which $\lfloor i_G \times 0.5 \rfloor = i_B = i_R$. The location of each plane when this image is in linear layout can be determined via vkGetImageSubresourceLayout, using VK_IMAGE_ASPECT_PLANE_0_BIT for the G plane, VK_IMAGE_ASPECT_PLANE_1_BIT for the B plane, and VK_IMAGE_ASPECT_PLANE_2_BIT for the R plane. This format only supports images with a width that is a multiple of two.
- VK_FORMAT_G12X4_B12X4R12X4_2PLANE_422_UNORM_3PACK16 specifies an unsigned normalized *multi-planar format* that has a 12-bit G component in the top 12 bits of each 16-bit word of plane 0, and a two-component, 32-bit BR plane 1 consisting of a 12-bit B component in the top 12 bits of the word in bytes 0..1, and a 12-bit R component in the top 12 bits of the word in bytes 2..3, with

the bottom 4 bits of each word unused. The horizontal dimension of the BR plane is halved relative to the image dimensions, and each R and B value is shared with the G components for which $\lfloor i_G \times 0.5 \rfloor = i_B = i_R$. The location of each plane when this image is in linear layout can be determined via vkGetImageSubresourceLayout, using VK_IMAGE_ASPECT_PLANE_0_BIT for the G plane, and VK_IMAGE_ASPECT_PLANE_1_BIT for the BR plane. This format only supports images with a width that is a multiple of two.

- VK_FORMAT_G12X4_B12X4_R12X4_3PLANE_444_UNORM_3PACK16 specifies an unsigned normalized *multi-planar format* that has a 12-bit G component in the top 12 bits of each 16-bit word of plane 0, a 12-bit B component in the top 12 bits of each 16-bit word of plane 1, and a 12-bit R component in the top 12 bits of each 16-bit word of plane 2, with the bottom 4 bits of each word unused. Each plane has the same dimensions and each R, G and B component contributes to a single texel. The location of each plane when this image is in linear layout can be determined via vkGetImageSubresourceLayout, using VK_IMAGE_ASPECT_PLANE_0_BIT for the G plane, VK_IMAGE_ASPECT_PLANE_1_BIT for the B plane, and VK_IMAGE_ASPECT_PLANE_2_BIT for the R plane.
- VK_FORMAT_G16B16G16R16_422_UNORM specifies a four-component, 64-bit format containing a pair of G components, an R component, and a B component, collectively encoding a 2×1 rectangle of unsigned normalized RGB texel data. One G value is present at each i coordinate, with the B and R values shared across both G values and thus recorded at half the horizontal resolution of the image. This format has a 16-bit G component for the even i coordinate in the word in bytes 0..1, a 16-bit B component in the word in bytes 2..3, a 16-bit G component for the odd i coordinate in the word in bytes 4..5, and a 16-bit R component in the word in bytes 6..7. This format only supports images with a width that is a multiple of two. For the purposes of the constraints on copy extents, this format is treated as a compressed format with a 2×1 compressed texel block.
- VK_FORMAT_B16G16R16G16_422_UNORM specifies a four-component, 64-bit format containing a pair of G components, an R component, and a B component, collectively encoding a 2×1 rectangle of unsigned normalized RGB texel data. One G value is present at each i coordinate, with the B and R values shared across both G values and thus recorded at half the horizontal resolution of the image. This format has a 16-bit B component in the word in bytes 0..1, a 16-bit G component for the even i coordinate in the word in bytes 2..3, a 16-bit R component in the word in bytes 4..5, and a 16-bit G component for the odd i coordinate in the word in bytes 6..7. This format only supports images with a width that is a multiple of two. For the purposes of the constraints on copy extents, this format is treated as a compressed format with a 2×1 compressed texel block.
- VK_FORMAT_G16_B16_R16_3PLANE_420_UNORM specifies an unsigned normalized *multi-planar format* that has a 16-bit G component in each 16-bit word of plane 0, a 16-bit B component in each 16-bit word of plane 1, and a 16-bit R component in each 16-bit word of plane 2. The horizontal and vertical dimensions of the R and B planes are halved relative to the image dimensions, and each R and B component is shared with the G components for which $\lfloor i_G \times 0.5 \rfloor = i_B = i_R$ and $\lfloor j_G \times 0.5 \rfloor = j_B = j_R$. The location of each plane when this image is in linear layout can be determined via vkGetImageSubresourceLayout, using VK_IMAGE_ASPECT_PLANE_0_BIT for the G plane, VK_IMAGE_ASPECT_PLANE_1_BIT for the B plane, and VK_IMAGE_ASPECT_PLANE_2_BIT for the R plane. This format only supports images with a width and height that is a multiple of two.
- VK_FORMAT_G16_B16R16_2PLANE_420_UNORM specifies an unsigned normalized *multi-planar format* that has a 16-bit G component in each 16-bit word of plane 0, and a two-component, 32-bit BR plane 1 consisting of a 16-bit B component in the word in bytes 0..1, and a 16-bit R component in the word in bytes 2..3. The horizontal and vertical dimensions of the BR plane are halved relative to the image dimensions, and each R and B value is shared with the G components for

which $\lfloor i_G \times 0.5 \rfloor = i_B = i_R$ and $\lfloor j_G \times 0.5 \rfloor = j_B = j_R$. The location of each plane when this image is in linear layout can be determined via vkGetImageSubresourceLayout, using VK_IMAGE_ASPECT_PLANE_0_BIT for the G plane, and VK_IMAGE_ASPECT_PLANE_1_BIT for the BR plane. This format only supports images with a width and height that is a multiple of two.

- VK_FORMAT_G16_B16_R16_3PLANE_422_UNORM specifies an unsigned normalized *multi-planar format* that has a 16-bit G component in each 16-bit word of plane 0, a 16-bit B component in each 16-bit word of plane 1, and a 16-bit R component in each 16-bit word of plane 2. The horizontal dimension of the R and B plane is halved relative to the image dimensions, and each R and B value is shared with the G components for which $\lfloor i_G \times 0.5 \rfloor = i_B = i_R$. The location of each plane when this image is in linear layout can be determined via vkGetImageSubresourceLayout, using VK_IMAGE_ASPECT_PLANE_0_BIT for the G plane, VK_IMAGE_ASPECT_PLANE_1_BIT for the B plane, and VK_IMAGE_ASPECT_PLANE_2_BIT for the R plane. This format only supports images with a width that is a multiple of two.
- VK_FORMAT_G16_B16R16_2PLANE_422_UNORM specifies an unsigned normalized *multi-planar format* that has a 16-bit G component in each 16-bit word of plane 0, and a two-component, 32-bit BR plane 1 consisting of a 16-bit B component in the word in bytes 0..1, and a 16-bit R component in the word in bytes 2..3. The horizontal dimension of the BR plane is halved relative to the image dimensions, and each R and B value is shared with the G components for which $\lfloor i_G \times 0.5 \rfloor = i_B = i_R$. The location of each plane when this image is in linear layout can be determined via vkGetImageSubresourceLayout, using VK_IMAGE_ASPECT_PLANE_0_BIT for the G plane, and VK_IMAGE_ASPECT_PLANE_1_BIT for the BR plane. This format only supports images with a width that is a multiple of two.
- VK_FORMAT_G16_B16_R16_3PLANE_444_UNORM specifies an unsigned normalized *multi-planar format* that has a 16-bit G component in each 16-bit word of plane 0, a 16-bit B component in each 16-bit word of plane 1, and a 16-bit R component in each 16-bit word of plane 2. Each plane has the same dimensions and each R, G and B component contributes to a single texel. The location of each plane when this image is in linear layout can be determined via vkGetImageSubresourceLayout, using VK_IMAGE_ASPECT_PLANE_0_BIT for the G plane, VK_IMAGE_ASPECT_PLANE_1_BIT for the B plane, and VK_IMAGE_ASPECT_PLANE_2_BIT for the R plane.
- VK_FORMAT_G8_B8R8_2PLANE_444_UNORM specifies an unsigned normalized *multi-planar format* that has an 8-bit G component in plane 0, and a two-component, 16-bit BR plane 1 consisting of an 8-bit B component in byte 0 and an 8-bit R component in byte 1. Both planes have the same dimensions and each R, G and B component contributes to a single texel. The location of each plane when this image is in linear layout can be determined via vkGetImageSubresourceLayout, using VK_IMAGE_ASPECT_PLANE_0_BIT for the G plane, and VK_IMAGE_ASPECT_PLANE_1_BIT for the BR plane.
- VK_FORMAT_G10X6_B10X6R10X6_2PLANE_444_UNORM_3PACK16 specifies an unsigned normalized *multi-planar format* that has a 10-bit G component in the top 10 bits of each 16-bit word of plane 0, and a two-component, 32-bit BR plane 1 consisting of a 10-bit B component in the top 10 bits of the word in bytes 0..1, and a 10-bit R component in the top 10 bits of the word in bytes 2..3, the bottom 6 bits of each word unused. Both planes have the same dimensions and each R, G and B component contributes to a single texel. The location of each plane when this image is in linear layout can be determined via vkGetImageSubresourceLayout, using VK_IMAGE_ASPECT_PLANE_0_BIT for the G plane, and VK_IMAGE_ASPECT_PLANE_1_BIT for the BR plane.
- VK_FORMAT_G12X4_B12X4R12X4_2PLANE_444_UNORM_3PACK16 specifies an unsigned normalized *multi-*

planar format that has a 12-bit G component in the top 12 bits of each 16-bit word of plane 0, and a two-component, 32-bit BR plane 1 consisting of a 12-bit B component in the top 12 bits of the word in bytes 0..1, and a 12-bit R component in the top 12 bits of the word in bytes 2..3, the bottom 4 bits of each word unused. Both planes have the same dimensions and each R, G and B component contributes to a single texel. The location of each plane when this image is in linear layout can be determined via vkGetImageSubresourceLayout, using VK_IMAGE_ASPECT_PLANE_0_BIT for the G plane, and VK_IMAGE_ASPECT_PLANE_1_BIT for the BR plane.

- VK_FORMAT_G16_B16R16_2PLANE_444_UNORM specifies an unsigned normalized *multi-planar format* that has a 16-bit G component in each 16-bit word of plane 0, and a two-component, 32-bit BR plane 1 consisting of a 16-bit B component in the word in bytes 0..1, and a 16-bit R component in the word in bytes 2..3. Both planes have the same dimensions and each R, G and B component contributes to a single texel. The location of each plane when this image is in linear layout can be determined via vkGetImageSubresourceLayout, using VK_IMAGE_ASPECT_PLANE_0_BIT for the G plane, and VK_IMAGE_ASPECT_PLANE_1_BIT for the BR plane.

34.1.1. Compatible Formats of Planes of Multi-Planar Formats

Individual planes of multi-planar formats are size-compatible with single-plane color formats if they occupy the same number of bits per texel block, and are compatible with those formats if they have the same block extent.

In the following table, individual planes of a *multi-planar* format are compatible with the format listed against the relevant plane index for that multi-planar format, and any format compatible with the listed single-plane format according to Format Compatibility Classes. These planes are also size-compatible with any format that is size-compatible with the listed single-plane format.

Table 34. Plane Format Compatibility Table

Plane	Compatible format for plane	Width relative to the width *w* of the plane with the largest dimensions	Height relative to the height *h* of the plane with the largest dimensions
VK_FORMAT_G8_B8_R8_3PLANE_420_UNORM			
0	VK_FORMAT_R8_UNORM	w	h
1	VK_FORMAT_R8_UNORM	w/2	h/2
2	VK_FORMAT_R8_UNORM	w/2	h/2
VK_FORMAT_G8_B8R8_2PLANE_420_UNORM			
0	VK_FORMAT_R8_UNORM	w	h
1	VK_FORMAT_R8G8_UNORM	w/2	h/2
VK_FORMAT_G8_B8_R8_3PLANE_422_UNORM			
0	VK_FORMAT_R8_UNORM	w	h
1	VK_FORMAT_R8_UNORM	w/2	h
2	VK_FORMAT_R8_UNORM	w/2	h
VK_FORMAT_G8_B8R8_2PLANE_422_UNORM			

Plane	Compatible format for plane	Width relative to the width w of the plane with the largest dimensions	Height relative to the height h of the plane with the largest dimensions
0	VK_FORMAT_R8_UNORM	w	h
1	VK_FORMAT_R8G8_UNORM	w/2	h
VK_FORMAT_G8_B8_R8_3PLANE_444_UNORM			
0	VK_FORMAT_R8_UNORM	w	h
1	VK_FORMAT_R8_UNORM	w	h
2	VK_FORMAT_R8_UNORM	w	h
VK_FORMAT_G10X6_B10X6_R10X6_3PLANE_420_UNORM_3PACK16			
0	VK_FORMAT_R10X6_UNORM_PACK16	w	h
1	VK_FORMAT_R10X6_UNORM_PACK16	w/2	h/2
2	VK_FORMAT_R10X6_UNORM_PACK16	w/2	h/2
VK_FORMAT_G10X6_B10X6R10X6_2PLANE_420_UNORM_3PACK16			
0	VK_FORMAT_R10X6_UNORM_PACK16	w	h
1	VK_FORMAT_R10X6G10X6_UNORM_2PACK16	w/2	h/2
VK_FORMAT_G10X6_B10X6_R10X6_3PLANE_422_UNORM_3PACK16			
0	VK_FORMAT_R10X6_UNORM_PACK16	w	h
1	VK_FORMAT_R10X6_UNORM_PACK16	w/2	h
2	VK_FORMAT_R10X6_UNORM_PACK16	w/2	h
VK_FORMAT_G10X6_B10X6R10X6_2PLANE_422_UNORM_3PACK16			
0	VK_FORMAT_R10X6_UNORM_PACK16	w	h
1	VK_FORMAT_R10X6G10X6_UNORM_2PACK16	w/2	h
VK_FORMAT_G10X6_B10X6_R10X6_3PLANE_444_UNORM_3PACK16			
0	VK_FORMAT_R10X6_UNORM_PACK16	w	h
1	VK_FORMAT_R10X6_UNORM_PACK16	w	h
2	VK_FORMAT_R10X6_UNORM_PACK16	w	h
VK_FORMAT_G12X4_B12X4_R12X4_3PLANE_420_UNORM_3PACK16			
0	VK_FORMAT_R12X4_UNORM_PACK16	w	h
1	VK_FORMAT_R12X4_UNORM_PACK16	w/2	h/2
2	VK_FORMAT_R12X4_UNORM_PACK16	w/2	h/2
VK_FORMAT_G12X4_B12X4R12X4_2PLANE_420_UNORM_3PACK16			
0	VK_FORMAT_R12X4_UNORM_PACK16	w	h
1	VK_FORMAT_R12X4G12X4_UNORM_2PACK16	w/2	h/2
VK_FORMAT_G12X4_B12X4_R12X4_3PLANE_422_UNORM_3PACK16			

Plane	Compatible format for plane	Width relative to the width w of the plane with the largest dimensions	Height relative to the height h of the plane with the largest dimensions
0	VK_FORMAT_R12X4_UNORM_PACK16	w	h
1	VK_FORMAT_R12X4_UNORM_PACK16	w/2	h
2	VK_FORMAT_R12X4_UNORM_PACK16	w/2	h
VK_FORMAT_G12X4_B12X4R12X4_2PLANE_422_UNORM_3PACK16			
0	VK_FORMAT_R12X4_UNORM_PACK16	w	h
1	VK_FORMAT_R12X4G12X4_UNORM_2PACK16	w/2	h
VK_FORMAT_G12X4_B12X4_R12X4_3PLANE_444_UNORM_3PACK16			
0	VK_FORMAT_R12X4_UNORM_PACK16	w	h
1	VK_FORMAT_R12X4_UNORM_PACK16	w	h
2	VK_FORMAT_R12X4_UNORM_PACK16	w	h
VK_FORMAT_G16_B16_R16_3PLANE_420_UNORM			
0	VK_FORMAT_R16_UNORM	w	h
1	VK_FORMAT_R16_UNORM	w/2	h/2
2	VK_FORMAT_R16_UNORM	w/2	h/2
VK_FORMAT_G16_B16R16_2PLANE_420_UNORM			
0	VK_FORMAT_R16_UNORM	w	h
1	VK_FORMAT_R16G16_UNORM	w/2	h/2
VK_FORMAT_G16_B16_R16_3PLANE_422_UNORM			
0	VK_FORMAT_R16_UNORM	w	h
1	VK_FORMAT_R16_UNORM	w/2	h
2	VK_FORMAT_R16_UNORM	w/2	h
VK_FORMAT_G16_B16R16_2PLANE_422_UNORM			
0	VK_FORMAT_R16_UNORM	w	h
1	VK_FORMAT_R16G16_UNORM	w/2	h
VK_FORMAT_G16_B16_R16_3PLANE_444_UNORM			
0	VK_FORMAT_R16_UNORM	w	h
1	VK_FORMAT_R16_UNORM	w	h
2	VK_FORMAT_R16_UNORM	w	h
VK_FORMAT_G8_B8R8_2PLANE_444_UNORM			
0	VK_FORMAT_R8_UNORM	w	h
1	VK_FORMAT_R8G8_UNORM	w	h
VK_FORMAT_G10X6_B10X6R10X6_2PLANE_444_UNORM_3PACK16			

Plane	Compatible format for plane	Width relative to the width w of the plane with the largest dimensions	Height relative to the height h of the plane with the largest dimensions
0	VK_FORMAT_R10X6_UNORM_PACK16	w	h
1	VK_FORMAT_R10X6G10X6_UNORM_2PACK16	w	h
VK_FORMAT_G12X4_B12X4R12X4_2PLANE_444_UNORM_3PACK16			
0	VK_FORMAT_R12X4_UNORM_PACK16	w	h
1	VK_FORMAT_R12X4G12X4_UNORM_2PACK16	w	h
VK_FORMAT_G16_B16R16_2PLANE_444_UNORM			
0	VK_FORMAT_R16_UNORM	w	h
1	VK_FORMAT_R16G16_UNORM	w	h

34.1.2. Multi-planar Format Image Aspect

When using VkImageAspectFlagBits to select a plane of a multi-planar format, the following are the valid options:

- Two planes
  - VK_IMAGE_ASPECT_PLANE_0_BIT
  - VK_IMAGE_ASPECT_PLANE_1_BIT
- Three planes
  - VK_IMAGE_ASPECT_PLANE_0_BIT
  - VK_IMAGE_ASPECT_PLANE_1_BIT
  - VK_IMAGE_ASPECT_PLANE_2_BIT

34.1.3. Packed Formats

For the purposes of address alignment when accessing buffer memory containing vertex attribute or texel data, the following formats are considered *packed* - components of the texels or attributes are stored in bitfields packed into one or more 8-, 16-, or 32-bit fundamental data type.

- Packed into 8-bit data types:
  - VK_FORMAT_R4G4_UNORM_PACK8
- Packed into 16-bit data types:
  - VK_FORMAT_R4G4B4A4_UNORM_PACK16
  - VK_FORMAT_B4G4R4A4_UNORM_PACK16
  - VK_FORMAT_R5G6B5_UNORM_PACK16
  - VK_FORMAT_B5G6R5_UNORM_PACK16
  - VK_FORMAT_R5G5B5A1_UNORM_PACK16

    - VK_FORMAT_B5G5R5A1_UNORM_PACK16
    - VK_FORMAT_A1R5G5B5_UNORM_PACK16
    - VK_FORMAT_R10X6_UNORM_PACK16
    - VK_FORMAT_R10X6G10X6_UNORM_2PACK16
    - VK_FORMAT_R10X6G10X6B10X6A10X6_UNORM_4PACK16
    - VK_FORMAT_G10X6B10X6G10X6R10X6_422_UNORM_4PACK16
    - VK_FORMAT_B10X6G10X6R10X6G10X6_422_UNORM_4PACK16
    - VK_FORMAT_G10X6_B10X6_R10X6_3PLANE_420_UNORM_3PACK16
    - VK_FORMAT_G10X6_B10X6R10X6_2PLANE_420_UNORM_3PACK16
    - VK_FORMAT_G10X6_B10X6_R10X6_3PLANE_422_UNORM_3PACK16
    - VK_FORMAT_G10X6_B10X6R10X6_2PLANE_422_UNORM_3PACK16
    - VK_FORMAT_G10X6_B10X6_R10X6_3PLANE_444_UNORM_3PACK16
    - VK_FORMAT_R12X4_UNORM_PACK16
    - VK_FORMAT_R12X4G12X4_UNORM_2PACK16
    - VK_FORMAT_R12X4G12X4B12X4A12X4_UNORM_4PACK16
    - VK_FORMAT_G12X4B12X4G12X4R12X4_422_UNORM_4PACK16
    - VK_FORMAT_B12X4G12X4R12X4G12X4_422_UNORM_4PACK16
    - VK_FORMAT_G12X4_B12X4_R12X4_3PLANE_420_UNORM_3PACK16
    - VK_FORMAT_G12X4_B12X4R12X4_2PLANE_420_UNORM_3PACK16
    - VK_FORMAT_G12X4_B12X4_R12X4_3PLANE_422_UNORM_3PACK16
    - VK_FORMAT_G12X4_B12X4R12X4_2PLANE_422_UNORM_3PACK16
    - VK_FORMAT_G12X4_B12X4_R12X4_3PLANE_444_UNORM_3PACK16
    - VK_FORMAT_G10X6_B10X6R10X6_2PLANE_444_UNORM_3PACK16
    - VK_FORMAT_G12X4_B12X4R12X4_2PLANE_444_UNORM_3PACK16
    - VK_FORMAT_A4R4G4B4_UNORM_PACK16
    - VK_FORMAT_A4B4G4R4_UNORM_PACK16
- Packed into 32-bit data types:
    - VK_FORMAT_A8B8G8R8_UNORM_PACK32
    - VK_FORMAT_A8B8G8R8_SNORM_PACK32
    - VK_FORMAT_A8B8G8R8_USCALED_PACK32
    - VK_FORMAT_A8B8G8R8_SSCALED_PACK32
    - VK_FORMAT_A8B8G8R8_UINT_PACK32
    - VK_FORMAT_A8B8G8R8_SINT_PACK32
    - VK_FORMAT_A8B8G8R8_SRGB_PACK32
    - VK_FORMAT_A2R10G10B10_UNORM_PACK32

- VK_FORMAT_A2R10G10B10_SNORM_PACK32
- VK_FORMAT_A2R10G10B10_USCALED_PACK32
- VK_FORMAT_A2R10G10B10_SSCALED_PACK32
- VK_FORMAT_A2R10G10B10_UINT_PACK32
- VK_FORMAT_A2R10G10B10_SINT_PACK32
- VK_FORMAT_A2B10G10R10_UNORM_PACK32
- VK_FORMAT_A2B10G10R10_SNORM_PACK32
- VK_FORMAT_A2B10G10R10_USCALED_PACK32
- VK_FORMAT_A2B10G10R10_SSCALED_PACK32
- VK_FORMAT_A2B10G10R10_UINT_PACK32
- VK_FORMAT_A2B10G10R10_SINT_PACK32
- VK_FORMAT_B10G11R11_UFLOAT_PACK32
- VK_FORMAT_E5B9G9R9_UFLOAT_PACK32
- VK_FORMAT_X8_D24_UNORM_PACK32

34.1.4. Identification of Formats

A “format” is represented by a single enum value. The name of a format is usually built up by using the following pattern:

```
VK_FORMAT_{component-format|compression-scheme}_{numeric-format}
```

The component-format indicates either the size of the R, G, B, and A components (if they are present) in the case of a color format, or the size of the depth (D) and stencil (S) components (if they are present) in the case of a depth/stencil format (see below). An X indicates a component that is unused, but **may** be present for padding.

Table 35. Interpretation of Numeric Format

Numeric format	Type-Declaration instructions	Numeric type	Description
`UNORM`	OpTypeFloat	floating-point	The components are unsigned normalized values in the range [0,1]
`SNORM`	OpTypeFloat	floating-point	The components are signed normalized values in the range [-1,1]
`USCALED`	OpTypeFloat	floating-point	The components are unsigned integer values that get converted to floating-point in the range [0,2^n-1]
`SSCALED`	OpTypeFloat	floating-point	The components are signed integer values that get converted to floating-point in the range [-2^{n-1},2^{n-1}-1]
`UINT`	OpTypeInt	unsigned integer	The components are unsigned integer values in the range [0,2^n-1]
`SINT`	OpTypeInt	signed integer	The components are signed integer values in the range [-2^{n-1},2^{n-1}-1]
`UFLOAT`	OpTypeFloat	floating-point	The components are unsigned floating-point numbers (used by packed, shared exponent, and some compressed formats)
`SFLOAT`	OpTypeFloat	floating-point	The components are signed floating-point numbers
`SRGB`	OpTypeFloat	floating-point	The R, G, and B components are unsigned normalized values that represent values using sRGB nonlinear encoding, while the A component (if one exists) is a regular unsigned normalized value
n is the number of bits in the component.			

The suffix `_PACKnn` indicates that the format is packed into an underlying type with `nn` bits. The suffix `_mPACKnn` is a short-hand that indicates that the format has `m` groups of components (which may or may not be stored in separate *planes*) that are each packed into an underlying type with `nn` bits.

The suffix `_BLOCK` indicates that the format is a block-compressed format, with the representation of multiple pixels encoded interdependently within a region.

Table 36. Interpretation of Compression Scheme

Compression scheme	Description
`BC`	Block Compression. See Block-Compressed Image Formats.
`ETC2`	Ericsson Texture Compression. See ETC Compressed Image Formats.
`EAC`	ETC2 Alpha Compression. See ETC Compressed Image Formats.

Compression scheme	Description
ASTC	Adaptive Scalable Texture Compression (LDR Profile). See ASTC Compressed Image Formats.

For *multi-planar* images, the components in separate *planes* are separated by underscores, and the number of planes is indicated by the addition of a `_2PLANE` or `_3PLANE` suffix. Similarly, the separate aspects of depth-stencil formats are separated by underscores, although these are not considered separate planes. Formats are suffixed by `_422` to indicate that planes other than the first are reduced in size by a factor of two horizontally or that the R and B values appear at half the horizontal frequency of the G values, `_420` to indicate that planes other than the first are reduced in size by a factor of two both horizontally and vertically, and `_444` for consistency to indicate that all three planes of a three-planar image are the same size.

NOTE	No common format has a single plane containing both R and B components but does not store these components at reduced horizontal resolution.

34.1.5. Representation and Texel Block Size

Color formats **must** be represented in memory in exactly the form indicated by the format's name. This means that promoting one format to another with more bits per component and/or additional components **must** not occur for color formats. Depth/stencil formats have more relaxed requirements as discussed below.

Each format has a *texel block size*, the number of bytes used to store one *texel block* (a single addressable element of an uncompressed image, or a single compressed block of a compressed image). The texel block size for each format is shown in the Compatible formats table.

The representation of non-packed formats is that the first component specified in the name of the format is in the lowest memory addresses and the last component specified is in the highest memory addresses. See Byte mappings for non-packed/compressed color formats. The in-memory ordering of bytes within a component is determined by the host endianness.

Table 37. Byte Mappings for Non-Packed/Compressed Color Formats

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	← Byte
R																VK_FORMAT_R8_*
R	G															VK_FORMAT_R8G8_*
R	G	B														VK_FORMAT_R8G8B8_*
B	G	R														VK_FORMAT_B8G8R8_*
R	G	B	A													VK_FORMAT_R8G8B8A8_*
B	G	R	A													VK_FORMAT_B8G8R8A8_*
G_0	B	G_1	R													VK_FORMAT_G8B8G8R8_422_UNORM
B	G_0	R	G_1													VK_FORMAT_B8G8R8G8_422_UNORM
R																VK_FORMAT_R16_*

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	← Byte
R		G														VK_FORMAT_R16G16_*
R		G		B												VK_FORMAT_R16G16B16_*
R		G		B		A										VK_FORMAT_R16G16B16A16_*
G_0		B		G_1		R										VK_FORMAT_G10X6B10X6G10X6R10X6_4PACK16_422_UNORM VK_FORMAT_G12X4B12X4G12X4R12X4_4PACK16_422_UNORM VK_FORMAT_G16B16G16R16_UNORM
B		G_0		R		G_1										VK_FORMAT_B10X6G10X6R10X6G10X6_4PACK16_422_UNORM VK_FORMAT_B12X4G12X4R12X4G12X4_4PACK16_422_UNORM VK_FORMAT_B16G16R16G16_422_UNORM
R																VK_FORMAT_R32_*
R				G												VK_FORMAT_R32G32_*
R				G				B								VK_FORMAT_R32G32B32_*
R				G				B				A				VK_FORMAT_R32G32B32A32_*
R																VK_FORMAT_R64_*
R								G								VK_FORMAT_R64G64_*
VK_FORMAT_R64G64B64_* **as** VK_FORMAT_R64G64_* **but with B in bytes 16-23**																
VK_FORMAT_R64G64B64A64_* **as** VK_FORMAT_R64G64B64_* **but with A in bytes 24-31**																

Packed formats store multiple components within one underlying type. The bit representation is that the first component specified in the name of the format is in the most-significant bits and the last component specified is in the least-significant bits of the underlying type. The in-memory ordering of bytes comprising the underlying type is determined by the host endianness.

Table 38. Bit Mappings for Packed 8-Bit Formats

Bit							
7	6	5	4	3	2	1	0
VK_FORMAT_R4G4_UNORM_PACK8							
R				**G**			
3	2	1	0	3	2	1	0

Table 39. Bit Mappings for Packed 16-Bit Formats

Bit															
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
VK_FORMAT_R4G4B4A4_UNORM_PACK16															
R				**G**				**B**				**A**			
3	2	1	0	3	2	1	0	3	2	1	0	3	2	1	0
VK_FORMAT_B4G4R4A4_UNORM_PACK16															
B				**G**				**R**				**A**			
3	2	1	0	3	2	1	0	3	2	1	0	3	2	1	0

Bit															
VK_FORMAT_A4R4G4B4_UNORM_PACK16															
A				R				G				B			
3	2	1	0	3	2	1	0	3	2	1	0	3	2	1	0
VK_FORMAT_A4B4G4R4_UNORM_PACK16															
A				B				G				R			
3	2	1	0	3	2	1	0	3	2	1	0	3	2	1	0
VK_FORMAT_R5G6B5_UNORM_PACK16															
R					G					B					
4	3	2	1	0	5	4	3	2	1	0	4	3	2	1	0
VK_FORMAT_B5G6R5_UNORM_PACK16															
B					G					R					
4	3	2	1	0	5	4	3	2	1	0	4	3	2	1	0
VK_FORMAT_R5G5B5A1_UNORM_PACK16															
R					G					B					A
4	3	2	1	0	4	3	2	1	0	4	3	2	1	0	0
VK_FORMAT_B5G5R5A1_UNORM_PACK16															
B					G					R					A
4	3	2	1	0	4	3	2	1	0	4	3	2	1	0	0
VK_FORMAT_A1R5G5B5_UNORM_PACK16															
A		R				G					B				
0	4	3	2	1	0	4	3	2	1	0	4	3	2	1	0
VK_FORMAT_R10X6_UNORM_PACK16															
R										X					
9	8	7	6	5	4	3	2	1	0	5	4	3	2	1	0
VK_FORMAT_R12X4_UNORM_PACK16															
R												X			
11	10	9	8	7	6	5	4	3	2	1	0	3	2	1	0

Table 40. Bit Mappings for Packed 32-Bit Formats

Bit																															
31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
VK_FORMAT_A8B8G8R8_*_PACK32																															
A								B								G								R							
7	6	5	4	3	2	1	0	7	6	5	4	3	2	1	0	7	6	5	4	3	2	1	0	7	6	5	4	3	2	1	0
VK_FORMAT_A2R10G10B10_*_PACK32																															
A				R								G										B									
1	0	9	8	7	6	5	4	3	2	1	0	9	8	7	6	5	4	3	2	1	0	9	8	7	6	5	4	3	2	1	0
VK_FORMAT_A2B10G10R10_*_PACK32																															
A				B								G										R									

Bit																															
1	0	9	8	7	6	5	4	3	2	1	0	9	8	7	6	5	4	3	2	1	0	9	8	7	6	5	4	3	2	1	0
VK_FORMAT_B10G11R11_UFLOAT_PACK32																															
B										G										R										
9	8	7	6	5	4	3	2	1	0	10	9	8	7	6	5	4	3	2	1	0	10	9	8	7	6	5	4	3	2	1	0
VK_FORMAT_E5B9G9R9_UFLOAT_PACK32																															
E					B								G							R										
4	3	2	1	0	8	7	6	5	4	3	2	1	0	8	7	6	5	4	3	2	1	0	8	7	6	5	4	3	2	1	0
VK_FORMAT_X8_D24_UNORM_PACK32																															
X								D																							
7	6	5	4	3	2	1	0	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

34.1.6. Depth/Stencil Formats

Depth/stencil formats are considered opaque and need not be stored in the exact number of bits per texel or component ordering indicated by the format enum. However, implementations **must** not substitute a different depth or stencil precision than is described in the format (e.g. D16 **must** not be implemented as D24 or D32).

34.1.7. Format Compatibility Classes

Uncompressed color formats are *compatible* with each other if they occupy the same number of bits per texel block . Compressed color formats are compatible with each other if the only difference between them is the numeric format of the uncompressed pixels. Each depth/stencil format is only compatible with itself. In the following table, all the formats in the same row are compatible. Each format has a defined *texel block extent* specifying how many texels each texel block represents in each dimension.

Table 41. Compatible Formats

Class, Texel Block Size, Texel Block Extent, # Texels/Block	**Formats**
8-bit Block size 1 byte 1x1x1 block extent 1 texel/block	VK_FORMAT_R4G4_UNORM_PACK8, VK_FORMAT_R8_UNORM, VK_FORMAT_R8_SNORM, VK_FORMAT_R8_USCALED, VK_FORMAT_R8_SSCALED, VK_FORMAT_R8_UINT, VK_FORMAT_R8_SINT, VK_FORMAT_R8_SRGB

Class, Texel Block Size, Texel Block Extent, # Texels/Block	**Formats**
16-bit Block size 2 byte 1x1x1 block extent 1 texel/block	VK_FORMAT_R10X6_UNORM_PACK16, VK_FORMAT_R12X4_UNORM_PACK16, VK_FORMAT_A4R4G4B4_UNORM_PACK16, VK_FORMAT_A4B4G4R4_UNORM_PACK16, VK_FORMAT_R4G4B4A4_UNORM_PACK16, VK_FORMAT_B4G4R4A4_UNORM_PACK16, VK_FORMAT_R5G6B5_UNORM_PACK16, VK_FORMAT_B5G6R5_UNORM_PACK16, VK_FORMAT_R5G5B5A1_UNORM_PACK16, VK_FORMAT_B5G5R5A1_UNORM_PACK16, VK_FORMAT_A1R5G5B5_UNORM_PACK16, VK_FORMAT_R8G8_UNORM, VK_FORMAT_R8G8_SNORM, VK_FORMAT_R8G8_USCALED, VK_FORMAT_R8G8_SSCALED, VK_FORMAT_R8G8_UINT, VK_FORMAT_R8G8_SINT, VK_FORMAT_R8G8_SRGB, VK_FORMAT_R16_UNORM, VK_FORMAT_R16_SNORM, VK_FORMAT_R16_USCALED, VK_FORMAT_R16_SSCALED, VK_FORMAT_R16_UINT, VK_FORMAT_R16_SINT, VK_FORMAT_R16_SFLOAT
24-bit Block size 3 byte 1x1x1 block extent 1 texel/block	VK_FORMAT_R8G8B8_UNORM, VK_FORMAT_R8G8B8_SNORM, VK_FORMAT_R8G8B8_USCALED, VK_FORMAT_R8G8B8_SSCALED, VK_FORMAT_R8G8B8_UINT, VK_FORMAT_R8G8B8_SINT, VK_FORMAT_R8G8B8_SRGB, VK_FORMAT_B8G8R8_UNORM, VK_FORMAT_B8G8R8_SNORM, VK_FORMAT_B8G8R8_USCALED, VK_FORMAT_B8G8R8_SSCALED, VK_FORMAT_B8G8R8_UINT, VK_FORMAT_B8G8R8_SINT, VK_FORMAT_B8G8R8_SRGB

Class, Texel Block Size, Texel Block Extent, # Texels/Block	Formats
32-bit Block size 4 byte 1x1x1 block extent 1 texel/block	VK_FORMAT_R10X6G10X6_UNORM_2PACK16, VK_FORMAT_R12X4G12X4_UNORM_2PACK16, VK_FORMAT_R8G8B8A8_UNORM, VK_FORMAT_R8G8B8A8_SNORM, VK_FORMAT_R8G8B8A8_USCALED, VK_FORMAT_R8G8B8A8_SSCALED, VK_FORMAT_R8G8B8A8_UINT, VK_FORMAT_R8G8B8A8_SINT, VK_FORMAT_R8G8B8A8_SRGB, VK_FORMAT_B8G8R8A8_UNORM, VK_FORMAT_B8G8R8A8_SNORM, VK_FORMAT_B8G8R8A8_USCALED, VK_FORMAT_B8G8R8A8_SSCALED, VK_FORMAT_B8G8R8A8_UINT, VK_FORMAT_B8G8R8A8_SINT, VK_FORMAT_B8G8R8A8_SRGB, VK_FORMAT_A8B8G8R8_UNORM_PACK32, VK_FORMAT_A8B8G8R8_SNORM_PACK32, VK_FORMAT_A8B8G8R8_USCALED_PACK32, VK_FORMAT_A8B8G8R8_SSCALED_PACK32, VK_FORMAT_A8B8G8R8_UINT_PACK32, VK_FORMAT_A8B8G8R8_SINT_PACK32, VK_FORMAT_A8B8G8R8_SRGB_PACK32, VK_FORMAT_A2R10G10B10_UNORM_PACK32, VK_FORMAT_A2R10G10B10_SNORM_PACK32, VK_FORMAT_A2R10G10B10_USCALED_PACK32, VK_FORMAT_A2R10G10B10_SSCALED_PACK32, VK_FORMAT_A2R10G10B10_UINT_PACK32, VK_FORMAT_A2R10G10B10_SINT_PACK32, VK_FORMAT_A2B10G10R10_UNORM_PACK32, VK_FORMAT_A2B10G10R10_SNORM_PACK32, VK_FORMAT_A2B10G10R10_USCALED_PACK32, VK_FORMAT_A2B10G10R10_SSCALED_PACK32, VK_FORMAT_A2B10G10R10_UINT_PACK32, VK_FORMAT_A2B10G10R10_SINT_PACK32, VK_FORMAT_R16G16_UNORM, VK_FORMAT_R16G16_SNORM, VK_FORMAT_R16G16_USCALED, VK_FORMAT_R16G16_SSCALED, VK_FORMAT_R16G16_UINT, VK_FORMAT_R16G16_SINT, VK_FORMAT_R16G16_SFLOAT, VK_FORMAT_R32_UINT, VK_FORMAT_R32_SINT, VK_FORMAT_R32_SFLOAT, VK_FORMAT_B10G11R11_UFLOAT_PACK32, VK_FORMAT_E5B9G9R9_UFLOAT_PACK32

Class, Texel Block Size, Texel Block Extent, # Texels/Block	**Formats**
48-bit Block size 6 byte 1x1x1 block extent 1 texel/block	VK_FORMAT_R16G16B16_UNORM, VK_FORMAT_R16G16B16_SNORM, VK_FORMAT_R16G16B16_USCALED, VK_FORMAT_R16G16B16_SSCALED, VK_FORMAT_R16G16B16_UINT, VK_FORMAT_R16G16B16_SINT, VK_FORMAT_R16G16B16_SFLOAT
64-bit Block size 8 byte 1x1x1 block extent 1 texel/block	VK_FORMAT_R16G16B16A16_UNORM, VK_FORMAT_R16G16B16A16_SNORM, VK_FORMAT_R16G16B16A16_USCALED, VK_FORMAT_R16G16B16A16_SSCALED, VK_FORMAT_R16G16B16A16_UINT, VK_FORMAT_R16G16B16A16_SINT, VK_FORMAT_R16G16B16A16_SFLOAT, VK_FORMAT_R32G32_UINT, VK_FORMAT_R32G32_SINT, VK_FORMAT_R32G32_SFLOAT, VK_FORMAT_R64_UINT, VK_FORMAT_R64_SINT, VK_FORMAT_R64_SFLOAT
96-bit Block size 12 byte 1x1x1 block extent 1 texel/block	VK_FORMAT_R32G32B32_UINT, VK_FORMAT_R32G32B32_SINT, VK_FORMAT_R32G32B32_SFLOAT
128-bit Block size 16 byte 1x1x1 block extent 1 texel/block	VK_FORMAT_R32G32B32A32_UINT, VK_FORMAT_R32G32B32A32_SINT, VK_FORMAT_R32G32B32A32_SFLOAT, VK_FORMAT_R64G64_UINT, VK_FORMAT_R64G64_SINT, VK_FORMAT_R64G64_SFLOAT
192-bit Block size 24 byte 1x1x1 block extent 1 texel/block	VK_FORMAT_R64G64B64_UINT, VK_FORMAT_R64G64B64_SINT, VK_FORMAT_R64G64B64_SFLOAT
256-bit Block size 32 byte 1x1x1 block extent 1 texel/block	VK_FORMAT_R64G64B64A64_UINT, VK_FORMAT_R64G64B64A64_SINT, VK_FORMAT_R64G64B64A64_SFLOAT

Class, Texel Block Size, Texel Block Extent, # Texels/Block	**Formats**
D16 Block size 2 byte 1x1x1 block extent 1 texel/block	VK_FORMAT_D16_UNORM
D24 Block size 4 byte 1x1x1 block extent 1 texel/block	VK_FORMAT_X8_D24_UNORM_PACK32
D32 Block size 4 byte 1x1x1 block extent 1 texel/block	VK_FORMAT_D32_SFLOAT
S8 Block size 1 byte 1x1x1 block extent 1 texel/block	VK_FORMAT_S8_UINT
D16S8 Block size 3 byte 1x1x1 block extent 1 texel/block	VK_FORMAT_D16_UNORM_S8_UINT
D24S8 Block size 4 byte 1x1x1 block extent 1 texel/block	VK_FORMAT_D24_UNORM_S8_UINT
D32S8 Block size 5 byte 1x1x1 block extent 1 texel/block	VK_FORMAT_D32_SFLOAT_S8_UINT
BC1_RGB Block size 8 byte 4x4x1 block extent 16 texel/block	VK_FORMAT_BC1_RGB_UNORM_BLOCK, VK_FORMAT_BC1_RGB_SRGB_BLOCK
BC1_RGBA Block size 8 byte 4x4x1 block extent 16 texel/block	VK_FORMAT_BC1_RGBA_UNORM_BLOCK, VK_FORMAT_BC1_RGBA_SRGB_BLOCK
BC2 Block size 16 byte 4x4x1 block extent 16 texel/block	VK_FORMAT_BC2_UNORM_BLOCK, VK_FORMAT_BC2_SRGB_BLOCK

Class, Texel Block Size, Texel Block Extent, # Texels/Block	**Formats**
BC3 Block size 16 byte 4x4x1 block extent 16 texel/block	VK_FORMAT_BC3_UNORM_BLOCK, VK_FORMAT_BC3_SRGB_BLOCK
BC4 Block size 8 byte 4x4x1 block extent 16 texel/block	VK_FORMAT_BC4_UNORM_BLOCK, VK_FORMAT_BC4_SNORM_BLOCK
BC5 Block size 16 byte 4x4x1 block extent 16 texel/block	VK_FORMAT_BC5_UNORM_BLOCK, VK_FORMAT_BC5_SNORM_BLOCK
BC6H Block size 16 byte 4x4x1 block extent 16 texel/block	VK_FORMAT_BC6H_UFLOAT_BLOCK, VK_FORMAT_BC6H_SFLOAT_BLOCK
BC7 Block size 16 byte 4x4x1 block extent 16 texel/block	VK_FORMAT_BC7_UNORM_BLOCK, VK_FORMAT_BC7_SRGB_BLOCK
ETC2_RGB Block size 8 byte 4x4x1 block extent 16 texel/block	VK_FORMAT_ETC2_R8G8B8_UNORM_BLOCK, VK_FORMAT_ETC2_R8G8B8_SRGB_BLOCK
ETC2_RGBA Block size 8 byte 4x4x1 block extent 16 texel/block	VK_FORMAT_ETC2_R8G8B8A1_UNORM_BLOCK, VK_FORMAT_ETC2_R8G8B8A1_SRGB_BLOCK
ETC2_EAC_RGBA Block size 16 byte 4x4x1 block extent 16 texel/block	VK_FORMAT_ETC2_R8G8B8A8_UNORM_BLOCK, VK_FORMAT_ETC2_R8G8B8A8_SRGB_BLOCK
EAC_R Block size 8 byte 4x4x1 block extent 16 texel/block	VK_FORMAT_EAC_R11_UNORM_BLOCK, VK_FORMAT_EAC_R11_SNORM_BLOCK
EAC_RG Block size 16 byte 4x4x1 block extent 16 texel/block	VK_FORMAT_EAC_R11G11_UNORM_BLOCK, VK_FORMAT_EAC_R11G11_SNORM_BLOCK

Class, Texel Block Size, Texel Block Extent, # Texels/Block	**Formats**
ASTC_4x4 Block size 16 byte 4x4x1 block extent 16 texel/block	VK_FORMAT_ASTC_4x4_SFLOAT_BLOCK, VK_FORMAT_ASTC_4x4_UNORM_BLOCK, VK_FORMAT_ASTC_4x4_SRGB_BLOCK
ASTC_5x4 Block size 16 byte 5x4x1 block extent 20 texel/block	VK_FORMAT_ASTC_5x4_SFLOAT_BLOCK, VK_FORMAT_ASTC_5x4_UNORM_BLOCK, VK_FORMAT_ASTC_5x4_SRGB_BLOCK
ASTC_5x5 Block size 16 byte 5x5x1 block extent 25 texel/block	VK_FORMAT_ASTC_5x5_SFLOAT_BLOCK, VK_FORMAT_ASTC_5x5_UNORM_BLOCK, VK_FORMAT_ASTC_5x5_SRGB_BLOCK
ASTC_6x5 Block size 16 byte 6x5x1 block extent 30 texel/block	VK_FORMAT_ASTC_6x5_SFLOAT_BLOCK, VK_FORMAT_ASTC_6x5_UNORM_BLOCK, VK_FORMAT_ASTC_6x5_SRGB_BLOCK
ASTC_6x6 Block size 16 byte 6x6x1 block extent 36 texel/block	VK_FORMAT_ASTC_6x6_SFLOAT_BLOCK, VK_FORMAT_ASTC_6x6_UNORM_BLOCK, VK_FORMAT_ASTC_6x6_SRGB_BLOCK
ASTC_8x5 Block size 16 byte 8x5x1 block extent 40 texel/block	VK_FORMAT_ASTC_8x5_SFLOAT_BLOCK, VK_FORMAT_ASTC_8x5_UNORM_BLOCK, VK_FORMAT_ASTC_8x5_SRGB_BLOCK
ASTC_8x6 Block size 16 byte 8x6x1 block extent 48 texel/block	VK_FORMAT_ASTC_8x6_SFLOAT_BLOCK, VK_FORMAT_ASTC_8x6_UNORM_BLOCK, VK_FORMAT_ASTC_8x6_SRGB_BLOCK
ASTC_8x8 Block size 16 byte 8x8x1 block extent 64 texel/block	VK_FORMAT_ASTC_8x8_SFLOAT_BLOCK, VK_FORMAT_ASTC_8x8_UNORM_BLOCK, VK_FORMAT_ASTC_8x8_SRGB_BLOCK
ASTC_10x5 Block size 16 byte 10x5x1 block extent 50 texel/block	VK_FORMAT_ASTC_10x5_SFLOAT_BLOCK, VK_FORMAT_ASTC_10x5_UNORM_BLOCK, VK_FORMAT_ASTC_10x5_SRGB_BLOCK
ASTC_10x6 Block size 16 byte 10x6x1 block extent 60 texel/block	VK_FORMAT_ASTC_10x6_SFLOAT_BLOCK, VK_FORMAT_ASTC_10x6_UNORM_BLOCK, VK_FORMAT_ASTC_10x6_SRGB_BLOCK

Class, Texel Block Size, Texel Block Extent, # Texels/Block	**Formats**
ASTC_10x8 Block size 16 byte 10x8x1 block extent 80 texel/block	VK_FORMAT_ASTC_10x8_SFLOAT_BLOCK, VK_FORMAT_ASTC_10x8_UNORM_BLOCK, VK_FORMAT_ASTC_10x8_SRGB_BLOCK
ASTC_10x10 Block size 16 byte 10x10x1 block extent 100 texel/block	VK_FORMAT_ASTC_10x10_SFLOAT_BLOCK, VK_FORMAT_ASTC_10x10_UNORM_BLOCK, VK_FORMAT_ASTC_10x10_SRGB_BLOCK
ASTC_12x10 Block size 16 byte 12x10x1 block extent 120 texel/block	VK_FORMAT_ASTC_12x10_SFLOAT_BLOCK, VK_FORMAT_ASTC_12x10_UNORM_BLOCK, VK_FORMAT_ASTC_12x10_SRGB_BLOCK
ASTC_12x12 Block size 16 byte 12x12x1 block extent 144 texel/block	VK_FORMAT_ASTC_12x12_SFLOAT_BLOCK, VK_FORMAT_ASTC_12x12_UNORM_BLOCK, VK_FORMAT_ASTC_12x12_SRGB_BLOCK
32-bit G8B8G8R8 Block size 4 byte 2x1x1 block extent 1 texel/block	VK_FORMAT_G8B8G8R8_422_UNORM
32-bit B8G8R8G8 Block size 4 byte 2x1x1 block extent 1 texel/block	VK_FORMAT_B8G8R8G8_422_UNORM
8-bit 3-plane 420 Block size 3 byte 1x1x1 block extent 1 texel/block	VK_FORMAT_G8_B8_R8_3PLANE_420_UNORM
8-bit 2-plane 420 Block size 3 byte 1x1x1 block extent 1 texel/block	VK_FORMAT_G8_B8R8_2PLANE_420_UNORM
8-bit 3-plane 422 Block size 3 byte 1x1x1 block extent 1 texel/block	VK_FORMAT_G8_B8_R8_3PLANE_422_UNORM
8-bit 2-plane 422 Block size 3 byte 1x1x1 block extent 1 texel/block	VK_FORMAT_G8_B8R8_2PLANE_422_UNORM

Class, Texel Block Size, Texel Block Extent, # Texels/Block	Formats
8-bit 3-plane 444 Block size 3 byte 1x1x1 block extent 1 texel/block	VK_FORMAT_G8_B8_R8_3PLANE_444_UNORM
64-bit R10G10B10A10 Block size 8 byte 1x1x1 block extent 1 texel/block	VK_FORMAT_R10X6G10X6B10X6A10X6_UNORM_4PACK16
64-bit G10B10G10R10 Block size 8 byte 2x1x1 block extent 1 texel/block	VK_FORMAT_G10X6B10X6G10X6R10X6_422_UNORM_4PACK16
64-bit B10G10R10G10 Block size 8 byte 2x1x1 block extent 1 texel/block	VK_FORMAT_B10X6G10X6R10X6G10X6_422_UNORM_4PACK16
10-bit 3-plane 420 Block size 6 byte 1x1x1 block extent 1 texel/block	VK_FORMAT_G10X6_B10X6_R10X6_3PLANE_420_UNORM_3PACK16
10-bit 2-plane 420 Block size 6 byte 1x1x1 block extent 1 texel/block	VK_FORMAT_G10X6_B10X6R10X6_2PLANE_420_UNORM_3PACK16
10-bit 3-plane 422 Block size 6 byte 1x1x1 block extent 1 texel/block	VK_FORMAT_G10X6_B10X6_R10X6_3PLANE_422_UNORM_3PACK16
10-bit 2-plane 422 Block size 6 byte 1x1x1 block extent 1 texel/block	VK_FORMAT_G10X6_B10X6R10X6_2PLANE_422_UNORM_3PACK16
10-bit 3-plane 444 Block size 6 byte 1x1x1 block extent 1 texel/block	VK_FORMAT_G10X6_B10X6_R10X6_3PLANE_444_UNORM_3PACK16
64-bit R12G12B12A12 Block size 8 byte 1x1x1 block extent 1 texel/block	VK_FORMAT_R12X4G12X4B12X4A12X4_UNORM_4PACK16

Class, Texel Block Size, Texel Block Extent, # Texels/Block	Formats
64-bit G12B12G12R12 Block size 8 byte 2x1x1 block extent 1 texel/block	VK_FORMAT_G12X4B12X4G12X4R12X4_422_UNORM_4PACK16
64-bit B12G12R12G12 Block size 8 byte 2x1x1 block extent 1 texel/block	VK_FORMAT_B12X4G12X4R12X4G12X4_422_UNORM_4PACK16
12-bit 3-plane 420 Block size 6 byte 1x1x1 block extent 1 texel/block	VK_FORMAT_G12X4_B12X4_R12X4_3PLANE_420_UNORM_3PACK16
12-bit 2-plane 420 Block size 6 byte 1x1x1 block extent 1 texel/block	VK_FORMAT_G12X4_B12X4R12X4_2PLANE_420_UNORM_3PACK16
12-bit 3-plane 422 Block size 6 byte 1x1x1 block extent 1 texel/block	VK_FORMAT_G12X4_B12X4_R12X4_3PLANE_422_UNORM_3PACK16
12-bit 2-plane 422 Block size 6 byte 1x1x1 block extent 1 texel/block	VK_FORMAT_G12X4_B12X4R12X4_2PLANE_422_UNORM_3PACK16
12-bit 3-plane 444 Block size 6 byte 1x1x1 block extent 1 texel/block	VK_FORMAT_G12X4_B12X4_R12X4_3PLANE_444_UNORM_3PACK16
64-bit G16B16G16R16 Block size 8 byte 2x1x1 block extent 1 texel/block	VK_FORMAT_G16B16G16R16_422_UNORM
64-bit B16G16R16G16 Block size 8 byte 2x1x1 block extent 1 texel/block	VK_FORMAT_B16G16R16G16_422_UNORM
16-bit 3-plane 420 Block size 6 byte 1x1x1 block extent 1 texel/block	VK_FORMAT_G16_B16_R16_3PLANE_420_UNORM

Class, Texel Block Size, Texel Block Extent, # Texels/Block	Formats
16-bit 2-plane 420 Block size 6 byte 1x1x1 block extent 1 texel/block	VK_FORMAT_G16_B16R16_2PLANE_420_UNORM
16-bit 3-plane 422 Block size 6 byte 1x1x1 block extent 1 texel/block	VK_FORMAT_G16_B16_R16_3PLANE_422_UNORM
16-bit 2-plane 422 Block size 6 byte 1x1x1 block extent 1 texel/block	VK_FORMAT_G16_B16R16_2PLANE_422_UNORM
16-bit 3-plane 444 Block size 6 byte 1x1x1 block extent 1 texel/block	VK_FORMAT_G16_B16_R16_3PLANE_444_UNORM
8-bit 2-plane 444 Block size 3 byte 1x1x1 block extent 1 texel/block	VK_FORMAT_G8_B8R8_2PLANE_444_UNORM
10-bit 2-plane 444 Block size 6 byte 1x1x1 block extent 1 texel/block	VK_FORMAT_G10X6_B10X6R10X6_2PLANE_444_UNORM_3PACK16
12-bit 2-plane 444 Block size 6 byte 1x1x1 block extent 1 texel/block	VK_FORMAT_G12X4_B12X4R12X4_2PLANE_444_UNORM_3PACK16
16-bit 2-plane 444 Block size 6 byte 1x1x1 block extent 1 texel/block	VK_FORMAT_G16_B16R16_2PLANE_444_UNORM

Size Compatibility

Color formats with the same texel block size are considered *size-compatible*. If two size-compatible formats have different block extents (i.e. for compressed formats), then an image with size A × B × C in one format with a block extent of a × b × c can be represented as an image with size X × Y × Z in the other format with block extent x × y × z at the ratio between the block extents for each format, where

□A/a□ = □X/x□

□B/b□ = □Y/y□

□C/c□ = □Z/z□

NOTE	For example, a 7x3 image in the VK_FORMAT_ASTC_8x5_UNORM_BLOCK format can be represented as a 1x1 VK_FORMAT_R64G64_UINT image.

Images created with the VK_IMAGE_CREATE_BLOCK_TEXEL_VIEW_COMPATIBLE_BIT flag can have size-compatible views created from them to enable access via different size-compatible formats. Image views created in this way will be sized to match the expectations of the block extents noted above.

Copy operations are able to copy between size-compatible formats in different resources to enable manipulation of data in different formats. The extent used in these copy operations always matches the source image, and is resized to the expectations of the block extents noted above for the destination image.

34.2. Format Properties

To query supported format features which are properties of the physical device, call:

```
// Provided by VK_VERSION_1_0
void vkGetPhysicalDeviceFormatProperties(
    VkPhysicalDevice                            physicalDevice,
    VkFormat                                    format,
    VkFormatProperties*                         pFormatProperties);
```

- physicalDevice is the physical device from which to query the format properties.
- format is the format whose properties are queried.
- pFormatProperties is a pointer to a VkFormatProperties structure in which physical device properties for format are returned.

Valid Usage (Implicit)

- VUID-vkGetPhysicalDeviceFormatProperties-physicalDevice-parameter
  physicalDevice **must** be a valid VkPhysicalDevice handle
- VUID-vkGetPhysicalDeviceFormatProperties-format-parameter
  format **must** be a valid VkFormat value
- VUID-vkGetPhysicalDeviceFormatProperties-pFormatProperties-parameter
  pFormatProperties **must** be a valid pointer to a VkFormatProperties structure

The VkFormatProperties structure is defined as:

```
// Provided by VK_VERSION_1_0
typedef struct VkFormatProperties {
    VkFormatFeatureFlags    linearTilingFeatures;
    VkFormatFeatureFlags    optimalTilingFeatures;
    VkFormatFeatureFlags    bufferFeatures;
} VkFormatProperties;
```

- linearTilingFeatures is a bitmask of VkFormatFeatureFlagBits specifying features supported by images created with a tiling parameter of VK_IMAGE_TILING_LINEAR.
- optimalTilingFeatures is a bitmask of VkFormatFeatureFlagBits specifying features supported by images created with a tiling parameter of VK_IMAGE_TILING_OPTIMAL.
- bufferFeatures is a bitmask of VkFormatFeatureFlagBits specifying features supported by buffers.

NOTE	If no format feature flags are supported, the format itself is not supported, and images of that format cannot be created.

If format is a block-compressed format, then bufferFeatures **must** not support any features for the format.

If format is not a multi-plane format then linearTilingFeatures and optimalTilingFeatures **must** not contain VK_FORMAT_FEATURE_DISJOINT_BIT.

Bits which **can** be set in the VkFormatProperties features linearTilingFeatures, optimalTilingFeatures, and bufferFeatures are:

```
// Provided by VK_VERSION_1_0
typedef enum VkFormatFeatureFlagBits {
    VK_FORMAT_FEATURE_SAMPLED_IMAGE_BIT = 0x00000001,
    VK_FORMAT_FEATURE_STORAGE_IMAGE_BIT = 0x00000002,
    VK_FORMAT_FEATURE_STORAGE_IMAGE_ATOMIC_BIT = 0x00000004,
    VK_FORMAT_FEATURE_UNIFORM_TEXEL_BUFFER_BIT = 0x00000008,
    VK_FORMAT_FEATURE_STORAGE_TEXEL_BUFFER_BIT = 0x00000010,
    VK_FORMAT_FEATURE_STORAGE_TEXEL_BUFFER_ATOMIC_BIT = 0x00000020,
    VK_FORMAT_FEATURE_VERTEX_BUFFER_BIT = 0x00000040,
    VK_FORMAT_FEATURE_COLOR_ATTACHMENT_BIT = 0x00000080,
    VK_FORMAT_FEATURE_COLOR_ATTACHMENT_BLEND_BIT = 0x00000100,
    VK_FORMAT_FEATURE_DEPTH_STENCIL_ATTACHMENT_BIT = 0x00000200,
    VK_FORMAT_FEATURE_BLIT_SRC_BIT = 0x00000400,
    VK_FORMAT_FEATURE_BLIT_DST_BIT = 0x00000800,
    VK_FORMAT_FEATURE_SAMPLED_IMAGE_FILTER_LINEAR_BIT = 0x00001000,
  // Provided by VK_VERSION_1_1
    VK_FORMAT_FEATURE_TRANSFER_SRC_BIT = 0x00004000,
  // Provided by VK_VERSION_1_1
    VK_FORMAT_FEATURE_TRANSFER_DST_BIT = 0x00008000,
  // Provided by VK_VERSION_1_1
    VK_FORMAT_FEATURE_MIDPOINT_CHROMA_SAMPLES_BIT = 0x00020000,
  // Provided by VK_VERSION_1_1
    VK_FORMAT_FEATURE_SAMPLED_IMAGE_YCBCR_CONVERSION_LINEAR_FILTER_BIT = 0x00040000,
  // Provided by VK_VERSION_1_1

VK_FORMAT_FEATURE_SAMPLED_IMAGE_YCBCR_CONVERSION_SEPARATE_RECONSTRUCTION_FILTER_BIT =
0x00080000,
  // Provided by VK_VERSION_1_1

VK_FORMAT_FEATURE_SAMPLED_IMAGE_YCBCR_CONVERSION_CHROMA_RECONSTRUCTION_EXPLICIT_BIT =
0x00100000,
  // Provided by VK_VERSION_1_1

VK_FORMAT_FEATURE_SAMPLED_IMAGE_YCBCR_CONVERSION_CHROMA_RECONSTRUCTION_EXPLICIT_FORCEA
BLE_BIT = 0x00200000,
  // Provided by VK_VERSION_1_1
    VK_FORMAT_FEATURE_DISJOINT_BIT = 0x00400000,
  // Provided by VK_VERSION_1_1
    VK_FORMAT_FEATURE_COSITED_CHROMA_SAMPLES_BIT = 0x00800000,
  // Provided by VK_VERSION_1_2
    VK_FORMAT_FEATURE_SAMPLED_IMAGE_FILTER_MINMAX_BIT = 0x00010000,
} VkFormatFeatureFlagBits;
```

These values all have the same meaning as the equivalently named values for VkFormatFeatureFlags2 and **may** be set in `linearTilingFeatures` and `optimalTilingFeatures`, specifying that the features are supported by images or image views or sampler $Y'C_BC_R$ conversion objects created with the queried vkGetPhysicalDeviceFormatProperties::`format`:

- `VK_FORMAT_FEATURE_SAMPLED_IMAGE_BIT` specifies that an image view **can** be sampled from.

- VK_FORMAT_FEATURE_STORAGE_IMAGE_BIT specifies that an image view **can** be used as a storage image.
- VK_FORMAT_FEATURE_STORAGE_IMAGE_ATOMIC_BIT specifies that an image view **can** be used as storage image that supports atomic operations.
- VK_FORMAT_FEATURE_COLOR_ATTACHMENT_BIT specifies that an image view **can** be used as a framebuffer color attachment and as an input attachment.
- VK_FORMAT_FEATURE_COLOR_ATTACHMENT_BLEND_BIT specifies that an image view **can** be used as a framebuffer color attachment that supports blending.
- VK_FORMAT_FEATURE_DEPTH_STENCIL_ATTACHMENT_BIT specifies that an image view **can** be used as a framebuffer depth/stencil attachment and as an input attachment.
- VK_FORMAT_FEATURE_BLIT_SRC_BIT specifies that an image **can** be used as srcImage for the vkCmdBlitImage2 and vkCmdBlitImage commands.
- VK_FORMAT_FEATURE_BLIT_DST_BIT specifies that an image **can** be used as dstImage for the vkCmdBlitImage2 and vkCmdBlitImage commands.
- VK_FORMAT_FEATURE_SAMPLED_IMAGE_FILTER_LINEAR_BIT specifies that if VK_FORMAT_FEATURE_SAMPLED_IMAGE_BIT is also set, an image view **can** be used with a sampler that has either of magFilter or minFilter set to VK_FILTER_LINEAR, or mipmapMode set to VK_SAMPLER_MIPMAP_MODE_LINEAR. If VK_FORMAT_FEATURE_BLIT_SRC_BIT is also set, an image can be used as the srcImage to vkCmdBlitImage2 and vkCmdBlitImage with a filter of VK_FILTER_LINEAR. This bit **must** only be exposed for formats that also support the VK_FORMAT_FEATURE_SAMPLED_IMAGE_BIT or VK_FORMAT_FEATURE_BLIT_SRC_BIT.

  If the format being queried is a depth/stencil format, this bit only specifies that the depth aspect (not the stencil aspect) of an image of this format supports linear filtering, and that linear filtering of the depth aspect is supported whether depth compare is enabled in the sampler or not. Where depth comparison is supported it **may** be linear filtered whether this bit is present or not, but where this bit is not present the filtered value **may** be computed in an implementation-dependent manner which differs from the normal rules of linear filtering. The resulting value **must** be in the range [0,1] and **should** be proportional to, or a weighted average of, the number of comparison passes or failures.

- VK_FORMAT_FEATURE_TRANSFER_SRC_BIT specifies that an image **can** be used as a source image for copy commands. If the application apiVersion is Vulkan 1.0 and VK_KHR_maintenance1 is not supported, VK_FORMAT_FEATURE_TRANSFER_SRC_BIT is implied to be set when the format feature flag is not 0.
- VK_FORMAT_FEATURE_TRANSFER_DST_BIT specifies that an image **can** be used as a destination image for copy commands and clear commands. If the application apiVersion is Vulkan 1.0 and VK_KHR_maintenance1 is not supported, VK_FORMAT_FEATURE_TRANSFER_DST_BIT is implied to be set when the format feature flag is not 0.
- VK_FORMAT_FEATURE_SAMPLED_IMAGE_FILTER_MINMAX_BIT specifies VkImage **can** be used as a sampled image with a min or max VkSamplerReductionMode. This bit **must** only be exposed for formats that also support the VK_FORMAT_FEATURE_SAMPLED_IMAGE_BIT.
- VK_FORMAT_FEATURE_MIDPOINT_CHROMA_SAMPLES_BIT specifies that an application **can** define a sampler $Y'C_BC_R$ conversion using this format as a source, and that an image of this format **can** be

used with a VkSamplerYcbcrConversionCreateInfo xChromaOffset and/or yChromaOffset of VK_CHROMA_LOCATION_MIDPOINT. Otherwise both xChromaOffset and yChromaOffset **must** be VK_CHROMA_LOCATION_COSITED_EVEN. If a format does not incorporate chroma downsampling (it is not a "422" or "420" format) but the implementation supports sampler $Y'C_BC_R$ conversion for this format, the implementation **must** set VK_FORMAT_FEATURE_MIDPOINT_CHROMA_SAMPLES_BIT.

- VK_FORMAT_FEATURE_COSITED_CHROMA_SAMPLES_BIT specifies that an application **can** define a sampler $Y'C_BC_R$ conversion using this format as a source, and that an image of this format **can** be used with a VkSamplerYcbcrConversionCreateInfo xChromaOffset and/or yChromaOffset of VK_CHROMA_LOCATION_COSITED_EVEN. Otherwise both xChromaOffset and yChromaOffset **must** be VK_CHROMA_LOCATION_MIDPOINT. If neither VK_FORMAT_FEATURE_COSITED_CHROMA_SAMPLES_BIT nor VK_FORMAT_FEATURE_MIDPOINT_CHROMA_SAMPLES_BIT is set, the application **must** not define a sampler $Y'C_BC_R$ conversion using this format as a source.
- VK_FORMAT_FEATURE_SAMPLED_IMAGE_YCBCR_CONVERSION_LINEAR_FILTER_BIT specifies that an application **can** define a sampler $Y'C_BC_R$ conversion using this format as a source with chromaFilter set to VK_FILTER_LINEAR.
- VK_FORMAT_FEATURE_SAMPLED_IMAGE_YCBCR_CONVERSION_SEPARATE_RECONSTRUCTION_FILTER_BIT specifies that the format can have different chroma, min, and mag filters.
- VK_FORMAT_FEATURE_SAMPLED_IMAGE_YCBCR_CONVERSION_CHROMA_RECONSTRUCTION_EXPLICIT_BIT specifies that reconstruction is explicit, as described in Chroma Reconstruction. If this bit is not present, reconstruction is implicit by default.
- VK_FORMAT_FEATURE_SAMPLED_IMAGE_YCBCR_CONVERSION_CHROMA_RECONSTRUCTION_EXPLICIT_FORCEABLE_BIT specifies that reconstruction **can** be forcibly made explicit by setting VkSamplerYcbcrConversionCreateInfo::forceExplicitReconstruction to VK_TRUE. If the format being queried supports VK_FORMAT_FEATURE_SAMPLED_IMAGE_YCBCR_CONVERSION_CHROMA_RECONSTRUCTION_EXPLICIT_BIT it **must** also support VK_FORMAT_FEATURE_SAMPLED_IMAGE_YCBCR_CONVERSION_CHROMA_RECONSTRUCTION_EXPLICIT_FORCEABLE_BIT.
- VK_FORMAT_FEATURE_DISJOINT_BIT specifies that a multi-planar image **can** have the VK_IMAGE_CREATE_DISJOINT_BIT set during image creation. An implementation **must** not set VK_FORMAT_FEATURE_DISJOINT_BIT for *single-plane formats*.

The following bits **may** be set in bufferFeatures, specifying that the features are supported by buffers or buffer views created with the queried vkGetPhysicalDeviceFormatProperties::format:

- VK_FORMAT_FEATURE_UNIFORM_TEXEL_BUFFER_BIT specifies that the format **can** be used to create a buffer view that **can** be bound to a VK_DESCRIPTOR_TYPE_UNIFORM_TEXEL_BUFFER descriptor.
- VK_FORMAT_FEATURE_STORAGE_TEXEL_BUFFER_BIT specifies that the format **can** be used to create a buffer view that **can** be bound to a VK_DESCRIPTOR_TYPE_STORAGE_TEXEL_BUFFER descriptor.
- VK_FORMAT_FEATURE_STORAGE_TEXEL_BUFFER_ATOMIC_BIT specifies that atomic operations are supported on VK_DESCRIPTOR_TYPE_STORAGE_TEXEL_BUFFER with this format.
- VK_FORMAT_FEATURE_VERTEX_BUFFER_BIT specifies that the format **can** be used as a vertex attribute format (VkVertexInputAttributeDescription::format).

NOTE VK_FORMAT_FEATURE_STORAGE_IMAGE_ATOMIC_BIT and

> VK_FORMAT_FEATURE_STORAGE_TEXEL_BUFFER_ATOMIC_BIT are only intended to be advertised for single-component formats, since SPIR-V atomic operations require a scalar type.

```
// Provided by VK_VERSION_1_0
typedef VkFlags VkFormatFeatureFlags;
```

VkFormatFeatureFlags is a bitmask type for setting a mask of zero or more VkFormatFeatureFlagBits.

To query supported format features which are properties of the physical device, call:

```
// Provided by VK_VERSION_1_1
void vkGetPhysicalDeviceFormatProperties2(
    VkPhysicalDevice                            physicalDevice,
    VkFormat                                    format,
    VkFormatProperties2*                        pFormatProperties);
```

- physicalDevice is the physical device from which to query the format properties.
- format is the format whose properties are queried.
- pFormatProperties is a pointer to a VkFormatProperties2 structure in which physical device properties for format are returned.

vkGetPhysicalDeviceFormatProperties2 behaves similarly to vkGetPhysicalDeviceFormatProperties, with the ability to return extended information in a pNext chain of output structures.

Valid Usage (Implicit)

- VUID-vkGetPhysicalDeviceFormatProperties2-physicalDevice-parameter
  physicalDevice **must** be a valid VkPhysicalDevice handle
- VUID-vkGetPhysicalDeviceFormatProperties2-format-parameter
  format **must** be a valid VkFormat value
- VUID-vkGetPhysicalDeviceFormatProperties2-pFormatProperties-parameter
  pFormatProperties **must** be a valid pointer to a VkFormatProperties2 structure

The VkFormatProperties2 structure is defined as:

```
// Provided by VK_VERSION_1_1
typedef struct VkFormatProperties2 {
    VkStructureType       sType;
    void*                 pNext;
    VkFormatProperties    formatProperties;
} VkFormatProperties2;
```

- sType is a VkStructureType value identifying this structure.

- `pNext` is `NULL` or a pointer to a structure extending this structure.
- `formatProperties` is a VkFormatProperties structure describing features supported by the requested format.

Valid Usage (Implicit)

- VUID-VkFormatProperties2-sType-sType
  `sType` **must** be `VK_STRUCTURE_TYPE_FORMAT_PROPERTIES_2`
- VUID-VkFormatProperties2-pNext-pNext
  `pNext` **must** be `NULL` or a pointer to a valid instance of VkFormatProperties3
- VUID-VkFormatProperties2-sType-unique
  The `sType` value of each struct in the `pNext` chain **must** be unique

To query supported format extended features which are properties of the physical device, add VkFormatProperties3 structure to the `pNext` chain of VkFormatProperties2.

The VkFormatProperties3 structure is defined as:

```
// Provided by VK_VERSION_1_3
typedef struct VkFormatProperties3 {
    VkStructureType          sType;
    void*                    pNext;
    VkFormatFeatureFlags2    linearTilingFeatures;
    VkFormatFeatureFlags2    optimalTilingFeatures;
    VkFormatFeatureFlags2    bufferFeatures;
} VkFormatProperties3;
```

- `linearTilingFeatures` is a bitmask of VkFormatFeatureFlagBits2 specifying features supported by images created with a `tiling` parameter of `VK_IMAGE_TILING_LINEAR`.
- `optimalTilingFeatures` is a bitmask of VkFormatFeatureFlagBits2 specifying features supported by images created with a `tiling` parameter of `VK_IMAGE_TILING_OPTIMAL`.
- `bufferFeatures` is a bitmask of VkFormatFeatureFlagBits2 specifying features supported by buffers.

The bits reported in `linearTilingFeatures`, `optimalTilingFeatures` and `bufferFeatures` **must** include the bits reported in the corresponding fields of `VkFormatProperties2`::`formatProperties`.

Valid Usage (Implicit)

- VUID-VkFormatProperties3-sType-sType
  `sType` **must** be `VK_STRUCTURE_TYPE_FORMAT_PROPERTIES_3`

Bits which **can** be set in the VkFormatProperties3 features `linearTilingFeatures`, `optimalTilingFeatures`, and `bufferFeatures` are:

```
// Provided by VK_VERSION_1_3
// Flag bits for VkFormatFeatureFlagBits2
typedef VkFlags64 VkFormatFeatureFlagBits2;
static const VkFormatFeatureFlagBits2 VK_FORMAT_FEATURE_2_SAMPLED_IMAGE_BIT =
0x00000001ULL;
static const VkFormatFeatureFlagBits2 VK_FORMAT_FEATURE_2_SAMPLED_IMAGE_BIT_KHR =
0x00000001ULL;
static const VkFormatFeatureFlagBits2 VK_FORMAT_FEATURE_2_STORAGE_IMAGE_BIT =
0x00000002ULL;
static const VkFormatFeatureFlagBits2 VK_FORMAT_FEATURE_2_STORAGE_IMAGE_BIT_KHR =
0x00000002ULL;
static const VkFormatFeatureFlagBits2 VK_FORMAT_FEATURE_2_STORAGE_IMAGE_ATOMIC_BIT =
0x00000004ULL;
static const VkFormatFeatureFlagBits2 VK_FORMAT_FEATURE_2_STORAGE_IMAGE_ATOMIC_BIT_KHR
= 0x00000004ULL;
static const VkFormatFeatureFlagBits2 VK_FORMAT_FEATURE_2_UNIFORM_TEXEL_BUFFER_BIT =
0x00000008ULL;
static const VkFormatFeatureFlagBits2 VK_FORMAT_FEATURE_2_UNIFORM_TEXEL_BUFFER_BIT_KHR
= 0x00000008ULL;
static const VkFormatFeatureFlagBits2 VK_FORMAT_FEATURE_2_STORAGE_TEXEL_BUFFER_BIT =
0x00000010ULL;
static const VkFormatFeatureFlagBits2 VK_FORMAT_FEATURE_2_STORAGE_TEXEL_BUFFER_BIT_KHR
= 0x00000010ULL;
static const VkFormatFeatureFlagBits2
VK_FORMAT_FEATURE_2_STORAGE_TEXEL_BUFFER_ATOMIC_BIT = 0x00000020ULL;
static const VkFormatFeatureFlagBits2
VK_FORMAT_FEATURE_2_STORAGE_TEXEL_BUFFER_ATOMIC_BIT_KHR = 0x00000020ULL;
static const VkFormatFeatureFlagBits2 VK_FORMAT_FEATURE_2_VERTEX_BUFFER_BIT =
0x00000040ULL;
static const VkFormatFeatureFlagBits2 VK_FORMAT_FEATURE_2_VERTEX_BUFFER_BIT_KHR =
0x00000040ULL;
static const VkFormatFeatureFlagBits2 VK_FORMAT_FEATURE_2_COLOR_ATTACHMENT_BIT =
0x00000080ULL;
static const VkFormatFeatureFlagBits2 VK_FORMAT_FEATURE_2_COLOR_ATTACHMENT_BIT_KHR =
0x00000080ULL;
static const VkFormatFeatureFlagBits2 VK_FORMAT_FEATURE_2_COLOR_ATTACHMENT_BLEND_BIT =
0x00000100ULL;
static const VkFormatFeatureFlagBits2
VK_FORMAT_FEATURE_2_COLOR_ATTACHMENT_BLEND_BIT_KHR = 0x00000100ULL;
static const VkFormatFeatureFlagBits2 VK_FORMAT_FEATURE_2_DEPTH_STENCIL_ATTACHMENT_BIT
= 0x00000200ULL;
static const VkFormatFeatureFlagBits2
VK_FORMAT_FEATURE_2_DEPTH_STENCIL_ATTACHMENT_BIT_KHR = 0x00000200ULL;
static const VkFormatFeatureFlagBits2 VK_FORMAT_FEATURE_2_BLIT_SRC_BIT =
0x00000400ULL;
static const VkFormatFeatureFlagBits2 VK_FORMAT_FEATURE_2_BLIT_SRC_BIT_KHR =
0x00000400ULL;
static const VkFormatFeatureFlagBits2 VK_FORMAT_FEATURE_2_BLIT_DST_BIT =
0x00000800ULL;
static const VkFormatFeatureFlagBits2 VK_FORMAT_FEATURE_2_BLIT_DST_BIT_KHR =
```

```
0x00000800ULL;
static const VkFormatFeatureFlagBits2
VK_FORMAT_FEATURE_2_SAMPLED_IMAGE_FILTER_LINEAR_BIT = 0x00001000ULL;
static const VkFormatFeatureFlagBits2
VK_FORMAT_FEATURE_2_SAMPLED_IMAGE_FILTER_LINEAR_BIT_KHR = 0x00001000ULL;
static const VkFormatFeatureFlagBits2
VK_FORMAT_FEATURE_2_SAMPLED_IMAGE_FILTER_CUBIC_BIT = 0x00002000ULL;
static const VkFormatFeatureFlagBits2
VK_FORMAT_FEATURE_2_SAMPLED_IMAGE_FILTER_CUBIC_BIT_EXT = 0x00002000ULL;
static const VkFormatFeatureFlagBits2 VK_FORMAT_FEATURE_2_TRANSFER_SRC_BIT =
0x00004000ULL;
static const VkFormatFeatureFlagBits2 VK_FORMAT_FEATURE_2_TRANSFER_SRC_BIT_KHR =
0x00004000ULL;
static const VkFormatFeatureFlagBits2 VK_FORMAT_FEATURE_2_TRANSFER_DST_BIT =
0x00008000ULL;
static const VkFormatFeatureFlagBits2 VK_FORMAT_FEATURE_2_TRANSFER_DST_BIT_KHR =
0x00008000ULL;
static const VkFormatFeatureFlagBits2
VK_FORMAT_FEATURE_2_SAMPLED_IMAGE_FILTER_MINMAX_BIT = 0x00010000ULL;
static const VkFormatFeatureFlagBits2
VK_FORMAT_FEATURE_2_SAMPLED_IMAGE_FILTER_MINMAX_BIT_KHR = 0x00010000ULL;
static const VkFormatFeatureFlagBits2 VK_FORMAT_FEATURE_2_MIDPOINT_CHROMA_SAMPLES_BIT
= 0x00020000ULL;
static const VkFormatFeatureFlagBits2
VK_FORMAT_FEATURE_2_MIDPOINT_CHROMA_SAMPLES_BIT_KHR = 0x00020000ULL;
static const VkFormatFeatureFlagBits2
VK_FORMAT_FEATURE_2_SAMPLED_IMAGE_YCBCR_CONVERSION_LINEAR_FILTER_BIT = 0x00040000ULL;
static const VkFormatFeatureFlagBits2
VK_FORMAT_FEATURE_2_SAMPLED_IMAGE_YCBCR_CONVERSION_LINEAR_FILTER_BIT_KHR =
0x00040000ULL;
static const VkFormatFeatureFlagBits2
VK_FORMAT_FEATURE_2_SAMPLED_IMAGE_YCBCR_CONVERSION_SEPARATE_RECONSTRUCTION_FILTER_BIT
= 0x00080000ULL;
static const VkFormatFeatureFlagBits2
VK_FORMAT_FEATURE_2_SAMPLED_IMAGE_YCBCR_CONVERSION_SEPARATE_RECONSTRUCTION_FILTER_BIT_
KHR = 0x00080000ULL;
static const VkFormatFeatureFlagBits2
VK_FORMAT_FEATURE_2_SAMPLED_IMAGE_YCBCR_CONVERSION_CHROMA_RECONSTRUCTION_EXPLICIT_BIT
= 0x00100000ULL;
static const VkFormatFeatureFlagBits2
VK_FORMAT_FEATURE_2_SAMPLED_IMAGE_YCBCR_CONVERSION_CHROMA_RECONSTRUCTION_EXPLICIT_BIT_
KHR = 0x00100000ULL;
static const VkFormatFeatureFlagBits2
VK_FORMAT_FEATURE_2_SAMPLED_IMAGE_YCBCR_CONVERSION_CHROMA_RECONSTRUCTION_EXPLICIT_FORC
EABLE_BIT = 0x00200000ULL;
static const VkFormatFeatureFlagBits2
VK_FORMAT_FEATURE_2_SAMPLED_IMAGE_YCBCR_CONVERSION_CHROMA_RECONSTRUCTION_EXPLICIT_FORC
EABLE_BIT_KHR = 0x00200000ULL;
static const VkFormatFeatureFlagBits2 VK_FORMAT_FEATURE_2_DISJOINT_BIT =
0x00400000ULL;
static const VkFormatFeatureFlagBits2 VK_FORMAT_FEATURE_2_DISJOINT_BIT_KHR =
```

```
0x00400000ULL;
static const VkFormatFeatureFlagBits2 VK_FORMAT_FEATURE_2_COSITED_CHROMA_SAMPLES_BIT =
0x00800000ULL;
static const VkFormatFeatureFlagBits2
VK_FORMAT_FEATURE_2_COSITED_CHROMA_SAMPLES_BIT_KHR = 0x00800000ULL;
static const VkFormatFeatureFlagBits2
VK_FORMAT_FEATURE_2_STORAGE_READ_WITHOUT_FORMAT_BIT = 0x80000000ULL;
static const VkFormatFeatureFlagBits2
VK_FORMAT_FEATURE_2_STORAGE_READ_WITHOUT_FORMAT_BIT_KHR = 0x80000000ULL;
static const VkFormatFeatureFlagBits2
VK_FORMAT_FEATURE_2_STORAGE_WRITE_WITHOUT_FORMAT_BIT = 0x100000000ULL;
static const VkFormatFeatureFlagBits2
VK_FORMAT_FEATURE_2_STORAGE_WRITE_WITHOUT_FORMAT_BIT_KHR = 0x100000000ULL;
static const VkFormatFeatureFlagBits2
VK_FORMAT_FEATURE_2_SAMPLED_IMAGE_DEPTH_COMPARISON_BIT = 0x200000000ULL;
static const VkFormatFeatureFlagBits2
VK_FORMAT_FEATURE_2_SAMPLED_IMAGE_DEPTH_COMPARISON_BIT_KHR = 0x200000000ULL;
```

The following bits **may** be set in `linearTilingFeatures` and `optimalTilingFeatures`, specifying that the features are supported by images or image views or sampler $Y'C_BC_R$ conversion objects created with the queried vkGetPhysicalDeviceFormatProperties2::`format`:

- `VK_FORMAT_FEATURE_2_SAMPLED_IMAGE_BIT` specifies that an image view **can** be sampled from.
- `VK_FORMAT_FEATURE_2_STORAGE_IMAGE_BIT` specifies that an image view **can** be used as a storage image.
- `VK_FORMAT_FEATURE_2_STORAGE_IMAGE_ATOMIC_BIT` specifies that an image view **can** be used as storage image that supports atomic operations.
- `VK_FORMAT_FEATURE_2_COLOR_ATTACHMENT_BIT` specifies that an image view **can** be used as a framebuffer color attachment and as an input attachment.
- `VK_FORMAT_FEATURE_2_COLOR_ATTACHMENT_BLEND_BIT` specifies that an image view **can** be used as a framebuffer color attachment that supports blending.
- `VK_FORMAT_FEATURE_2_DEPTH_STENCIL_ATTACHMENT_BIT` specifies that an image view **can** be used as a framebuffer depth/stencil attachment and as an input attachment.
- `VK_FORMAT_FEATURE_2_BLIT_SRC_BIT` specifies that an image **can** be used as the `srcImage` for vkCmdBlitImage2 and vkCmdBlitImage.
- `VK_FORMAT_FEATURE_2_BLIT_DST_BIT` specifies that an image **can** be used as the `dstImage` for vkCmdBlitImage2 and vkCmdBlitImage.
- `VK_FORMAT_FEATURE_2_SAMPLED_IMAGE_FILTER_LINEAR_BIT` specifies that if `VK_FORMAT_FEATURE_2_SAMPLED_IMAGE_BIT` is also set, an image view **can** be used with a sampler that has either of `magFilter` or `minFilter` set to `VK_FILTER_LINEAR`, or `mipmapMode` set to `VK_SAMPLER_MIPMAP_MODE_LINEAR`. If `VK_FORMAT_FEATURE_2_BLIT_SRC_BIT` is also set, an image can be used as the `srcImage` for vkCmdBlitImage2 and `vkCmdBlitImage` with a `filter` of `VK_FILTER_LINEAR`. This bit **must** only be exposed for formats that also support the `VK_FORMAT_FEATURE_2_SAMPLED_IMAGE_BIT` or `VK_FORMAT_FEATURE_2_BLIT_SRC_BIT`.

  If the format being queried is a depth/stencil format, this bit only specifies that the depth aspect

(not the stencil aspect) of an image of this format supports linear filtering. Where depth comparison is supported it **may** be linear filtered whether this bit is present or not, but where this bit is not present the filtered value **may** be computed in an implementation-dependent manner which differs from the normal rules of linear filtering. The resulting value **must** be in the range [0,1] and **should** be proportional to, or a weighted average of, the number of comparison passes or failures.

- `VK_FORMAT_FEATURE_2_TRANSFER_SRC_BIT` specifies that an image **can** be used as a source image for copy commands.
- `VK_FORMAT_FEATURE_2_TRANSFER_DST_BIT` specifies that an image **can** be used as a destination image for copy commands and clear commands.
- `VK_FORMAT_FEATURE_2_SAMPLED_IMAGE_FILTER_MINMAX_BIT` specifies `VkImage` **can** be used as a sampled image with a min or max VkSamplerReductionMode. This bit **must** only be exposed for formats that also support the `VK_FORMAT_FEATURE_2_SAMPLED_IMAGE_BIT`.
- `VK_FORMAT_FEATURE_2_MIDPOINT_CHROMA_SAMPLES_BIT` specifies that an application **can** define a sampler $Y'C_BC_R$ conversion using this format as a source, and that an image of this format **can** be used with a VkSamplerYcbcrConversionCreateInfo `xChromaOffset` and/or `yChromaOffset` of `VK_CHROMA_LOCATION_MIDPOINT`. Otherwise both `xChromaOffset` and `yChromaOffset` **must** be `VK_CHROMA_LOCATION_COSITED_EVEN`. If a format does not incorporate chroma downsampling (it is not a “422” or “420” format) but the implementation supports sampler $Y'C_BC_R$ conversion for this format, the implementation **must** set `VK_FORMAT_FEATURE_2_MIDPOINT_CHROMA_SAMPLES_BIT`.
- `VK_FORMAT_FEATURE_2_COSITED_CHROMA_SAMPLES_BIT` specifies that an application **can** define a sampler $Y'C_BC_R$ conversion using this format as a source, and that an image of this format **can** be used with a VkSamplerYcbcrConversionCreateInfo `xChromaOffset` and/or `yChromaOffset` of `VK_CHROMA_LOCATION_COSITED_EVEN`. Otherwise both `xChromaOffset` and `yChromaOffset` **must** be `VK_CHROMA_LOCATION_MIDPOINT`. If neither `VK_FORMAT_FEATURE_2_COSITED_CHROMA_SAMPLES_BIT` nor `VK_FORMAT_FEATURE_2_MIDPOINT_CHROMA_SAMPLES_BIT` is set, the application **must** not define a sampler $Y'C_BC_R$ conversion using this format as a source.
- `VK_FORMAT_FEATURE_2_SAMPLED_IMAGE_YCBCR_CONVERSION_LINEAR_FILTER_BIT` specifies that an application **can** define a sampler $Y'C_BC_R$ conversion using this format as a source with `chromaFilter` set to `VK_FILTER_LINEAR`.
- `VK_FORMAT_FEATURE_2_SAMPLED_IMAGE_YCBCR_CONVERSION_SEPARATE_RECONSTRUCTION_FILTER_BIT` specifies that the format can have different chroma, min, and mag filters.
- `VK_FORMAT_FEATURE_2_SAMPLED_IMAGE_YCBCR_CONVERSION_CHROMA_RECONSTRUCTION_EXPLICIT_BIT` specifies that reconstruction is explicit, as described in Chroma Reconstruction. If this bit is not present, reconstruction is implicit by default.
- `VK_FORMAT_FEATURE_2_SAMPLED_IMAGE_YCBCR_CONVERSION_CHROMA_RECONSTRUCTION_EXPLICIT_FORCEABLE_BIT` specifies that reconstruction **can** be forcibly made explicit by setting VkSamplerYcbcrConversionCreateInfo::`forceExplicitReconstruction` to `VK_TRUE`. If the format being queried supports `VK_FORMAT_FEATURE_2_SAMPLED_IMAGE_YCBCR_CONVERSION_CHROMA_RECONSTRUCTION_EXPLICIT_BIT` it **must** also support `VK_FORMAT_FEATURE_2_SAMPLED_IMAGE_YCBCR_CONVERSION_CHROMA_RECONSTRUCTION_EXPLICIT_FORCEABLE_BIT`.

- VK_FORMAT_FEATURE_2_DISJOINT_BIT specifies that a multi-planar image **can** have the VK_IMAGE_CREATE_DISJOINT_BIT set during image creation. An implementation **must** not set VK_FORMAT_FEATURE_2_DISJOINT_BIT for *single-plane formats*.
- VK_FORMAT_FEATURE_2_STORAGE_READ_WITHOUT_FORMAT_BIT specifies that image views or buffer views created with this format **can** be used as storage images or storage texel buffers respectively for read operations without specifying a format.
- VK_FORMAT_FEATURE_2_STORAGE_WRITE_WITHOUT_FORMAT_BIT specifies that image views or buffer views created with this format **can** be used as storage images or storage texel buffers respectively for write operations without specifying a format.
- VK_FORMAT_FEATURE_2_SAMPLED_IMAGE_DEPTH_COMPARISON_BIT specifies that image views created with this format **can** be used for depth comparison performed by OpImage*Dref* instructions.

The following bits **may** be set in bufferFeatures, specifying that the features are supported by buffers or buffer views created with the queried vkGetPhysicalDeviceFormatProperties2::format:

- VK_FORMAT_FEATURE_2_UNIFORM_TEXEL_BUFFER_BIT specifies that the format **can** be used to create a buffer view that **can** be bound to a VK_DESCRIPTOR_TYPE_UNIFORM_TEXEL_BUFFER descriptor.
- VK_FORMAT_FEATURE_2_STORAGE_TEXEL_BUFFER_BIT specifies that the format **can** be used to create a buffer view that **can** be bound to a VK_DESCRIPTOR_TYPE_STORAGE_TEXEL_BUFFER descriptor.
- VK_FORMAT_FEATURE_2_STORAGE_TEXEL_BUFFER_ATOMIC_BIT specifies that atomic operations are supported on VK_DESCRIPTOR_TYPE_STORAGE_TEXEL_BUFFER with this format.
- VK_FORMAT_FEATURE_2_VERTEX_BUFFER_BIT specifies that the format **can** be used as a vertex attribute format (VkVertexInputAttributeDescription::format).
- VK_FORMAT_FEATURE_2_STORAGE_READ_WITHOUT_FORMAT_BIT specifies that buffer views created with this format **can** be used as storage texel buffers for read operations without specifying a format.
- VK_FORMAT_FEATURE_2_STORAGE_WRITE_WITHOUT_FORMAT_BIT specifies that buffer views created with this format **can** be used as storage texel buffers for write operations without specifying a format.

```
// Provided by VK_VERSION_1_3
typedef VkFlags64 VkFormatFeatureFlags2;
```

VkFormatFeatureFlags2 is a bitmask type for setting a mask of zero or more VkFormatFeatureFlagBits2.

34.2.1. Potential Format Features

Some valid usage conditions depend on the format features supported by a VkImage whose VkImageTiling is unknown. In such cases the exact VkFormatFeatureFlagBits supported by the VkImage cannot be determined, so the valid usage conditions are expressed in terms of the *potential format features* of the VkImage format.

The *potential format features* of a VkFormat are defined as follows:

- The union of VkFormatFeatureFlagBits and VkFormatFeatureFlagBits2, supported when the

VkImageTiling is VK_IMAGE_TILING_OPTIMAL or VK_IMAGE_TILING_LINEAR

34.3. Required Format Support

Implementations **must** support at least the following set of features on the listed formats. For images, these features **must** be supported for every VkImageType (including arrayed and cube variants) unless otherwise noted. These features are supported on existing formats without needing to advertise an extension or needing to explicitly enable them. Support for additional functionality beyond the requirements listed here is queried using the vkGetPhysicalDeviceFormatProperties command.

NOTE Unless otherwise excluded below, the required formats are supported for all VkImageCreateFlags values as long as those flag values are otherwise allowed.

The following tables show which feature bits **must** be supported for each format. Formats that are required to support VK_FORMAT_FEATURE_SAMPLED_IMAGE_BIT **must** also support VK_FORMAT_FEATURE_TRANSFER_SRC_BIT and VK_FORMAT_FEATURE_TRANSFER_DST_BIT.

Table 42. Key for Format Feature Tables

□	This feature **must** be supported on the named format
†	This feature **must** be supported on at least some of the named formats, with more information in the table where the symbol appears
‡	This feature **must** be supported with some caveats or preconditions, with more information in the table where the symbol appears
§	This feature **must** be supported with some caveats or preconditions, with more information in the table where the symbol appears

Table 43. Feature Bits in `optimalTilingFeatures`

VK_FORMAT_FEATURE_TRANSFER_SRC_BIT
VK_FORMAT_FEATURE_TRANSFER_DST_BIT
VK_FORMAT_FEATURE_SAMPLED_IMAGE_BIT
VK_FORMAT_FEATURE_BLIT_SRC_BIT
VK_FORMAT_FEATURE_SAMPLED_IMAGE_FILTER_LINEAR_BIT
VK_FORMAT_FEATURE_STORAGE_IMAGE_BIT
VK_FORMAT_FEATURE_STORAGE_IMAGE_ATOMIC_BIT
VK_FORMAT_FEATURE_COLOR_ATTACHMENT_BIT
VK_FORMAT_FEATURE_BLIT_DST_BIT
VK_FORMAT_FEATURE_COLOR_ATTACHMENT_BLEND_BIT
VK_FORMAT_FEATURE_DEPTH_STENCIL_ATTACHMENT_BIT
VK_FORMAT_FEATURE_SAMPLED_IMAGE_FILTER_MINMAX_BIT

Table 44. Feature Bits in `bufferFeatures`

`VK_FORMAT_FEATURE_VERTEX_BUFFER_BIT`
`VK_FORMAT_FEATURE_UNIFORM_TEXEL_BUFFER_BIT`
`VK_FORMAT_FEATURE_STORAGE_TEXEL_BUFFER_BIT`
`VK_FORMAT_FEATURE_STORAGE_TEXEL_BUFFER_ATOMIC_BIT`

Table 45. Mandatory Format Support: Sub-Byte Components

	VK_FORMAT_FEATURE_SAMPLED_IMAGE_BIT	VK_FORMAT_FEATURE_BLIT_SRC_BIT	VK_FORMAT_FEATURE_SAMPLED_IMAGE_FILTER_LINEAR_BIT	VK_FORMAT_FEATURE_STORAGE_IMAGE_BIT	VK_FORMAT_FEATURE_STORAGE_IMAGE_ATOMIC_BIT	VK_FORMAT_FEATURE_COLOR_ATTACHMENT_BIT	VK_FORMAT_FEATURE_BLIT_DST_BIT	VK_FORMAT_FEATURE_COLOR_ATTACHMENT_BLEND_BIT	VK_FORMAT_FEATURE_DEPTH_STENCIL_ATTACHMENT_BIT	VK_FORMAT_FEATURE_VERTEX_BUFFER_BIT	VK_FORMAT_FEATURE_UNIFORM_TEXEL_BUFFER_BIT	VK_FORMAT_FEATURE_STORAGE_TEXEL_BUFFER_BIT	VK_FORMAT_FEATURE_STORAGE_TEXEL_BUFFER_ATOMIC_BIT
Format													
VK_FORMAT_UNDEFINED													
VK_FORMAT_R4G4_UNORM_PACK8													
VK_FORMAT_R4G4B4A4_UNORM_PACK16													
VK_FORMAT_B4G4R4A4_UNORM_PACK16	◻	◻	◻										
VK_FORMAT_R5G6B5_UNORM_PACK16	◻	◻	◻			◻	◻	◻					
VK_FORMAT_B5G6R5_UNORM_PACK16													
VK_FORMAT_R5G5B5A1_UNORM_PACK16													
VK_FORMAT_B5G5R5A1_UNORM_PACK16													
VK_FORMAT_A1R5G5B5_UNORM_PACK16	◻	◻	◻			◻	◻	◻					
VK_FORMAT_A4R4G4B4_UNORM_PACK16	†	†	†										
VK_FORMAT_A4B4G4R4_UNORM_PACK16	‡	‡	‡										

Format features marked † **must** be supported for `optimalTilingFeatures` if the `VkPhysicalDevice` supports the `VkPhysicalDevice4444FormatsFeaturesEXT`::`formatA4R4G4B4` feature.

Format features marked ‡ **must** be supported for `optimalTilingFeatures` if the `VkPhysicalDevice` supports the `VkPhysicalDevice4444FormatsFeaturesEXT`::`formatA4B4G4R4` feature.

Table 46. Mandatory Format Support: 1-3 Byte-Sized Components

Format	VK_FORMAT_FEATURE_SAMPLED_IMAGE_BIT	VK_FORMAT_FEATURE_BLIT_SRC_BIT	VK_FORMAT_FEATURE_SAMPLED_IMAGE_FILTER_LINEAR_BIT	VK_FORMAT_FEATURE_STORAGE_IMAGE_BIT	VK_FORMAT_FEATURE_STORAGE_IMAGE_ATOMIC_BIT	VK_FORMAT_FEATURE_COLOR_ATTACHMENT_BIT	VK_FORMAT_FEATURE_BLIT_DST_BIT	VK_FORMAT_FEATURE_COLOR_ATTACHMENT_BLEND_BIT	VK_FORMAT_FEATURE_DEPTH_STENCIL_ATTACHMENT_BIT	VK_FORMAT_FEATURE_VERTEX_BUFFER_BIT	VK_FORMAT_FEATURE_UNIFORM_TEXEL_BUFFER_BIT	VK_FORMAT_FEATURE_STORAGE_TEXEL_BUFFER_BIT	VK_FORMAT_FEATURE_STORAGE_TEXEL_BUFFER_ATOMIC_BIT	
VK_FORMAT_R8_UNORM	◻	◻	◻	◻ ‡		◻	◻	◻		◻	◻			
VK_FORMAT_R8_SNORM	◻	◻	◻	◻ ‡						◻	◻			
VK_FORMAT_R8_USCALED														
VK_FORMAT_R8_SSCALED														
VK_FORMAT_R8_UINT	◻	◻		◻ ‡		◻	◻			◻	◻			
VK_FORMAT_R8_SINT	◻	◻		◻ ‡		◻	◻			◻	◻			
VK_FORMAT_R8_SRGB														
VK_FORMAT_R8G8_UNORM	◻	◻	◻	◻ ‡		◻	◻	◻		◻	◻			
VK_FORMAT_R8G8_SNORM	◻	◻	◻	◻ ‡						◻	◻			
VK_FORMAT_R8G8_USCALED														
VK_FORMAT_R8G8_SSCALED														
VK_FORMAT_R8G8_UINT	◻	◻		◻ ‡		◻	◻			◻	◻			
VK_FORMAT_R8G8_SINT	◻	◻		◻ ‡		◻	◻			◻	◻			
VK_FORMAT_R8G8_SRGB														
VK_FORMAT_R8G8B8_UNORM														
VK_FORMAT_R8G8B8_SNORM														
VK_FORMAT_R8G8B8_USCALED														
VK_FORMAT_R8G8B8_SSCALED														
VK_FORMAT_R8G8B8_UINT														
VK_FORMAT_R8G8B8_SINT														
VK_FORMAT_R8G8B8_SRGB														
VK_FORMAT_B8G8R8_UNORM														
VK_FORMAT_B8G8R8_SNORM														

VK_FORMAT_B8G8R8_USCALED													
VK_FORMAT_B8G8R8_SSCALED													
VK_FORMAT_B8G8R8_UINT													
VK_FORMAT_B8G8R8_SINT													
VK_FORMAT_B8G8R8_SRGB													

Format features marked with ‡ **must** be supported for `optimalTilingFeatures` if the `VkPhysicalDevice` supports the `shaderStorageImageExtendedFormats` feature.

Table 47. Mandatory Format Support: 4 Byte-Sized Components

Format	VK_FORMAT_FEATURE_SAMPLED_IMAGE_BIT	VK_FORMAT_FEATURE_BLIT_SRC_BIT	VK_FORMAT_FEATURE_SAMPLED_IMAGE_FILTER_LINEAR_BIT	VK_FORMAT_FEATURE_STORAGE_IMAGE_BIT	VK_FORMAT_FEATURE_STORAGE_IMAGE_ATOMIC_BIT	VK_FORMAT_FEATURE_COLOR_ATTACHMENT_BIT	VK_FORMAT_FEATURE_BLIT_DST_BIT	VK_FORMAT_FEATURE_COLOR_ATTACHMENT_BLEND_BIT	VK_FORMAT_FEATURE_DEPTH_STENCIL_ATTACHMENT_BIT	VK_FORMAT_FEATURE_VERTEX_BUFFER_BIT	VK_FORMAT_FEATURE_UNIFORM_TEXEL_BUFFER_BIT	VK_FORMAT_FEATURE_STORAGE_TEXEL_BUFFER_BIT	VK_FORMAT_FEATURE_STORAGE_TEXEL_BUFFER_ATOMIC_BIT	
VK_FORMAT_R8G8B8A8_UNORM	✓	✓	✓	✓		✓	✓	✓		✓	✓	✓		
VK_FORMAT_R8G8B8A8_SNORM	✓	✓	✓	✓						✓	✓	✓		
VK_FORMAT_R8G8B8A8_USCALED														
VK_FORMAT_R8G8B8A8_SSCALED														
VK_FORMAT_R8G8B8A8_UINT	✓	✓		✓		✓	✓			✓	✓	✓		
VK_FORMAT_R8G8B8A8_SINT	✓	✓		✓		✓	✓			✓	✓	✓		
VK_FORMAT_R8G8B8A8_SRGB	✓	✓	✓			✓	✓	✓						
VK_FORMAT_B8G8R8A8_UNORM	✓	✓	✓			✓	✓	✓		✓	✓			
VK_FORMAT_B8G8R8A8_SNORM														
VK_FORMAT_B8G8R8A8_USCALED														
VK_FORMAT_B8G8R8A8_SSCALED														
VK_FORMAT_B8G8R8A8_UINT														
VK_FORMAT_B8G8R8A8_SINT														
VK_FORMAT_B8G8R8A8_SRGB	✓	✓	✓			✓	✓	✓						
VK_FORMAT_A8B8G8R8_UNORM_PACK32	✓	✓	✓			✓	✓	✓		✓	✓	✓		
VK_FORMAT_A8B8G8R8_SNORM_PACK32	✓	✓	✓							✓	✓	✓		
VK_FORMAT_A8B8G8R8_USCALED_PACK32														
VK_FORMAT_A8B8G8R8_SSCALED_PACK32														
VK_FORMAT_A8B8G8R8_UINT_PACK32	✓	✓				✓	✓			✓	✓	✓		
VK_FORMAT_A8B8G8R8_SINT_PACK32	✓	✓				✓	✓			✓	✓	✓		
VK_FORMAT_A8B8G8R8_SRGB_PACK32	✓	✓	✓			✓	✓	✓						

Table 48. Mandatory Format Support: 10- and 12-Bit Components

VK_FORMAT_FEATURE_SAMPLED_IMAGE_BIT	VK_FORMAT_FEATURE_BLIT_SRC_BIT	VK_FORMAT_FEATURE_SAMPLED_IMAGE_FILTER_LINEAR_BIT	VK_FORMAT_FEATURE_STORAGE_IMAGE_BIT	VK_FORMAT_FEATURE_STORAGE_IMAGE_ATOMIC_BIT	VK_FORMAT_FEATURE_COLOR_ATTACHMENT_BIT	VK_FORMAT_FEATURE_BLIT_DST_BIT	VK_FORMAT_FEATURE_COLOR_ATTACHMENT_BLEND_BIT	VK_FORMAT_FEATURE_DEPTH_STENCIL_ATTACHMENT_BIT	VK_FORMAT_FEATURE_VERTEX_BUFFER_BIT	VK_FORMAT_FEATURE_UNIFORM_TEXEL_BUFFER_BIT	VK_FORMAT_FEATURE_STORAGE_TEXEL_BUFFER_BIT	VK_FORMAT_FEATURE_STORAGE_TEXEL_BUFFER_ATOMIC_BIT
Format												
VK_FORMAT_A2R10G10B10_UNORM_PACK32												
VK_FORMAT_A2R10G10B10_SNORM_PACK32												
VK_FORMAT_A2R10G10B10_USCALED_PACK32												
VK_FORMAT_A2R10G10B10_SSCALED_PACK32												
VK_FORMAT_A2R10G10B10_UINT_PACK32												
VK_FORMAT_A2R10G10B10_SINT_PACK32												
VK_FORMAT_A2B10G10R10_UNORM_PACK32	‡	‡	‡	‡		‡	‡	‡		‡	‡	
VK_FORMAT_A2B10G10R10_SNORM_PACK32												
VK_FORMAT_A2B10G10R10_USCALED_PACK32												
VK_FORMAT_A2B10G10R10_SSCALED_PACK32												
VK_FORMAT_A2B10G10R10_UINT_PACK32	‡	‡		‡		‡	‡				‡	
VK_FORMAT_A2B10G10R10_SINT_PACK32												
VK_FORMAT_R10X6_UNORM_PACK16												
VK_FORMAT_R10X6G10X6_UNORM_2PACK16												
VK_FORMAT_R12X4_UNORM_PACK16												
VK_FORMAT_R12X4G12X4_UNORM_2PACK16												

Format features marked with ‡ **must** be supported for `optimalTilingFeatures` if the `VkPhysicalDevice` supports the `shaderStorageImageExtendedFormats` feature.

Table 49. Mandatory Format Support: 16-bit Components

VK_FORMAT_FEATURE_SAMPLED_IMAGE_BIT	VK_FORMAT_FEATURE_BLIT_SRC_BIT	VK_FORMAT_FEATURE_SAMPLED_IMAGE_FILTER_LINEAR_BIT	VK_FORMAT_FEATURE_STORAGE_IMAGE_BIT	VK_FORMAT_FEATURE_STORAGE_IMAGE_ATOMIC_BIT	VK_FORMAT_FEATURE_COLOR_ATTACHMENT_BIT	VK_FORMAT_FEATURE_BLIT_DST_BIT	VK_FORMAT_FEATURE_COLOR_ATTACHMENT_BLEND_BIT	VK_FORMAT_FEATURE_DEPTH_STENCIL_ATTACHMENT_BIT	VK_FORMAT_FEATURE_VERTEX_BUFFER_BIT	VK_FORMAT_FEATURE_UNIFORM_TEXEL_BUFFER_BIT	VK_FORMAT_FEATURE_STORAGE_TEXEL_BUFFER_BIT	VK_FORMAT_FEATURE_STORAGE_TEXEL_BUFFER_ATOMIC_BIT	
Format													
VK_FORMAT_R16_UNORM			‡						◻				
VK_FORMAT_R16_SNORM			‡						◻				
VK_FORMAT_R16_USCALED													
VK_FORMAT_R16_SSCALED													
VK_FORMAT_R16_UINT	◻	◻	‡		◻	◻			◻	◻			
VK_FORMAT_R16_SINT	◻	◻	‡		◻	◻			◻	◻			
VK_FORMAT_R16_SFLOAT	◻	◻	‡		◻	◻	◻		◻	◻			
VK_FORMAT_R16G16_UNORM			‡						◻				
VK_FORMAT_R16G16_SNORM			‡						◻				
VK_FORMAT_R16G16_USCALED													
VK_FORMAT_R16G16_SSCALED													
VK_FORMAT_R16G16_UINT	◻	◻	‡		◻	◻			◻	◻			
VK_FORMAT_R16G16_SINT	◻	◻	‡		◻	◻			◻	◻			
VK_FORMAT_R16G16_SFLOAT	◻	◻	‡	§	◻	◻	◻		◻	◻	§	§	
VK_FORMAT_R16G16B16_UNORM													
VK_FORMAT_R16G16B16_SNORM													
VK_FORMAT_R16G16B16_USCALED													
VK_FORMAT_R16G16B16_SSCALED													
VK_FORMAT_R16G16B16_UINT													
VK_FORMAT_R16G16B16_SINT													
VK_FORMAT_R16G16B16_SFLOAT													
VK_FORMAT_R16G16B16A16_UNORM			‡						◻				
VK_FORMAT_R16G16B16A16_SNORM			‡						◻				

VK_FORMAT_R16G16B16A16_USCALED													
VK_FORMAT_R16G16B16A16_SSCALED													
VK_FORMAT_R16G16B16A16_UINT	□	□		□		□	□			□	□	□	
VK_FORMAT_R16G16B16A16_SINT	□	□		□		□	□			□	□	□	
VK_FORMAT_R16G16B16A16_SFLOAT	□	□	□	□	§	□	□	□		□	□	□	§
Format features marked with ‡ **must** be supported for optimalTilingFeatures if the VkPhysicalDevice supports the shaderStorageImageExtendedFormats feature.													

Table 50. Mandatory Format Support: 32-bit Components

VK_FORMAT_FEATURE_STORAGE_TEXEL_BUFFER_ATOMIC_BIT												
VK_FORMAT_FEATURE_STORAGE_TEXEL_BUFFER_BIT											✓	✓
VK_FORMAT_FEATURE_UNIFORM_TEXEL_BUFFER_BIT										✓	✓	✓
VK_FORMAT_FEATURE_VERTEX_BUFFER_BIT									✓	✓	✓	✓
VK_FORMAT_FEATURE_DEPTH_STENCIL_ATTACHMENT_BIT								✓				
VK_FORMAT_FEATURE_COLOR_ATTACHMENT_BLEND_BIT							✓					
VK_FORMAT_FEATURE_BLIT_DST_BIT						✓						
VK_FORMAT_FEATURE_COLOR_ATTACHMENT_BIT					✓							
VK_FORMAT_FEATURE_STORAGE_IMAGE_ATOMIC_BIT				✓								
VK_FORMAT_FEATURE_STORAGE_IMAGE_BIT			✓									
VK_FORMAT_FEATURE_SAMPLED_IMAGE_FILTER_LINEAR_BIT		✓										
VK_FORMAT_FEATURE_BLIT_SRC_BIT	✓											
VK_FORMAT_FEATURE_SAMPLED_IMAGE_BIT												
Format												
VK_FORMAT_R32_UINT	✓	✓		✓	✓	✓	✓			✓	✓	✓	✓
VK_FORMAT_R32_SINT	✓	✓		✓	✓	✓	✓			✓	✓	✓	✓
VK_FORMAT_R32_SFLOAT	✓	✓		✓		✓	✓			✓	✓	✓	
VK_FORMAT_R32G32_UINT	✓	✓		✓		✓	✓			✓	✓	✓	
VK_FORMAT_R32G32_SINT	✓	✓		✓		✓	✓			✓	✓	✓	
VK_FORMAT_R32G32_SFLOAT	✓	✓		✓		✓	✓			✓	✓	✓	
VK_FORMAT_R32G32B32_UINT										✓			
VK_FORMAT_R32G32B32_SINT										✓			
VK_FORMAT_R32G32B32_SFLOAT										✓			
VK_FORMAT_R32G32B32A32_UINT	✓	✓		✓		✓	✓			✓	✓	✓	
VK_FORMAT_R32G32B32A32_SINT	✓	✓		✓		✓	✓			✓	✓	✓	
VK_FORMAT_R32G32B32A32_SFLOAT	✓	✓		✓		✓	✓			✓	✓	✓	

Table 51. Mandatory Format Support: 64-bit/uneven Components

	VK_FORMAT_FEATURE_SAMPLED_IMAGE_BIT	VK_FORMAT_FEATURE_BLIT_SRC_BIT	VK_FORMAT_FEATURE_SAMPLED_IMAGE_FILTER_LINEAR_BIT	VK_FORMAT_FEATURE_STORAGE_IMAGE_BIT	VK_FORMAT_FEATURE_STORAGE_IMAGE_ATOMIC_BIT	VK_FORMAT_FEATURE_COLOR_ATTACHMENT_BIT	VK_FORMAT_FEATURE_BLIT_DST_BIT	VK_FORMAT_FEATURE_COLOR_ATTACHMENT_BLEND_BIT	VK_FORMAT_FEATURE_DEPTH_STENCIL_ATTACHMENT_BIT	VK_FORMAT_FEATURE_VERTEX_BUFFER_BIT	VK_FORMAT_FEATURE_UNIFORM_TEXEL_BUFFER_BIT	VK_FORMAT_FEATURE_STORAGE_TEXEL_BUFFER_BIT	VK_FORMAT_FEATURE_STORAGE_TEXEL_BUFFER_ATOMIC_BIT
Format													
VK_FORMAT_R64_UINT													
VK_FORMAT_R64_SINT													
VK_FORMAT_R64_SFLOAT													
VK_FORMAT_R64G64_UINT													
VK_FORMAT_R64G64_SINT													
VK_FORMAT_R64G64_SFLOAT													
VK_FORMAT_R64G64B64_UINT													
VK_FORMAT_R64G64B64_SINT													
VK_FORMAT_R64G64B64_SFLOAT													
VK_FORMAT_R64G64B64A64_UINT													
VK_FORMAT_R64G64B64A64_SINT													
VK_FORMAT_R64G64B64A64_SFLOAT													
VK_FORMAT_B10G11R11_UFLOAT_PACK32				‡									
VK_FORMAT_E5B9G9R9_UFLOAT_PACK32													

Format features marked with ‡ **must** be supported for `optimalTilingFeatures` if the `VkPhysicalDevice` supports the `shaderStorageImageExtendedFormats` feature.

Table 52. Mandatory Format Support: Depth/Stencil With `VkImageType VK_IMAGE_TYPE_2D`

VK_FORMAT_FEATURE_STORAGE_TEXEL_BUFFER_ATOMIC_BIT	VK_FORMAT_FEATURE_STORAGE_TEXEL_BUFFER_BIT	VK_FORMAT_FEATURE_UNIFORM_TEXEL_BUFFER_BIT	VK_FORMAT_FEATURE_VERTEX_BUFFER_BIT	VK_FORMAT_FEATURE_DEPTH_STENCIL_ATTACHMENT_BIT	VK_FORMAT_FEATURE_COLOR_ATTACHMENT_BLEND_BIT	VK_FORMAT_FEATURE_BLIT_DST_BIT	VK_FORMAT_FEATURE_COLOR_ATTACHMENT_BIT	VK_FORMAT_FEATURE_STORAGE_IMAGE_ATOMIC_BIT	VK_FORMAT_FEATURE_STORAGE_IMAGE_BIT	VK_FORMAT_FEATURE_SAMPLED_IMAGE_FILTER_LINEAR_BIT	VK_FORMAT_FEATURE_BLIT_SRC_BIT	VK_FORMAT_FEATURE_SAMPLED_IMAGE_BIT	**Format**
				✓							✓	✓	VK_FORMAT_D16_UNORM
				†									VK_FORMAT_X8_D24_UNORM_PACK32
				†							✓	✓	VK_FORMAT_D32_SFLOAT
													VK_FORMAT_S8_UINT
													VK_FORMAT_D16_UNORM_S8_UINT
				†									VK_FORMAT_D24_UNORM_S8_UINT
				†									VK_FORMAT_D32_SFLOAT_S8_UINT
✓	✓	✓	✓		✓	✓	✓	✓	✓	✓			

`VK_FORMAT_FEATURE_DEPTH_STENCIL_ATTACHMENT_BIT` feature **must** be supported for at least one of `VK_FORMAT_X8_D24_UNORM_PACK32` and `VK_FORMAT_D32_SFLOAT`, and **must** be supported for at least one of `VK_FORMAT_D24_UNORM_S8_UINT` and `VK_FORMAT_D32_SFLOAT_S8_UINT`.

`bufferFeatures` **must** not support any features for these formats

Table 53. Mandatory Format Support: BC Compressed Formats With `VkImageType` `VK_IMAGE_TYPE_2D` *and* `VK_IMAGE_TYPE_3D`

	VK_FORMAT_FEATURE_SAMPLED_IMAGE_BIT	VK_FORMAT_FEATURE_BLIT_SRC_BIT	VK_FORMAT_FEATURE_SAMPLED_IMAGE_FILTER_LINEAR_BIT	VK_FORMAT_FEATURE_STORAGE_IMAGE_BIT	VK_FORMAT_FEATURE_STORAGE_IMAGE_ATOMIC_BIT	VK_FORMAT_FEATURE_COLOR_ATTACHMENT_BIT	VK_FORMAT_FEATURE_BLIT_DST_BIT	VK_FORMAT_FEATURE_COLOR_ATTACHMENT_BLEND_BIT	VK_FORMAT_FEATURE_DEPTH_STENCIL_ATTACHMENT_BIT	VK_FORMAT_FEATURE_VERTEX_BUFFER_BIT	VK_FORMAT_FEATURE_UNIFORM_TEXEL_BUFFER_BIT	VK_FORMAT_FEATURE_STORAGE_TEXEL_BUFFER_BIT	VK_FORMAT_FEATURE_STORAGE_TEXEL_BUFFER_ATOMIC_BIT	
Format														
VK_FORMAT_BC1_RGB_UNORM_BLOCK	†	†	†											
VK_FORMAT_BC1_RGB_SRGB_BLOCK	†	†	†											
VK_FORMAT_BC1_RGBA_UNORM_BLOCK	†	†	†											
VK_FORMAT_BC1_RGBA_SRGB_BLOCK	†	†	†											
VK_FORMAT_BC2_UNORM_BLOCK	†	†	†											
VK_FORMAT_BC2_SRGB_BLOCK	†	†	†											
VK_FORMAT_BC3_UNORM_BLOCK	†	†	†											
VK_FORMAT_BC3_SRGB_BLOCK	†	†	†											
VK_FORMAT_BC4_UNORM_BLOCK	†	†	†											
VK_FORMAT_BC4_SNORM_BLOCK	†	†	†											
VK_FORMAT_BC5_UNORM_BLOCK	†	†	†											
VK_FORMAT_BC5_SNORM_BLOCK	†	†	†											
VK_FORMAT_BC6H_UFLOAT_BLOCK	†	†	†											
VK_FORMAT_BC6H_SFLOAT_BLOCK	†	†	†											
VK_FORMAT_BC7_UNORM_BLOCK	†	†	†											
VK_FORMAT_BC7_SRGB_BLOCK	†	†	†											

The `VK_FORMAT_FEATURE_SAMPLED_IMAGE_BIT`, `VK_FORMAT_FEATURE_BLIT_SRC_BIT` and `VK_FORMAT_FEATURE_SAMPLED_IMAGE_FILTER_LINEAR_BIT` features **must** be supported in `optimalTilingFeatures` for all the formats in at least one of: this table, Mandatory Format Support: ETC2 and EAC Compressed Formats With `VkImageType` `VK_IMAGE_TYPE_2D`, or Mandatory Format Support: ASTC LDR Compressed Formats With `VkImageType` `VK_IMAGE_TYPE_2D`.

Table 54. Mandatory Format Support: ETC2 and EAC Compressed Formats With `VkImageType` `VK_IMAGE_TYPE_2D`

Format	VK_FORMAT_FEATURE_SAMPLED_IMAGE_BIT	VK_FORMAT_FEATURE_BLIT_SRC_BIT	VK_FORMAT_FEATURE_SAMPLED_IMAGE_FILTER_LINEAR_BIT	VK_FORMAT_FEATURE_STORAGE_IMAGE_BIT	VK_FORMAT_FEATURE_STORAGE_IMAGE_ATOMIC_BIT	VK_FORMAT_FEATURE_COLOR_ATTACHMENT_BIT	VK_FORMAT_FEATURE_BLIT_DST_BIT	VK_FORMAT_FEATURE_COLOR_ATTACHMENT_BLEND_BIT	VK_FORMAT_FEATURE_DEPTH_STENCIL_ATTACHMENT_BIT	VK_FORMAT_FEATURE_VERTEX_BUFFER_BIT	VK_FORMAT_FEATURE_UNIFORM_TEXEL_BUFFER_BIT	VK_FORMAT_FEATURE_STORAGE_TEXEL_BUFFER_BIT	VK_FORMAT_FEATURE_STORAGE_TEXEL_BUFFER_ATOMIC_BIT	
VK_FORMAT_ETC2_R8G8B8_UNORM_BLOCK	†	†	†											
VK_FORMAT_ETC2_R8G8B8_SRGB_BLOCK	†	†	†											
VK_FORMAT_ETC2_R8G8B8A1_UNORM_BLOCK	†	†	†											
VK_FORMAT_ETC2_R8G8B8A1_SRGB_BLOCK	†	†	†											
VK_FORMAT_ETC2_R8G8B8A8_UNORM_BLOCK	†	†	†											
VK_FORMAT_ETC2_R8G8B8A8_SRGB_BLOCK	†	†	†											
VK_FORMAT_EAC_R11_UNORM_BLOCK	†	†	†											
VK_FORMAT_EAC_R11_SNORM_BLOCK	†	†	†											
VK_FORMAT_EAC_R11G11_UNORM_BLOCK	†	†	†											
VK_FORMAT_EAC_R11G11_SNORM_BLOCK	†	†	†											

The `VK_FORMAT_FEATURE_SAMPLED_IMAGE_BIT`, `VK_FORMAT_FEATURE_BLIT_SRC_BIT` and `VK_FORMAT_FEATURE_SAMPLED_IMAGE_FILTER_LINEAR_BIT` features **must** be supported in `optimalTilingFeatures` for all the formats in at least one of: this table, Mandatory Format Support: BC Compressed Formats With `VkImageType` `VK_IMAGE_TYPE_2D` and `VK_IMAGE_TYPE_3D`, or Mandatory Format Support: ASTC LDR Compressed Formats With `VkImageType` `VK_IMAGE_TYPE_2D`.

Table 55. Mandatory Format Support: ASTC LDR Compressed Formats With `VkImageType VK_IMAGE_TYPE_2D`

Format	VK_FORMAT_FEATURE_SAMPLED_IMAGE_BIT	VK_FORMAT_FEATURE_BLIT_SRC_BIT	VK_FORMAT_FEATURE_SAMPLED_IMAGE_FILTER_LINEAR_BIT	VK_FORMAT_FEATURE_STORAGE_IMAGE_BIT	VK_FORMAT_FEATURE_STORAGE_IMAGE_ATOMIC_BIT	VK_FORMAT_FEATURE_COLOR_ATTACHMENT_BIT	VK_FORMAT_FEATURE_BLIT_DST_BIT	VK_FORMAT_FEATURE_COLOR_ATTACHMENT_BLEND_BIT	VK_FORMAT_FEATURE_DEPTH_STENCIL_ATTACHMENT_BIT	VK_FORMAT_FEATURE_VERTEX_BUFFER_BIT	VK_FORMAT_FEATURE_UNIFORM_TEXEL_BUFFER_BIT	VK_FORMAT_FEATURE_STORAGE_TEXEL_BUFFER_BIT	VK_FORMAT_FEATURE_STORAGE_TEXEL_BUFFER_ATOMIC_BIT	
VK_FORMAT_ASTC_4x4_UNORM_BLOCK	†	†	†											
VK_FORMAT_ASTC_4x4_SRGB_BLOCK	†	†	†											
VK_FORMAT_ASTC_5x4_UNORM_BLOCK	†	†	†											
VK_FORMAT_ASTC_5x4_SRGB_BLOCK	†	†	†											
VK_FORMAT_ASTC_5x5_UNORM_BLOCK	†	†	†											
VK_FORMAT_ASTC_5x5_SRGB_BLOCK	†	†	†											
VK_FORMAT_ASTC_6x5_UNORM_BLOCK	†	†	†											
VK_FORMAT_ASTC_6x5_SRGB_BLOCK	†	†	†											
VK_FORMAT_ASTC_6x6_UNORM_BLOCK	†	†	†											
VK_FORMAT_ASTC_6x6_SRGB_BLOCK	†	†	†											
VK_FORMAT_ASTC_8x5_UNORM_BLOCK	†	†	†											
VK_FORMAT_ASTC_8x5_SRGB_BLOCK	†	†	†											
VK_FORMAT_ASTC_8x6_UNORM_BLOCK	†	†	†											
VK_FORMAT_ASTC_8x6_SRGB_BLOCK	†	†	†											
VK_FORMAT_ASTC_8x8_UNORM_BLOCK	†	†	†											
VK_FORMAT_ASTC_8x8_SRGB_BLOCK	†	†	†											
VK_FORMAT_ASTC_10x5_UNORM_BLOCK	†	†	†											
VK_FORMAT_ASTC_10x5_SRGB_BLOCK	†	†	†											
VK_FORMAT_ASTC_10x6_UNORM_BLOCK	†	†	†											
VK_FORMAT_ASTC_10x6_SRGB_BLOCK	†	†	†											
VK_FORMAT_ASTC_10x8_UNORM_BLOCK	†	†	†											

VK_FORMAT_ASTC_10x8_SRGB_BLOCK	†	†	†										
VK_FORMAT_ASTC_10x10_UNORM_BLOCK	†	†	†										
VK_FORMAT_ASTC_10x10_SRGB_BLOCK	†	†	†										
VK_FORMAT_ASTC_12x10_UNORM_BLOCK	†	†	†										
VK_FORMAT_ASTC_12x10_SRGB_BLOCK	†	†	†										
VK_FORMAT_ASTC_12x12_UNORM_BLOCK	†	†	†										
VK_FORMAT_ASTC_12x12_SRGB_BLOCK	†	†	†										

The VK_FORMAT_FEATURE_SAMPLED_IMAGE_BIT, VK_FORMAT_FEATURE_BLIT_SRC_BIT and VK_FORMAT_FEATURE_SAMPLED_IMAGE_FILTER_LINEAR_BIT features **must** be supported in optimalTilingFeatures for all the formats in at least one of: this table, Mandatory Format Support: BC Compressed Formats With VkImageType VK_IMAGE_TYPE_2D and VK_IMAGE_TYPE_3D, or Mandatory Format Support: ETC2 and EAC Compressed Formats With VkImageType VK_IMAGE_TYPE_2D.

To be used with VkImageView with subresourceRange.aspectMask equal to VK_IMAGE_ASPECT_COLOR_BIT, sampler $Y'C_BC_R$ conversion **must** be enabled for the following formats:

Table 56. Formats Requiring Sampler $Y'C_BC_R$ Conversion for VK_IMAGE_ASPECT_COLOR_BIT Image Views

		VK_FORMAT_FEATURE_DISJOINT_BIT	VK_FORMAT_FEATURE_SAMPLED_IMAGE_BIT	VK_FORMAT_FEATURE_TRANSFER_SRC_BIT	VK_FORMAT_FEATURE_TRANSFER_DST_BIT	VK_FORMAT_FEATURE_COSITED_CHROMA_SAMPLES_BIT	VK_FORMAT_FEATURE_MIDPOINT_CHROMA_SAMPLES_BIT	VK_FORMAT_FEATURE_SAMPLED_IMAGE_YCBCR_CONVERSION_LINEAR_FILTER_BIT	VK_FORMAT_FEATURE_SAMPLED_IMAGE_YCBCR_CONVERSION_SEPARATE_RECONSTRUCTION_FILTER_BIT	VK_FORMAT_FEATURE_SAMPLED_IMAGE_YCBCR_CONVERSION_CHROMA_RECONSTRUCTION_EXPLICIT_BIT	VK_FORMAT_FEATURE_SAMPLED_IMAGE_YCBCR_CONVERSION_CHROMA_RECONSTRUCTION_EXPLICIT_FORCEABLE_BIT
Format	**Planes**										
VK_FORMAT_G8B8G8R8_422_UNORM	1										
VK_FORMAT_B8G8R8G8_422_UNORM	1										
VK_FORMAT_G8_B8_R8_3PLANE_420_UNORM	3		†	†	†	†					
VK_FORMAT_G8_B8R8_2PLANE_420_UNORM	2		†	†	†	†					
VK_FORMAT_G8_B8_R8_3PLANE_422_UNORM	3										
VK_FORMAT_G8_B8R8_2PLANE_422_UNORM	2										
VK_FORMAT_G8_B8_R8_3PLANE_444_UNORM	3										
VK_FORMAT_R10X6G10X6B10X6A10X6_UNORM_4PACK16	1										
VK_FORMAT_G10X6B10X6G10X6R10X6_422_UNORM_4PACK16	1										
VK_FORMAT_B10X6G10X6R10X6G10X6_422_UNORM_4PACK16	1										

VK_FORMAT_G10X6_B10X6_R10X6_3PLANE_420_UNORM_3PACK16	3										
VK_FORMAT_G10X6_B10X6R10X6_2PLANE_420_UNORM_3PACK16	2										
VK_FORMAT_G10X6_B10X6_R10X6_3PLANE_422_UNORM_3PACK16	3										
VK_FORMAT_G10X6_B10X6R10X6_2PLANE_422_UNORM_3PACK16	2										
VK_FORMAT_G10X6_B10X6_R10X6_3PLANE_444_UNORM_3PACK16	3										
VK_FORMAT_R12X4G12X4B12X4A12X4_UNORM_4PACK16	1										
VK_FORMAT_G12X4B12X4G12X4R12X4_422_UNORM_4PACK16	1										
VK_FORMAT_B12X4G12X4R12X4G12X4_422_UNORM_4PACK16	1										
VK_FORMAT_G12X4_B12X4_R12X4_3PLANE_420_UNORM_3PACK16	3										
VK_FORMAT_G12X4_B12X4R12X4_2PLANE_420_UNORM_3PACK16	2										
VK_FORMAT_G12X4_B12X4_R12X4_3PLANE_422_UNORM_3PACK16	3										
VK_FORMAT_G12X4_B12X4R12X4_2PLANE_422_UNORM_3PACK16	2										
VK_FORMAT_G12X4_B12X4_R12X4_3PLANE_444_UNORM_3PACK16	3										
VK_FORMAT_G16B16G16R16_422_UNORM	1										
VK_FORMAT_B16G16R16G16_422_UNORM	1										
VK_FORMAT_G16_B16_R16_3PLANE_420_UNORM	3										
VK_FORMAT_G16_B16R16_2PLANE_420_UNORM	2										
VK_FORMAT_G16_B16_R16_3PLANE_422_UNORM	3										
VK_FORMAT_G16_B16R16_2PLANE_422_UNORM	2										
VK_FORMAT_G16_B16_R16_3PLANE_444_UNORM	3										
VK_FORMAT_G8_B8R8_2PLANE_444_UNORM	2										
VK_FORMAT_G10X6_B10X6R10X6_2PLANE_444_UNORM_3PACK16	2										
VK_FORMAT_G12X4_B12X4R12X4_2PLANE_444_UNORM_3PACK16	2										
VK_FORMAT_G16_B16R16_2PLANE_444_UNORM	2										

Format features marked † **must** be supported for `optimalTilingFeatures` with VkImageType `VK_IMAGE_TYPE_2D` if the `VkPhysicalDevice` supports the VkPhysicalDeviceSamplerYcbcrConversionFeatures feature.

Implementations are not required to support the `VK_IMAGE_CREATE_SPARSE_BINDING_BIT`, `VK_IMAGE_CREATE_SPARSE_RESIDENCY_BIT`, or `VK_IMAGE_CREATE_SPARSE_ALIASED_BIT` VkImageCreateFlags for the above formats that require sampler $Y'C_BC_R$ conversion. To determine whether the implementation supports sparse image creation flags with these formats use vkGetPhysicalDeviceImageFormatProperties or vkGetPhysicalDeviceImageFormatProperties2.

34.3.1. Formats Without Shader Storage Format

The device-level features for using a storage image or a storage texel buffer with an image format of `Unknown`, `shaderStorageImageReadWithoutFormat` and `shaderStorageImageWriteWithoutFormat`, only

apply to the following formats:

- VK_FORMAT_R8G8B8A8_UNORM
- VK_FORMAT_R8G8B8A8_SNORM
- VK_FORMAT_R8G8B8A8_UINT
- VK_FORMAT_R8G8B8A8_SINT
- VK_FORMAT_R32_UINT
- VK_FORMAT_R32_SINT
- VK_FORMAT_R32_SFLOAT
- VK_FORMAT_R32G32_UINT
- VK_FORMAT_R32G32_SINT
- VK_FORMAT_R32G32_SFLOAT
- VK_FORMAT_R32G32B32A32_UINT
- VK_FORMAT_R32G32B32A32_SINT
- VK_FORMAT_R32G32B32A32_SFLOAT
- VK_FORMAT_R16G16B16A16_UINT
- VK_FORMAT_R16G16B16A16_SINT
- VK_FORMAT_R16G16B16A16_SFLOAT
- VK_FORMAT_R16G16_SFLOAT
- VK_FORMAT_B10G11R11_UFLOAT_PACK32
- VK_FORMAT_R16_SFLOAT
- VK_FORMAT_R16G16B16A16_UNORM
- VK_FORMAT_A2B10G10R10_UNORM_PACK32
- VK_FORMAT_R16G16_UNORM
- VK_FORMAT_R8G8_UNORM
- VK_FORMAT_R16_UNORM
- VK_FORMAT_R8_UNORM
- VK_FORMAT_R16G16B16A16_SNORM
- VK_FORMAT_R16G16_SNORM
- VK_FORMAT_R8G8_SNORM
- VK_FORMAT_R16_SNORM
- VK_FORMAT_R8_SNORM
- VK_FORMAT_R16G16_SINT
- VK_FORMAT_R8G8_SINT
- VK_FORMAT_R16_SINT

- VK_FORMAT_R8_SINT
- VK_FORMAT_A2B10G10R10_UINT_PACK32
- VK_FORMAT_R16G16_UINT
- VK_FORMAT_R8G8_UINT
- VK_FORMAT_R16_UINT
- VK_FORMAT_R8_UINT

NOTE This list of formats is the union of required storage formats from Required Format Support section and formats listed in shaderStorageImageExtendedFormats.

An implementation that supports VK_FORMAT_FEATURE_STORAGE_IMAGE_BIT for any format from the given list of formats and supports shaderStorageImageReadWithoutFormat **must** support VK_FORMAT_FEATURE_2_STORAGE_READ_WITHOUT_FORMAT_BIT for that same format if Vulkan 1.3 or the VK_KHR_format_feature_flags2 extension is supported.

An implementation that supports VK_FORMAT_FEATURE_STORAGE_IMAGE_BIT for any format from the given list of formats and supports shaderStorageImageWriteWithoutFormat **must** support VK_FORMAT_FEATURE_2_STORAGE_WRITE_WITHOUT_FORMAT_BIT for that same format if Vulkan 1.3 or the VK_KHR_format_feature_flags2 extension is supported.

An implementation that does not support either of VK_FORMAT_FEATURE_2_STORAGE_READ_WITHOUT_FORMAT_BIT or VK_FORMAT_FEATURE_2_STORAGE_WRITE_WITHOUT_FORMAT_BIT for a format **must** not report support for VK_FORMAT_FEATURE_STORAGE_IMAGE_BIT or VK_FORMAT_FEATURE_STORAGE_TEXEL_BUFFER_BIT for that format if it is not listed in the SPIR-V and Vulkan Image Format Compatibility table.

NOTE

Some older implementations do not follow this restriction. They report support for formats as storage images even though they do not support access without the Format qualifier and there is no matching Format token. Such images cannot be either read from or written to.

Drivers which pass Vulkan conformance test suite version 1.3.9.0, or any subsequent version will conform to the requirement above.

34.3.2. Depth Comparison Format Support

If Vulkan 1.3 or the VK_KHR_format_feature_flags2 extension is supported, a depth/stencil format with a depth component supporting VK_FORMAT_FEATURE_SAMPLED_IMAGE_BIT **must** support VK_FORMAT_FEATURE_2_SAMPLED_IMAGE_DEPTH_COMPARISON_BIT.

34.3.3. Format Feature Dependent Usage Flags

Certain resource usage flags depend on support for the corresponding format feature flag for the format in question. The following tables list the VkBufferUsageFlagBits and VkImageUsageFlagBits that have such dependencies, and the format feature flags they depend on. Additional restrictions, including, but not limited to, further required format feature flags specific to the particular use of

the resource **may** apply, as described in the respective sections of this specification.

Table 57. Format Feature Dependent Buffer Usage Flags

Buffer usage flag	Required format feature flag
VK_BUFFER_USAGE_UNIFORM_TEXEL_BUFFER_BIT	VK_FORMAT_FEATURE_UNIFORM_TEXEL_BUFFER_BIT
VK_BUFFER_USAGE_STORAGE_TEXEL_BUFFER_BIT	VK_FORMAT_FEATURE_STORAGE_TEXEL_BUFFER_BIT
VK_BUFFER_USAGE_VERTEX_BUFFER_BIT	VK_FORMAT_FEATURE_VERTEX_BUFFER_BIT

Table 58. Format Feature Dependent Image Usage Flags

Image usage flag	Required format feature flag
VK_IMAGE_USAGE_SAMPLED_BIT	VK_FORMAT_FEATURE_SAMPLED_IMAGE_BIT
VK_IMAGE_USAGE_STORAGE_BIT	VK_FORMAT_FEATURE_STORAGE_IMAGE_BIT
VK_IMAGE_USAGE_COLOR_ATTACHMENT_BIT	VK_FORMAT_FEATURE_COLOR_ATTACHMENT_BIT
VK_IMAGE_USAGE_DEPTH_STENCIL_ATTACHMENT_BIT	VK_FORMAT_FEATURE_DEPTH_STENCIL_ATTACHMENT_BIT
VK_IMAGE_USAGE_INPUT_ATTACHMENT_BIT	VK_FORMAT_FEATURE_COLOR_ATTACHMENT_BIT or VK_FORMAT_FEATURE_DEPTH_STENCIL_ATTACHMENT_BIT

Chapter 35. Additional Capabilities

This chapter describes additional capabilities beyond the minimum capabilities described in the Limits and Formats chapters, including:

- Additional Image Capabilities
- Additional Buffer Capabilities
- Optional Semaphore Capabilities
- Optional Fence Capabilities

35.1. Additional Image Capabilities

Additional image capabilities, such as larger dimensions or additional sample counts for certain image types, or additional capabilities for *linear* tiling format images, are described in this section.

To query additional capabilities specific to image types, call:

```
// Provided by VK_VERSION_1_0
VkResult vkGetPhysicalDeviceImageFormatProperties(
    VkPhysicalDevice                            physicalDevice,
    VkFormat                                    format,
    VkImageType                                 type,
    VkImageTiling                               tiling,
    VkImageUsageFlags                           usage,
    VkImageCreateFlags                          flags,
    VkImageFormatProperties*                    pImageFormatProperties);
```

- `physicalDevice` is the physical device from which to query the image capabilities.
- `format` is a VkFormat value specifying the image format, corresponding to VkImageCreateInfo ::`format`.
- `type` is a VkImageType value specifying the image type, corresponding to VkImageCreateInfo ::`imageType`.
- `tiling` is a VkImageTiling value specifying the image tiling, corresponding to VkImageCreateInfo::`tiling`.
- `usage` is a bitmask of VkImageUsageFlagBits specifying the intended usage of the image, corresponding to VkImageCreateInfo::`usage`.
- `flags` is a bitmask of VkImageCreateFlagBits specifying additional parameters of the image, corresponding to VkImageCreateInfo::`flags`.
- `pImageFormatProperties` is a pointer to a VkImageFormatProperties structure in which capabilities are returned.

The `format`, `type`, `tiling`, `usage`, and `flags` parameters correspond to parameters that would be consumed by vkCreateImage (as members of VkImageCreateInfo).

If format is not a supported image format, or if the combination of format, type, tiling, usage, and flags is not supported for images, then vkGetPhysicalDeviceImageFormatProperties returns VK_ERROR_FORMAT_NOT_SUPPORTED.

The limitations on an image format that are reported by vkGetPhysicalDeviceImageFormatProperties have the following property: if usage1 and usage2 of type VkImageUsageFlags are such that the bits set in usage1 are a subset of the bits set in usage2, and flags1 and flags2 of type VkImageCreateFlags are such that the bits set in flags1 are a subset of the bits set in flags2, then the limitations for usage1 and flags1 **must** be no more strict than the limitations for usage2 and flags2, for all values of format, type, and tiling.

Valid Usage (Implicit)

- VUID-vkGetPhysicalDeviceImageFormatProperties-physicalDevice-parameter
  physicalDevice **must** be a valid VkPhysicalDevice handle
- VUID-vkGetPhysicalDeviceImageFormatProperties-format-parameter
  format **must** be a valid VkFormat value
- VUID-vkGetPhysicalDeviceImageFormatProperties-type-parameter
  type **must** be a valid VkImageType value
- VUID-vkGetPhysicalDeviceImageFormatProperties-tiling-parameter
  tiling **must** be a valid VkImageTiling value
- VUID-vkGetPhysicalDeviceImageFormatProperties-usage-parameter
  usage **must** be a valid combination of VkImageUsageFlagBits values
- VUID-vkGetPhysicalDeviceImageFormatProperties-usage-requiredbitmask
  usage **must** not be 0
- VUID-vkGetPhysicalDeviceImageFormatProperties-flags-parameter
  flags **must** be a valid combination of VkImageCreateFlagBits values
- VUID-vkGetPhysicalDeviceImageFormatProperties-pImageFormatProperties-parameter
  pImageFormatProperties **must** be a valid pointer to a VkImageFormatProperties structure

Return Codes

Success

- VK_SUCCESS

Failure

- VK_ERROR_OUT_OF_HOST_MEMORY
- VK_ERROR_OUT_OF_DEVICE_MEMORY
- VK_ERROR_FORMAT_NOT_SUPPORTED

The VkImageFormatProperties structure is defined as:

```
// Provided by VK_VERSION_1_0
typedef struct VkImageFormatProperties {
    VkExtent3D            maxExtent;
    uint32_t              maxMipLevels;
    uint32_t              maxArrayLayers;
    VkSampleCountFlags    sampleCounts;
    VkDeviceSize          maxResourceSize;
} VkImageFormatProperties;
```

- `maxExtent` are the maximum image dimensions. See the Allowed Extent Values section below for how these values are constrained by `type`.
- `maxMipLevels` is the maximum number of mipmap levels. `maxMipLevels` **must** be equal to the number of levels in the complete mipmap chain based on the `maxExtent.width`, `maxExtent.height`, and `maxExtent.depth`, except when one of the following conditions is true, in which case it **may** instead be `1`:
  - `vkGetPhysicalDeviceImageFormatProperties`::`tiling` was `VK_IMAGE_TILING_LINEAR`
  - the VkPhysicalDeviceImageFormatInfo2::`pNext` chain included a VkPhysicalDeviceExternalImageFormatInfo structure with a handle type included in the `handleTypes` member for which mipmap image support is not required
  - image `format` is one of the formats that require a sampler $Y'C_BC_R$ conversion
- `maxArrayLayers` is the maximum number of array layers. `maxArrayLayers` **must** be no less than VkPhysicalDeviceLimits::`maxImageArrayLayers`, except when one of the following conditions is true, in which case it **may** instead be `1`:
  - `tiling` is `VK_IMAGE_TILING_LINEAR`
  - `tiling` is `VK_IMAGE_TILING_OPTIMAL` and `type` is `VK_IMAGE_TYPE_3D`
  - `format` is one of the formats that require a sampler $Y'C_BC_R$ conversion
- `sampleCounts` is a bitmask of VkSampleCountFlagBits specifying all the supported sample counts for this image as described below.
- `maxResourceSize` is an upper bound on the total image size in bytes, inclusive of all image subresources. Implementations **may** have an address space limit on total size of a resource, which is advertised by this property. `maxResourceSize` **must** be at least 2^{31}.

NOTE

There is no mechanism to query the size of an image before creating it, to compare that size against `maxResourceSize`. If an application attempts to create an image that exceeds this limit, the creation will fail and vkCreateImage will return `VK_ERROR_OUT_OF_DEVICE_MEMORY`. While the advertised limit **must** be at least 2^{31}, it **may** not be possible to create an image that approaches that size, particularly for `VK_IMAGE_TYPE_1D`.

If the combination of parameters to `vkGetPhysicalDeviceImageFormatProperties` is not supported by the implementation for use in vkCreateImage, then all members of `VkImageFormatProperties` will be filled with zero.

NOTE	Filling VkImageFormatProperties with zero for unsupported formats is an exception to the usual rule that output structures have undefined contents on error. This exception was unintentional, but is preserved for backwards compatibility.

To query additional capabilities specific to image types, call:

```
// Provided by VK_VERSION_1_1
VkResult vkGetPhysicalDeviceImageFormatProperties2(
    VkPhysicalDevice                            physicalDevice,
    const VkPhysicalDeviceImageFormatInfo2*     pImageFormatInfo,
    VkImageFormatProperties2*                   pImageFormatProperties);
```

- physicalDevice is the physical device from which to query the image capabilities.
- pImageFormatInfo is a pointer to a VkPhysicalDeviceImageFormatInfo2 structure describing the parameters that would be consumed by vkCreateImage.
- pImageFormatProperties is a pointer to a VkImageFormatProperties2 structure in which capabilities are returned.

vkGetPhysicalDeviceImageFormatProperties2 behaves similarly to vkGetPhysicalDeviceImageFormatProperties, with the ability to return extended information in a pNext chain of output structures.

Valid Usage (Implicit)

- VUID-vkGetPhysicalDeviceImageFormatProperties2-physicalDevice-parameter physicalDevice **must** be a valid VkPhysicalDevice handle
- VUID-vkGetPhysicalDeviceImageFormatProperties2-pImageFormatInfo-parameter pImageFormatInfo **must** be a valid pointer to a valid VkPhysicalDeviceImageFormatInfo2 structure
- VUID-vkGetPhysicalDeviceImageFormatProperties2-pImageFormatProperties-parameter pImageFormatProperties **must** be a valid pointer to a VkImageFormatProperties2 structure

Return Codes

Success

- VK_SUCCESS

Failure

- VK_ERROR_OUT_OF_HOST_MEMORY
- VK_ERROR_OUT_OF_DEVICE_MEMORY
- VK_ERROR_FORMAT_NOT_SUPPORTED

The VkPhysicalDeviceImageFormatInfo2 structure is defined as:

```
// Provided by VK_VERSION_1_1
typedef struct VkPhysicalDeviceImageFormatInfo2 {
    VkStructureType       sType;
    const void*           pNext;
    VkFormat              format;
    VkImageType           type;
    VkImageTiling         tiling;
    VkImageUsageFlags     usage;
    VkImageCreateFlags    flags;
} VkPhysicalDeviceImageFormatInfo2;
```

- `sType` is a VkStructureType value identifying this structure.
- `pNext` is `NULL` or a pointer to a structure extending this structure. The `pNext` chain of `VkPhysicalDeviceImageFormatInfo2` is used to provide additional image parameters to `vkGetPhysicalDeviceImageFormatProperties2`.
- `format` is a VkFormat value indicating the image format, corresponding to VkImageCreateInfo ::`format`.
- `type` is a VkImageType value indicating the image type, corresponding to VkImageCreateInfo ::`imageType`.
- `tiling` is a VkImageTiling value indicating the image tiling, corresponding to VkImageCreateInfo::`tiling`.
- `usage` is a bitmask of VkImageUsageFlagBits indicating the intended usage of the image, corresponding to VkImageCreateInfo::`usage`.
- `flags` is a bitmask of VkImageCreateFlagBits indicating additional parameters of the image, corresponding to VkImageCreateInfo::`flags`.

The members of `VkPhysicalDeviceImageFormatInfo2` correspond to the arguments to vkGetPhysicalDeviceImageFormatProperties, with `sType` and `pNext` added for extensibility.

Valid Usage (Implicit)

- VUID-VkPhysicalDeviceImageFormatInfo2-sType-sType
  `sType` **must** be `VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_IMAGE_FORMAT_INFO_2`
- VUID-VkPhysicalDeviceImageFormatInfo2-pNext-pNext
  Each `pNext` member of any structure (including this one) in the `pNext` chain **must** be either `NULL` or a pointer to a valid instance of VkImageFormatListCreateInfo, VkImageStencilUsageCreateInfo, or VkPhysicalDeviceExternalImageFormatInfo
- VUID-VkPhysicalDeviceImageFormatInfo2-sType-unique
  The `sType` value of each struct in the `pNext` chain **must** be unique
- VUID-VkPhysicalDeviceImageFormatInfo2-format-parameter
  `format` **must** be a valid VkFormat value
- VUID-VkPhysicalDeviceImageFormatInfo2-type-parameter
  `type` **must** be a valid VkImageType value

- VUID-VkPhysicalDeviceImageFormatInfo2-tiling-parameter
  `tiling` **must** be a valid VkImageTiling value
- VUID-VkPhysicalDeviceImageFormatInfo2-usage-parameter
  `usage` **must** be a valid combination of VkImageUsageFlagBits values
- VUID-VkPhysicalDeviceImageFormatInfo2-usage-requiredbitmask
  `usage` **must** not be `0`
- VUID-VkPhysicalDeviceImageFormatInfo2-flags-parameter
  `flags` **must** be a valid combination of VkImageCreateFlagBits values

The `VkImageFormatProperties2` structure is defined as:

```
// Provided by VK_VERSION_1_1
typedef struct VkImageFormatProperties2 {
    VkStructureType             sType;
    void*                       pNext;
    VkImageFormatProperties     imageFormatProperties;
} VkImageFormatProperties2;
```

- `sType` is a VkStructureType value identifying this structure.
- `pNext` is `NULL` or a pointer to a structure extending this structure. The `pNext` chain of `VkImageFormatProperties2` is used to allow the specification of additional capabilities to be returned from `vkGetPhysicalDeviceImageFormatProperties2`.
- `imageFormatProperties` is a VkImageFormatProperties structure in which capabilities are returned.

If the combination of parameters to `vkGetPhysicalDeviceImageFormatProperties2` is not supported by the implementation for use in vkCreateImage, then all members of `imageFormatProperties` will be filled with zero.

NOTE

Filling `imageFormatProperties` with zero for unsupported formats is an exception to the usual rule that output structures have undefined contents on error. This exception was unintentional, but is preserved for backwards compatibility. This exception only applies to `imageFormatProperties`, not `sType`, `pNext`, or any structures chained from `pNext`.

Valid Usage (Implicit)

- VUID-VkImageFormatProperties2-sType-sType
  `sType` **must** be `VK_STRUCTURE_TYPE_IMAGE_FORMAT_PROPERTIES_2`
- VUID-VkImageFormatProperties2-pNext-pNext
  Each `pNext` member of any structure (including this one) in the `pNext` chain **must** be either `NULL` or a pointer to a valid instance of VkExternalImageFormatProperties or VkSamplerYcbcrConversionImageFormatProperties
- VUID-VkImageFormatProperties2-sType-unique

The sType value of each struct in the pNext chain **must** be unique

To determine the image capabilities compatible with an external memory handle type, add a VkPhysicalDeviceExternalImageFormatInfo structure to the pNext chain of the VkPhysicalDeviceImageFormatInfo2 structure and a VkExternalImageFormatProperties structure to the pNext chain of the VkImageFormatProperties2 structure.

The VkPhysicalDeviceExternalImageFormatInfo structure is defined as:

```
// Provided by VK_VERSION_1_1
typedef struct VkPhysicalDeviceExternalImageFormatInfo {
    VkStructureType                       sType;
    const void*                           pNext;
    VkExternalMemoryHandleTypeFlagBits    handleType;
} VkPhysicalDeviceExternalImageFormatInfo;
```

- sType is a VkStructureType value identifying this structure.
- pNext is NULL or a pointer to a structure extending this structure.
- handleType is a VkExternalMemoryHandleTypeFlagBits value specifying the memory handle type that will be used with the memory associated with the image.

If handleType is 0, vkGetPhysicalDeviceImageFormatProperties2 will behave as if VkPhysicalDeviceExternalImageFormatInfo was not present, and VkExternalImageFormatProperties will be ignored.

If handleType is not compatible with the format, type, tiling, usage, and flags specified in VkPhysicalDeviceImageFormatInfo2, then vkGetPhysicalDeviceImageFormatProperties2 returns VK_ERROR_FORMAT_NOT_SUPPORTED.

Valid Usage (Implicit)

- VUID-VkPhysicalDeviceExternalImageFormatInfo-sType-sType
  sType **must** be VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_EXTERNAL_IMAGE_FORMAT_INFO
- VUID-VkPhysicalDeviceExternalImageFormatInfo-handleType-parameter
  If handleType is not 0, handleType **must** be a valid VkExternalMemoryHandleTypeFlagBits value

Possible values of VkPhysicalDeviceExternalImageFormatInfo::handleType, specifying an external memory handle type, are:

```
// Provided by VK_VERSION_1_1
typedef enum VkExternalMemoryHandleTypeFlagBits {
    VK_EXTERNAL_MEMORY_HANDLE_TYPE_OPAQUE_FD_BIT = 0x00000001,
    VK_EXTERNAL_MEMORY_HANDLE_TYPE_OPAQUE_WIN32_BIT = 0x00000002,
    VK_EXTERNAL_MEMORY_HANDLE_TYPE_OPAQUE_WIN32_KMT_BIT = 0x00000004,
    VK_EXTERNAL_MEMORY_HANDLE_TYPE_D3D11_TEXTURE_BIT = 0x00000008,
    VK_EXTERNAL_MEMORY_HANDLE_TYPE_D3D11_TEXTURE_KMT_BIT = 0x00000010,
    VK_EXTERNAL_MEMORY_HANDLE_TYPE_D3D12_HEAP_BIT = 0x00000020,
    VK_EXTERNAL_MEMORY_HANDLE_TYPE_D3D12_RESOURCE_BIT = 0x00000040,
} VkExternalMemoryHandleTypeFlagBits;
```

- VK_EXTERNAL_MEMORY_HANDLE_TYPE_OPAQUE_FD_BIT specifies a POSIX file descriptor handle that has only limited valid usage outside of Vulkan and other compatible APIs. It **must** be compatible with the POSIX system calls dup, dup2, close, and the non-standard system call dup3. Additionally, it **must** be transportable over a socket using an SCM_RIGHTS control message. It owns a reference to the underlying memory resource represented by its Vulkan memory object.
- VK_EXTERNAL_MEMORY_HANDLE_TYPE_OPAQUE_WIN32_BIT specifies an NT handle that has only limited valid usage outside of Vulkan and other compatible APIs. It **must** be compatible with the functions DuplicateHandle, CloseHandle, CompareObjectHandles, GetHandleInformation, and SetHandleInformation. It owns a reference to the underlying memory resource represented by its Vulkan memory object.
- VK_EXTERNAL_MEMORY_HANDLE_TYPE_OPAQUE_WIN32_KMT_BIT specifies a global share handle that has only limited valid usage outside of Vulkan and other compatible APIs. It is not compatible with any native APIs. It does not own a reference to the underlying memory resource represented by its Vulkan memory object, and will therefore become invalid when all Vulkan memory objects associated with it are destroyed.
- VK_EXTERNAL_MEMORY_HANDLE_TYPE_D3D11_TEXTURE_BIT specifies an NT handle returned by IDXGIResource1::CreateSharedHandle referring to a Direct3D 10 or 11 texture resource. It owns a reference to the memory used by the Direct3D resource.
- VK_EXTERNAL_MEMORY_HANDLE_TYPE_D3D11_TEXTURE_KMT_BIT specifies a global share handle returned by IDXGIResource::GetSharedHandle referring to a Direct3D 10 or 11 texture resource. It does not own a reference to the underlying Direct3D resource, and will therefore become invalid when all Vulkan memory objects and Direct3D resources associated with it are destroyed.
- VK_EXTERNAL_MEMORY_HANDLE_TYPE_D3D12_HEAP_BIT specifies an NT handle returned by ID3D12Device::CreateSharedHandle referring to a Direct3D 12 heap resource. It owns a reference to the resources used by the Direct3D heap.
- VK_EXTERNAL_MEMORY_HANDLE_TYPE_D3D12_RESOURCE_BIT specifies an NT handle returned by ID3D12Device::CreateSharedHandle referring to a Direct3D 12 committed resource. It owns a reference to the memory used by the Direct3D resource.

Some external memory handle types can only be shared within the same underlying physical device and/or the same driver version, as defined in the following table:

Table 59. External Memory Handle Types Compatibility

Handle type	VkPhysicalDeviceIDProperties::driverUUID	VkPhysicalDeviceIDProperties::deviceUUID
VK_EXTERNAL_MEMORY_HANDLE_TYPE_OPAQUE_FD_BIT	Must match	Must match
VK_EXTERNAL_MEMORY_HANDLE_TYPE_OPAQUE_WIN32_BIT	Must match	Must match
VK_EXTERNAL_MEMORY_HANDLE_TYPE_OPAQUE_WIN32_KMT_BIT	Must match	Must match
VK_EXTERNAL_MEMORY_HANDLE_TYPE_D3D11_TEXTURE_BIT	Must match	Must match
VK_EXTERNAL_MEMORY_HANDLE_TYPE_D3D11_TEXTURE_KMT_BIT	Must match	Must match
VK_EXTERNAL_MEMORY_HANDLE_TYPE_D3D12_HEAP_BIT	Must match	Must match
VK_EXTERNAL_MEMORY_HANDLE_TYPE_D3D12_RESOURCE_BIT	Must match	Must match

```
// Provided by VK_VERSION_1_1
typedef VkFlags VkExternalMemoryHandleTypeFlags;
```

VkExternalMemoryHandleTypeFlags is a bitmask type for setting a mask of zero or more VkExternalMemoryHandleTypeFlagBits.

The VkExternalImageFormatProperties structure is defined as:

```
// Provided by VK_VERSION_1_1
typedef struct VkExternalImageFormatProperties {
    VkStructureType               sType;
    void*                         pNext;
    VkExternalMemoryProperties    externalMemoryProperties;
} VkExternalImageFormatProperties;
```

- sType is a VkStructureType value identifying this structure.
- pNext is NULL or a pointer to a structure extending this structure.
- externalMemoryProperties is a VkExternalMemoryProperties structure specifying various capabilities of the external handle type when used with the specified image creation parameters.

Valid Usage (Implicit)

- VUID-VkExternalImageFormatProperties-sType-sType

sType **must** be VK_STRUCTURE_TYPE_EXTERNAL_IMAGE_FORMAT_PROPERTIES

The VkExternalMemoryProperties structure is defined as:

```
// Provided by VK_VERSION_1_1
typedef struct VkExternalMemoryProperties {
    VkExternalMemoryFeatureFlags       externalMemoryFeatures;
    VkExternalMemoryHandleTypeFlags    exportFromImportedHandleTypes;
    VkExternalMemoryHandleTypeFlags    compatibleHandleTypes;
} VkExternalMemoryProperties;
```

- externalMemoryFeatures is a bitmask of VkExternalMemoryFeatureFlagBits specifying the features of handleType.
- exportFromImportedHandleTypes is a bitmask of VkExternalMemoryHandleTypeFlagBits specifying which types of imported handle handleType **can** be exported from.
- compatibleHandleTypes is a bitmask of VkExternalMemoryHandleTypeFlagBits specifying handle types which **can** be specified at the same time as handleType when creating an image compatible with external memory.

compatibleHandleTypes **must** include at least handleType. Inclusion of a handle type in compatibleHandleTypes does not imply the values returned in VkImageFormatProperties2 will be the same when VkPhysicalDeviceExternalImageFormatInfo::handleType is set to that type. The application is responsible for querying the capabilities of all handle types intended for concurrent use in a single image and intersecting them to obtain the compatible set of capabilities.

Bits which **may** be set in VkExternalMemoryProperties::externalMemoryFeatures, specifying features of an external memory handle type, are:

```
// Provided by VK_VERSION_1_1
typedef enum VkExternalMemoryFeatureFlagBits {
    VK_EXTERNAL_MEMORY_FEATURE_DEDICATED_ONLY_BIT = 0x00000001,
    VK_EXTERNAL_MEMORY_FEATURE_EXPORTABLE_BIT = 0x00000002,
    VK_EXTERNAL_MEMORY_FEATURE_IMPORTABLE_BIT = 0x00000004,
} VkExternalMemoryFeatureFlagBits;
```

- VK_EXTERNAL_MEMORY_FEATURE_DEDICATED_ONLY_BIT specifies that images or buffers created with the specified parameters and handle type **must** use the mechanisms defined by VkMemoryDedicatedRequirements and VkMemoryDedicatedAllocateInfo to create (or import) a dedicated allocation for the image or buffer.
- VK_EXTERNAL_MEMORY_FEATURE_EXPORTABLE_BIT specifies that handles of this type **can** be exported from Vulkan memory objects.
- VK_EXTERNAL_MEMORY_FEATURE_IMPORTABLE_BIT specifies that handles of this type **can** be imported as Vulkan memory objects.

Because their semantics in external APIs roughly align with that of an image or buffer with a

dedicated allocation in Vulkan, implementations are **required** to report VK_EXTERNAL_MEMORY_FEATURE_DEDICATED_ONLY_BIT for the following external handle types:

- VK_EXTERNAL_MEMORY_HANDLE_TYPE_D3D11_TEXTURE_BIT
- VK_EXTERNAL_MEMORY_HANDLE_TYPE_D3D11_TEXTURE_KMT_BIT
- VK_EXTERNAL_MEMORY_HANDLE_TYPE_D3D12_RESOURCE_BIT

```
// Provided by VK_VERSION_1_1
typedef VkFlags VkExternalMemoryFeatureFlags;
```

VkExternalMemoryFeatureFlags is a bitmask type for setting a mask of zero or more VkExternalMemoryFeatureFlagBits.

To determine the number of combined image samplers required to support a multi-planar format, add VkSamplerYcbcrConversionImageFormatProperties to the pNext chain of the VkImageFormatProperties2 structure in a call to vkGetPhysicalDeviceImageFormatProperties2.

The VkSamplerYcbcrConversionImageFormatProperties structure is defined as:

```
// Provided by VK_VERSION_1_1
typedef struct VkSamplerYcbcrConversionImageFormatProperties {
    VkStructureType    sType;
    void*              pNext;
    uint32_t           combinedImageSamplerDescriptorCount;
} VkSamplerYcbcrConversionImageFormatProperties;
```

- sType is a VkStructureType value identifying this structure.
- pNext is NULL or a pointer to a structure extending this structure.
- combinedImageSamplerDescriptorCount is the number of combined image sampler descriptors that the implementation uses to access the format.

Valid Usage (Implicit)

- VUID-VkSamplerYcbcrConversionImageFormatProperties-sType-sType
  sType **must** be VK_STRUCTURE_TYPE_SAMPLER_YCBCR_CONVERSION_IMAGE_FORMAT_PROPERTIES

combinedImageSamplerDescriptorCount is a number between 1 and the number of planes in the format. A descriptor set layout binding with immutable $Y'C_BC_R$ conversion samplers will have a maximum combinedImageSamplerDescriptorCount which is the maximum across all formats supported by its samplers of the combinedImageSamplerDescriptorCount for each format. Descriptor sets with that layout will internally use that maximum combinedImageSamplerDescriptorCount descriptors for each descriptor in the binding. This expanded number of descriptors will be consumed from the descriptor pool when a descriptor set is allocated, and counts towards the maxDescriptorSetSamplers, maxDescriptorSetSampledImages, maxPerStageDescriptorSamplers, and maxPerStageDescriptorSampledImages limits.

NOTE

All descriptors in a binding use the same maximum `combinedImageSamplerDescriptorCount` descriptors to allow implementations to use a uniform stride for dynamic indexing of the descriptors in the binding.

For example, consider a descriptor set layout binding with two descriptors and immutable samplers for multi-planar formats that have `VkSamplerYcbcrConversionImageFormatProperties::combinedImageSamplerDescriptorCount` values of `2` and `3` respectively. There are two descriptors in the binding and the maximum `combinedImageSamplerDescriptorCount` is `3`, so descriptor sets with this layout consume `6` descriptors from the descriptor pool. To create a descriptor pool that allows allocating four descriptor sets with this layout, `descriptorCount` must be at least `24`.

35.1.1. Supported Sample Counts

`vkGetPhysicalDeviceImageFormatProperties` returns a bitmask of VkSampleCountFlagBits in `sampleCounts` specifying the supported sample counts for the image parameters.

`sampleCounts` will be `VK_SAMPLE_COUNT_1_BIT` if at least one of the following conditions is true:

- `tiling` is `VK_IMAGE_TILING_LINEAR`
- `type` is not `VK_IMAGE_TYPE_2D`
- `flags` contains `VK_IMAGE_CREATE_CUBE_COMPATIBLE_BIT`
- Neither the `VK_FORMAT_FEATURE_COLOR_ATTACHMENT_BIT` flag nor the `VK_FORMAT_FEATURE_DEPTH_STENCIL_ATTACHMENT_BIT` flag in `VkFormatProperties::optimalTilingFeatures` returned by vkGetPhysicalDeviceFormatProperties is set
- VkPhysicalDeviceExternalImageFormatInfo::`handleType` is an external handle type for which multisampled image support is not required.
- `format` is one of the formats that require a sampler $Y'C_BC_R$ conversion

Otherwise, the bits set in `sampleCounts` will be the sample counts supported for the specified values of `usage` and `format`. For each bit set in `usage`, the supported sample counts relate to the limits in `VkPhysicalDeviceLimits` as follows:

- If `usage` includes `VK_IMAGE_USAGE_COLOR_ATTACHMENT_BIT` and `format` is a floating- or fixed-point color format, a superset of `VkPhysicalDeviceLimits::framebufferColorSampleCounts`
- If `usage` includes `VK_IMAGE_USAGE_COLOR_ATTACHMENT_BIT` and `format` is an integer format, a superset of `VkPhysicalDeviceVulkan12Properties::framebufferIntegerColorSampleCounts`
- If `usage` includes `VK_IMAGE_USAGE_DEPTH_STENCIL_ATTACHMENT_BIT`, and `format` includes a depth component, a superset of `VkPhysicalDeviceLimits::framebufferDepthSampleCounts`
- If `usage` includes `VK_IMAGE_USAGE_DEPTH_STENCIL_ATTACHMENT_BIT`, and `format` includes a stencil component, a superset of `VkPhysicalDeviceLimits::framebufferStencilSampleCounts`
- If `usage` includes `VK_IMAGE_USAGE_SAMPLED_BIT`, and `format` includes a color component, a superset of `VkPhysicalDeviceLimits::sampledImageColorSampleCounts`
- If `usage` includes `VK_IMAGE_USAGE_SAMPLED_BIT`, and `format` includes a depth component, a superset

of VkPhysicalDeviceLimits::sampledImageDepthSampleCounts

- If usage includes VK_IMAGE_USAGE_SAMPLED_BIT, and format is an integer format, a superset of VkPhysicalDeviceLimits::sampledImageIntegerSampleCounts
- If usage includes VK_IMAGE_USAGE_STORAGE_BIT, a superset of VkPhysicalDeviceLimits ::storageImageSampleCounts

If multiple bits are set in usage, sampleCounts will be the intersection of the per-usage values described above.

If none of the bits described above are set in usage, then there is no corresponding limit in VkPhysicalDeviceLimits. In this case, sampleCounts **must** include at least VK_SAMPLE_COUNT_1_BIT.

35.1.2. Allowed Extent Values Based on Image Type

Implementations **may** support extent values larger than the required minimum/maximum values for certain types of images. VkImageFormatProperties::maxExtent for each type is subject to the constraints below.

NOTE	Implementations **must** support images with dimensions up to the required minimum/maximum values for all types of images. It follows that the query for additional capabilities **must** return extent values that are at least as large as the required values.

For VK_IMAGE_TYPE_1D:

- maxExtent.width ≥ VkPhysicalDeviceLimits::maxImageDimension1D
- maxExtent.height = 1
- maxExtent.depth = 1

For VK_IMAGE_TYPE_2D when flags does not contain VK_IMAGE_CREATE_CUBE_COMPATIBLE_BIT:

- maxExtent.width ≥ VkPhysicalDeviceLimits::maxImageDimension2D
- maxExtent.height ≥ VkPhysicalDeviceLimits::maxImageDimension2D
- maxExtent.depth = 1

For VK_IMAGE_TYPE_2D when flags contains VK_IMAGE_CREATE_CUBE_COMPATIBLE_BIT:

- maxExtent.width ≥ VkPhysicalDeviceLimits::maxImageDimensionCube
- maxExtent.height ≥ VkPhysicalDeviceLimits::maxImageDimensionCube
- maxExtent.depth = 1

For VK_IMAGE_TYPE_3D:

- maxExtent.width ≥ VkPhysicalDeviceLimits::maxImageDimension3D
- maxExtent.height ≥ VkPhysicalDeviceLimits::maxImageDimension3D
- maxExtent.depth ≥ VkPhysicalDeviceLimits::maxImageDimension3D

35.2. Additional Buffer Capabilities

To query the external handle types supported by buffers, call:

```
// Provided by VK_VERSION_1_1
void vkGetPhysicalDeviceExternalBufferProperties(
    VkPhysicalDevice                            physicalDevice,
    const VkPhysicalDeviceExternalBufferInfo*   pExternalBufferInfo,
    VkExternalBufferProperties*                 pExternalBufferProperties);
```

- `physicalDevice` is the physical device from which to query the buffer capabilities.
- `pExternalBufferInfo` is a pointer to a VkPhysicalDeviceExternalBufferInfo structure describing the parameters that would be consumed by vkCreateBuffer.
- `pExternalBufferProperties` is a pointer to a VkExternalBufferProperties structure in which capabilities are returned.

Valid Usage (Implicit)

- VUID-vkGetPhysicalDeviceExternalBufferProperties-physicalDevice-parameter
  `physicalDevice` **must** be a valid VkPhysicalDevice handle
- VUID-vkGetPhysicalDeviceExternalBufferProperties-pExternalBufferInfo-parameter
  `pExternalBufferInfo` **must** be a valid pointer to a valid VkPhysicalDeviceExternalBufferInfo structure
- VUID-vkGetPhysicalDeviceExternalBufferProperties-pExternalBufferProperties-parameter
  `pExternalBufferProperties` **must** be a valid pointer to a VkExternalBufferProperties structure

The `VkPhysicalDeviceExternalBufferInfo` structure is defined as:

```
// Provided by VK_VERSION_1_1
typedef struct VkPhysicalDeviceExternalBufferInfo {
    VkStructureType                       sType;
    const void*                           pNext;
    VkBufferCreateFlags                   flags;
    VkBufferUsageFlags                    usage;
    VkExternalMemoryHandleTypeFlagBits    handleType;
} VkPhysicalDeviceExternalBufferInfo;
```

- `sType` is a VkStructureType value identifying this structure.
- `pNext` is `NULL` or a pointer to a structure extending this structure.
- `flags` is a bitmask of VkBufferCreateFlagBits describing additional parameters of the buffer, corresponding to VkBufferCreateInfo::`flags`.

- `usage` is a bitmask of VkBufferUsageFlagBits describing the intended usage of the buffer, corresponding to VkBufferCreateInfo::`usage`.
- `handleType` is a VkExternalMemoryHandleTypeFlagBits value specifying the memory handle type that will be used with the memory associated with the buffer.

Only usage flags representable in VkBufferUsageFlagBits are returned in this structure's `usage`.

Valid Usage

- VUID-VkPhysicalDeviceExternalBufferInfo-None-09499
  `usage` **must** be a valid combination of VkBufferUsageFlagBits values
- VUID-VkPhysicalDeviceExternalBufferInfo-None-09500
  `usage` **must** not be 0

Valid Usage (Implicit)

- VUID-VkPhysicalDeviceExternalBufferInfo-sType-sType
  `sType` **must** be `VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_EXTERNAL_BUFFER_INFO`
- VUID-VkPhysicalDeviceExternalBufferInfo-pNext-pNext
  `pNext` **must** be `NULL`
- VUID-VkPhysicalDeviceExternalBufferInfo-flags-parameter
  `flags` **must** be a valid combination of VkBufferCreateFlagBits values
- VUID-VkPhysicalDeviceExternalBufferInfo-handleType-parameter
  `handleType` **must** be a valid VkExternalMemoryHandleTypeFlagBits value

The `VkExternalBufferProperties` structure is defined as:

```
// Provided by VK_VERSION_1_1
typedef struct VkExternalBufferProperties {
    VkStructureType              sType;
    void*                        pNext;
    VkExternalMemoryProperties   externalMemoryProperties;
} VkExternalBufferProperties;
```

- `sType` is a VkStructureType value identifying this structure.
- `pNext` is `NULL` or a pointer to a structure extending this structure.
- `externalMemoryProperties` is a VkExternalMemoryProperties structure specifying various capabilities of the external handle type when used with the specified buffer creation parameters.

Valid Usage (Implicit)

- VUID-VkExternalBufferProperties-sType-sType
  `sType` **must** be `VK_STRUCTURE_TYPE_EXTERNAL_BUFFER_PROPERTIES`
- VUID-VkExternalBufferProperties-pNext-pNext
  `pNext` **must** be `NULL`

35.3. Optional Semaphore Capabilities

Semaphores **may** support import and export of their payload to external handles. To query the external handle types supported by semaphores, call:

```
// Provided by VK_VERSION_1_1
void vkGetPhysicalDeviceExternalSemaphoreProperties(
    VkPhysicalDevice                            physicalDevice,
    const VkPhysicalDeviceExternalSemaphoreInfo* pExternalSemaphoreInfo,
    VkExternalSemaphoreProperties*              pExternalSemaphoreProperties);
```

- `physicalDevice` is the physical device from which to query the semaphore capabilities.
- `pExternalSemaphoreInfo` is a pointer to a VkPhysicalDeviceExternalSemaphoreInfo structure describing the parameters that would be consumed by vkCreateSemaphore.
- `pExternalSemaphoreProperties` is a pointer to a VkExternalSemaphoreProperties structure in which capabilities are returned.

Valid Usage (Implicit)

- VUID-vkGetPhysicalDeviceExternalSemaphoreProperties-physicalDevice-parameter
  `physicalDevice` **must** be a valid VkPhysicalDevice handle
- VUID-vkGetPhysicalDeviceExternalSemaphoreProperties-pExternalSemaphoreInfo-parameter
  `pExternalSemaphoreInfo` **must** be a valid pointer to a valid VkPhysicalDeviceExternalSemaphoreInfo structure
- VUID-vkGetPhysicalDeviceExternalSemaphoreProperties-pExternalSemaphoreProperties-parameter
  `pExternalSemaphoreProperties` **must** be a valid pointer to a VkExternalSemaphoreProperties structure

The `VkPhysicalDeviceExternalSemaphoreInfo` structure is defined as:

```
// Provided by VK_VERSION_1_1
typedef struct VkPhysicalDeviceExternalSemaphoreInfo {
    VkStructureType                          sType;
    const void*                              pNext;
    VkExternalSemaphoreHandleTypeFlagBits    handleType;
} VkPhysicalDeviceExternalSemaphoreInfo;
```

- `sType` is a VkStructureType value identifying this structure.
- `pNext` is `NULL` or a pointer to a structure extending this structure.
- `handleType` is a VkExternalSemaphoreHandleTypeFlagBits value specifying the external semaphore handle type for which capabilities will be returned.

Valid Usage (Implicit)

- VUID-VkPhysicalDeviceExternalSemaphoreInfo-sType-sType
  `sType` **must** be `VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_EXTERNAL_SEMAPHORE_INFO`
- VUID-VkPhysicalDeviceExternalSemaphoreInfo-pNext-pNext
  `pNext` **must** be `NULL` or a pointer to a valid instance of VkSemaphoreTypeCreateInfo
- VUID-VkPhysicalDeviceExternalSemaphoreInfo-sType-unique
  The `sType` value of each struct in the `pNext` chain **must** be unique
- VUID-VkPhysicalDeviceExternalSemaphoreInfo-handleType-parameter
  `handleType` **must** be a valid VkExternalSemaphoreHandleTypeFlagBits value

Bits which **may** be set in VkPhysicalDeviceExternalSemaphoreInfo::`handleType`, specifying an external semaphore handle type, are:

```
// Provided by VK_VERSION_1_1
typedef enum VkExternalSemaphoreHandleTypeFlagBits {
    VK_EXTERNAL_SEMAPHORE_HANDLE_TYPE_OPAQUE_FD_BIT = 0x00000001,
    VK_EXTERNAL_SEMAPHORE_HANDLE_TYPE_OPAQUE_WIN32_BIT = 0x00000002,
    VK_EXTERNAL_SEMAPHORE_HANDLE_TYPE_OPAQUE_WIN32_KMT_BIT = 0x00000004,
    VK_EXTERNAL_SEMAPHORE_HANDLE_TYPE_D3D12_FENCE_BIT = 0x00000008,
    VK_EXTERNAL_SEMAPHORE_HANDLE_TYPE_SYNC_FD_BIT = 0x00000010,
    VK_EXTERNAL_SEMAPHORE_HANDLE_TYPE_D3D11_FENCE_BIT =
VK_EXTERNAL_SEMAPHORE_HANDLE_TYPE_D3D12_FENCE_BIT,
} VkExternalSemaphoreHandleTypeFlagBits;
```

- `VK_EXTERNAL_SEMAPHORE_HANDLE_TYPE_OPAQUE_FD_BIT` specifies a POSIX file descriptor handle that has only limited valid usage outside of Vulkan and other compatible APIs. It **must** be compatible with the POSIX system calls `dup`, `dup2`, `close`, and the non-standard system call `dup3`. Additionally, it **must** be transportable over a socket using an `SCM_RIGHTS` control message. It owns a reference to the underlying synchronization primitive represented by its Vulkan semaphore object.
- `VK_EXTERNAL_SEMAPHORE_HANDLE_TYPE_OPAQUE_WIN32_BIT` specifies an NT handle that has only

limited valid usage outside of Vulkan and other compatible APIs. It **must** be compatible with the functions DuplicateHandle, CloseHandle, CompareObjectHandles, GetHandleInformation, and SetHandleInformation. It owns a reference to the underlying synchronization primitive represented by its Vulkan semaphore object.

- VK_EXTERNAL_SEMAPHORE_HANDLE_TYPE_OPAQUE_WIN32_KMT_BIT specifies a global share handle that has only limited valid usage outside of Vulkan and other compatible APIs. It is not compatible with any native APIs. It does not own a reference to the underlying synchronization primitive represented by its Vulkan semaphore object, and will therefore become invalid when all Vulkan semaphore objects associated with it are destroyed.
- VK_EXTERNAL_SEMAPHORE_HANDLE_TYPE_D3D12_FENCE_BIT specifies an NT handle returned by ID3D12Device::CreateSharedHandle referring to a Direct3D 12 fence, or ID3D11Device5::CreateFence referring to a Direct3D 11 fence. It owns a reference to the underlying synchronization primitive associated with the Direct3D fence.
- VK_EXTERNAL_SEMAPHORE_HANDLE_TYPE_D3D11_FENCE_BIT is an alias of VK_EXTERNAL_SEMAPHORE_HANDLE_TYPE_D3D12_FENCE_BIT with the same meaning. It is provided for convenience and code clarity when interacting with D3D11 fences.
- VK_EXTERNAL_SEMAPHORE_HANDLE_TYPE_SYNC_FD_BIT specifies a POSIX file descriptor handle to a Linux Sync File or Android Fence object. It can be used with any native API accepting a valid sync file or fence as input. It owns a reference to the underlying synchronization primitive associated with the file descriptor. Implementations which support importing this handle type **must** accept any type of sync or fence FD supported by the native system they are running on.

NOTE

Handles of type VK_EXTERNAL_SEMAPHORE_HANDLE_TYPE_SYNC_FD_BIT generated by the implementation may represent either Linux Sync Files or Android Fences at the implementation's discretion. Applications **should** only use operations defined for both types of file descriptors, unless they know via means external to Vulkan the type of the file descriptor, or are prepared to deal with the system-defined operation failures resulting from using the wrong type.

Some external semaphore handle types can only be shared within the same underlying physical device and/or the same driver version, as defined in the following table:

Table 60. External Semaphore Handle Types Compatibility

Handle type	VkPhysicalDeviceIDProperties::driverUUID	VkPhysicalDeviceIDProperties::deviceUUID
VK_EXTERNAL_SEMAPHORE_HANDLE_TYPE_OPAQUE_FD_BIT	Must match	Must match
VK_EXTERNAL_SEMAPHORE_HANDLE_TYPE_OPAQUE_WIN32_BIT	Must match	Must match
VK_EXTERNAL_SEMAPHORE_HANDLE_TYPE_OPAQUE_WIN32_KMT_BIT	Must match	Must match
VK_EXTERNAL_SEMAPHORE_HANDLE_TYPE_D3D12_FENCE_BIT	Must match	Must match
VK_EXTERNAL_SEMAPHORE_HANDLE_TYPE_SYNC_FD_BIT	No restriction	No restriction
VK_EXTERNAL_SEMAPHORE_HANDLE_TYPE_ZIRCON_EVENT_BIT_FUCHSIA	No restriction	No restriction

```
// Provided by VK_VERSION_1_1
typedef VkFlags VkExternalSemaphoreHandleTypeFlags;
```

VkExternalSemaphoreHandleTypeFlags is a bitmask type for setting a mask of zero or more VkExternalSemaphoreHandleTypeFlagBits.

The VkExternalSemaphoreProperties structure is defined as:

```
// Provided by VK_VERSION_1_1
typedef struct VkExternalSemaphoreProperties {
    VkStructureType                       sType;
    void*                                 pNext;
    VkExternalSemaphoreHandleTypeFlags    exportFromImportedHandleTypes;
    VkExternalSemaphoreHandleTypeFlags    compatibleHandleTypes;
    VkExternalSemaphoreFeatureFlags       externalSemaphoreFeatures;
} VkExternalSemaphoreProperties;
```

- sType is a VkStructureType value identifying this structure.
- pNext is NULL or a pointer to a structure extending this structure.
- exportFromImportedHandleTypes is a bitmask of VkExternalSemaphoreHandleTypeFlagBits specifying which types of imported handle handleType **can** be exported from.
- compatibleHandleTypes is a bitmask of VkExternalSemaphoreHandleTypeFlagBits specifying handle types which **can** be specified at the same time as handleType when creating a semaphore.
- externalSemaphoreFeatures is a bitmask of VkExternalSemaphoreFeatureFlagBits describing the features of handleType.

If handleType is not supported by the implementation, then VkExternalSemaphoreProperties ::externalSemaphoreFeatures will be zero.

Valid Usage (Implicit)

- VUID-VkExternalSemaphoreProperties-sType-sType
  sType **must** be VK_STRUCTURE_TYPE_EXTERNAL_SEMAPHORE_PROPERTIES
- VUID-VkExternalSemaphoreProperties-pNext-pNext
  pNext **must** be NULL

Bits which **may** be set in VkExternalSemaphoreProperties::externalSemaphoreFeatures, specifying the features of an external semaphore handle type, are:

```
// Provided by VK_VERSION_1_1
typedef enum VkExternalSemaphoreFeatureFlagBits {
    VK_EXTERNAL_SEMAPHORE_FEATURE_EXPORTABLE_BIT = 0x00000001,
    VK_EXTERNAL_SEMAPHORE_FEATURE_IMPORTABLE_BIT = 0x00000002,
} VkExternalSemaphoreFeatureFlagBits;
```

- VK_EXTERNAL_SEMAPHORE_FEATURE_EXPORTABLE_BIT specifies that handles of this type **can** be exported from Vulkan semaphore objects.
- VK_EXTERNAL_SEMAPHORE_FEATURE_IMPORTABLE_BIT specifies that handles of this type **can** be imported as Vulkan semaphore objects.

```
// Provided by VK_VERSION_1_1
typedef VkFlags VkExternalSemaphoreFeatureFlags;
```

VkExternalSemaphoreFeatureFlags is a bitmask type for setting a mask of zero or more VkExternalSemaphoreFeatureFlagBits.

35.4. Optional Fence Capabilities

Fences **may** support import and export of their payload to external handles. To query the external handle types supported by fences, call:

```
// Provided by VK_VERSION_1_1
void vkGetPhysicalDeviceExternalFenceProperties(
    VkPhysicalDevice                            physicalDevice,
    const VkPhysicalDeviceExternalFenceInfo*    pExternalFenceInfo,
    VkExternalFenceProperties*                  pExternalFenceProperties);
```

- physicalDevice is the physical device from which to query the fence capabilities.
- pExternalFenceInfo is a pointer to a VkPhysicalDeviceExternalFenceInfo structure describing the

parameters that would be consumed by vkCreateFence.

- pExternalFenceProperties is a pointer to a VkExternalFenceProperties structure in which capabilities are returned.

Valid Usage (Implicit)

- VUID-vkGetPhysicalDeviceExternalFenceProperties-physicalDevice-parameter
  physicalDevice **must** be a valid VkPhysicalDevice handle
- VUID-vkGetPhysicalDeviceExternalFenceProperties-pExternalFenceInfo-parameter
  pExternalFenceInfo **must** be a valid pointer to a valid VkPhysicalDeviceExternalFenceInfo structure
- VUID-vkGetPhysicalDeviceExternalFenceProperties-pExternalFenceProperties-parameter
  pExternalFenceProperties **must** be a valid pointer to a VkExternalFenceProperties structure

The VkPhysicalDeviceExternalFenceInfo structure is defined as:

```
// Provided by VK_VERSION_1_1
typedef struct VkPhysicalDeviceExternalFenceInfo {
    VkStructureType                       sType;
    const void*                           pNext;
    VkExternalFenceHandleTypeFlagBits     handleType;
} VkPhysicalDeviceExternalFenceInfo;
```

- sType is a VkStructureType value identifying this structure.
- pNext is NULL or a pointer to a structure extending this structure.
- handleType is a VkExternalFenceHandleTypeFlagBits value specifying an external fence handle type for which capabilities will be returned.

NOTE

Handles of type VK_EXTERNAL_FENCE_HANDLE_TYPE_SYNC_FD_BIT generated by the implementation may represent either Linux Sync Files or Android Fences at the implementation's discretion. Applications **should** only use operations defined for both types of file descriptors, unless they know via means external to Vulkan the type of the file descriptor, or are prepared to deal with the system-defined operation failures resulting from using the wrong type.

Valid Usage (Implicit)

- VUID-VkPhysicalDeviceExternalFenceInfo-sType-sType
  sType **must** be VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_EXTERNAL_FENCE_INFO
- VUID-VkPhysicalDeviceExternalFenceInfo-pNext-pNext
  pNext **must** be NULL
- VUID-VkPhysicalDeviceExternalFenceInfo-handleType-parameter

handleType **must** be a valid VkExternalFenceHandleTypeFlagBits value

Bits which **may** be set in

- VkPhysicalDeviceExternalFenceInfo::handleType
- VkExternalFenceProperties::exportFromImportedHandleTypes
- VkExternalFenceProperties::compatibleHandleTypes

indicate external fence handle types, and are:

```
// Provided by VK_VERSION_1_1
typedef enum VkExternalFenceHandleTypeFlagBits {
    VK_EXTERNAL_FENCE_HANDLE_TYPE_OPAQUE_FD_BIT = 0x00000001,
    VK_EXTERNAL_FENCE_HANDLE_TYPE_OPAQUE_WIN32_BIT = 0x00000002,
    VK_EXTERNAL_FENCE_HANDLE_TYPE_OPAQUE_WIN32_KMT_BIT = 0x00000004,
    VK_EXTERNAL_FENCE_HANDLE_TYPE_SYNC_FD_BIT = 0x00000008,
} VkExternalFenceHandleTypeFlagBits;
```

- VK_EXTERNAL_FENCE_HANDLE_TYPE_OPAQUE_FD_BIT specifies a POSIX file descriptor handle that has only limited valid usage outside of Vulkan and other compatible APIs. It **must** be compatible with the POSIX system calls dup, dup2, close, and the non-standard system call dup3. Additionally, it **must** be transportable over a socket using an SCM_RIGHTS control message. It owns a reference to the underlying synchronization primitive represented by its Vulkan fence object.
- VK_EXTERNAL_FENCE_HANDLE_TYPE_OPAQUE_WIN32_BIT specifies an NT handle that has only limited valid usage outside of Vulkan and other compatible APIs. It **must** be compatible with the functions DuplicateHandle, CloseHandle, CompareObjectHandles, GetHandleInformation, and SetHandleInformation. It owns a reference to the underlying synchronization primitive represented by its Vulkan fence object.
- VK_EXTERNAL_FENCE_HANDLE_TYPE_OPAQUE_WIN32_KMT_BIT specifies a global share handle that has only limited valid usage outside of Vulkan and other compatible APIs. It is not compatible with any native APIs. It does not own a reference to the underlying synchronization primitive represented by its Vulkan fence object, and will therefore become invalid when all Vulkan fence objects associated with it are destroyed.
- VK_EXTERNAL_FENCE_HANDLE_TYPE_SYNC_FD_BIT specifies a POSIX file descriptor handle to a Linux Sync File or Android Fence. It can be used with any native API accepting a valid sync file or fence as input. It owns a reference to the underlying synchronization primitive associated with the file descriptor. Implementations which support importing this handle type **must** accept any type of sync or fence FD supported by the native system they are running on.

Some external fence handle types can only be shared within the same underlying physical device and/or the same driver version, as defined in the following table:

Table 61. External Fence Handle Types Compatibility

Handle type	VkPhysicalDeviceIDProperties::driverUUID	VkPhysicalDeviceIDProperties::deviceUUID
VK_EXTERNAL_FENCE_HANDLE_TYPE_OPAQUE_FD_BIT	Must match	Must match
VK_EXTERNAL_FENCE_HANDLE_TYPE_OPAQUE_WIN32_BIT	Must match	Must match
VK_EXTERNAL_FENCE_HANDLE_TYPE_OPAQUE_WIN32_KMT_BIT	Must match	Must match
VK_EXTERNAL_FENCE_HANDLE_TYPE_SYNC_FD_BIT	No restriction	No restriction

```
// Provided by VK_VERSION_1_1
typedef VkFlags VkExternalFenceHandleTypeFlags;
```

VkExternalFenceHandleTypeFlags is a bitmask type for setting a mask of zero or more VkExternalFenceHandleTypeFlagBits.

The VkExternalFenceProperties structure is defined as:

```
// Provided by VK_VERSION_1_1
typedef struct VkExternalFenceProperties {
    VkStructureType                 sType;
    void*                           pNext;
    VkExternalFenceHandleTypeFlags  exportFromImportedHandleTypes;
    VkExternalFenceHandleTypeFlags  compatibleHandleTypes;
    VkExternalFenceFeatureFlags     externalFenceFeatures;
} VkExternalFenceProperties;
```

- exportFromImportedHandleTypes is a bitmask of VkExternalFenceHandleTypeFlagBits indicating which types of imported handle handleType **can** be exported from.
- compatibleHandleTypes is a bitmask of VkExternalFenceHandleTypeFlagBits specifying handle types which **can** be specified at the same time as handleType when creating a fence.
- externalFenceFeatures is a bitmask of VkExternalFenceFeatureFlagBits indicating the features of handleType.

If handleType is not supported by the implementation, then VkExternalFenceProperties::externalFenceFeatures will be zero.

Valid Usage (Implicit)

- VUID-VkExternalFenceProperties-sType-sType
  sType **must** be VK_STRUCTURE_TYPE_EXTERNAL_FENCE_PROPERTIES

- VUID-VkExternalFenceProperties-pNext-pNext
  `pNext` **must** be `NULL`

Bits which **may** be set in VkExternalFenceProperties::`externalFenceFeatures`, indicating features of a fence external handle type, are:

```
// Provided by VK_VERSION_1_1
typedef enum VkExternalFenceFeatureFlagBits {
    VK_EXTERNAL_FENCE_FEATURE_EXPORTABLE_BIT = 0x00000001,
    VK_EXTERNAL_FENCE_FEATURE_IMPORTABLE_BIT = 0x00000002,
} VkExternalFenceFeatureFlagBits;
```

- `VK_EXTERNAL_FENCE_FEATURE_EXPORTABLE_BIT` specifies handles of this type **can** be exported from Vulkan fence objects.
- `VK_EXTERNAL_FENCE_FEATURE_IMPORTABLE_BIT` specifies handles of this type **can** be imported to Vulkan fence objects.

```
// Provided by VK_VERSION_1_1
typedef VkFlags VkExternalFenceFeatureFlags;
```

`VkExternalFenceFeatureFlags` is a bitmask type for setting a mask of zero or more VkExternalFenceFeatureFlagBits.

Chapter 36. Debugging

To aid developers in tracking down errors in the application's use of Vulkan, particularly in combination with an external debugger or profiler, *debugging extensions* may be available.

The VkObjectType enumeration defines values, each of which corresponds to a specific Vulkan handle type. These values **can** be used to associate debug information with a particular type of object through one or more extensions.

```
// Provided by VK_VERSION_1_0
typedef enum VkObjectType {
    VK_OBJECT_TYPE_UNKNOWN = 0,
    VK_OBJECT_TYPE_INSTANCE = 1,
    VK_OBJECT_TYPE_PHYSICAL_DEVICE = 2,
    VK_OBJECT_TYPE_DEVICE = 3,
    VK_OBJECT_TYPE_QUEUE = 4,
    VK_OBJECT_TYPE_SEMAPHORE = 5,
    VK_OBJECT_TYPE_COMMAND_BUFFER = 6,
    VK_OBJECT_TYPE_FENCE = 7,
    VK_OBJECT_TYPE_DEVICE_MEMORY = 8,
    VK_OBJECT_TYPE_BUFFER = 9,
    VK_OBJECT_TYPE_IMAGE = 10,
    VK_OBJECT_TYPE_EVENT = 11,
    VK_OBJECT_TYPE_QUERY_POOL = 12,
    VK_OBJECT_TYPE_BUFFER_VIEW = 13,
    VK_OBJECT_TYPE_IMAGE_VIEW = 14,
    VK_OBJECT_TYPE_SHADER_MODULE = 15,
    VK_OBJECT_TYPE_PIPELINE_CACHE = 16,
    VK_OBJECT_TYPE_PIPELINE_LAYOUT = 17,
    VK_OBJECT_TYPE_RENDER_PASS = 18,
    VK_OBJECT_TYPE_PIPELINE = 19,
    VK_OBJECT_TYPE_DESCRIPTOR_SET_LAYOUT = 20,
    VK_OBJECT_TYPE_SAMPLER = 21,
    VK_OBJECT_TYPE_DESCRIPTOR_POOL = 22,
    VK_OBJECT_TYPE_DESCRIPTOR_SET = 23,
    VK_OBJECT_TYPE_FRAMEBUFFER = 24,
    VK_OBJECT_TYPE_COMMAND_POOL = 25,
  // Provided by VK_VERSION_1_1
    VK_OBJECT_TYPE_SAMPLER_YCBCR_CONVERSION = 1000156000,
  // Provided by VK_VERSION_1_1
    VK_OBJECT_TYPE_DESCRIPTOR_UPDATE_TEMPLATE = 1000085000,
  // Provided by VK_VERSION_1_3
    VK_OBJECT_TYPE_PRIVATE_DATA_SLOT = 1000295000,
} VkObjectType;
```

Table 62. VkObjectType and Vulkan Handle Relationship

VkObjectType	Vulkan Handle Type
VK_OBJECT_TYPE_UNKNOWN	Unknown/Undefined Handle

VkObjectType	Vulkan Handle Type
VK_OBJECT_TYPE_INSTANCE	VkInstance
VK_OBJECT_TYPE_PHYSICAL_DEVICE	VkPhysicalDevice
VK_OBJECT_TYPE_DEVICE	VkDevice
VK_OBJECT_TYPE_QUEUE	VkQueue
VK_OBJECT_TYPE_SEMAPHORE	VkSemaphore
VK_OBJECT_TYPE_COMMAND_BUFFER	VkCommandBuffer
VK_OBJECT_TYPE_FENCE	VkFence
VK_OBJECT_TYPE_DEVICE_MEMORY	VkDeviceMemory
VK_OBJECT_TYPE_BUFFER	VkBuffer
VK_OBJECT_TYPE_IMAGE	VkImage
VK_OBJECT_TYPE_EVENT	VkEvent
VK_OBJECT_TYPE_QUERY_POOL	VkQueryPool
VK_OBJECT_TYPE_BUFFER_VIEW	VkBufferView
VK_OBJECT_TYPE_IMAGE_VIEW	VkImageView
VK_OBJECT_TYPE_SHADER_MODULE	VkShaderModule
VK_OBJECT_TYPE_PIPELINE_CACHE	VkPipelineCache
VK_OBJECT_TYPE_PIPELINE_LAYOUT	VkPipelineLayout
VK_OBJECT_TYPE_RENDER_PASS	VkRenderPass
VK_OBJECT_TYPE_PIPELINE	VkPipeline
VK_OBJECT_TYPE_DESCRIPTOR_SET_LAYOUT	VkDescriptorSetLayout
VK_OBJECT_TYPE_SAMPLER	VkSampler
VK_OBJECT_TYPE_DESCRIPTOR_POOL	VkDescriptorPool
VK_OBJECT_TYPE_DESCRIPTOR_SET	VkDescriptorSet
VK_OBJECT_TYPE_FRAMEBUFFER	VkFramebuffer
VK_OBJECT_TYPE_COMMAND_POOL	VkCommandPool
VK_OBJECT_TYPE_SAMPLER_YCBCR_CONVERSION	VkSamplerYcbcrConversion
VK_OBJECT_TYPE_DESCRIPTOR_UPDATE_TEMPLATE	VkDescriptorUpdateTemplate
VK_OBJECT_TYPE_PRIVATE_DATA_SLOT	VkPrivateDataSlot

If this Specification was generated with any such extensions included, they will be described in the remainder of this chapter.

36.1. Active Tooling Information

Information about tools providing debugging, profiling, or similar services, active for a given

physical device, can be obtained by calling:

```
// Provided by VK_VERSION_1_3
VkResult vkGetPhysicalDeviceToolProperties(
    VkPhysicalDevice                            physicalDevice,
    uint32_t*                                   pToolCount,
    VkPhysicalDeviceToolProperties*             pToolProperties);
```

- `physicalDevice` is the handle to the physical device to query for active tools.
- `pToolCount` is a pointer to an integer describing the number of tools active on `physicalDevice`.
- `pToolProperties` is either `NULL` or a pointer to an array of VkPhysicalDeviceToolProperties structures.

If `pToolProperties` is `NULL`, then the number of tools currently active on `physicalDevice` is returned in `pToolCount`. Otherwise, `pToolCount` **must** point to a variable set by the application to the number of elements in the `pToolProperties` array, and on return the variable is overwritten with the number of structures actually written to `pToolProperties`. If `pToolCount` is less than the number of currently active tools, at most `pToolCount` structures will be written.

The count and properties of active tools **may** change in response to events outside the scope of the specification. An application **should** assume these properties might change at any given time.

Valid Usage (Implicit)

- VUID-vkGetPhysicalDeviceToolProperties-physicalDevice-parameter
  `physicalDevice` **must** be a valid VkPhysicalDevice handle
- VUID-vkGetPhysicalDeviceToolProperties-pToolCount-parameter
  `pToolCount` **must** be a valid pointer to a `uint32_t` value
- VUID-vkGetPhysicalDeviceToolProperties-pToolProperties-parameter
  If the value referenced by `pToolCount` is not `0`, and `pToolProperties` is not `NULL`, `pToolProperties` **must** be a valid pointer to an array of `pToolCount` VkPhysicalDeviceToolProperties structures

Return Codes

Success

- `VK_SUCCESS`
- `VK_INCOMPLETE`

Failure

- `VK_ERROR_OUT_OF_HOST_MEMORY`

The VkPhysicalDeviceToolProperties structure is defined as:

```
// Provided by VK_VERSION_1_3
typedef struct VkPhysicalDeviceToolProperties {
    VkStructureType       sType;
    void*                 pNext;
    char                  name[VK_MAX_EXTENSION_NAME_SIZE];
    char                  version[VK_MAX_EXTENSION_NAME_SIZE];
    VkToolPurposeFlags    purposes;
    char                  description[VK_MAX_DESCRIPTION_SIZE];
    char                  layer[VK_MAX_EXTENSION_NAME_SIZE];
} VkPhysicalDeviceToolProperties;
```

- `sType` is a VkStructureType value identifying this structure.
- `pNext` is `NULL` or a pointer to a structure extending this structure.
- `name` is a null-terminated UTF-8 string containing the name of the tool.
- `version` is a null-terminated UTF-8 string containing the version of the tool.
- `purposes` is a bitmask of VkToolPurposeFlagBits which is populated with purposes supported by the tool.
- `description` is a null-terminated UTF-8 string containing a description of the tool.
- `layer` is a null-terminated UTF-8 string containing the name of the layer implementing the tool, if the tool is implemented in a layer - otherwise it **may** be an empty string.

Valid Usage (Implicit)

- VUID-VkPhysicalDeviceToolProperties-sType-sType
  `sType` **must** be `VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_TOOL_PROPERTIES`
- VUID-VkPhysicalDeviceToolProperties-pNext-pNext
  `pNext` **must** be `NULL`

Bits which **can** be set in VkPhysicalDeviceToolProperties::`purposes`, specifying the purposes of an active tool, are:

```
// Provided by VK_VERSION_1_3
typedef enum VkToolPurposeFlagBits {
    VK_TOOL_PURPOSE_VALIDATION_BIT = 0x00000001,
    VK_TOOL_PURPOSE_PROFILING_BIT = 0x00000002,
    VK_TOOL_PURPOSE_TRACING_BIT = 0x00000004,
    VK_TOOL_PURPOSE_ADDITIONAL_FEATURES_BIT = 0x00000008,
    VK_TOOL_PURPOSE_MODIFYING_FEATURES_BIT = 0x00000010,
    VK_TOOL_PURPOSE_VALIDATION_BIT_EXT = VK_TOOL_PURPOSE_VALIDATION_BIT,
    VK_TOOL_PURPOSE_PROFILING_BIT_EXT = VK_TOOL_PURPOSE_PROFILING_BIT,
    VK_TOOL_PURPOSE_TRACING_BIT_EXT = VK_TOOL_PURPOSE_TRACING_BIT,
    VK_TOOL_PURPOSE_ADDITIONAL_FEATURES_BIT_EXT =
VK_TOOL_PURPOSE_ADDITIONAL_FEATURES_BIT,
    VK_TOOL_PURPOSE_MODIFYING_FEATURES_BIT_EXT =
VK_TOOL_PURPOSE_MODIFYING_FEATURES_BIT,
} VkToolPurposeFlagBits;
```

- VK_TOOL_PURPOSE_VALIDATION_BIT specifies that the tool provides validation of API usage.
- VK_TOOL_PURPOSE_PROFILING_BIT specifies that the tool provides profiling of API usage.
- VK_TOOL_PURPOSE_TRACING_BIT specifies that the tool is capturing data about the application's API usage, including anything from simple logging to capturing data for later replay.
- VK_TOOL_PURPOSE_ADDITIONAL_FEATURES_BIT specifies that the tool provides additional API features/extensions on top of the underlying implementation.
- VK_TOOL_PURPOSE_MODIFYING_FEATURES_BIT specifies that the tool modifies the API features/limits/extensions presented to the application.

```
// Provided by VK_VERSION_1_3
typedef VkFlags VkToolPurposeFlags;
```

VkToolPurposeFlags is a bitmask type for setting a mask of zero or more VkToolPurposeFlagBits.

Appendix A: Vulkan Environment for SPIR-V

Shaders for Vulkan are defined by the Khronos SPIR-V Specification as well as the Khronos SPIR-V Extended Instructions for GLSL Specification. This appendix defines additional SPIR-V requirements applying to Vulkan shaders.

Versions and Formats

A Vulkan 1.3 implementation **must** support the 1.0, 1.1, 1.2, 1.3, 1.4, 1.5, and 1.6 versions of SPIR-V and the 1.0 version of the SPIR-V Extended Instructions for GLSL.

A SPIR-V module passed into vkCreateShaderModule is interpreted as a series of 32-bit words in host endianness, with literal strings packed as described in section 2.2 of the SPIR-V Specification. The first few words of the SPIR-V module **must** be a magic number and a SPIR-V version number, as described in section 2.3 of the SPIR-V Specification.

Capabilities

The table below lists the set of SPIR-V capabilities that **may** be supported in Vulkan implementations. The application **must** not use any of these capabilities in SPIR-V passed to vkCreateShaderModule unless one of the following conditions is met for the VkDevice specified in the `device` parameter of vkCreateShaderModule:

- The corresponding field in the table is blank.
- Any corresponding Vulkan feature is enabled.
- Any corresponding Vulkan extension is enabled.
- Any corresponding Vulkan property is supported.
- The corresponding core version is supported (as returned by VkPhysicalDeviceProperties ::`apiVersion`).

Table 63. List of SPIR-V Capabilities and Corresponding Vulkan Features, Extensions, or Core Version

SPIR-V `OpCapability` **Vulkan feature, extension, or core version**
`Matrix` VK_VERSION_1_0
`Shader` VK_VERSION_1_0
`InputAttachment` VK_VERSION_1_0
`Sampled1D` VK_VERSION_1_0
`Image1D` VK_VERSION_1_0

SPIR-V `OpCapability` **Vulkan feature, extension, or core version**
`SampledBuffer` VK_VERSION_1_0
`ImageBuffer` VK_VERSION_1_0
`ImageQuery` VK_VERSION_1_0
`DerivativeControl` VK_VERSION_1_0
`Geometry` `VkPhysicalDeviceFeatures::geometryShader`
`Tessellation` `VkPhysicalDeviceFeatures::tessellationShader`
`Float64` `VkPhysicalDeviceFeatures::shaderFloat64`
`Int64` `VkPhysicalDeviceFeatures::shaderInt64`

`Int64Atomics`
`VkPhysicalDeviceVulkan12Features::shaderBufferInt64Atomics`
`VkPhysicalDeviceVulkan12Features::shaderSharedInt64Atomics`

`Int16` `VkPhysicalDeviceFeatures::shaderInt16`
`TessellationPointSize` `VkPhysicalDeviceFeatures::shaderTessellationAndGeometryPointSize`
`GeometryPointSize` `VkPhysicalDeviceFeatures::shaderTessellationAndGeometryPointSize`
`ImageGatherExtended` `VkPhysicalDeviceFeatures::shaderImageGatherExtended`
`StorageImageMultisample` `VkPhysicalDeviceFeatures::shaderStorageImageMultisample`
`UniformBufferArrayDynamicIndexing` `VkPhysicalDeviceFeatures::shaderUniformBufferArrayDynamicIndexing`
`SampledImageArrayDynamicIndexing` `VkPhysicalDeviceFeatures::shaderSampledImageArrayDynamicIndexing`
`StorageBufferArrayDynamicIndexing` `VkPhysicalDeviceFeatures::shaderStorageBufferArrayDynamicIndexing`
`StorageImageArrayDynamicIndexing` `VkPhysicalDeviceFeatures::shaderStorageImageArrayDynamicIndexing`

SPIR-V OpCapability **Vulkan feature, extension, or core version**
ClipDistance VkPhysicalDeviceFeatures::shaderClipDistance
CullDistance VkPhysicalDeviceFeatures::shaderCullDistance
ImageCubeArray VkPhysicalDeviceFeatures::imageCubeArray
SampleRateShading VkPhysicalDeviceFeatures::sampleRateShading
SparseResidency VkPhysicalDeviceFeatures::shaderResourceResidency
MinLod VkPhysicalDeviceFeatures::shaderResourceMinLod
SampledCubeArray VkPhysicalDeviceFeatures::imageCubeArray
ImageMSArray VkPhysicalDeviceFeatures::shaderStorageImageMultisample
StorageImageExtendedFormats VK_VERSION_1_0
InterpolationFunction VkPhysicalDeviceFeatures::sampleRateShading
StorageImageReadWithoutFormat VkPhysicalDeviceFeatures::shaderStorageImageReadWithoutFormat VK_VERSION_1_3
StorageImageWriteWithoutFormat VkPhysicalDeviceFeatures::shaderStorageImageWriteWithoutFormat VK_VERSION_1_3
MultiViewport VkPhysicalDeviceFeatures::multiViewport
DrawParameters VkPhysicalDeviceVulkan11Features::shaderDrawParameters VkPhysicalDeviceShaderDrawParametersFeatures::shaderDrawParameters
MultiView VkPhysicalDeviceVulkan11Features::multiview
DeviceGroup VK_VERSION_1_1
VariablePointersStorageBuffer VkPhysicalDeviceVulkan11Features::variablePointersStorageBuffer

SPIR-V `OpCapability` **Vulkan feature, extension, or core version**
`VariablePointers` `VkPhysicalDeviceVulkan11Features::variablePointers`
`ShaderViewportIndex` `VkPhysicalDeviceVulkan12Features::shaderOutputViewportIndex`
`ShaderLayer` `VkPhysicalDeviceVulkan12Features::shaderOutputLayer`
`StorageBuffer16BitAccess` `VkPhysicalDeviceVulkan11Features::storageBuffer16BitAccess`
`UniformAndStorageBuffer16BitAccess` `VkPhysicalDeviceVulkan11Features::uniformAndStorageBuffer16BitAccess`
`StoragePushConstant16` `VkPhysicalDeviceVulkan11Features::storagePushConstant16`
`StorageInputOutput16` `VkPhysicalDeviceVulkan11Features::storageInputOutput16`
`GroupNonUniform` `VK_SUBGROUP_FEATURE_BASIC_BIT`
`GroupNonUniformVote` `VK_SUBGROUP_FEATURE_VOTE_BIT`
`GroupNonUniformArithmetic` `VK_SUBGROUP_FEATURE_ARITHMETIC_BIT`
`GroupNonUniformBallot` `VK_SUBGROUP_FEATURE_BALLOT_BIT`
`GroupNonUniformShuffle` `VK_SUBGROUP_FEATURE_SHUFFLE_BIT`
`GroupNonUniformShuffleRelative` `VK_SUBGROUP_FEATURE_SHUFFLE_RELATIVE_BIT`
`GroupNonUniformClustered` `VK_SUBGROUP_FEATURE_CLUSTERED_BIT`
`GroupNonUniformQuad` `VK_SUBGROUP_FEATURE_QUAD_BIT`
`ShaderNonUniform` `VK_VERSION_1_2`
`RuntimeDescriptorArray` `VkPhysicalDeviceVulkan12Features::runtimeDescriptorArray`
`InputAttachmentArrayDynamicIndexing` `VkPhysicalDeviceVulkan12Features::shaderInputAttachmentArrayDynamicIndexing`
`UniformTexelBufferArrayDynamicIndexing` `VkPhysicalDeviceVulkan12Features::shaderUniformTexelBufferArrayDynamicIndexing`

SPIR-V `OpCapability` **Vulkan feature, extension, or core version**
`StorageTexelBufferArrayDynamicIndexing` `VkPhysicalDeviceVulkan12Features::shaderStorageTexelBufferArrayDynamicIndexing`
`UniformBufferArrayNonUniformIndexing` `VkPhysicalDeviceVulkan12Features::shaderUniformBufferArrayNonUniformIndexing`
`SampledImageArrayNonUniformIndexing` `VkPhysicalDeviceVulkan12Features::shaderSampledImageArrayNonUniformIndexing`
`StorageBufferArrayNonUniformIndexing` `VkPhysicalDeviceVulkan12Features::shaderStorageBufferArrayNonUniformIndexing`
`StorageImageArrayNonUniformIndexing` `VkPhysicalDeviceVulkan12Features::shaderStorageImageArrayNonUniformIndexing`
`InputAttachmentArrayNonUniformIndexing` `VkPhysicalDeviceVulkan12Features::shaderInputAttachmentArrayNonUniformIndexing`
`UniformTexelBufferArrayNonUniformIndexing` `VkPhysicalDeviceVulkan12Features::shaderUniformTexelBufferArrayNonUniformIndexing`
`StorageTexelBufferArrayNonUniformIndexing` `VkPhysicalDeviceVulkan12Features::shaderStorageTexelBufferArrayNonUniformIndexing`
`Float16` `VkPhysicalDeviceVulkan12Features::shaderFloat16`
`Int8` `VkPhysicalDeviceVulkan12Features::shaderInt8`
`StorageBuffer8BitAccess` `VkPhysicalDeviceVulkan12Features::storageBuffer8BitAccess`
`UniformAndStorageBuffer8BitAccess` `VkPhysicalDeviceVulkan12Features::uniformAndStorageBuffer8BitAccess`
`StoragePushConstant8` `VkPhysicalDeviceVulkan12Features::storagePushConstant8`
`VulkanMemoryModel` `VkPhysicalDeviceVulkan12Features::vulkanMemoryModel`
`VulkanMemoryModelDeviceScope` `VkPhysicalDeviceVulkan12Features::vulkanMemoryModelDeviceScope`

`DenormPreserve`
`VkPhysicalDeviceVulkan12Properties::shaderDenormPreserveFloat16`
`VkPhysicalDeviceVulkan12Properties::shaderDenormPreserveFloat32`
`VkPhysicalDeviceVulkan12Properties::shaderDenormPreserveFloat64`

`DenormFlushToZero`
`VkPhysicalDeviceVulkan12Properties::shaderDenormFlushToZeroFloat16`
`VkPhysicalDeviceVulkan12Properties::shaderDenormFlushToZeroFloat32`
`VkPhysicalDeviceVulkan12Properties::shaderDenormFlushToZeroFloat64`

SPIR-V `OpCapability` **Vulkan feature, extension, or core version**

`SignedZeroInfNanPreserve`
`VkPhysicalDeviceVulkan12Properties::shaderSignedZeroInfNanPreserveFloat16`
`VkPhysicalDeviceVulkan12Properties::shaderSignedZeroInfNanPreserveFloat32`
`VkPhysicalDeviceVulkan12Properties::shaderSignedZeroInfNanPreserveFloat64`

`RoundingModeRTE`
`VkPhysicalDeviceVulkan12Properties::shaderRoundingModeRTEFloat16`
`VkPhysicalDeviceVulkan12Properties::shaderRoundingModeRTEFloat32`
`VkPhysicalDeviceVulkan12Properties::shaderRoundingModeRTEFloat64`

`RoundingModeRTZ`
`VkPhysicalDeviceVulkan12Properties::shaderRoundingModeRTZFloat16`
`VkPhysicalDeviceVulkan12Properties::shaderRoundingModeRTZFloat32`
`VkPhysicalDeviceVulkan12Properties::shaderRoundingModeRTZFloat64`

`PhysicalStorageBufferAddresses` `VkPhysicalDeviceVulkan12Features::bufferDeviceAddress`
`DemoteToHelperInvocation` `VkPhysicalDeviceVulkan13Features::shaderDemoteToHelperInvocation`
`DotProductInputAll` `VkPhysicalDeviceVulkan13Features::shaderIntegerDotProduct`
`DotProductInput4x8Bit` `VkPhysicalDeviceVulkan13Features::shaderIntegerDotProduct`
`DotProductInput4x8BitPacked` `VkPhysicalDeviceVulkan13Features::shaderIntegerDotProduct`
`DotProduct` `VkPhysicalDeviceVulkan13Features::shaderIntegerDotProduct`

The application **must** not pass a SPIR-V module containing any of the following to vkCreateShaderModule:

- any `OpCapability` not listed above,
- an unsupported capability, or
- a capability which corresponds to a Vulkan feature or extension which has not been enabled.

SPIR-V Extensions

The following table lists SPIR-V extensions that implementations **may** support. The application **must** not pass a SPIR-V module to vkCreateShaderModule that uses the following SPIR-V extensions unless one of the following conditions is met for the VkDevice specified in the `device` parameter of vkCreateShaderModule:

- Any corresponding Vulkan extension is enabled.
- The corresponding core version is supported (as returned by VkPhysicalDeviceProperties

::apiVersion).

Table 64. List of SPIR-V Extensions and Corresponding Vulkan Extensions or Core Version

SPIR-V OpExtension	**Vulkan extension or core version**
SPV_KHR_variable_pointers	VK_VERSION_1_1
SPV_KHR_shader_draw_parameters	VK_VERSION_1_1
SPV_KHR_8bit_storage	VK_VERSION_1_2
SPV_KHR_16bit_storage	VK_VERSION_1_1
SPV_KHR_float_controls	VK_VERSION_1_2
SPV_KHR_storage_buffer_storage_class	VK_VERSION_1_1
SPV_EXT_shader_viewport_index_layer	VK_VERSION_1_2
SPV_EXT_descriptor_indexing	VK_VERSION_1_2
SPV_KHR_vulkan_memory_model	VK_VERSION_1_2
SPV_KHR_physical_storage_buffer	VK_VERSION_1_2
SPV_EXT_demote_to_helper_invocation	VK_VERSION_1_3
SPV_KHR_non_semantic_info	VK_VERSION_1_3
SPV_KHR_terminate_invocation	VK_VERSION_1_3
SPV_KHR_multiview	VK_VERSION_1_1
SPV_KHR_subgroup_uniform_control_flow	VK_VERSION_1_3
SPV_KHR_integer_dot_product	VK_VERSION_1_3
SPV_KHR_device_group	VK_VERSION_1_1

Validation Rules Within a Module

A SPIR-V module passed to vkCreateShaderModule **must** conform to the following rules:

Standalone SPIR-V Validation

The following rules **can** be validated with only the SPIR-V module itself. They do not depend on knowledge of the implementation and its capabilities or knowledge of runtime information, such as enabled features.

Valid Usage

- VUID-StandaloneSpirv-None-04633
  Every entry point **must** have no return value and accept no arguments
- VUID-StandaloneSpirv-None-04634
  The static function-call graph for an entry point **must** not contain cycles; that is, static recursion is not allowed
- VUID-StandaloneSpirv-None-04635
  The `Logical` or `PhysicalStorageBuffer64` addressing model **must** be selected
- VUID-StandaloneSpirv-None-04636
  `Scope` for execution **must** be limited to `Workgroup` or `Subgroup`
- VUID-StandaloneSpirv-None-04637
  If the `Scope` for execution is `Workgroup`, then it **must** only be used in the task, mesh, tessellation control, or compute `Execution Model`
- VUID-StandaloneSpirv-None-04638
  `Scope` for memory **must** be limited to `Device`, `QueueFamily`, `Workgroup`, `ShaderCallKHR`, `Subgroup`, or `Invocation`
- VUID-StandaloneSpirv-ExecutionModel-07320
  If the `Execution Model` is `TessellationControl`, and the `MemoryModel` is `GLSL450`, the `Scope` for memory **must** not be `Workgroup`
- VUID-StandaloneSpirv-None-07321
  If the `Scope` for memory is `Workgroup`, then it **must** only be used in the task, mesh, tessellation control, or compute `Execution Model`
- VUID-StandaloneSpirv-None-04640
  If the `Scope` for memory is `ShaderCallKHR`, then it **must** only be used in ray generation, intersection, closest hit, any-hit, miss, and callable `Execution Model`
- VUID-StandaloneSpirv-None-04641
  If the `Scope` for memory is `Invocation`, then memory semantics **must** be `None`
- VUID-StandaloneSpirv-None-04642
  `Scope` for group operations **must** be limited to `Subgroup`
- VUID-StandaloneSpirv-SubgroupVoteKHR-07951
  If none of the `SubgroupVoteKHR`, `GroupNonUniform`, or `SubgroupBallotKHR` capabilities are declared, `Scope` for memory **must** not be `Subgroup`

- VUID-StandaloneSpirv-None-04643
  `Storage Class` **must** be limited to `UniformConstant`, `Input`, `Uniform`, `Output`, `Workgroup`, `Private`, `Function`, `PushConstant`, `Image`, `StorageBuffer`, `RayPayloadKHR`, `IncomingRayPayloadKHR`, `HitAttributeKHR`, `CallableDataKHR`, `IncomingCallableDataKHR`, `ShaderRecordBufferKHR`, `PhysicalStorageBuffer`, or `TileImageEXT`
- VUID-StandaloneSpirv-None-04644
  If the `Storage Class` is `Output`, then it **must** not be used in the `GlCompute`, `RayGenerationKHR`, `IntersectionKHR`, `AnyHitKHR`, `ClosestHitKHR`, `MissKHR`, or `CallableKHR Execution Model`
- VUID-StandaloneSpirv-None-04645
  If the `Storage Class` is `Workgroup`, then it **must** only be used in the task, mesh, or compute `Execution Model`
- VUID-StandaloneSpirv-None-08720
  If the `Storage Class` is `TileImageEXT`, then it **must** only be used in the fragment execution model
- VUID-StandaloneSpirv-OpAtomicStore-04730
  `OpAtomicStore` **must** not use `Acquire`, `AcquireRelease`, or `SequentiallyConsistent` memory semantics
- VUID-StandaloneSpirv-OpAtomicLoad-04731
  `OpAtomicLoad` **must** not use `Release`, `AcquireRelease`, or `SequentiallyConsistent` memory semantics
- VUID-StandaloneSpirv-OpMemoryBarrier-04732
  `OpMemoryBarrier` **must** use one of `Acquire`, `Release`, `AcquireRelease`, or `SequentiallyConsistent` memory semantics
- VUID-StandaloneSpirv-OpMemoryBarrier-04733
  `OpMemoryBarrier` **must** include at least one `Storage Class`
- VUID-StandaloneSpirv-OpControlBarrier-04650
  If the semantics for `OpControlBarrier` includes one of `Acquire`, `Release`, `AcquireRelease`, or `SequentiallyConsistent` memory semantics, then it **must** include at least one `Storage Class`
- VUID-StandaloneSpirv-OpVariable-04651
  Any `OpVariable` with an `Initializer` operand **must** have `Output`, `Private`, `Function`, or `Workgroup` as its `Storage Class` operand
- VUID-StandaloneSpirv-OpVariable-04734
  Any `OpVariable` with an `Initializer` operand and `Workgroup` as its `Storage Class` operand **must** use `OpConstantNull` as the initializer
- VUID-StandaloneSpirv-OpReadClockKHR-04652
  `Scope` for `OpReadClockKHR` **must** be limited to `Subgroup` or `Device`
- VUID-StandaloneSpirv-OriginLowerLeft-04653
  The `OriginLowerLeft Execution Mode` **must** not be used; fragment entry points **must** declare `OriginUpperLeft`
- VUID-StandaloneSpirv-PixelCenterInteger-04654
  The `PixelCenterInteger Execution Mode` **must** not be used (pixels are always centered at half-integer coordinates)

- VUID-StandaloneSpirv-UniformConstant-04655
  Any variable in the `UniformConstant` `Storage Class` **must** be typed as either `OpTypeImage`, `OpTypeSampler`, `OpTypeSampledImage`, `OpTypeAccelerationStructureKHR`, or an array of one of these types
- VUID-StandaloneSpirv-Uniform-06807
  Any variable in the `Uniform` or `StorageBuffer` `Storage Class` **must** be typed as `OpTypeStruct` or an array of this type
- VUID-StandaloneSpirv-PushConstant-06808
  Any variable in the `PushConstant` `Storage Class` **must** be typed as `OpTypeStruct`
- VUID-StandaloneSpirv-OpTypeImage-04656
  `OpTypeImage` **must** declare a scalar 32-bit float, 64-bit integer, or 32-bit integer type for the "Sampled Type" (`RelaxedPrecision` **can** be applied to a sampling instruction and to the variable holding the result of a sampling instruction)
- VUID-StandaloneSpirv-OpTypeImage-04657
  `OpTypeImage` **must** have a "Sampled" operand of 1 (sampled image) or 2 (storage image)
- VUID-StandaloneSpirv-OpTypeSampledImage-06671
  `OpTypeSampledImage` **must** have a `OpTypeImage` with a "Sampled" operand of 1 (sampled image)
- VUID-StandaloneSpirv-Image-04965
  The SPIR-V Type of the `Image Format` operand of an `OpTypeImage` **must** match the `Sampled Type`, as defined in Image Format and Type Matching
- VUID-StandaloneSpirv-OpImageTexelPointer-04658
  If an `OpImageTexelPointer` is used in an atomic operation, the image type of the `image` parameter to `OpImageTexelPointer` **must** have an image format of `R64i`, `R64ui`, `R32f`, `R32i`, or `R32ui`
- VUID-StandaloneSpirv-OpImageQuerySizeLod-04659
  `OpImageQuerySizeLod`, `OpImageQueryLod`, and `OpImageQueryLevels` **must** only consume an "Image" operand whose type has its "Sampled" operand set to 1
- VUID-StandaloneSpirv-OpTypeImage-09638
  An `OpTypeImage` **must** not have a "Dim" operand of `Rect`
- VUID-StandaloneSpirv-OpTypeImage-06214
  An `OpTypeImage` with a "Dim" operand of `SubpassData` **must** have an "Arrayed" operand of 0 (non-arrayed) and a "Sampled" operand of 2 (storage image)
- VUID-StandaloneSpirv-SubpassData-04660
  The (u,v) coordinates used for a `SubpassData` **must** be the <id> of a constant vector (0,0)
- VUID-StandaloneSpirv-OpTypeImage-06924
  Objects of types `OpTypeImage`, `OpTypeSampler`, `OpTypeSampledImage`, `OpTypeAccelerationStructureKHR`, and arrays of these types **must** not be stored to or modified
- VUID-StandaloneSpirv-Uniform-06925
  Any variable in the `Uniform` `Storage Class` decorated as `Block` **must** not be stored to or modified

- VUID-StandaloneSpirv-Offset-04663
  Image operand `Offset` **must** only be used with `OpImage*Gather` instructions
- VUID-StandaloneSpirv-Offset-04865
  Any image instruction which uses an `Offset`, `ConstOffset`, or `ConstOffsets` image operand, **must** only consume a “Sampled Image” operand whose type has its “Sampled” operand set to 1
- VUID-StandaloneSpirv-OpImageGather-04664
  The “Component” operand of `OpImageGather`, and `OpImageSparseGather` **must** be the <id> of a constant instruction
- VUID-StandaloneSpirv-OpImage-04777
  `OpImage*Dref*` instructions **must** not consume an image whose `Dim` is 3D
- VUID-StandaloneSpirv-None-04667
  Structure types **must** not contain opaque types
- VUID-StandaloneSpirv-BuiltIn-04668
  Any `BuiltIn` decoration not listed in Built-In Variables **must** not be used
- VUID-StandaloneSpirv-OpEntryPoint-09658
  For a given `OpEntryPoint`, any `BuiltIn` decoration **must** not be used more than once by the `Input` interface
- VUID-StandaloneSpirv-OpEntryPoint-09659
  For a given `OpEntryPoint`, any `BuiltIn` decoration **must** not be used more than once by the `Output` interface
- VUID-StandaloneSpirv-Location-06672
  The `Location` or `Component` decorations **must** only be used with the `Input`, `Output`, `RayPayloadKHR`, `IncomingRayPayloadKHR`, `HitAttributeKHR`, `HitObjectAttributeNV`, `CallableDataKHR`, `IncomingCallableDataKHR`, or `ShaderRecordBufferKHR` storage classes
- VUID-StandaloneSpirv-Location-04915
  The `Location` or `Component` decorations **must** not be used with `BuiltIn`
- VUID-StandaloneSpirv-Location-04916
  The `Location` decorations **must** be used on user-defined variables
- VUID-StandaloneSpirv-Location-04917
  If a user-defined variable is not a pointer to a `Block` decorated `OpTypeStruct`, then the `OpVariable` **must** have a `Location` decoration
- VUID-StandaloneSpirv-Location-04918
  If a user-defined variable has a `Location` decoration, and the variable is a pointer to a `OpTypeStruct`, then the members of that structure **must** not have `Location` decorations
- VUID-StandaloneSpirv-Location-04919
  If a user-defined variable does not have a `Location` decoration, and the variable is a pointer to a `Block` decorated `OpTypeStruct`, then each member of the struct **must** have a `Location` decoration
- VUID-StandaloneSpirv-Component-04920
  The `Component` decoration value **must** not be greater than 3
- VUID-StandaloneSpirv-Component-04921

If the Component decoration is used on an OpVariable that has a OpTypeVector type with a Component Type with a Width that is less than or equal to 32, the sum of its Component Count and the Component decoration value **must** be less than or equal to 4

- VUID-StandaloneSpirv-Component-04922
  If the Component decoration is used on an OpVariable that has a OpTypeVector type with a Component Type with a Width that is equal to 64, the sum of two times its Component Count and the Component decoration value **must** be less than or equal to 4
- VUID-StandaloneSpirv-Component-04923
  The Component decorations value **must** not be 1 or 3 for scalar or two-component 64-bit data types
- VUID-StandaloneSpirv-Component-04924
  The Component decorations **must** not be used with any type that is not a scalar or vector, or an array of such a type
- VUID-StandaloneSpirv-Component-07703
  The Component decorations **must** not be used for a 64-bit vector type with more than two components
- VUID-StandaloneSpirv-Input-09557
  The pointers of any Input or Output Interface user-defined variables **must** not contain any PhysicalStorageBuffer Storage Class pointers
- VUID-StandaloneSpirv-GLSLShared-04669
  The GLSLShared and GLSLPacked decorations **must** not be used
- VUID-StandaloneSpirv-Flat-04670
  The Flat, NoPerspective, Sample, and Centroid decorations **must** only be used on variables with the Output or Input Storage Class
- VUID-StandaloneSpirv-Flat-06201
  The Flat, NoPerspective, Sample, and Centroid decorations **must** not be used on variables with the Output storage class in a fragment shader
- VUID-StandaloneSpirv-Flat-06202
  The Flat, NoPerspective, Sample, and Centroid decorations **must** not be used on variables with the Input storage class in a vertex shader
- VUID-StandaloneSpirv-PerVertexKHR-06777
  The PerVertexKHR decoration **must** only be used on variables with the Input Storage Class in a fragment shader
- VUID-StandaloneSpirv-Flat-04744
  Any variable with integer or double-precision floating-point type and with Input Storage Class in a fragment shader, **must** be decorated Flat
- VUID-StandaloneSpirv-ViewportRelativeNV-04672
  The ViewportRelativeNV decoration **must** only be used on a variable decorated with Layer in the vertex, tessellation evaluation, or geometry shader stages
- VUID-StandaloneSpirv-ViewportRelativeNV-04673
  The ViewportRelativeNV decoration **must** not be used unless a variable decorated with one of ViewportIndex or ViewportMaskNV is also statically used by the same OpEntryPoint

- VUID-StandaloneSpirv-ViewportMaskNV-04674
  The `ViewportMaskNV` and `ViewportIndex` decorations **must** not both be statically used by one or more `OpEntryPoint`'s that form the pre-rasterization shader stages of a graphics pipeline
- VUID-StandaloneSpirv-FPRoundingMode-04675
  Rounding modes other than round-to-nearest-even and round-towards-zero **must** not be used for the `FPRoundingMode` decoration
- VUID-StandaloneSpirv-Invariant-04677
  Variables decorated with `Invariant` and variables with structure types that have any members decorated with `Invariant` **must** be in the `Output` or `Input Storage Class`, `Invariant` used on an `Input Storage Class` variable or structure member has no effect
- VUID-StandaloneSpirv-VulkanMemoryModel-04678
  If the `VulkanMemoryModel` capability is not declared, the `Volatile` decoration **must** be used on any variable declaration that includes one of the `SMIDNV`, `WarpIDNV`, `SubgroupSize`, `SubgroupLocalInvocationId`, `SubgroupEqMask`, `SubgroupGeMask`, `SubgroupGtMask`, `SubgroupLeMask`, or `SubgroupLtMask BuiltIn` decorations when used in the ray generation, closest hit, miss, intersection, or callable shaders, or with the `RayTmaxKHR Builtin` decoration when used in an intersection shader
- VUID-StandaloneSpirv-VulkanMemoryModel-04679
  If the `VulkanMemoryModel` capability is declared, the `OpLoad` instruction **must** use the `Volatile` memory semantics when it accesses into any variable that includes one of the `SMIDNV`, `WarpIDNV`, `SubgroupSize`, `SubgroupLocalInvocationId`, `SubgroupEqMask`, `SubgroupGeMask`, `SubgroupGtMask`, `SubgroupLeMask`, or `SubgroupLtMask BuiltIn` decorations when used in the ray generation, closest hit, miss, intersection, or callable shaders, or with the `RayTmaxKHR Builtin` decoration when used in an intersection shader
- VUID-StandaloneSpirv-OpTypeRuntimeArray-04680
  `OpTypeRuntimeArray` **must** only be used for:
  - the last member of a `Block`-decorated `OpTypeStruct` in `StorageBuffer` or `PhysicalStorageBuffer` storage `Storage Class`
  - `BufferBlock`-decorated `OpTypeStruct` in the `Uniform` storage `Storage Class`
  - the outermost dimension of an arrayed variable in the `StorageBuffer`, `Uniform`, or `UniformConstant` storage `Storage Class`
  - variables in the `NodePayloadAMDX` storage `Storage Class` when the `CoalescingAMDX Execution Mode` is specified
- VUID-StandaloneSpirv-Function-04681
  A type *T* that is an array sized with a specialization constant **must** neither be, nor be contained in, the type *T2* of a variable *V*, unless either: a) *T* is equal to *T2*, b) *V* is declared in the `Function`, or `Private Storage Class`, c) *V* is a non-Block variable in the `Workgroup Storage Class`, or d) *V* is an interface variable with an additional level of arrayness, as described in interface matching, and *T* is the member type of the array type *T2*
- VUID-StandaloneSpirv-OpControlBarrier-04682
  If `OpControlBarrier` is used in ray generation, intersection, any-hit, closest hit, miss, fragment, vertex, tessellation evaluation, or geometry shaders, the execution Scope **must** be `Subgroup`

- VUID-StandaloneSpirv-LocalSize-06426
  For each compute shader entry point, either a `LocalSize` or `LocalSizeId Execution Mode`, or an object decorated with the `WorkgroupSize` decoration **must** be specified
- VUID-StandaloneSpirv-DerivativeGroupQuadsNV-04684
  For compute shaders using the `DerivativeGroupQuadsNV` execution mode, the first two dimensions of the local workgroup size **must** be a multiple of two
- VUID-StandaloneSpirv-DerivativeGroupLinearNV-04778
  For compute shaders using the `DerivativeGroupLinearNV` execution mode, the product of the dimensions of the local workgroup size **must** be a multiple of four
- VUID-StandaloneSpirv-DerivativeGroupQuadsKHR-10151
  For compute, mesh, or task shaders using the `DerivativeGroupQuadsKHR` execution mode, the first two dimensions of the local workgroup size **must** be a multiple of two
- VUID-StandaloneSpirv-DerivativeGroupLinearKHR-10152
  For compute, mesh, or task shaders using the `DerivativeGroupLinearKHR` execution mode, the product of the dimensions of the local workgroup size **must** be a multiple of four
- VUID-StandaloneSpirv-OpGroupNonUniformBallotBitCount-04685
  If `OpGroupNonUniformBallotBitCount` is used, the group operation **must** be limited to `Reduce`, `InclusiveScan`, or `ExclusiveScan`
- VUID-StandaloneSpirv-None-04686
  The *Pointer* operand of all atomic instructions **must** have a `Storage Class` limited to `Uniform`, `Workgroup`, `Image`, `StorageBuffer`, `PhysicalStorageBuffer`, or `TaskPayloadWorkgroupEXT`
- VUID-StandaloneSpirv-Offset-04687
  Output variables or block members decorated with `Offset` that have a 64-bit type, or a composite type containing a 64-bit type, **must** specify an `Offset` value aligned to a 8 byte boundary
- VUID-StandaloneSpirv-Offset-04689
  The size of any output block containing any member decorated with `Offset` that is a 64-bit type **must** be a multiple of 8
- VUID-StandaloneSpirv-Offset-04690
  The first member of an output block specifying a `Offset` decoration **must** specify a `Offset` value that is aligned to an 8 byte boundary if that block contains any member decorated with `Offset` and is a 64-bit type
- VUID-StandaloneSpirv-Offset-04691
  Output variables or block members decorated with `Offset` that have a 32-bit type, or a composite type contains a 32-bit type, **must** specify an `Offset` value aligned to a 4 byte boundary
- VUID-StandaloneSpirv-Offset-04692
  Output variables, blocks or block members decorated with `Offset` **must** only contain base types that have components that are either 32-bit or 64-bit in size
- VUID-StandaloneSpirv-Offset-04716
  Only variables or block members in the output interface decorated with `Offset` **can** be captured for transform feedback, and those variables or block members **must** also be decorated with `XfbBuffer` and `XfbStride`, or inherit `XfbBuffer` and `XfbStride` decorations

from a block containing them

- VUID-StandaloneSpirv-XfbBuffer-04693
  All variables or block members in the output interface of the entry point being compiled decorated with a specific `XfbBuffer` value **must** all be decorated with identical `XfbStride` values
- VUID-StandaloneSpirv-Stream-04694
  If any variables or block members in the output interface of the entry point being compiled are decorated with `Stream`, then all variables belonging to the same `XfbBuffer` **must** specify the same `Stream` value
- VUID-StandaloneSpirv-XfbBuffer-04696
  For any two variables or block members in the output interface of the entry point being compiled with the same `XfbBuffer` value, the ranges determined by the `Offset` decoration and the size of the type **must** not overlap
- VUID-StandaloneSpirv-XfbBuffer-04697
  All block members in the output interface of the entry point being compiled that are in the same block and have a declared or inherited `XfbBuffer` decoration **must** specify the same `XfbBuffer` value
- VUID-StandaloneSpirv-RayPayloadKHR-04698
  `RayPayloadKHR Storage Class` **must** only be used in ray generation, closest hit or miss shaders
- VUID-StandaloneSpirv-IncomingRayPayloadKHR-04699
  `IncomingRayPayloadKHR Storage Class` **must** only be used in closest hit, any-hit, or miss shaders
- VUID-StandaloneSpirv-IncomingRayPayloadKHR-04700
  There **must** be at most one variable with the `IncomingRayPayloadKHR Storage Class` in the input interface of an entry point
- VUID-StandaloneSpirv-HitAttributeKHR-04701
  `HitAttributeKHR Storage Class` **must** only be used in intersection, any-hit, or closest hit shaders
- VUID-StandaloneSpirv-HitAttributeKHR-04702
  There **must** be at most one variable with the `HitAttributeKHR Storage Class` in the input interface of an entry point
- VUID-StandaloneSpirv-HitAttributeKHR-04703
  A variable with `HitAttributeKHR Storage Class` **must** only be written to in an intersection shader
- VUID-StandaloneSpirv-CallableDataKHR-04704
  `CallableDataKHR Storage Class` **must** only be used in ray generation, closest hit, miss, and callable shaders
- VUID-StandaloneSpirv-IncomingCallableDataKHR-04705
  `IncomingCallableDataKHR Storage Class` **must** only be used in callable shaders
- VUID-StandaloneSpirv-IncomingCallableDataKHR-04706
  There **must** be at most one variable with the `IncomingCallableDataKHR Storage Class` in the input interface of an entry point

- VUID-StandaloneSpirv-ShaderRecordBufferKHR-07119
  `ShaderRecordBufferKHR` `Storage Class` **must** only be used in ray generation, intersection, any-hit, closest hit, callable, or miss shaders
- VUID-StandaloneSpirv-Base-07650
  The `Base` operand of `OpPtrAccessChain` **must** have a storage class of `Workgroup`, `StorageBuffer`, or `PhysicalStorageBuffer`
- VUID-StandaloneSpirv-Base-07651
  If the `Base` operand of `OpPtrAccessChain` has a `Workgroup` `Storage Class`, then the `VariablePointers` capability **must** be declared
- VUID-StandaloneSpirv-Base-07652
  If the `Base` operand of `OpPtrAccessChain` has a `StorageBuffer` `Storage Class`, then the `VariablePointers` or `VariablePointersStorageBuffer` capability **must** be declared
- VUID-StandaloneSpirv-PhysicalStorageBuffer64-04708
  If the `PhysicalStorageBuffer64` addressing model is enabled, all instructions that support memory access operands and that use a physical pointer **must** include the `Aligned` operand
- VUID-StandaloneSpirv-PhysicalStorageBuffer64-04709
  If the `PhysicalStorageBuffer64` addressing model is enabled, any access chain instruction that accesses into a `RowMajor` matrix **must** only be used as the `Pointer` operand to `OpLoad` or `OpStore`
- VUID-StandaloneSpirv-PhysicalStorageBuffer64-04710
  If the `PhysicalStorageBuffer64` addressing model is enabled, `OpConvertUToPtr` and `OpConvertPtrToU` **must** use an integer type whose `Width` is 64
- VUID-StandaloneSpirv-OpTypeForwardPointer-04711
  `OpTypeForwardPointer` **must** have a `Storage Class` of `PhysicalStorageBuffer`
- VUID-StandaloneSpirv-None-04745
  All block members in a variable with a `Storage Class` of `PushConstant` declared as an array **must** only be accessed by dynamically uniform indices
- VUID-StandaloneSpirv-OpVariable-06673
  There **must** not be more than one `OpVariable` in the `PushConstant` `Storage Class` listed in the `Interface` for each `OpEntryPoint`
- VUID-StandaloneSpirv-OpEntryPoint-06674
  Each `OpEntryPoint` **must** not statically use more than one `OpVariable` in the `PushConstant` `Storage Class`
- VUID-StandaloneSpirv-OpEntryPoint-08721
  Each `OpEntryPoint` **must** not have more than one `Input` variable assigned the same `Component` word inside a `Location` slot, either explicitly or implicitly
- VUID-StandaloneSpirv-OpEntryPoint-08722
  Each `OpEntryPoint` **must** not have more than one `Output` variable assigned the same `Component` word inside a `Location` slot, either explicitly or implicitly
- VUID-StandaloneSpirv-Result-04780
  The `Result Type` operand of any `OpImageRead` or `OpImageSparseRead` instruction **must** be a vector of four components

- VUID-StandaloneSpirv-Base-04781
  The Base operand of any OpBitCount, OpBitReverse, OpBitFieldInsert, OpBitFieldSExtract, or OpBitFieldUExtract instruction **must** be a 32-bit integer scalar or a vector of 32-bit integers
- VUID-StandaloneSpirv-PushConstant-06675
  Any variable in the PushConstant or StorageBuffer storage class **must** be decorated as Block
- VUID-StandaloneSpirv-Uniform-06676
  Any variable in the Uniform Storage Class **must** be decorated as Block or BufferBlock
- VUID-StandaloneSpirv-UniformConstant-06677
  Any variable in the UniformConstant, StorageBuffer, or Uniform Storage Class **must** be decorated with DescriptorSet and Binding
- VUID-StandaloneSpirv-InputAttachmentIndex-06678
  Variables decorated with InputAttachmentIndex **must** be in the UniformConstant Storage Class
- VUID-StandaloneSpirv-DescriptorSet-06491
  If a variable is decorated by DescriptorSet or Binding, the Storage Class **must** correspond to an entry in Shader Resource and Storage Class Correspondence
- VUID-StandaloneSpirv-Input-06778
  Variables with a Storage Class of Input in a fragment shader stage that are decorated with PerVertexKHR **must** be declared as arrays
- VUID-StandaloneSpirv-MeshEXT-07102
  The module **must** not contain both an entry point that uses the TaskEXT or MeshEXT Execution Model and an entry point that uses the TaskNV or MeshNV Execution Model
- VUID-StandaloneSpirv-MeshEXT-07106
  In mesh shaders using the MeshEXT Execution Model OpSetMeshOutputsEXT **must** be called before any outputs are written
- VUID-StandaloneSpirv-MeshEXT-07107
  In mesh shaders using the MeshEXT Execution Model all variables declared as output **must** not be read from
- VUID-StandaloneSpirv-MeshEXT-07108
  In mesh shaders using the MeshEXT Execution Model for OpSetMeshOutputsEXT instructions, the “Vertex Count” and “Primitive Count” operands **must** not depend on ViewIndex
- VUID-StandaloneSpirv-MeshEXT-07109
  In mesh shaders using the MeshEXT Execution Model variables decorated with PrimitivePointIndicesEXT, PrimitiveLineIndicesEXT, or PrimitiveTriangleIndicesEXT declared as an array **must** not be accessed by indices that depend on ViewIndex
- VUID-StandaloneSpirv-MeshEXT-07110
  In mesh shaders using the MeshEXT Execution Model any values stored in variables decorated with PrimitivePointIndicesEXT, PrimitiveLineIndicesEXT, or PrimitiveTriangleIndicesEXT **must** not depend on ViewIndex
- VUID-StandaloneSpirv-MeshEXT-07111
  In mesh shaders using the MeshEXT Execution Model variables in workgroup or private Storage Class declared as or containing a composite type **must** not be accessed by indices

that depend on ViewIndex

- VUID-StandaloneSpirv-MeshEXT-07330
  In mesh shaders using the MeshEXT Execution Model the OutputVertices Execution Mode **must** be greater than 0
- VUID-StandaloneSpirv-MeshEXT-07331
  In mesh shaders using the MeshEXT Execution Model the OutputPrimitivesEXT Execution Mode **must** be greater than 0
- VUID-StandaloneSpirv-Input-07290
  Variables with a Storage Class of Input or Output and a type of OpTypeBool **must** be decorated with the BuiltIn decoration
- VUID-StandaloneSpirv-TileImageEXT-08723
  The tile image variable declarations **must** obey the constraints on the TileImageEXT Storage Class and the Location decoration described in Fragment Tile Image Interface
- VUID-StandaloneSpirv-None-08724
  The TileImageEXT Storage Class **must** only be used for declaring tile image variables
- VUID-StandaloneSpirv-Pointer-08973
  The Storage Class of the Pointer operand to OpCooperativeMatrixLoadKHR or OpCooperativeMatrixStoreKHR **must** be limited to Workgroup, StorageBuffer, or PhysicalStorageBuffer
- VUID-StandaloneSpirv-UniformBufferArrayDynamicIndexing-10127
  If the UniformBufferArrayDynamicIndexing capability is not declared, and an instruction accesses memory through a uniform buffer, the uniform buffer through which that memory is accessed **must** be determined by constant integral expressions
- VUID-StandaloneSpirv-SampledImageArrayDynamicIndexing-10128
  If the SampledImageArrayDynamicIndexing capability is not declared, and an instruction accesses memory through a sampled image or sampler, the sampled image or sampler through which that memory is accessed **must** be determined by constant integral expressions
- VUID-StandaloneSpirv-StorageBufferArrayDynamicIndexing-10129
  If the StorageBufferArrayDynamicIndexing capability is not declared, and an instruction accesses memory through a storage buffer, the storage buffer through which that memory is accessed **must** be determined by constant integral expressions
- VUID-StandaloneSpirv-StorageImageArrayDynamicIndexing-10130
  If the StorageImageArrayDynamicIndexing capability is not declared, and an instruction accesses memory through a storage image, the storage image through which that memory is accessed **must** be determined by constant integral expressions
- VUID-StandaloneSpirv-InputAttachmentArrayDynamicIndexing-10131
  If the InputAttachmentArrayDynamicIndexing capability is not declared, and an instruction accesses memory through an input attachment, the input attachmnet through which that memory is accessed **must** be determined by constant integral expressions
- VUID-StandaloneSpirv-UniformTexelBufferArrayDynamicIndexing-10132
  If the UniformTexelBufferArrayDynamicIndexing capability is not declared, and an instruction accesses memory through a uniform texel buffer, the uniform texel buffer

through which that memory is accessed **must** be determined by constant integral expressions

- VUID-StandaloneSpirv-StorageTexelBufferArrayDynamicIndexing-10133
  If the `StorageTexelBufferArrayDynamicIndexing` capability is not declared, and an instruction accesses memory through a storage texel buffer, the storage texel buffer through which that memory is accessed **must** be determined by constant integral expressions

Runtime SPIR-V Validation

The following rules **must** be validated at runtime. These rules depend on knowledge of the implementation and its capabilities and knowledge of runtime information, such as enabled features.

Valid Usage

- VUID-RuntimeSpirv-vulkanMemoryModel-06265
  If `vulkanMemoryModel` is enabled and `vulkanMemoryModelDeviceScope` is not enabled, `Device` memory scope **must** not be used
- VUID-RuntimeSpirv-vulkanMemoryModel-06266
  If `vulkanMemoryModel` is not enabled, `QueueFamily` memory scope **must** not be used
- VUID-RuntimeSpirv-None-09558
  Any variable created with a "Type" of `OpTypeImage` that has a "Dim" operand of `SubpassData` **must** be decorated with `InputAttachmentIndex`
- VUID-RuntimeSpirv-apiVersion-07952
  If VkPhysicalDeviceProperties::`apiVersion` is less than Vulkan 1.3, and `shaderStorageImageWriteWithoutFormat` is not enabled, any variable created with a "Type" of `OpTypeImage` that has a "Sampled" operand of 2 and an "Image Format" operand of `Unknown` **must** be decorated with `NonWritable`
- VUID-RuntimeSpirv-apiVersion-07953
  If VkPhysicalDeviceProperties::`apiVersion` is less than Vulkan 1.3, and `shaderStorageImageReadWithoutFormat` is not enabled, any variable created with a "Type" of `OpTypeImage` that has a "Sampled" operand of 2 and an "Image Format" operand of `Unknown` **must** be decorated with `NonReadable`
- VUID-RuntimeSpirv-OpImageWrite-07112
  `OpImageWrite` to any `Image` whose `Image Format` is not `Unknown` **must** have the `Texel` operand contain at least as many components as the corresponding VkFormat as given in the SPIR-V Image Format compatibility table
- VUID-RuntimeSpirv-Location-06272
  The sum of `Location` and the number of locations the variable it decorates consumes **must** be less than or equal to the value for the matching `Execution Model` defined in Shader Input and Output Locations
- VUID-RuntimeSpirv-Location-06428
  The maximum number of storage buffers, storage images, and output `Location` decorated

color attachments written to in the Fragment Execution Model **must** be less than or equal to maxFragmentCombinedOutputResources

- VUID-RuntimeSpirv-UniformBufferArrayNonUniformIndexing-10134
  If the UniformBufferArrayNonUniformIndexing capability is not declared, and an instruction accesses memory through a uniform buffer, the uniform buffer through which that memory is accessed **must** be dynamically uniform within the invocation group or subgroup
- VUID-RuntimeSpirv-SampledImageArrayNonUniformIndexing-10135
  If the SampledImageArrayNonUniformIndexing capability is not declared, and an instruction accesses memory through a sampled image or sampler, the sampled image or sampler through which that memory is accessed **must** be dynamically uniform within the invocation group or subgroup
- VUID-RuntimeSpirv-StorageBufferArrayNonUniformIndexing-10136
  If the StorageBufferArrayNonUniformIndexing capability is not declared, and an instruction accesses memory through a storage buffer, the storage buffer through which that memory is accessed **must** be dynamically uniform within the invocation group or subgroup
- VUID-RuntimeSpirv-StorageImageArrayNonUniformIndexing-10137
  If the StorageImageArrayNonUniformIndexing capability is not declared, and an instruction accesses memory through a storage image, the storage image through which that memory is accessed **must** be dynamically uniform within the invocation group or subgroup
- VUID-RuntimeSpirv-InputAttachmentArrayNonUniformIndexing-10138
  If the InputAttachmentArrayNonUniformIndexing capability is not declared, and an instruction accesses memory through an input attachment, the input attachment through which that memory is accessed **must** be dynamically uniform within the invocation group or subgroup
- VUID-RuntimeSpirv-UniformTexelBufferArrayNonUniformIndexing-10139
  If the UniformTexelBufferArrayNonUniformIndexing capability is not declared, and an instruction accesses memory through a uniform texel buffer, the uniform texel buffer through which that memory is accessed **must** be dynamically uniform within the invocation group or subgroup
- VUID-RuntimeSpirv-StorageTexelBufferArrayNonUniformIndexing-10140
  If the StorageTexelBufferArrayNonUniformIndexing capability is not declared, and an instruction accesses memory through a storage texel buffer, the storage texel buffer through which that memory is accessed **must** be dynamically uniform within the invocation group or subgroup
- VUID-RuntimeSpirv-subgroupSize-10141
  If subgroupSize is 1, the UniformBufferArrayNonUniformIndexing capability is not declared, and an instruction accesses memory through a uniform buffer, the uniform buffer through which that memory is accessed **must** be dynamically uniform within the invocation group
- VUID-RuntimeSpirv-subgroupSize-10142
  If subgroupSize is 1, the SampledImageArrayNonUniformIndexing capability is not declared, and an instruction accesses memory through a sampled image or sampler, the sampled image or sampler through which that memory is accessed **must** be dynamically uniform

within the invocation group

- VUID-RuntimeSpirv-subgroupSize-10143
  If `subgroupSize` is 1, the `StorageBufferArrayNonUniformIndexing` capability is not declared, and an instruction accesses memory through a storage buffer, the storage buffer through which that memory is accessed **must** be dynamically uniform within the invocation group
- VUID-RuntimeSpirv-subgroupSize-10144
  If `subgroupSize` is 1, the `StorageImageArrayNonUniformIndexing` capability is not declared, and an instruction accesses memory through a storage image, the storage image through which that memory is accessed **must** be dynamically uniform within the invocation group
- VUID-RuntimeSpirv-subgroupSize-10145
  If `subgroupSize` is 1, the `InputAttachmentArrayNonUniformIndexing` capability is not declared, and an instruction accesses memory through an input attachment, the input attachment through which that memory is accessed **must** be dynamically uniform within the invocation group
- VUID-RuntimeSpirv-subgroupSize-10146
  If `subgroupSize` is 1, the `UniformTexelBufferArrayNonUniformIndexing` capability is not declared, and an instruction accesses memory through a uniform texel buffer, the uniform texel buffer through which that memory is accessed **must** be dynamically uniform within the invocation group
- VUID-RuntimeSpirv-subgroupSize-10147
  If `subgroupSize` is 1, the `StorageTexelBufferArrayNonUniformIndexing` capability is not is not declared, and an instruction accesses memory through a storage texel buffer, the storage texel buffer through which that memory is accessed **must** be dynamically uniform within the invocation group
- VUID-RuntimeSpirv-None-10148
  If an instruction accesses memory through any resource, `subgroupSize` is 1, and the resource through which that memory is accessed is not uniform within the invocation group, then the operand corresponding to that resource (e.g. the pointer or sampled image operand) **must** be decorated with `NonUniform`
- VUID-RuntimeSpirv-subgroupSize-10149
  If an instruction accesses memory through any resource, `subgroupSize` is greater than 1, and the resource through which that memory is accessed is not uniform within the invocation group, and not uniform within the subgroup, then the operand corresponding to that resource (e.g. the pointer or sampled image operand) **must** be decorated with `NonUniform`
- VUID-RuntimeSpirv-None-06275
  `shaderSubgroupExtendedTypes` **must** be enabled for group operations to use 8-bit integer, 16-bit integer, 64-bit integer, 16-bit floating-point, and vectors of these types
- VUID-RuntimeSpirv-subgroupBroadcastDynamicId-06276
  If `subgroupBroadcastDynamicId` is `VK_TRUE`, and the shader module version is 1.5 or higher, the “Index” for `OpGroupNonUniformQuadBroadcast` **must** be dynamically uniform within the derivative group. Otherwise, “Index” **must** be a constant

- VUID-RuntimeSpirv-subgroupBroadcastDynamicId-06277
  If `subgroupBroadcastDynamicId` is `VK_TRUE`, and the shader module version is 1.5 or higher, the "Id" for `OpGroupNonUniformBroadcast` **must** be dynamically uniform within the subgroup. Otherwise, "Id" **must** be a constant
- VUID-RuntimeSpirv-denormBehaviorIndependence-06289
  If `denormBehaviorIndependence` is `VK_SHADER_FLOAT_CONTROLS_INDEPENDENCE_32_BIT_ONLY`, then the entry point **must** use the same denormals `Execution Mode` for both 16-bit and 64-bit floating-point types
- VUID-RuntimeSpirv-denormBehaviorIndependence-06290
  If `denormBehaviorIndependence` is `VK_SHADER_FLOAT_CONTROLS_INDEPENDENCE_NONE`, then the entry point **must** use the same denormals `Execution Mode` for all floating-point types
- VUID-RuntimeSpirv-roundingModeIndependence-06291
  If `roundingModeIndependence` is `VK_SHADER_FLOAT_CONTROLS_INDEPENDENCE_32_BIT_ONLY`, then the entry point **must** use the same rounding `Execution Mode` for both 16-bit and 64-bit floating-point types
- VUID-RuntimeSpirv-roundingModeIndependence-06292
  If `roundingModeIndependence` is `VK_SHADER_FLOAT_CONTROLS_INDEPENDENCE_NONE`, then the entry point **must** use the same rounding `Execution Mode` for all floating-point types
- VUID-RuntimeSpirv-shaderSignedZeroInfNanPreserveFloat16-06293
  If `shaderSignedZeroInfNanPreserveFloat16` is `VK_FALSE`, then `SignedZeroInfNanPreserve` for 16-bit floating-point type **must** not be used
- VUID-RuntimeSpirv-shaderSignedZeroInfNanPreserveFloat32-06294
  If `shaderSignedZeroInfNanPreserveFloat32` is `VK_FALSE`, then `SignedZeroInfNanPreserve` for 32-bit floating-point type **must** not be used
- VUID-RuntimeSpirv-shaderSignedZeroInfNanPreserveFloat64-06295
  If `shaderSignedZeroInfNanPreserveFloat64` is `VK_FALSE`, then `SignedZeroInfNanPreserve` for 64-bit floating-point type **must** not be used
- VUID-RuntimeSpirv-shaderDenormPreserveFloat16-06296
  If `shaderDenormPreserveFloat16` is `VK_FALSE`, then `DenormPreserve` for 16-bit floating-point type **must** not be used
- VUID-RuntimeSpirv-shaderDenormPreserveFloat32-06297
  If `shaderDenormPreserveFloat32` is `VK_FALSE`, then `DenormPreserve` for 32-bit floating-point type **must** not be used
- VUID-RuntimeSpirv-shaderDenormPreserveFloat64-06298
  If `shaderDenormPreserveFloat64` is `VK_FALSE`, then `DenormPreserve` for 64-bit floating-point type **must** not be used
- VUID-RuntimeSpirv-shaderDenormFlushToZeroFloat16-06299
  If `shaderDenormFlushToZeroFloat16` is `VK_FALSE`, then `DenormFlushToZero` for 16-bit floating-point type **must** not be used
- VUID-RuntimeSpirv-shaderDenormFlushToZeroFloat32-06300
  If `shaderDenormFlushToZeroFloat32` is `VK_FALSE`, then `DenormFlushToZero` for 32-bit floating-point type **must** not be used
- VUID-RuntimeSpirv-shaderDenormFlushToZeroFloat64-06301

If `shaderDenormFlushToZeroFloat64` is `VK_FALSE`, then `DenormFlushToZero` for 64-bit floating-point type **must** not be used

- VUID-RuntimeSpirv-shaderRoundingModeRTEFloat16-06302
  If `shaderRoundingModeRTEFloat16` is `VK_FALSE`, then `RoundingModeRTE` for 16-bit floating-point type **must** not be used
- VUID-RuntimeSpirv-shaderRoundingModeRTEFloat32-06303
  If `shaderRoundingModeRTEFloat32` is `VK_FALSE`, then `RoundingModeRTE` for 32-bit floating-point type **must** not be used
- VUID-RuntimeSpirv-shaderRoundingModeRTEFloat64-06304
  If `shaderRoundingModeRTEFloat64` is `VK_FALSE`, then `RoundingModeRTE` for 64-bit floating-point type **must** not be used
- VUID-RuntimeSpirv-shaderRoundingModeRTZFloat16-06305
  If `shaderRoundingModeRTZFloat16` is `VK_FALSE`, then `RoundingModeRTZ` for 16-bit floating-point type **must** not be used
- VUID-RuntimeSpirv-shaderRoundingModeRTZFloat32-06306
  If `shaderRoundingModeRTZFloat32` is `VK_FALSE`, then `RoundingModeRTZ` for 32-bit floating-point type **must** not be used
- VUID-RuntimeSpirv-shaderRoundingModeRTZFloat64-06307
  If `shaderRoundingModeRTZFloat64` is `VK_FALSE`, then `RoundingModeRTZ` for 64-bit floating-point type **must** not be used
- VUID-RuntimeSpirv-PhysicalStorageBuffer64-06314
  If the `PhysicalStorageBuffer64` addressing model is enabled any load or store through a physical pointer type **must** be aligned to a multiple of the size of the largest scalar type in the pointed-to type
- VUID-RuntimeSpirv-PhysicalStorageBuffer64-06315
  If the `PhysicalStorageBuffer64` addressing model is enabled the pointer value of a memory access instruction **must** be at least as aligned as specified by the `Aligned` memory access operand
- VUID-RuntimeSpirv-DescriptorSet-06323
  `DescriptorSet` and `Binding` decorations **must** obey the constraints on `Storage Class`, type, and descriptor type described in DescriptorSet and Binding Assignment
- VUID-RuntimeSpirv-NonWritable-06340
  If `fragmentStoresAndAtomics` is not enabled, then all storage image, storage texel buffer, and storage buffer variables in the fragment stage **must** be decorated with the `NonWritable` decoration
- VUID-RuntimeSpirv-NonWritable-06341
  If `vertexPipelineStoresAndAtomics` is not enabled, then all storage image, storage texel buffer, and storage buffer variables in the vertex, tessellation, and geometry stages **must** be decorated with the `NonWritable` decoration
- VUID-RuntimeSpirv-None-06342
  If `subgroupQuadOperationsInAllStages` is `VK_FALSE`, then quad subgroup operations **must** not be used except for in fragment and compute stages
- VUID-RuntimeSpirv-None-06343

Group operations with subgroup scope **must** not be used if the shader stage is not in `subgroupSupportedStages`

- VUID-RuntimeSpirv-Offset-06344
  The first element of the `Offset` operand of `InterpolateAtOffset` **must** be greater than or equal to:
  $frag_{width}$ × `minInterpolationOffset`
  where $frag_{width}$ is the width of the current fragment in pixels
- VUID-RuntimeSpirv-Offset-06345
  The first element of the `Offset` operand of `InterpolateAtOffset` **must** be less than or equal to
  $frag_{width}$ × (`maxInterpolationOffset` + ULP) - ULP
  where $frag_{width}$ is the width of the current fragment in pixels and ULP = 1 / 2^`subPixelInterpolationOffsetBits`^
- VUID-RuntimeSpirv-Offset-06346
  The second element of the `Offset` operand of `InterpolateAtOffset` **must** be greater than or equal to
  $frag_{height}$ × `minInterpolationOffset`
  where $frag_{height}$ is the height of the current fragment in pixels
- VUID-RuntimeSpirv-Offset-06347
  The second element of the `Offset` operand of `InterpolateAtOffset` **must** be less than or equal to
  $frag_{height}$ × (`maxInterpolationOffset` + ULP) - ULP
  where $frag_{height}$ is the height of the current fragment in pixels and ULP = 1 / 2^`subPixelInterpolationOffsetBits`^
- VUID-RuntimeSpirv-x-06429
  In compute shaders using the `GLCompute Execution Model` the `x` size in `LocalSize` or `LocalSizeId` **must** be less than or equal to VkPhysicalDeviceLimits ::`maxComputeWorkGroupSize`[0]
- VUID-RuntimeSpirv-y-06430
  In compute shaders using the `GLCompute Execution Model` the `y` size in `LocalSize` or `LocalSizeId` **must** be less than or equal to VkPhysicalDeviceLimits ::`maxComputeWorkGroupSize`[1]
- VUID-RuntimeSpirv-z-06431
  In compute shaders using the `GLCompute Execution Model` the `z` size in `LocalSize` or `LocalSizeId` **must** be less than or equal to VkPhysicalDeviceLimits ::`maxComputeWorkGroupSize`[2]
- VUID-RuntimeSpirv-x-06432
  In compute shaders using the `GLCompute Execution Model` the product of `x` size, `y` size, and `z` size in `LocalSize` or `LocalSizeId` **must** be less than or equal to VkPhysicalDeviceLimits ::`maxComputeWorkGroupInvocations`
- VUID-RuntimeSpirv-LocalSizeId-06434
  If `Execution Mode LocalSizeId` is used, `maintenance4` **must** be enabled
- VUID-RuntimeSpirv-maintenance4-06817
  If `maintenance4` is not enabled, any `OpTypeVector` output interface variables **must** not have

a higher Component Count than a matching OpTypeVector input interface variable

- VUID-RuntimeSpirv-OpEntryPoint-08743
  Any user-defined variables shared between the OpEntryPoint of two shader stages, and declared with Input as its Storage Class for the subsequent shader stage, **must** have all Location slots and Component words declared in the preceding shader stage's OpEntryPoint with Output as the Storage Class
- VUID-RuntimeSpirv-OpEntryPoint-07754
  Any user-defined variables between the OpEntryPoint of two shader stages **must** have the same type and width for each Component
- VUID-RuntimeSpirv-OpVariable-08746
  Any OpVariable, Block-decorated OpTypeStruct, or Block-decorated OpTypeStruct members shared between the OpEntryPoint of two shader stages **must** have matching decorations as defined in interface matching
- VUID-RuntimeSpirv-Workgroup-06530
  The sum of size in bytes for variables and padding in the Workgroup Storage Class in the GLCompute Execution Model **must** be less than or equal to maxComputeSharedMemorySize
- VUID-RuntimeSpirv-shaderZeroInitializeWorkgroupMemory-06372
  If shaderZeroInitializeWorkgroupMemory is not enabled, any OpVariable with Workgroup as its Storage Class **must** not have an Initializer operand
- VUID-RuntimeSpirv-OpImage-06376
  If an OpImage*Gather operation has an image operand of Offset, ConstOffset, or ConstOffsets the offset value **must** be greater than or equal to minTexelGatherOffset
- VUID-RuntimeSpirv-OpImage-06377
  If an OpImage*Gather operation has an image operand of Offset, ConstOffset, or ConstOffsets the offset value **must** be less than or equal to maxTexelGatherOffset
- VUID-RuntimeSpirv-OpImageSample-06435
  If an OpImageSample* or OpImageFetch* operation has an image operand of ConstOffset then the offset value **must** be greater than or equal to minTexelOffset
- VUID-RuntimeSpirv-OpImageSample-06436
  If an OpImageSample* or OpImageFetch* operation has an image operand of ConstOffset then the offset value **must** be less than or equal to maxTexelOffset
- VUID-RuntimeSpirv-samples-08725
  If an OpTypeImage has an MS operand 0, its bound image **must** have been created with VkImageCreateInfo::samples as VK_SAMPLE_COUNT_1_BIT
- VUID-RuntimeSpirv-samples-08726
  If an OpTypeImage has an MS operand 1, its bound image **must** not have been created with VkImageCreateInfo::samples as VK_SAMPLE_COUNT_1_BIT
- VUID-RuntimeSpirv-OpEntryPoint-08727
  Each OpEntryPoint **must** not have more than one variable decorated with InputAttachmentIndex per image aspect of the attachment image bound to it, either explicitly or implicitly as described by input attachment interface
- VUID-RuntimeSpirv-MeshEXT-09218
  In mesh shaders using the MeshEXT or MeshNV Execution Model and the OutputPoints

Execution Mode, if the number of output points is greater than 0, a PointSize decorated variable **must** be written to for each output point

- VUID-RuntimeSpirv-protectedNoFault-09645
  If protectedNoFault is not supported, the Storage Class of the PhysicalStorageBuffer **must** not be used if the buffer being accessed is protected

Precision and Operation of SPIR-V Instructions

The following rules apply to half, single, and double-precision floating-point instructions:

- Positive and negative infinities and positive and negative zeros are generated as dictated by IEEE 754, but subject to the precisions allowed in the table below.
- Signaling NaNs are not required to be generated and exceptions are never raised. Signaling NaN **may** be converted to quiet NaNs values by any floating-point instruction.
- The set of operations OpPhi, OpSelect, OpFunctionCall, OpReturnValue, OpVectorExtractDynamic, OpVectorInsertDynamic, OpVectorShuffle, OpCompositeConstruct, OpCompositeExtract, OpCompositeInsert, OpTranspose, OpCopyObject, OpCopyLogical, OpCopyMemory, OpGroupNonUniformBroadcast, OpGroupNonUniformBroadcastFirst, OpGroupNonUniformShuffle, OpGroupNonUniformShuffleXor, OpGroupNonUniformShuffleUp, OpGroupNonUniformShuffleDown, OpGroupNonUniformQuadBroadcast, OpGroupNonUniformQuadSwap, OpAtomicLoad, OpAtomicStore, OpAtomicExchange, OpStore, and OpLoad are referred to as *bit-preserving operations*.
- By default, the implementation **may** perform optimizations on half, single, or double-precision floating-point instructions that ignore sign of a zero, or assume that arguments and results are not NaNs or infinities. If the entry point is declared with the SignedZeroInfNanPreserve Execution Mode, then NaNs, infinities, and the sign of zero **must** not be ignored.
  - All bit-preserving operations except OpLoad from the Input Storage Class in the fragment shader stage **must** respect the SignedZeroInfNanPreserve Execution Mode.
  - The following core SPIR-V instructions **must** respect the SignedZeroInfNanPreserve Execution Mode: OpFConvert, OpFNegate, OpFAdd, OpFSub, OpFMul, OpFDiv, OpIsNan, and OpIsInf.
- All bit-preserving operations and the following instructions **must** not flush denormalized values: OpConstant, OpConstantComposite, OpSpecConstant, OpSpecConstantComposite, and OpBitcast.
- Denormalized values are supported.
  - By default, any half, single, or double-precision denormalized value input into a shader or potentially generated by any instruction (except those listed above) or any extended instructions for GLSL in a shader **may** be flushed to zero.
  - If the entry point is declared with the DenormFlushToZero Execution Mode then for the affected instructions the denormalized result **must** be flushed to zero and the denormalized operands **may** be flushed to zero. Denormalized values obtained via unpacking an integer into a vector of values with smaller bit width and interpreting those values as floating-point numbers **must** be flushed to zero.
  - The following core SPIR-V instructions **must** respect the DenormFlushToZero Execution Mode: OpSpecConstantOp (with opcode OpFConvert), OpFConvert, OpFNegate, OpFAdd, OpFSub, OpFMul, OpFDiv, OpFRem, OpFMod, OpVectorTimesScalar, OpMatrixTimesScalar, OpVectorTimesMatrix,

OpMatrixTimesVector, OpMatrixTimesMatrix, OpOuterProduct, OpDot; and the following extended instructions for GLSL: Round, RoundEven, Trunc, FAbs, Floor, Ceil, Fract, Radians, Degrees, Sin, Cos, Tan, Asin, Acos, Atan, Sinh, Cosh, Tanh, Asinh, Acosh, Atanh, Atan2, Pow, Exp, Log, Exp2, Log2, Sqrt, InverseSqrt, Determinant, MatrixInverse, Modf, ModfStruct, FMin, FMax, FClamp, FMix, Step, SmoothStep, Fma, UnpackHalf2x16, Length, Distance, Cross, Normalize, FaceForward, Reflect, Refract, NMin, NMax, and NClamp.

- The following core SPIR-V instructions **must** respect the DenormPreserve Execution Mode: OpSpecConstantOp, OpFConvert, OpFNegate, OpFAdd, OpFSub, OpFMul, OpVectorTimesScalar, OpMatrixTimesScalar, OpVectorTimesMatrix, OpMatrixTimesVector, OpMatrixTimesMatrix, OpOuterProduct, OpDot, OpFOrdEqual, OpFUnordEqual, OpFOrdNotEqual, OpFUnordNotEqual, OpFOrdLessThan, OpFUnordLessThan, OpFOrdGreaterThan, OpFUnordGreaterThan, OpFOrdLessThanEqual, OpFUnordLessThanEqual, OpFOrdGreaterThanEqual, OpFUnordGreaterThanEqual, OpGroupNonUniformAllEqual; and the following extended instructions for GLSL: FAbs, FSign, Radians, Degrees, FMin, FMax, FClamp, FMix, Fma, PackHalf2x16, PackDouble2x32, UnpackHalf2x16, UnpackDouble2x32, NMin, NMax, and NClamp.

The precision of double-precision instructions is at least that of single precision.

The precision of individual operations is defined in Precision of Individual Operations. Subject to the constraints below, however, implementations **may** reorder or combine operations, resulting in expressions exhibiting different precisions than might be expected from the constituent operations.

Evaluation of Expressions

Implementations **may** rearrange floating-point operations using any of the mathematical properties governing the expressions in precise arithmetic, even where the floating- point operations do not share these properties. This includes, but is not limited to, associativity and distributivity, and **may** involve a different number of rounding steps than would occur if the operations were not rearranged. In shaders that use the SignedZeroInfNanPreserve Execution Mode the values **must** be preserved if they are generated after any rearrangement but the Execution Mode does not change which rearrangements are valid. This rearrangement **can** be prevented for particular operations by using the NoContraction decoration.

For example, in the absence of the NoContraction decoration implementations are allowed to implement a + b - a and $\frac{a \times b}{a}$ as b. The SignedZeroInfNanPreserve does not prevent these transformations, even though they may overflow to infinity or NaN when evaluated in floating-point.

NOTE

If the NoContraction decoration is applied then operations may not be rearranged, so, for example, a + a - a must account for possible overflow to infinity. If infinities are not preserved then the expression may be replaced with a, since the replacement is exact when overflow does not occur and infinities may be replaced with undefined values. If both NoContraction and SignedZeroInfNanPreserve are used then the result must be infinity for sufficiently large a.

Precision of Individual Operations

The precision of individual operations is defined either in terms of rounding (correctly rounded), as

an error bound in ULP, or as inherited from a formula as follows:

Correct Result

Operations that are described as returning the "correct result" will return the infinitely precise result which, due to the nature of the operation, will not need rounding.

Correctly Rounded

Operations described as "correctly rounded" will return the infinitely precise result, x, rounded so as to be representable in floating-point. If the entry point is declared with the `RoundingModeRTE` or the `RoundingModeRTZ Execution Mode` then this is done according to IEEE 754 "roundTiesToEven" or "roundTowardZero" rounding directions, respectively. Otherwise, they are rounded with implementation-defined rounding mode.

Correctly Rounded with Implementation-Defined Rounding Mode

Operations described as "correctly rounded with implementation-defined rounding mode" will return the infinitely precise result, x, rounded so as to be representable in floating-point. If x is exactly representable then x will be returned. Otherwise, either the floating-point value closest to and no less than x or the value closest to and no greater than x will be returned. Which value is chosen is implementation-defined.

ULP

Where an error bound of n ULP (units in the last place) is given, for an operation with infinitely precise result x the value returned **must** be in the range [x - n × ulp(x), x + n × ulp(x)]. The function ulp(x) is defined as follows:

> If there exist non-equal, finite floating-point numbers a and b such that a ≤ x ≤ b then ulp(x) is the minimum possible distance between such numbers, $ulp(x) = \min_{a,\ b}|b - a|$. If such numbers do not exist then ulp(x) is defined to be the difference between the two non-equal, finite floating-point numbers nearest to x.

Where the range of allowed return values includes any value of magnitude larger than that of the largest representable finite floating-point number, operations **may**, additionally, return either an infinity of the appropriate sign or the finite number with the largest magnitude of the appropriate sign. If the infinitely precise result of the operation is not mathematically defined then the value returned is undefined.

Inherited From ...

Where an operation's precision is described as being inherited from a formula, the result returned **must** be at least as accurate as the result of computing an approximation to x using a formula equivalent to the given formula applied to the supplied inputs. Specifically, the formula given may be transformed using the mathematical associativity, commutativity and distributivity of the operators involved to yield an equivalent formula. The SPIR-V precision rules, when applied to each such formula and the given input values, define a range of permitted values. If NaN is one of the permitted values then the operation may return any result, otherwise let the largest permitted value in any of the ranges be F_{max} and the smallest be F_{min}. The operation **must** return a value in the range [x - E, x + E] where $E = \max(|x - F_{min}|, |x - F_{max}|)$. If the entry point is declared with the `DenormFlushToZero` execution mode, then any intermediate denormal value(s) while evaluating the

formula **may** be flushed to zero. Denormal final results **must** be flushed to zero. If the entry point is declared with the `DenormPreserve Execution Mode`, then denormals **must** be preserved throughout the formula.

For half- (16 bit) and single- (32 bit) precision instructions, precisions are **required** to be at least as follows:

Table 65. Precision of Core SPIR-V Instructions

Instruction	Single precision, unless decorated with RelaxedPrecision	Half precision
`OpFNegate`	Correct result.	
`OpFAdd`	Correctly rounded.	
`OpFSub`	Correctly rounded.	
`OpFMul`, `OpVectorTimesScalar`, `OpMatrixTimesScalar`	Correctly rounded.	
`OpMatrixTimesVector`	Inherited from $\sum_{j=0}^{n-1} M_{ij} \times v_j$.	
`OpVectorTimesMatrix`	Inherited from $\sum_{j=0}^{n-1} v_j \times M_{ji}$.	
`OpMatrixTimesMatrix`	Inherited from $\sum_{k=0}^{n-1} M_{ik} \times N_{kj}$.	
`OpOuterProduct`	Correctly rounded.	
`OpDot`(x, y)	Inherited from $\sum_{i=0}^{n-1} x_i \times y_i$.	
`OpIsNan`, `OpIsInf`	Correct result.	
`OpFOrdEqual`, `OpFUnordEqual`	Correct result.	
`OpFOrdNotEqual`, `OpFUnordNotEqual`	Correct result.	
`OpFOrdLessThan`, `OpFUnordLessThan`	Correct result.	
`OpFOrdGreaterThan`, `OpFUnordGreaterThan`	Correct result.	
`OpFOrdLessThanEqual`, `OpFUnordLessThanEqual`	Correct result.	
`OpFOrdGreaterThanEqual`, `OpFUnordGreaterThanEqual`	Correct result.	
`OpGroupNonUniformAllEqual`	Correct result.	
`OpFDiv`(x,y)	2.5 ULP for |y| = 0 or |y| in the range $[2^{-126}, 2^{126}]$.	2.5 ULP for |y| = 0 or |y| in the range $[2^{-14}, 2^{14}]$.
`OpFRem`(x,y)	Inherited from x - y × trunc(x/y).	
`OpFMod`(x,y)	Inherited from x - y × floor(x/y).	
`OpQuantizeToF16`	Correctly rounded with implementation defined rounding mode.	
conversions between types	Correctly rounded.	

NOTE	The OpFRem and OpFMod instructions use cheap approximations of remainder, and the error can be large due to the discontinuity in trunc() and floor(). This can produce mathematically unexpected results in some cases, such as FMod(x,x) computing x rather than 0, and can also cause the result to have a different sign than the infinitely precise result.

Table 66. Precision of GLSL.std.450 Instructions

Instruction	Single precision, unless decorated with RelaxedPrecision	Half precision
fma()	Inherited from OpFMul followed by OpFAdd.	
exp(x), exp2(x)	$3 + 2 \times \lvert x \rvert$ ULP.	$1 + 2 \times \lvert x \rvert$ ULP.
log(), log2()	3 ULP outside the range $[0.5, 2.0]$. Absolute error $< 2^{-21}$ inside the range $[0.5, 2.0]$.	3 ULP outside the range $[0.5, 2.0]$. Absolute error $< 2^{-7}$ inside the range $[0.5, 2.0]$.
pow(x, y)	Inherited from exp2(y × log2(x)).	
sqrt()	Inherited from 1.0 / inversesqrt().	
inversesqrt()	2 ULP.	
radians(x)	Inherited from $x \times C_{\pi_180}$, where C_{π_180} is a correctly rounded approximation to $\frac{\pi}{180}$.	
degrees(x)	Inherited from $x \times C_{180_\pi}$, where C_{180_π} is a correctly rounded approximation to $\frac{180}{\pi}$.	
sin()	Absolute error $\leq 2^{-11}$ inside the range $[-\pi, \pi]$.	Absolute error $\leq 2^{-7}$ inside the range $[-\pi, \pi]$.
cos()	Absolute error $\leq 2^{-11}$ inside the range $[-\pi, \pi]$.	Absolute error $\leq 2^{-7}$ inside the range $[-\pi, \pi]$.
tan()	Inherited from $\frac{\sin()}{\cos()}$.	
asin(x)	Inherited from $\text{atan2}(x, sqrt(1.0 - x \times x))$.	
acos(x)	Inherited from $\text{atan2}(sqrt(1.0 - x \times x), x)$.	
atan(), atan2()	4096 ULP	5 ULP.
sinh(x)	Inherited from $(\exp(x) - \exp(-x)) \times 0.5$.	
cosh(x)	Inherited from $(\exp(x) + \exp(-x)) \times 0.5$.	
tanh()	Inherited from $\frac{\sinh()}{\cosh()}$.	
asinh(x)	Inherited from $\log(x + sqrt(x \times x + 1.0))$.	
acosh(x)	Inherited from $\log(x + sqrt(x \times x - 1.0))$.	
atanh(x)	Inherited from $\log(\frac{1.0 + x}{1.0 - x}) \times 0.5$.	
frexp()	Correct result.	
ldexp()	Correctly rounded.	

Instruction	Single precision, unless decorated with RelaxedPrecision	Half precision
length(x)	Inherited from $sqrt(dot(x, x))$.	
distance(x, y)	Inherited from $length(x - y)$.	
cross()	Inherited from OpFSub(OpFMul, OpFMul).	
normalize(x)	Inherited from $x \times inversesqrt(dot(x, x))$.	
faceforward(N, I, NRef)	Inherited from dot(NRef, I) < 0.0 ? N : -N.	
reflect(x, y)	Inherited from x - 2.0 × dot(y, x) × y.	
refract(I, N, eta)	Inherited from k < 0.0 ? 0.0 : eta × I - (eta × dot(N, I) + sqrt(k)) × N, where k = 1 - eta × eta × (1.0 - dot(N, I) × dot(N, I)).	
round	Correctly rounded.	
roundEven	Correctly rounded.	
trunc	Correctly rounded.	
fabs	Correct result.	
fsign	Correct result.	
floor	Correctly rounded.	
ceil	Correctly rounded.	
fract	Correctly rounded.	
modf	Correctly rounded.	
fmin	Correct result.	
fmax	Correct result.	
fclamp	Correct result.	
fmix(x, y, a)	Inherited from $x \times (1.0 - a) + y \times a$.	
step	Correctly rounded.	
smoothStep(edge0, edge1, x)	Inherited from $t \times t \times (3.0 - 2.0 \times t)$, where $t = clamp(\frac{x - edge0}{edge1 - edge0}, 0.0, 1.0)$.	
nmin	Correct result.	
nmax	Correct result.	
nclamp	Correct result.	
packHalf2x16	Correctly rounded with implementation defined rounding mode.	

GLSL.std.450 extended instructions specifically defined in terms of the above instructions inherit the above errors. GLSL.std.450 extended instructions not listed above and not defined in terms of the above have undefined precision.

For the OpSRem and OpSMod instructions, if either operand is negative the result is undefined.

NOTE	While the OpSRem and OpSMod instructions are supported by the Vulkan environment, they require non-negative values and thus do not enable additional functionality beyond what OpUMod provides.

Signedness of SPIR-V Image Accesses

SPIR-V associates a signedness with all integer image accesses. This is required in certain parts of the SPIR-V and the Vulkan image access pipeline to ensure defined results. The signedness is determined from a combination of the access instruction's Image Operands and the underlying image's Sampled Type as follows:

1. If the instruction's Image Operands contains the SignExtend operand then the access is signed.
2. If the instruction's Image Operands contains the ZeroExtend operand then the access is unsigned.
3. Otherwise, the image accesses signedness matches that of the Sampled Type of the OpTypeImage being accessed.

Image Format and Type Matching

When specifying the Image Format of an OpTypeImage, the converted bit width and type, as shown in the table below, **must** match the Sampled Type. The signedness **must** match the signedness of any access to the image.

NOTE	Formatted accesses are always converted from a shader readable type to the resource's format or vice versa via Format Conversion for reads and Texel Output Format Conversion for writes. As such, the bit width and format below do not necessarily match 1:1 with what might be expected for some formats.

For a given Image Format, the Sampled Type **must** be the type described in the *Type* column of the below table, with its Literal Width set to that in the *Bit Width* column. Every access that is made to the image **must** have a signedness equal to that in the *Signedness* column (where applicable).

Image Format	Type-Declaration instructions	Bit Width	Signedness
Unknown	Any	Any	Any

Image Format	Type-Declaration instructions	Bit Width	Signedness
Rgba32f	OpTypeFloat	32	N/A
Rg32f			
R32f			
Rgba16f			
Rg16f			
R16f			
Rgba16			
Rg16			
R16			
Rgba16Snorm			
Rg16Snorm			
R16Snorm			
Rgb10A2			
R11fG11fB10f			
Rgba8			
Rg8			
R8			
Rgba8Snorm			
Rg8Snorm			
R8Snorm			

Image Format	Type-Declaration instructions	Bit Width	Signedness
Rgba32i	OpTypeInt	32	1
Rg32i			
R32i			
Rgba16i			
Rg16i			
R16i			
Rgba8i			
Rg8i			
R8i			
Rgba32ui			0
Rg32ui			
R32ui			
Rgba16ui			
Rg16ui			
R16ui			
Rgb10a2ui			
Rgba8ui			
Rg8ui			
R8ui			
R64i	OpTypeInt	64	1
R64ui			0

The *SPIR-V Type* is defined by an instruction in SPIR-V, declared with the Type-Declaration Instruction, Bit Width, and Signedness from above.

Compatibility Between SPIR-V Image Dimensions and Vulkan ImageView Types

SPIR-V `Image Dim` values are compatible with VkImageView `viewType` values as defined below:

Table 67. SPIR-V and Vulkan ImageView Dimension Compatibility

SPIR-V Image Dim	Compatible Vulkan ImageView viewTypes
1D	`VK_IMAGE_VIEW_TYPE_1D`, `VK_IMAGE_VIEW_TYPE_1D_ARRAY`
2D	`VK_IMAGE_VIEW_TYPE_2D`, `VK_IMAGE_VIEW_TYPE_2D_ARRAY`
3D	`VK_IMAGE_VIEW_TYPE_3D`
Cube	`VK_IMAGE_VIEW_TYPE_CUBE`, `VK_IMAGE_VIEW_TYPE_CUBE_ARRAY`

Compatibility Between SPIR-V Image Formats and Vulkan Formats

SPIR-V `Image Format` values are compatible with VkFormat values as defined below:

Table 68. SPIR-V and Vulkan Image Format Compatibility

SPIR-V Image Format	Compatible Vulkan Format
`Unknown`	Any
`R8`	`VK_FORMAT_R8_UNORM`
`R8Snorm`	`VK_FORMAT_R8_SNORM`
`R8ui`	`VK_FORMAT_R8_UINT`
`R8i`	`VK_FORMAT_R8_SINT`
`Rg8`	`VK_FORMAT_R8G8_UNORM`
`Rg8Snorm`	`VK_FORMAT_R8G8_SNORM`
`Rg8ui`	`VK_FORMAT_R8G8_UINT`
`Rg8i`	`VK_FORMAT_R8G8_SINT`
`Rgba8`	`VK_FORMAT_R8G8B8A8_UNORM`
`Rgba8Snorm`	`VK_FORMAT_R8G8B8A8_SNORM`
`Rgba8ui`	`VK_FORMAT_R8G8B8A8_UINT`
`Rgba8i`	`VK_FORMAT_R8G8B8A8_SINT`
`Rgb10A2`	`VK_FORMAT_A2B10G10R10_UNORM_PACK32`
`Rgb10a2ui`	`VK_FORMAT_A2B10G10R10_UINT_PACK32`
`R16`	`VK_FORMAT_R16_UNORM`
`R16Snorm`	`VK_FORMAT_R16_SNORM`
`R16ui`	`VK_FORMAT_R16_UINT`
`R16i`	`VK_FORMAT_R16_SINT`
`R16f`	`VK_FORMAT_R16_SFLOAT`
`Rg16`	`VK_FORMAT_R16G16_UNORM`
`Rg16Snorm`	`VK_FORMAT_R16G16_SNORM`
`Rg16ui`	`VK_FORMAT_R16G16_UINT`
`Rg16i`	`VK_FORMAT_R16G16_SINT`
`Rg16f`	`VK_FORMAT_R16G16_SFLOAT`
`Rgba16`	`VK_FORMAT_R16G16B16A16_UNORM`
`Rgba16Snorm`	`VK_FORMAT_R16G16B16A16_SNORM`
`Rgba16ui`	`VK_FORMAT_R16G16B16A16_UINT`
`Rgba16i`	`VK_FORMAT_R16G16B16A16_SINT`
`Rgba16f`	`VK_FORMAT_R16G16B16A16_SFLOAT`
`R32ui`	`VK_FORMAT_R32_UINT`
`R32i`	`VK_FORMAT_R32_SINT`
`R32f`	`VK_FORMAT_R32_SFLOAT`

SPIR-V Image Format	Compatible Vulkan Format
Rg32ui	VK_FORMAT_R32G32_UINT
Rg32i	VK_FORMAT_R32G32_SINT
Rg32f	VK_FORMAT_R32G32_SFLOAT
Rgba32ui	VK_FORMAT_R32G32B32A32_UINT
Rgba32i	VK_FORMAT_R32G32B32A32_SINT
Rgba32f	VK_FORMAT_R32G32B32A32_SFLOAT
R64ui	VK_FORMAT_R64_UINT
R64i	VK_FORMAT_R64_SINT
R11fG11fB10f	VK_FORMAT_B10G11R11_UFLOAT_PACK32

Appendix B: Memory Model

NOTE	This memory model describes synchronizations provided by all implementations; however, some of the synchronizations defined require extra features to be supported by the implementation. See VkPhysicalDeviceVulkanMemoryModelFeatures.

Agent

Operation is a general term for any task that is executed on the system.

NOTE	An operation is by definition something that is executed. Thus if an instruction is skipped due to control flow, it does not constitute an operation.

Each operation is executed by a particular *agent*. Possible agents include each shader invocation, each host thread, and each fixed-function stage of the pipeline.

Memory Location

A *memory location* identifies unique storage for 8 bits of data. Memory operations access a *set of memory locations* consisting of one or more memory locations at a time, e.g. an operation accessing a 32-bit integer in memory would read/write a set of four memory locations. Memory operations that access whole aggregates **may** access any padding bytes between elements or members, but no padding bytes at the end of the aggregate. Two sets of memory locations *overlap* if the intersection of their sets of memory locations is non-empty. A memory operation **must** not affect memory at a memory location not within its set of memory locations.

Memory locations for buffers and images are explicitly allocated in VkDeviceMemory objects, and are implicitly allocated for SPIR-V variables in each shader invocation.

Allocation

The values stored in newly allocated memory locations are determined by a SPIR-V variable's initializer, if present, or else are undefined. At the time an allocation is created there have been no memory operations to any of its memory locations. The initialization is not considered to be a memory operation.

NOTE	For tessellation control shader output variables, a consequence of initialization not being considered a memory operation is that some implementations may need to insert a barrier between the initialization of the output variables and any reads of those variables.

Memory Operation

For an operation A and memory location M:

- A *reads* M if and only if the data stored in M is an input to A.
- A *writes* M if and only if the data output from A is stored to M.
- A *accesses* M if and only if it either reads or writes (or both) M.

NOTE	A write whose value is the same as what was already in those memory locations is still considered to be a write and has all the same effects.

Reference

A *reference* is an object that a particular agent **can** use to access a set of memory locations. On the host, a reference is a host virtual address. On the device, a reference is:

- The descriptor that a variable is bound to, for variables in Image, Uniform, or StorageBuffer storage classes. If the variable is an array (or array of arrays, etc.) then each element of the array **may** be a unique reference.
- The address range for a buffer in `PhysicalStorageBuffer` storage class, where the base of the address range is queried with vkGetBufferDeviceAddress and the length of the range is the size of the buffer.
- The variable itself for variables in other storage classes.

Two memory accesses through distinct references **may** require availability and visibility operations as defined below.

Program-Order

A *dynamic instance* of an instruction is defined in SPIR-V (https://registry.khronos.org/spir-v/specs/unified1/SPIRV.html#DynamicInstance) as a way of referring to a particular execution of a static instruction. Program-order is an ordering on dynamic instances of instructions executed by a single shader invocation:

- (Basic block): If instructions A and B are in the same basic block, and A is listed in the module before B, then the n'th dynamic instance of A is program-ordered before the n'th dynamic instance of B.
- (Branch): The dynamic instance of a branch or switch instruction is program-ordered before the dynamic instance of the OpLabel instruction to which it transfers control.
- (Call entry): The dynamic instance of an `OpFunctionCall` instruction is program-ordered before the dynamic instances of the `OpFunctionParameter` instructions and the body of the called function.
- (Call exit): The dynamic instance of the instruction following an `OpFunctionCall` instruction is program-ordered after the dynamic instance of the return instruction executed by the called function.
- (Transitive Closure): If dynamic instance A of any instruction is program-ordered before dynamic instance B of any instruction and B is program-ordered before dynamic instance C of any instruction then A is program-ordered before C.

- (Complete definition): No other dynamic instances are program-ordered.

For instructions executed on the host, the source language defines the program-order relation (e.g. as “sequenced-before”).

Scope

Atomic and barrier instructions include scopes which identify sets of shader invocations that **must** obey the requested ordering and atomicity rules of the operation, as defined below.

The various scopes are described in detail in the Shaders chapter.

Atomic Operation

An *atomic operation* on the device is any SPIR-V operation whose name begins with `OpAtomic`. An atomic operation on the host is any operation performed with an std::atomic typed object.

Each atomic operation has a memory scope and a semantics. Informally, the scope determines which other agents it is atomic with respect to, and the semantics constrains its ordering against other memory accesses. Device atomic operations have explicit scopes and semantics. Each host atomic operation implicitly uses the `CrossDevice` scope, and uses a memory semantics equivalent to a C++ std::memory_order value of relaxed, acquire, release, acq_rel, or seq_cst.

Two atomic operations A and B are *potentially-mutually-ordered* if and only if all of the following are true:

- They access the same set of memory locations.
- They use the same reference.
- A is in the instance of B’s memory scope.
- B is in the instance of A’s memory scope.
- A and B are not the same operation (irreflexive).

Two atomic operations A and B are *mutually-ordered* if and only if they are potentially-mutually-ordered and any of the following are true:

- A and B are both device operations.
- A and B are both host operations.

NOTE	If two atomic operations are not mutually-ordered, and if their sets of memory locations overlap, then each **must** be synchronized against the other as if they were non-atomic operations.

Scoped Modification Order

For a given atomic write A, all atomic writes that are mutually-ordered with A occur in an order known as A’s *scoped modification order*. A’s scoped modification order relates no other operations.

NOTE	Invocations outside the instance of A's memory scope **may** observe the values at A's set of memory locations becoming visible to it in an order that disagrees with the scoped modification order.

NOTE	It is valid to have non-atomic operations or atomics in a different scope instance to the same set of memory locations, as long as they are synchronized against each other as if they were non-atomic (if they are not, it is treated as a data race). That means this definition of A's scoped modification order could include atomic operations that occur much later, after intervening non-atomics. That is a bit non-intuitive, but it helps to keep this definition simple and non-circular.

Memory Semantics

Non-atomic memory operations, by default, **may** be observed by one agent in a different order than they were written by another agent.

Atomics and some synchronization operations include *memory semantics*, which are flags that constrain the order in which other memory accesses (including non-atomic memory accesses and availability and visibility operations) performed by the same agent **can** be observed by other agents, or **can** observe accesses by other agents.

Device instructions that include semantics are `OpAtomic*`, `OpControlBarrier`, `OpMemoryBarrier`, and `OpMemoryNamedBarrier`. Host instructions that include semantics are some std::atomic methods and memory fences.

SPIR-V supports the following memory semantics:

- Relaxed: No constraints on order of other memory accesses.
- Acquire: A memory read with this semantic performs an *acquire operation*. A memory barrier with this semantic is an *acquire barrier*.
- Release: A memory write with this semantic performs a *release operation*. A memory barrier with this semantic is a *release barrier*.
- AcquireRelease: A memory read-modify-write operation with this semantic performs both an acquire operation and a release operation, and inherits the limitations on ordering from both of those operations. A memory barrier with this semantic is both a release and acquire barrier.

NOTE	SPIR-V does not support "consume" semantics on the device.

The memory semantics operand also includes *storage class semantics* which indicate which storage classes are constrained by the synchronization. SPIR-V storage class semantics include:

- UniformMemory
- WorkgroupMemory
- ImageMemory
- OutputMemory

Each SPIR-V memory operation accesses a single storage class. Semantics in synchronization operations can include a combination of storage classes.

The UniformMemory storage class semantic applies to accesses to memory in the PhysicalStorageBuffer, Uniform and StorageBuffer storage classes. The WorkgroupMemory storage class semantic applies to accesses to memory in the Workgroup storage class. The ImageMemory storage class semantic applies to accesses to memory in the Image storage class. The OutputMemory storage class semantic applies to accesses to memory in the Output storage class.

NOTE	Informally, these constraints limit how memory operations can be reordered, and these limits apply not only to the order of accesses as performed in the agent that executes the instruction, but also to the order the effects of writes become visible to all other agents within the same instance of the instruction's memory scope.

NOTE	Release and acquire operations in different threads **can** act as synchronization operations, to guarantee that writes that happened before the release are visible after the acquire. (This is not a formal definition, just an Informative forward reference.)

NOTE	The OutputMemory storage class semantic is only useful in tessellation control shaders, which is the only execution model where output variables are shared between invocations.

The memory semantics operand **can** also include availability and visibility flags, which apply availability and visibility operations as described in availability and visibility. The availability/visibility flags are:

- MakeAvailable: Semantics **must** be Release or AcquireRelease. Performs an availability operation before the release operation or barrier.
- MakeVisible: Semantics **must** be Acquire or AcquireRelease. Performs a visibility operation after the acquire operation or barrier.

The specifics of these operations are defined in Availability and Visibility Semantics.

Host atomic operations **may** support a different list of memory semantics and synchronization operations, depending on the host architecture and source language.

Release Sequence

After an atomic operation A performs a release operation on a set of memory locations M, the *release sequence headed by A* is the longest continuous subsequence of A's scoped modification order that consists of:

- the atomic operation A as its first element
- atomic read-modify-write operations on M by any agent

NOTE	The atomics in the last bullet **must** be mutually-ordered with A by virtue of being in

A's scoped modification order.

NOTE This intentionally omits "atomic writes to M performed by the same agent that performed A", which is present in the corresponding C++ definition.

Synchronizes-With

Synchronizes-with is a relation between operations, where each operation is either an atomic operation or a memory barrier (aka fence on the host).

If A and B are atomic operations, then A synchronizes-with B if and only if all of the following are true:

- A performs a release operation
- B performs an acquire operation
- A and B are mutually-ordered
- B reads a value written by A or by an operation in the release sequence headed by A

`OpControlBarrier`, `OpMemoryBarrier`, and `OpMemoryNamedBarrier` are *memory barrier* instructions in SPIR-V.

If A is a release barrier and B is an atomic operation that performs an acquire operation, then A synchronizes-with B if and only if all of the following are true:

- there exists an atomic write X (with any memory semantics)
- A is program-ordered before X
- X and B are mutually-ordered
- B reads a value written by X or by an operation in the release sequence headed by X
    - If X is relaxed, it is still considered to head a hypothetical release sequence for this rule
- A and B are in the instance of each other's memory scopes
- X's storage class is in A's semantics.

If A is an atomic operation that performs a release operation and B is an acquire barrier, then A synchronizes-with B if and only if all of the following are true:

- there exists an atomic read X (with any memory semantics)
- X is program-ordered before B
- X and A are mutually-ordered
- X reads a value written by A or by an operation in the release sequence headed by A
- A and B are in the instance of each other's memory scopes
- X's storage class is in B's semantics.

If A is a release barrier and B is an acquire barrier, then A synchronizes-with B if all of the

following are true:

- there exists an atomic write X (with any memory semantics)
- A is program-ordered before X
- there exists an atomic read Y (with any memory semantics)
- Y is program-ordered before B
- X and Y are mutually-ordered
- Y reads the value written by X or by an operation in the release sequence headed by X
  - If X is relaxed, it is still considered to head a hypothetical release sequence for this rule
- A and B are in the instance of each other's memory scopes
- X's and Y's storage class is in A's and B's semantics.
  - NOTE: X and Y **must** have the same storage class, because they are mutually ordered.

If A is a release barrier, B is an acquire barrier, and C is a control barrier (where A **can** equal C, and B **can** equal C), then A synchronizes-with B if all of the following are true:

- A is program-ordered before (or equals) C
- C is program-ordered before (or equals) B
- A and B are in the instance of each other's memory scopes
- A and B are in the instance of C's execution scope

NOTE	This is similar to the barrier-barrier synchronization above, but with a control barrier filling the role of the relaxed atomics.

No other release and acquire barriers synchronize-with each other.

System-Synchronizes-With

System-synchronizes-with is a relation between arbitrary operations on the device or host. Certain operations system-synchronize-with each other, which informally means the first operation occurs before the second and that the synchronization is performed without using application-visible memory accesses.

If there is an execution dependency between two operations A and B, then the operation in the first synchronization scope system-synchronizes-with the operation in the second synchronization scope.

NOTE	This covers all Vulkan synchronization primitives, including device operations executing before a synchronization primitive is signaled, wait operations happening before subsequent device operations, signal operations happening before host operations that wait on them, and host operations happening before vkQueueSubmit. The list is spread throughout the synchronization chapter, and is not repeated here.

System-synchronizes-with implicitly includes all storage class semantics and has `CrossDevice` scope.

If A system-synchronizes-with B, we also say A is *system-synchronized-before* B and B is *system-synchronized-after* A.

Private vs. Non-Private

By default, non-atomic memory operations are treated as *private*, meaning such a memory operation is not intended to be used for communication with other agents. Memory operations with the NonPrivatePointer/NonPrivateTexel bit set are treated as *non-private*, and are intended to be used for communication with other agents.

More precisely, for private memory operations to be Location-Ordered between distinct agents requires using system-synchronizes-with rather than shader-based synchronization. Private memory operations still obey program-order.

Atomic operations are always considered non-private.

Inter-Thread-Happens-Before

Let SC be a non-empty set of storage class semantics. Then (using template syntax) operation A *inter-thread-happens-before*<SC> operation B if and only if any of the following is true:

- A system-synchronizes-with B
- A synchronizes-with B, and both A and B have all of SC in their semantics
- A is an operation on memory in a storage class in SC or that has all of SC in its semantics, B is a release barrier or release atomic with all of SC in its semantics, and A is program-ordered before B
- A is an acquire barrier or acquire atomic with all of SC in its semantics, B is an operation on memory in a storage class in SC or that has all of SC in its semantics, and A is program-ordered before B
- A and B are both host operations and A inter-thread-happens-before B as defined in the host language specification
- A inter-thread-happens-before<SC> some X and X inter-thread-happens-before<SC> B

Happens-Before

Operation A *happens-before* operation B if and only if any of the following is true:

- A is program-ordered before B
- A inter-thread-happens-before<SC> B for some set of storage classes SC

Happens-after is defined similarly.

NOTE	Unlike C++, happens-before is not always sufficient for a write to be visible to a read. Additional availability and visibility operations **may** be required for writes to

be visible-to other memory accesses.

NOTE Happens-before is not transitive, but each of program-order and inter-thread-happens-before<SC> are transitive. These can be thought of as covering the "single-threaded" case and the "multi-threaded" case, and it is not necessary (and not valid) to form chains between the two.

Availability and Visibility

Availability and *visibility* are states of a write operation, which (informally) track how far the write has permeated the system, i.e. which agents and references are able to observe the write. Availability state is per *memory domain*. Visibility state is per (agent,reference) pair. Availability and visibility states are per-memory location for each write.

Memory domains are named according to the agents whose memory accesses use the domain. Domains used by shader invocations are organized hierarchically into multiple smaller memory domains which correspond to the different scopes. Each memory domain is considered the *dual* of a scope, and vice versa. The memory domains defined in Vulkan include:

- *host* - accessible by host agents
- *device* - accessible by all device agents for a particular device
- *shader* - accessible by shader agents for a particular device, corresponding to the `Device` scope
- *queue family instance* - accessible by shader agents in a single queue family, corresponding to the `QueueFamily` scope.
- *workgroup instance* - accessible by shader agents in the same workgroup, corresponding to the `Workgroup` scope.
- *subgroup instance* - accessible by shader agents in the same subgroup, corresponding to the `Subgroup` scope.

The memory domains are nested in the order listed above, with memory domains later in the list nested in the domains earlier in the list.

NOTE Memory domains do not correspond to storage classes or device-local and host-local VkDeviceMemory allocations, rather they indicate whether a write can be made visible only to agents in the same subgroup, same workgroup, in any shader invocation, or anywhere on the device, or host. The shader, queue family instance, workgroup instance, and subgroup instance domains are only used for shader-based availability/visibility operations, in other cases writes can be made available from/visible to the shader via the device domain.

Availability operations, *visibility operations*, and *memory domain operations* alter the state of the write operations that happen-before them, and which are included in their *source scope* to be available or visible to their *destination scope*.

- For an availability operation, the source scope is a set of (agent,reference,memory location) tuples, and the destination scope is a set of memory domains.

- For a memory domain operation, the source scope is a memory domain and the destination scope is a memory domain.
- For a visibility operation, the source scope is a set of memory domains and the destination scope is a set of (agent,reference,memory location) tuples.

How the scopes are determined depends on the specific operation. Availability and memory domain operations expand the set of memory domains to which the write is available. Visibility operations expand the set of (agent,reference,memory location) tuples to which the write is visible.

Recall that availability and visibility states are per-memory location, and let W be a write operation to one or more locations performed by agent A via reference R. Let L be one of the locations written. (W,L) (the write W to L), is initially not available to any memory domain and only visible to (A,R,L). An availability operation AV that happens-after W and that includes (A,R,L) in its source scope makes (W,L) *available* to the memory domains in its destination scope.

A memory domain operation DOM that happens-after AV and for which (W,L) is available in the source scope makes (W,L) available in the destination memory domain.

A visibility operation VIS that happens-after AV (or DOM) and for which (W,L) is available in any domain in the source scope makes (W,L) *visible* to all (agent,reference,L) tuples included in its destination scope.

If write W_2 happens-after W, and their sets of memory locations overlap, then W will not be available/visible to all agents/references for those memory locations that overlap (and future AV/DOM/VIS ops cannot revive W's write to those locations).

Availability, memory domain, and visibility operations are treated like other non-atomic memory accesses for the purpose of memory semantics, meaning they can be ordered by release-acquire sequences or memory barriers.

An *availability chain* is a sequence of availability operations to increasingly broad memory domains, where element N+1 of the chain is performed in the dual scope instance of the destination memory domain of element N and element N happens-before element N+1. An example is an availability operation with destination scope of the workgroup instance domain that happens-before an availability operation to the shader domain performed by an invocation in the same workgroup. An availability chain AVC that happens-after W and that includes (A,R,L) in the source scope makes (W,L) *available* to the memory domains in its final destination scope. An availability chain with a single element is just the availability operation.

Similarly, a *visibility chain* is a sequence of visibility operations from increasingly narrow memory domains, where element N of the chain is performed in the dual scope instance of the source memory domain of element N+1 and element N happens-before element N+1. An example is a visibility operation with source scope of the shader domain that happens-before a visibility operation with source scope of the workgroup instance domain performed by an invocation in the same workgroup. A visibility chain VISC that happens-after AVC (or DOM) and for which (W,L) is available in any domain in the source scope makes (W,L) *visible* to all (agent,reference,L) tuples included in its final destination scope. A visibility chain with a single element is just the visibility operation.

Availability, Visibility, and Domain Operations

The following operations generate availability, visibility, and domain operations. When multiple availability/visibility/domain operations are described, they are system-synchronized-with each other in the order listed.

An operation that performs a memory dependency generates:

- If the source access mask includes `VK_ACCESS_HOST_WRITE_BIT`, then the dependency includes a memory domain operation from host domain to device domain.
- An availability operation with source scope of all writes in the first access scope of the dependency and a destination scope of the device domain.
- A visibility operation with source scope of the device domain and destination scope of the second access scope of the dependency.
- If the destination access mask includes `VK_ACCESS_HOST_READ_BIT` or `VK_ACCESS_HOST_WRITE_BIT`, then the dependency includes a memory domain operation from device domain to host domain.

vkFlushMappedMemoryRanges performs an availability operation, with a source scope of (agents,references) = (all host threads, all mapped memory ranges passed to the command), and destination scope of the host domain.

vkInvalidateMappedMemoryRanges performs a visibility operation, with a source scope of the host domain and a destination scope of (agents,references) = (all host threads, all mapped memory ranges passed to the command).

vkQueueSubmit performs a memory domain operation from host to device, and a visibility operation with source scope of the device domain and destination scope of all agents and references on the device.

Availability and Visibility Semantics

A memory barrier or atomic operation via agent A that includes MakeAvailable in its semantics performs an availability operation whose source scope includes agent A and all references in the storage classes in that instruction's storage class semantics, and all memory locations, and whose destination scope is a set of memory domains selected as specified below. The implicit availability operation is program-ordered between the barrier or atomic and all other operations program-ordered before the barrier or atomic.

A memory barrier or atomic operation via agent A that includes MakeVisible in its semantics performs a visibility operation whose source scope is a set of memory domains selected as specified below, and whose destination scope includes agent A and all references in the storage classes in that instruction's storage class semantics, and all memory locations. The implicit visibility operation is program-ordered between the barrier or atomic and all other operations program-ordered after the barrier or atomic.

The memory domains are selected based on the memory scope of the instruction as follows:

- `Device` scope uses the shader domain

- `QueueFamily` scope uses the queue family instance domain
- `Workgroup` scope uses the workgroup instance domain
- `Subgroup` uses the subgroup instance domain
- `Invocation` perform no availability/visibility operations.

When an availability operation performed by an agent A includes a memory domain D in its destination scope, where D corresponds to scope instance S, it also includes the memory domains that correspond to each smaller scope instance S' that is a subset of S and that includes A. Similarly for visibility operations.

Per-Instruction Availability and Visibility Semantics

A memory write instruction that includes MakePointerAvailable, or an image write instruction that includes MakeTexelAvailable, performs an availability operation whose source scope includes the agent and reference used to perform the write and the memory locations written by the instruction, and whose destination scope is a set of memory domains selected by the Scope operand specified in Availability and Visibility Semantics. The implicit availability operation is program-ordered between the write and all other operations program-ordered after the write.

A memory read instruction that includes MakePointerVisible, or an image read instruction that includes MakeTexelVisible, performs a visibility operation whose source scope is a set of memory domains selected by the Scope operand as specified in Availability and Visibility Semantics, and whose destination scope includes the agent and reference used to perform the read and the memory locations read by the instruction. The implicit visibility operation is program-ordered between read and all other operations program-ordered before the read.

NOTE	Although reads with per-instruction visibility only perform visibility ops from the shader or workgroup instance or subgroup instance domain, they will also see writes that were made visible via the device domain, i.e. those writes previously performed by non-shader agents and made visible via API commands.

NOTE	It is expected that all invocations in a subgroup execute on the same processor with the same path to memory, and thus availability and visibility operations with subgroup scope can be expected to be “free”.

Location-Ordered

Let X and Y be memory accesses to overlapping sets of memory locations M, where X != Y. Let (A_X,R_X) be the agent and reference used for X, and (A_Y,R_Y) be the agent and reference used for Y. For now, let “→” denote happens-before and “$\rightarrow^{rcpo}$” denote the reflexive closure of program-ordered before.

If D_1 and D_2 are different memory domains, then let DOM(D_1,D_2) be a memory domain operation from D_1 to D_2. Otherwise, let DOM(D,D) be a placeholder such that X→DOM(D,D)→Y if and only if X→Y.

X is *location-ordered* before Y for a location L in M if and only if any of the following is true:

- A_X == A_Y and R_X == R_Y and $X \rightarrow Y$
  - NOTE: this case means no availability/visibility ops are required when it is the same (agent,reference).
- X is a read, both X and Y are non-private, and $X \rightarrow Y$
- X is a read, and X (transitively) system-synchronizes with Y
- If R_X == R_Y and A_X and A_Y access a common memory domain D (e.g. are in the same workgroup instance if D is the workgroup instance domain), and both X and Y are non-private:
  - X is a write, Y is a write, $AVC(A_X,R_X,D,L)$ is an availability chain making (X,L) available to domain D, and $X \rightarrow^{rcpo} AVC(A_X,R_X,D,L) \rightarrow Y$
  - X is a write, Y is a read, $AVC(A_X,R_X,D,L)$ is an availability chain making (X,L) available to domain D, $VISC(A_Y,R_Y,D,L)$ is a visibility chain making writes to L available in domain D visible to Y, and $X \rightarrow^{rcpo} AVC(A_X,R_X,D,L) \rightarrow VISC(A_Y,R_Y,D,L) \rightarrow^{rcpo} Y$
  - If VkPhysicalDeviceVulkanMemoryModelFeatures::`vulkanMemoryModelAvailabilityVisibilityChains` is `VK_FALSE`, then AVC and VISC **must** each only have a single element in the chain, in each sub-bullet above.
- Let D_X and D_Y each be either the device domain or the host domain, depending on whether A_X and A_Y execute on the device or host:
  - X is a write and Y is a write, and $X \rightarrow AV(A_X,R_X,D_X,L) \rightarrow DOM(D_X,D_Y) \rightarrow Y$
  - X is a write and Y is a read, and $X \rightarrow AV(A_X,R_X,D_X,L) \rightarrow DOM(D_X,D_Y) \rightarrow VIS(A_Y,R_Y,D_Y,L) \rightarrow Y$

NOTE	The final bullet (synchronization through device/host domain) requires API-level synchronization operations, since the device/host domains are not accessible via shader instructions. And “device domain” is not to be confused with “device scope”, which synchronizes through the “shader domain”.

Data Race

Let X and Y be operations that access overlapping sets of memory locations M, where X != Y, and at least one of X and Y is a write, and X and Y are not mutually-ordered atomic operations. If there does not exist a location-ordered relation between X and Y for each location in M, then there is a *data race*.

Applications **must** ensure that no data races occur during the execution of their application.

NOTE	Data races can only occur due to instructions that are actually executed. For example, an instruction skipped due to control flow must not contribute to a data race.

Visible-To

Let X be a write and Y be a read whose sets of memory locations overlap, and let M be the set of memory locations that overlap. Let M_2 be a non-empty subset of M. Then X is *visible-to* Y for memory locations M_2 if and only if all of the following are true:

- X is location-ordered before Y for each location L in M_2.
- There does not exist another write Z to any location L in M_2 such that X is location-ordered before Z for location L and Z is location-ordered before Y for location L.

If X is visible-to Y, then Y reads the value written by X for locations M_2.

NOTE	It is possible for there to be a write between X and Y that overwrites a subset of the memory locations, but the remaining memory locations (M_2) will still be visible-to Y.

Acyclicity

Reads-from is a relation between operations, where the first operation is a write, the second operation is a read, and the second operation reads the value written by the first operation. *From-reads* is a relation between operations, where the first operation is a read, the second operation is a write, and the first operation reads a value written earlier than the second operation in the second operation's scoped modification order or location order (or the first operation reads from the initial value, and the second operation is any write to the same locations).

Then the implementation **must** guarantee that no cycles exist in the union of the following relations:

- location-ordered
- scoped modification order (over all atomic writes)
- reads-from
- from-reads

NOTE	This is a "consistency" axiom, which informally guarantees that sequences of operations cannot violate causality.

Scoped Modification Order Coherence

Let A and B be mutually-ordered atomic operations, where A is location-ordered before B. Then the following rules are a consequence of acyclicity:

- If A and B are both reads and A does not read the initial value, then the write that A takes its value from **must** be earlier in its own scoped modification order than (or the same as) the write that B takes its value from (no cycles between location-order, reads-from, and from-reads).
- If A is a read and B is a write and A does not read the initial value, then A **must** take its value from a write earlier than B in B's scoped modification order (no cycles between location-order, scope modification order, and reads-from).
- If A is a write and B is a read, then B **must** take its value from A or a write later than A in A's scoped modification order (no cycles between location-order, scoped modification order, and from-reads).
- If A and B are both writes, then A **must** be earlier than B in A's scoped modification order (no cycles between location-order and scoped modification order).

- If A is a write and B is a read-modify-write and B reads the value written by A, then B comes immediately after A in A's scoped modification order (no cycles between scoped modification order and from-reads).

Shader I/O

If a shader invocation A in a shader stage other than `Vertex` performs a memory read operation X from an object in storage class `Input`, then X is system-synchronized-after all writes to the corresponding `Output` storage variable(s) in the shader invocation(s) that contribute to generating invocation A, and those writes are all visible-to X.

NOTE	It is not necessary for the upstream shader invocations to have completed execution, they only need to have generated the output that is being read.

Deallocation

A call to vkFreeMemory **must** happen-after all memory operations on all memory locations in that VkDeviceMemory object.

NOTE	Normally, device memory operations in a given queue are synchronized with vkFreeMemory by having a host thread wait on a fence signaled by that queue, and the wait happens-before the call to vkFreeMemory on the host.

The deallocation of SPIR-V variables is managed by the system and happens-after all operations on those variables.

Descriptions (Informative)

This subsection offers more easily understandable consequences of the memory model for app/compiler developers.

Let SC be the storage class(es) specified by a release or acquire operation or barrier.

- An atomic write with release semantics must not be reordered against any read or write to SC that is program-ordered before it (regardless of the storage class the atomic is in).
- An atomic read with acquire semantics must not be reordered against any read or write to SC that is program-ordered after it (regardless of the storage class the atomic is in).
- Any write to SC program-ordered after a release barrier must not be reordered against any read or write to SC program-ordered before that barrier.
- Any read from SC program-ordered before an acquire barrier must not be reordered against any read or write to SC program-ordered after the barrier.

A control barrier (even if it has no memory semantics) must not be reordered against any memory barriers.

This memory model allows memory accesses with and without availability and visibility

operations, as well as atomic operations, all to be performed on the same memory location. This is critical to allow it to reason about memory that is reused in multiple ways, e.g. across the lifetime of different shader invocations or draw calls. While GLSL (and legacy SPIR-V) applies the “coherent” decoration to variables (for historical reasons), this model treats each memory access instruction as having optional implicit availability/visibility operations. GLSL to SPIR-V compilers should map all (non-atomic) operations on a coherent variable to Make{Pointer,Texel}{Available}{Visible} flags in this model.

Atomic operations implicitly have availability/visibility operations, and the scope of those operations is taken from the atomic operation’s scope.

Tessellation Output Ordering

For SPIR-V that uses the Vulkan Memory Model, the `OutputMemory` storage class is used to synchronize accesses to tessellation control output variables. For legacy SPIR-V that does not enable the Vulkan Memory Model via `OpMemoryModel`, tessellation outputs can be ordered using a control barrier with no particular memory scope or semantics, as defined below.

Let X and Y be memory operations performed by shader invocations A_X and A_Y. Operation X is *tessellation-output-ordered* before operation Y if and only if all of the following are true:

- There is a dynamic instance of an `OpControlBarrier` instruction C such that X is program-ordered before C in A_X and C is program-ordered before Y in A_Y.
- A_X and A_Y are in the same instance of C’s execution scope.

If shader invocations A_X and A_Y in the `TessellationControl` execution model execute memory operations X and Y, respectively, on the `Output` storage class, and X is tessellation-output-ordered before Y with a scope of `Workgroup`, then X is location-ordered before Y, and if X is a write and Y is a read then X is visible-to Y.

Appendix C: Compressed Image Formats

The compressed texture formats used by Vulkan are described in the specifically identified sections of the Khronos Data Format Specification, version 1.3.

Unless otherwise described, the quantities encoded in these compressed formats are treated as normalized, unsigned values.

Those formats listed as sRGB-encoded have in-memory representations of R, G and B components which are nonlinearly-encoded as R', G', and B'; any alpha component is unchanged. As part of filtering, the nonlinear R', G', and B' values are converted to linear R, G, and B components; any alpha component is unchanged. The conversion between linear and nonlinear encoding is performed as described in the “KHR_DF_TRANSFER_SRGB” section of the Khronos Data Format Specification.

Block-Compressed Image Formats

BC1, BC2 and BC3 formats are described in “S3TC Compressed Texture Image Formats” chapter of the Khronos Data Format Specification. BC4 and BC5 are described in the “RGTC Compressed Texture Image Formats” chapter. BC6H and BC7 are described in the “BPTC Compressed Texture Image Formats” chapter.

Table 69. Mapping of Vulkan BC Formats to Descriptions

VkFormat	Khronos Data Format Specification description
Formats described in the “S3TC Compressed Texture Image Formats” chapter	
VK_FORMAT_BC1_RGB_UNORM_BLOCK	BC1 with no alpha
VK_FORMAT_BC1_RGB_SRGB_BLOCK	BC1 with no alpha, sRGB-encoded
VK_FORMAT_BC1_RGBA_UNORM_BLOCK	BC1 with alpha
VK_FORMAT_BC1_RGBA_SRGB_BLOCK	BC1 with alpha, sRGB-encoded
VK_FORMAT_BC2_UNORM_BLOCK	BC2
VK_FORMAT_BC2_SRGB_BLOCK	BC2, sRGB-encoded
VK_FORMAT_BC3_UNORM_BLOCK	BC3
VK_FORMAT_BC3_SRGB_BLOCK	BC3, sRGB-encoded
Formats described in the “RGTC Compressed Texture Image Formats” chapter	
VK_FORMAT_BC4_UNORM_BLOCK	BC4 unsigned
VK_FORMAT_BC4_SNORM_BLOCK	BC4 signed
VK_FORMAT_BC5_UNORM_BLOCK	BC5 unsigned
VK_FORMAT_BC5_SNORM_BLOCK	BC5 signed
Formats described in the “BPTC Compressed Texture Image Formats” chapter	
VK_FORMAT_BC6H_UFLOAT_BLOCK	BC6H (unsigned version)
VK_FORMAT_BC6H_SFLOAT_BLOCK	BC6H (signed version)
VK_FORMAT_BC7_UNORM_BLOCK	BC7
VK_FORMAT_BC7_SRGB_BLOCK	BC7, sRGB-encoded

ETC Compressed Image Formats

The following formats are described in the “ETC2 Compressed Texture Image Formats” chapter of the Khronos Data Format Specification.

Table 70. Mapping of Vulkan ETC Formats to Descriptions

VkFormat	Khronos Data Format Specification description
VK_FORMAT_ETC2_R8G8B8_UNORM_BLOCK	RGB ETC2
VK_FORMAT_ETC2_R8G8B8_SRGB_BLOCK	RGB ETC2 with sRGB encoding
VK_FORMAT_ETC2_R8G8B8A1_UNORM_BLOCK	RGB ETC2 with punch-through alpha
VK_FORMAT_ETC2_R8G8B8A1_SRGB_BLOCK	RGB ETC2 with punch-through alpha and sRGB
VK_FORMAT_ETC2_R8G8B8A8_UNORM_BLOCK	RGBA ETC2
VK_FORMAT_ETC2_R8G8B8A8_SRGB_BLOCK	RGBA ETC2 with sRGB encoding
VK_FORMAT_EAC_R11_UNORM_BLOCK	Unsigned R11 EAC
VK_FORMAT_EAC_R11_SNORM_BLOCK	Signed R11 EAC
VK_FORMAT_EAC_R11G11_UNORM_BLOCK	Unsigned RG11 EAC
VK_FORMAT_EAC_R11G11_SNORM_BLOCK	Signed RG11 EAC

ASTC Compressed Image Formats

ASTC formats are described in the “ASTC Compressed Texture Image Formats” chapter of the Khronos Data Format Specification.

Table 71. Mapping of Vulkan ASTC Formats to Descriptions

VkFormat	Compressed texel block dimensions	Requested mode
VK_FORMAT_ASTC_4x4_UNORM_BLOCK	4 × 4	Linear LDR
VK_FORMAT_ASTC_4x4_SRGB_BLOCK	4 × 4	sRGB
VK_FORMAT_ASTC_5x4_UNORM_BLOCK	5 × 4	Linear LDR
VK_FORMAT_ASTC_5x4_SRGB_BLOCK	5 × 4	sRGB
VK_FORMAT_ASTC_5x5_UNORM_BLOCK	5 × 5	Linear LDR
VK_FORMAT_ASTC_5x5_SRGB_BLOCK	5 × 5	sRGB
VK_FORMAT_ASTC_6x5_UNORM_BLOCK	6 × 5	Linear LDR
VK_FORMAT_ASTC_6x5_SRGB_BLOCK	6 × 5	sRGB
VK_FORMAT_ASTC_6x6_UNORM_BLOCK	6 × 6	Linear LDR
VK_FORMAT_ASTC_6x6_SRGB_BLOCK	6 × 6	sRGB
VK_FORMAT_ASTC_8x5_UNORM_BLOCK	8 × 5	Linear LDR
VK_FORMAT_ASTC_8x5_SRGB_BLOCK	8 × 5	sRGB
VK_FORMAT_ASTC_8x6_UNORM_BLOCK	8 × 6	Linear LDR
VK_FORMAT_ASTC_8x6_SRGB_BLOCK	8 × 6	sRGB
VK_FORMAT_ASTC_8x8_UNORM_BLOCK	8 × 8	Linear LDR
VK_FORMAT_ASTC_8x8_SRGB_BLOCK	8 × 8	sRGB
VK_FORMAT_ASTC_10x5_UNORM_BLOCK	10 × 5	Linear LDR
VK_FORMAT_ASTC_10x5_SRGB_BLOCK	10 × 5	sRGB
VK_FORMAT_ASTC_10x6_UNORM_BLOCK	10 × 6	Linear LDR
VK_FORMAT_ASTC_10x6_SRGB_BLOCK	10 × 6	sRGB
VK_FORMAT_ASTC_10x8_UNORM_BLOCK	10 × 8	Linear LDR
VK_FORMAT_ASTC_10x8_SRGB_BLOCK	10 × 8	sRGB
VK_FORMAT_ASTC_10x10_UNORM_BLOCK	10 × 10	Linear LDR
VK_FORMAT_ASTC_10x10_SRGB_BLOCK	10 × 10	sRGB
VK_FORMAT_ASTC_12x10_UNORM_BLOCK	12 × 10	Linear LDR
VK_FORMAT_ASTC_12x10_SRGB_BLOCK	12 × 10	sRGB
VK_FORMAT_ASTC_12x12_UNORM_BLOCK	12 × 12	Linear LDR

VkFormat	Compressed texel block dimensions	Requested mode
VK_FORMAT_ASTC_12x12_SRGB_BLOCK	12 × 12	sRGB
VK_FORMAT_ASTC_4x4_SFLOAT_BLOCK	4 × 4	HDR
VK_FORMAT_ASTC_5x4_SFLOAT_BLOCK	5 × 4	HDR
VK_FORMAT_ASTC_5x5_SFLOAT_BLOCK	5 × 5	HDR
VK_FORMAT_ASTC_6x5_SFLOAT_BLOCK	6 × 5	HDR
VK_FORMAT_ASTC_6x6_SFLOAT_BLOCK	6 × 6	HDR
VK_FORMAT_ASTC_8x5_SFLOAT_BLOCK	8 × 5	HDR
VK_FORMAT_ASTC_8x6_SFLOAT_BLOCK	8 × 6	HDR
VK_FORMAT_ASTC_8x8_SFLOAT_BLOCK	8 × 8	HDR
VK_FORMAT_ASTC_10x5_SFLOAT_BLOCK	10 × 5	HDR
VK_FORMAT_ASTC_10x6_SFLOAT_BLOCK	10 × 6	HDR
VK_FORMAT_ASTC_10x8_SFLOAT_BLOCK	10 × 8	HDR
VK_FORMAT_ASTC_10x10_SFLOAT_BLOCK	10 × 10	HDR
VK_FORMAT_ASTC_12x10_SFLOAT_BLOCK	12 × 10	HDR
VK_FORMAT_ASTC_12x12_SFLOAT_BLOCK	12 × 12	HDR

ASTC textures containing HDR block encodings **should** be passed to the API using an ASTC SFLOAT texture format.

NOTE An HDR block in a texture passed using a LDR UNORM format will return the appropriate ASTC error color if the implementation supports only the ASTC LDR profile, but may result in either the error color or a decompressed HDR color if the implementation supports HDR decoding.

The ASTC decode mode is decode_float16.

Note that an implementation **may** use HDR mode when linear LDR mode is requested.

Appendix D: Core Revisions (Informative)

New minor versions of the Vulkan API are defined periodically by the Khronos Vulkan Working Group. These consist of some amount of additional functionality added to the core API, potentially including both new functionality and functionality promoted from extensions.

It is possible to build the specification for earlier versions, but to aid readability of the latest versions, this appendix gives an overview of the changes as compared to earlier versions.

Vulkan Version 1.3

Vulkan Version 1.3 promoted a number of key extensions into the core API:

- VK_KHR_copy_commands2
- VK_KHR_dynamic_rendering
- VK_KHR_format_feature_flags2
- VK_KHR_maintenance4
- VK_KHR_shader_integer_dot_product
- VK_KHR_shader_non_semantic_info
- VK_KHR_shader_terminate_invocation
- VK_KHR_synchronization2
- VK_KHR_zero_initialize_workgroup_memory
- VK_EXT_4444_formats
- VK_EXT_extended_dynamic_state
- VK_EXT_extended_dynamic_state2
- VK_EXT_image_robustness
- VK_EXT_inline_uniform_block
- VK_EXT_pipeline_creation_cache_control
- VK_EXT_pipeline_creation_feedback
- VK_EXT_private_data
- VK_EXT_shader_demote_to_helper_invocation
- VK_EXT_subgroup_size_control
- VK_EXT_texel_buffer_alignment
- VK_EXT_texture_compression_astc_hdr
- VK_EXT_tooling_info
- VK_EXT_ycbcr_2plane_444_formats

All differences in behavior between these extensions and the corresponding Vulkan 1.3 functionality are summarized below.

Differences Relative to `VK_EXT_4444_formats`

If the `VK_EXT_4444_formats` extension is not supported, support for all formats defined by it are optional in Vulkan 1.3. There are no members in the VkPhysicalDeviceVulkan13Features structure corresponding to the `VkPhysicalDevice4444FormatsFeaturesEXT` structure.

Differences Relative to `VK_EXT_extended_dynamic_state`

All dynamic state enumerants and commands defined by `VK_EXT_extended_dynamic_state` are required in Vulkan 1.3. There are no members in the VkPhysicalDeviceVulkan13Features structure corresponding to the `VkPhysicalDeviceExtendedDynamicStateFeaturesEXT` structure.

Differences Relative to `VK_EXT_extended_dynamic_state2`

The optional dynamic state enumerants and commands defined by `VK_EXT_extended_dynamic_state2` for patch control points and logic op are not promoted in Vulkan 1.3. There are no members in the VkPhysicalDeviceVulkan13Features structure corresponding to the `VkPhysicalDeviceExtendedDynamicState2FeaturesEXT` structure.

Differences Relative to `VK_EXT_texel_buffer_alignment`

The more specific alignment requirements defined by VkPhysicalDeviceTexelBufferAlignmentProperties are required in Vulkan 1.3. There are no members in the VkPhysicalDeviceVulkan13Features structure corresponding to the `VkPhysicalDeviceTexelBufferAlignmentFeaturesEXT` structure. The `texelBufferAlignment` feature is enabled if using a Vulkan 1.3 instance.

Differences Relative to `VK_EXT_texture_compression_astc_hdr`

If the `VK_EXT_texture_compression_astc_hdr` extension is not supported, support for all formats defined by it are optional in Vulkan 1.3. The `textureCompressionASTC_HDR` member of VkPhysicalDeviceVulkan13Features indicates whether a Vulkan 1.3 implementation supports these formats.

Differences Relative to `VK_EXT_ycbcr_2plane_444_formats`

If the `VK_EXT_ycbcr_2plane_444_formats` extension is not supported, support for all formats defined by it are optional in Vulkan 1.3. There are no members in the VkPhysicalDeviceVulkan13Features structure corresponding to the `VkPhysicalDeviceYcbcr2Plane444FormatsFeaturesEXT` structure.

Additional Vulkan 1.3 Feature Support

In addition to the promoted extensions described above, Vulkan 1.3 added required support for:

- SPIR-V version 1.6
  - SPIR-V 1.6 deprecates (but does not remove) the `WorkgroupSize` decoration.
- The `bufferDeviceAddress` feature which indicates support for accessing memory in shaders as storage buffers via vkGetBufferDeviceAddress.
- The `vulkanMemoryModel` and `vulkanMemoryModelDeviceScope` features, which indicate support for the corresponding Vulkan Memory Model capabilities.

- The `maxInlineUniformTotalSize` limit is added to provide the total size of all inline uniform block bindings in a pipeline layout.

New Macros

- VK_API_VERSION_1_3

New Base Types

- VkFlags64

New Object Types

- VkPrivateDataSlot

New Commands

- vkCmdBeginRendering
- vkCmdBindVertexBuffers2
- vkCmdBlitImage2
- vkCmdCopyBuffer2
- vkCmdCopyBufferToImage2
- vkCmdCopyImage2
- vkCmdCopyImageToBuffer2
- vkCmdEndRendering
- vkCmdPipelineBarrier2
- vkCmdResetEvent2
- vkCmdResolveImage2
- vkCmdSetCullMode
- vkCmdSetDepthBiasEnable
- vkCmdSetDepthBoundsTestEnable
- vkCmdSetDepthCompareOp
- vkCmdSetDepthTestEnable
- vkCmdSetDepthWriteEnable
- vkCmdSetEvent2
- vkCmdSetFrontFace
- vkCmdSetPrimitiveRestartEnable
- vkCmdSetPrimitiveTopology
- vkCmdSetRasterizerDiscardEnable
- vkCmdSetScissorWithCount

- vkCmdSetStencilOp
- vkCmdSetStencilTestEnable
- vkCmdSetViewportWithCount
- vkCmdWaitEvents2
- vkCmdWriteTimestamp2
- vkCreatePrivateDataSlot
- vkDestroyPrivateDataSlot
- vkGetDeviceBufferMemoryRequirements
- vkGetDeviceImageMemoryRequirements
- vkGetDeviceImageSparseMemoryRequirements
- vkGetPhysicalDeviceToolProperties
- vkGetPrivateData
- vkQueueSubmit2
- vkSetPrivateData

New Structures

- VkBlitImageInfo2
- VkBufferCopy2
- VkBufferImageCopy2
- VkBufferMemoryBarrier2
- VkCommandBufferSubmitInfo
- VkCopyBufferInfo2
- VkCopyBufferToImageInfo2
- VkCopyImageInfo2
- VkCopyImageToBufferInfo2
- VkDependencyInfo
- VkDeviceBufferMemoryRequirements
- VkDeviceImageMemoryRequirements
- VkImageBlit2
- VkImageCopy2
- VkImageMemoryBarrier2
- VkImageResolve2
- VkPhysicalDeviceToolProperties
- VkPipelineCreationFeedback
- VkPrivateDataSlotCreateInfo

- VkRenderingAttachmentInfo
- VkRenderingInfo
- VkResolveImageInfo2
- VkSemaphoreSubmitInfo
- VkSubmitInfo2
- Extending VkCommandBufferInheritanceInfo:
  - VkCommandBufferInheritanceRenderingInfo
- Extending VkDescriptorPoolCreateInfo:
  - VkDescriptorPoolInlineUniformBlockCreateInfo
- Extending VkDeviceCreateInfo:
  - VkDevicePrivateDataCreateInfo
- Extending VkFormatProperties2:
  - VkFormatProperties3
- Extending VkGraphicsPipelineCreateInfo:
  - VkPipelineRenderingCreateInfo
- Extending VkGraphicsPipelineCreateInfo, VkComputePipelineCreateInfo, `VkRayTracingPipelineCreateInfoNV`, `VkRayTracingPipelineCreateInfoKHR`, `VkExecutionGraphPipelineCreateInfoAMDX`:
  - VkPipelineCreationFeedbackCreateInfo
- Extending VkPhysicalDeviceFeatures2, VkDeviceCreateInfo:
  - VkPhysicalDeviceDynamicRenderingFeatures
  - VkPhysicalDeviceImageRobustnessFeatures
  - VkPhysicalDeviceInlineUniformBlockFeatures
  - VkPhysicalDeviceMaintenance4Features
  - VkPhysicalDevicePipelineCreationCacheControlFeatures
  - VkPhysicalDevicePrivateDataFeatures
  - VkPhysicalDeviceShaderDemoteToHelperInvocationFeatures
  - VkPhysicalDeviceShaderIntegerDotProductFeatures
  - VkPhysicalDeviceShaderTerminateInvocationFeatures
  - VkPhysicalDeviceSubgroupSizeControlFeatures
  - VkPhysicalDeviceSynchronization2Features
  - VkPhysicalDeviceTextureCompressionASTCHDRFeatures
  - VkPhysicalDeviceVulkan13Features
  - VkPhysicalDeviceZeroInitializeWorkgroupMemoryFeatures
- Extending VkPhysicalDeviceProperties2:

    - VkPhysicalDeviceInlineUniformBlockProperties
    - VkPhysicalDeviceMaintenance4Properties
    - VkPhysicalDeviceShaderIntegerDotProductProperties
    - VkPhysicalDeviceSubgroupSizeControlProperties
    - VkPhysicalDeviceTexelBufferAlignmentProperties
    - VkPhysicalDeviceVulkan13Properties
- Extending VkPipelineShaderStageCreateInfo, `VkShaderCreateInfoEXT`:
    - VkPipelineShaderStageRequiredSubgroupSizeCreateInfo
- Extending VkSubpassDependency2:
    - VkMemoryBarrier2
- Extending VkWriteDescriptorSet:
    - VkWriteDescriptorSetInlineUniformBlock

New Enums

- VkAccessFlagBits2
- VkFormatFeatureFlagBits2
- VkPipelineCreationFeedbackFlagBits
- VkPipelineStageFlagBits2
- VkRenderingFlagBits
- VkSubmitFlagBits
- VkToolPurposeFlagBits

New Bitmasks

- VkAccessFlags2
- VkFormatFeatureFlags2
- VkPipelineCreationFeedbackFlags
- VkPipelineStageFlags2
- VkPrivateDataSlotCreateFlags
- VkRenderingFlags
- VkSubmitFlags
- VkToolPurposeFlags

New Enum Constants

- Extending VkAccessFlagBits:
    - `VK_ACCESS_NONE`

- Extending VkAttachmentStoreOp:
  - VK_ATTACHMENT_STORE_OP_NONE
- Extending VkDescriptorType:
  - VK_DESCRIPTOR_TYPE_INLINE_UNIFORM_BLOCK
- Extending VkDynamicState:
  - VK_DYNAMIC_STATE_CULL_MODE
  - VK_DYNAMIC_STATE_DEPTH_BIAS_ENABLE
  - VK_DYNAMIC_STATE_DEPTH_BOUNDS_TEST_ENABLE
  - VK_DYNAMIC_STATE_DEPTH_COMPARE_OP
  - VK_DYNAMIC_STATE_DEPTH_TEST_ENABLE
  - VK_DYNAMIC_STATE_DEPTH_WRITE_ENABLE
  - VK_DYNAMIC_STATE_FRONT_FACE
  - VK_DYNAMIC_STATE_PRIMITIVE_RESTART_ENABLE
  - VK_DYNAMIC_STATE_PRIMITIVE_TOPOLOGY
  - VK_DYNAMIC_STATE_RASTERIZER_DISCARD_ENABLE
  - VK_DYNAMIC_STATE_SCISSOR_WITH_COUNT
  - VK_DYNAMIC_STATE_STENCIL_OP
  - VK_DYNAMIC_STATE_STENCIL_TEST_ENABLE
  - VK_DYNAMIC_STATE_VERTEX_INPUT_BINDING_STRIDE
  - VK_DYNAMIC_STATE_VIEWPORT_WITH_COUNT
- Extending VkEventCreateFlagBits:
  - VK_EVENT_CREATE_DEVICE_ONLY_BIT
- Extending VkFormat:
  - VK_FORMAT_A4B4G4R4_UNORM_PACK16
  - VK_FORMAT_A4R4G4B4_UNORM_PACK16
  - VK_FORMAT_ASTC_10x10_SFLOAT_BLOCK
  - VK_FORMAT_ASTC_10x5_SFLOAT_BLOCK
  - VK_FORMAT_ASTC_10x6_SFLOAT_BLOCK
  - VK_FORMAT_ASTC_10x8_SFLOAT_BLOCK
  - VK_FORMAT_ASTC_12x10_SFLOAT_BLOCK
  - VK_FORMAT_ASTC_12x12_SFLOAT_BLOCK
  - VK_FORMAT_ASTC_4x4_SFLOAT_BLOCK
  - VK_FORMAT_ASTC_5x4_SFLOAT_BLOCK
  - VK_FORMAT_ASTC_5x5_SFLOAT_BLOCK
  - VK_FORMAT_ASTC_6x5_SFLOAT_BLOCK

    - VK_FORMAT_ASTC_6x6_SFLOAT_BLOCK
    - VK_FORMAT_ASTC_8x5_SFLOAT_BLOCK
    - VK_FORMAT_ASTC_8x6_SFLOAT_BLOCK
    - VK_FORMAT_ASTC_8x8_SFLOAT_BLOCK
    - VK_FORMAT_G10X6_B10X6R10X6_2PLANE_444_UNORM_3PACK16
    - VK_FORMAT_G12X4_B12X4R12X4_2PLANE_444_UNORM_3PACK16
    - VK_FORMAT_G16_B16R16_2PLANE_444_UNORM
    - VK_FORMAT_G8_B8R8_2PLANE_444_UNORM
- Extending VkImageAspectFlagBits:
    - VK_IMAGE_ASPECT_NONE
- Extending VkImageLayout:
    - VK_IMAGE_LAYOUT_ATTACHMENT_OPTIMAL
    - VK_IMAGE_LAYOUT_READ_ONLY_OPTIMAL
- Extending VkObjectType:
    - VK_OBJECT_TYPE_PRIVATE_DATA_SLOT
- Extending VkPipelineCacheCreateFlagBits:
    - VK_PIPELINE_CACHE_CREATE_EXTERNALLY_SYNCHRONIZED_BIT
- Extending VkPipelineCreateFlagBits:
    - VK_PIPELINE_CREATE_EARLY_RETURN_ON_FAILURE_BIT
    - VK_PIPELINE_CREATE_FAIL_ON_PIPELINE_COMPILE_REQUIRED_BIT
- Extending VkPipelineShaderStageCreateFlagBits:
    - VK_PIPELINE_SHADER_STAGE_CREATE_ALLOW_VARYING_SUBGROUP_SIZE_BIT
    - VK_PIPELINE_SHADER_STAGE_CREATE_REQUIRE_FULL_SUBGROUPS_BIT
- Extending VkPipelineStageFlagBits:
    - VK_PIPELINE_STAGE_NONE
- Extending VkResult:
    - VK_PIPELINE_COMPILE_REQUIRED
- Extending VkStructureType:
    - VK_STRUCTURE_TYPE_BLIT_IMAGE_INFO_2
    - VK_STRUCTURE_TYPE_BUFFER_COPY_2
    - VK_STRUCTURE_TYPE_BUFFER_IMAGE_COPY_2
    - VK_STRUCTURE_TYPE_BUFFER_MEMORY_BARRIER_2
    - VK_STRUCTURE_TYPE_COMMAND_BUFFER_INHERITANCE_RENDERING_INFO
    - VK_STRUCTURE_TYPE_COMMAND_BUFFER_SUBMIT_INFO
    - VK_STRUCTURE_TYPE_COPY_BUFFER_INFO_2

- VK_STRUCTURE_TYPE_COPY_BUFFER_TO_IMAGE_INFO_2
- VK_STRUCTURE_TYPE_COPY_IMAGE_INFO_2
- VK_STRUCTURE_TYPE_COPY_IMAGE_TO_BUFFER_INFO_2
- VK_STRUCTURE_TYPE_DEPENDENCY_INFO
- VK_STRUCTURE_TYPE_DESCRIPTOR_POOL_INLINE_UNIFORM_BLOCK_CREATE_INFO
- VK_STRUCTURE_TYPE_DEVICE_BUFFER_MEMORY_REQUIREMENTS
- VK_STRUCTURE_TYPE_DEVICE_IMAGE_MEMORY_REQUIREMENTS
- VK_STRUCTURE_TYPE_DEVICE_PRIVATE_DATA_CREATE_INFO
- VK_STRUCTURE_TYPE_FORMAT_PROPERTIES_3
- VK_STRUCTURE_TYPE_IMAGE_BLIT_2
- VK_STRUCTURE_TYPE_IMAGE_COPY_2
- VK_STRUCTURE_TYPE_IMAGE_MEMORY_BARRIER_2
- VK_STRUCTURE_TYPE_IMAGE_RESOLVE_2
- VK_STRUCTURE_TYPE_MEMORY_BARRIER_2
- VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_DYNAMIC_RENDERING_FEATURES
- VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_IMAGE_ROBUSTNESS_FEATURES
- VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_INLINE_UNIFORM_BLOCK_FEATURES
- VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_INLINE_UNIFORM_BLOCK_PROPERTIES
- VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_MAINTENANCE_4_FEATURES
- VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_MAINTENANCE_4_PROPERTIES
- VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_PIPELINE_CREATION_CACHE_CONTROL_FEATURES
- VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_PRIVATE_DATA_FEATURES
- VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_SHADER_DEMOTE_TO_HELPER_INVOCATION_FEATURES
- VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_SHADER_INTEGER_DOT_PRODUCT_FEATURES
- VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_SHADER_INTEGER_DOT_PRODUCT_PROPERTIES
- VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_SHADER_TERMINATE_INVOCATION_FEATURES
- VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_SUBGROUP_SIZE_CONTROL_FEATURES
- VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_SUBGROUP_SIZE_CONTROL_PROPERTIES
- VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_SYNCHRONIZATION_2_FEATURES
- VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_TEXEL_BUFFER_ALIGNMENT_PROPERTIES
- VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_TEXTURE_COMPRESSION_ASTC_HDR_FEATURES
- VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_TOOL_PROPERTIES
- VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_VULKAN_1_3_FEATURES
- VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_VULKAN_1_3_PROPERTIES
- VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_ZERO_INITIALIZE_WORKGROUP_MEMORY_FEATURES

    - VK_STRUCTURE_TYPE_PIPELINE_CREATION_FEEDBACK_CREATE_INFO
    - VK_STRUCTURE_TYPE_PIPELINE_RENDERING_CREATE_INFO
    - VK_STRUCTURE_TYPE_PIPELINE_SHADER_STAGE_REQUIRED_SUBGROUP_SIZE_CREATE_INFO
    - VK_STRUCTURE_TYPE_PRIVATE_DATA_SLOT_CREATE_INFO
    - VK_STRUCTURE_TYPE_RENDERING_ATTACHMENT_INFO
    - VK_STRUCTURE_TYPE_RENDERING_INFO
    - VK_STRUCTURE_TYPE_RESOLVE_IMAGE_INFO_2
    - VK_STRUCTURE_TYPE_SEMAPHORE_SUBMIT_INFO
    - VK_STRUCTURE_TYPE_SUBMIT_INFO_2
    - VK_STRUCTURE_TYPE_WRITE_DESCRIPTOR_SET_INLINE_UNIFORM_BLOCK

Vulkan Version 1.2

Vulkan Version 1.2 promoted a number of key extensions into the core API:

- VK_KHR_8bit_storage
- VK_KHR_buffer_device_address
- VK_KHR_create_renderpass2
- VK_KHR_depth_stencil_resolve
- VK_KHR_draw_indirect_count
- VK_KHR_driver_properties
- VK_KHR_image_format_list
- VK_KHR_imageless_framebuffer
- VK_KHR_sampler_mirror_clamp_to_edge
- VK_KHR_separate_depth_stencil_layouts
- VK_KHR_shader_atomic_int64
- VK_KHR_shader_float16_int8
- VK_KHR_shader_float_controls
- VK_KHR_shader_subgroup_extended_types
- VK_KHR_spirv_1_4
- VK_KHR_timeline_semaphore
- VK_KHR_uniform_buffer_standard_layout
- VK_KHR_vulkan_memory_model
- VK_EXT_descriptor_indexing

- VK_EXT_host_query_reset
- VK_EXT_sampler_filter_minmax
- VK_EXT_scalar_block_layout
- VK_EXT_separate_stencil_usage
- VK_EXT_shader_viewport_index_layer

All differences in behavior between these extensions and the corresponding Vulkan 1.2 functionality are summarized below.

Differences Relative to VK_KHR_8bit_storage

If the VK_KHR_8bit_storage extension is not supported, support for the SPIR-V storageBuffer8BitAccess capability in shader modules is optional. Support for this feature is defined by VkPhysicalDeviceVulkan12Features::storageBuffer8BitAccess when queried via vkGetPhysicalDeviceFeatures2.

Differences Relative to VK_KHR_draw_indirect_count

If the VK_KHR_draw_indirect_count extension is not supported, support for the commands vkCmdDrawIndirectCount and vkCmdDrawIndexedIndirectCount is optional. Support for this feature is defined by VkPhysicalDeviceVulkan12Features::drawIndirectCount when queried via vkGetPhysicalDeviceFeatures2.

Differences Relative to VK_KHR_sampler_mirror_clamp_to_edge

If the VK_KHR_sampler_mirror_clamp_to_edge extension is not supported, support for the VkSamplerAddressMode VK_SAMPLER_ADDRESS_MODE_MIRROR_CLAMP_TO_EDGE is optional. Support for this feature is defined by VkPhysicalDeviceVulkan12Features::samplerMirrorClampToEdge when queried via vkGetPhysicalDeviceFeatures2.

Differences Relative to VK_EXT_descriptor_indexing

If the VK_EXT_descriptor_indexing extension is not supported, support for the descriptorIndexing feature is optional. Support for this feature is defined by VkPhysicalDeviceVulkan12Features ::descriptorIndexing when queried via vkGetPhysicalDeviceFeatures2.

Differences Relative to VK_EXT_scalar_block_layout

If the VK_EXT_scalar_block_layout extension is not supported, support for the scalarBlockLayout feature is optional. Support for this feature is defined by VkPhysicalDeviceVulkan12Features ::scalarBlockLayout when queried via vkGetPhysicalDeviceFeatures2.

Differences Relative to VK_EXT_shader_viewport_index_layer

The ShaderViewportIndexLayerEXT SPIR-V capability was replaced with the ShaderViewportIndex and ShaderLayer capabilities. Declaring both is equivalent to declaring ShaderViewportIndexLayerEXT. If the VK_EXT_shader_viewport_index_layer extension is not supported, support for the ShaderViewportIndexLayerEXT SPIR-V capability is optional. Support for this feature is defined by VkPhysicalDeviceVulkan12Features::shaderOutputViewportIndex and VkPhysicalDeviceVulkan12Features::shaderOutputLayer when queried via vkGetPhysicalDeviceFeatures2.

Differences Relative to VK_KHR_buffer_device_address

If the VK_KHR_buffer_device_address extension is not supported, support for the bufferDeviceAddress feature is optional. Support for this feature is defined by VkPhysicalDeviceVulkan12Features::bufferDeviceAddress when queried via vkGetPhysicalDeviceFeatures2.

Differences Relative to VK_KHR_shader_atomic_int64

If the VK_KHR_shader_atomic_int64 extension is not supported, support for the shaderBufferInt64Atomics feature is optional. Support for this feature is defined by VkPhysicalDeviceVulkan12Features::shaderBufferInt64Atomics when queried via vkGetPhysicalDeviceFeatures2.

Differences Relative to VK_KHR_shader_float16_int8

If the VK_KHR_shader_float16_int8 extension is not supported, support for the shaderFloat16 and shaderInt8 features is optional. Support for these features are defined by VkPhysicalDeviceVulkan12Features::shaderFloat16 and VkPhysicalDeviceVulkan12Features ::shaderInt8 when queried via vkGetPhysicalDeviceFeatures2.

Differences Relative to VK_KHR_vulkan_memory_model

If the VK_KHR_vulkan_memory_model extension is not supported, support for the vulkanMemoryModel feature is optional. Support for this feature is defined by VkPhysicalDeviceVulkan12Features ::vulkanMemoryModel when queried via vkGetPhysicalDeviceFeatures2.

Additional Vulkan 1.2 Feature Support

In addition to the promoted extensions described above, Vulkan 1.2 added support for:

- SPIR-V version 1.4.
- SPIR-V version 1.5.
- The samplerMirrorClampToEdge feature which indicates whether the implementation supports the VK_SAMPLER_ADDRESS_MODE_MIRROR_CLAMP_TO_EDGE sampler address mode.
- The ShaderNonUniform capability in SPIR-V version 1.5.
- The shaderOutputViewportIndex feature which indicates that the ShaderViewportIndex capability can be used.
- The shaderOutputLayer feature which indicates that the ShaderLayer capability can be used.
- The subgroupBroadcastDynamicId feature which allows the “Id” operand of OpGroupNonUniformBroadcast to be dynamically uniform within a subgroup, and the “Index” operand of OpGroupNonUniformQuadBroadcast to be dynamically uniform within a derivative group, in shader modules of version 1.5 or higher.
- The drawIndirectCount feature which indicates whether the vkCmdDrawIndirectCount and vkCmdDrawIndexedIndirectCount functions can be used.
- The descriptorIndexing feature which indicates the implementation supports the minimum number of descriptor indexing features as defined in the Feature Requirements section.
- The samplerFilterMinmax feature which indicates whether the implementation supports the minimum number of image formats that support the

`VK_FORMAT_FEATURE_SAMPLED_IMAGE_FILTER_MINMAX_BIT` feature bit as defined by the `filterMinmaxSingleComponentFormats` property minimum requirements.

- The `framebufferIntegerColorSampleCounts` limit which indicates the color sample counts that are supported for all framebuffer color attachments with integer formats.

New Macros

- VK_API_VERSION_1_2

New Commands

- vkCmdBeginRenderPass2
- vkCmdDrawIndexedIndirectCount
- vkCmdDrawIndirectCount
- vkCmdEndRenderPass2
- vkCmdNextSubpass2
- vkCreateRenderPass2
- vkGetBufferDeviceAddress
- vkGetBufferOpaqueCaptureAddress
- vkGetDeviceMemoryOpaqueCaptureAddress
- vkGetSemaphoreCounterValue
- vkResetQueryPool
- vkSignalSemaphore
- vkWaitSemaphores

New Structures

- VkAttachmentDescription2
- VkAttachmentReference2
- VkBufferDeviceAddressInfo
- VkConformanceVersion
- VkDeviceMemoryOpaqueCaptureAddressInfo
- VkFramebufferAttachmentImageInfo
- VkRenderPassCreateInfo2
- VkSemaphoreSignalInfo
- VkSemaphoreWaitInfo
- VkSubpassBeginInfo
- VkSubpassDependency2
- VkSubpassDescription2

- VkSubpassEndInfo
- Extending VkAttachmentDescription2:
  - VkAttachmentDescriptionStencilLayout
- Extending VkAttachmentReference2:
  - VkAttachmentReferenceStencilLayout
- Extending VkBufferCreateInfo:
  - VkBufferOpaqueCaptureAddressCreateInfo
- Extending VkDescriptorSetAllocateInfo:
  - VkDescriptorSetVariableDescriptorCountAllocateInfo
- Extending VkDescriptorSetLayoutCreateInfo:
  - VkDescriptorSetLayoutBindingFlagsCreateInfo
- Extending VkDescriptorSetLayoutSupport:
  - VkDescriptorSetVariableDescriptorCountLayoutSupport
- Extending VkFramebufferCreateInfo:
  - VkFramebufferAttachmentsCreateInfo
- Extending VkImageCreateInfo, VkPhysicalDeviceImageFormatInfo2:
  - VkImageStencilUsageCreateInfo
- Extending VkImageCreateInfo, `VkSwapchainCreateInfoKHR`, VkPhysicalDeviceImageFormatInfo2:
  - VkImageFormatListCreateInfo
- Extending VkMemoryAllocateInfo:
  - VkMemoryOpaqueCaptureAddressAllocateInfo
- Extending VkPhysicalDeviceFeatures2, VkDeviceCreateInfo:
  - VkPhysicalDevice8BitStorageFeatures
  - VkPhysicalDeviceBufferDeviceAddressFeatures
  - VkPhysicalDeviceDescriptorIndexingFeatures
  - VkPhysicalDeviceHostQueryResetFeatures
  - VkPhysicalDeviceImagelessFramebufferFeatures
  - VkPhysicalDeviceScalarBlockLayoutFeatures
  - VkPhysicalDeviceSeparateDepthStencilLayoutsFeatures
  - VkPhysicalDeviceShaderAtomicInt64Features
  - VkPhysicalDeviceShaderFloat16Int8Features
  - VkPhysicalDeviceShaderSubgroupExtendedTypesFeatures
  - VkPhysicalDeviceTimelineSemaphoreFeatures
  - VkPhysicalDeviceUniformBufferStandardLayoutFeatures
  - VkPhysicalDeviceVulkan11Features

    - VkPhysicalDeviceVulkan12Features
    - VkPhysicalDeviceVulkanMemoryModelFeatures
- Extending VkPhysicalDeviceProperties2:
    - VkPhysicalDeviceDepthStencilResolveProperties
    - VkPhysicalDeviceDescriptorIndexingProperties
    - VkPhysicalDeviceDriverProperties
    - VkPhysicalDeviceFloatControlsProperties
    - VkPhysicalDeviceSamplerFilterMinmaxProperties
    - VkPhysicalDeviceTimelineSemaphoreProperties
    - VkPhysicalDeviceVulkan11Properties
    - VkPhysicalDeviceVulkan12Properties
- Extending VkRenderPassBeginInfo:
    - VkRenderPassAttachmentBeginInfo
- Extending VkSamplerCreateInfo:
    - VkSamplerReductionModeCreateInfo
- Extending VkSemaphoreCreateInfo, VkPhysicalDeviceExternalSemaphoreInfo:
    - VkSemaphoreTypeCreateInfo
- Extending VkSubmitInfo, VkBindSparseInfo:
    - VkTimelineSemaphoreSubmitInfo
- Extending VkSubpassDescription2:
    - VkSubpassDescriptionDepthStencilResolve

New Enums

- VkDescriptorBindingFlagBits
- VkDriverId
- VkResolveModeFlagBits
- VkSamplerReductionMode
- VkSemaphoreType
- VkSemaphoreWaitFlagBits
- VkShaderFloatControlsIndependence

New Bitmasks

- VkDescriptorBindingFlags
- VkResolveModeFlags
- VkSemaphoreWaitFlags

New Enum Constants

- VK_MAX_DRIVER_INFO_SIZE
- VK_MAX_DRIVER_NAME_SIZE
- Extending VkBufferCreateFlagBits:
  - VK_BUFFER_CREATE_DEVICE_ADDRESS_CAPTURE_REPLAY_BIT
- Extending VkBufferUsageFlagBits:
  - VK_BUFFER_USAGE_SHADER_DEVICE_ADDRESS_BIT
- Extending VkDescriptorPoolCreateFlagBits:
  - VK_DESCRIPTOR_POOL_CREATE_UPDATE_AFTER_BIND_BIT
- Extending VkDescriptorSetLayoutCreateFlagBits:
  - VK_DESCRIPTOR_SET_LAYOUT_CREATE_UPDATE_AFTER_BIND_POOL_BIT
- Extending VkFormatFeatureFlagBits:
  - VK_FORMAT_FEATURE_SAMPLED_IMAGE_FILTER_MINMAX_BIT
- Extending VkFramebufferCreateFlagBits:
  - VK_FRAMEBUFFER_CREATE_IMAGELESS_BIT
- Extending VkImageLayout:
  - VK_IMAGE_LAYOUT_DEPTH_ATTACHMENT_OPTIMAL
  - VK_IMAGE_LAYOUT_DEPTH_READ_ONLY_OPTIMAL
  - VK_IMAGE_LAYOUT_STENCIL_ATTACHMENT_OPTIMAL
  - VK_IMAGE_LAYOUT_STENCIL_READ_ONLY_OPTIMAL
- Extending VkMemoryAllocateFlagBits:
  - VK_MEMORY_ALLOCATE_DEVICE_ADDRESS_BIT
  - VK_MEMORY_ALLOCATE_DEVICE_ADDRESS_CAPTURE_REPLAY_BIT
- Extending VkResult:
  - VK_ERROR_FRAGMENTATION
  - VK_ERROR_INVALID_OPAQUE_CAPTURE_ADDRESS
- Extending VkSamplerAddressMode:
  - VK_SAMPLER_ADDRESS_MODE_MIRROR_CLAMP_TO_EDGE
- Extending VkStructureType:
  - VK_STRUCTURE_TYPE_ATTACHMENT_DESCRIPTION_2
  - VK_STRUCTURE_TYPE_ATTACHMENT_DESCRIPTION_STENCIL_LAYOUT
  - VK_STRUCTURE_TYPE_ATTACHMENT_REFERENCE_2
  - VK_STRUCTURE_TYPE_ATTACHMENT_REFERENCE_STENCIL_LAYOUT
  - VK_STRUCTURE_TYPE_BUFFER_DEVICE_ADDRESS_INFO

- VK_STRUCTURE_TYPE_BUFFER_OPAQUE_CAPTURE_ADDRESS_CREATE_INFO
- VK_STRUCTURE_TYPE_DESCRIPTOR_SET_LAYOUT_BINDING_FLAGS_CREATE_INFO
- VK_STRUCTURE_TYPE_DESCRIPTOR_SET_VARIABLE_DESCRIPTOR_COUNT_ALLOCATE_INFO
- VK_STRUCTURE_TYPE_DESCRIPTOR_SET_VARIABLE_DESCRIPTOR_COUNT_LAYOUT_SUPPORT
- VK_STRUCTURE_TYPE_DEVICE_MEMORY_OPAQUE_CAPTURE_ADDRESS_INFO
- VK_STRUCTURE_TYPE_FRAMEBUFFER_ATTACHMENTS_CREATE_INFO
- VK_STRUCTURE_TYPE_FRAMEBUFFER_ATTACHMENT_IMAGE_INFO
- VK_STRUCTURE_TYPE_IMAGE_FORMAT_LIST_CREATE_INFO
- VK_STRUCTURE_TYPE_IMAGE_STENCIL_USAGE_CREATE_INFO
- VK_STRUCTURE_TYPE_MEMORY_OPAQUE_CAPTURE_ADDRESS_ALLOCATE_INFO
- VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_8BIT_STORAGE_FEATURES
- VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_BUFFER_DEVICE_ADDRESS_FEATURES
- VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_DEPTH_STENCIL_RESOLVE_PROPERTIES
- VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_DESCRIPTOR_INDEXING_FEATURES
- VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_DESCRIPTOR_INDEXING_PROPERTIES
- VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_DRIVER_PROPERTIES
- VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_FLOAT_CONTROLS_PROPERTIES
- VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_HOST_QUERY_RESET_FEATURES
- VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_IMAGELESS_FRAMEBUFFER_FEATURES
- VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_SAMPLER_FILTER_MINMAX_PROPERTIES
- VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_SCALAR_BLOCK_LAYOUT_FEATURES
- VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_SEPARATE_DEPTH_STENCIL_LAYOUTS_FEATURES
- VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_SHADER_ATOMIC_INT64_FEATURES
- VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_SHADER_FLOAT16_INT8_FEATURES
- VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_SHADER_SUBGROUP_EXTENDED_TYPES_FEATURES
- VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_TIMELINE_SEMAPHORE_FEATURES
- VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_TIMELINE_SEMAPHORE_PROPERTIES
- VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_UNIFORM_BUFFER_STANDARD_LAYOUT_FEATURES
- VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_VULKAN_1_1_FEATURES
- VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_VULKAN_1_1_PROPERTIES
- VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_VULKAN_1_2_FEATURES
- VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_VULKAN_1_2_PROPERTIES
- VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_VULKAN_MEMORY_MODEL_FEATURES
- VK_STRUCTURE_TYPE_RENDER_PASS_ATTACHMENT_BEGIN_INFO
- VK_STRUCTURE_TYPE_RENDER_PASS_CREATE_INFO_2

    - VK_STRUCTURE_TYPE_SAMPLER_REDUCTION_MODE_CREATE_INFO
    - VK_STRUCTURE_TYPE_SEMAPHORE_SIGNAL_INFO
    - VK_STRUCTURE_TYPE_SEMAPHORE_TYPE_CREATE_INFO
    - VK_STRUCTURE_TYPE_SEMAPHORE_WAIT_INFO
    - VK_STRUCTURE_TYPE_SUBPASS_BEGIN_INFO
    - VK_STRUCTURE_TYPE_SUBPASS_DEPENDENCY_2
    - VK_STRUCTURE_TYPE_SUBPASS_DESCRIPTION_2
    - VK_STRUCTURE_TYPE_SUBPASS_DESCRIPTION_DEPTH_STENCIL_RESOLVE
    - VK_STRUCTURE_TYPE_SUBPASS_END_INFO
    - VK_STRUCTURE_TYPE_TIMELINE_SEMAPHORE_SUBMIT_INFO

Vulkan Version 1.1

Vulkan Version 1.1 promoted a number of key extensions into the core API:

- VK_KHR_16bit_storage
- VK_KHR_bind_memory2
- VK_KHR_dedicated_allocation
- VK_KHR_descriptor_update_template
- VK_KHR_device_group
- VK_KHR_device_group_creation
- VK_KHR_external_fence
- VK_KHR_external_fence_capabilities
- VK_KHR_external_memory
- VK_KHR_external_memory_capabilities
- VK_KHR_external_semaphore
- VK_KHR_external_semaphore_capabilities
- VK_KHR_get_memory_requirements2
- VK_KHR_get_physical_device_properties2
- VK_KHR_maintenance1
- VK_KHR_maintenance2
- VK_KHR_maintenance3
- VK_KHR_multiview
- VK_KHR_relaxed_block_layout

- VK_KHR_sampler_ycbcr_conversion
- VK_KHR_shader_draw_parameters
- VK_KHR_storage_buffer_storage_class
- VK_KHR_variable_pointers

All differences in behavior between these extensions and the corresponding Vulkan 1.1 functionality are summarized below.

Differences Relative to VK_KHR_16bit_storage

If the VK_KHR_16bit_storage extension is not supported, support for the storageBuffer16BitAccess feature is optional. Support for this feature is defined by VkPhysicalDevice16BitStorageFeatures::storageBuffer16BitAccess or VkPhysicalDeviceVulkan11Features::storageBuffer16BitAccess when queried via vkGetPhysicalDeviceFeatures2.

Differences Relative to VK_KHR_sampler_ycbcr_conversion

If the VK_KHR_sampler_ycbcr_conversion extension is not supported, support for the samplerYcbcrConversion feature is optional. Support for this feature is defined by VkPhysicalDeviceSamplerYcbcrConversionFeatures::samplerYcbcrConversion or VkPhysicalDeviceVulkan11Features::samplerYcbcrConversion when queried via vkGetPhysicalDeviceFeatures2.

Differences Relative to VK_KHR_shader_draw_parameters

If the VK_KHR_shader_draw_parameters extension is not supported, support for the SPV_KHR_shader_draw_parameters SPIR-V extension is optional. Support for this feature is defined by VkPhysicalDeviceShaderDrawParametersFeatures::shaderDrawParameters or VkPhysicalDeviceVulkan11Features::shaderDrawParameters when queried via vkGetPhysicalDeviceFeatures2.

Differences Relative to VK_KHR_variable_pointers

If the VK_KHR_variable_pointers extension is not supported, support for the variablePointersStorageBuffer feature is optional. Support for this feature is defined by VkPhysicalDeviceVariablePointersFeatures::variablePointersStorageBuffer or VkPhysicalDeviceVulkan11Features::variablePointersStorageBuffer when queried via vkGetPhysicalDeviceFeatures2.

Additional Vulkan 1.1 Feature Support

In addition to the promoted extensions described above, Vulkan 1.1 added support for:

- The group operations and subgroup scope.
- The protected memory feature.
- A new command to enumerate the instance version: vkEnumerateInstanceVersion.
- The VkPhysicalDeviceShaderDrawParametersFeatures feature query struct (where the VK_KHR_shader_draw_parameters extension did not have one).

New Macros

- VK_API_VERSION_1_1

New Object Types

- VkDescriptorUpdateTemplate
- VkSamplerYcbcrConversion

New Commands

- vkBindBufferMemory2
- vkBindImageMemory2
- vkCmdDispatchBase
- vkCmdSetDeviceMask
- vkCreateDescriptorUpdateTemplate
- vkCreateSamplerYcbcrConversion
- vkDestroyDescriptorUpdateTemplate
- vkDestroySamplerYcbcrConversion
- vkEnumerateInstanceVersion
- vkEnumeratePhysicalDeviceGroups
- vkGetBufferMemoryRequirements2
- vkGetDescriptorSetLayoutSupport
- vkGetDeviceGroupPeerMemoryFeatures
- vkGetDeviceQueue2
- vkGetImageMemoryRequirements2
- vkGetImageSparseMemoryRequirements2
- vkGetPhysicalDeviceExternalBufferProperties
- vkGetPhysicalDeviceExternalFenceProperties
- vkGetPhysicalDeviceExternalSemaphoreProperties
- vkGetPhysicalDeviceFeatures2
- vkGetPhysicalDeviceFormatProperties2
- vkGetPhysicalDeviceImageFormatProperties2
- vkGetPhysicalDeviceMemoryProperties2
- vkGetPhysicalDeviceProperties2
- vkGetPhysicalDeviceQueueFamilyProperties2
- vkGetPhysicalDeviceSparseImageFormatProperties2
- vkTrimCommandPool

- vkUpdateDescriptorSetWithTemplate

New Structures

- VkBindBufferMemoryInfo
- VkBindImageMemoryInfo
- VkBufferMemoryRequirementsInfo2
- VkDescriptorSetLayoutSupport
- VkDescriptorUpdateTemplateCreateInfo
- VkDescriptorUpdateTemplateEntry
- VkDeviceQueueInfo2
- VkExternalBufferProperties
- VkExternalFenceProperties
- VkExternalMemoryProperties
- VkExternalSemaphoreProperties
- VkFormatProperties2
- VkImageFormatProperties2
- VkImageMemoryRequirementsInfo2
- VkImageSparseMemoryRequirementsInfo2
- VkInputAttachmentAspectReference
- VkMemoryRequirements2
- VkPhysicalDeviceExternalBufferInfo
- VkPhysicalDeviceExternalFenceInfo
- VkPhysicalDeviceExternalSemaphoreInfo
- VkPhysicalDeviceGroupProperties
- VkPhysicalDeviceImageFormatInfo2
- VkPhysicalDeviceMemoryProperties2
- VkPhysicalDeviceProperties2
- VkPhysicalDeviceSparseImageFormatInfo2
- VkQueueFamilyProperties2
- VkSamplerYcbcrConversionCreateInfo
- VkSparseImageFormatProperties2
- VkSparseImageMemoryRequirements2
- Extending VkBindBufferMemoryInfo:
  - VkBindBufferMemoryDeviceGroupInfo
- Extending VkBindImageMemoryInfo:

    - VkBindImageMemoryDeviceGroupInfo
    - VkBindImagePlaneMemoryInfo
- Extending VkBindSparseInfo:
    - VkDeviceGroupBindSparseInfo
- Extending VkBufferCreateInfo:
    - VkExternalMemoryBufferCreateInfo
- Extending VkCommandBufferBeginInfo:
    - VkDeviceGroupCommandBufferBeginInfo
- Extending VkDeviceCreateInfo:
    - VkDeviceGroupDeviceCreateInfo
    - VkPhysicalDeviceFeatures2
- Extending VkFenceCreateInfo:
    - VkExportFenceCreateInfo
- Extending VkImageCreateInfo:
    - VkExternalMemoryImageCreateInfo
- Extending VkImageFormatProperties2:
    - VkExternalImageFormatProperties
    - VkSamplerYcbcrConversionImageFormatProperties
- Extending VkImageMemoryRequirementsInfo2:
    - VkImagePlaneMemoryRequirementsInfo
- Extending VkImageViewCreateInfo:
    - VkImageViewUsageCreateInfo
- Extending VkMemoryAllocateInfo:
    - VkExportMemoryAllocateInfo
    - VkMemoryAllocateFlagsInfo
    - VkMemoryDedicatedAllocateInfo
- Extending VkMemoryRequirements2:
    - VkMemoryDedicatedRequirements
- Extending VkPhysicalDeviceFeatures2, VkDeviceCreateInfo:
    - VkPhysicalDevice16BitStorageFeatures
    - VkPhysicalDeviceMultiviewFeatures
    - VkPhysicalDeviceProtectedMemoryFeatures
    - VkPhysicalDeviceSamplerYcbcrConversionFeatures
    - VkPhysicalDeviceShaderDrawParameterFeatures
    - VkPhysicalDeviceShaderDrawParametersFeatures

    - VkPhysicalDeviceVariablePointerFeatures
    - VkPhysicalDeviceVariablePointersFeatures
- Extending VkPhysicalDeviceImageFormatInfo2:
    - VkPhysicalDeviceExternalImageFormatInfo
- Extending VkPhysicalDeviceProperties2:
    - VkPhysicalDeviceIDProperties
    - VkPhysicalDeviceMaintenance3Properties
    - VkPhysicalDeviceMultiviewProperties
    - VkPhysicalDevicePointClippingProperties
    - VkPhysicalDeviceProtectedMemoryProperties
    - VkPhysicalDeviceSubgroupProperties
- Extending VkPipelineTessellationStateCreateInfo:
    - VkPipelineTessellationDomainOriginStateCreateInfo
- Extending VkRenderPassBeginInfo, VkRenderingInfo:
    - VkDeviceGroupRenderPassBeginInfo
- Extending VkRenderPassCreateInfo:
    - VkRenderPassInputAttachmentAspectCreateInfo
    - VkRenderPassMultiviewCreateInfo
- Extending VkSamplerCreateInfo, VkImageViewCreateInfo:
    - VkSamplerYcbcrConversionInfo
- Extending VkSemaphoreCreateInfo:
    - VkExportSemaphoreCreateInfo
- Extending VkSubmitInfo:
    - VkDeviceGroupSubmitInfo
    - VkProtectedSubmitInfo

New Enums

- VkChromaLocation
- VkDescriptorUpdateTemplateType
- VkDeviceQueueCreateFlagBits
- VkExternalFenceFeatureFlagBits
- VkExternalFenceHandleTypeFlagBits
- VkExternalMemoryFeatureFlagBits
- VkExternalMemoryHandleTypeFlagBits
- VkExternalSemaphoreFeatureFlagBits

- VkExternalSemaphoreHandleTypeFlagBits
- VkFenceImportFlagBits
- VkMemoryAllocateFlagBits
- VkPeerMemoryFeatureFlagBits
- VkPointClippingBehavior
- VkSamplerYcbcrModelConversion
- VkSamplerYcbcrRange
- VkSemaphoreImportFlagBits
- VkSubgroupFeatureFlagBits
- VkTessellationDomainOrigin

New Bitmasks

- VkCommandPoolTrimFlags
- VkDescriptorUpdateTemplateCreateFlags
- VkExternalFenceFeatureFlags
- VkExternalFenceHandleTypeFlags
- VkExternalMemoryFeatureFlags
- VkExternalMemoryHandleTypeFlags
- VkExternalSemaphoreFeatureFlags
- VkExternalSemaphoreHandleTypeFlags
- VkFenceImportFlags
- VkMemoryAllocateFlags
- VkPeerMemoryFeatureFlags
- VkSemaphoreImportFlags
- VkSubgroupFeatureFlags

New Enum Constants

- `VK_LUID_SIZE`
- `VK_MAX_DEVICE_GROUP_SIZE`
- `VK_QUEUE_FAMILY_EXTERNAL`
- Extending VkBufferCreateFlagBits:
  - `VK_BUFFER_CREATE_PROTECTED_BIT`
- Extending VkCommandPoolCreateFlagBits:
  - `VK_COMMAND_POOL_CREATE_PROTECTED_BIT`
- Extending VkDependencyFlagBits:

    - VK_DEPENDENCY_DEVICE_GROUP_BIT
    - VK_DEPENDENCY_VIEW_LOCAL_BIT
- Extending VkDeviceQueueCreateFlagBits:
    - VK_DEVICE_QUEUE_CREATE_PROTECTED_BIT
- Extending VkFormat:
    - VK_FORMAT_B10X6G10X6R10X6G10X6_422_UNORM_4PACK16
    - VK_FORMAT_B12X4G12X4R12X4G12X4_422_UNORM_4PACK16
    - VK_FORMAT_B16G16R16G16_422_UNORM
    - VK_FORMAT_B8G8R8G8_422_UNORM
    - VK_FORMAT_G10X6B10X6G10X6R10X6_422_UNORM_4PACK16
    - VK_FORMAT_G10X6_B10X6R10X6_2PLANE_420_UNORM_3PACK16
    - VK_FORMAT_G10X6_B10X6R10X6_2PLANE_422_UNORM_3PACK16
    - VK_FORMAT_G10X6_B10X6_R10X6_3PLANE_420_UNORM_3PACK16
    - VK_FORMAT_G10X6_B10X6_R10X6_3PLANE_422_UNORM_3PACK16
    - VK_FORMAT_G10X6_B10X6_R10X6_3PLANE_444_UNORM_3PACK16
    - VK_FORMAT_G12X4B12X4G12X4R12X4_422_UNORM_4PACK16
    - VK_FORMAT_G12X4_B12X4R12X4_2PLANE_420_UNORM_3PACK16
    - VK_FORMAT_G12X4_B12X4R12X4_2PLANE_422_UNORM_3PACK16
    - VK_FORMAT_G12X4_B12X4_R12X4_3PLANE_420_UNORM_3PACK16
    - VK_FORMAT_G12X4_B12X4_R12X4_3PLANE_422_UNORM_3PACK16
    - VK_FORMAT_G12X4_B12X4_R12X4_3PLANE_444_UNORM_3PACK16
    - VK_FORMAT_G16B16G16R16_422_UNORM
    - VK_FORMAT_G16_B16R16_2PLANE_420_UNORM
    - VK_FORMAT_G16_B16R16_2PLANE_422_UNORM
    - VK_FORMAT_G16_B16_R16_3PLANE_420_UNORM
    - VK_FORMAT_G16_B16_R16_3PLANE_422_UNORM
    - VK_FORMAT_G16_B16_R16_3PLANE_444_UNORM
    - VK_FORMAT_G8B8G8R8_422_UNORM
    - VK_FORMAT_G8_B8R8_2PLANE_420_UNORM
    - VK_FORMAT_G8_B8R8_2PLANE_422_UNORM
    - VK_FORMAT_G8_B8_R8_3PLANE_420_UNORM
    - VK_FORMAT_G8_B8_R8_3PLANE_422_UNORM
    - VK_FORMAT_G8_B8_R8_3PLANE_444_UNORM
    - VK_FORMAT_R10X6G10X6B10X6A10X6_UNORM_4PACK16
    - VK_FORMAT_R10X6G10X6_UNORM_2PACK16

    - VK_FORMAT_R10X6_UNORM_PACK16
    - VK_FORMAT_R12X4G12X4B12X4A12X4_UNORM_4PACK16
    - VK_FORMAT_R12X4G12X4_UNORM_2PACK16
    - VK_FORMAT_R12X4_UNORM_PACK16
- Extending VkFormatFeatureFlagBits:
    - VK_FORMAT_FEATURE_COSITED_CHROMA_SAMPLES_BIT
    - VK_FORMAT_FEATURE_DISJOINT_BIT
    - VK_FORMAT_FEATURE_MIDPOINT_CHROMA_SAMPLES_BIT
    - VK_FORMAT_FEATURE_SAMPLED_IMAGE_YCBCR_CONVERSION_CHROMA_RECONSTRUCTION_EXPLICIT_BIT
    - VK_FORMAT_FEATURE_SAMPLED_IMAGE_YCBCR_CONVERSION_CHROMA_RECONSTRUCTION_EXPLICIT_FORCEABLE_BIT
    - VK_FORMAT_FEATURE_SAMPLED_IMAGE_YCBCR_CONVERSION_LINEAR_FILTER_BIT
    - VK_FORMAT_FEATURE_SAMPLED_IMAGE_YCBCR_CONVERSION_SEPARATE_RECONSTRUCTION_FILTER_BIT
    - VK_FORMAT_FEATURE_TRANSFER_DST_BIT
    - VK_FORMAT_FEATURE_TRANSFER_SRC_BIT
- Extending VkImageAspectFlagBits:
    - VK_IMAGE_ASPECT_PLANE_0_BIT
    - VK_IMAGE_ASPECT_PLANE_1_BIT
    - VK_IMAGE_ASPECT_PLANE_2_BIT
- Extending VkImageCreateFlagBits:
    - VK_IMAGE_CREATE_2D_ARRAY_COMPATIBLE_BIT
    - VK_IMAGE_CREATE_ALIAS_BIT
    - VK_IMAGE_CREATE_BLOCK_TEXEL_VIEW_COMPATIBLE_BIT
    - VK_IMAGE_CREATE_DISJOINT_BIT
    - VK_IMAGE_CREATE_EXTENDED_USAGE_BIT
    - VK_IMAGE_CREATE_PROTECTED_BIT
    - VK_IMAGE_CREATE_SPLIT_INSTANCE_BIND_REGIONS_BIT
- Extending VkImageLayout:
    - VK_IMAGE_LAYOUT_DEPTH_ATTACHMENT_STENCIL_READ_ONLY_OPTIMAL
    - VK_IMAGE_LAYOUT_DEPTH_READ_ONLY_STENCIL_ATTACHMENT_OPTIMAL
- Extending VkMemoryHeapFlagBits:
    - VK_MEMORY_HEAP_MULTI_INSTANCE_BIT
- Extending VkMemoryPropertyFlagBits:
    - VK_MEMORY_PROPERTY_PROTECTED_BIT
- Extending VkObjectType:

    - VK_OBJECT_TYPE_DESCRIPTOR_UPDATE_TEMPLATE
    - VK_OBJECT_TYPE_SAMPLER_YCBCR_CONVERSION
- Extending VkPipelineCreateFlagBits:
    - VK_PIPELINE_CREATE_DISPATCH_BASE
    - VK_PIPELINE_CREATE_DISPATCH_BASE_BIT
    - VK_PIPELINE_CREATE_VIEW_INDEX_FROM_DEVICE_INDEX_BIT
- Extending VkQueueFlagBits:
    - VK_QUEUE_PROTECTED_BIT
- Extending VkResult:
    - VK_ERROR_INVALID_EXTERNAL_HANDLE
    - VK_ERROR_OUT_OF_POOL_MEMORY
- Extending VkStructureType:
    - VK_STRUCTURE_TYPE_BIND_BUFFER_MEMORY_DEVICE_GROUP_INFO
    - VK_STRUCTURE_TYPE_BIND_BUFFER_MEMORY_INFO
    - VK_STRUCTURE_TYPE_BIND_IMAGE_MEMORY_DEVICE_GROUP_INFO
    - VK_STRUCTURE_TYPE_BIND_IMAGE_MEMORY_INFO
    - VK_STRUCTURE_TYPE_BIND_IMAGE_PLANE_MEMORY_INFO
    - VK_STRUCTURE_TYPE_BUFFER_MEMORY_REQUIREMENTS_INFO_2
    - VK_STRUCTURE_TYPE_DESCRIPTOR_SET_LAYOUT_SUPPORT
    - VK_STRUCTURE_TYPE_DESCRIPTOR_UPDATE_TEMPLATE_CREATE_INFO
    - VK_STRUCTURE_TYPE_DEVICE_GROUP_BIND_SPARSE_INFO
    - VK_STRUCTURE_TYPE_DEVICE_GROUP_COMMAND_BUFFER_BEGIN_INFO
    - VK_STRUCTURE_TYPE_DEVICE_GROUP_DEVICE_CREATE_INFO
    - VK_STRUCTURE_TYPE_DEVICE_GROUP_RENDER_PASS_BEGIN_INFO
    - VK_STRUCTURE_TYPE_DEVICE_GROUP_SUBMIT_INFO
    - VK_STRUCTURE_TYPE_DEVICE_QUEUE_INFO_2
    - VK_STRUCTURE_TYPE_EXPORT_FENCE_CREATE_INFO
    - VK_STRUCTURE_TYPE_EXPORT_MEMORY_ALLOCATE_INFO
    - VK_STRUCTURE_TYPE_EXPORT_SEMAPHORE_CREATE_INFO
    - VK_STRUCTURE_TYPE_EXTERNAL_BUFFER_PROPERTIES
    - VK_STRUCTURE_TYPE_EXTERNAL_FENCE_PROPERTIES
    - VK_STRUCTURE_TYPE_EXTERNAL_IMAGE_FORMAT_PROPERTIES
    - VK_STRUCTURE_TYPE_EXTERNAL_MEMORY_BUFFER_CREATE_INFO
    - VK_STRUCTURE_TYPE_EXTERNAL_MEMORY_IMAGE_CREATE_INFO
    - VK_STRUCTURE_TYPE_EXTERNAL_SEMAPHORE_PROPERTIES

- VK_STRUCTURE_TYPE_FORMAT_PROPERTIES_2
- VK_STRUCTURE_TYPE_IMAGE_FORMAT_PROPERTIES_2
- VK_STRUCTURE_TYPE_IMAGE_MEMORY_REQUIREMENTS_INFO_2
- VK_STRUCTURE_TYPE_IMAGE_PLANE_MEMORY_REQUIREMENTS_INFO
- VK_STRUCTURE_TYPE_IMAGE_SPARSE_MEMORY_REQUIREMENTS_INFO_2
- VK_STRUCTURE_TYPE_IMAGE_VIEW_USAGE_CREATE_INFO
- VK_STRUCTURE_TYPE_MEMORY_ALLOCATE_FLAGS_INFO
- VK_STRUCTURE_TYPE_MEMORY_DEDICATED_ALLOCATE_INFO
- VK_STRUCTURE_TYPE_MEMORY_DEDICATED_REQUIREMENTS
- VK_STRUCTURE_TYPE_MEMORY_REQUIREMENTS_2
- VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_16BIT_STORAGE_FEATURES
- VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_EXTERNAL_BUFFER_INFO
- VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_EXTERNAL_FENCE_INFO
- VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_EXTERNAL_IMAGE_FORMAT_INFO
- VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_EXTERNAL_SEMAPHORE_INFO
- VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_FEATURES_2
- VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_GROUP_PROPERTIES
- VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_ID_PROPERTIES
- VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_IMAGE_FORMAT_INFO_2
- VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_MAINTENANCE_3_PROPERTIES
- VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_MEMORY_PROPERTIES_2
- VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_MULTIVIEW_FEATURES
- VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_MULTIVIEW_PROPERTIES
- VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_POINT_CLIPPING_PROPERTIES
- VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_PROPERTIES_2
- VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_PROTECTED_MEMORY_FEATURES
- VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_PROTECTED_MEMORY_PROPERTIES
- VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_SAMPLER_YCBCR_CONVERSION_FEATURES
- VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_SHADER_DRAW_PARAMETERS_FEATURES
- VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_SHADER_DRAW_PARAMETER_FEATURES
- VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_SPARSE_IMAGE_FORMAT_INFO_2
- VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_SUBGROUP_PROPERTIES
- VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_VARIABLE_POINTERS_FEATURES
- VK_STRUCTURE_TYPE_PHYSICAL_DEVICE_VARIABLE_POINTER_FEATURES
- VK_STRUCTURE_TYPE_PIPELINE_TESSELLATION_DOMAIN_ORIGIN_STATE_CREATE_INFO

- VK_STRUCTURE_TYPE_PROTECTED_SUBMIT_INFO
- VK_STRUCTURE_TYPE_QUEUE_FAMILY_PROPERTIES_2
- VK_STRUCTURE_TYPE_RENDER_PASS_INPUT_ATTACHMENT_ASPECT_CREATE_INFO
- VK_STRUCTURE_TYPE_RENDER_PASS_MULTIVIEW_CREATE_INFO
- VK_STRUCTURE_TYPE_SAMPLER_YCBCR_CONVERSION_CREATE_INFO
- VK_STRUCTURE_TYPE_SAMPLER_YCBCR_CONVERSION_IMAGE_FORMAT_PROPERTIES
- VK_STRUCTURE_TYPE_SAMPLER_YCBCR_CONVERSION_INFO
- VK_STRUCTURE_TYPE_SPARSE_IMAGE_FORMAT_PROPERTIES_2
- VK_STRUCTURE_TYPE_SPARSE_IMAGE_MEMORY_REQUIREMENTS_2

Vulkan Version 1.0

Vulkan Version 1.0 was the initial release of the Vulkan API.

New Macros

- VK_API_VERSION
- VK_API_VERSION_1_0
- VK_API_VERSION_MAJOR
- VK_API_VERSION_MINOR
- VK_API_VERSION_PATCH
- VK_API_VERSION_VARIANT
- VK_DEFINE_HANDLE
- VK_DEFINE_NON_DISPATCHABLE_HANDLE
- VK_HEADER_VERSION
- VK_HEADER_VERSION_COMPLETE
- VK_MAKE_API_VERSION
- VK_MAKE_VERSION
- VK_NULL_HANDLE
- VK_USE_64_BIT_PTR_DEFINES
- VK_VERSION_MAJOR
- VK_VERSION_MINOR
- VK_VERSION_PATCH

New Base Types

- VkBool32
- VkDeviceAddress

- VkDeviceSize
- VkFlags
- VkSampleMask

New Object Types

- VkBuffer
- VkBufferView
- VkCommandBuffer
- VkCommandPool
- VkDescriptorPool
- VkDescriptorSet
- VkDescriptorSetLayout
- VkDevice
- VkDeviceMemory
- VkEvent
- VkFence
- VkFramebuffer
- VkImage
- VkImageView
- VkInstance
- VkPhysicalDevice
- VkPipeline
- VkPipelineCache
- VkPipelineLayout
- VkQueryPool
- VkQueue
- VkRenderPass
- VkSampler
- VkSemaphore
- VkShaderModule

New Commands

- vkAllocateCommandBuffers
- vkAllocateDescriptorSets
- vkAllocateMemory

- vkBeginCommandBuffer
- vkBindBufferMemory
- vkBindImageMemory
- vkCmdBeginQuery
- vkCmdBeginRenderPass
- vkCmdBindDescriptorSets
- vkCmdBindIndexBuffer
- vkCmdBindPipeline
- vkCmdBindVertexBuffers
- vkCmdBlitImage
- vkCmdClearAttachments
- vkCmdClearColorImage
- vkCmdClearDepthStencilImage
- vkCmdCopyBuffer
- vkCmdCopyBufferToImage
- vkCmdCopyImage
- vkCmdCopyImageToBuffer
- vkCmdCopyQueryPoolResults
- vkCmdDispatch
- vkCmdDispatchIndirect
- vkCmdDraw
- vkCmdDrawIndexed
- vkCmdDrawIndexedIndirect
- vkCmdDrawIndirect
- vkCmdEndQuery
- vkCmdEndRenderPass
- vkCmdExecuteCommands
- vkCmdFillBuffer
- vkCmdNextSubpass
- vkCmdPipelineBarrier
- vkCmdPushConstants
- vkCmdResetEvent
- vkCmdResetQueryPool
- vkCmdResolveImage
- vkCmdSetBlendConstants

- vkCmdSetDepthBias
- vkCmdSetDepthBounds
- vkCmdSetEvent
- vkCmdSetLineWidth
- vkCmdSetScissor
- vkCmdSetStencilCompareMask
- vkCmdSetStencilReference
- vkCmdSetStencilWriteMask
- vkCmdSetViewport
- vkCmdUpdateBuffer
- vkCmdWaitEvents
- vkCmdWriteTimestamp
- vkCreateBuffer
- vkCreateBufferView
- vkCreateCommandPool
- vkCreateComputePipelines
- vkCreateDescriptorPool
- vkCreateDescriptorSetLayout
- vkCreateDevice
- vkCreateEvent
- vkCreateFence
- vkCreateFramebuffer
- vkCreateGraphicsPipelines
- vkCreateImage
- vkCreateImageView
- vkCreateInstance
- vkCreatePipelineCache
- vkCreatePipelineLayout
- vkCreateQueryPool
- vkCreateRenderPass
- vkCreateSampler
- vkCreateSemaphore
- vkCreateShaderModule
- vkDestroyBuffer
- vkDestroyBufferView

- vkDestroyCommandPool
- vkDestroyDescriptorPool
- vkDestroyDescriptorSetLayout
- vkDestroyDevice
- vkDestroyEvent
- vkDestroyFence
- vkDestroyFramebuffer
- vkDestroyImage
- vkDestroyImageView
- vkDestroyInstance
- vkDestroyPipeline
- vkDestroyPipelineCache
- vkDestroyPipelineLayout
- vkDestroyQueryPool
- vkDestroyRenderPass
- vkDestroySampler
- vkDestroySemaphore
- vkDestroyShaderModule
- vkDeviceWaitIdle
- vkEndCommandBuffer
- vkEnumerateDeviceExtensionProperties
- vkEnumerateDeviceLayerProperties
- vkEnumerateInstanceExtensionProperties
- vkEnumerateInstanceLayerProperties
- vkEnumeratePhysicalDevices
- vkFlushMappedMemoryRanges
- vkFreeCommandBuffers
- vkFreeDescriptorSets
- vkFreeMemory
- vkGetBufferMemoryRequirements
- vkGetDeviceMemoryCommitment
- vkGetDeviceProcAddr
- vkGetDeviceQueue
- vkGetEventStatus
- vkGetFenceStatus

- vkGetImageMemoryRequirements
- vkGetImageSparseMemoryRequirements
- vkGetImageSubresourceLayout
- vkGetInstanceProcAddr
- vkGetPhysicalDeviceFeatures
- vkGetPhysicalDeviceFormatProperties
- vkGetPhysicalDeviceImageFormatProperties
- vkGetPhysicalDeviceMemoryProperties
- vkGetPhysicalDeviceProperties
- vkGetPhysicalDeviceQueueFamilyProperties
- vkGetPhysicalDeviceSparseImageFormatProperties
- vkGetPipelineCacheData
- vkGetQueryPoolResults
- vkGetRenderAreaGranularity
- vkInvalidateMappedMemoryRanges
- vkMapMemory
- vkMergePipelineCaches
- vkQueueBindSparse
- vkQueueSubmit
- vkQueueWaitIdle
- vkResetCommandBuffer
- vkResetCommandPool
- vkResetDescriptorPool
- vkResetEvent
- vkResetFences
- vkSetEvent
- vkUnmapMemory
- vkUpdateDescriptorSets
- vkWaitForFences

New Structures

- VkAllocationCallbacks
- VkApplicationInfo
- VkAttachmentDescription
- VkAttachmentReference

- VkBaseInStructure
- VkBaseOutStructure
- VkBindSparseInfo
- VkBufferCopy
- VkBufferCreateInfo
- VkBufferImageCopy
- VkBufferMemoryBarrier
- VkBufferViewCreateInfo
- VkClearAttachment
- VkClearDepthStencilValue
- VkClearRect
- VkCommandBufferAllocateInfo
- VkCommandBufferBeginInfo
- VkCommandBufferInheritanceInfo
- VkCommandPoolCreateInfo
- VkComponentMapping
- VkComputePipelineCreateInfo
- VkCopyDescriptorSet
- VkDescriptorBufferInfo
- VkDescriptorImageInfo
- VkDescriptorPoolCreateInfo
- VkDescriptorPoolSize
- VkDescriptorSetAllocateInfo
- VkDescriptorSetLayoutBinding
- VkDescriptorSetLayoutCreateInfo
- VkDeviceCreateInfo
- VkDeviceQueueCreateInfo
- VkDispatchIndirectCommand
- VkDrawIndexedIndirectCommand
- VkDrawIndirectCommand
- VkEventCreateInfo
- VkExtensionProperties
- VkExtent2D
- VkExtent3D
- VkFenceCreateInfo

- VkFormatProperties
- VkFramebufferCreateInfo
- VkGraphicsPipelineCreateInfo
- VkImageBlit
- VkImageCopy
- VkImageCreateInfo
- VkImageFormatProperties
- VkImageMemoryBarrier
- VkImageResolve
- VkImageSubresource
- VkImageSubresourceLayers
- VkImageSubresourceRange
- VkImageViewCreateInfo
- VkInstanceCreateInfo
- VkLayerProperties
- VkMappedMemoryRange
- VkMemoryAllocateInfo
- VkMemoryBarrier
- VkMemoryHeap
- VkMemoryRequirements
- VkMemoryType
- VkOffset2D
- VkOffset3D
- VkPhysicalDeviceFeatures
- VkPhysicalDeviceLimits
- VkPhysicalDeviceMemoryProperties
- VkPhysicalDeviceProperties
- VkPhysicalDeviceSparseProperties
- VkPipelineCacheCreateInfo
- VkPipelineCacheHeaderVersionOne
- VkPipelineColorBlendAttachmentState
- VkPipelineColorBlendStateCreateInfo
- VkPipelineDepthStencilStateCreateInfo
- VkPipelineDynamicStateCreateInfo
- VkPipelineInputAssemblyStateCreateInfo

- VkPipelineMultisampleStateCreateInfo
- VkPipelineRasterizationStateCreateInfo
- VkPipelineShaderStageCreateInfo
- VkPipelineTessellationStateCreateInfo
- VkPipelineVertexInputStateCreateInfo
- VkPipelineViewportStateCreateInfo
- VkPushConstantRange
- VkQueryPoolCreateInfo
- VkQueueFamilyProperties
- VkRect2D
- VkRenderPassBeginInfo
- VkRenderPassCreateInfo
- VkSamplerCreateInfo
- VkSemaphoreCreateInfo
- VkSparseBufferMemoryBindInfo
- VkSparseImageFormatProperties
- VkSparseImageMemoryBind
- VkSparseImageMemoryBindInfo
- VkSparseImageMemoryRequirements
- VkSparseImageOpaqueMemoryBindInfo
- VkSparseMemoryBind
- VkSpecializationInfo
- VkSpecializationMapEntry
- VkStencilOpState
- VkSubmitInfo
- VkSubpassDependency
- VkSubpassDescription
- VkSubresourceLayout
- VkVertexInputAttributeDescription
- VkVertexInputBindingDescription
- VkViewport
- VkWriteDescriptorSet
- Extending `VkBindDescriptorSetsInfoKHR`, `VkPushConstantsInfoKHR`, `VkPushDescriptorSetInfoKHR`, `VkPushDescriptorSetWithTemplateInfoKHR`, `VkSetDescriptorBufferOffsetsInfoEXT`, `VkBindDescriptorBufferEmbeddedSamplersInfoEXT`, `VkIndirectCommandsLayoutCreateInfoEXT`:

    - VkPipelineLayoutCreateInfo
- Extending VkPipelineShaderStageCreateInfo:
    - VkShaderModuleCreateInfo

New Unions

- VkClearColorValue
- VkClearValue

New Function Pointers

- PFN_vkAllocationFunction
- PFN_vkFreeFunction
- PFN_vkInternalAllocationNotification
- PFN_vkInternalFreeNotification
- PFN_vkReallocationFunction
- PFN_vkVoidFunction

New Enums

- VkAccessFlagBits
- VkAttachmentDescriptionFlagBits
- VkAttachmentLoadOp
- VkAttachmentStoreOp
- VkBlendFactor
- VkBlendOp
- VkBorderColor
- VkBufferCreateFlagBits
- VkBufferUsageFlagBits
- VkColorComponentFlagBits
- VkCommandBufferLevel
- VkCommandBufferResetFlagBits
- VkCommandBufferUsageFlagBits
- VkCommandPoolCreateFlagBits
- VkCommandPoolResetFlagBits
- VkCompareOp
- VkComponentSwizzle
- VkCullModeFlagBits

- VkDependencyFlagBits
- VkDescriptorPoolCreateFlagBits
- VkDescriptorSetLayoutCreateFlagBits
- VkDescriptorType
- VkDynamicState
- VkEventCreateFlagBits
- VkFenceCreateFlagBits
- VkFilter
- VkFormat
- VkFormatFeatureFlagBits
- VkFramebufferCreateFlagBits
- VkFrontFace
- VkImageAspectFlagBits
- VkImageCreateFlagBits
- VkImageLayout
- VkImageTiling
- VkImageType
- VkImageUsageFlagBits
- VkImageViewCreateFlagBits
- VkImageViewType
- VkIndexType
- VkInstanceCreateFlagBits
- VkInternalAllocationType
- VkLogicOp
- VkMemoryHeapFlagBits
- VkMemoryMapFlagBits
- VkMemoryPropertyFlagBits
- VkObjectType
- VkPhysicalDeviceType
- VkPipelineBindPoint
- VkPipelineCacheHeaderVersion
- VkPipelineCreateFlagBits
- VkPipelineShaderStageCreateFlagBits
- VkPipelineStageFlagBits
- VkPolygonMode

- VkPrimitiveTopology
- VkQueryControlFlagBits
- VkQueryPipelineStatisticFlagBits
- VkQueryResultFlagBits
- VkQueryType
- VkQueueFlagBits
- VkRenderPassCreateFlagBits
- VkResult
- VkSampleCountFlagBits
- VkSamplerAddressMode
- VkSamplerCreateFlagBits
- VkSamplerMipmapMode
- VkShaderStageFlagBits
- VkSharingMode
- VkSparseImageFormatFlagBits
- VkSparseMemoryBindFlagBits
- VkStencilFaceFlagBits
- VkStencilOp
- VkStructureType
- VkSubpassContents
- VkSubpassDescriptionFlagBits
- VkSystemAllocationScope
- VkVendorId
- VkVertexInputRate

New Bitmasks

- VkAccessFlags
- VkAttachmentDescriptionFlags
- VkBufferCreateFlags
- VkBufferUsageFlags
- VkBufferViewCreateFlags
- VkColorComponentFlags
- VkCommandBufferResetFlags
- VkCommandBufferUsageFlags
- VkCommandPoolCreateFlags

- VkCommandPoolResetFlags
- VkCullModeFlags
- VkDependencyFlags
- VkDescriptorPoolCreateFlags
- VkDescriptorPoolResetFlags
- VkDescriptorSetLayoutCreateFlags
- VkDeviceCreateFlags
- VkDeviceQueueCreateFlags
- VkEventCreateFlags
- VkFenceCreateFlags
- VkFormatFeatureFlags
- VkFramebufferCreateFlags
- VkImageAspectFlags
- VkImageCreateFlags
- VkImageUsageFlags
- VkImageViewCreateFlags
- VkInstanceCreateFlags
- VkMemoryHeapFlags
- VkMemoryMapFlags
- VkMemoryPropertyFlags
- VkPipelineCacheCreateFlags
- VkPipelineColorBlendStateCreateFlags
- VkPipelineCreateFlags
- VkPipelineDepthStencilStateCreateFlags
- VkPipelineDynamicStateCreateFlags
- VkPipelineInputAssemblyStateCreateFlags
- VkPipelineLayoutCreateFlags
- VkPipelineMultisampleStateCreateFlags
- VkPipelineRasterizationStateCreateFlags
- VkPipelineShaderStageCreateFlags
- VkPipelineStageFlags
- VkPipelineTessellationStateCreateFlags
- VkPipelineVertexInputStateCreateFlags
- VkPipelineViewportStateCreateFlags
- VkQueryControlFlags

- VkQueryPipelineStatisticFlags
- VkQueryPoolCreateFlags
- VkQueryResultFlags
- VkQueueFlags
- VkRenderPassCreateFlags
- VkSampleCountFlags
- VkSamplerCreateFlags
- VkSemaphoreCreateFlags
- VkShaderModuleCreateFlags
- VkShaderStageFlags
- VkSparseImageFormatFlags
- VkSparseMemoryBindFlags
- VkStencilFaceFlags
- VkSubpassDescriptionFlags

New Headers

- `vk_platform`

New Enum Constants

- `VK_ATTACHMENT_UNUSED`
- `VK_FALSE`
- `VK_LOD_CLAMP_NONE`
- `VK_MAX_DESCRIPTION_SIZE`
- `VK_MAX_EXTENSION_NAME_SIZE`
- `VK_MAX_MEMORY_HEAPS`
- `VK_MAX_MEMORY_TYPES`
- `VK_MAX_PHYSICAL_DEVICE_NAME_SIZE`
- `VK_QUEUE_FAMILY_IGNORED`
- `VK_REMAINING_ARRAY_LAYERS`
- `VK_REMAINING_MIP_LEVELS`
- `VK_SUBPASS_EXTERNAL`
- `VK_TRUE`
- `VK_UUID_SIZE`
- `VK_WHOLE_SIZE`

Appendix E: Layers & Extensions (Informative)

Extensions to the Vulkan API **can** be defined by authors, groups of authors, and the Khronos Vulkan Working Group. In order not to compromise the readability of the Vulkan Specification, the core Specification does not incorporate most extensions. The online Registry of extensions is available at URL

https://registry.khronos.org/vulkan/

and allows generating versions of the Specification incorporating different extensions.

Authors creating extensions and layers **must** follow the mandatory procedures described in the Vulkan Documentation and Extensions document when creating extensions and layers.

The remainder of this appendix documents a set of extensions chosen when this document was built. Versions of the Specification published in the Registry include:

- Core API + mandatory extensions required of all Vulkan implementations.
- Core API + all registered and published Khronos (`KHR`) extensions.
- Core API + all registered and published extensions.

Extensions are grouped as Khronos `KHR`, multivendor `EXT`, and then alphabetically by author ID. Within each group, extensions are listed in alphabetical order by their name.

Extension Dependencies

Extensions which have dependencies on specific core versions or on other extensions will list such dependencies.

For core versions, the specified version **must** be supported at runtime. All extensions implicitly require support for Vulkan 1.0.

For a device extension, use of any device-level functionality defined by that extension requires that any extensions that extension depends on be enabled.

For any extension, use of any instance-level functionality defined by that extension requires only that any extensions that extension depends on be supported at runtime.

Extension Interactions

Some extensions define APIs which are only supported when other extensions or core versions are supported at runtime. Such interactions are noted as “API Interactions”.

List of Extensions

Appendix F: Vulkan Roadmap Milestones

Roadmap milestones are intended to be supported by mid-to-high-end smartphones, tablets, laptops, consoles, and desktop devices.

Each milestone indicates support for a set of extensions, features, limits, and formats across these devices, and should be supported by all such new hardware shipping by the end of the target year or shortly thereafter.

Roadmap 2022

The Roadmap 2022 milestone is intended to be supported by newer mid-to-high-end devices shipping in 2022 or shortly thereafter across mainstream smartphone, tablet, laptops, console and desktop devices.

Required API Versions

This profile requires Vulkan 1.3.

Required Features

The following core optional features are required to be supported:

- Vulkan 1.0 Optional Features
  - `fullDrawIndexUint32`
  - `imageCubeArray`
  - `independentBlend`
  - `sampleRateShading`
  - `drawIndirectFirstInstance`
  - `depthClamp`
  - `depthBiasClamp`
  - `samplerAnisotropy`
  - `occlusionQueryPrecise`
  - `fragmentStoresAndAtomics`
  - `shaderStorageImageExtendedFormats`
  - `shaderUniformBufferArrayDynamicIndexing`
  - `shaderSampledImageArrayDynamicIndexing`
  - `shaderStorageBufferArrayDynamicIndexing`
  - `shaderStorageImageArrayDynamicIndexing`
- Vulkan 1.1 Optional Features
  - `samplerYcbcrConversion`

- Vulkan 1.2 Optional Features
  - samplerMirrorClampToEdge
  - descriptorIndexing
  - shaderUniformTexelBufferArrayDynamicIndexing
  - shaderStorageTexelBufferArrayDynamicIndexing
  - shaderUniformBufferArrayNonUniformIndexing
  - shaderSampledImageArrayNonUniformIndexing
  - shaderStorageBufferArrayNonUniformIndexing
  - shaderStorageImageArrayNonUniformIndexing
  - shaderUniformTexelBufferArrayNonUniformIndexing
  - shaderStorageTexelBufferArrayNonUniformIndexing
  - descriptorBindingSampledImageUpdateAfterBind
  - descriptorBindingStorageImageUpdateAfterBind
  - descriptorBindingStorageBufferUpdateAfterBind
  - descriptorBindingUniformTexelBufferUpdateAfterBind
  - descriptorBindingStorageTexelBufferUpdateAfterBind
  - descriptorBindingUpdateUnusedWhilePending
  - descriptorBindingPartiallyBound
  - descriptorBindingVariableDescriptorCount
  - runtimeDescriptorArray
  - scalarBlockLayout

Required Limits

The following core increased limits are **required**

Table 72. Vulkan 1.0 Limits

Limit Name	Unsupported Limit	Core Limit	Profile Limit	Limit Type[1]
maxImageDimension1D	-	4096	8192	min
maxImageDimension2D	-	4096	8192	min
maxImageDimensionCube	-	4096	8192	min
maxImageArrayLayers	-	256	2048	min
maxUniformBufferRange	-	16384	65536	min
bufferImageGranularity	-	131072	4096	max
maxPerStageDescriptorSamplers	-	16	64	min

Limit Name	Unsupported Limit	Core Limit	Profile Limit	Limit Type[1]
maxPerStageDescriptorUniformBuffers	-	12	15	min
maxPerStageDescriptorStorageBuffers	-	4	30	min
maxPerStageDescriptorSampledImages	-	16	200	min
maxPerStageDescriptorStorageImages	-	4	16	min
maxPerStageResources	-	128	200	min
maxDescriptorSetSamplers	-	96	576	min, *n* × PerStage
maxDescriptorSetUniformBuffers	-	72	90	min, *n* × PerStage
maxDescriptorSetStorageBuffers	-	24	96	min, *n* × PerStage
maxDescriptorSetSampledImages	-	96	1800	min, *n* × PerStage
maxDescriptorSetStorageImages	-	24	144	min, *n* × PerStage
maxFragmentCombinedOutputResources	-	4	16	min
maxComputeWorkGroupInvocations	-	128	256	min
maxComputeWorkGroupSize	-	(128,128,64)	(256,256,64)	min
subTexelPrecisionBits	-	4	8	min
mipmapPrecisionBits	-	4	6	min
maxSamplerLodBias	-	2	14	min
pointSizeGranularity	0.0	1.0	0.125	max, fixed point increment
lineWidthGranularity	0.0	1.0	0.5	max, fixed point increment
standardSampleLocations	-	-	VK_TRUE	implementation-dependent
maxColorAttachments	-	4	7	min

Table 73. Vulkan 1.1 Limits

Limit Name	Unsupported Limit	Core Limit	Profile Limit	Limit Type[1]
subgroupSize	-	1/4	4	implementation-dependent
subgroupSupportedStages	-	VK_SHADER_STAGE_COMPUTE_BIT	VK_SHADER_STAGE_COMPUTE_BIT VK_SHADER_STAGE_FRAGMENT_BIT	implementation-dependent
subgroupSupportedOperations	-	VK_SUBGROUP_FEATURE_BASIC_BIT	VK_SUBGROUP_FEATURE_BASIC_BIT VK_SUBGROUP_FEATURE_VOTE_BIT VK_SUBGROUP_FEATURE_ARITHMETIC_BIT VK_SUBGROUP_FEATURE_BALLOT_BIT VK_SUBGROUP_FEATURE_SHUFFLE_BIT VK_SUBGROUP_FEATURE_SHUFFLE_RELATIVE_BIT VK_SUBGROUP_FEATURE_QUAD_BIT	implementation-dependent

Table 74. Vulkan 1.2 Limits

Limit Name	Unsupported Limit	Core Limit	Profile Limit	Limit Type[1]
shaderSignedZeroInfNanPreserveFloat16	-	-	VK_TRUE	implementation-dependent
shaderSignedZeroInfNanPreserveFloat32	-	-	VK_TRUE	implementation-dependent
maxPerStageDescriptorUpdateAfterBindInputAttachments	0	4	7	min

Table 75. Vulkan 1.3 Limits

Limit Name	Unsupported Limit	Core Limit	Profile Limit	Limit Type[1]
maxSubgroupSize	-	-	4	min

Required Extensions

The following extensions are **required**

VK_KHR_global_priority

Roadmap 2024

The Roadmap 2024 milestone is intended to be supported by newer mid-to-high-end devices shipping in 2024 or shortly thereafter across mainstream smartphone, tablet, laptops, console and desktop devices.

Two of the core aims of this roadmap profile are to enable developers to rely on a number of important rasterization and shader features have been available for a long time, but until now have not enjoyed wide support.

Shader features required include smaller types (8/16-bit integers and 16-bit floats), reconvergence guarantees for subgroup ops (VK_KHR_shader_maximal_reconvergence and VK_KHR_shader_quad_control), and more consistent floating-point handling (VK_KHR_shader_float_controls2 and round-to-nearest-even for 32-/16-bit floats). Rasterization features include requiring support for multi-draw indirect, shader draw parameters, 8-bit indices, better line rasterization definitions, and local reads when using dynamic rendering. A few other features have been added opportunistically, in lieu of shipping a Vulkan 1.4 in the same time frame, such as push descriptors and the various minor improvements included in VK_KHR_maintenance5.

Required Profiles

This profile requires the Roadmap 2022 profile.

Required Features

The following core optional features are required to be supported:

- Vulkan 1.0 Optional Features
  - multiDrawIndirect
  - shaderImageGatherExtended
  - shaderInt16
- Vulkan 1.1 Optional Features
  - shaderDrawParameters
  - storageBuffer16BitAccess

- Vulkan 1.2 Optional Features
  - shaderInt8
  - shaderFloat16
  - storageBuffer8BitAccess

Required Limits

The following core increased limits are **required**

Table 76. Vulkan 1.0 Limits

Limit Name	Unsupported Limit	Core Limit	Profile Limit	Limit Type[1]
maxBoundDescriptorSets	-	4	7	min
maxColorAttachments	-	4	8	min
timestampComputeAndGraphics	-	FALSE	TRUE	Boolean

Table 77. Vulkan 1.2 Limits

Limit Name	Unsupported Limit	Core Limit	Profile Limit	Limit Type[1]
shaderRoundingModeRTEFloat16	-	FALSE	TRUE	Boolean
shaderRoundingModeRTEFloat32	-	FALSE	TRUE	Boolean

Required Extensions

The following extensions are **required**

- VK_KHR_dynamic_rendering_local_read
- VK_KHR_load_store_op_none
- VK_KHR_shader_quad_control
- VK_KHR_shader_maximal_reconvergence
- VK_KHR_shader_subgroup_uniform_control_flow
- VK_KHR_shader_subgroup_rotate
- VK_KHR_shader_float_controls2
- VK_KHR_shader_expect_assume
- VK_KHR_line_rasterization
- VK_KHR_vertex_attribute_divisor
- VK_KHR_index_type_uint8
- VK_KHR_map_memory2

- VK_KHR_maintenance5
- VK_KHR_push_descriptor

Appendix G: API Boilerplate

This appendix defines Vulkan API features that are infrastructure required for a complete functional description of Vulkan, but do not logically belong elsewhere in the Specification.

Vulkan Header Files

Vulkan is defined as an API in the C99 language. Khronos provides a corresponding set of header files for applications using the API, which may be used in either C or C++ code. The interface descriptions in the specification are the same as the interfaces defined in these header files, and both are derived from the `vk.xml` XML API Registry, which is the canonical machine-readable description of the Vulkan API. The Registry, scripts used for processing it into various forms, and documentation of the registry schema are available as described at https://registry.khronos.org/vulkan/#apiregistry .

Language bindings for other languages can be defined using the information in the Specification and the Registry. Khronos does not provide any such bindings, but third-party developers have created some additional bindings.

Vulkan Combined API Header `vulkan.h` (Informative)

Applications normally will include the header `vulkan.h`. In turn, `vulkan.h` always includes the following headers:

- `vk_platform.h`, defining platform-specific macros and headers.
- `vulkan_core.h`, defining APIs for the Vulkan core and all registered extensions *other* than window system-specific and provisional extensions, which are included in separate header files.

In addition, specific preprocessor macros defined at the time `vulkan.h` is included cause header files for the corresponding window system-specific and provisional interfaces to be included, as described below.

Vulkan Platform-Specific Header `vk_platform.h` (Informative)

Platform-specific macros and interfaces are defined in `vk_platform.h`. These macros are used to control platform-dependent behavior, and their exact definitions are under the control of specific platforms and Vulkan implementations.

Platform-Specific Calling Conventions

On many platforms the following macros are empty strings, causing platform- and compiler-specific default calling conventions to be used.

`VKAPI_ATTR` is a macro placed before the return type in Vulkan API function declarations. This macro controls calling conventions for C++11 and GCC/Clang-style compilers.

`VKAPI_CALL` is a macro placed after the return type in Vulkan API function declarations. This macro controls calling conventions for MSVC-style compilers.

VKAPI_PTR is a macro placed between the '(' and '*' in Vulkan API function pointer declarations. This macro also controls calling conventions, and typically has the same definition as VKAPI_ATTR or VKAPI_CALL, depending on the compiler.

With these macros, a Vulkan function declaration takes the form of:

```
VKAPI_ATTR <return_type> VKAPI_CALL <command_name>(<command_parameters>);
```

Additionally, a Vulkan function pointer type declaration takes the form of:

```
typedef <return_type> (VKAPI_PTR *PFN_<command_name>)(<command_parameters>);
```

Platform-Specific Header Control

If the VK_NO_STDINT_H macro is defined by the application at compile time, extended integer types used by the Vulkan API, such as uint8_t, **must** also be defined by the application. Otherwise, the Vulkan headers will not compile. If VK_NO_STDINT_H is not defined, the system <stdint.h> is used to define these types. There is a fallback path when Microsoft Visual Studio version 2008 and earlier versions are detected at compile time.

If the VK_NO_STDDEF_H macro is defined by the application at compile time, size_t, **must** also be defined by the application. Otherwise, the Vulkan headers will not compile. If VK_NO_STDDEF_H is not defined, the system <stddef.h> is used to define this type.

Vulkan Core API Header vulkan_core.h

Applications that do not make use of window system-specific extensions may simply include vulkan_core.h instead of vulkan.h, although there is usually no reason to do so. In addition to the Vulkan API, vulkan_core.h also defines a small number of C preprocessor macros that are described below.

Vulkan Header File Version Number

VK_HEADER_VERSION is the version number of the vulkan_core.h header. This value is kept synchronized with the patch version of the released Specification.

```
// Provided by VK_VERSION_1_0
// Version of this file
#define VK_HEADER_VERSION 301
```

VK_HEADER_VERSION_COMPLETE is the complete version number of the vulkan_core.h header, comprising the major, minor, and patch versions. The major/minor values are kept synchronized with the complete version of the released Specification. This value is intended for use by automated tools to identify exactly which version of the header was used during their generation.

Applications should not use this value as their VkApplicationInfo::apiVersion. Instead applications

should explicitly select a specific fixed major/minor API version using, for example, one of the VK_API_VERSION_*_* values.

```
// Provided by VK_VERSION_1_0
// Complete version of this file
#define VK_HEADER_VERSION_COMPLETE VK_MAKE_API_VERSION(0, 1, 3, VK_HEADER_VERSION)
```

VK_API_VERSION is now commented out of vulkan_core.h and **cannot** be used.

```
// Provided by VK_VERSION_1_0
// DEPRECATED: This define has been removed. Specific version defines (e.g.
VK_API_VERSION_1_0), or the VK_MAKE_VERSION macro, should be used instead.
//#define VK_API_VERSION VK_MAKE_API_VERSION(0, 1, 0, 0) // Patch version should
always be set to 0
```

Vulkan Handle Macros

VK_DEFINE_HANDLE defines a dispatchable handle type.

```
// Provided by VK_VERSION_1_0

#define VK_DEFINE_HANDLE(object) typedef struct object##_T* object;
```

- object is the name of the resulting C type.

The only dispatchable handle types are those related to device and instance management, such as VkDevice.

VK_DEFINE_NON_DISPATCHABLE_HANDLE defines a non-dispatchable handle type.

```
// Provided by VK_VERSION_1_0

#ifndef VK_DEFINE_NON_DISPATCHABLE_HANDLE
    #if (VK_USE_64_BIT_PTR_DEFINES==1)
        #define VK_DEFINE_NON_DISPATCHABLE_HANDLE(object) typedef struct object##_T
*object;
    #else
        #define VK_DEFINE_NON_DISPATCHABLE_HANDLE(object) typedef uint64_t object;
    #endif
#endif
```

- object is the name of the resulting C type.

Most Vulkan handle types, such as VkBuffer, are non-dispatchable.

NOTE The vulkan_core.h header allows the VK_DEFINE_NON_DISPATCHABLE_HANDLE

> and VK_NULL_HANDLE definitions to be overridden by the application. If VK_DEFINE_NON_DISPATCHABLE_HANDLE is already defined when vulkan_core.h is compiled, the default definitions for VK_DEFINE_NON_DISPATCHABLE_HANDLE and VK_NULL_HANDLE are skipped. This allows the application to define a binary-compatible custom handle which **may** provide more type-safety or other features needed by the application. Applications **must** not define handles in a way that is not binary compatible - where binary compatibility is platform dependent.

VK_NULL_HANDLE is a reserved value representing a non-valid object handle. It may be passed to and returned from Vulkan commands only when specifically allowed.

```
// Provided by VK_VERSION_1_0

#ifndef VK_DEFINE_NON_DISPATCHABLE_HANDLE
    #if (VK_USE_64_BIT_PTR_DEFINES==1)
        #if (defined(__cplusplus) && (__cplusplus >= 201103L)) || (defined(_MSVC_LANG)
&& (_MSVC_LANG >= 201103L))
            #define VK_NULL_HANDLE nullptr
        #else
            #define VK_NULL_HANDLE ((void*)0)
        #endif
    #else
        #define VK_NULL_HANDLE 0ULL
    #endif
#endif
#ifndef VK_NULL_HANDLE
    #define VK_NULL_HANDLE 0
#endif
```

VK_USE_64_BIT_PTR_DEFINES defines whether the default non-dispatchable handles are declared using either a 64-bit pointer type or a 64-bit unsigned integer type.

VK_USE_64_BIT_PTR_DEFINES is set to '1' to use a 64-bit pointer type or any other value to use a 64-bit unsigned integer type.

```
// Provided by VK_VERSION_1_0

#ifndef VK_USE_64_BIT_PTR_DEFINES
    #if defined(__LP64__) || defined(_WIN64) || (defined(__x86_64__) &&
!defined(__ILP32__) ) || defined(_M_X64) || defined(__ia64) || defined (_M_IA64) ||
defined(__aarch64__) || defined(__powerpc64__) || (defined(__riscv) && __riscv_xlen ==
64)
        #define VK_USE_64_BIT_PTR_DEFINES 1
    #else
        #define VK_USE_64_BIT_PTR_DEFINES 0
    #endif
#endif
```

NOTE

The `vulkan_core.h` header allows the `VK_USE_64_BIT_PTR_DEFINES` definition to be overridden by the application. This allows the application to select either a 64-bit pointer type or a 64-bit unsigned integer type for non-dispatchable handles in the case where the predefined preprocessor check does not identify the desired configuration.

NOTE

This macro was introduced starting with the Vulkan 1.2.174 headers, and its availability can be checked at compile time by requiring `VK_HEADER_VERSION >= 174`.

It is not available if you are using older headers, such as may be shipped with an older Vulkan SDK. Developers requiring this functionality may wish to include a copy of the current Vulkan headers with their project in this case.

Window System-Specific Header Control (Informative)

To use a Vulkan extension supporting a platform-specific window system, header files for that window system **must** be included at compile time, or platform-specific types **must** be forward-declared. The Vulkan header files are unable to determine whether or not an external header is available at compile time, so platform-specific extensions are provided in separate headers from the core API and platform-independent extensions, allowing applications to decide which ones they need to be defined and how the external headers are included.

Extensions dependent on particular sets of platform headers, or that forward-declare platform-specific types, are declared in a header named for that platform. Before including these platform-specific Vulkan headers, applications **must** include both `vulkan_core.h` and any external native headers the platform extensions depend on.

As a convenience for applications that do not need the flexibility of separate platform-specific Vulkan headers, `vulkan.h` includes `vulkan_core.h`, and then conditionally includes platform-specific Vulkan headers and the external headers they depend on. Applications control which platform-specific headers are included by #defining macros before including `vulkan.h`.

The correspondence between platform-specific extensions, external headers they require, the platform-specific header which declares them, and the preprocessor macros which enable inclusion by `vulkan.h` are shown in the following table.

Table 78. Window System Extensions and Headers

Extension Name	Window System Name	Platform-specific Header	Required External Headers	Controlling `vulkan.h` Macro
`VK_KHR_android_surface`	Android	`vulkan_android.h`	None	`VK_USE_PLATFORM_ANDROID_KHR`
`VK_KHR_wayland_surface`	Wayland	`vulkan_wayland.h`	`<wayland-client.h>`	`VK_USE_PLATFORM_WAYLAND_KHR`

Extension Name	Window System Name	Platform-specific Header	Required External Headers	Controlling `vulkan.h` Macro
VK_KHR_win32_surface, VK_KHR_external_memory_win32, VK_KHR_win32_keyed_mutex, VK_KHR_external_semaphore_win32, VK_KHR_external_fence_win32, VK_NV_external_memory_win32, VK_NV_win32_keyed_mutex	Microsoft Windows	vulkan_win32.h	<windows.h>	VK_USE_PLATFORM_WIN32_KHR
VK_KHR_xcb_surface	X11 Xcb	vulkan_xcb.h	<xcb/xcb.h>	VK_USE_PLATFORM_XCB_KHR
VK_KHR_xlib_surface	X11 Xlib	vulkan_xlib.h	<X11/Xlib.h>	VK_USE_PLATFORM_XLIB_KHR
VK_EXT_directfb_surface	DirectFB	vulkan_directfb.h	<directfb/directfb.h>	VK_USE_PLATFORM_DIRECTFB_EXT
VK_EXT_acquire_xlib_display	X11 XRAndR	vulkan_xlib_xrandr.h	<X11/Xlib.h>, <X11/extensions/Xrandr.h>	VK_USE_PLATFORM_XLIB_XRANDR_EXT
VK_GGP_stream_descriptor_surface, VK_GGP_frame_token	Google Games Platform	vulkan_ggp.h	<ggp_c/vulkan_types.h>	VK_USE_PLATFORM_GGP
VK_MVK_ios_surface	iOS	vulkan_ios.h	None	VK_USE_PLATFORM_IOS_MVK
VK_MVK_macos_surface	macOS	vulkan_macos.h	None	VK_USE_PLATFORM_MACOS_MVK
VK_NN_vi_surface	VI	vulkan_vi.h	None	VK_USE_PLATFORM_VI_NN
VK_FUCHSIA_imagepipe_surface	Fuchsia	vulkan_fuchsia.h	<zircon/types.h>	VK_USE_PLATFORM_FUCHSIA
VK_EXT_metal_surface	Metal on CoreAnimation	vulkan_metal.h	None	VK_USE_PLATFORM_METAL_EXT
VK_QNX_screen_surface	QNX Screen	vulkan_screen.h	<screen/screen.h>	VK_USE_PLATFORM_SCREEN_QNX

NOTE This section describes the purpose of the headers independently of the specific underlying functionality of the window system extensions themselves. Each extension name will only link to a description of that extension when viewing a specification built with that extension included.

Provisional Extension Header Control (Informative)

Provisional extensions **should** not be used in production applications. The functionality defined by such extensions **may** change in ways that break backwards compatibility between revisions, and before final release of a non-provisional version of that extension.

Provisional extensions are defined in a separate *provisional header*, `vulkan_beta.h`, allowing applications to decide whether or not to include them. The mechanism is similar to window system-specific headers: before including `vulkan_beta.h`, applications **must** include `vulkan_core.h`.

NOTE Sometimes a provisional extension will include a subset of its interfaces in `vulkan_core.h`. This may occur if the provisional extension is promoted from an existing vendor or EXT extension and some of the existing interfaces are defined as aliases of the provisional extension interfaces. All other interfaces of that provisional extension which are not aliased will be included in `vulkan_beta.h`.

As a convenience for applications, `vulkan.h` conditionally includes `vulkan_beta.h`. Applications **can** control inclusion of `vulkan_beta.h` by #defining the macro `VK_ENABLE_BETA_EXTENSIONS` before including `vulkan.h`.

NOTE Starting in version 1.2.171 of the Specification, all provisional enumerants are protected by the macro `VK_ENABLE_BETA_EXTENSIONS`. Applications needing to use provisional extensions must always define this macro, even if they are explicitly including `vulkan_beta.h`. This is a minor change to behavior, affecting only provisional extensions.

NOTE This section describes the purpose of the provisional header independently of the specific provisional extensions which are contained in that header at any given time. The extension appendices for provisional extensions note their provisional status, and link back to this section for more information. Provisional extensions are intended to provide early access for bleeding-edge developers, with the understanding that extension interfaces may change in response to developer feedback. Provisional extensions are very likely to eventually be updated and released as non-provisional extensions, but there is no guarantee this will happen, or how long it will take if it does happen.

Video Std Headers

Performing video coding operations usually involves the application having to provide various parameters, data structures, or other syntax elements specific to the particular video compression standard used, and the associated semantics are covered by the specification of those.

The interface descriptions of these are available in the header files derived from the `video.xml` XML file, which is the canonical machine-readable description of data structures and enumerations that are associated with the externally-provided video compression standards.

Table 79. Video Std Headers

Video Std Header Name	Description	Header File	Related Extensions
vulkan_video_codecs_common	Codec-independent common definitions	<vk_video/vulkan_video_codecs_common.h>	-
vulkan_video_codec_h264std	ITU-T H.264 common definitions	<vk_video/vulkan_video_codec_h264std.h>	VK_KHR_video_decode_h264, VK_KHR_video_encode_h264
vulkan_video_codec_h264std_decode	ITU-T H.264 decode-specific definitions	<vk_video/vulkan_video_codec_h264std_decode.h>	VK_KHR_video_decode_h264
vulkan_video_codec_h264std_encode	ITU-T H.264 encode-specific definitions	<vk_video/vulkan_video_codec_h264std_encode.h>	VK_KHR_video_encode_h264
vulkan_video_codec_h265std	ITU-T H.265 common definitions	<vk_video/vulkan_video_codec_h265std.h>	VK_KHR_video_decode_h265, VK_KHR_video_encode_h265
vulkan_video_codec_h265std_decode	ITU-T H.265 decode-specific definitions	<vk_video/vulkan_video_codec_h265std_decode.h>	VK_KHR_video_decode_h265
vulkan_video_codec_h265std_encode	ITU-T H.265 encode-specific definitions	<vk_video/vulkan_video_codec_h265std_encode.h>	VK_KHR_video_encode_h265
vulkan_video_codec_av1std	AV1 common definitions	<vk_video/vulkan_video_codec_av1std.h>	VK_KHR_video_decode_av1
vulkan_video_codec_av1std_decode	AV1 decode-specific definitions	<vk_video/vulkan_video_codec_av1std_decode.h>	VK_KHR_video_decode_av1

Appendix H: Invariance

The Vulkan specification is not pixel exact. It therefore does not guarantee an exact match between images produced by different Vulkan implementations. However, the specification does specify exact matches, in some cases, for images produced by the same implementation. The purpose of this appendix is to identify and provide justification for those cases that require exact matches.

Repeatability

The obvious and most fundamental case is repeated issuance of a series of Vulkan commands. For any given Vulkan and framebuffer state vector, and for any Vulkan command, the resulting Vulkan and framebuffer state **must** be identical whenever the command is executed on that initial Vulkan and framebuffer state. This repeatability requirement does not apply when using shaders containing side effects (image and buffer variable stores and atomic operations), because these memory operations are not guaranteed to be processed in a defined order.

One purpose of repeatability is avoidance of visual artifacts when a double-buffered scene is redrawn. If rendering is not repeatable, swapping between two buffers rendered with the same command sequence **may** result in visible changes in the image. Such false motion is distracting to the viewer. Another reason for repeatability is testability.

Repeatability, while important, is a weak requirement. Given only repeatability as a requirement, two scenes rendered with one (small) polygon changed in position might differ at every pixel. Such a difference, while within the law of repeatability, is certainly not within its spirit. Additional invariance rules are desirable to ensure useful operation.

Multi-Pass Algorithms

Invariance is necessary for a whole set of useful multi-pass algorithms. Such algorithms render multiple times, each time with a different Vulkan mode vector, to eventually produce a result in the framebuffer. Examples of these algorithms include:

- “Erasing” a primitive from the framebuffer by redrawing it, either in a different color or using the XOR logical operation.
- Using stencil operations to compute capping planes.

Invariance Rules

For a given Vulkan device:

Rule 1 *For any given Vulkan and framebuffer state vector, and for any given Vulkan command, the resulting Vulkan and framebuffer state **must** be identical each time the command is executed on that initial Vulkan and framebuffer state.*

Rule 2 *Changes to the following state values have no side effects (the use of any other state value is not affected by the change):*

Required:

- *Color and depth/stencil attachment contents*
- *Scissor parameters (other than enable)*
- *Write masks (color, depth, stencil)*
- *Clear values (color, depth, stencil)*

Strongly suggested:

- *Stencil parameters (other than enable)*
- *Depth test parameters (other than enable)*
- *Blend parameters (other than enable)*
- *Logical operation parameters (other than enable)*

Corollary 1 *Fragment generation is invariant with respect to the state values listed in Rule 2.*

Rule 3 *The arithmetic of each per-fragment operation is invariant except with respect to parameters that directly control it.*

Corollary 2 *Images rendered into different color attachments of the same framebuffer, either simultaneously or separately using the same command sequence, are pixel identical.*

Rule 4 *Identical pipelines will produce the same result when run multiple times with the same input. The wording "Identical pipelines" means VkPipeline objects that have been created with identical SPIR-V binaries and identical state, which are then used by commands executed using the same Vulkan state vector. Invariance is relaxed for shaders with side effects, such as performing stores or atomics.*

Rule 5 *All fragment shaders that either conditionally or unconditionally assign* `FragCoord.z` *to* `FragDepth` *are depth-invariant with respect to each other, for those fragments where the assignment to* `FragDepth` *actually is done.*

If a sequence of Vulkan commands specifies primitives to be rendered with shaders containing side effects (image and buffer variable stores and atomic operations), invariance rules are relaxed. In particular, rule 1, corollary 2, and rule 4 do not apply in the presence of shader side effects.

The following weaker versions of rules 1 and 4 apply to Vulkan commands involving shader side effects:

Rule 6 *For any given Vulkan and framebuffer state vector, and for any given Vulkan command, the contents of any framebuffer state not directly or indirectly affected by results of shader image or buffer variable stores or atomic operations* ***must*** *be identical each time the command is executed on that initial Vulkan and framebuffer state.*

Rule 7 *Identical pipelines will produce the same result when run multiple times with the same input as long as:*

- *shader invocations do not use image atomic operations;*

- *no framebuffer memory is written to more than once by image stores, unless all such stores write the same value; and*
- *no shader invocation, or other operation performed to process the sequence of commands, reads memory written to by an image store.*

NOTE

The OpenGL specification has the following invariance rule: Consider a primitive p' obtained by translating a primitive p through an offset (x, y) in window coordinates, where x and y are integers. As long as neither p' nor p is clipped, it **must** be the case that each fragment f' produced from p' is identical to a corresponding fragment f from p except that the center of f' is offset by (x, y) from the center of f.

This rule does not apply to Vulkan and is an intentional difference from OpenGL.

When any sequence of Vulkan commands triggers shader invocations that perform image stores or atomic operations, and subsequent Vulkan commands read the memory written by those shader invocations, these operations **must** be explicitly synchronized.

Tessellation Invariance

When using a pipeline containing tessellation evaluation shaders, the fixed-function tessellation primitive generator consumes the input patch specified by an application and emits a new set of primitives. The following invariance rules are intended to provide repeatability guarantees. Additionally, they are intended to allow an application with a carefully crafted tessellation evaluation shader to ensure that the sets of triangles generated for two adjacent patches have identical vertices along shared patch edges, avoiding “cracks” caused by minor differences in the positions of vertices along shared edges.

Rule 1 *When processing two patches with identical outer and inner tessellation levels, the tessellation primitive generator will emit an identical set of point, line, or triangle primitives as long as the pipeline used to process the patch primitives has tessellation evaluation shaders specifying the same tessellation mode, spacing, vertex order, and point mode decorations. Two sets of primitives are considered identical if and only if they contain the same number and type of primitives and the generated tessellation coordinates for the vertex numbered m of the primitive numbered n are identical for all values of m and n.*

Rule 2 *The set of vertices generated along the outer edge of the subdivided primitive in triangle and quad tessellation, and the tessellation coordinates of each, depend only on the corresponding outer tessellation level and the spacing decorations in the tessellation shaders of the pipeline.*

Rule 3 *The set of vertices generated when subdividing any outer primitive edge is always symmetric. For triangle tessellation, if the subdivision generates a vertex with tessellation coordinates of the form (0, x, 1-x), (x, 0, 1-x), or (x, 1-x, 0), it will also generate a vertex with coordinates of exactly (0, 1-x, x), (1-x, 0, x), or (1-x, x, 0), respectively. For quad tessellation, if the subdivision generates a vertex with coordinates of (x, 0) or (0, x), it will also generate a vertex with coordinates of exactly (1-x, 0) or (0, 1-x), respectively. For isoline tessellation, if it generates vertices at (0, x) and (1, x) where x is not zero, it will also generate vertices at exactly (0, 1-x) and (1, 1-x), respectively.*

Rule 4 *The set of vertices generated when subdividing outer edges in triangular and quad tessellation*

must *be independent of the specific edge subdivided, given identical outer tessellation levels and spacing. For example, if vertices at (x, 1 - x, 0) and (1-x, x, 0) are generated when subdividing the w = 0 edge in triangular tessellation, vertices* ***must*** *be generated at (x, 0, 1-x) and (1-x, 0, x) when subdividing an otherwise identical v = 0 edge. For quad tessellation, if vertices at (x, 0) and (1-x, 0) are generated when subdividing the v = 0 edge, vertices* ***must*** *be generated at (0, x) and (0, 1-x) when subdividing an otherwise identical u = 0 edge.*

Rule 5 *When processing two patches that are identical in all respects enumerated in rule 1 except for vertex order, the set of triangles generated for triangle and quad tessellation* ***must*** *be identical except for vertex and triangle order. For each triangle n1 produced by processing the first patch, there* ***must*** *be a triangle n2 produced when processing the second patch each of whose vertices has the same tessellation coordinates as one of the vertices in n1.*

Rule 6 *When processing two patches that are identical in all respects enumerated in rule 1 other than matching outer tessellation levels and/or vertex order, the set of interior triangles generated for triangle and quad tessellation* ***must*** *be identical in all respects except for vertex and triangle order. For each interior triangle n1 produced by processing the first patch, there* ***must*** *be a triangle n2 produced when processing the second patch each of whose vertices has the same tessellation coordinates as one of the vertices in n1. A triangle produced by the tessellator is considered an interior triangle if none of its vertices lie on an outer edge of the subdivided primitive.*

Rule 7 *For quad and triangle tessellation, the set of triangles connecting an inner and outer edge depends only on the inner and outer tessellation levels corresponding to that edge and the spacing decorations.*

Rule 8 *The value of all defined components of* `TessCoord` *will be in the range [0, 1]. Additionally, for any defined component x of* `TessCoord`*, the results of computing 1.0-x in a tessellation evaluation shader will be exact. If any floating-point values in the range [0, 1] fail to satisfy this property, such values* ***must*** *not be used as tessellation coordinate components.*

Appendix I: Lexicon

This appendix defines terms, abbreviations, and API prefixes used in the Specification.

Glossary

The terms defined in this section are used consistently throughout the Specification and may be used with or without capitalization.

Accessible (Descriptor Binding)

A descriptor binding is accessible to a shader stage if that stage is included in the `stageFlags` of the descriptor binding. Descriptors using that binding **can** only be used by stages in which they are accessible.

Acquire Operation (Resource)

An operation that acquires ownership of an image subresource or buffer range.

Adjacent Vertex

A vertex in an adjacency primitive topology that is not part of a given primitive, but is accessible in geometry shaders.

Alias (API type/command)

An identical definition of another API type/command with the same behavior but a different name.

Aliased Range (Memory)

A range of a device memory allocation that is bound to multiple resources simultaneously.

Allocation Scope

An association of a host memory allocation to a parent object or command, where the allocation's lifetime ends before or at the same time as the parent object is freed or destroyed, or during the parent command.

API command

Any command defined in the Vulkan specification. These entry points all have a vk prefix.

Aspect (Image)

Some image types contain multiple kinds (called "aspects") of data for each pixel, where each aspect is used in a particular way by the pipeline and **may** be stored differently or separately from other aspects. For example, the color components of an image format make up the color aspect of the image, and **can** be used as a framebuffer color attachment. Some operations, like depth testing, operate only on specific aspects of an image.

Attachment (Render Pass)

A zero-based integer index name used in render pass creation to refer to a framebuffer attachment that is accessed by one or more subpasses. The index also refers to an attachment description which includes information about the properties of the image view that will later be

attached.

Availability Operation

An operation that causes the values generated by specified memory write accesses to become available for future access.

Available

A state of values written to memory that allows them to be made visible.

Back-Facing

See Facingness.

Batch

A single structure submitted to a queue as part of a queue submission command, describing a set of queue operations to execute.

Backwards Compatibility

A given version of the API is backwards compatible with an earlier version if an application, relying only on valid behavior and functionality defined by the earlier specification, is able to correctly run against each version without any modification. This assumes no active attempt by that application to not run when it detects a different version.

Binary Semaphore

A semaphore with a boolean payload indicating whether the semaphore is signaled or unsignaled. Represented by a VkSemaphore object created with a semaphore type of `VK_SEMAPHORE_TYPE_BINARY` .

Binding (Memory)

An association established between a range of a resource object and a range of a memory object. These associations determine the memory locations affected by operations performed on elements of a resource object. Memory bindings are established using the vkBindBufferMemory command for non-sparse buffer objects, using the vkBindImageMemory command for non-sparse image objects , and using the vkQueueBindSparse command for sparse resources .

Blend Constant

Four floating-point (RGBA) values used as an input to blending.

Blending

Arithmetic operations between a fragment color value and a value in a color attachment that produce a final color value to be written to the attachment.

Buffer

A resource that represents a linear array of data in device memory. Represented by a VkBuffer object.

Buffer Device Address

A 64-bit value used in a shader to access buffer memory through the `PhysicalStorageBuffer` storage class.

Buffer View

An object that represents a range of a specific buffer, and state controlling how the contents are interpreted. Represented by a VkBufferView object.

Built-In Variable

A variable decorated in a shader, where the decoration makes the variable take values provided by the execution environment or values that are generated by fixed-function pipeline stages.

Built-In Interface Block

A block defined in a shader containing only variables decorated with built-in decorations, and is used to match against other shader stages.

Clip Coordinates

The homogeneous coordinate space in which vertex positions (`Position` decoration) are written by pre-rasterization shader stages.

Clip Distance

A built-in output from pre-rasterization shader stages defining a clip half-space against which the primitive is clipped.

Clip Volume

The intersection of the view volume with all clip half-spaces.

Color Attachment

A subpass attachment point, or image view, that is the target of fragment color outputs and blending.

Color Renderable Format

A VkFormat where `VK_FORMAT_FEATURE_COLOR_ATTACHMENT_BIT` is set in one of the following, depending on the image's tiling:

- VkFormatProperties::`linearTilingFeatures`
- VkFormatProperties::`optimalTilingFeatures`

Combined Image Sampler

A descriptor type that includes both a sampled image and a sampler.

Command Buffer

An object that records commands to be submitted to a queue. Represented by a VkCommandBuffer object.

Command Pool

An object that command buffer memory is allocated from, and that owns that memory. Command pools aid multithreaded performance by enabling different threads to use different allocators, without internal synchronization on each use. Represented by a VkCommandPool object.

Compatible Allocator

When allocators are compatible, allocations from each allocator **can** be freed by the other allocator.

Compatible Image Formats

When formats are compatible, images created with one of the formats **can** have image views created from it using any of the compatible formats. Also see *Size-Compatible Image Formats*.

Compatible Queues

Queues within a queue family. Compatible queues have identical properties.

Complete Mipmap Chain

The entire set of mip levels that can be provided for an image, from the largest application-specified mip level size down to the *minimum mip level size*. See Image Mip Level Sizing.

Component (Format)

A distinct part of a format. Color components are represented with `R`, `G`, `B`, and `A`. Depth and stencil components are represented with `D` and `S`. Formats **can** have multiple instances of the same component. Some formats have other notations such as `E` or `X` which are not considered a component of the format.

Compressed Texel Block

An element of an image having a block-compressed format, comprising a rectangular block of texel values that are encoded as a single value in memory. Compressed texel blocks of a particular block-compressed format have a corresponding width, height, and depth defining the dimensions of these elements in units of texels, and a size in bytes of the encoding in memory.

Constant Integral Expressions

A SPIR-V constant instruction whose type is `OpTypeInt`. See *Constant Instruction* in section 2.2.1 “Instructions” of the Khronos SPIR-V Specification.

Coverage Index

The index of a sample in the coverage mask.

Coverage Mask

A bitfield associated with a fragment representing the samples that were determined to be covered based on the result of rasterization, and then subsequently modified by fragment operations or the fragment shader.

Cull Distance

A built-in output from pre-rasterization shader stages defining a cull half-space where the primitive is rejected if all vertices have a negative value for the same cull distance.

Cull Volume

The intersection of the view volume with all cull half-spaces.

Decoration (SPIR-V)

Auxiliary information such as built-in variables, stream numbers, invariance, interpolation type,

relaxed precision, etc., added to variables or structure-type members through decorations.

Deprecated (feature)

A feature is deprecated if it is no longer recommended as the correct or best way to achieve its intended purpose.

Depth/Stencil Attachment

A subpass attachment point, or image view, that is the target of depth and/or stencil test operations and writes.

Depth/Stencil Format

A VkFormat that includes depth and/or stencil components.

Depth/Stencil Image (or ImageView)

A VkImage (or VkImageView) with a depth/stencil format.

Depth/Stencil Resolve Attachment

A subpass attachment point, or image view, that is the target of a multisample resolve operation from the corresponding depth/stencil attachment at the end of the subpass.

Derivative Group

A set of fragment shader invocations that cooperate to compute derivatives, including implicit derivatives for sampled image operations.

Descriptor

Information about a resource or resource view written into a descriptor set that is used to access the resource or view from a shader.

Descriptor Binding

An entry in a descriptor set layout corresponding to zero or more descriptors of a single descriptor type in a set. Defined by a VkDescriptorSetLayoutBinding structure.

Descriptor Pool

An object that descriptor sets are allocated from, and that owns the storage of those descriptor sets. Descriptor pools aid multithreaded performance by enabling different threads to use different allocators, without internal synchronization on each use. Represented by a VkDescriptorPool object.

Descriptor Set

An object that resource descriptors are written into via the API, and that **can** be bound to a command buffer such that the descriptors contained within it **can** be accessed from shaders. Represented by a VkDescriptorSet object.

Descriptor Set Layout

An object defining the set of resources (types and counts) and their relative arrangement (in the binding namespace) within a descriptor set. Used when allocating descriptor sets and when creating pipeline layouts. Represented by a VkDescriptorSetLayout object.

Device

The processor(s) and execution environment that perform tasks requested by the application via the Vulkan API.

Device Group

A set of physical devices that support accessing each other's memory and recording a single command buffer that **can** be executed on all the physical devices.

Device Index

A zero-based integer that identifies one physical device from a logical device. A device index is valid if it is less than the number of physical devices in the logical device.

Device Mask

A bitmask where each bit represents one device index. A device mask value is valid if every bit that is set in the mask is at a bit position that is less than the number of physical devices in the logical device.

Device Memory

Memory accessible to the device. Represented by a VkDeviceMemory object.

Device-Level Command

Any command that is dispatched from a logical device, or from a child object of a logical device.

Device-Level Functionality

All device-level commands and objects, and their structures, enumerated types, and enumerants. Additionally, physical-device-level functionality defined by a device extension is also considered device-level functionality.

Device-Level Object

Logical device objects and their child objects. For example, VkDevice, VkQueue, and VkCommandBuffer objects are device-level objects.

Device-Local Memory

Memory that is connected to the device, and **may** be more performant for device access than host-local memory.

Direct Drawing Commands

Drawing commands that take all their parameters as direct arguments to the command (and not sourced via structures in buffer memory as the *indirect drawing commands*). Includes vkCmdDraw, and vkCmdDrawIndexed.

Disjoint

Disjoint planes are *image planes* to which memory is bound independently.
A *disjoint image* consists of multiple *disjoint planes*, and is created with the `VK_IMAGE_CREATE_DISJOINT_BIT` bit set.

Dispatchable Command

A non-global command. The first argument to each dispatchable command is a dispatchable

handle type.

Dispatchable Handle

A handle of a pointer handle type which **may** be used by layers as part of intercepting API commands.

Dispatching Commands

Commands that provoke work using a compute pipeline. Includes vkCmdDispatch and vkCmdDispatchIndirect.

Drawing Commands

Commands that provoke work using a graphics pipeline. Includes vkCmdDraw, vkCmdDrawIndexed, vkCmdDrawIndirectCount, vkCmdDrawIndexedIndirectCount, vkCmdDrawIndirect, and vkCmdDrawIndexedIndirect.

Duration (Command)

The *duration* of a Vulkan command refers to the interval between calling the command and its return to the caller.

Dynamic Storage Buffer

A storage buffer whose offset is specified each time the storage buffer is bound to a command buffer via a descriptor set.

Dynamic Uniform Buffer

A uniform buffer whose offset is specified each time the uniform buffer is bound to a command buffer via a descriptor set.

Dynamically Uniform

See *Dynamically Uniform* in section 2.2 “Terms” of the Khronos SPIR-V Specification.

Element

Arrays are composed of multiple elements, where each element exists at a unique index within that array. Used primarily to describe data passed to or returned from the Vulkan API.

Explicitly-Enabled Layer

A layer enabled by the application by adding it to the enabled layer list in vkCreateInstance or vkCreateDevice.

Event

A synchronization primitive that is signaled when execution of previous commands completes through a specified set of pipeline stages. Events can be waited on by the device and polled by the host. Represented by a VkEvent object.

Executable State (Command Buffer)

A command buffer that has ended recording commands and **can** be executed. See also Initial State and Recording State.

Execution Dependency

A dependency that guarantees that certain pipeline stages' work for a first set of commands has completed execution before certain pipeline stages' work for a second set of commands begins execution. This is accomplished via pipeline barriers, subpass dependencies, events, or implicit ordering operations.

Execution Dependency Chain

A sequence of execution dependencies that transitively act as a single execution dependency.

Explicit chroma reconstruction

An implementation of sampler $Y'C_BC_R$ conversion which reconstructs reduced-resolution chroma samples to luma resolution and then separately performs texture sample interpolation. This is distinct from an implicit implementation, which incorporates chroma sample reconstruction into texture sample interpolation.

Extension Scope

The set of objects and commands that **can** be affected by an extension. Extensions are either device scope or instance scope.

Extending Structure

A structure type which may appear in the `pNext` *chain* of another structure, extending the functionality of the other structure. Extending structures may be defined by either core API versions or extensions.

External Handle

A resource handle which has meaning outside of a specific Vulkan device or its parent instance. External handles **may** be used to share resources between multiple Vulkan devices in different instances, or between Vulkan and other APIs. Some external handle types correspond to platform-defined handles, in which case the resource **may** outlive any particular Vulkan device or instance and **may** be transferred between processes, or otherwise manipulated via functionality defined by the platform for that handle type.

External synchronization

A type of synchronization **required** of the application, where parameters defined to be externally synchronized **must** not be used simultaneously in multiple threads.

Facingness (Polygon)

A classification of a polygon as either front-facing or back-facing, depending on the orientation (winding order) of its vertices.

Facingness (Fragment)

A fragment is either front-facing or back-facing, depending on the primitive it was generated from. If the primitive was a polygon (regardless of polygon mode), the fragment inherits the facingness of the polygon. All other fragments are front-facing.

Fence

A synchronization primitive that is signaled when a set of batches or sparse binding operations complete execution on a queue. Fences **can** be waited on by the host. Represented by a VkFence

object.

Flat Shading

A property of a vertex attribute that causes the value from a single vertex (the provoking vertex) to be used for all vertices in a primitive, and for interpolation of that attribute to return that single value unaltered.

Format Features

A set of features from VkFormatFeatureFlagBits that a VkFormat is capable of using for various commands. The list is determined by factors such as VkImageTiling.

Fragment

A rectangular framebuffer region with associated data produced by rasterization and processed by fragment operations including the fragment shader.

Fragment Area

The width and height, in pixels, of a fragment.

Fragment Input Attachment Interface

Variables with `UniformConstant` storage class and a decoration of `InputAttachmentIndex` that are statically used by a fragment shader's entry point, which receive values from input attachments.

Fragment Output Interface

A fragment shader entry point's variables with `Output` storage class, which output to color and/or depth/stencil attachments.

Framebuffer

A collection of image views and a set of dimensions that, in conjunction with a render pass, define the inputs and outputs used by drawing commands. Represented by a VkFramebuffer object.

Framebuffer Attachment

One of the image views used in a framebuffer.

Framebuffer Coordinates

A coordinate system in which adjacent pixels' coordinates differ by 1 in x and/or y, with (0,0) in the upper left corner and pixel centers at half-integers.

Framebuffer-Space

Operating with respect to framebuffer coordinates.

Framebuffer-Local

A framebuffer-local dependency guarantees that only for a single framebuffer region, the first set of operations happens-before the second set of operations.

Framebuffer-Global

A framebuffer-global dependency guarantees that for all framebuffer regions, the first set of operations happens-before the second set of operations.

Framebuffer Region

A framebuffer region is a set of sample (x, y, layer, sample) coordinates that is a subset of the entire framebuffer.

Front-Facing

See Facingness.

Full Compatibility

A given version of the API is fully compatible with another version if an application, relying only on valid behavior and functionality defined by either of those specifications, is able to correctly run against each version without any modification. This assumes no active attempt by that application to not run when it detects a different version.

Global Command

A Vulkan command for which the first argument is not a dispatchable handle type.

Global Workgroup

A collection of local workgroups dispatched by a single dispatching command.

Handle

An opaque integer or pointer value used to refer to a Vulkan object. Each object type has a unique handle type.

Happen-after, happens-after

A transitive, irreflexive and antisymmetric ordering relation between operations. An execution dependency with a source of **A** and a destination of **B** enforces that **B** happens-after **A**. The inverse relation of happens-before.

Happen-before, happens-before

A transitive, irreflexive and antisymmetric ordering relation between operations. An execution dependency with a source of **A** and a destination of **B** enforces that **A** happens-before **B**. The inverse relation of happens-after.

Helper Invocation

A fragment shader invocation that is created solely for the purposes of evaluating derivatives for use in non-helper fragment shader invocations, and which does not have side effects.

Host

The processor(s) and execution environment that the application runs on, and that the Vulkan API is exposed on.

Host Mapped Device Memory

Device memory that is mapped for host access using vkMapMemory.

Host Memory

Memory not accessible to the device, used to store implementation data structures.

Host-Accessible Subresource

A buffer, or a linear image subresource in either the `VK_IMAGE_LAYOUT_PREINITIALIZED` or `VK_IMAGE_LAYOUT_GENERAL` layout. Host-accessible subresources have a well-defined addressing scheme which can be used by the host.

Host-Local Memory

Memory that is not local to the device, and **may** be less performant for device access than device-local memory.

Host-Visible Memory

Device memory that **can** be mapped on the host and **can** be read and written by the host.

ICD

Installable Client Driver. An ICD is represented as a VkPhysicalDevice.

Identically Defined Objects

Objects of the same type where all arguments to their creation or allocation functions, with the exception of `pAllocator`, are

1. Vulkan handles which refer to the same object or
2. identical scalar or enumeration values or
3. Host pointers which point to an array of values or structures which also satisfy these three constraints.

Image

A resource that represents a multi-dimensional formatted interpretation of device memory. Represented by a VkImage object.

Image Subresource

A specific mipmap level, layer, and set of aspects of an image.

Image Subresource Range

A set of image subresources that are contiguous mipmap levels and layers.

Image View

An object that represents an image subresource range of a specific image, and state controlling how the contents are interpreted. Represented by a VkImageView object.

Immutable Sampler

A sampler descriptor provided at descriptor set layout creation time for a specific binding. This sampler is then used for that binding in all descriptor sets allocated with the layout, and it **cannot** be changed.

Implicit chroma reconstruction

An implementation of sampler $Y'C_BC_R$ conversion which reconstructs the reduced-resolution chroma samples directly at the sample point, as part of the normal texture sampling operation. This is distinct from an *explicit chroma reconstruction* implementation, which reconstructs the reduced-resolution chroma samples to the resolution of the luma samples, then filters the result

as part of texture sample interpolation.

Implicitly-Enabled Layer

A layer enabled by a loader-defined mechanism outside the Vulkan API, rather than explicitly by the application during instance or device creation.

Index Buffer

A buffer bound via vkCmdBindIndexBuffer which is the source of index values used to fetch vertex attributes for a vkCmdDrawIndexed or vkCmdDrawIndexedIndirect command.

Indexed Drawing Commands

Drawing commands which use an *index buffer* as the source of index values used to fetch vertex attributes for a drawing command. Includes vkCmdDrawIndexed, vkCmdDrawIndexedIndirectCount, and vkCmdDrawIndexedIndirect.

Indirect Commands

Drawing or dispatching commands that source some of their parameters from structures in buffer memory. Includes vkCmdDrawIndirect, vkCmdDrawIndexedIndirect, vkCmdDrawIndirectCount, vkCmdDrawIndexedIndirectCount, and vkCmdDispatchIndirect.

Indirect Drawing Commands

Drawing commands that source some of their parameters from structures in buffer memory. Includes vkCmdDrawIndirect, vkCmdDrawIndirectCount, vkCmdDrawIndexedIndirectCount, and vkCmdDrawIndexedIndirect.

Initial State (Command Buffer)

A command buffer that has not begun recording commands. See also Recording State and Executable State.

Inline Uniform Block

A descriptor type that represents uniform data stored directly in descriptor sets, and supports read-only access in a shader.

Input Attachment

A descriptor type that represents an image view, and supports unfiltered read-only access in a shader, only at the fragment's location in the view.

Instance

The top-level Vulkan object, which represents the application's connection to the implementation. Represented by a VkInstance object.

Instance-Level Command

Any command that is dispatched from an instance, or from a child object of an instance, except for physical devices and their children.

Instance-Level Functionality

All instance-level commands and objects, and their structures, enumerated types, and enumerants.

Instance-Level Object

High-level Vulkan objects, which are not physical devices, nor children of physical devices. For example, VkInstance is an instance-level object.

Instance (Memory)

In a logical device representing more than one physical device, some device memory allocations have the requested amount of memory allocated multiple times, once for each physical device in a device mask. Each such replicated allocation is an instance of the device memory.

Instance (Resource)

In a logical device representing more than one physical device, buffer and image resources exist on all physical devices but **can** be bound to memory differently on each. Each such replicated resource is an instance of the resource.

Internal Synchronization

A type of synchronization **required** of the implementation, where parameters not defined to be externally synchronized **may** require internal mutexing to avoid multithreaded race conditions.

Invocation (Shader)

A single execution of an entry point in a SPIR-V module. For example, a single vertex's execution of a vertex shader or a single fragment's execution of a fragment shader.

Invocation Group

A set of shader invocations that are executed in parallel and that **must** execute the same control flow path in order for control flow to be considered dynamically uniform.

Linear Resource

A resource is *linear* if it is one of the following:

- a VkBuffer
- a VkImage created with `VK_IMAGE_TILING_LINEAR`

A resource is *non-linear* if it is one of the following:

- a VkImage created with `VK_IMAGE_TILING_OPTIMAL`

Local Workgroup

A collection of compute shader invocations invoked by a single dispatching command, which share data via `WorkgroupLocal` variables and can synchronize with each other.

Logical Device

An object that represents the application's interface to the physical device. The logical device is the parent of most Vulkan objects. Represented by a VkDevice object.

Logical Operation

Bitwise operations between a fragment color value and a value in a color attachment, that produce a final color value to be written to the attachment.

Lost Device

A state that a logical device **may** be in as a result of unrecoverable implementation errors, or other exceptional conditions.

Mappable

See Host-Visible Memory.

Memory Dependency

A memory dependency is an execution dependency which includes availability and visibility operations such that:

- The first set of operations happens-before the availability operation
- The availability operation happens-before the visibility operation
- The visibility operation happens-before the second set of operations

Memory Domain

A memory domain is an abstract place to which memory writes are made available by availability operations and memory domain operations. The memory domains correspond to the set of agents that the write **can** then be made visible to. The memory domains are *host*, *device*, *shader*, *workgroup instance* (for workgroup instance there is a unique domain for each compute workgroup) and *subgroup instance* (for subgroup instance there is a unique domain for each subgroup).

Memory Domain Operation

An operation that makes the writes that are available to one memory domain available to another memory domain.

Memory Heap

A region of memory from which device memory allocations **can** be made.

Memory Type

An index used to select a set of memory properties (e.g. mappable, cached) for a device memory allocation.

Minimum Mip Level Size

The smallest size that is permitted for a mip level. For conventional images this is 1x1x1. See Image Mip Level Sizing.

Mip Tail Region

The set of mipmap levels of a sparse residency texture that are too small to fill a sparse block, and that **must** all be bound to memory collectively and opaquely.

Multi-planar

A *multi-planar format* (or “planar format”) is an image format consisting of more than one *plane*, identifiable with a `_2PLANE` or `_3PLANE` component to the format name and listed in Formats Requiring Sampler $Y'C_BC_R$ Conversion for `VK_IMAGE_ASPECT_COLOR_BIT` Image Views. A *multi-planar image* (or “planar image”) is an image of a multi-planar format.

Non-Dispatchable Handle

A handle of an integer handle type. Handle values **may** not be unique, even for two objects of the same type.

Non-Indexed Drawing Commands

Drawing commands for which the vertex attributes are sourced in linear order from the vertex input attributes for a drawing command (i.e. they do not use an *index buffer*). Includes vkCmdDraw, vkCmdDrawIndirectCount, and vkCmdDrawIndirect.

Normalized

A value that is interpreted as being in the range [0,1] as a result of being implicitly divided by some other value.

Normalized Device Coordinates

A coordinate space after perspective division is applied to clip coordinates, and before the viewport transformation converts them to framebuffer coordinates.

Obsoleted (feature)

A feature is obsolete if it can no longer be used.

Opaque Capture Address

A 64-bit value representing the device address of a buffer or memory object that is expected to be used by trace capture/replay tools in combination with the `bufferDeviceAddress` feature.

Overlapped Range (Aliased Range)

The aliased range of a device memory allocation that intersects a given image subresource of an image or range of a buffer.

Ownership (Resource)

If an entity (e.g. a queue family) has ownership of a resource, access to that resource is well-defined for access by that entity.

Packed Format

A format whose components are stored as a single texel block in memory, with their relative locations defined within that element.

Payload

Importable or exportable reference to the internal data of an object in Vulkan.

Peer Memory

An instance of memory corresponding to a different physical device than the physical device performing the memory access, in a logical device that represents multiple physical devices.

Physical Device

An object that represents a single device in the system. Represented by a VkPhysicalDevice object.

Physical-Device-Level Command

Any command that is dispatched from a physical device.

Physical-Device-Level Functionality

All physical-device-level commands and objects, and their structures, enumerated types, and enumerants.

Physical-Device-Level Object

Physical device objects. For example, VkPhysicalDevice is a physical-device-level object.

Pipeline

An object controlling how graphics or compute work is executed on the device. A pipeline includes one or more shaders, as well as state controlling any non-programmable stages of the pipeline. Represented by a VkPipeline object.

Pipeline Barrier

An execution and/or memory dependency recorded as an explicit command in a command buffer, that forms a dependency between the previous and subsequent commands.

Pipeline Cache

An object that **can** be used to collect and retrieve information from pipelines as they are created, and **can** be populated with previously retrieved information in order to accelerate pipeline creation. Represented by a VkPipelineCache object.

Pipeline Layout

An object defining the set of resources (via a collection of descriptor set layouts) and push constants used by pipelines that are created using the layout. Used when creating a pipeline and when binding descriptor sets and setting push constant values. Represented by a VkPipelineLayout object.

Pipeline Stage

A logically independent execution unit that performs some of the operations defined by an action command.

`pNext` Chain

A set of structures chained together through their `pNext` members.

Planar

See *multi-planar*.

Plane

An *image plane* is part of the representation of an image, containing a subset of the color components necessary to represent the texels in the image and with a contiguous mapping of coordinates to bound memory. Most images consist only of a single plane, but some formats spread the components across multiple image planes. The host-accessible properties of each image plane are accessible for a linear layout using vkGetImageSubresourceLayout. If a multi-planar image is created with the `VK_IMAGE_CREATE_DISJOINT_BIT` bit set, the image is described as *disjoint*, and its planes are therefore bound to memory independently.

Point Sampling (Rasterization)

A rule that determines whether a fragment sample location is covered by a polygon primitive by testing whether the sample location is in the interior of the polygon in framebuffer-space, or on the boundary of the polygon according to the tie-breaking rules.

Potential Format Features

The union of all VkFormatFeatureFlagBits that the implementation supports for a specified VkFormat, over all supported image tilings.

Pre-rasterization

Operations that execute before rasterization, and any state associated with those operations.

Preserve Attachment

One of a list of attachments in a subpass description that is not read or written by the subpass, but that is read or written on earlier and later subpasses and whose contents **must** be preserved through this subpass.

Primary Command Buffer

A command buffer that **can** execute secondary command buffers, and **can** be submitted directly to a queue.

Primitive Topology

State controlling how vertices are assembled into primitives, e.g. as lists of triangles, strips of lines, etc.

Promoted (feature)

A feature from an older extension is considered promoted if it is made available as part of a new core version or newer extension with wider support.

Protected Buffer

A buffer to which protected device memory **can** be bound.

Protected-capable Device Queue

A device queue to which protected command buffers **can** be submitted.

Protected Command Buffer

A command buffer which **can** be submitted to a protected-capable device queue.

Protected Device Memory

Device memory which **can** be visible to the device but **must** not be visible to the host.

Protected Image

An image to which protected device memory **can** be bound.

Provisional

A feature is released provisionally in order to get wider feedback on the functionality before it is finalized. Provisional features may change in ways that break backwards compatibility, and thus are not recommended for use in production applications.

Provoking Vertex

The vertex in a primitive from which flat shaded attribute values are taken. This is generally the "first" vertex in the primitive, and depends on the primitive topology.

Push Constants

A small bank of values writable via the API and accessible in shaders. Push constants allow the application to set values used in shaders without creating buffers or modifying and binding descriptor sets for each update.

Push Constant Interface

The set of variables with `PushConstant` storage class that are statically used by a shader entry point, and which receive values from push constant commands.

Descriptor Update Template

An object specifying a mapping from descriptor update information in host memory to elements in a descriptor set, which helps enable more efficient descriptor set updates.

Query Pool

An object containing a number of query entries and their associated state and results. Represented by a VkQueryPool object.

Queue

An object that executes command buffers and sparse binding operations on a device. Represented by a VkQueue object.

Queue Family

A set of queues that have common properties and support the same functionality, as advertised in VkQueueFamilyProperties.

Queue Operation

A unit of work to be executed by a specific queue on a device, submitted via a queue submission command. Each queue submission command details the specific queue operations that occur as a result of calling that command. Queue operations typically include work that is specific to each command, and synchronization tasks.

Queue Submission

Zero or more batches and an optional fence to be signaled, passed to a command for execution on a queue. See the Devices and Queues chapter for more information.

Recording State (Command Buffer)

A command buffer that is ready to record commands. See also Initial State and Executable State.

Release Operation (Resource)

An operation that releases ownership of an image subresource or buffer range.

Render Pass

An object that represents a set of framebuffer attachments and phases of rendering using those attachments. Represented by a VkRenderPass object.

Render Pass Instance

A use of a render pass in a command buffer.

Required Extensions

Extensions that **must** be enabled alongside extensions dependent on them (see Extension Dependencies).

Reset (Command Buffer)

Resetting a command buffer discards any previously recorded commands and puts a command buffer in the initial state.

Residency Code

An integer value returned by sparse image instructions, indicating whether any sparse unbound texels were accessed.

Resolve Attachment

A subpass attachment point, or image view, that is the target of a multisample resolve operation from the corresponding color attachment at the end of the subpass.

Sample Index

The index of a sample within a single set of samples.

Sample Shading

Invoking the fragment shader multiple times per fragment, with the covered samples partitioned among the invocations.

Sampled Image

A descriptor type that represents an image view, and supports filtered (sampled) and unfiltered read-only access in a shader.

Sampler

An object containing state controlling how sampled image data is sampled (or filtered) when accessed in a shader. Also a descriptor type describing the object. Represented by a VkSampler object.

Secondary Command Buffer

A command buffer that **can** be executed by a primary command buffer, and **must** not be submitted directly to a queue.

Self-Dependency

A subpass dependency from a subpass to itself, i.e. with `srcSubpass` equal to `dstSubpass`. A self-dependency is not automatically performed during a render pass instance, rather a subset of it **can** be performed via vkCmdPipelineBarrier during the subpass.

Semaphore

A synchronization primitive that supports signal and wait operations, and **can** be used to synchronize operations within a queue or across queues. Represented by a VkSemaphore object.

Shader

Instructions selected (via an entry point) from a shader module, which are executed in a shader stage.

Shader Code

A stream of instructions used to describe the operation of a shader.

Shader Module

A collection of shader code, potentially including several functions and entry points, that is used to create shaders in pipelines. Represented by a VkShaderModule object.

Shader Stage

A stage of the graphics or compute pipeline that executes shader code.

Side Effect

A store to memory or atomic operation on memory from a shader invocation.

Single-plane format

A format that is not *multi-planar*.

Size-Compatible Image Formats

When a compressed image format and an uncompressed image format are size-compatible, it means that the texel block size of the uncompressed format **must** equal the texel block size of the compressed format.

Sparse Block

An element of a sparse resource that can be independently bound to memory. Sparse blocks of a particular sparse resource have a corresponding size in bytes that they use in the bound memory.

Sparse Image Block

A sparse block in a sparse partially-resident image. In addition to the sparse block size in bytes, sparse image blocks have a corresponding width, height, and depth defining the dimensions of these elements in units of texels or compressed texel blocks, the latter being used in case of sparse images having a block-compressed format.

Sparse Unbound Texel

A texel read from a region of a sparse texture that does not have memory bound to it.

Static Use

An object in a shader is statically used by a shader entry point if any function in the entry point's call tree contains an instruction using the object. A reference in the entry point's interface list does not constitute a static use. Static use is used to constrain the set of descriptors used by a shader entry point.

Storage Buffer

A descriptor type that represents a buffer, and supports reads, writes, and atomics in a shader.

Storage Image

A descriptor type that represents an image view, and supports unfiltered loads, stores, and atomics in a shader.

Storage Texel Buffer

A descriptor type that represents a buffer view, and supports unfiltered, formatted reads, writes, and atomics in a shader.

Subgroup

A set of shader invocations that **can** synchronize and share data with each other efficiently. In compute shaders, the *local workgroup* is a superset of the subgroup.

Subgroup Mask

A bitmask for all invocations in the current subgroup with one bit per invocation, starting with the least significant bit in the first vector component, continuing to the last bit (less than `SubgroupSize`) in the last required vector component.

Subpass

A phase of rendering within a render pass, that reads and writes a subset of the attachments.

Subpass Dependency

An execution and/or memory dependency between two subpasses described as part of render pass creation, and automatically performed between subpasses in a render pass instance. A subpass dependency limits the overlap of execution of the pair of subpasses, and **can** provide guarantees of memory coherence between accesses in the subpasses.

Subpass Description

Lists of attachment indices for input attachments, color attachments, depth/stencil attachment, resolve attachments, depth/stencil resolve, and preserve attachments used by the subpass in a render pass.

Subset (Self-Dependency)

A subset of a self-dependency is a pipeline barrier performed during the subpass of the self-dependency, and whose stage masks and access masks each contain a subset of the bits set in the identically named mask in the self-dependency.

Texel Block

A single addressable element of an image with an uncompressed VkFormat, or a single compressed block of an image with a compressed VkFormat.

Texel Block Size

The size (in bytes) used to store a texel block of a compressed or uncompressed image.

Texel Coordinate System

One of three coordinate systems (normalized, unnormalized, integer) defining how texel coordinates are interpreted in an image or a specific mipmap level of an image.

Timeline Semaphore

A semaphore with a strictly increasing 64-bit unsigned integer payload indicating whether the semaphore is signaled with respect to a particular reference value. Represented by a VkSemaphore object created with a semaphore type of `VK_SEMAPHORE_TYPE_TIMELINE`.

Uniform Texel Buffer

A descriptor type that represents a buffer view, and supports unfiltered, formatted, read-only access in a shader.

Uniform Buffer

A descriptor type that represents a buffer, and supports read-only access in a shader.

Units in the Last Place (ULP)

A measure of floating-point error loosely defined as the smallest representable step in a floating-point format near a given value. For the precise definition see Precision and Operation of SPIR-V instructions or Jean-Michel Muller, "On the definition of ulp(x)", RR-5504, INRIA. Other sources may also use the term "unit of least precision".

Unnormalized

A value that is interpreted according to its conventional interpretation, and is not normalized.

Unprotected Buffer

A buffer to which unprotected device memory **can** be bound.

Unprotected Command Buffer

A command buffer which **can** be submitted to an unprotected device queue or a protected-capable device queue.

Unprotected Device Memory

Device memory which **can** be visible to the device and **can** be visible to the host.

Unprotected Image

An image to which unprotected device memory **can** be bound.

User-Defined Variable Interface

A shader entry point's variables with `Input` or `Output` storage class that are not built-in variables.

Vertex Input Attribute

A graphics pipeline resource that produces input values for the vertex shader by reading data from a vertex input binding and converting it to the attribute's format.

Variable-Sized Descriptor Binding

A descriptor binding whose size will be specified when a descriptor set is allocated using this layout.

Vertex Input Binding

A graphics pipeline resource that is bound to a buffer and includes state that affects addressing calculations within that buffer.

Vertex Input Interface

A vertex shader entry point's variables with `Input` storage class, which receive values from vertex input attributes.

View Mask

When multiview is enabled, a view mask is a property of a subpass controlling which views the rendering commands are broadcast to.

View Volume

A subspace in homogeneous coordinates, corresponding to post-projection x and y values between -1 and +1, and z values between 0 and +1.

Viewport Transformation

A transformation from normalized device coordinates to framebuffer coordinates, based on a viewport rectangle and depth range.

Visibility Operation

An operation that causes available values to become visible to specified memory accesses.

Visible

A state of values written to memory that allows them to be accessed by a set of operations.

Common Abbreviations

The abbreviations and acronyms defined in this section are sometimes used in the Specification and the API where they are considered clear and commonplace.

Src

Source

Dst

Destination

Min

Minimum

Max

Maximum

Rect

Rectangle

Info

Information

LOD

Level of Detail

Log
: Logarithm

ID
: Identifier

UUID
: Universally Unique Identifier

Op
: Operation

R
: Red color component

G
: Green color component

B
: Blue color component

A
: Alpha color component

RTZ
: Round towards zero

RTE
: Round to nearest even

Prefixes

Prefixes are used in the API to denote specific semantic meaning of Vulkan names, or as a label to avoid name clashes, and are explained here:

VK/Vk/vk
: Vulkan namespace
All types, commands, enumerants and defines in this specification are prefixed with these two characters.

PFN/pfn
: Function Pointer
Denotes that a type is a function pointer, or that a variable is of a pointer type.

p
: Pointer
Variable is a pointer.

vkCmd

Commands that record commands in command buffers
These API commands do not result in immediate processing on the device. Instead, they record the requested action in a command buffer for execution when the command buffer is submitted to a queue.

s

Structure
Used to denote the `VK_STRUCTURE_TYPE*` member of each structure in `sType`

Appendix J: Credits (Informative)

Vulkan 1.3 is the result of contributions from many people and companies participating in the Khronos Vulkan Working Group, as well as input from the Vulkan Advisory Panel.

Members of the Working Group, including the company that they represented at the time of their most recent contribution, are listed in the following section. Some specific contributions made by individuals are listed together with their name.

Working Group Contributors to Vulkan

- Aaron Greig, Codeplay Software Ltd. (version 1.1)
- Aaron Hagan, AMD (version 1.1)
- Adam Jackson, Red Hat (versions 1.0, 1.1)
- Adam Śmigielski, Mobica (version 1.0)
- Aditi Verma, Qualcomm (version 1.3)
- Ahmed Abdelkhalek, AMD (version 1.3)
- Aidan Fabius, Core Avionics & Industrial Inc. (version 1.2)
- Alan Baker, Google (versions 1.1, 1.2, 1.3)
- Alan Ward, Google (versions 1.1, 1.2)
- Alejandro Piñeiro, Igalia (version 1.1)
- Alex Bourd, Qualcomm Technologies, Inc. (versions 1.0, 1.1)
- Alex Crabb, Caster Communications (versions 1.2, 1.3)
- Alex Walters, Imagination Technologies (versions 1.2, 1.3)
- Alexander Galazin, Arm (versions 1.0, 1.1, 1.2, 1.3)
- Alexey Sachkov, Intel (version 1.3)
- Allan MacKinnon, Google (version 1.3)
- Allen Hux, Intel (version 1.0)
- Alon Or-bach, Google (versions 1.0, 1.1, 1.2, 1.3) (WSI technical sub-group chair)
- Anastasia Stulova, Arm (versions 1.2, 1.3)
- Andreas Vasilakis, Think Silicon (version 1.2)
- Andres Gomez, Igalia (version 1.1)
- Andrew Cox, Samsung Electronics (version 1.0)
- Andrew Ellem, Google (version 1.3)
- Andrew Garrard, Imagination Technologies (versions 1.0, 1.1, 1.2, 1.3) (format wrangler)
- Andrew Poole, Samsung Electronics (version 1.0)
- Andrew Rafter, Samsung Electronics (version 1.0)

- Andrew Richards, Codeplay Software Ltd. (version 1.0)
- Andrew Woloszyn, Google (versions 1.0, 1.1)
- Ann Thorsnes, Khronos (versions 1.2, 1.3)
- Antoine Labour, Google (versions 1.0, 1.1)
- Aras Pranckevičius, Unity Technologies (version 1.0)
- Arseny Kapoulkine, Roblox (version 1.3)
- Ashwin Kolhe, NVIDIA (version 1.0)
- Baldur Karlsson, Valve Software (versions 1.1, 1.2, 1.3)
- Barthold Lichtenbelt, NVIDIA (version 1.1)
- Bas Nieuwenhuizen, Google (versions 1.1, 1.2)
- Ben Bowman, Imagination Technologies (version 1.0)
- Benj Lipchak, Unknown (version 1.0)
- Bill Hollings, Brenwill (versions 1.0, 1.1, 1.2, 1.3)
- Bill Licea-Kane, Qualcomm Technologies, Inc. (versions 1.0, 1.1)
- Blaine Kohl, Khronos (versions 1.2, 1.3)
- Bob Fraser, Google (version 1.3)
- Boris Zanin, Mobica (versions 1.2, 1.3)
- Brent E. Insko, Intel (version 1.0)
- Brian Ellis, Qualcomm Technologies, Inc. (version 1.0)
- Brian Paul, VMware (versions 1.2, 1.3)
- Caio Marcelo de Oliveira Filho, Intel (versions 1.2, 1.3)
- Cass Everitt, Oculus VR (versions 1.0, 1.1)
- Cemil Azizoglu, Canonical (version 1.0)
- Lina Versace, Google (versions 1.0, 1.1, 1.2)
- Chang-Hyo Yu, Samsung Electronics (version 1.0)
- Charles Giessen, LunarG (version 1.3)
- Chia-I Wu, LunarG (version 1.0)
- Chris Frascati, Qualcomm Technologies, Inc. (version 1.0)
- Chris Glover, Google (version 1.3)
- Christian Forfang, Arm (version 1.3)
- Christoph Kubisch, NVIDIA (version 1.3)
- Christophe Riccio, Unity Technologies (versions 1.0, 1.1)
- Cody Northrop, LunarG (version 1.0)
- Colin Riley, AMD (version 1.1)
- Cort Stratton, Google (versions 1.1, 1.2)

- Courtney Goeltzenleuchter, Google (versions 1.0, 1.1, 1.3)
- Craig Davies, Huawei (version 1.2)
- Dae Kim, Imagination Technologies (version 1.1)
- Damien Leone, NVIDIA (version 1.0)
- Dan Baker, Oxide Games (versions 1.0, 1.1)
- Dan Ginsburg, Valve Software (versions 1.0, 1.1, 1.2, 1.3)
- Daniel Johnston, Intel (versions 1.0, 1.1)
- Daniel Koch, NVIDIA (versions 1.0, 1.1, 1.2, 1.3)
- Daniel Rakos, AMD (versions 1.0, 1.1, 1.2, 1.3)
- Daniel Stone, Collabora (versions 1.1, 1.2)
- Daniel Vetter, Intel (version 1.2)
- David Airlie, Red Hat (versions 1.0, 1.1, 1.2, 1.3)
- David Mao, AMD (versions 1.0, 1.2)
- David Miller, Miller & Mattson (versions 1.0, 1.1) (Vulkan reference card)
- David Neto, Google (versions 1.0, 1.1, 1.2, 1.3)
- David Pankratz, Huawei (version 1.3)
- David Wilkinson, AMD (version 1.2)
- David Yu, Pixar (version 1.0)
- Dejan Mircevski, Google (version 1.1)
- Diego Novillo, Google (version 1.3)
- Dimitris Georgakakis, Think Silicon (version 1.3)
- Dominik Witczak, AMD (versions 1.0, 1.1, 1.3)
- Donald Scorgie, Imagination Technologies (version 1.2)
- Dzmitry Malyshau, Mozilla (versions 1.1, 1.2, 1.3)
- Ed Hutchins, Oculus (version 1.2)
- Emily Stearns, Khronos (versions 1.2, 1.3)
- François Duranleau, Gameloft (version 1.3)
- Frank (LingJun) Chen, Qualcomm Technologies, Inc. (version 1.0)
- Fred Liao, Mediatek (version 1.0)
- Gabe Dagani, Freescale (version 1.0)
- Gabor Sines, AMD (version 1.2)
- Graeme Leese, Broadcom (versions 1.0, 1.1, 1.2, 1.3)
- Graham Connor, Imagination Technologies (version 1.0)
- Graham Sellers, AMD (versions 1.0, 1.1)
- Graham Wihlidal, Electronic Arts (version 1.3)

- Greg Fischer, LunarG (version 1.1)
- Gregory Grebe, AMD (version 1.3)
- Hai Nguyen, Google (versions 1.2, 1.3)
- Hans-Kristian Arntzen, Valve Software (versions 1.1, 1.2, 1.3)
- Henri Verbeet, Codeweavers (version 1.2)
- Wyvern Wang, Huawei (version 1.3)
- Hwanyong Lee, Kyungpook National University (version 1.0)
- Iago Toral, Igalia (versions 1.1, 1.2)
- Ian Elliott, Google (versions 1.0, 1.1, 1.2)
- Ian Romanick, Intel (versions 1.0, 1.1, 1.3)
- Ivan Briano, Intel (version 1.3)
- James Fitzpatrick, Imagination (version 1.3)
- James Hughes, Oculus VR (version 1.0)
- James Jones, NVIDIA (versions 1.0, 1.1, 1.2, 1.3)
- James Riordon, Khronos (versions 1.2, 1.3)
- Jamie Madill, Google (version 1.3)
- Jan Hermes, Continental Corporation (versions 1.0, 1.1)
- Jan-Harald Fredriksen, Arm (versions 1.0, 1.1, 1.2, 1.3)
- Faith Ekstrand, Intel (versions 1.0, 1.1, 1.2, 1.3)
- Jean-François Roy, Google (versions 1.1, 1.2, 1.3)
- Jeff Bolz, NVIDIA (versions 1.0, 1.1, 1.2, 1.3)
- Jeff Juliano, NVIDIA (versions 1.0, 1.1, 1.2)
- Jeff Leger, Qualcomm Technologies, Inc. (versions 1.1, 1.3)
- Jeff Phillips, Khronos (version 1.3)
- Jeff Vigil, Samsung Electronics (versions 1.0, 1.1, 1.2, 1.3)
- Jens Owen, Google (versions 1.0, 1.1)
- Jeremy Hayes, LunarG (version 1.0)
- Jesse Barker, Unity Technologies (versions 1.0, 1.1, 1.2, 1.3)
- Jesse Hall, Google (versions 1.0, 1.1, 1.2, 1.3)
- Joe Davis, Samsung Electronics (version 1.1)
- Johannes van Waveren, Oculus VR (versions 1.0, 1.1)
- John Anthony, Arm (version 1.2, 1.3)
- John Kessenich, Google (versions 1.0, 1.1, 1.2, 1.3) (SPIR-V and GLSL for Vulkan spec author)
- John McDonald, Valve Software (versions 1.0, 1.1, 1.2, 1.3)
- John Zulauf, LunarG (versions 1.1, 1.2, 1.3)

- Jon Ashburn, LunarG (version 1.0)
- Jon Leech, Independent (versions 1.0, 1.1, 1.2, 1.3) (XML toolchain, normative language, release wrangler)
- Jonas Gustavsson, Samsung Electronics (versions 1.0, 1.1)
- Jonas Meyer, Epic Games (versions 1.2, 1.3)
- Jonathan Hamilton, Imagination Technologies (version 1.0)
- Jordan Justen, Intel (version 1.1)
- Joshua Ashton, Valve Software (version 1.3)
- Jungwoo Kim, Samsung Electronics (versions 1.0, 1.1)
- Jörg Wagner, Arm (version 1.1)
- Kalle Raita, Google (version 1.1)
- Karen Ghavam, LunarG (versions 1.1, 1.2, 1.3)
- Karl Schultz, LunarG (versions 1.1, 1.2)
- Kathleen Mattson, Khronos (versions 1.0, 1.1, 1.2)
- Kaye Mason, Google (version 1.2)
- Keith Packard, Valve (version 1.2)
- Kenneth Benzie, Codeplay Software Ltd. (versions 1.0, 1.1)
- Kenneth Russell, Google (version 1.1)
- Kerch Holt, NVIDIA (versions 1.0, 1.1)
- Kevin O'Neil, AMD (version 1.1)
- Kevin Petit, Arm (version 1.3)
- Kris Rose, Khronos (versions 1.2, 1.3)
- Kristian Kristensen, Intel (versions 1.0, 1.1)
- Krzysztof Iwanicki, Samsung Electronics (version 1.0)
- Larry Seiler, Intel (version 1.0)
- Laura Shubel, Caster Communications (version 1.3)
- Lauri Ilola, Nokia (version 1.1)
- Lei Zhang, Google (version 1.2)
- Lenny Komow, LunarG (versions 1.1, 1.2)
- Liam Middlebrook, NVIDIA (version 1.3)
- Lionel Landwerlin, Intel (versions 1.1, 1.2)
- Lisie Aartsen, Khronos (version 1.3)
- Liz Maitral, Khronos (version 1.2)
- Lou Kramer, AMD (version 1.3)
- Lutz Latta, Lucasfilm (version 1.0)

- Maciej Jesionowski, AMD (version 1.1)
- Mais Alnasser, AMD (version 1.1)
- Marcin Kantoch, AMD (version 1.3)
- Marcin Rogucki, Mobica (version 1.1)
- Maria Rovatsou, Codeplay Software Ltd. (version 1.0)
- Mariusz Merecki, Intel (version 1.3)
- Mark Bellamy, Arm (version 1.2, 1.3)
- Mark Callow, Independent (versions 1.0, 1.1, 1.2, 1.3)
- Mark Kilgard, NVIDIA (versions 1.1, 1.2)
- Mark Lobodzinski, LunarG (versions 1.0, 1.1, 1.2)
- Mark Young, LunarG (versions 1.1, 1.3)
- Markus Tavenrath, NVIDIA (version 1.1)
- Marty Johnson, Khronos (version 1.3)
- Mateusz Przybylski, Intel (version 1.0)
- Mathias Heyer, NVIDIA (versions 1.0, 1.1)
- Mathias Schott, NVIDIA (versions 1.0, 1.1)
- Mathieu Robart, Arm (version 1.2)
- Matt Netsch, Qualcomm Technologies, Inc. (version 1.1)
- Matthew Rusch, NVIDIA (version 1.3)
- Matthäus Chajdas, AMD (versions 1.1, 1.2, 1.3)
- Maurice Ribble, Qualcomm Technologies, Inc. (versions 1.0, 1.1)
- Maxim Lukyanov, Samsung Electronics (version 1.0)
- Michael Blumenkrantz, Self (version 1.3)
- Michael Lentine, Google (version 1.0)
- Michael O'Hara, AMD (version 1.1)
- Michael Phillip, Samsung Electronics (version 1.2)
- Michael Wong, Codeplay Software Ltd. (version 1.1)
- Michael Worcester, Imagination Technologies (versions 1.0, 1.1)
- Michal Pietrasiuk, Intel (versions 1.0, 1.3)
- Mika Isojarvi, Google (versions 1.0, 1.1)
- Mike Schuchardt, LunarG (versions 1.1, 1.2)
- Mike Stroyan, LunarG (version 1.0)
- Mike Weiblen, LunarG (versions 1.1, 1.2, 1.3)
- Minyoung Son, Samsung Electronics (version 1.0)
- Mitch Singer, AMD (versions 1.0, 1.1, 1.2, 1.3)

- Mythri Venugopal, Samsung Electronics (version 1.0)
- Naveen Leekha, Google (version 1.0)
- Neil Henning, AMD (versions 1.0, 1.1, 1.2, 1.3)
- Neil Hickey, Arm (version 1.2)
- Neil Trevett, NVIDIA (versions 1.0, 1.1, 1.2, 1.3)
- Nick Penwarden, Epic Games (version 1.0)
- Nicolai Hähnle, AMD (version 1.1)
- Niklas Smedberg, Unity Technologies (version 1.0)
- Norbert Nopper, Independent (versions 1.0, 1.1)
- Nuno Subtil, NVIDIA (versions 1.1, 1.2, 1.3)
- Pat Brown, NVIDIA (version 1.0)
- Patrick Cozzi, Independent (version 1.1)
- Patrick Doane, Blizzard Entertainment (version 1.0)
- Peter Lohrmann, AMD (versions 1.0, 1.2)
- Petros Bantolas, Imagination Technologies (version 1.1)
- Philip Rebohle, Valve Software (version 1.3)
- Pierre Boudier, NVIDIA (versions 1.0, 1.1, 1.2, 1.3)
- Pierre-Loup Griffais, Valve Software (versions 1.0, 1.1, 1.2, 1.3)
- Piers Daniell, NVIDIA (versions 1.0, 1.1, 1.2, 1.3)
- Ping Liu, Intel (version 1.3)
- Piotr Bialecki, Intel (version 1.0)
- Piotr Byszewski, Mobica (version 1.3)
- Prabindh Sundareson, Samsung Electronics (version 1.0)
- Pyry Haulos, Google (versions 1.0, 1.1) (Vulkan conformance test subcommittee chair)
- Rachel Bradshaw, Caster Communications (version 1.3)
- Rajeev Rao, Qualcomm (version 1.2)
- Ralph Potter, Samsung Electronics (versions 1.1, 1.2, 1.3)
- Raun Krisch, Samsung Electronics (version 1.3)
- Ray Smith, Arm (versions 1.0, 1.1, 1.2)
- Ricardo Garcia, Igalia (version 1.3)
- Richard Huddy, Samsung Electronics (versions 1.2, 1.3)
- Rob Barris, NVIDIA (version 1.1)
- Rob Stepinski, Transgaming (version 1.0)
- Robert Simpson, Qualcomm Technologies, Inc. (versions 1.0, 1.1, 1.3)
- Rolando Caloca Olivares, Epic Games (versions 1.0, 1.1, 1.2, 1.3)

- Ronan Keryell, Xilinx (version 1.3)
- Roy Ju, Mediatek (version 1.0)
- Rufus Hamade, Imagination Technologies (version 1.0)
- Ruihao Zhang, Qualcomm Technologies, Inc. (versions 1.1, 1.2, 1.3)
- Samuel (Sheng-Wen) Huang, Mediatek (version 1.3)
- Samuel Iglesias Gonsalvez, Igalia (version 1.3)
- Sascha Willems, Self (version 1.3)
- Sean Ellis, Arm (version 1.0)
- Sean Harmer, KDAB Group (versions 1.0, 1.1)
- Shannon Woods, Google (versions 1.0, 1.1, 1.2, 1.3)
- Slawomir Cygan, Intel (versions 1.0, 1.1, 1.3)
- Slawomir Grajewski, Intel (versions 1.0, 1.1, 1.3)
- Sorel Bosan, AMD (version 1.1)
- Spencer Fricke, Samsung Electronics (versions 1.2, 1.3)
- Stefanus Du Toit, Google (version 1.0)
- Stephen Huang, Mediatek (version 1.1)
- Steve Hill, Broadcom (versions 1.0, 1.2)
- Steve Viggers, Core Avionics & Industrial Inc. (versions 1.0, 1.2)
- Steve Winston, Holochip (version 1.3)
- Stuart Smith, AMD (versions 1.0, 1.1, 1.2, 1.3)
- Sujeevan Rajayogam, Google (version 1.3)
- Tilmann Scheller, Samsung Electronics (version 1.1)
- Theresa Foley, Intel (version 1.0)
- Tim Lewis, Khronos (version 1.3)
- Timo Suoranta, AMD (version 1.0)
- Timothy Lottes, AMD (versions 1.0, 1.1)
- Tobias Hector, AMD (versions 1.0, 1.1, 1.2, 1.3) (validity language and toolchain)
- Tobin Ehlis, LunarG (version 1.0)
- Tom Olson, Arm (versions 1.0, 1.1, 1.2, 1.3) (Working Group chair)
- Tomasz Bednarz, Independent (version 1.1)
- Tomasz Kubale, Intel (version 1.0)
- Tony Barbour, LunarG (versions 1.0, 1.1, 1.2)
- Tony Zlatinski, NVIDIA (version 1.3)
- Victor Eruhimov, Unknown (version 1.1)
- Vikram Kushwaha, NVIDIA (version 1.3)

- Vincent Hindriksen, Stream HPC (versions 1.2, 1.3)
- Wasim Abbas, Arm (version 1.3)
- Wayne Lister, Imagination Technologies (version 1.0)
- Wolfgang Engel, Unknown (version 1.1)
- Yanjun Zhang, VeriSilicon (versions 1.0, 1.1, 1.2, 1.3)
- Yunxing Zhu, Huawei (version 1.3)

Other Credits

The Vulkan Advisory Panel members provided important real-world usage information and advice that helped guide design decisions.

The wider Vulkan community have provided useful feedback, questions and specification changes that have helped improve the quality of the Specification via GitHub.

Administrative support to the Working Group for Vulkan 1.1, 1.2, and 1.3 was provided by Khronos staff including Ann Thorsnes, Blaine Kohl, Dominic Agoro-Ombaka, Emily Stearns, Jeff Phillips, Lisie Aartsen, Liz Maitral, Marty Johnson, Tim Lewis, and Xiao-Yu CHENG; and by Alex Crabb, Laura Shubel, and Rachel Bradshaw of Caster Communications.

Administrative support for Vulkan 1.0 was provided by Andrew Riegel, Elizabeth Riegel, Glenn Fredericks, Kathleen Mattson and Michelle Clark of Gold Standard Group.

Technical support was provided by James Riordon, site administration of Khronos.org and OpenGL.org.