



Arm[®] Immortalis[™]-G925 and Arm[®] Mali[™]-G725 Performance Counters

1.0

Reference Guide

Non-Confidential

Copyright © 2024 Arm Limited (or its affiliates).
All rights reserved.

Issue

109793_0100_en



Arm® Immortalis™-G925 and Arm® Mali™-G725 Performance Counters

Reference Guide

Copyright © 2024 Arm Limited (or its affiliates). All rights reserved.

Release information

Document history

Issue	Date	Confidentiality	Change
1.0	13 June 2024	Non-Confidential	Initial release

Proprietary Notice

This document is protected by copyright and other related rights and the use or implementation of the information contained in this document may be protected by one or more patents or pending patent applications. No part of this document may be reproduced in any form by any means without the express prior written permission of Arm Limited ("Arm"). No license, express or implied, by estoppel or otherwise to any intellectual property rights is granted by this document unless specifically stated.

Your access to the information in this document is conditional upon your acceptance that you will not use or permit others to use the information for the purposes of determining whether the subject matter of this document infringes any third party patents.

The content of this document is informational only. Any solutions presented herein are subject to changing conditions, information, scope, and data. This document was produced using reasonable efforts based on information available as of the date of issue of this document. The scope of information in this document may exceed that which Arm is required to provide, and such additional information is merely intended to further assist the recipient and does not represent Arm's view of the scope of its obligations. You acknowledge and agree that you possess the necessary expertise in system security and functional safety and that you shall be solely responsible for compliance with all legal, regulatory, safety and security related requirements concerning your products, notwithstanding any information or support that may be provided by Arm herein. conjunction with any Arm technology described in this document, and to minimize risks, adequate design and operating safeguards should be provided for by you.

This document may include technical inaccuracies or typographical errors. THIS DOCUMENT IS PROVIDED "AS IS". ARM PROVIDES NO REPRESENTATIONS AND NO WARRANTIES, EXPRESS, IMPLIED OR STATUTORY, INCLUDING, WITHOUT LIMITATION, THE IMPLIED WARRANTIES OF MERCHANTABILITY, SATISFACTORY QUALITY, NON-INFRINGEMENT OR FITNESS FOR A PARTICULAR PURPOSE WITH RESPECT TO THE DOCUMENT. For the avoidance of doubt, Arm

makes no representation with respect to, and has undertaken no analysis to identify or understand the scope and content of, any patents, copyrights, trade secrets, trademarks, or other rights.

TO THE EXTENT NOT PROHIBITED BY LAW, IN NO EVENT WILL ARM BE LIABLE FOR ANY DAMAGES, INCLUDING WITHOUT LIMITATION ANY DIRECT, INDIRECT, SPECIAL, INCIDENTAL, PUNITIVE, OR CONSEQUENTIAL DAMAGES, HOWEVER CAUSED AND REGARDLESS OF THE THEORY OF LIABILITY, ARISING OUT OF ANY USE OF THIS DOCUMENT, EVEN IF ARM HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

Reference by Arm to any third party's products or services within this document is not an express or implied approval or endorsement of the use thereof.

This document consists solely of commercial items. You shall be responsible for ensuring that any permitted use, duplication, or disclosure of this document complies fully with any relevant export laws and regulations to assure that this document or any portion thereof is not exported, directly or indirectly, in violation of such export laws. Use of the word "partner" in reference to Arm's customers is not intended to create or refer to any partnership relationship with any other company. Arm may make changes to this document at any time and without notice.

This document may be translated into other languages for convenience, and you agree that if there is any conflict between the English version of this document and any translation, the terms of the English version of this document shall prevail.

The validity, construction and performance of this notice shall be governed by English Law.

The Arm corporate logo and words marked with ® or ™ are registered trademarks or trademarks of Arm Limited (or its affiliates) in the US and/or elsewhere. Please follow Arm's trademark usage guidelines at <https://www.arm.com/company/policies/trademarks>. All rights reserved. Other brands and names mentioned in this document may be the trademarks of their respective owners.

Arm Limited. Company 02557590 registered in England.

110 Fulbourn Road, Cambridge, England CB1 9NJ.

PRE-1121-V1.0

Confidentiality Status

This document is Non-Confidential. The right to use, copy and disclose this document may be subject to license restrictions in accordance with the terms of the agreement entered into by Arm and the party that Arm delivered this document to.

Unrestricted Access is an Arm internal classification.

Product Status

The information in this document is Final, that is for a developed product.

Feedback

Arm welcomes feedback on this product and its documentation. To provide feedback on the product, create a ticket on <https://support.developer.arm.com>

To provide feedback on the document, fill the following survey: <https://developer.arm.com/documentation-feedback-survey>.

Inclusive language commitment

Arm values inclusive communities. Arm recognizes that we and our industry have used language that can be offensive. Arm strives to lead the industry and create change.

Inclusive language commitment

We believe that this document contains no offensive language. To report offensive language in this document, email terms@arm.com.

Contents

1. Arm Immortalis-G925 and Mali-G725 GPU performance counters.....	10
1.1 Counter handling.....	10
1.2 Guide content.....	10
2. CPU performance.....	12
2.1 CPU activity.....	12
2.2 CPU cycles.....	12
3. GPU activity.....	13
3.1 GPU usage.....	14
3.1.1 GPU active cycles.....	15
3.1.2 Binning phase queue active cycles.....	15
3.1.3 Main phase queue active cycles.....	15
3.1.4 Compute queue active cycles.....	15
3.1.5 MCU active cycles.....	15
3.1.6 GPU interrupt pending cycles.....	16
3.2 GPU utilization.....	16
3.2.1 Binning phase queue utilization.....	17
3.2.2 Main phase queue utilization.....	17
3.2.3 Compute queue utilization.....	17
3.2.4 Microcontroller utilization.....	18
3.2.5 Interrupt pending utilization.....	18
3.3 External memory bandwidth.....	18
3.3.1 Output external read bytes.....	19
3.3.2 Output external write bytes.....	19
3.4 External memory stalls.....	20
3.4.1 Output external read stall percentage.....	20
3.4.2 Output external write stall percentage.....	20
3.5 External memory read latency.....	20
3.5.1 Output external read latency 0-127 cycles.....	21
3.5.2 Output external read latency 128-191 cycles.....	21
3.5.3 Output external read latency 192-255 cycles.....	21
3.5.4 Output external read latency 256-319 cycles.....	21

3.5.5 Output external read latency 320-383 cycles.....	21
3.5.6 Output external read latency 384+ cycles.....	22
4. Content behavior.....	23
4.1 Geometry usage.....	23
4.1.1 Total input primitives.....	23
4.1.2 Culled primitives.....	24
4.1.3 Visible primitives.....	24
4.2 Geometry culling.....	24
4.2.1 Visible primitive percentage.....	25
4.2.2 Frustum test cull percentage.....	25
4.2.3 Scissor test cull percentage.....	25
4.2.4 Facing plane test cull percentage.....	26
4.2.5 Sample test cull percentage.....	26
4.3 Vertex shading.....	26
4.3.1 Position shader thread invocations.....	27
4.3.2 Varying shader thread invocations.....	27
4.4 Vertex shading efficiency.....	27
4.4.1 Position threads per input primitive.....	28
4.5 Fragment overview.....	28
4.5.1 Pixels.....	29
4.5.2 Average cycles per pixel.....	29
4.5.3 Fragments per pixel.....	29
4.6 Fragment prepass properties.....	29
4.6.1 Fragment prepass primitive percentage.....	30
4.6.2 Fragment prepass primitive culling percentage.....	30
4.6.3 Fragment prepass unculable primitive percentage.....	30
4.6.4 Fragment prepass warp percentage.....	31
4.6.5 Fragment main pass stall percentage.....	31
4.7 Fragment shader invocation rate.....	31
4.7.1 Fragment shading rate.....	31
5. Shader core data path.....	32
5.1 Shader core workload.....	32
5.1.1 Non-fragment warps.....	33
5.1.2 Fragment warps.....	33
5.2 Shader core throughput.....	33

5.2.1 Average cycles per non-fragment thread.....	33
5.2.2 Average cycles per fragment thread.....	34
5.3 Shader core data path utilization.....	34
5.3.1 Shader core usage.....	34
5.3.2 Compute or binning phase utilization.....	34
5.3.3 Main phase utilization.....	35
5.3.4 Fragment FPK buffer utilization.....	35
5.3.5 Execution core utilization.....	35
6. Shader core functional units.....	36
6.1 Functional unit utilization.....	37
6.1.1 Arithmetic unit utilization.....	37
6.1.2 Varying unit utilization.....	37
6.1.3 Texture unit utilization.....	37
6.1.4 Load/store unit utilization.....	38
6.1.5 Ray tracing unit utilization.....	38
6.2 Functional unit backpressure.....	38
6.2.1 Varying unit backpressure percentage.....	39
6.2.2 Texture unit backpressure percentage.....	39
6.2.3 Load/store unit backpressure percentage.....	39
6.2.4 Attribute unit backpressure percentage.....	39
6.2.5 ZS unit backpressure percentage.....	39
6.2.6 Blend unit backpressure percentage.....	40
6.3 Shader program properties.....	40
6.3.1 Narrow arithmetic percentage.....	40
6.3.2 Warp divergence percentage.....	40
6.3.3 All registers warp percentage.....	40
6.3.4 Shader blend percentage.....	41
6.4 Shader workload properties.....	41
6.4.1 Partial coverage percentage.....	41
6.4.2 Fragment warp occupancy.....	41
6.4.3 Full warp percentage.....	42
6.4.4 Fragment shading rate.....	42
6.4.5 Unchanged tile kill percentage.....	42
7. Shader core varying unit.....	43
7.1 Varying unit usage.....	43

7.1.1 Varying unit issue cycles.....	43
7.1.2 16-bit interpolation active cycles.....	43
7.1.3 32-bit interpolation active cycles.....	43
8. Shader core texture unit.....	44
8.1 Texture unit usage.....	44
8.1.1 Texture filtering cycles.....	44
8.1.2 Texture filtering cycles per instruction.....	44
8.2 Texture unit bus utilization.....	45
8.2.1 Texture input bus utilization.....	45
8.2.2 Texture output bus utilization.....	45
8.3 Texture unit memory usage.....	45
8.3.1 Texture unit bytes read from L2 per texture cycle.....	46
8.3.2 Texture unit bytes read from external memory per texture cycle.....	46
9. Shader core load/store unit.....	47
9.1 Load/store unit usage.....	47
9.1.1 Load/store unit issue cycles.....	47
9.1.2 Load/store unit full read issues.....	47
9.1.3 Load/store unit partial read issues.....	47
9.1.4 Load/store unit full write issues.....	48
9.1.5 Load/store unit partial write issues.....	48
9.1.6 Load/store unit atomic issues.....	48
9.2 Load/store unit memory usage.....	48
9.2.1 Load/store unit bytes read from L2 per access cycle.....	49
9.2.2 Load/store unit bytes read from external memory per access cycle.....	49
9.2.3 Load/store unit bytes written to L2 per access cycle.....	49
10. Shader core ray tracing unit.....	50
10.1 Ray tracing unit usage.....	50
10.1.1 Ray tracing box tester issue cycles.....	50
10.1.2 Ray tracing triangle tester issue cycles.....	50
10.2 Ray tracing unit workload properties.....	51
10.2.1 Ray tracing started rays.....	51
10.2.2 Ray tracing opaque triangle hits.....	51
10.2.3 Ray tracing non-opaque triangle hits.....	51
10.2.4 Ray tracing ray misses.....	51

10.2.5 Ray tracing first hit terminations.....	52
10.3 Ray tracing box test coherency.....	52
10.3.1 Ray tracing box nodes with 13-16 rays.....	52
10.3.2 Ray tracing box nodes with 9-12 rays.....	52
10.3.3 Ray tracing box nodes with 5-8 rays.....	52
10.3.4 Ray tracing box nodes with 1-4 rays.....	53
10.4 Ray tracing triangle test coherency.....	53
10.4.1 Ray tracing triangle batches with 13-16 rays.....	53
10.4.2 Ray tracing triangle batches with 9-12 rays.....	53
10.4.3 Ray tracing triangle batches with 5-8 rays.....	53
10.4.4 Ray tracing triangle batches with 1-4 rays.....	54
11. Shader core memory traffic.....	55
11.1 Read access from L2 cache.....	55
11.1.1 Front-end unit read bytes from L2 cache.....	55
11.1.2 Load/store unit read bytes from L2 cache.....	55
11.1.3 Texture unit read bytes from L2 cache.....	55
11.2 Read access from external memory.....	55
11.2.1 Front-end unit read bytes from external memory.....	56
11.2.2 Load/store unit read bytes from external memory.....	56
11.2.3 Texture unit read bytes from external memory.....	56
11.3 Write access.....	56
11.3.1 Load/store unit write bytes.....	56
11.3.2 Tile unit write bytes.....	56
12. GPU configuration.....	57
12.1 GPU configuration counters.....	57
12.1.1 Shader core count.....	57
12.1.2 L2 cache slice count.....	57
12.1.3 External bus beat size.....	57

1. Arm® Immortalis™-G925 and Mali™-G725 GPU performance counters

This guide explains the GPU performance counters presented in the Arm® Streamline profiling template for the Immortalis™-G925 and Mali™-G725 GPUs, which are part of the 5th Generation architecture family.

The counter template in Streamline follows a step-by-step analysis workflow. Analysis starts with high-level workload triage that allows you to classify the type of problem that needs investigating. Measurements of CPU usage, GPU usage, and memory bandwidth allow you to select the correct type of detailed analysis to perform next. For issues related to GPU throughput, the template then proceeds with a detailed analysis of the application rendering workload. A set of data views are presented that systematically show how efficiently the available hardware resources are being used by your application.

For each counter in the template, this guide documents the meaning of the counter and provides the Streamline variable name or expression associated with it.



The Streamline template only shows a subset of the available performance counters. However, it covers the most common types of GPU performance analysis.

1.1 Counter handling

Arm GPU hardware emits unique counters per shader core and per cache slice. The data presented in Streamline, and the expression equations defined in this document, use the summed value of all of the counter instances.



This behavior changed in Streamline 8.7. In earlier releases, Streamline showed the averaged value for shader core counters and the summed value for cache slice counters.

1.2 Guide content

This guide contains the following sections:

- **CPU performance:** analyze the overall usage of the CPU by observing the activity on the CPU clusters and cores in the system.

- **GPU activity:** analyze the overall usage of the GPU by observing the activity on the compute, render pass binning phase, and render pass main phase work queues.
- **Content behavior:** analyze content efficiency by observing the number of vertices being processed, the number of primitives being culled, and the number of pixels being processed.
- **Shader core data path:** analyze the shader core workload scheduling, and data path throughput.
- **Shader core functional units:** analyze the overall usage of the shader core. Observe the effectiveness of fragment depth and stencil testing, the number of threads spawned for shading, and the relative loading of the programmable core processing pipelines.
- **Shader core varying unit:** analyze performance of the varying interpolation unit, and how the unit is being used by the shader programs that are running. Use this data to find optimization opportunities for content identified as varying-bound in the shader core functional units section.
- **Shader core texture unit:** analyze performance of the texture filtering unit, and how the unit is being used by the shader programs that are running. Use this data to find optimization opportunities for content identified as texture-bound in the shader core functional units section.
- **Shader core load/store unit:** analyze performance of the load/store unit, and how the unit is being used by the shader programs that are running. Use this data to find optimization opportunities for content identified as load-store-bound in the shader core functional units section.
- **Shader core ray tracing unit:** analyze performance of the ray tracing unit, and how the unit is being used by the shader ray traversals that are running. Use this data to find optimization opportunities for content identified as ray-tracing-bound in the shader core functional units section.
- **Shader core memory traffic:** analyze the breakdown of the memory traffic between the shader core and the L2 cache, and the shader core and the external memory system. Use this data to find which type of workload is causing GPU memory accesses, helping you to determine where to apply bandwidth optimizations.
- **GPU configuration:** these utility counters expose the GPU configuration of the platform, allowing Streamline to create expressions based on the specific configuration of the connected device.

2. CPU performance

High CPU load or poor scheduling of workloads can cause many graphics performance issues. The first part of the analysis template looks at the CPU workloads, allowing you to identify regions where CPU performance impacts the overall application performance.

The default view for the CPU charts shows the activity of each cluster of CPUs. To see individual CPUs, expand the chart group to show the cores present inside each cluster.

2.1 CPU activity

CPU activity charts show the usage of each processor cluster, displaying the percentage of each time slice that the CPUs in the cluster were running. This percentage allows you to assess how busy the CPUs were. Note that this metric is only a time-based measure and does not factor in the CPU frequency that was used.

For CPU-bound applications, it is common for a single thread to run all the time and become the bottleneck for overall application performance. The process and thread activity panel, found below the counter charts, shows when each application thread was running. To filter the CPU activity and CPU counter charts by specific processes or threads, select one or more threads in this view.

For scheduling-bound applications, it is common for both CPU and GPU to go idle due to poor synchronization. The CPU goes idle when it is waiting for the GPU to complete work. The GPU goes idle when waiting for the CPU to submit new work. To identify scheduling-bound applications in this view, look for activity that is oscillating between the impacted CPU thread and the GPU work queues.

```
$CPUActivityUser.Cluster[0..N]
```

2.2 CPU cycles

The CPU cycle charts show the activity of each processor cluster, presented as the number of processor clock cycles used. Combining this data with the CPU activity information can indicate the CPU operating frequency.

```
$CyclesCPUCycles.Cluster[0..N]
```


3. GPU activity

The workloads running on the GPU are coordinated by the Command Stream Front-end (CSF). The front-end schedules command streams submitted by the driver on to three hardware work queues, which dispatch processing tasks to the shader cores and tiling unit. There are three work queues, one for general-purpose compute shading, one for the binning phase of render pass processing, and one for the main phase of render pass processing.

The CSF runs asynchronously to the CPU, allowing CPU and GPU to run in parallel. If sufficient work is available, the three GPU work queues can also run in parallel to each other, allowing different types of GPU work to run in parallel. Achieving good parallelism is an important optimization goal for Arm GPUs.

The following diagram shows the processing pipeline data paths through the GPU for different kinds of workload. It also shows the performance counters available for each data path or major block in the hierarchy.

Figure 3-1: Arm 5th Generation GPU CSF top-level

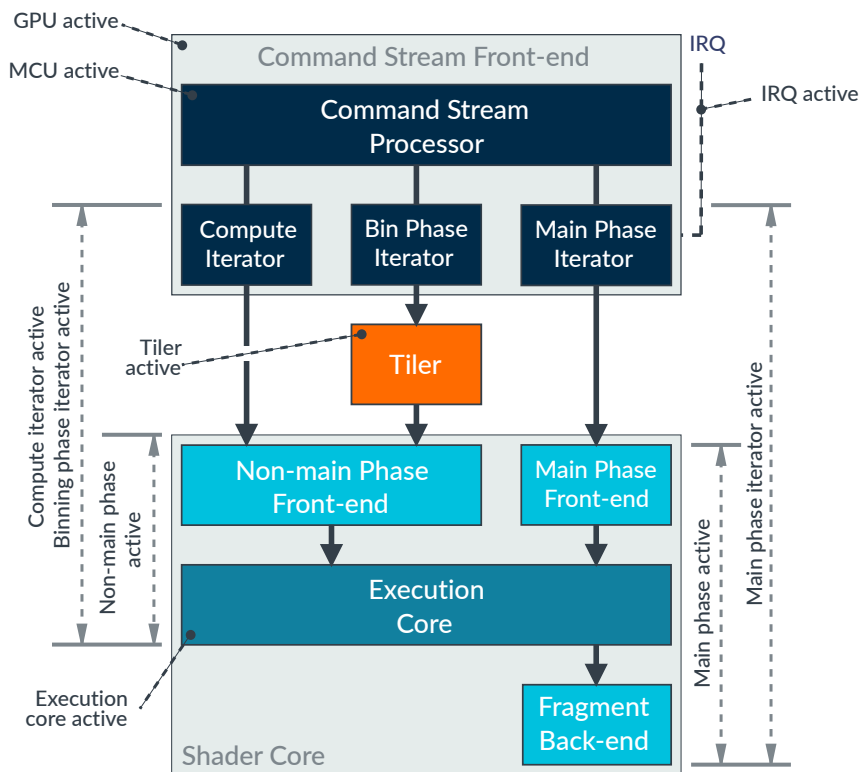


The “active” counters show that a data path or hardware unit processed some workload, but do not necessarily indicate that it was fully utilized. For example, the *Main phase work queued cycles* counter increments every cycle that there is any render pass main phase workload queued to run anywhere in the GPU.

Some counters are common to multiple data paths. For example, all types of shader programs run on the same unified shader core. If different workload types are overlapping in the same counter sample, then shader core counter data might include contributions from all of them.

The following swim lane diagram shows how the top-level GPU counters increment for overlapping render passes.

Figure 3-2: Arm 5th Generation GPU CSF top-level timeline

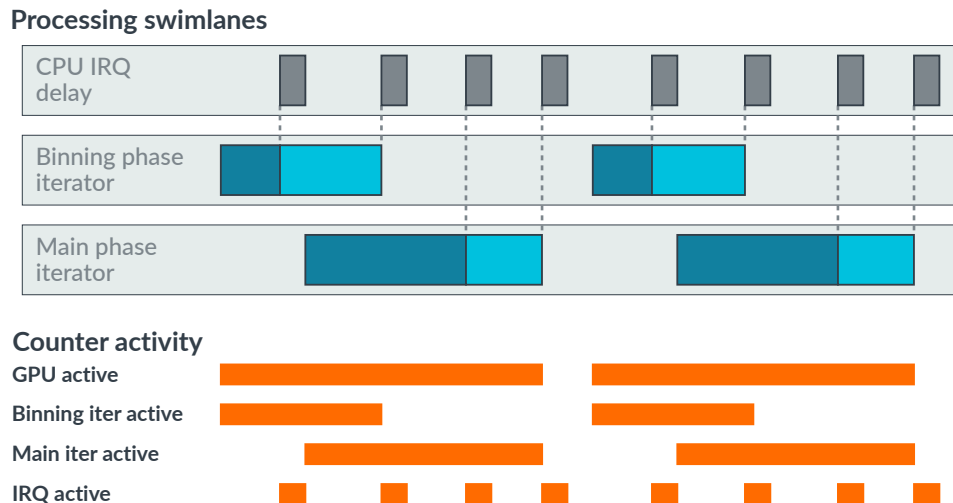

This diagram shows two render passes per frame, shown in different shades of blue. Each render pass consists of a phase of geometry processing that assigns primitives to screens-space tile bins, followed by a tile-based main phase. The primitive binning phase for a render pass must complete before its main phase shading can start. An interrupt is raised back to the CPU at the end of each piece of work on each queue. The *GPU active cycles* counter increments whenever any queue contains work.

3.1 GPU usage

GPU usage counters monitor the overall load on the GPU by measuring the workload submitted to the front-end queues. These counters can indicate the dominant workload type submitted by the application, which is a good target for optimization. They can also indicate the effectiveness of workload scheduling at keeping the hardware queues running in parallel.

3.1.1 GPU active cycles

This counter increments every clock cycle when the GPU has any pending workload present in one of its processing queues. It shows the overall GPU processing load requested by the application.

This counter increments when any workload is present in any processing queue, even if the GPU is stalled waiting for external memory. These cycles are counted as active time even though no progress is being made.

```
$MaliGPUCyclesGPUActive
```

3.1.2 Binning phase queue active cycles

This expression increments every clock cycle when the command stream binning phase queue has at least one task issued for processing. The binning phase includes vertex position shading and primitive binning.

```
$MaliGPUQueuedCyclesBinningPhaseQueued -  
$MaliGPUWaitCyclesBinningPhaseQueueEndpointStall
```

3.1.3 Main phase queue active cycles

This expression increments every clock cycle when the command stream main phase queue has at least one task issued for processing. The main phase includes any deferred vertex processing and all fragment shading.

```
$MaliGPUQueuedCyclesMainPhaseQueued - $MaliGPUWaitCyclesMainPhaseQueueEndpointStall
```

3.1.4 Compute queue active cycles

This expression increments every clock cycle when the command stream compute queue has at least one task issued for processing.

```
$MaliGPUQueuedCyclesComputeQueued - $MaliGPUWaitCyclesComputeQueueEndpointStall
```

3.1.5 MCU active cycles

This counter increments every clock cycle when the GPU command stream management microcontroller is executing. Cycles waiting for interrupts or events are not counted.

```
$MaliCSFCyclesMCUActive
```

3.1.6 GPU interrupt pending cycles

This counter increments every cycle when the GPU has an interrupt pending and is waiting for the CPU to process it.

Cycles with a pending interrupt do not necessarily indicate lost performance because the GPU can process other queued work in parallel. However, if *GPU interrupt pending cycles* are a high percentage of *GPU active cycles*, an underlying problem might be preventing the CPU from efficiently handling interrupts. This problem is normally a system integration issue, which an application developer cannot work around.

```
$MaliGPUCyclesGPUInterruptActive
```

3.2 GPU utilization

GPU utilization counters provide an alternative view of the data path activity cycles, normalizing the queue usage against the total GPU active cycle count. These metrics provide a clearer view of breakdown by workload type, and the effectiveness of queue scheduling.

For GPU-bound content that is achieving good parallelism, one of the queues is close to 100% utilization, with the other running in parallel to it. Prioritize the most heavily loaded queue for content optimization, as it is the critical path workload.

If the GPU is always busy, but the queues are running serially for all or part of the frame, application API usage might prevent parallel processing. Serial processing reduces the achievable performance. The following actions can cause serial processing:

- The application blocking and waiting for GPU activity to complete, for example, by waiting on a query object result which is not yet available. Waiting on an unavailable query object result can cause one or more of the hardware queues to drain and run out of work to process.
- The application using conservative Vulkan pipeline barriers. For example, submitting using a `STAGE_TOP_OF_PIPE` destination when a `STAGE_FRAGMENT_SHADER` destination would have been sufficient.
- The application submitting rendering workloads that have data dependencies across the queues which prevent parallel processing. For example, if only dependent work is available, a fragment-compute-fragment data flow might mean no processing occurs in the render pass main phase queue while the compute shader is running.

Mobile systems improve energy efficiency by using Dynamic Voltage and Frequency Scaling (DVFS) to reduce voltage and clock frequency for light workloads. When seeing a workload with high percentage utilization, check the *GPU active cycles* counter to confirm the frequency. A highly utilized GPU might look like a problem, but it can be caused by a light workload running at a low clock frequency.

3.2.1 Binning phase queue utilization

This expression defines the binning phase queue utilization compared against the GPU active cycles. The binning phase includes vertex position shading, culling, and primitive binning.

For GPU bound content, it is expected that the GPU queues process work in parallel. The dominant queue must be close to 100% utilized to get the best performance. If no queue is dominant, but the GPU is fully utilized, then a serialization or dependency problem might be preventing queue overlap.

```
max(min((( $MaliGPUQueuedCyclesBinningPhaseQueued -
           $MaliGPUWaitCyclesBinningPhaseQueueEndpointStall) / $MaliGPUCyclesGPUActive) * 100,
      100), 0)
```

3.2.2 Main phase queue utilization

This expression defines the main phase queue utilization compared against the GPU active cycles. The main phase includes any deferred vertex processing and all fragment shading.

For GPU bound content, it is expected that the GPU queues process work in parallel. The dominant queue must be close to 100% utilized to get the best performance. If no queue is dominant, but the GPU is fully utilized, then a serialization or dependency problem might be preventing queue overlap.

```
max(min((( $MaliGPUQueuedCyclesMainPhaseQueued -
           $MaliGPUWaitCyclesMainPhaseQueueEndpointStall) / $MaliGPUCyclesGPUActive) * 100,
      100), 0)
```

3.2.3 Compute queue utilization

This expression defines the compute queue utilization compared against the GPU active cycles.

For GPU bound content, it is expected that the GPU queues process work in parallel. The dominant queue must be close to 100% utilized to get the best performance. If no queue is dominant, but the GPU is fully utilized, then a serialization or dependency problem might be preventing queue overlap.

```
max(min((( $MaliGPUQueuedCyclesComputeQueued -
           $MaliGPUWaitCyclesComputeQueueEndpointStall) / $MaliGPUCyclesGPUActive) * 100,
      100), 0)
```

3.2.4 Microcontroller utilization

This expression defines the microcontroller utilization compared against the GPU active cycles.

High microcontroller load can be indicative of content using many emulated commands, such as command stream scheduling and synchronization operations.

```
max(min(($MaliCSFCyclesMCUActive / $MaliGPUCyclesGPUActive) * 100, 100), 0)
```

3.2.5 Interrupt pending utilization

This expression defines the IRQ pending utilization compared against the GPU active cycles. In a well-functioning system, this expression should be less than 3% of the total cycles. If the value is much higher than this, a system issue might be preventing the CPU from efficiently handling interrupts.


```
max(min(($MaliGPUCyclesGPUInterruptActive / $MaliGPUCyclesGPUActive) * 100, 100), 0)
```

3.3 External memory bandwidth

The external memory bandwidth counters show the total memory bandwidth between the GPU and the downstream memory system. Accessing external DRAM is one of the most energy-intensive operations that the GPU can perform, so reducing memory bandwidth is a key optimization goal.

These performance counters measure the memory accesses that are external to the GPU. If there are layers of system cache between the GPU and external DRAM, these accesses might not be external to the system-on-a-chip.

Figure 3-3: Arm 5th Generation GPU memory system

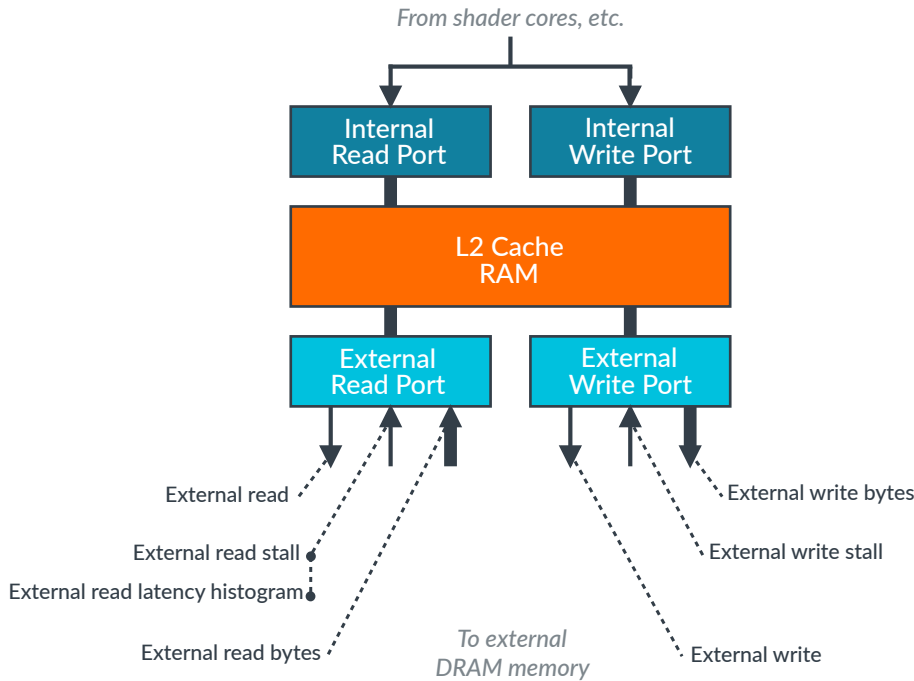

Memory accesses to external DRAM are very power intensive. A good guideline is that external DRAM access costs between 80mW and 100mW per GB/s of bandwidth used. Assuming a typical 650mW power budget for DRAM access, an application can only sustainably use a total of 100MB per frame at 60FPS. Optimizations that help to minimize GPU memory bandwidth are a high priority for mobile application development.

3.3.1 Output external read bytes

This expression defines the total output read bandwidth for the GPU.

```
$MaliExternalBusBeatsReadBeats * ($MaliConstantsBusWidthBits / 8)
```

3.3.2 Output external write bytes

This expression defines the total output write bandwidth for the GPU.

```
$MaliExternalBusBeatsWriteBeats * ($MaliConstantsBusWidthBits / 8)
```

3.4 External memory stalls

The external memory stall rate counters measure the back-pressure seen by the GPU when it is attempting to make external memory accesses.

A high stall rate is indicative of content which is requesting more data than the downstream memory system can provide. To optimize the workload, try to reduce memory bandwidth.

3.4.1 Output external read stall percentage

This expression defines the percentage of GPU cycles with a memory stall on an external read transaction.

Stall rates can be reduced by reducing the size of data resources, such as buffers or textures.

```
max(min(($MaliExternalBusStallCyclesReadStall / $MaliConstantsL2SliceCount /  
$MaliGPUCyclesGPUActive) * 100, 100), 0)
```

3.4.2 Output external write stall percentage

This expression defines the percentage of GPU cycles with a memory stall on an external write transaction.

Stall rates can be reduced by reducing geometry complexity, or the size of framebuffers in memory.

```
max(min(($MaliExternalBusStallCyclesWriteStall / $MaliConstantsL2SliceCount /  
$MaliGPUCyclesGPUActive) * 100, 100), 0)
```

3.5 External memory read latency

The external memory read latency counters present a histogram of access latencies. This metric shows how many GPU cycles it takes to fetch data from the downstream memory system, where data might be stored in either system cache or external DRAM.

High latency accesses can reduce performance, and are normally an indication that the application is requesting more data than the memory system can provide. To reduce memory latency, try to reduce application memory bandwidth.

3.5.1 Output external read latency 0-127 cycles

This counter increments for every data beat that is returned between 0 and 127 cycles after the read transaction started. This latency is considered a fast access response speed.

```
$MaliExternalBusReadLatency0127Cycles
```

3.5.2 Output external read latency 128-191 cycles

This counter increments for every data beat that is returned between 128 and 191 cycles after the read transaction started. This latency is considered a normal access response speed.

```
$MaliExternalBusReadLatency128191Cycles
```

3.5.3 Output external read latency 192-255 cycles

This counter increments for every data beat that is returned between 192 and 255 cycles after the read transaction started. This latency is considered a normal access response speed.

```
$MaliExternalBusReadLatency192255Cycles
```

3.5.4 Output external read latency 256-319 cycles

This counter increments for every data beat that is returned between 256 and 319 cycles after the read transaction started. This latency is considered a slow access response speed.

```
$MaliExternalBusReadLatency256319Cycles
```

3.5.5 Output external read latency 320-383 cycles

This counter increments for every data beat that is returned between 320 and 383 cycles after the read transaction started. This latency is considered a slow access response speed.

```
$MaliExternalBusReadLatency320383Cycles
```

3.5.6 Output external read latency 384+ cycles

This expression increments for every read beat that is returned at least 384 cycles after the transaction started. This latency is considered a very slow access response speed.

```
$MaliExternalBusBeatsReadBeats - $MaliExternalBusReadLatency0127Cycles -  
$MaliExternalBusReadLatency128191Cycles - $MaliExternalBusReadLatency192255Cycles -  
$MaliExternalBusReadLatency256319Cycles - $MaliExternalBusReadLatency320383Cycles
```

4. Content behavior

Optimal rendering performance requires both efficient content, and efficient handling of that content by the GPU. The content behavior metrics help you to supply the GPU with efficiently structured content.

Slow rendering performance has three common causes:

- Content which is efficiently written, but doing too much processing given the capabilities of the target device.
- Content which is inefficiently written, with redundancy in the workload submitted for rendering.
- Content or API usage which triggers high workload, or causes idle bubbles, due to GPU-specific or driver-specific behaviors.

This section of the Streamline template aims to focus on the first two of these causes. It looks at the size and efficiency of the submitted workload.

4.1 Geometry usage

The vertex stream is the first application input processed by the GPU rendering pipeline. These counters monitor the amount of geometry being processed, and how much is discarded due to culling.

4.1.1 Total input primitives

This expression defines the total number of input primitives to the rendering process.

High complexity geometry is one of the most expensive inputs to the GPU, because vertices are much larger than compressed texels. Optimize your geometry to minimize mesh complexity, using dynamic level-of-detail and normal maps to reduce the number of primitives required.

```
$MaliPrimitiveCullingFacingTestCulledPrimitives +  
$MaliPrimitiveCullingFrustumTestCulledPrimitives +  
$MaliPrimitiveCullingSampleTestCulledPrimitives +  
$MaliPrimitiveCullingScissorTestCulledPrimitives +  
$MaliPrimitiveCullingVisiblePrimitives
```

4.1.2 Culled primitives

This expression defines the number of primitives that were culled during the rendering process, for any reason.

For efficient 3D content, it is expected that only 50% of primitives are visible because back-face culling is used to remove half of each model.

```
$MaliPrimitiveCullingFacingTestCulledPrimitives +  
$MaliPrimitiveCullingFrustumTestCulledPrimitives +  
$MaliPrimitiveCullingSampleTestCulledPrimitives +  
$MaliPrimitiveCullingScissorTestCulledPrimitives
```

4.1.3 Visible primitives

This counter increments for every visible primitive that survives all culling stages.

All fragments of the primitive might be occluded by other primitives closer to the camera, and so produce no visible output.

```
$MaliPrimitiveCullingVisiblePrimitives
```

4.2 Geometry culling

The GPU must compute positions of primitives before they can enter the culling stages. Culled geometry can have a significant processing and bandwidth cost, even though it contributes no useful visual output. These counters help to identify the reasons why primitives are culled, allowing you to target optimizations at the area causing problems.

The culling pipeline for this GPU runs in the order shown in the following diagram. The counters for this pipeline show the percentage of the primitives entering a stage that the stage culls. Because these percentages are relative to the per-stage input, not the total geometry input, they do not add up to 100%.

Figure 4-1: Arm 5th Generation GPU culling pipeline



4.2.1 Visible primitive percentage

This expression defines the percentage of primitives that are visible after culling.

For efficient 3D content, it is expected that only 50% of primitives are visible because back-face culling is used to remove half of each model.

- A significantly higher visibility rate indicates that the facing test might not be enabled.
- A significantly lower visibility rate indicates that geometry is being culled for other reasons, which is often possible to optimize. Use the individual culling counters for a more detailed breakdown.

```
max(min((($MaliPrimitiveCullingVisiblePrimitives /
($MaliPrimitiveCullingFacingTestCulledPrimitives +
$MaliPrimitiveCullingFrustumTestCulledPrimitives +
$MaliPrimitiveCullingSampleTestCulledPrimitives +
$MaliPrimitiveCullingScissorTestCulledPrimitives +
$MaliPrimitiveCullingVisiblePrimitives)) * 100, 100), 0)
```

4.2.2 Frustum test cull percentage

This expression defines the percentage of primitives entering the frustum test that are culled by it. Primitives that are outside of the view frustum are culled by this stage.

If a significant percentage of triangles are culled by this test we recommend reviewing application culling and batching. Test draw call bounding boxes against the frustum to cull draws that are completely out-of-frustum. Reduce the size of static batches to reduce the bounding volume of each batch, enabling better culling.

```
max(min((($MaliPrimitiveCullingFrustumTestCulledPrimitives /
($MaliPrimitiveCullingFacingTestCulledPrimitives +
$MaliPrimitiveCullingFrustumTestCulledPrimitives +
$MaliPrimitiveCullingSampleTestCulledPrimitives +
$MaliPrimitiveCullingScissorTestCulledPrimitives +
$MaliPrimitiveCullingVisiblePrimitives)) * 100, 100), 0)
```

4.2.3 Scissor test cull percentage

This expression defines the percentage of primitives entering the scissor test that are culled by it. Primitives outside of the active scissor region are killed by this stage.

```
max(min((($MaliPrimitiveCullingScissorTestCulledPrimitives /
(($MaliPrimitiveCullingFacingTestCulledPrimitives
+ $MaliPrimitiveCullingFrustumTestCulledPrimitives
+ $MaliPrimitiveCullingSampleTestCulledPrimitives +
$MaliPrimitiveCullingScissorTestCulledPrimitives +
$MaliPrimitiveCullingVisiblePrimitives) -
$MaliPrimitiveCullingFrustumTestCulledPrimitives)) * 100, 100), 0)
```

4.2.4 Facing plane test cull percentage

This expression defines the percentage of primitives entering the facing test that are culled by it. Back-facing triangles that are inside the frustum are culled by this stage.

For efficient 3D content, it is expected that 50% of primitives are culled by the facing test. If you see a significantly lower percentage, check that the facing test is properly enabled.

```
max(min(($MaliPrimitiveCullingFacingTestCulledPrimitives /
($MaliPrimitiveCullingFacingTestCulledPrimitives
+ $MaliPrimitiveCullingFrustumTestCulledPrimitives
+ $MaliPrimitiveCullingSampleTestCulledPrimitives +
$MaliPrimitiveCullingScissorTestCulledPrimitives +
$MaliPrimitiveCullingVisiblePrimitives) -
$MaliPrimitiveCullingFrustumTestCulledPrimitives -
$MaliPrimitiveCullingScissorTestCulledPrimitives)) * 100, 100), 0)
```

4.2.5 Sample test cull percentage

This expression defines the percentage of primitives entering the sample coverage test that are culled by it. This stage culls primitives that are so small that they hit no rasterizer sample points.

If a significant number of triangles are culled at this stage, the application is using geometry meshes that are too complex for their screen coverage. Use schemes such as mesh level-of-detail to select simplified meshes as objects move further away from the camera.


```
max(min(($MaliPrimitiveCullingSampleTestCulledPrimitives /
($MaliPrimitiveCullingFacingTestCulledPrimitives
+ $MaliPrimitiveCullingFrustumTestCulledPrimitives
+ $MaliPrimitiveCullingSampleTestCulledPrimitives +
$MaliPrimitiveCullingScissorTestCulledPrimitives +
$MaliPrimitiveCullingVisiblePrimitives) -
$MaliPrimitiveCullingFrustumTestCulledPrimitives -
$MaliPrimitiveCullingScissorTestCulledPrimitives -
$MaliPrimitiveCullingFacingTestCulledPrimitives)) * 100, 100), 0)
```

4.3 Vertex shading

This GPU uses an optimized vertex processing pipeline. In this pipeline, the vertex position is computed before culling. The remaining vertex shader outputs for any visible vertices are

computed some time after culling. This additional shading might occur during either the binning phase or the main phase.

Figure 4-2: Arm 5th Generation GPU tiling pipeline

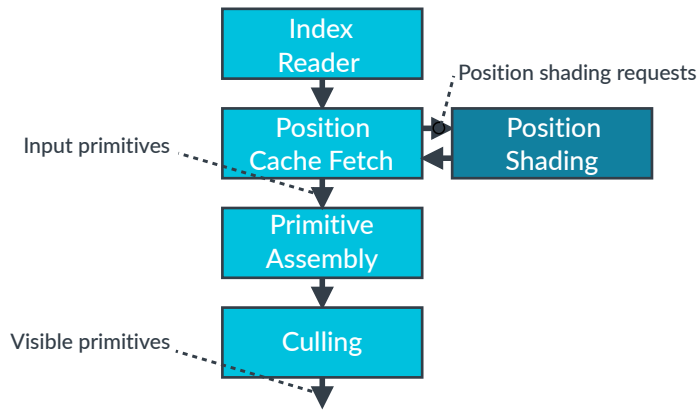

This pipeline uses a post-transform vertex cache, which contains the positions of recently shaded vertices, to avoid reshading vertices that are common to multiple primitives. Poor temporal locality of index reuse can result in a vertex being shaded multiple times, because it is evicted from the cache before it is reused.

4.3.1 Position shader thread invocations

This expression defines the number of position shader thread invocations.

```
$MaliTilerShadingRequestsPositionShadingRequests * 16
```

4.3.2 Varying shader thread invocations

This expression defines the number of varying shader thread invocations triggered during the binning phase.

This GPU can defer varying shading to the main pass, which is not visible in this counter.

```
$MaliTilerShadingRequestsVaryingShadingRequests * 16
```

4.4 Vertex shading efficiency

Normalized versions of the position shading counter shows the amount of shading per primitive, which gives a direct measure of mesh encoding efficiency.

4.4.1 Position threads per input primitive

This expression defines the number of position shader threads per input primitive.

Efficient meshes with a good vertex reuse have average less than 1.5 vertices shaded per triangle, as vertex computation is shared by multiple primitives. Minimize this number by reusing vertices for nearby primitives, improving temporal locality of index reuse, and avoiding unused values in the active index range.

```
($MaliTilerShadingRequestsPositionShadingRequests *  
16) / ($MaliPrimitiveCullingFacingTestCulledPrimitives  
+ $MaliPrimitiveCullingFrustumTestCulledPrimitives  
+ $MaliPrimitiveCullingSampleTestCulledPrimitives +  
$MaliPrimitiveCullingScissorTestCulledPrimitives +  
$MaliPrimitiveCullingVisiblePrimitives)
```

4.5 Fragment overview

Fragment overview counters look at the requested pixel processing workload. These counters can show the total number of output pixels shaded, the average number of cycles spent per pixel, and the average overdraw factor.

It is a useful exercise to set a cycle budget for an application, measured in terms of cycles per pixel. Compute the maximum cycle budget using this equation:

```
shaderCyclesPerSecond = MaliCoreCount MaliFrequency  
pixelsPerSecond = Screen_Resolution * Target_FPS  
// Maximum cycle budget assuming perfect scheduling  
maxBudget = shaderCyclesPerSecond / pixelsPerSecond  
// Real-world cycle budget assuming 85% utilization  
realBudget = 0.85 * maxBudget
```

Setting a cycle budget helps manage expectations of what is possible. For example, consider a mass-market device with a 3 core GPU running at 500MHz. At 1080p60 this device has a cycle budget of just 10 cycles per pixel. This budget must cover all processing costs, including vertex shading and fragment shading. If you want to achieve the best graphics fidelity, you must ensure you spend each cycle wisely.

4.5.1 Pixels

This expression defines the total number of pixels that are shaded by the GPU, including on-screen and off-screen render passes.

This measure can be a slight overestimate because it assumes all pixels in each active 64x64 pixel region are shaded. If the rendered region does not align with 64 pixel aligned boundaries, then this metric includes pixels that are not actually shaded.

```
$MaliGPUTasksMainPhaseTasks * 4096
```

4.5.2 Average cycles per pixel

This expression defines the average number of GPU cycles being spent per pixel rendered. This includes the cost of all shader stages.

It is a useful exercise to set a cycle budget for each render pass in your application, based on your target resolution and frame rate. Rendering 1080p60 is possible with an entry-level device, but you have a small number of cycles per pixel to work so must use them efficiently.

```
$MaliGPUCyclesGPUActive / ($MaliGPUTasksMainPhaseTasks * 4096)
```

4.5.3 Fragments per pixel

This expression computes the number of fragments shaded per output pixel.

GPU processing cost per pixel accumulates with the layer count. High overdraw can build up to a significant processing cost, especially when rendering to a high-resolution framebuffer. Minimize overdraw by rendering opaque objects front-to-back and minimizing use of blended transparent layers.

```
$MaliShaderThreadsAllFragmentThreads / ($MaliGPUTasksMainPhaseTasks * 4096)
```

4.6 Fragment prepass properties

It is important that as many fragments as possible are removed by early ZS (depth and stencil) testing, or by fragment prepass hidden surface removal.

To maximize the efficiency of fragment prepass hidden surface removal applications must ensure that as many draw calls as possible are eligible occluders, and as few as possible are using draw states that makes them ineligible for culling or that would terminate the prepass completely.

4.6.1 Fragment prepass primitive percentage

This expression defines the percentage of primitives that are processed by the fragment prepass.

A low percentage here indicates a potential inefficiency. Review application draw call settings to ensure compatibility with the fragment prepass requirements.

```
max(min(($MaliFragmentPrimitivesLoadedPrepassPrimitives /  
  (($MaliFragmentPrimitivesLoadedPrimitives +  
  $MaliFragmentPrimitivesPrepassCulledPrimitives) -  
  $MaliFragmentPrimitivesLoadedPrepassPrimitives)) * 100, 100), 0)
```

4.6.2 Fragment prepass primitive culling percentage

This expression defines the percentage of primitives in the main pass that are culled by the fragment prepass.

A high percentage here indicates a high percentage of geometry is occluded by opaque occluders, which might indicate opportunities for improved draw culling.

```
max(min(($MaliFragmentPrimitivesPrepassCulledPrimitives /  
  (($MaliFragmentPrimitivesLoadedPrimitives +  
  $MaliFragmentPrimitivesPrepassCulledPrimitives) -  
  $MaliFragmentPrimitivesLoadedPrepassPrimitives)) * 100, 100), 0)
```

4.6.3 Fragment prepass uncullable primitive percentage

This expression defines the percentage of primitives that are not eligible for fragment prepass hidden surface removal culling.

A high percentage here indicates a potential inefficiency. Review application draw call settings to ensure compatibility with the fragment prepass requirements.

```
max(min(($MaliFragmentPrimitivesPrepassUncullablePrimitives /  
  (($MaliFragmentPrimitivesLoadedPrimitives +  
  $MaliFragmentPrimitivesPrepassCulledPrimitives) -  
  $MaliFragmentPrimitivesLoadedPrepassPrimitives)) * 100, 100), 0)
```

4.6.4 Fragment prepass warp percentage

This expression defines the percentage of warps that are processed by the fragment prepass relative to the main pass.

A high percentage here indicates a potential inefficiency. It can indicate that a high percentage of draw calls require prepass shaders due to use of shader alpha-testing or alpha-to-coverage. It can also indicate that a high percentage of geometry is being culled by hidden surface removal.

```
max(min(($MaliShaderWarpsFragmentPrepassWarps / ($MaliShaderWarpsFragmentWarps - $MaliShaderWarpsFragmentPrepassWarps)) * 100, 100), 0)
```

4.6.5 Fragment main pass stall percentage

This expression defines the percentage of cycles where the fragment main pass is stalled waiting for the fragment prepass to complete.

A high percentage here indicates that the fragment prepass is a bottleneck. This can be caused by a high amount of geometry or a high number of primitives needing prepass shading.

```
max(min(($MaliShaderCoreStallCyclesFragmentMainPassStall / $MaliShaderCoreCyclesMainPhaseActive) * 100, 100), 0)
```

4.7 Fragment shader invocation rate

Applications can use sample-rate shading and variable-rate shading to increase or reduce the number of fragment shader invocations per covered pixel. This counter measures the average shading rate seen in the application.

4.7.1 Fragment shading rate

This expression defines the percentage of coarse quads generated relative to the number of fine quads that were rasterized. Coarse quads cover a 2x2 fragment region. Fine quads cover a 2x2 pixel region.

The fragment shading rate is lower than 100% if the application uses variable-rate shading to reduce shading rate.


The fragment shading rate is higher than 100% if the application uses sample-rate shading to increase shading rate for a multi-sampled render.

```
max(min(($MaliFragmentQuadsRasterizedCoarseQuads / $MaliFragmentQuadsRasterizedFineQuads) * 100, 100), 0)
```

5. Shader core data path

Each shader core has two parallel data paths for issuing threads to the core, one for compute and binning phase workloads and one for main phase workloads. These counters track the thread issue for each path, and their relative scheduling.

Figure 5-1: Arm 5th Generation GPU shader core

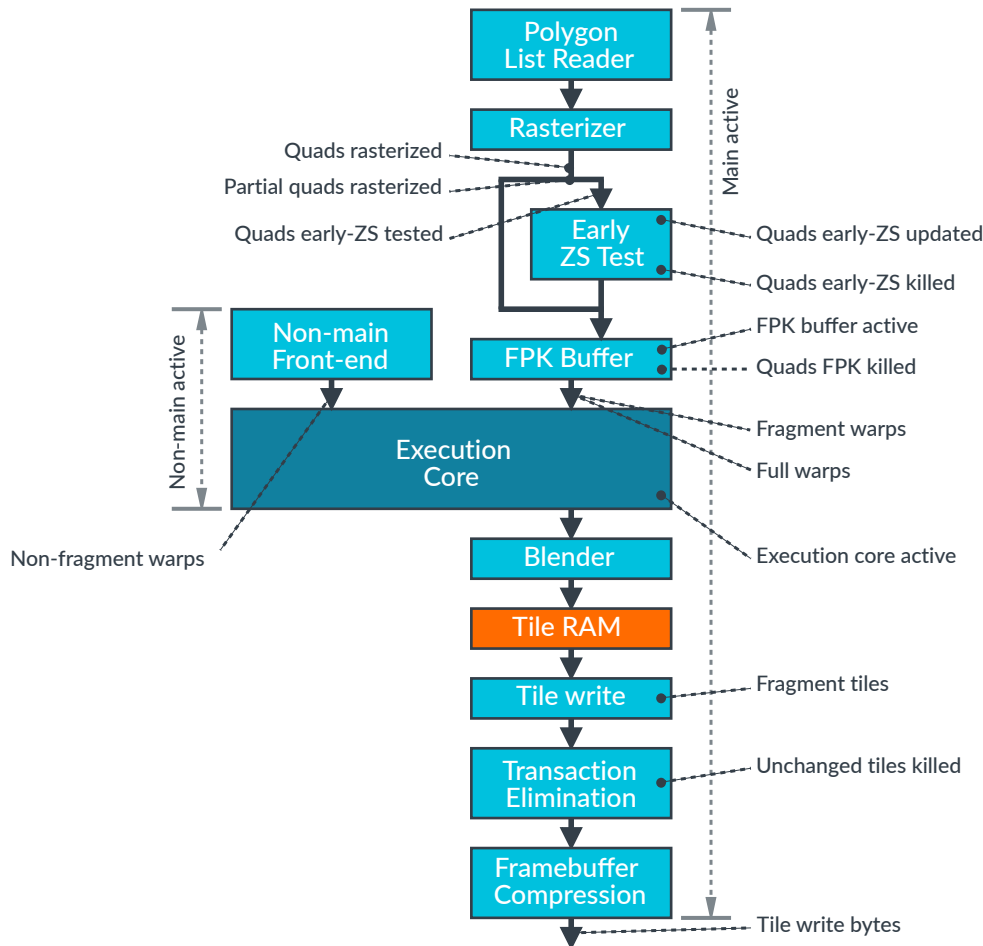

5.1 Shader core workload

The warp counters count the number of shader warps issued for the two workload types.

5.1.1 Non-fragment warps

This counter increments for every created non-fragment warp. For this GPU, a warp contains 16 threads.

For compute shaders, to ensure full utilization of the warp capacity, work groups must be a multiple of warp size.

```
$MaliShaderWarpsNonFragmentWarps
```

5.1.2 Fragment warps

This counter increments for every created fragment warp. For this GPU, a warp contains 16 threads.

Fragment warps are populated with fragment quads, where each quad corresponds to a 2x2 fragment region from a single triangle. Threads in a quad which correspond to a sample point outside of the triangle still consume shader resource, which makes small triangles disproportionately expensive.

```
$MaliShaderWarpsFragmentWarps
```

5.2 Shader core throughput

The throughput metrics show the average number of cycles it takes to get a single thread shaded by the shader core. These metrics show average throughput, not average computational cost, including the impact of processing latency, memory latency, and any resource sharing inside the shader core.

5.2.1 Average cycles per non-fragment thread

This expression defines the average number of shader core cycles per non-fragment thread.

This measurement captures the overall shader core throughput, not the shader processing cost. It will be impacted by cycles lost to stalls that could not be hidden by other processing. In addition, it will be impacted by any fragment workloads that are running concurrently in the shader core.

```
$MaliShaderCoreCyclesComputeOrBinningPhaseActive / ($MaliShaderWarpsNonFragmentWarps * 16)
```

5.2.2 Average cycles per fragment thread

This expression defines the average number of shader core cycles per fragment thread.

This measurement captures the overall shader core throughput, not the shader processing cost. It will be impacted by cycles lost to stalls that could not be hidden by other processing. In addition, it will be impacted by any fragment workloads that are running concurrently in the shader core.

```
$MaliShaderCoreCyclesMainPhaseActive / (($MaliShaderWarpsFragmentWarps -  
$MaliShaderWarpsFragmentPrepassWarps) * 16)
```

5.3 Shader core data path utilization

The data path utilization counters show the total activity level of the major data paths in the shader core. Identifying the dominant workload type helps to target optimizations. Identifying lack of parallelism can confirm that there are scheduling problems.

5.3.1 Shader core usage

This expression defines the percentage usage of the shader core, relative to the top-level GPU clock. This counter increments every shader core clock cycle when any of the shader core queues contain work.

To improve energy efficiency, some systems clock the shader cores at a lower frequency than the GPU top-level components. In these systems, the maximum achievable usage value is the clock ratio between the GPU top-level clock and the shader clock. For example, a GPU with an 800MHz top-level clock and a 400MHz shader clock can achieve a maximum usage of 50%.

```
max(min(($MaliShaderCoreCyclesAnyWorkloadActive / $MaliConstantsShaderCoreCount /  
$MaliGPUCyclesGPUActive) * 100, 100), 0)
```

5.3.2 Compute or binning phase utilization

This expression defines the percentage utilization of the shader core compute or binning phase path. This counter measures any cycle that a compute or binning phase workload is active in the fixed-function front-end or programmable core.

```
max(min(($MaliShaderCoreCyclesComputeOrBinningPhaseActive /  
$MaliShaderCoreCyclesAnyWorkloadActive) * 100, 100), 0)
```

5.3.3 Main phase utilization

This expression defines the percentage utilization of the shader core main phase path. This counter measures any cycle that a main phase workload is active in the fixed-function front-end, fixed-function back-end, or programmable core.

```
max(min(($MaliShaderCoreCyclesMainPhaseActive /
$MaliShaderCoreCyclesAnyWorkloadActive) * 100, 100), 0)
```

5.3.4 Fragment FPK buffer utilization

This expression defines the percentage of cycles where the Forward Pixel Kill (FPK) quad buffer contains at least one fragment quad. This buffer is located after early ZS but before the programmable core.

During fragment shading this counter must be close to 100%. This indicates that the fragment front-end is able to keep up with the shader core shading rate. This counter commonly drops below 100% for three reasons:

- The running workload has many empty tiles with no geometry to render. Empty tiles are common in shadow maps, for any screen region with no shadow casters.
- The application consists of simple shaders but a high percentage of microtriangles. This combination causes the shader core to complete fragments faster than they are rasterized, so the quad buffer starts to drain.
- The application consists of layers which stall at early ZS because of a dependency on an earlier fragment layer which is still in flight. Stalled layers prevent new fragments entering the quad buffer, so the quad buffer starts to drain.

```
max(min(($MaliShaderCoreCyclesFragmentFPKBufferActive /
$MaliShaderCoreCyclesMainPhaseActive) * 100, 100), 0)
```

5.3.5 Execution core utilization

This expression defines the percentage utilization of the programmable core, measuring cycles where the shader core contains at least one warp. A low utilization here indicates lost performance, because there are spare shader core cycles that are unused.

In some use cases an idle core is unavoidable. For example, a clear color tile that contains no shaded geometry, or a shadow map that is resolved entirely using early ZS depth updates.

Improve programmable core utilization by parallel processing of the GPU work queues, running overlapping workloads from multiple render passes. Also aim to keep the FPK buffer utilization as high as possible, ensuring constant forward-pressure on fragment shading.

```
max(min(($MaliShaderCoreCyclesExecutionCoreActive /
$MaliShaderCoreCyclesAnyWorkloadActive) * 100, 100), 0)
```


6. Shader core functional units

A shader core consists of multiple parallel processing units. Performance counters can track utilization and workload characteristics for all the major processing units, allowing developers to find both bottlenecks and content inefficiencies to optimize.

For shader-bound content, the functional unit with the highest loading is likely to be the bottleneck. To improve performance, you can reduce the number of operations of that type in the shader. Alternatively, reduce the precision of the operations to use 8 and 16-bit types so that multiple operations are performed in parallel.

For thermally bound content, reducing the critical path load gives the biggest gain as it allows use of a lower operating frequency. However, reducing load on any functional unit helps improve energy efficiency.

Figure 6-1: Arm 5th Generation GPU shader core

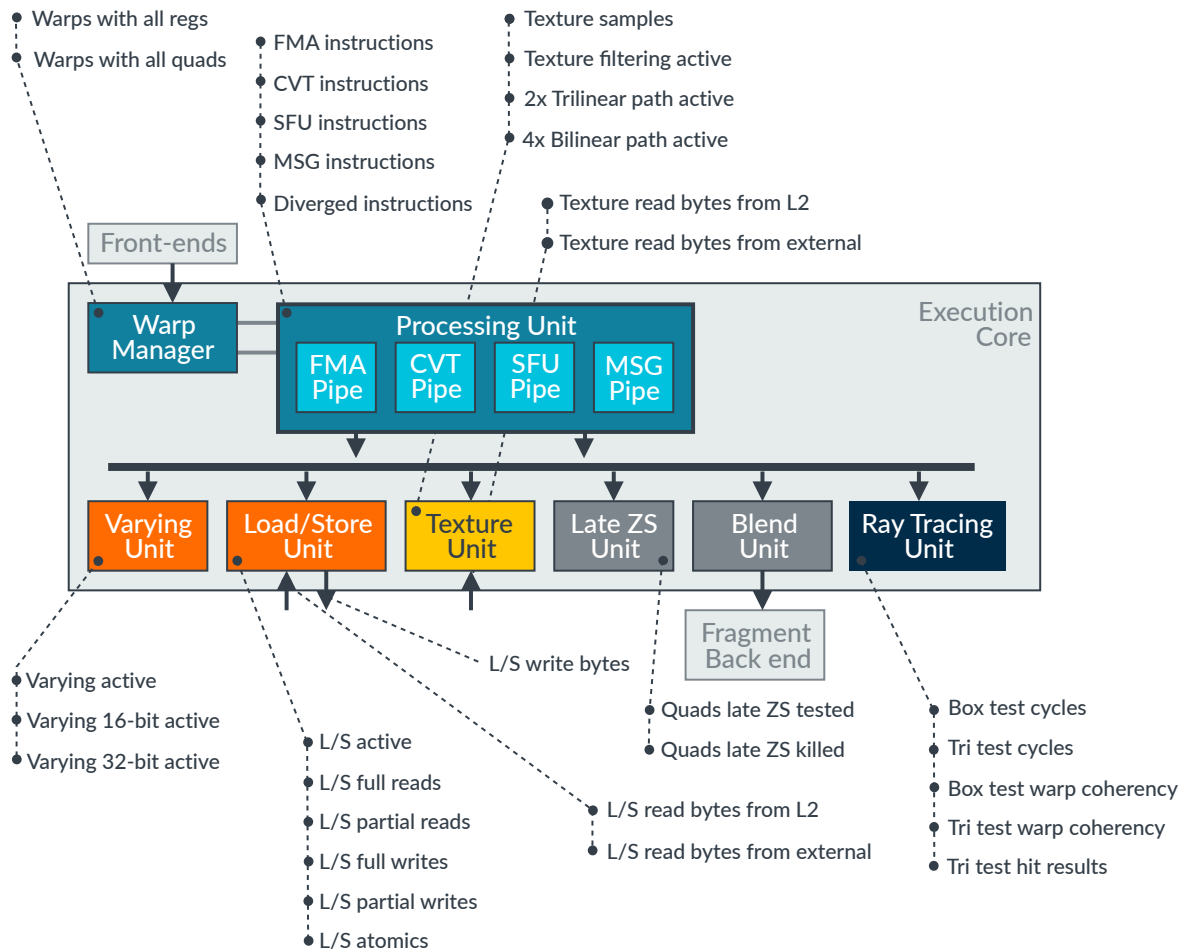

6.1 Functional unit utilization

Functional unit utilization counters provide normalized views of the functional unit activity inside the shader core. The functional units run in parallel. To improve performance, target the most heavily utilized functional unit for optimization. Although it might not help performance, reducing the load of any unit improves energy efficiency.

6.1.1 Arithmetic unit utilization

This expression estimates the percentage utilization of the arithmetic unit in the programmable core.

The most effective technique for reducing arithmetic load is reducing the complexity of your shader programs. Using narrower 8 and 16-bit data types can also help, as it allows multiple operations to be processed in parallel.

```
max(min((max(($MaliALUInstructionsFMAPipeInstructions +
$MaliALUInstructionsCVTPipeInstructions + $MaliALUInstructionsSFUPipeInstructions)
- $MaliALUIssuesSlot1Issues, max($MaliALUIssuesSlot1Issues,
$MaliALUInstructionsSFUPipeInstructions * 4)) /
$MaliShaderCoreCyclesExecutionCoreActive) * 100, 100), 0)
```

6.1.2 Varying unit utilization

This expression defines the percentage utilization of the varying unit.

The most effective technique for reducing varying load is reducing the number of interpolated values read by the fragment shading. Increasing shader usage of 16-bit input variables also helps, as they can be interpolated as twice the speed of 32-bit variables.

```
max(min((((($MaliVaryingUnitIssues32BitInterpolationIssues /
4) + ($MaliVaryingUnitIssues16BitInterpolationIssues / 4)) /
$MaliShaderCoreCyclesExecutionCoreActive) * 100, 100), 0)
```

6.1.3 Texture unit utilization

This expression defines the percentage utilization of the texturing unit.

The most effective technique for reducing texturing unit load is reducing the number of texture samples read by your shaders. Using 32bpp color formats, and the ASTC decode mode extensions to select a 32bpp intermediate precision, can reduce cache access cost. Using simpler texture filters can reduce filtering cost. Using a 16bit per component sampler result can reduce data return cost.

```
max(min(((max($MaliTextureUnitCyclesTextureFilteringActive,
max($MaliTextureUnitCacheCyclesCacheLookupActive,
```

```
max($MaliTextureUnitCacheCyclesSimpleLoadActive,
max($MaliTextureUnitCacheCyclesComplexLoadActive,
max($MaliTextureUnitBusInputBeats, max($MaliTextureUnitBusOutputBeats,
max($MaliTextureUnitCacheCyclesL1OutputActive,
max($MaliTextureUnitCacheCyclesL1LookupActive,
$MaliTextureUnitCyclesIndexCalculationActive)))))) /
($MaliShaderCoreCyclesExecutionCoreActive) * 100) /
($MaliShaderCoreCyclesExecutionCoreActive) * 100, 100), 0)
```

6.1.4 Load/store unit utilization

This expression defines the percentage utilization of the load/store unit. The load/store unit is used for general-purpose memory accesses, including vertex attribute access, buffer access, work group shared memory access, and stack access. This unit also implements imageLoad/Store and atomic access functionality.

For traditional graphics content the most significant contributor to load/store usage is vertex data. Arm recommends simplifying mesh complexity, using fewer triangles, fewer vertices, and fewer bytes per vertex.

Shaders that spill to stack are also expensive, as any spilling is multiplied by the large number of parallel threads that are running. You can use the Mali Offline Compiler to check your shaders for spilling.

```
max(min(((($MaliLoadStoreUnitCyclesFullRead + $MaliLoadStoreUnitCyclesPartialRead
+ $MaliLoadStoreUnitCyclesFullWrite + $MaliLoadStoreUnitCyclesPartialWrite +
$MaliLoadStoreUnitCyclesAtomicAccess) / $MaliShaderCoreCyclesExecutionCoreActive) *
100, 100), 0)
```

6.1.5 Ray tracing unit utilization

This expression defines the percentage utilization of the ray tracing unit.

The most effective technique for reducing ray tracing load is reducing the amount of geometry in the acceleration structure, and ensuring that rays issued in each warp are spatially coherent.

```
max(min((max($MaliRayTracingUnitCyclesBoxTesterActive,
$MaliRayTracingUnitCyclesTriangleTesterActive) /
$MaliShaderCoreCyclesExecutionCoreActive) * 100, 100), 0)
```

6.2 Functional unit backpressure

Functional unit backpressure counters show the percentage of cycles where the shader program was trying to issue a new request to a functional unit but the unit was too busy to accept the request.

6.2.1 Varying unit backpressure percentage

This expression defines the percentage of shader core cycles where new work could not be sent to the varying unit. A high percentage indicates that the unit is overloaded and might be a bottleneck.

```
max(min(($MaliShaderCoreBackpressureCyclesVaryingUnitBackpressure /
$MaliShaderCoreCyclesExecutionCoreActive) * 100, 100), 0)
```

6.2.2 Texture unit backpressure percentage

This expression defines the percentage of shader core cycles where new work could not be sent to the texture unit. A high percentage indicates that the unit is overloaded and might be a bottleneck.

```
max(min(($MaliShaderCoreBackpressureCyclesTextureUnitBackpressure /
$MaliShaderCoreCyclesExecutionCoreActive) * 100, 100), 0)
```

6.2.3 Load/store unit backpressure percentage

This expression defines the percentage of shader core cycles where new work could not be sent to the load/store unit. A high percentage indicates that the unit is overloaded and might be a bottleneck.

```
max(min(($MaliShaderCoreBackpressureCyclesLoadStoreUnitBackpressure /
$MaliShaderCoreCyclesExecutionCoreActive) * 100, 100), 0)
```

6.2.4 Attribute unit backpressure percentage

This expression defines the percentage of shader core cycles where new work could not be sent to the attribute unit. A high percentage indicates that the unit is overloaded and might be a bottleneck.

```
max(min(($MaliShaderCoreBackpressureCyclesAttributeUnitBackpressure /
$MaliShaderCoreCyclesExecutionCoreActive) * 100, 100), 0)
```

6.2.5 ZS unit backpressure percentage

This expression defines the percentage of shader core cycles where new work could not be sent to the depth/stencil test unit. A high percentage indicates that the unit is overloaded and might be a bottleneck.

```
max(min(($MaliShaderCoreBackpressureCyclesZSUnitBackpressure /
$MaliShaderCoreCyclesExecutionCoreActive) * 100, 100), 0)
```

6.2.6 Blend unit backpressure percentage

This expression defines the percentage of shader core cycles where new work could not be sent to the blend unit. A high percentage indicates that the unit is overloaded and might be a bottleneck.

```
max(min(($MaliShaderCoreBackpressureCyclesBlendUnitBackpressure /
$MaliShaderCoreCyclesExecutionCoreActive) * 100, 100), 0)
```

6.3 Shader program properties

Shader program property counters track multiple properties related to the running shader program instructions. These counters are used to identify sources of program inefficiency.

6.3.1 Narrow arithmetic percentage

This expression defines the percentage of arithmetic instructions that operate on 8/16-bit types. These are more energy efficient, and require fewer registers for variable storage, than 32-bit operations.

```
max(min(($MaliALUInstructionsNarrowInstructions /
($MaliALUInstructionsFMAPipeInstructions + $MaliALUInstructionsCVTPipeInstructions
+ $MaliALUInstructionsSFUPipeInstructions)) * 100, 100), 0)
```

6.3.2 Warp divergence percentage

This expression defines the percentage of instructions that have control flow divergence across the warp.

```
max(min(($MaliALUInstructionsDivergedInstructions /
($MaliALUInstructionsFMAPipeInstructions + $MaliALUInstructionsCVTPipeInstructions
+ $MaliALUInstructionsSFUPipeInstructions)) * 100, 100), 0)
```

6.3.3 All registers warp percentage

This expression defines the percentage of warps that use more than 32 registers, requiring the full register allocation of 64 registers. Warps that require more than 32 registers halve the peak thread occupancy of the shader core, and can make shader performance more sensitive to cache misses and memory stalls.

```
max(min(($MaliShaderWarpsAllRegisterWarps / ($MaliShaderWarpsNonFragmentWarps +
$MaliShaderWarpsFragmentWarps)) * 100, 100), 0)
```


6.3.4 Shader blend percentage

This expression defines the percentage of fragments that use shader-based blending, rather than the fixed-function blend path. These fragments are caused by the application using color formats, or advanced blend equations, which the fixed-function blend path does not support.

Vulkan shaders that use software blending do not show up in this data, because the blend is inlined in to the main body of the shader program.

```
max(min(((MaliALUInstructionsBlendShaderCalls * 4) / MaliShaderWarpsFragmentWarps)
* 100, 100), 0)
```

6.4 Shader workload properties

Shader workload property counters track multiple properties of the running workload that can impact efficiency. These counters are used to identify sources of inefficiency that are not related to the shader program code.

6.4.1 Partial coverage percentage

This expression defines the percentage of fragment quads that contain samples with no coverage. A high percentage can indicate that the content has a high density of small triangles, which are expensive to process. To avoid this, use mesh level-of-detail algorithms to select simpler meshes as objects move further from the camera.

```
max(min((MaliFragmentQuadsPartialRasterizedFineQuads /
MaliFragmentQuadsRasterizedFineQuads) * 100, 100), 0)
```

6.4.2 Fragment warp occupancy

This expression measures the thread occupancy of the fragment warps in percent. Threads are counted as active if they are part of a coarse quad, even if they have no sample coverage.

```
max(min((MaliShaderThreadsAllFragmentThreads / (MaliShaderWarpsFragmentWarps *
16)) * 100, 100), 0)
```

6.4.3 Full warp percentage

This expression defines the percentage of warps that have a full thread slot allocation. Note that allocated thread slots might not contain a running thread if the workload cannot fill the whole allocation.

If a high percentage of warps are not fully allocated then performance is reduced. Fully allocated warps are more likely if:

- Draw calls avoid late ZS dependency hazards.
- Draw calls use meshes with a low percentage of tiny primitives.
- Compute dispatches use work groups that are a multiple of warp size.

```
max(min(($MaliShaderWarpsFullWarps / ($MaliShaderWarpsNonFragmentWarps +
$MaliShaderWarpsFragmentWarps)) * 100, 100), 0)
```

6.4.4 Fragment shading rate

This expression defines the percentage of coarse quads generated relative to the number of fine quads that were rasterized. Coarse quads cover a 2x2 fragment region. Fine quads cover a 2x2 pixel region.

The fragment shading rate is lower than 100% if the application uses variable-rate shading to reduce shading rate.

The fragment shading rate is higher than 100% if the application uses sample-rate shading to increase shading rate for a multi-sampled render.

```
max(min(($MaliFragmentQuadsRasterizedCoarseQuads /
$MaliFragmentQuadsRasterizedFineQuads) * 100, 100), 0)
```

6.4.5 Unchanged tile kill percentage

This expression defines the percentage of tiles that are killed by the transaction elimination CRC check because the content of a tile matches the content already stored in memory.

A high percentage of tile writes being killed indicates that a significant part of the framebuffer is static from frame to frame. Consider using scissor rectangles to reduce the area that is redrawn. To help manage the partial frame updates for window surfaces consider using the EGL extensions such as:

- EGL_KHR_partial_update
- EGL_EXT_swap_buffers_with_damage

```
max(min(($MaliShaderCoreTilesKilledUnchangedTiles / (4 * $MaliShaderCoreTilesTiles))
* 100, 100), 0)
```

7. Shader core varying unit

The varying unit counters monitor the varying interpolation in fragment shaders. If the shader core utilization counters show that this unit is a bottleneck, these counters can indicate optimization opportunities.

The interpolator has one or more 32-bit data paths per thread. Each data path can interpolate a scalar 32-bit value or a vec2 16-bit value in a single cycle. Arm recommends using 16-bit varying inputs to fragment shaders whenever possible. We also recommend packing 16-bit values into vec2 or vec4 values. For example, a single vec4 interpolates faster than a separate vec3 and scalar float pair.

7.1 Varying unit usage

These counters show the usage of the varying interpolation unit, and the breakdown by data type size.

7.1.1 Varying unit issue cycles

This expression defines the total number of cycles where the varying interpolator is issuing operations.

```
($MaliVaryingUnitIssues32BitInterpolationIssues / 4) +  
($MaliVaryingUnitIssues16BitInterpolationIssues / 4)
```

7.1.2 16-bit interpolation active cycles

This counter increments for every 16-bit interpolation cycle processed by the varying unit.

```
$MaliVaryingUnitIssues16BitInterpolationIssues / 4
```

7.1.3 32-bit interpolation active cycles

This counter increments for every 32-bit interpolation cycle processed by the varying unit. 32-bit interpolation is half the performance of 16-bit interpolation, so if content is varying bound consider reducing precision of varying inputs to fragment shaders.

```
$MaliVaryingUnitIssues32BitInterpolationIssues / 4
```

8. Shader core texture unit

The texture unit counters show use of all texture sampling and filtering in shaders. If the shader core utilization counters show that this unit is a bottleneck, these counters can indicate optimization opportunities.

8.1 Texture unit usage

These counters show the usage of the texturing unit, and the average number of cycles per instruction.

8.1.1 Texture filtering cycles

This counter increments for every texture filtering issue cycle. This GPU can do 8x 2D bilinear texture samples per clock. More complex filtering operations are composed of multiple 2D bilinear samples, and take proportionally more filtering time to complete. The scaling factors for more expensive operations are:

- 2D trilinear filtering runs at half speed.
- 3D bilinear filtering runs at half speed.
- 3D trilinear filtering runs at quarter speed.

Anisotropic filtering makes up to MAX_ANISOTROPY filtered subsamples of the current base filter type. For example, using trilinear filtering with a MAX_ANISOTROPY of 3 will require up to 6 bilinear filters.

```
$MaliTextureUnitCyclesTextureFilteringActive
```

8.1.2 Texture filtering cycles per instruction

This expression defines the average number of texture filtering cycles per instruction. For texture-limited content that has a CPI higher than the optimal throughput of this core (8 samples per cycle), consider using simpler texture filters. See *Texture unit issue cycles* for details of the expected performance for different types of operation.

```
( (max($MaliTextureUnitCyclesTextureFilteringActive,  
max($MaliTextureUnitCacheCyclesCacheLookupActive,  
max($MaliTextureUnitCacheCyclesSimpleLoadActive,  
max($MaliTextureUnitCacheCyclesComplexLoadActive,  
max($MaliTextureUnitBusInputBeats, max($MaliTextureUnitBusOutputBeats,  
max($MaliTextureUnitCacheCyclesL1OutputActive,  
max($MaliTextureUnitCacheCyclesL1LookupActive,  
$MaliTextureUnitCyclesIndexCalculationActive)))))) /  
$MaliShaderCoreCyclesExecutionCoreActive) * 100) /
```

```
((($MaliTextureUnitQuadsTextureMessages * 2) -  
$MaliTextureUnitQuadsTextureMessagesWithSingleQuad) * 4)
```

8.2 Texture unit bus utilization

This counter shows how heavily loaded the input and output interface between the shader core and the texture unit is.

8.2.1 Texture input bus utilization

This expression defines the percentage load on the texture message input bus.

If bus utilization is higher than the filtering unit utilization, your content might be limited by texture operation parameter passing. Requests that require more input parameters, such as 3D accesses, array accesses, and accesses using an explicit level-of-detail, place a higher load on the bus than basic 2D texture operations.

```
max(min(($MaliTextureUnitBusInputBeats / $MaliShaderCoreCyclesExecutionCoreActive) *  
100, 100), 0)
```

8.2.2 Texture output bus utilization

This expression defines the percentage load on the texture message output bus.

If bus utilization is higher than the filtering unit utilization, your content might be limited by texture result return. Requests that require higher precision sampler return type place a higher load on the bus, so it is recommended to use a 16-bit sampler precision whenever possible.

```
max(min(($MaliTextureUnitBusOutputBeats / $MaliShaderCoreCyclesExecutionCoreActive)  
* 100, 100), 0)
```

8.3 Texture unit memory usage

These counters show the average number of bytes read from the L2 cache or external memory per texture sample.

8.3.1 Texture unit bytes read from L2 per texture cycle

This expression defines the average number of bytes read from the L2 memory system by the texture unit per filtering cycle. This metric indicates how effectively textures are being cached in the L1 texture cache.

If more bytes are being requested per access than you would expect for the format you are using, review your texture settings. Arm recommends:

- Using mipmaps for offline generated textures.
- Using ASTC or ETC compression for offline generated textures.
- Replacing runtime framebuffer formats with narrower formats.
- Reducing use of imageLoad/Store to allow framebuffer compression.
- Reducing use of negative LOD bias used for texture sharpening.
- Reducing use of anisotropic filtering, or reducing the level of MAX_ANISOTROPY used.

```
($MaliShaderCoreL2ReadsTextureL2ReadBeats * 16) /  
$MaliTextureUnitCyclesTextureFilteringActive
```

8.3.2 Texture unit bytes read from external memory per texture cycle

This expression defines the average number of bytes read from the external memory system by the texture unit per filtering cycle. This metric indicates how effectively textures are being cached in the L2 cache.

If more bytes are being requested per access than you would expect for the format you are using, review your texture settings. Arm recommends:

- Using mipmaps for offline generated textures.
- Using ASTC or ETC compression for offline generated textures.
- Replacing runtime framebuffer formats with narrower formats.
- Reducing use of imageLoad/Store to allow framebuffer compression.
- Reducing use of negative LOD bias used for texture sharpening.
- Reducing use of anisotropic filtering, or reducing the level of MAX_ANISOTROPY used.

```
($MaliShaderCoreExternalReadsTextureExternalReadBeats * 16) /  
$MaliTextureUnitCyclesTextureFilteringActive
```

9. Shader core load/store unit

The load/store unit counters show the use of the general-purpose L1 data cache. This unit is used for all shader data accesses except for texturing, programmatic framebuffer read/write, and end-of-tile framebuffer write-back.

9.1 Load/store unit usage

The unit usage counters show the content behavior in the load/store unit. These counters show the number of reads and writes being made, and whether the accesses use the full width of the available data path.

9.1.1 Load/store unit issue cycles

This expression defines the total number of load/store cache access cycles. This counter ignores secondary effects such as cache misses, so provides the minimum possible cycle usage.

```
$MaliLoadStoreUnitCyclesFullRead + $MaliLoadStoreUnitCyclesPartialRead +  
$MaliLoadStoreUnitCyclesFullWrite + $MaliLoadStoreUnitCyclesPartialWrite +  
$MaliLoadStoreUnitCyclesAtomicAccess
```

9.1.2 Load/store unit full read issues

This counter increments for every full-width load/store cache read.

```
$MaliLoadStoreUnitCyclesFullRead
```

9.1.3 Load/store unit partial read issues

This counter increments for every partial-width load/store cache read. Partial data accesses do not make full use of the load/store cache capability. Merging short accesses together to make fewer larger requests improves efficiency. To do this in shader code:

- Use vector data loads.
- Avoid padding in strided data accesses.
- Write compute shaders so that adjacent threads in a warp access adjacent addresses in memory.

```
$MaliLoadStoreUnitCyclesPartialRead
```

9.1.4 Load/store unit full write issues

This counter increments for every full-width load/store cache write.

```
$MaliLoadStoreUnitCyclesFullWrite
```

9.1.5 Load/store unit partial write issues

This counter increments for every partial-width load/store cache write. Partial data accesses do not make full use of the load/store cache capability. Merging short accesses together to make fewer larger requests improves efficiency. To do this in shader code:

- Use vector data loads.
- Avoid padding in strided data accesses.
- Write compute shaders so that adjacent threads in a warp access adjacent addresses in memory.

```
$MaliLoadStoreUnitCyclesPartialWrite
```

9.1.6 Load/store unit atomic issues

This counter increments for every atomic access.

Atomic memory accesses are typically multicycle operations per thread in the warp, so they are exceptionally expensive. Minimize the use of atomics in performance critical code. For some types of atomic operation, it can be beneficial to perform a warp-wide reduction using subgroup operations and then use a single thread to update the atomic value.

```
$MaliLoadStoreUnitCyclesAtomicAccess
```

9.2 Load/store unit memory usage

The memory usage counters show the average number of bytes read or written to the L2 cache per load/store read or write. Use these metrics to see how effectively your workloads are using the L1 and L2 data caches.

9.2.1 Load/store unit bytes read from L2 per access cycle

This expression defines the average number of bytes read from the L2 memory system by the load/store unit per read cycle. This metric gives some idea how effectively data is being cached in the L1 load/store cache.

If more bytes are being requested per access than you would expect for the data layout you are using, review your data layout and access patterns.

```
($MaliShaderCoreL2ReadsLoadStoreL2ReadBeats * 16) /  
($MaliLoadStoreUnitCyclesFullRead + $MaliLoadStoreUnitCyclesPartialRead)
```

9.2.2 Load/store unit bytes read from external memory per access cycle

This expression defines the average number of bytes read from the external memory system by the load/store unit per read cycle. This metric indicates how effectively data is being cached in the L2 cache.

If more bytes are being requested per access than you would expect for the data layout you are using, review your data layout and access patterns.

```
($MaliShaderCoreExternalReadsLoadStoreExternalReadBeats * 16) /  
($MaliLoadStoreUnitCyclesFullRead + $MaliLoadStoreUnitCyclesPartialRead)
```

9.2.3 Load/store unit bytes written to L2 per access cycle

This expression defines the average number of bytes written to the L2 memory system by the load/store unit per write cycle.

If more bytes are being written per access than you would expect for the data layout you are using, review your data layout and access patterns to improve cache locality.

```
(( $MaliShaderCoreWritesLoadStoreWriteBackWriteBeats +  
$MaliShaderCoreWritesLoadStoreOtherWriteBeats) * 16) /  
($MaliLoadStoreUnitCyclesFullWrite + $MaliLoadStoreUnitCyclesPartialWrite)
```

10. Shader core ray tracing unit

Ray tracing unit counters show the shader use of the ray hit testing unit. This unit is used for all bounding box and triangle hit testing during ray traversal.

10.1 Ray tracing unit usage

The unit usage counters show the processing load on the box test unit and the triangle test unit. These units run in parallel, so the overall loading is the maximum of these two values.

10.1.1 Ray tracing box tester issue cycles

This counter increments for every cycle the ray tracing unit issues a box intersection operation. If this counter is a high percentage of shader core active, then shader performance might be limited by acceleration structure traversal.

The main workload for ray tracing is traversing the acceleration structure so this counter is expected to be high. If the counter is not high, and a significant number of rays are being used, it indicates that a bottleneck exists elsewhere.

```
$MaliRayTracingUnitCyclesBoxTesterActive
```

10.1.2 Ray tracing triangle tester issue cycles

This counter increments for every cycle the ray tracing unit issues a triangle intersection test. If this counter is a high percentage of shader core active, then shader performance might be limited by triangle testing.

A good acceleration structure culls most triangles using box tests higher up the tree, so that rays do not need to be tested against them. If this counter is high it might indicate an issue with either geometry complexity or acceleration structure efficiency.

```
$MaliRayTracingUnitCyclesTriangleTesterActive
```

10.2 Ray tracing unit workload properties

Acceleration structure traversal can handle different types of traversal for opaque geometry, and transparent geometry. These counters give information about the types of traversal being encountered during ray tracing.

Improve ray tracing performance by minimizing the use of transparent geometry and using traversals that terminate on first hit.

10.2.1 Ray tracing started rays

This counter increments for every ray that is started and tested against the root node in the acceleration structure.

```
$MaliRayTracingUnitRaysStartedRays
```

10.2.2 Ray tracing opaque triangle hits

This counter increments for every ray intersection with an opaque triangle.

```
$MaliRayTracingUnitTriangleWorkloadOpaqueTriangleHits
```

10.2.3 Ray tracing non-opaque triangle hits

This counter increments for every ray intersection with a non-opaque triangle.

Non-opaque triangles are more expensive to process than opaque triangles, so Arm recommends using opaque triangles in acceleration structures.

```
$MaliRayTracingUnitTriangleWorkloadNonOpaqueTriangleHits
```

10.2.4 Ray tracing ray misses

This counter increments for every ray that misses and fails to intersect during a triangle intersection test.

Most triangles that a ray misses are culled by the acceleration structure, so if this number is high try improving the acceleration structure quality. A high number for this counter might also indicate a programming error, such as using opaque triangles and requesting that opaque hits be culled.

```
$MaliRayTracingUnitRaysMissedRays
```

10.2.5 Ray tracing first hit terminations

This counter increments for every ray that terminates on its first triangle hit. Rays that terminate on first hit are more efficient to process, as they do not need to keep testing to find the closest hit.

First-hit tests are well suited to techniques that determine occlusion, such as shadow mapping. In these use cases you don't need to know which object is hit, just that an object was hit between the ray source and destination.

```
$MaliRayTracingUnitRaysFirstHitTerminatedRays
```

10.3 Ray tracing box test coherency

The ray tracing unit tests a single warp against a single bounding box. Divergent rays that do not require the current test are masked, reducing the efficiency of the warp. This histogram gives the number of active lanes per warp per box batch.

Improve ray tracing performance by ensuring rays in each warp are spatially coherent.

10.3.1 Ray tracing box nodes with 13-16 rays

This count increments for every acceleration structure box node tested when there are between 13 and 16 active rays in the warp.

```
$MaliRayTracingUnitBoxTestBoxNodesWith1316Rays
```

10.3.2 Ray tracing box nodes with 9-12 rays

This count increments for every acceleration structure box node tested when there are between 9 and 12 active rays in the warp. A high percentage of tests with low warp occupancy can indicate an issue with ray coherency. Try to group rays with similar origin, direction, and range together.

```
$MaliRayTracingUnitBoxTestBoxNodesWith912Rays
```

10.3.3 Ray tracing box nodes with 5-8 rays

This count increments for every acceleration structure box node tested when there are between 5 and 8 active rays in the warp. A high percentage of tests with low warp occupancy can indicate an issue with ray coherency. Try to group rays with similar origin, direction, and range together.

```
$MaliRayTracingUnitBoxTestBoxNodesWith58Rays
```

10.3.4 Ray tracing box nodes with 1-4 rays

This count increments for every acceleration structure box node tested when there are between 1 and 4 active rays in the warp. A high percentage of tests with low warp occupancy can indicate an issue with ray coherency. Try to group rays with similar origin, direction, and range together.

```
$MaliRayTracingUnitBoxTestBoxNodesWith14Rays
```

10.4 Ray tracing triangle test coherency

The ray tracing unit test a single warp against a single triangle. Divergent rays that do not require the current triangle test are masked, reducing the efficiency of the walk. This histogram gives the number of active rays per warp.

Improve ray tracing performance by ensuring rays in each warp are spatially coherent.

10.4.1 Ray tracing triangle batches with 13-16 rays

This count increments for every triangle batch tested when there are between 13 and 16 active rays in the warp.

```
$MaliRayTracingUnitTriangleTestTriangleBatchesWith1316Rays
```

10.4.2 Ray tracing triangle batches with 9-12 rays

This count increments for every triangle batch tested when there are between 9 and 12 active rays in the warp. A high percentage of tests with low warp occupancy can indicate an issue with ray coherency. Try to group rays with similar origin, direction, and range together.

```
$MaliRayTracingUnitTriangleTestTriangleBatchesWith912Rays
```

10.4.3 Ray tracing triangle batches with 5-8 rays

This count increments for every triangle batch tested when there are between 5 and 8 active rays in the warp. A high percentage of tests with low warp occupancy can indicate an issue with ray coherency. Try to group rays with similar origin, direction, and range together.

```
$MaliRayTracingUnitTriangleTestTriangleBatchesWith58Rays
```

10.4.4 Ray tracing triangle batches with 1-4 rays

This count increments for every triangle batch tested when there are between 1 and 4 active rays in the warp. A high percentage of tests with low warp occupancy can indicate an issue with ray coherency. Try to group rays with similar origin, direction, and range together.

```
$MaliRayTracingUnitTriangleTestTriangleBatchesWith14Rays
```

11. Shader core memory traffic

The shader core memory traffic counters show the total amount of memory access a shader core makes to the L2 cache and external memory system. If you have bandwidth issues, use the data breakdown to identify the unit making the most accesses, and target that unit for optimization.

11.1 Read access from L2 cache

The L2 memory read counters show the shader core memory read traffic that is fetched from the GPU L2 cache.

11.1.1 Front-end unit read bytes from L2 cache

This expression defines the total number of bytes read from the L2 memory system by the fragment front-end unit.

```
$MaliShaderCoreL2ReadsFragmentL2ReadBeats * 16
```

11.1.2 Load/store unit read bytes from L2 cache

This expression defines the total number of bytes read from the L2 memory system by the load/store unit.

```
$MaliShaderCoreL2ReadsLoadStoreL2ReadBeats * 16
```

11.1.3 Texture unit read bytes from L2 cache

This expression defines the total number of bytes read from the L2 memory system by the texture unit.

```
$MaliShaderCoreL2ReadsTextureL2ReadBeats * 16
```

11.2 Read access from external memory

The external memory read counters show the shader core memory read traffic that misses in the GPU cache and that is fetched from the external memory system. This data is either fetched from a layer of system cache external to the GPU, or from the main system DRAM.

11.2.1 Front-end unit read bytes from external memory

This expression defines the total number of bytes read from the external memory system by the fragment front-end unit.

```
$MaliShaderCoreExternalReadsFragmentExternalReadBeats * 16
```

11.2.2 Load/store unit read bytes from external memory

This expression defines the total number of bytes read from the external memory system by the load/store unit.

```
$MaliShaderCoreExternalReadsLoadStoreExternalReadBeats * 16
```

11.2.3 Texture unit read bytes from external memory

This expression defines the total number of bytes read from the external memory system by the texture unit.

```
$MaliShaderCoreExternalReadsTextureExternalReadBeats * 16
```

11.3 Write access

The memory write counters show the shader core memory traffic that is written into the memory system. These writes can be buffered by the GPU L2, or sent to external memory.

11.3.1 Load/store unit write bytes

This expression defines the total number of bytes written to the L2 memory system by the load/store unit.

```
($MaliShaderCoreWritesLoadStoreWriteBackWriteBeats +  
$MaliShaderCoreWritesLoadStoreOtherWriteBeats) * 16
```

11.3.2 Tile unit write bytes

This expression defines the total number of bytes written to the L2 memory system by the tile write-back unit.

```
$MaliShaderCoreWritesTileUnitWriteBeats * 16
```


12. GPU configuration

The GPU configuration counters show the hardware product configuration in the target device. For example, showing the number of shader cores present in the design.

12.1 GPU configuration counters

The configuration counters are virtual counters that you can use to scale performance results and create alternative data visualizations. For example, multiplying the per shader core workload counter series by `$MaliConstantsShaderCoreCount` would give a GPU-wide total.

12.1.1 Shader core count

This configuration constant defines the number of shader cores in the design.

```
$MaliConstantsShaderCoreCount
```

12.1.2 L2 cache slice count

This configuration constant defines the number of L2 cache slices in the design.

```
$MaliConstantsL2SliceCount
```

12.1.3 External bus beat size

This configuration constant defines the number of bytes transferred per external bus beat.

```
($MaliConstantsBusWidthBits / 8)
```